




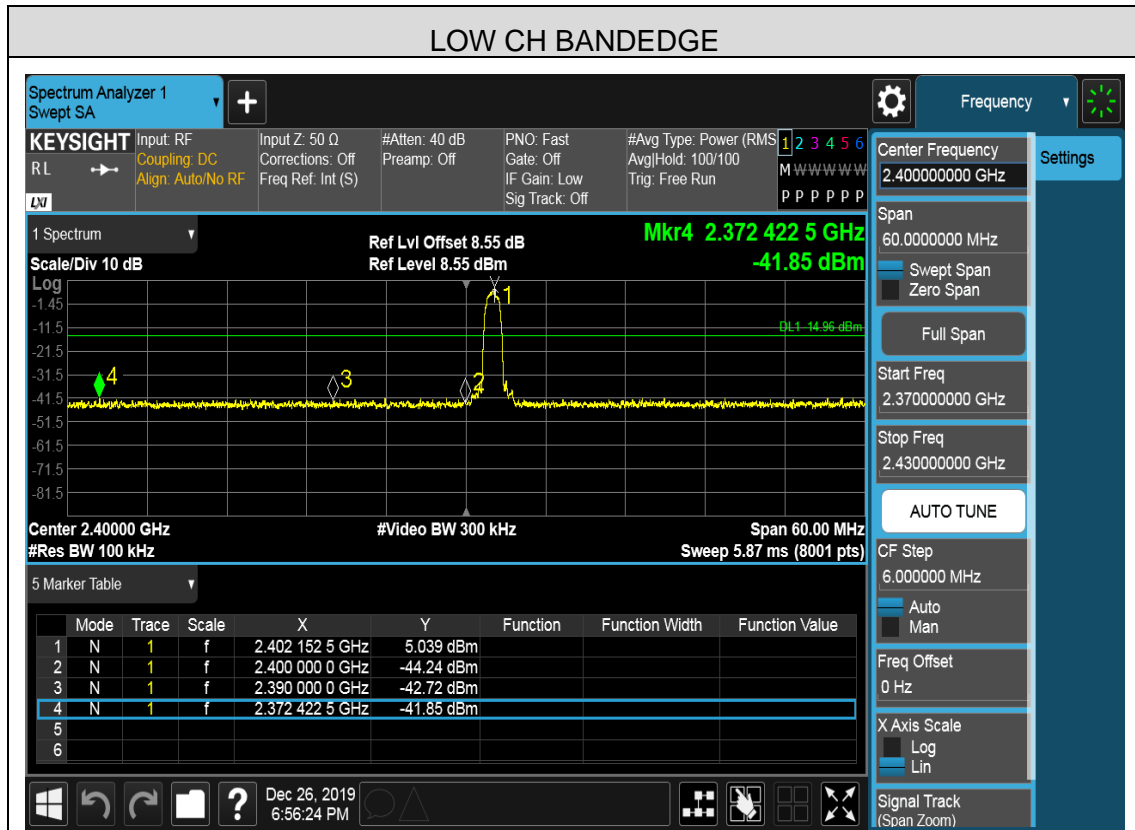



6.7.2. 8DPSK MODE



SPURIOUS EMISSIONS, LOW CHANNEL

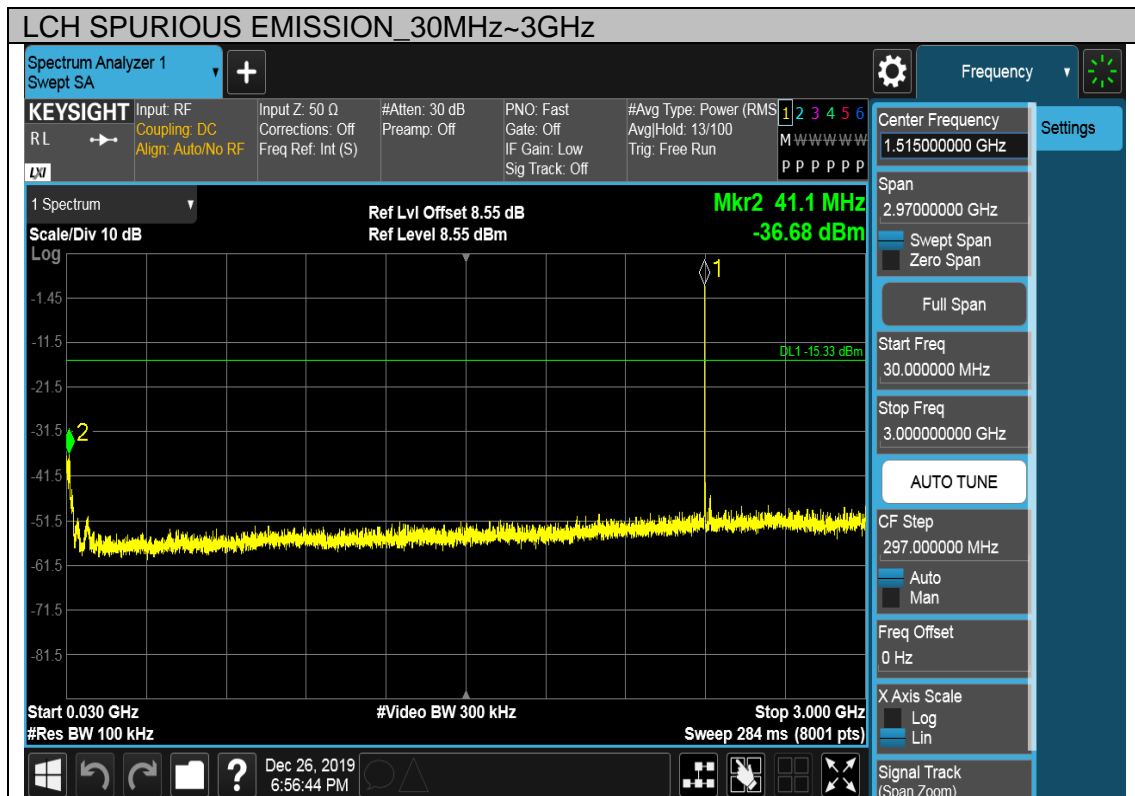

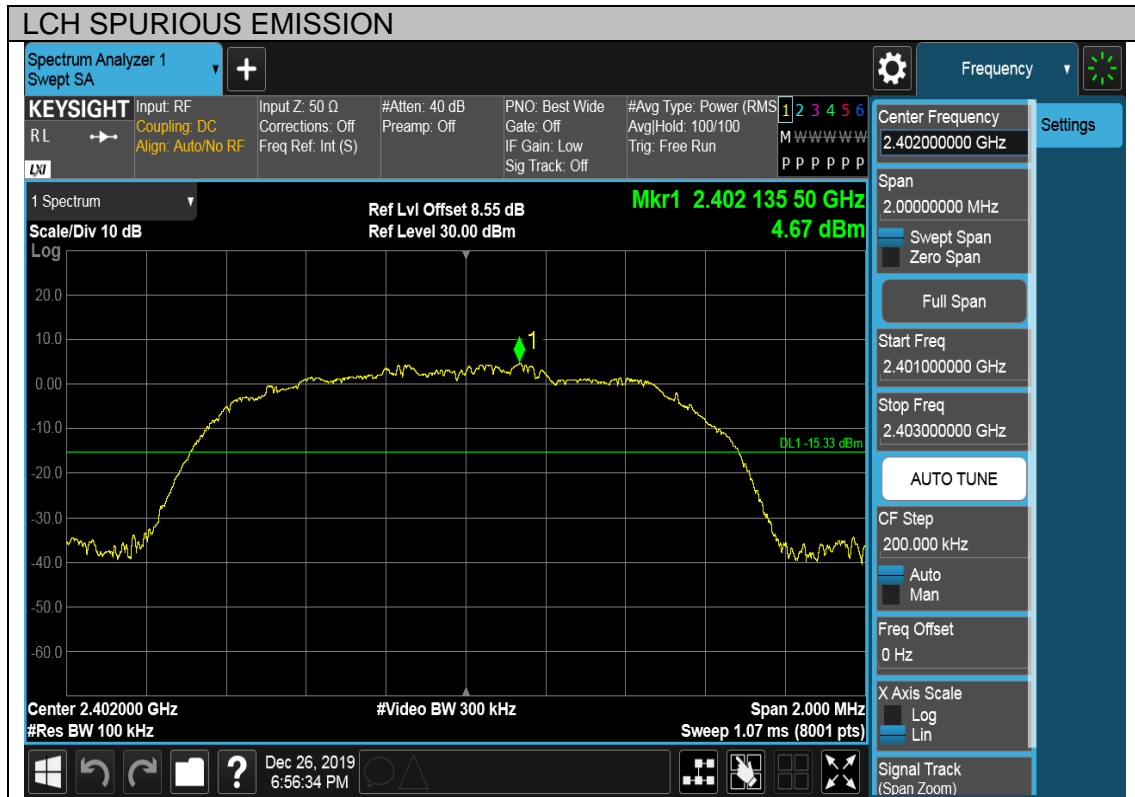



Note: The point 1 which exceeds the limit is 2.4G main carrier.

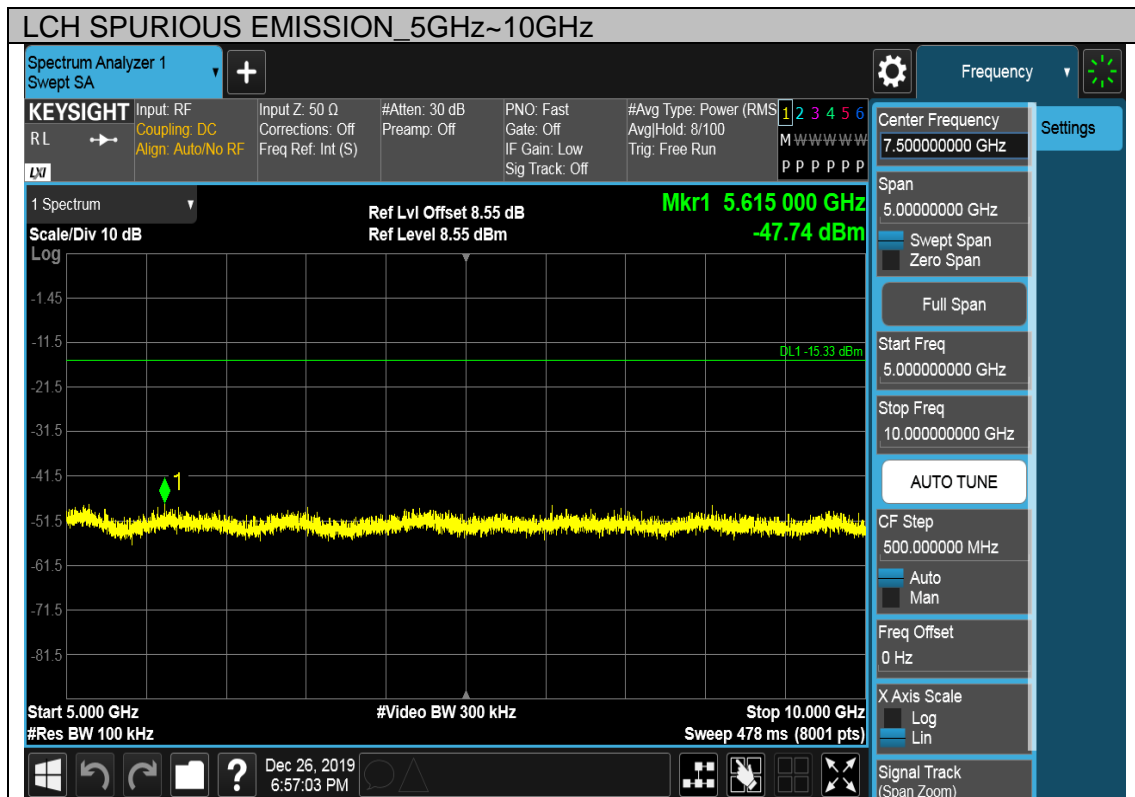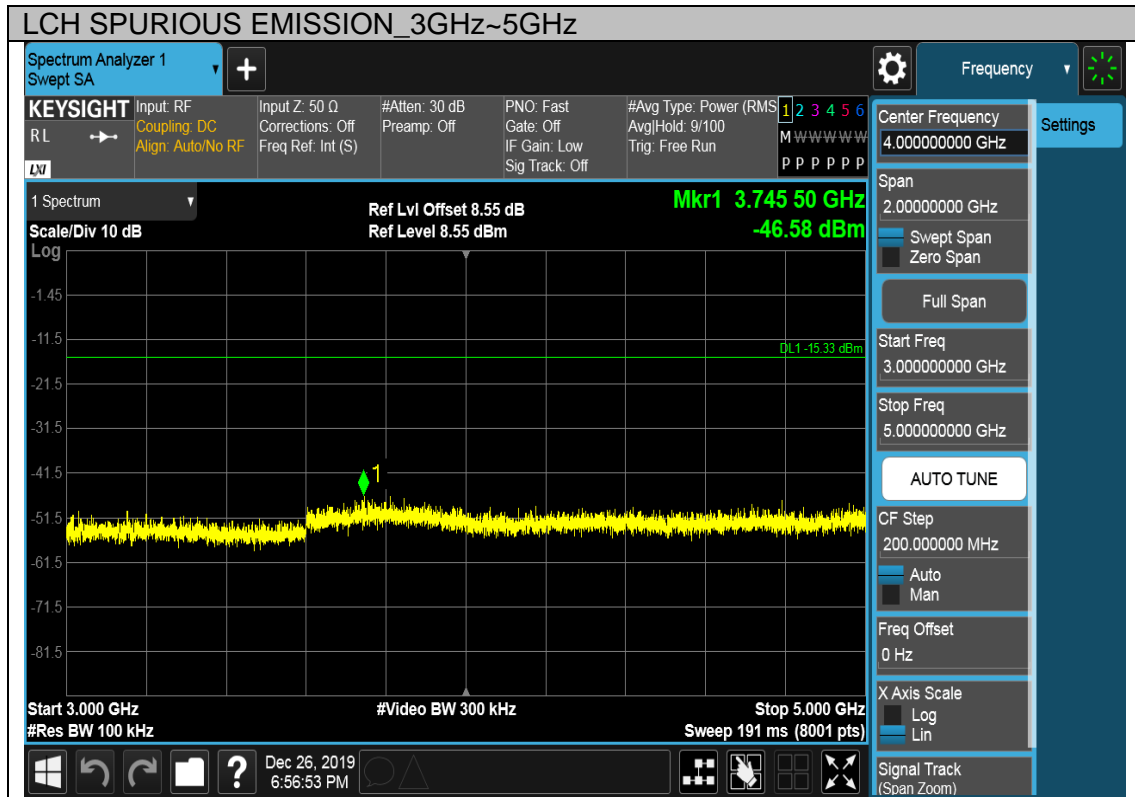

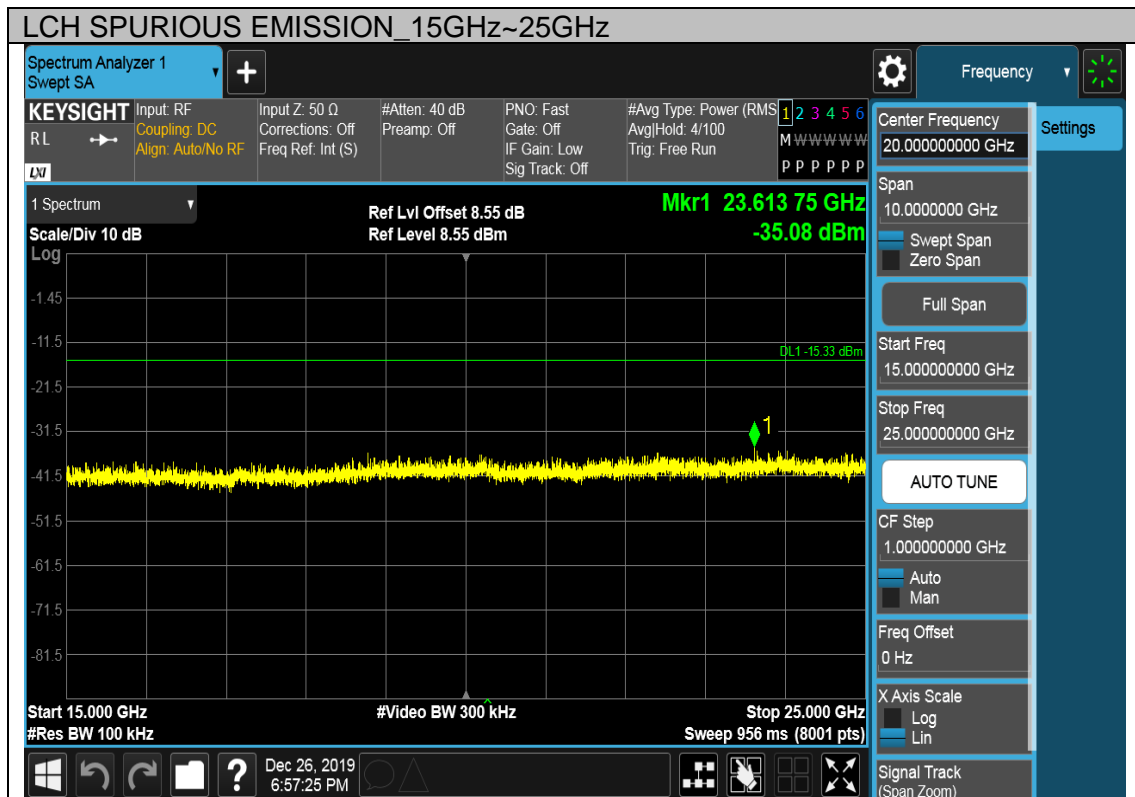
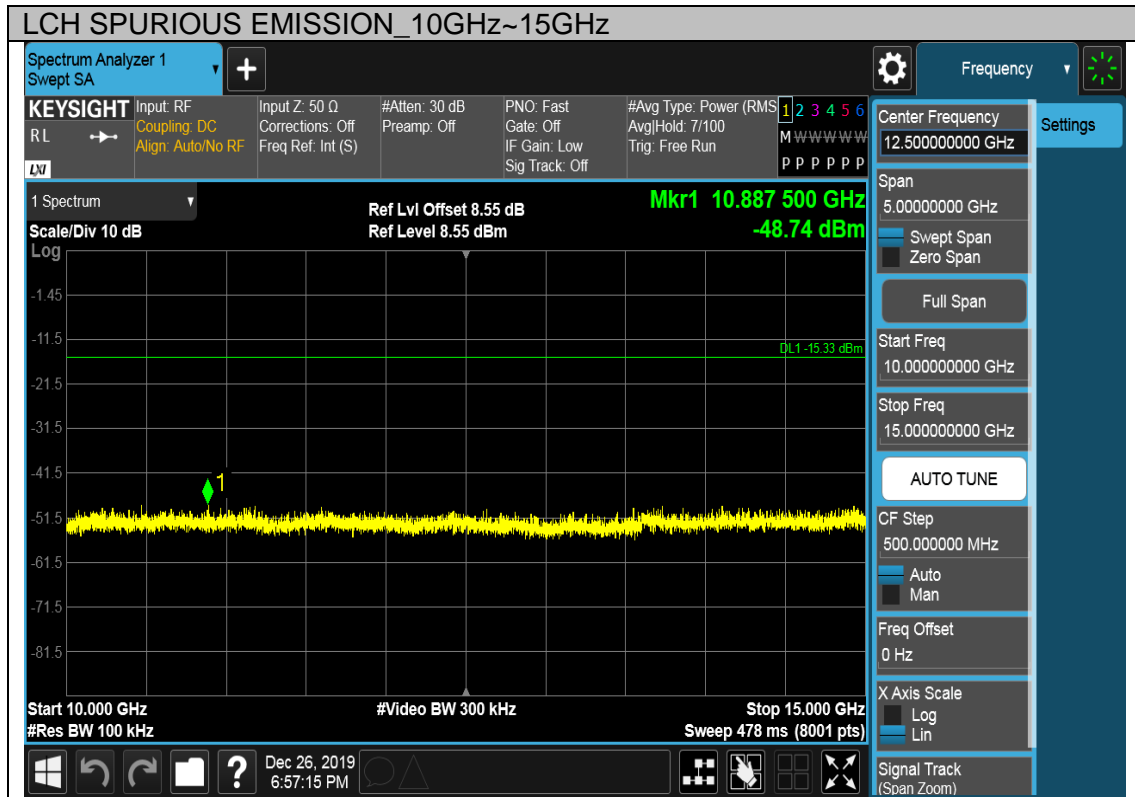






SPURIOUS EMISSIONS, MID CHANNEL

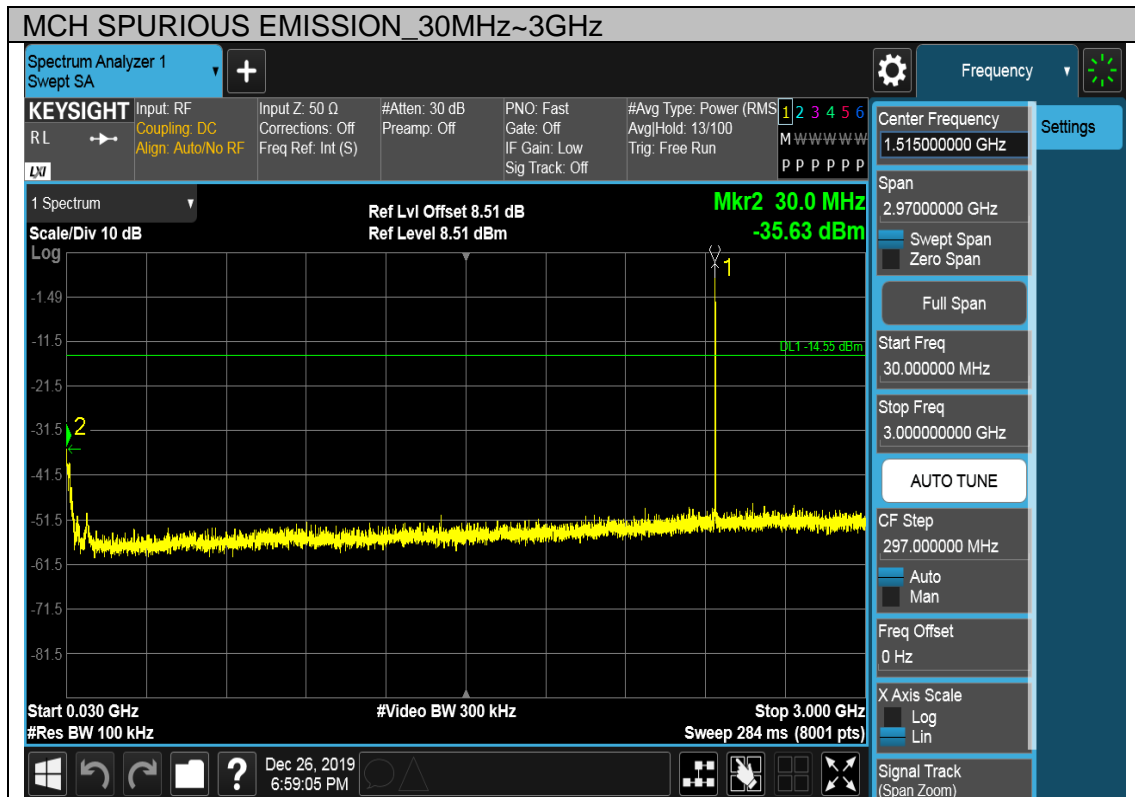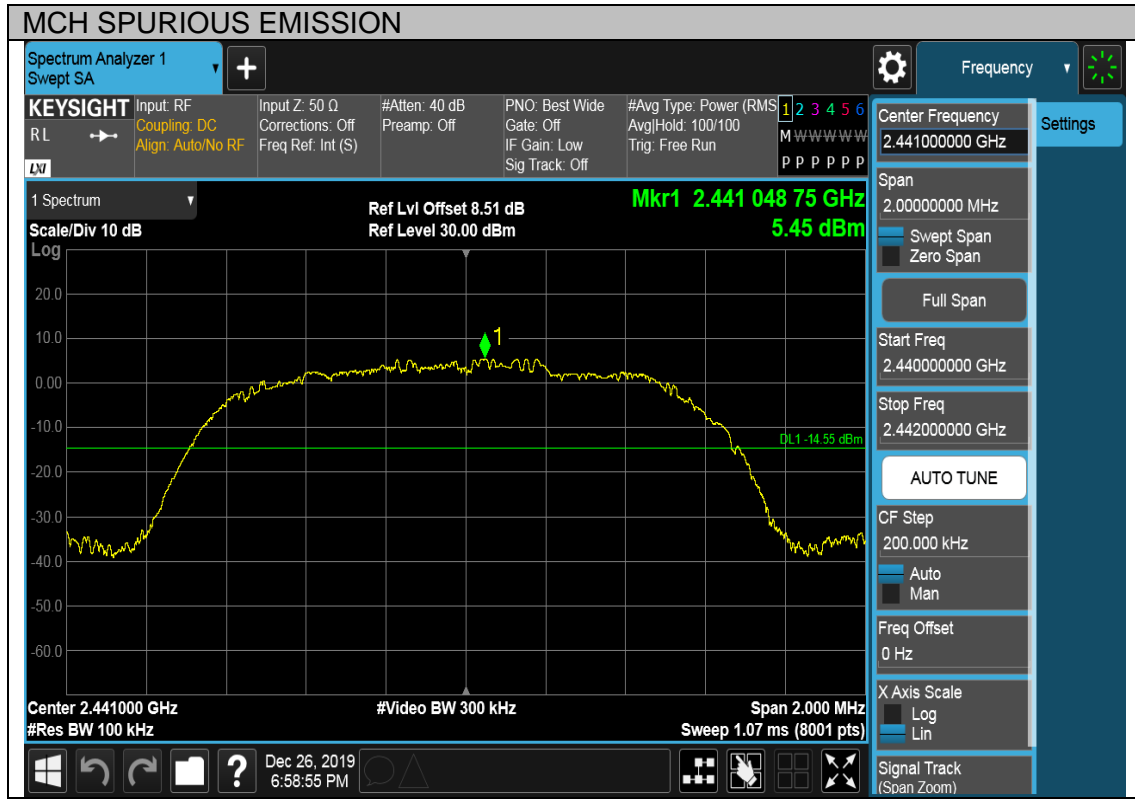


Note: The point 1 which exceeds the limit is 2.4G main carrier.

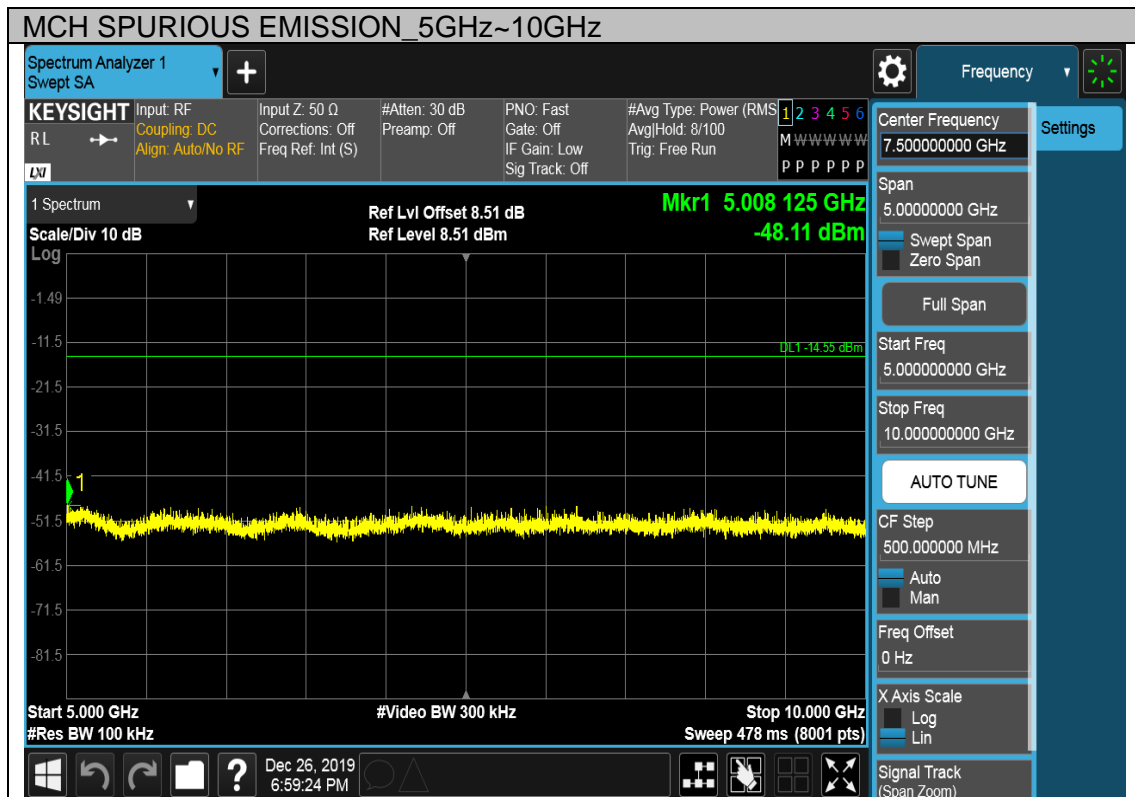
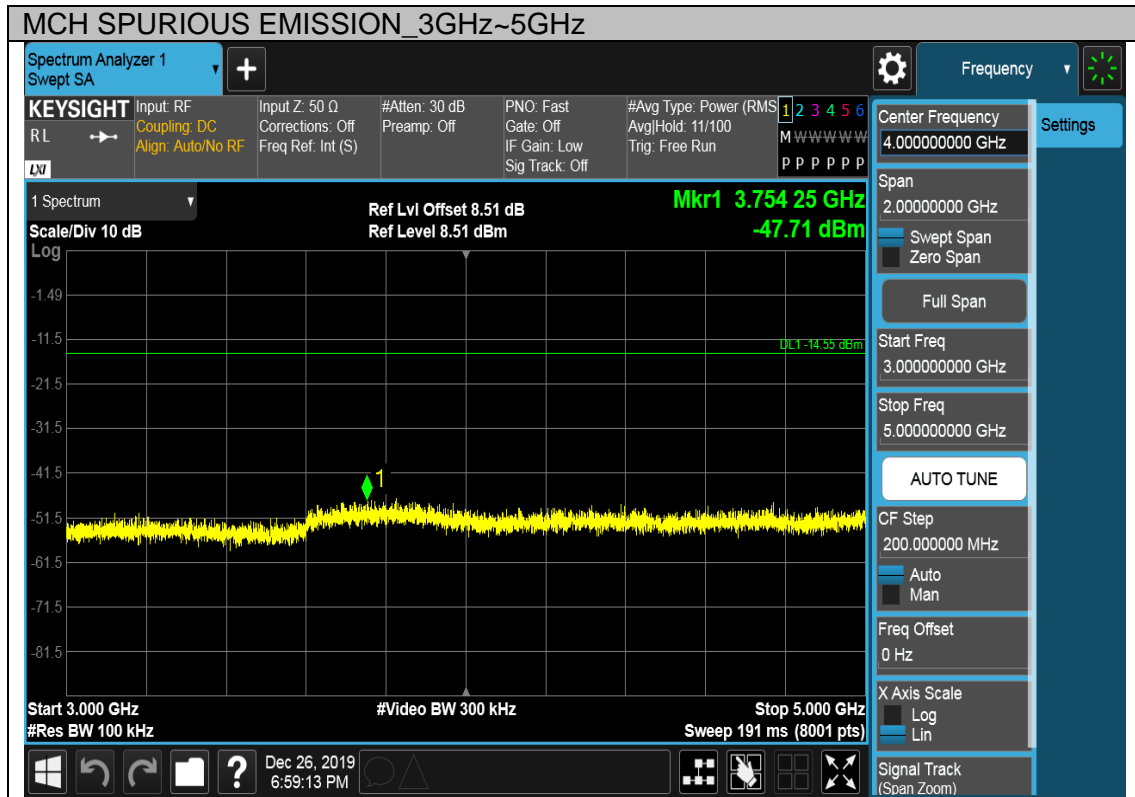


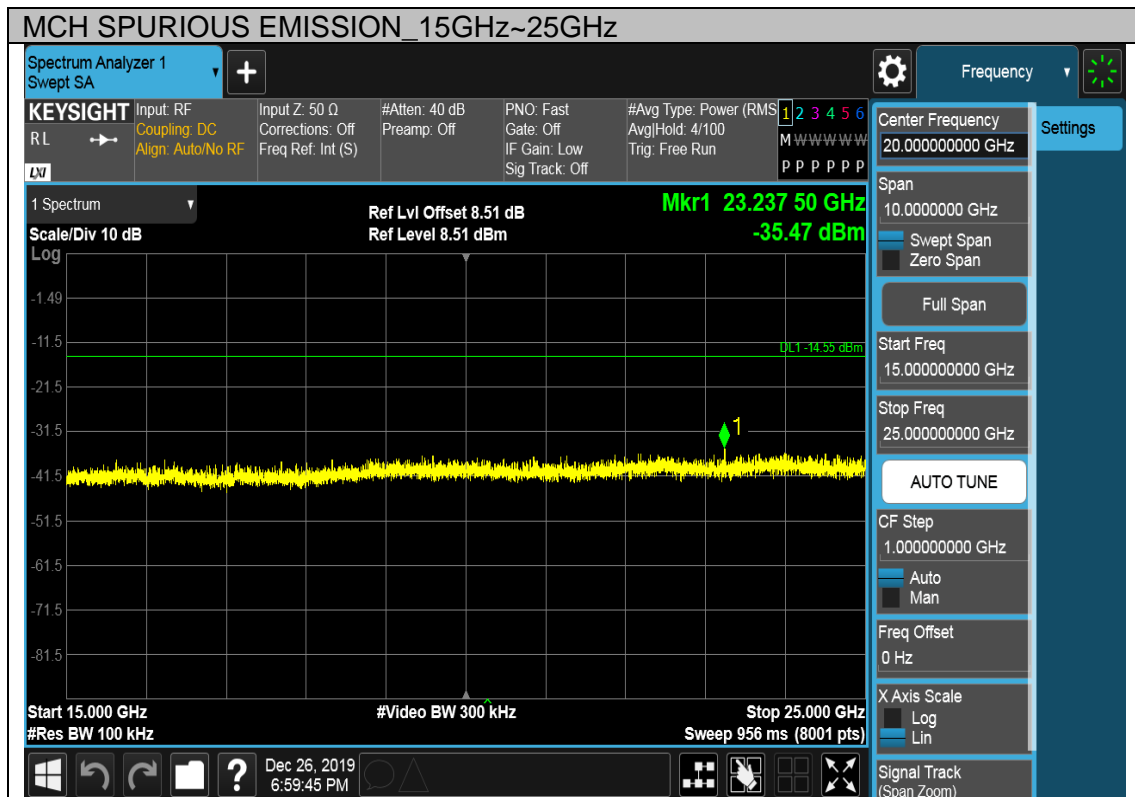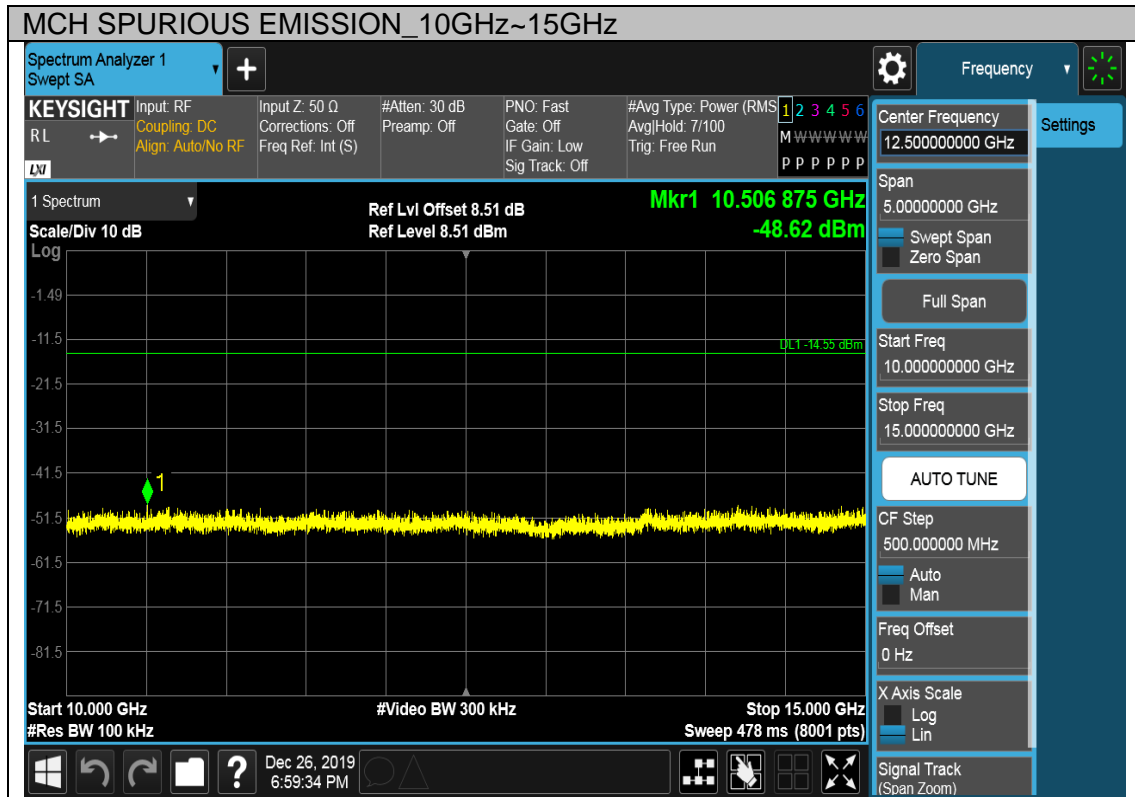







SPURIOUS EMISSIONS, HIGH CHANNEL

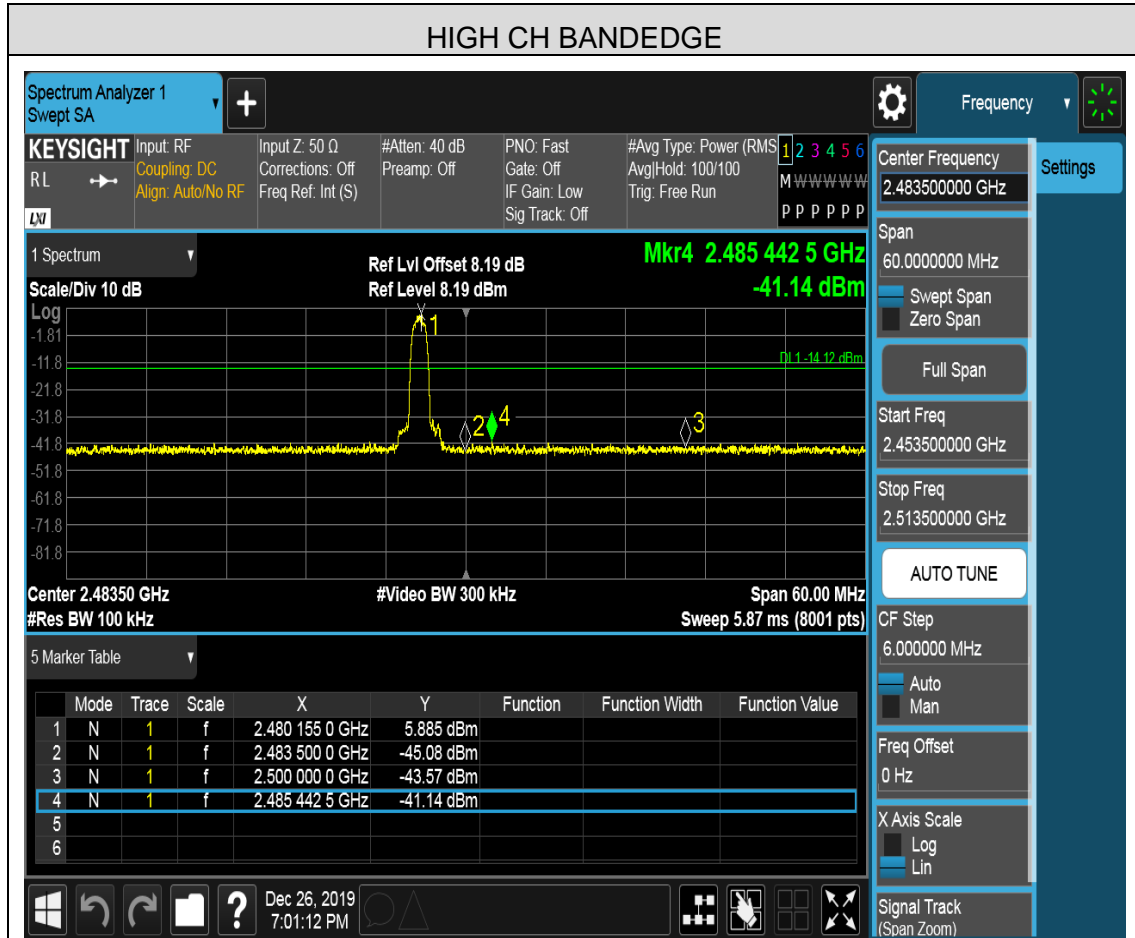

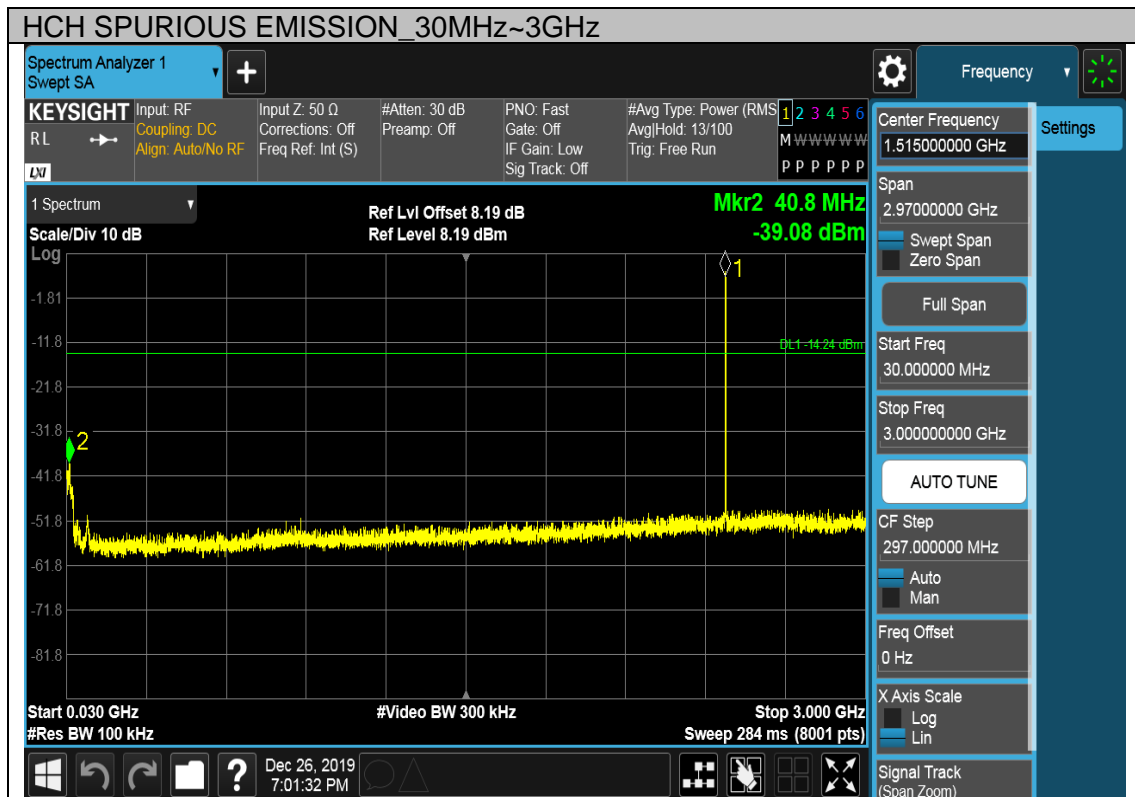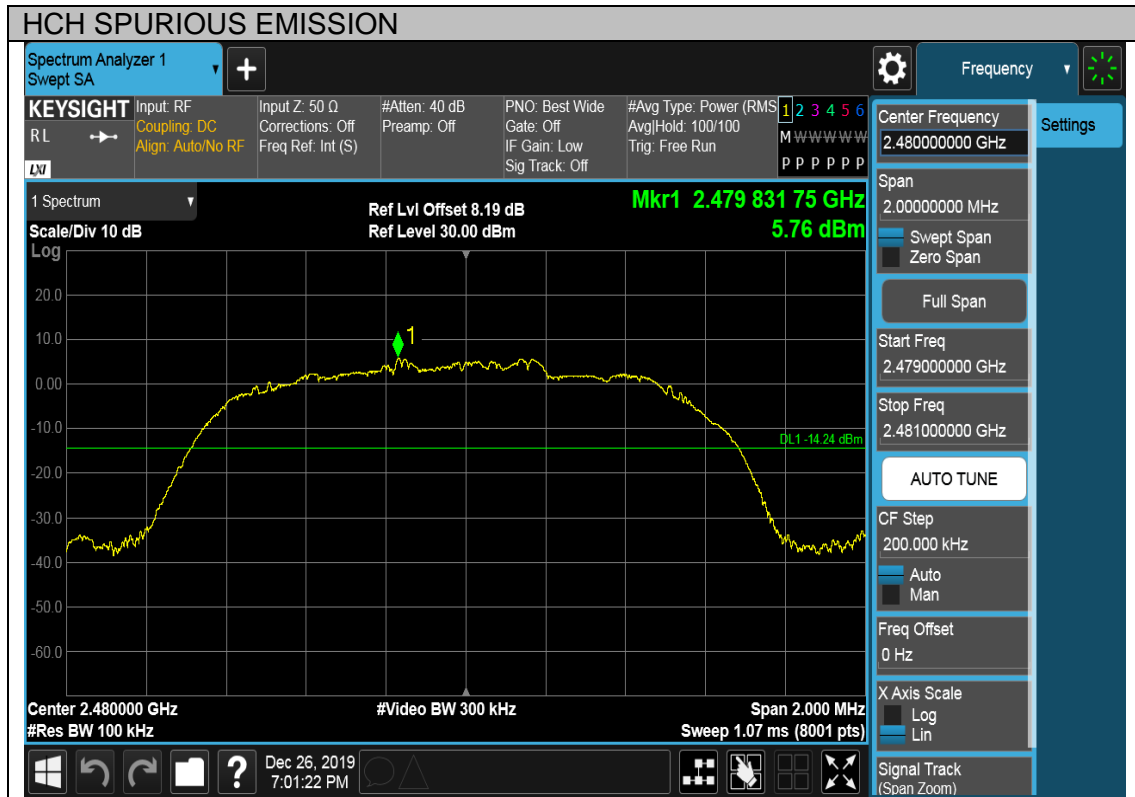



Note: The point 1 which exceeds the limit is 2.4G main carrier.

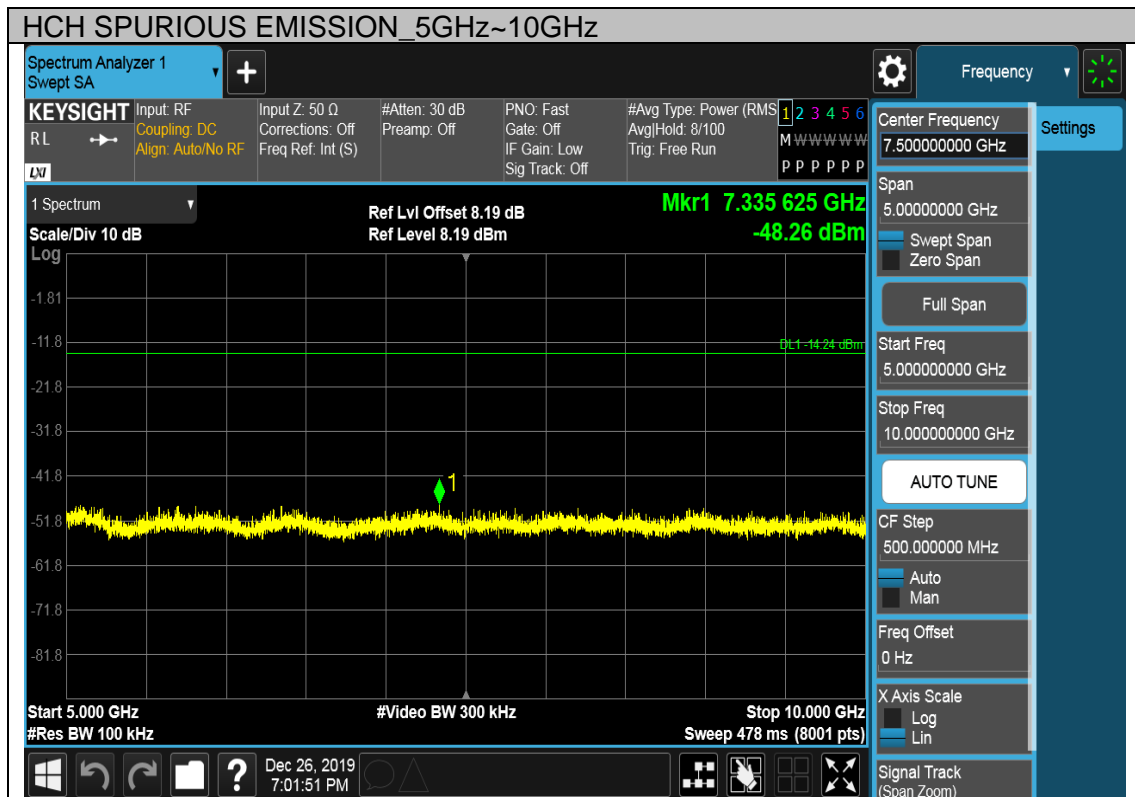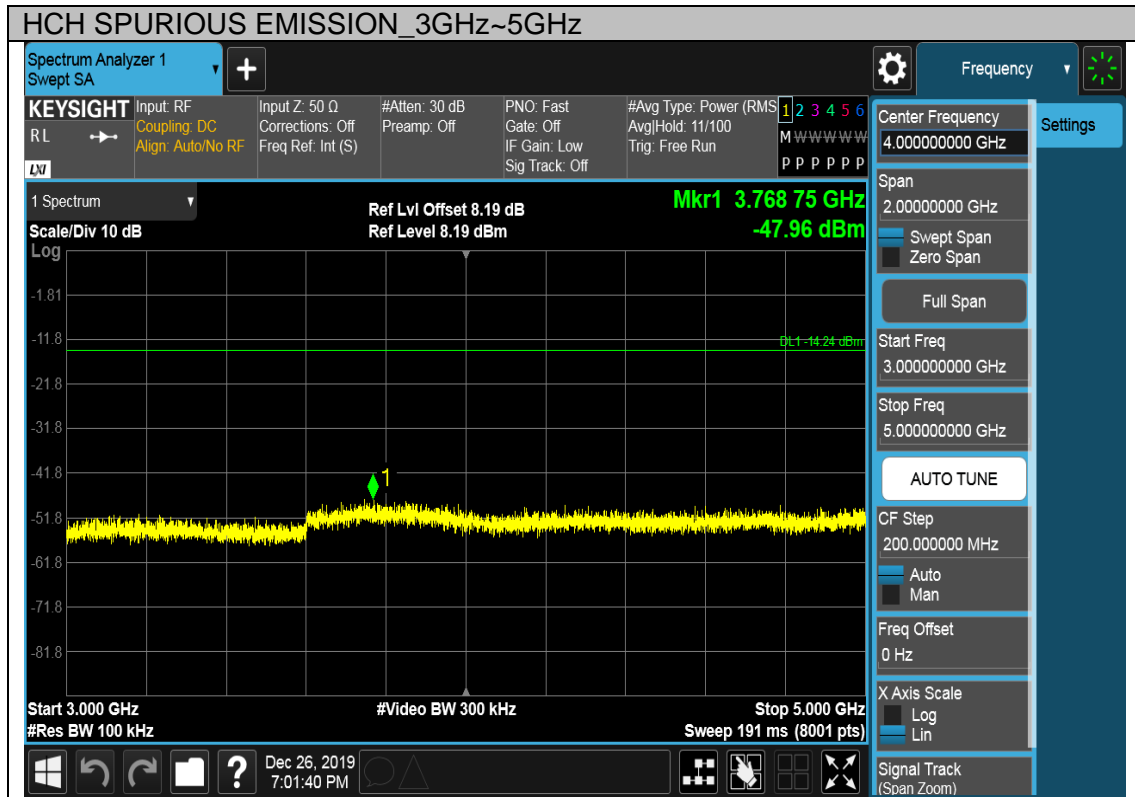

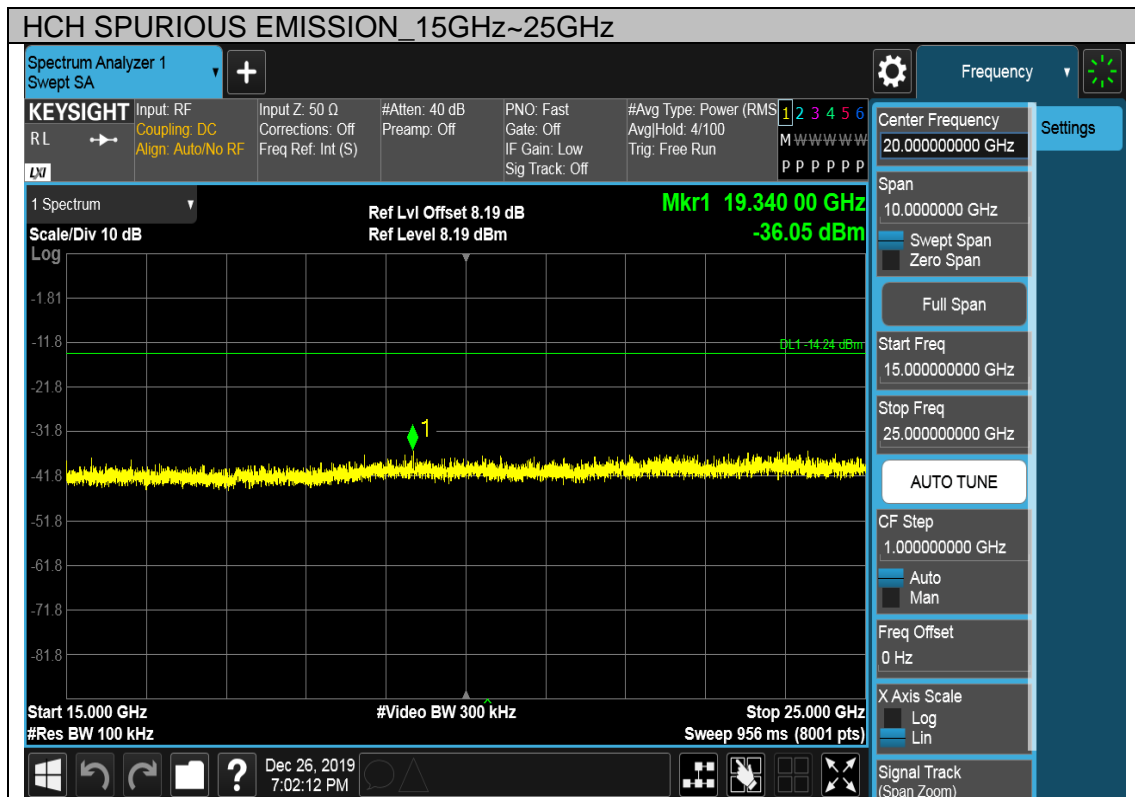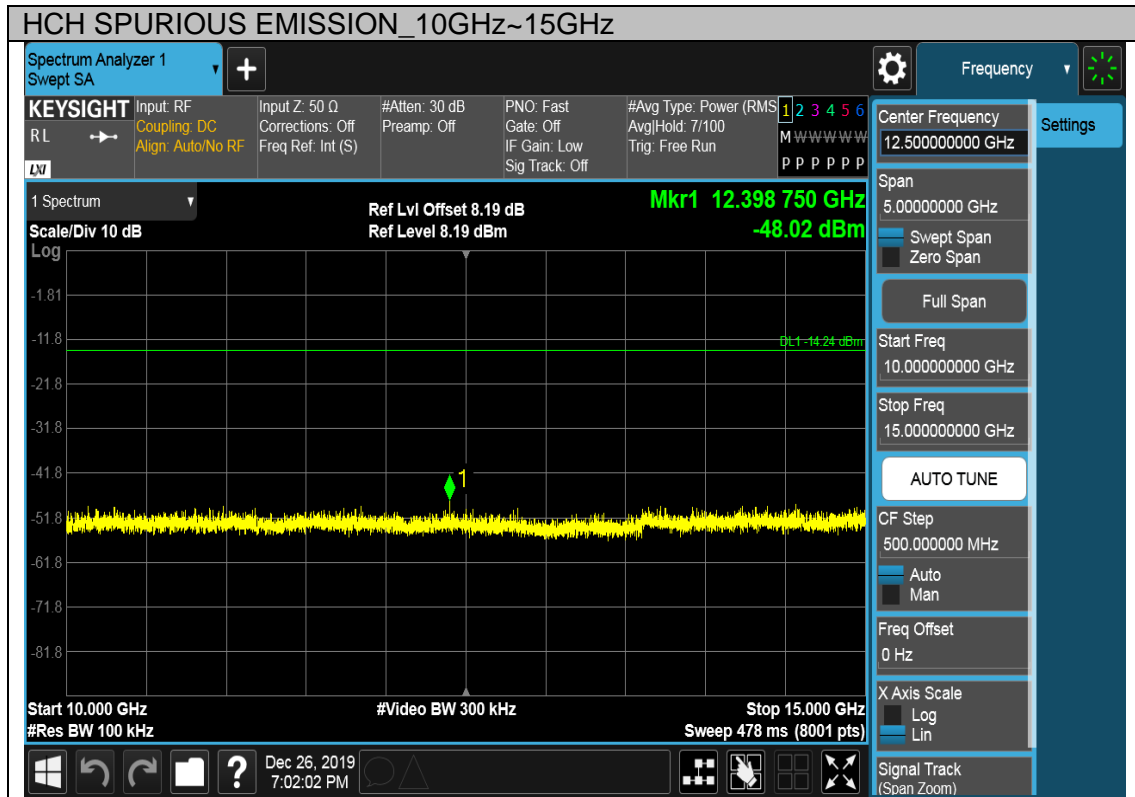



SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

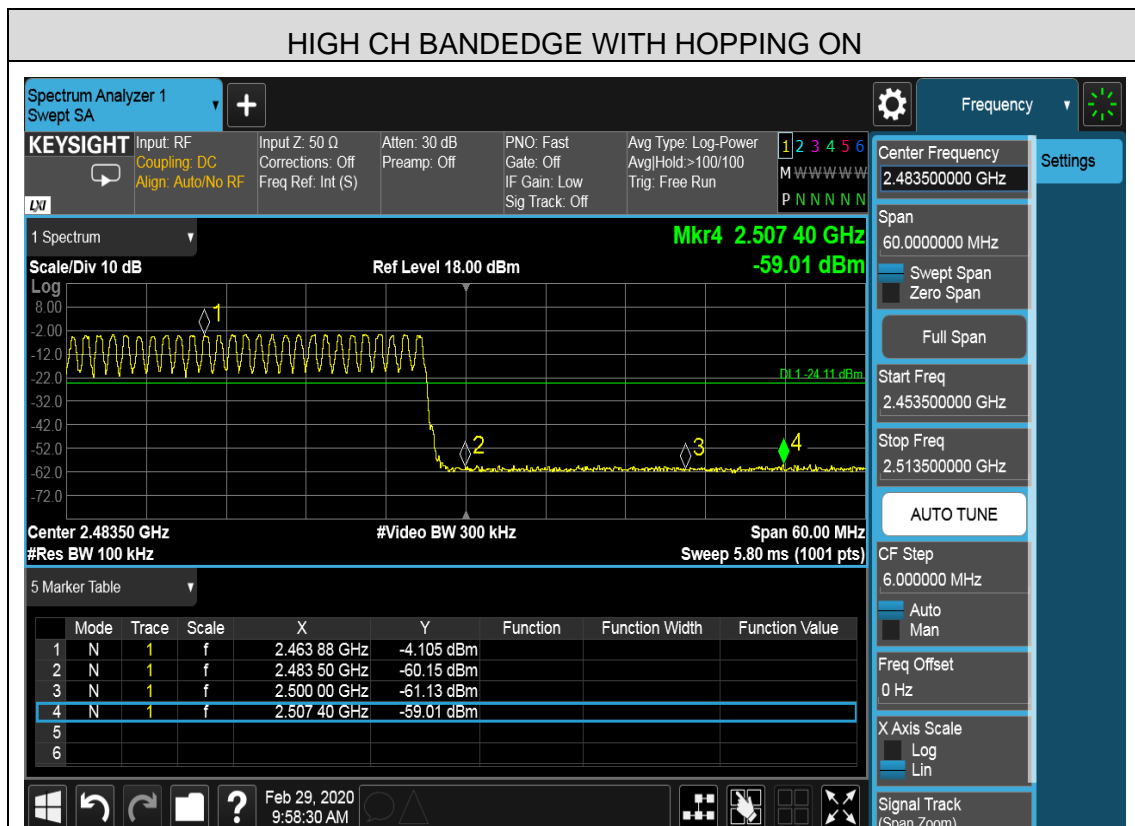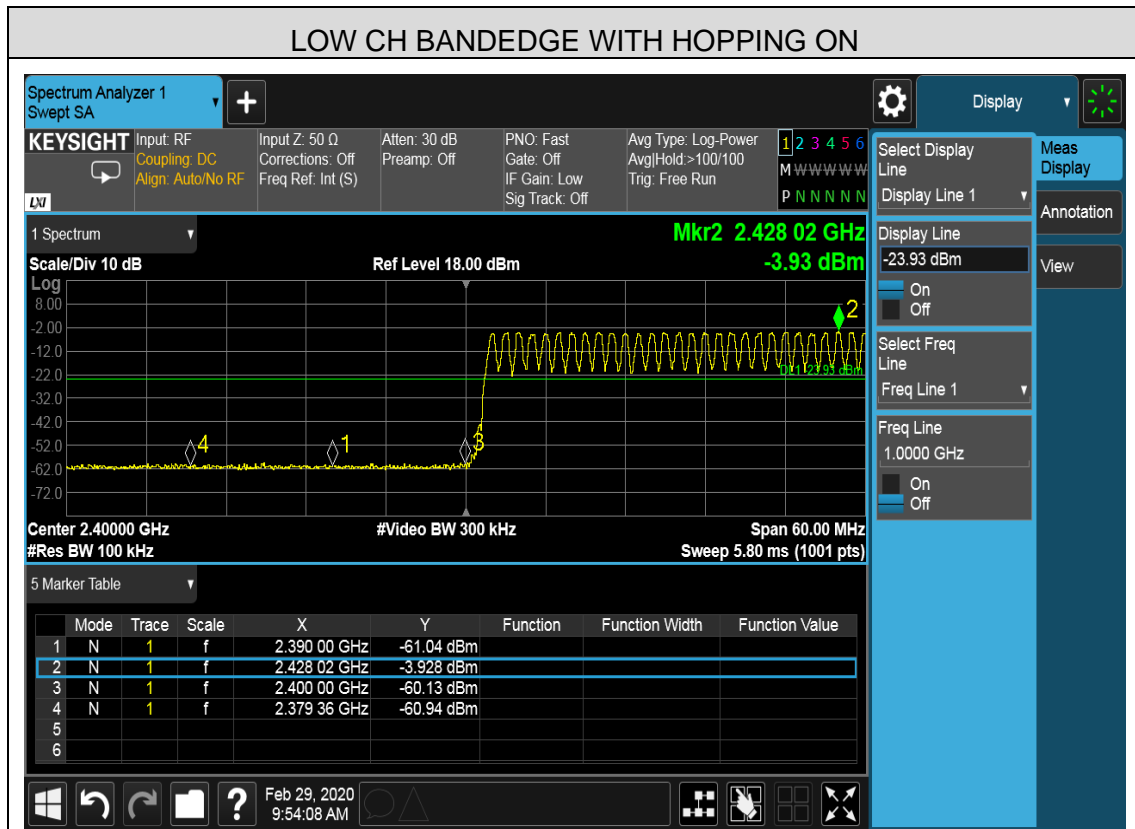



7. RADIATED TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to SS-GEN Clause 8.9 and Clause 8.10

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

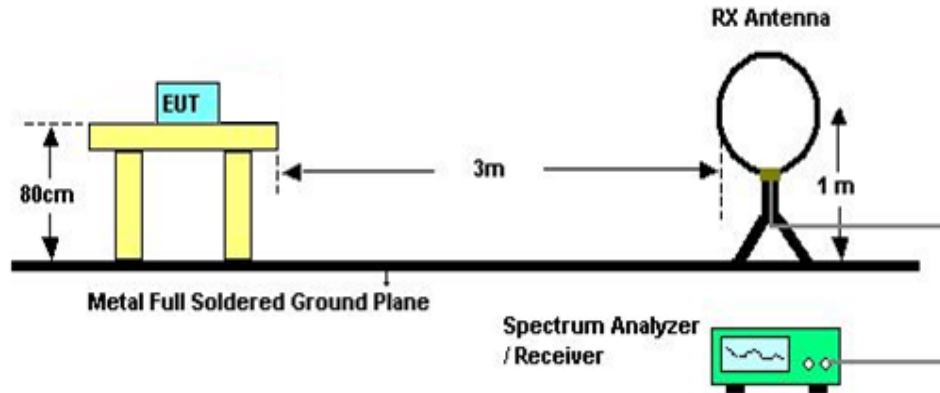


The setting of the spectrum Analyzer

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G and above 30MHz

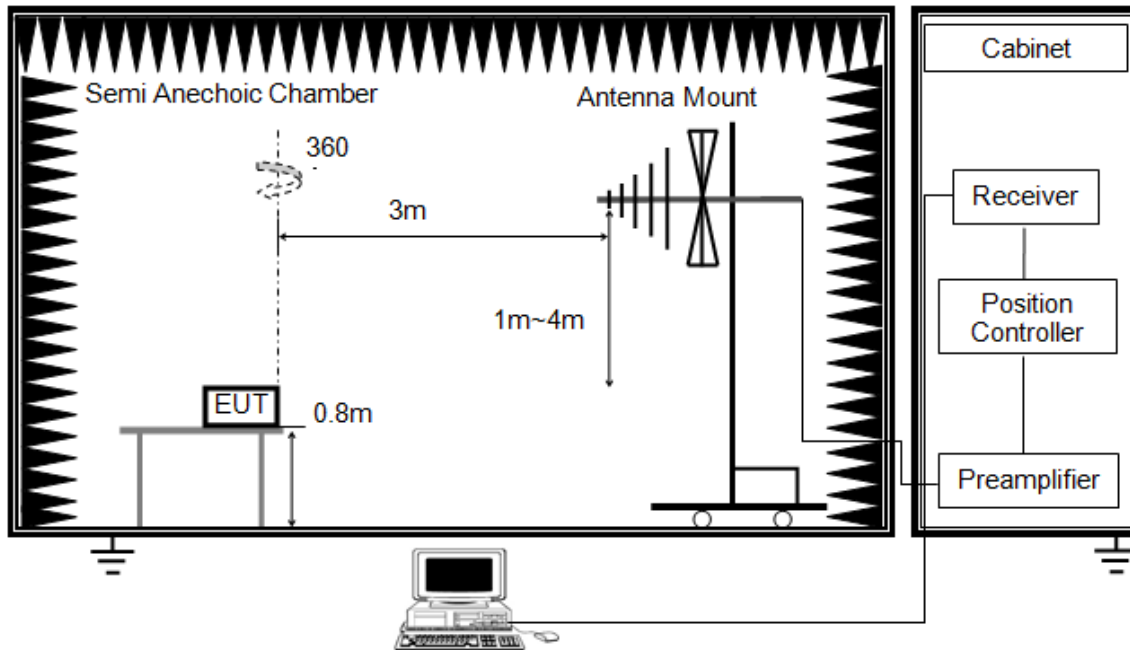


The setting of the spectrum Analyzer

RBW	120K
VBW	300K
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report.


Above 1G

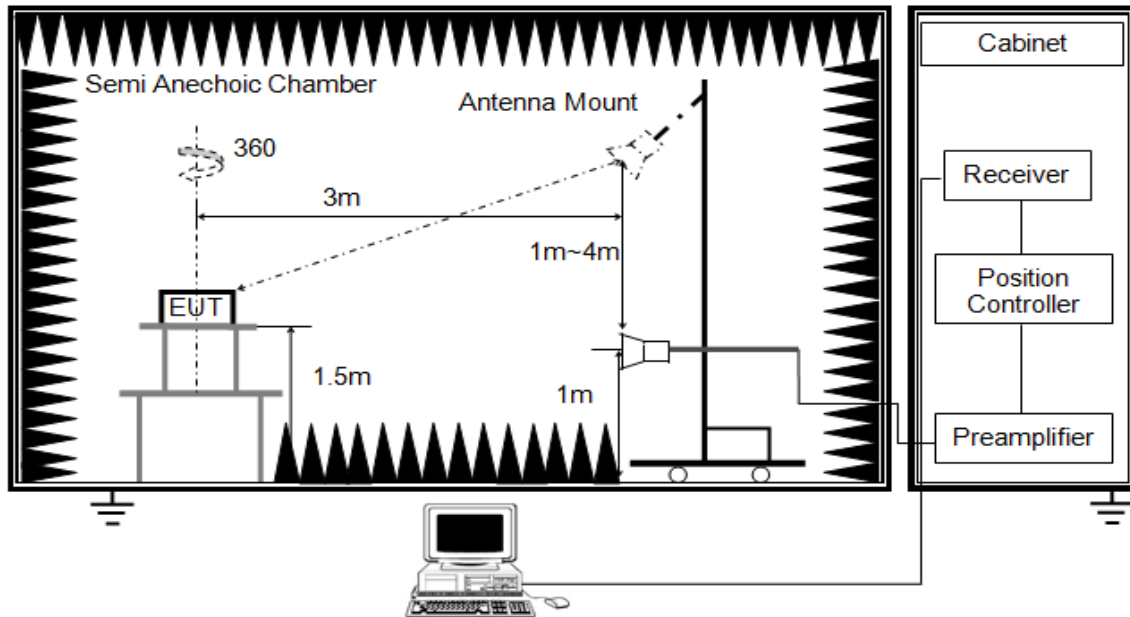

RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector, max hold to be run for at least 50 x (1/duty cycle) traces for average measurements.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis, Z axis positions:

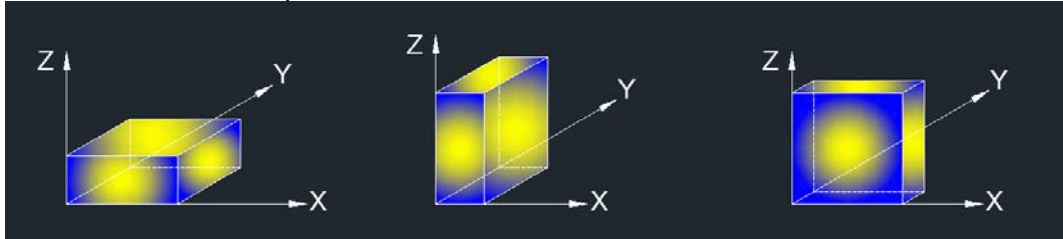


Note: For all radiated test, EUT can only work in one axis(Z axis), so only this case (Z axis) data recorded in the report.



7.2. RESTRICTED BANDEGE

7.2.1. GFSK MODE

RESTRICTED BANDEGE (LOW CHANNEL, HORIZONTAL)

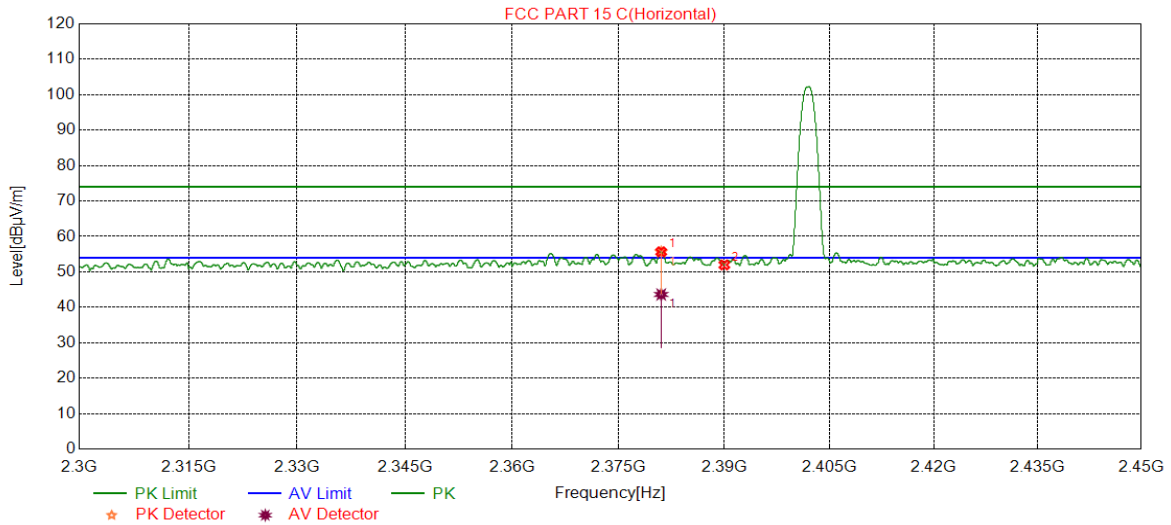


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2381.0289	41.58	14.04	55.62	74.00	-18.38	peak
		29.58	14.04	43.62	54.00	-10.38	average
3	2390.0000	37.87	14.09	51.96	74.00	-22.04	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

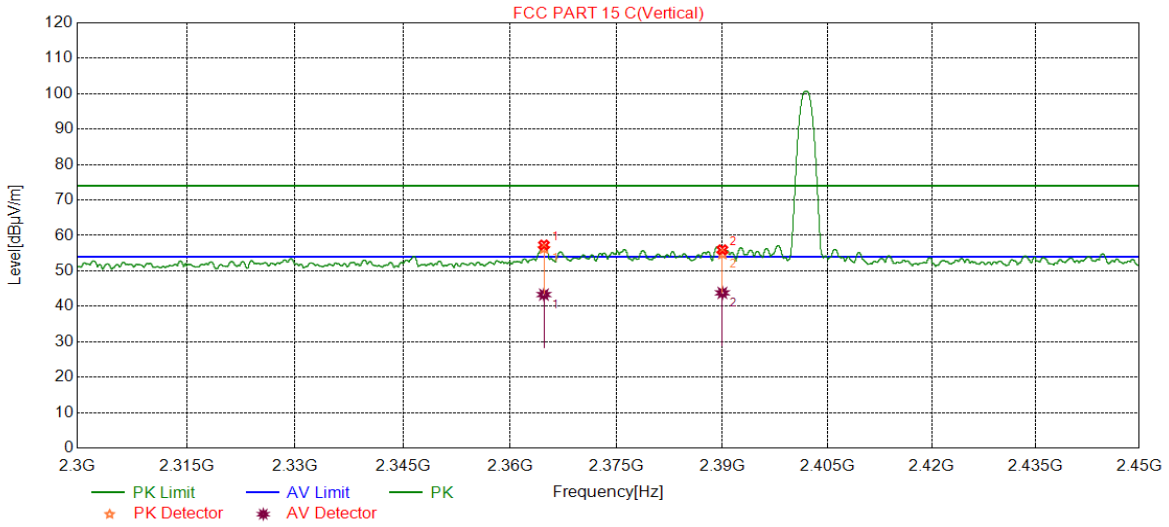


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2364.7518	42.52	13.78	56.30	74.00	-17.70	peak
		29.52	13.78	43.30	54.00	-10.70	average
2	2390.0000	40.69	14.09	54.78	74.00	-19.22	peak
		29.69	14.09	43.78	54.00	-10.22	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

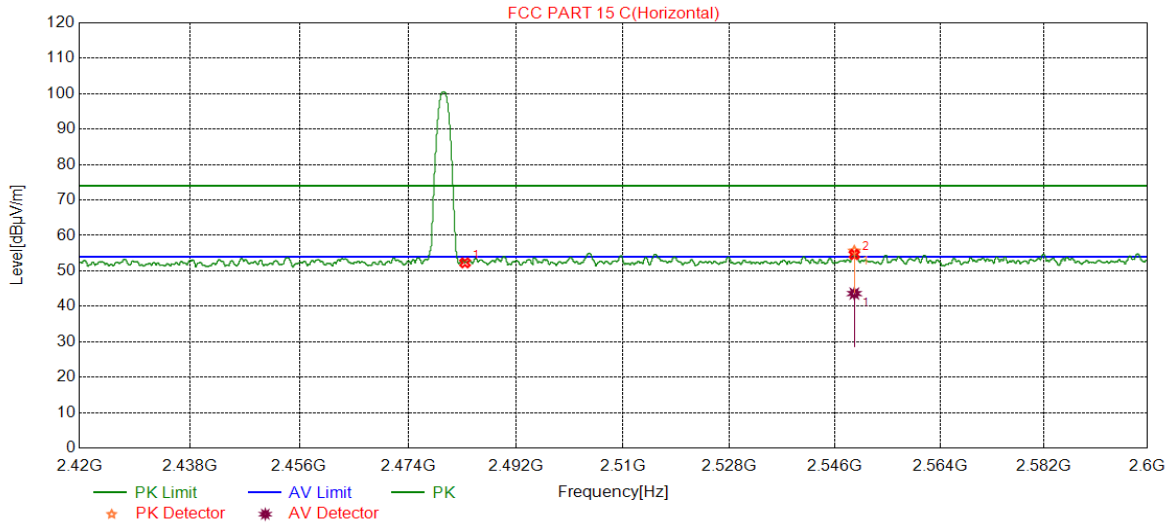


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	38.38	13.88	52.26	74.00	-21.74	peak
2	2549.2889	41.2	14.40	55.60	74.00	-18.40	peak
		29.20	14.40	43.60	54.00	-10.40	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

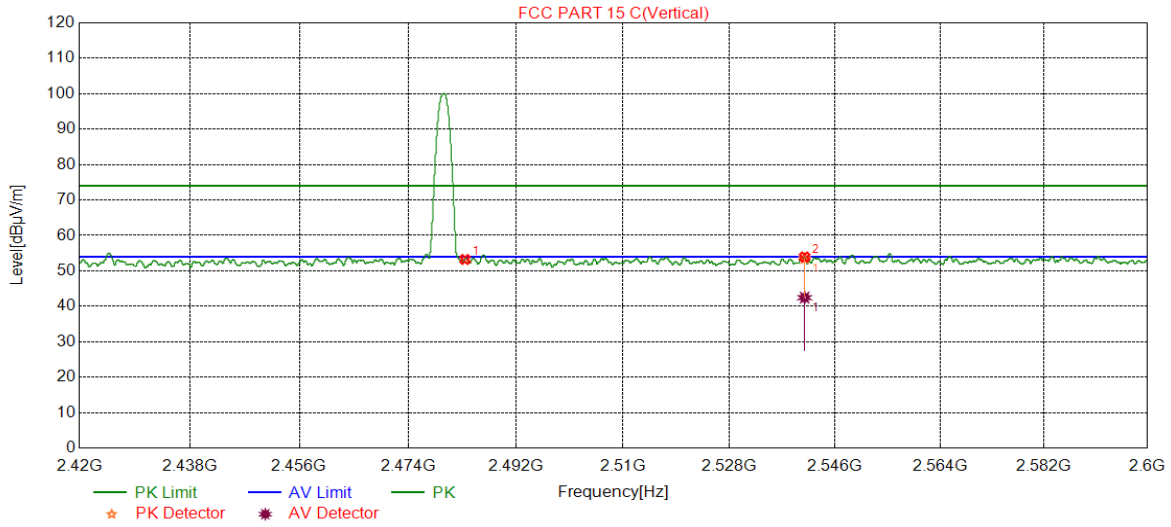


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	39.34	13.88	53.22	74.00	-20.78	peak
2	2540.7921	39.14	14.30	53.44	74.00	-20.56	peak
		28.14	14.30	42.44	54.00	-11.56	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



7.2.2. 8DPSK MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

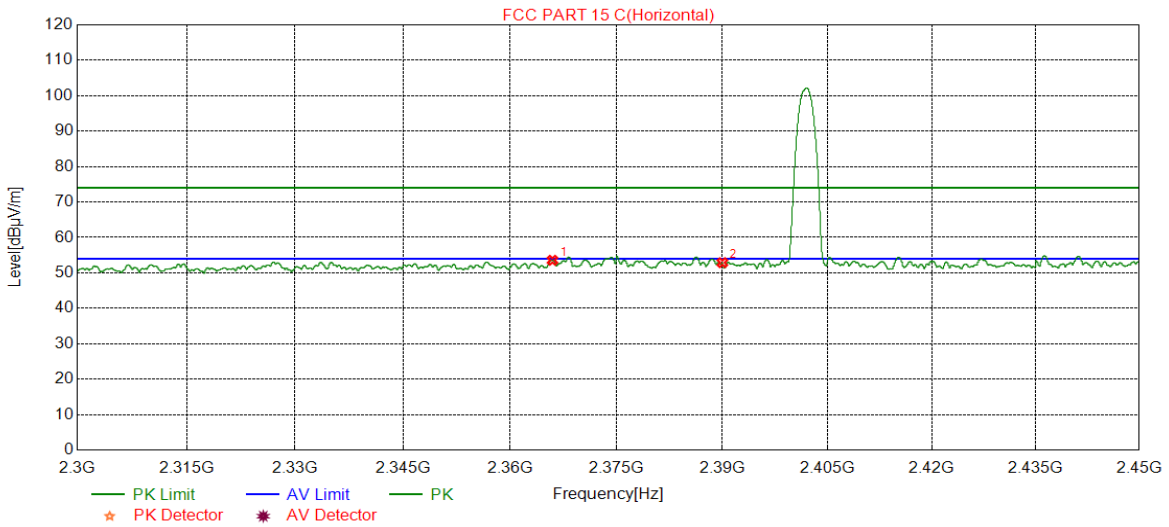


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.9520	39.75	13.80	53.55	74.00	-20.45	peak
2	2390.0000	38.79	14.09	52.88	74.00	-21.12	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

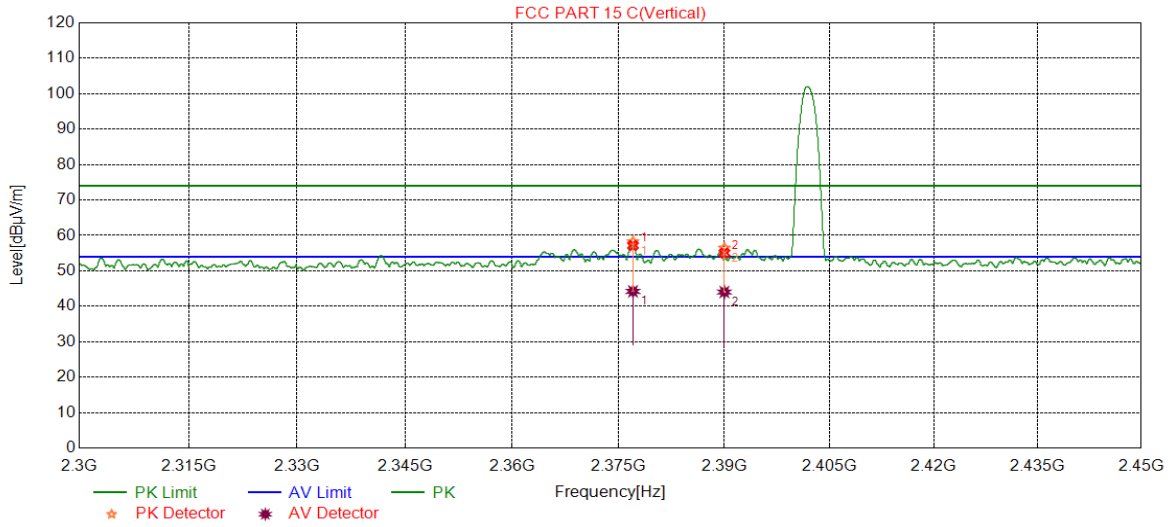


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.0346	44.28	13.94	58.22	74.00	-15.78	peak
		30.28	13.94	44.22	54.00	-9.78	average
2	2390.0000	42.34	14.09	56.43	74.00	-17.57	peak
		29.94	14.09	44.03	54.00	-9.97	average

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

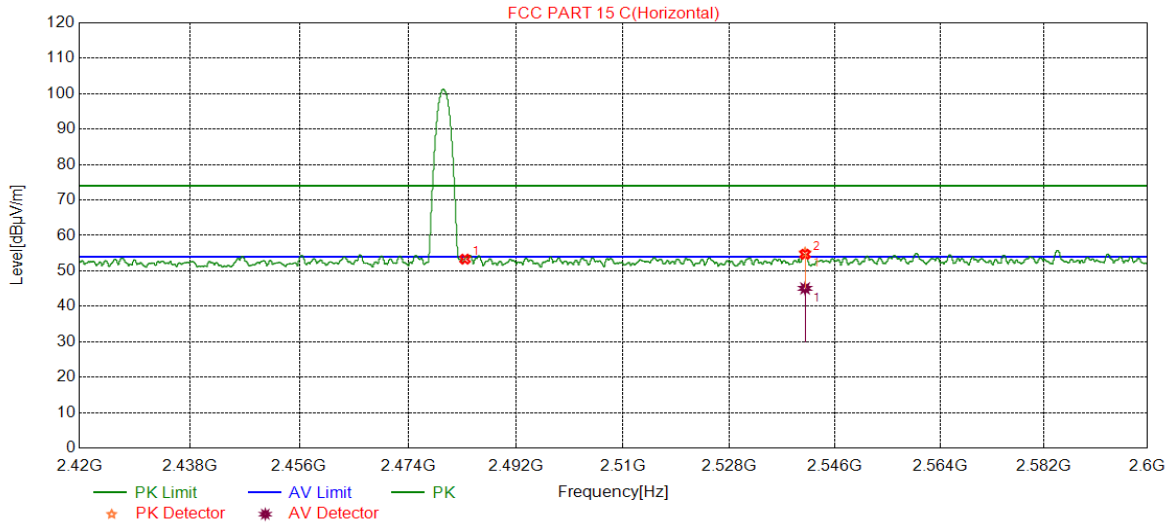


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	39.43	13.88	53.31	74.00	-20.69	peak
2	2540.8641	40.76	14.30	55.06	74.00	-18.94	peak
		30.76	14.30	45.06	54.00	-8.94	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

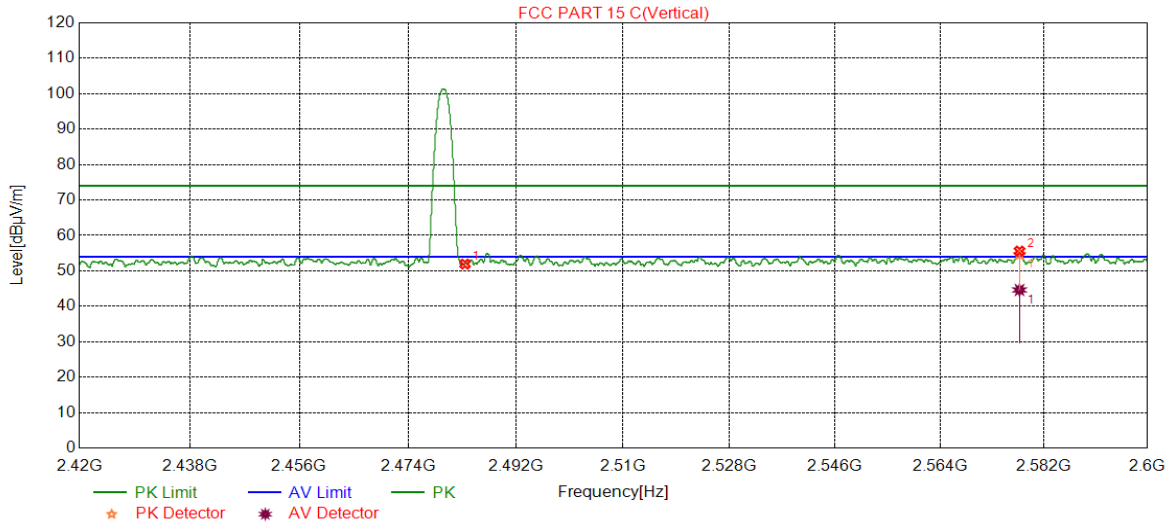


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	38.03	13.88	51.91	74.00	-22.09	peak
2	2577.7318	40.17	14.44	54.61	74.00	-19.39	peak
		30.17	14.44	44.61	54.00	-9.39	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

7.3. SPURIOUS EMISSIONS (1~18GHz)

7.3.1. GFSK MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

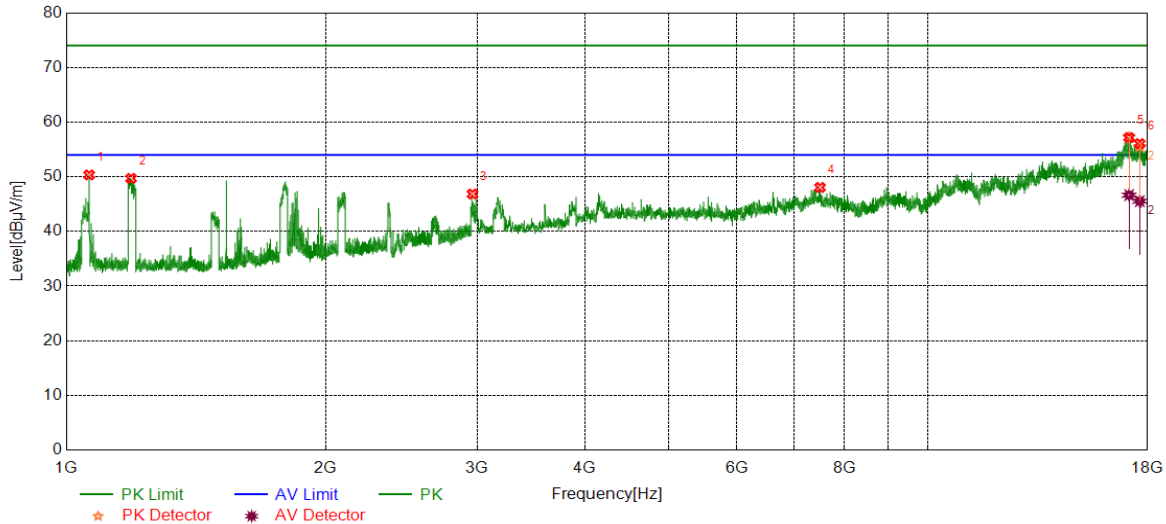


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1063.2579	55.84	-5.50	50.34	74.00	-23.66	peak
2	1189.2737	55.25	-5.55	49.70	74.00	-24.30	peak
3	2962.2453	45.98	0.87	46.85	74.00	-27.15	peak
4	7498.6873	38.87	9.18	48.05	74.00	-25.95	peak
5	17129.8912	37.94	19.29	57.23	74.00	-16.77	peak
		27.35	19.29	46.64	54.00	-7.36	average
6	17626.8284	36.43	19.09	55.52	74.00	-18.48	peak
		26.45	19.09	45.54	54.00	-8.46	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For below 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. For above 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

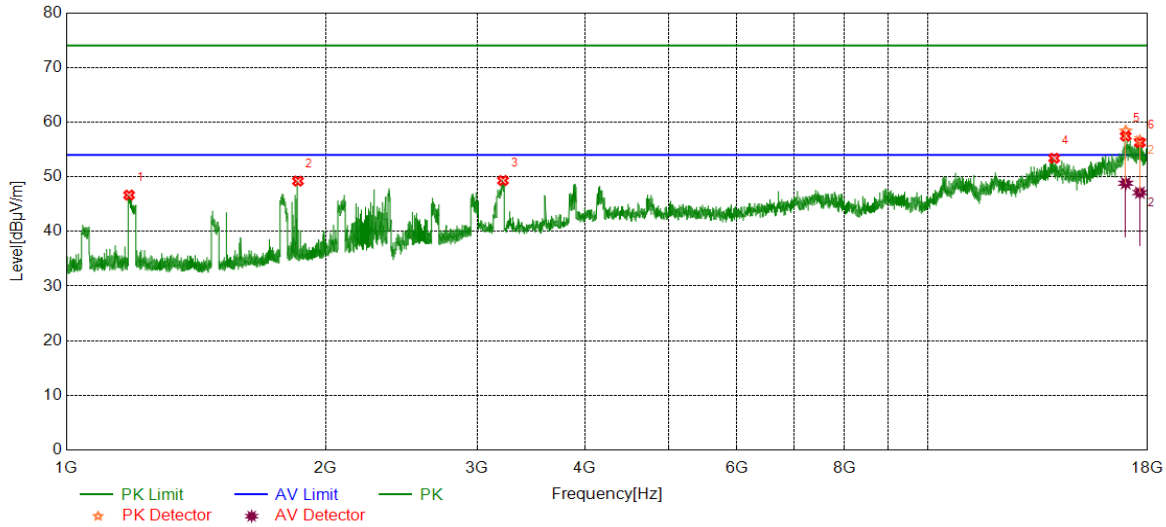


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1183.0229	52.26	-5.61	46.65	74.00	-27.35	peak
2	1857.8572	52.82	-3.61	49.21	74.00	-24.79	peak
3	3213.7767	47.49	1.82	49.31	74.00	-24.69	peak
4	14022.6278	37.62	15.78	53.40	74.00	-20.60	peak
5	16976.1220	38	20.39	58.39	74.00	-15.61	peak
		28.43	20.39	48.82	54.00	-5.18	average
6	17632.4541	37.29	19.33	56.62	74.00	-17.38	peak
		27.77	19.33	47.10	54.00	-6.90	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For below 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. For above 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

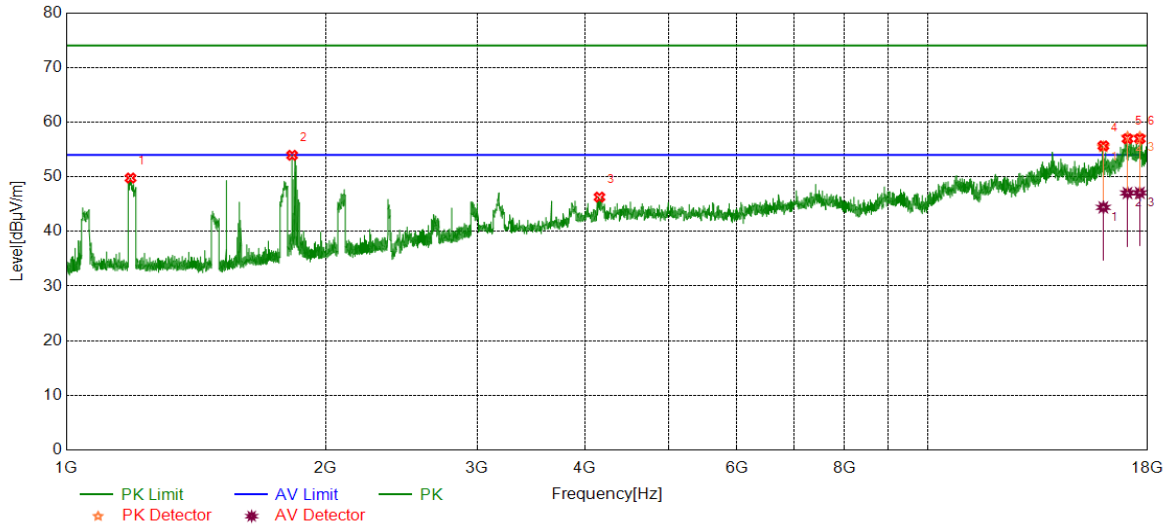


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1187.7735	55.34	-5.57	49.77	74.00	-24.23	peak
2	1828.8536	57.81	-3.88	53.93	74.00	-20.07	peak
3	4158.8949	41.54	4.74	46.28	74.00	-27.72	peak
4	15989.7487	37.89	17.59	55.48	74.00	-18.52	peak
		26.81	17.59	44.40	54.00	-9.60	average
5	17056.7571	36.75	20.50	57.25	74.00	-16.75	peak
		26.53	20.50	47.03	54.00	-6.97	average
6	17626.8284	38.15	19.09	57.24	74.00	-16.76	peak
		27.98	19.09	47.07	54.00	-6.93	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For below 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. For above 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

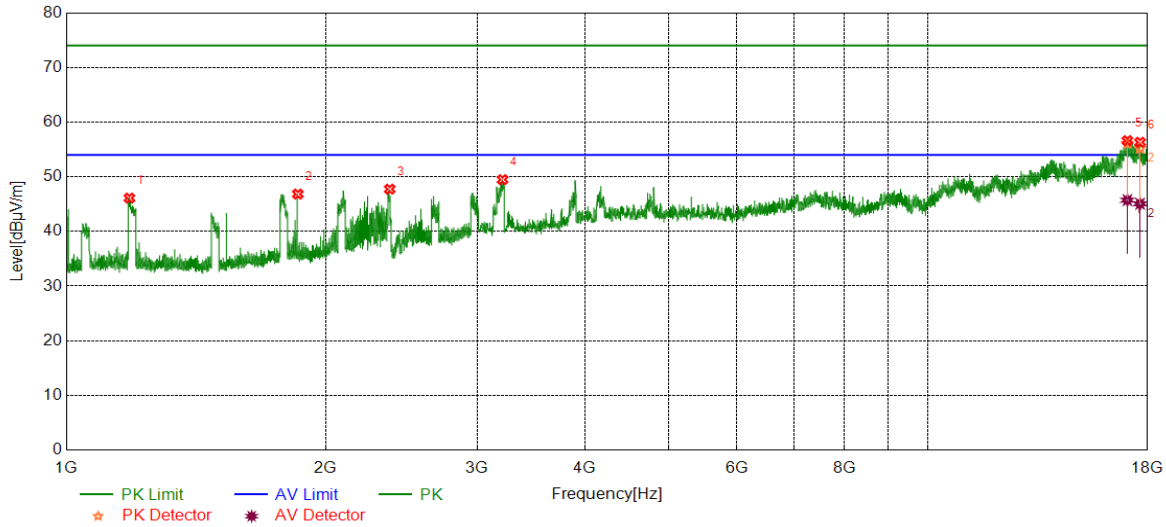


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1184.0230	51.70	-5.60	46.10	74.00	-27.90	peak
2	1857.3572	50.44	-3.61	46.83	74.00	-27.17	peak
3	2374.1718	49.28	-1.54	47.74	74.00	-26.26	peak
4	3210.0263	47.65	1.83	49.48	74.00	-24.52	peak
5	17051.1314	35.61	20.48	56.09	74.00	-17.91	peak
		25.24	20.48	45.72	54.00	-8.28	average
6	17639.9550	35.77	19.43	55.20	74.00	-18.80	peak
		25.63	19.43	45.06	54.00	-8.94	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For below 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. For above 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

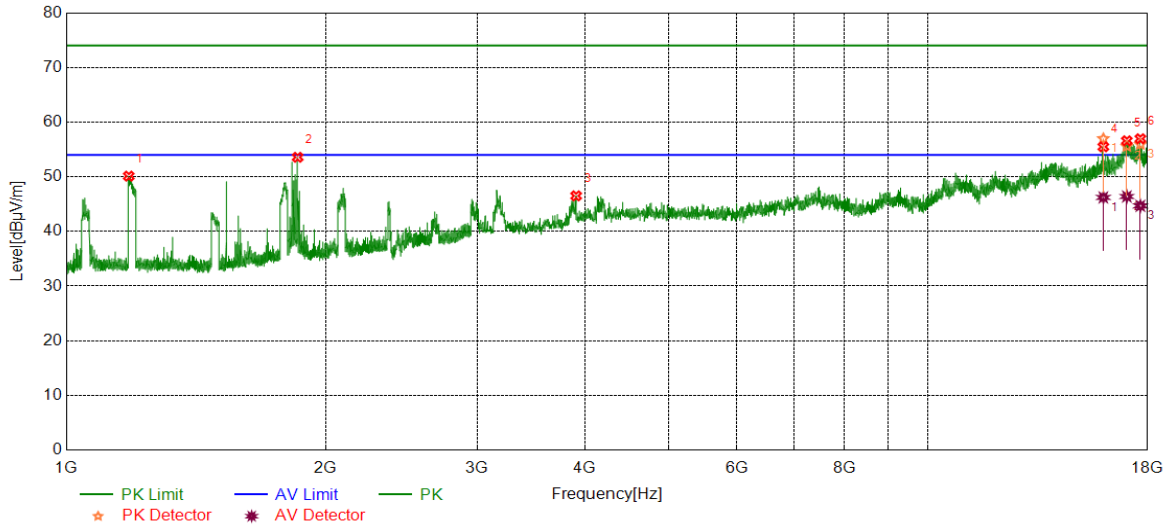


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1182.0228	55.74	-5.62	50.12	74.00	-23.88	peak
2	1856.3570	57.19	-3.62	53.57	74.00	-20.43	peak
3	3907.6135	42.72	3.79	46.51	74.00	-27.49	peak
4	15989.7487	39.39	17.59	56.98	74.00	-17.02	peak
		28.63	17.59	46.22	54.00	-7.78	average
5	17026.7533	35.37	20.20	55.57	74.00	-18.43	peak
		26.19	20.20	46.39	54.00	-7.61	average
6	17654.9569	36.74	19.19	55.93	74.00	-18.07	peak
		25.49	19.19	44.68	54.00	-9.32	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For below 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. For above 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

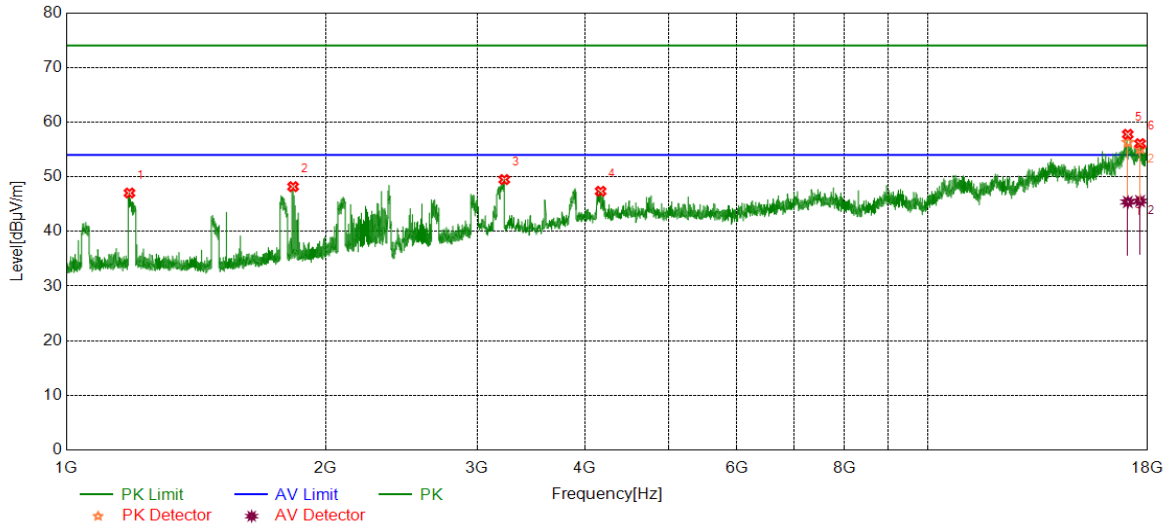


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1184.2730	52.63	-5.60	47.03	74.00	-26.97	peak
2	1833.8542	52.08	-3.89	48.19	74.00	-25.81	peak
3	3225.0281	47.73	1.76	49.49	74.00	-24.51	peak
4	4172.0215	42.75	4.60	47.35	74.00	-26.65	peak
5	17069.8837	35.79	20.52	56.31	74.00	-17.69	peak
		24.87	20.52	45.39	54.00	-8.61	average
6	17639.9550	35.67	19.43	55.10	74.00	-18.90	peak
		26.12	19.43	45.55	54.00	-8.45	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For below 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. For above 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

7.3.2. 8DPSK MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

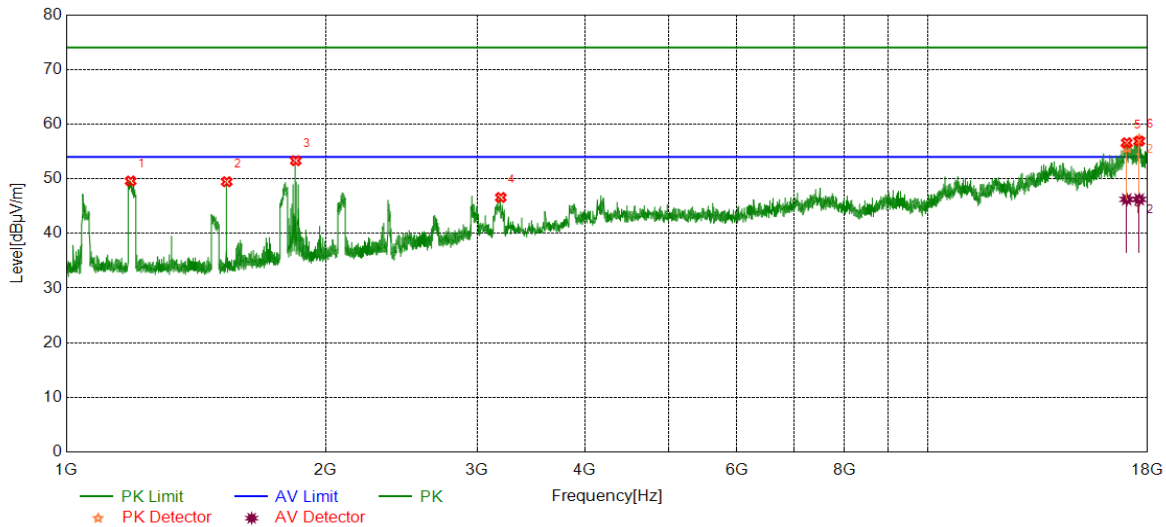


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1188.0235	55.16	-5.57	49.59	74.00	-24.41	peak
2	1535.8170	55.14	-5.68	49.46	74.00	-24.54	peak
3	1846.8559	57.04	-3.73	53.31	74.00	-20.69	peak
4	3195.0244	44.63	1.95	46.58	74.00	-27.42	peak
5	17021.1276	35.49	20.17	55.66	74.00	-18.34	peak
		26.06	20.17	46.23	54.00	-7.77	average
6	17598.6998	37.69	19.51	57.20	74.00	-16.80	peak
		26.72	19.51	46.23	54.00	-7.77	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For below 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. For above 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

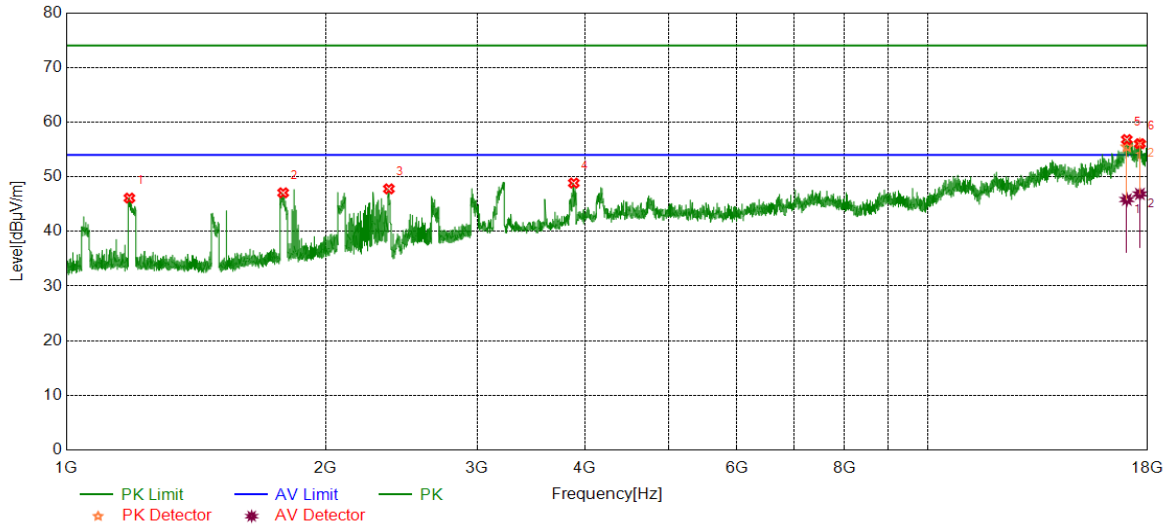


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1184.0230	51.70	-5.60	46.10	74.00	-27.90	peak
2	1785.5982	51.02	-3.95	47.07	74.00	-26.93	peak
3	2368.9211	49.37	-1.58	47.79	74.00	-26.21	peak
4	3883.2354	45.04	3.81	48.85	74.00	-25.15	peak
5	17026.7533	35.27	20.20	55.47	74.00	-18.53	peak
		25.63	20.20	45.83	54.00	-8.17	average
6	17632.4541	36.72	19.33	56.05	74.00	-17.95	peak
		27.53	19.33	46.86	54.00	-7.14	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For below 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. For above 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

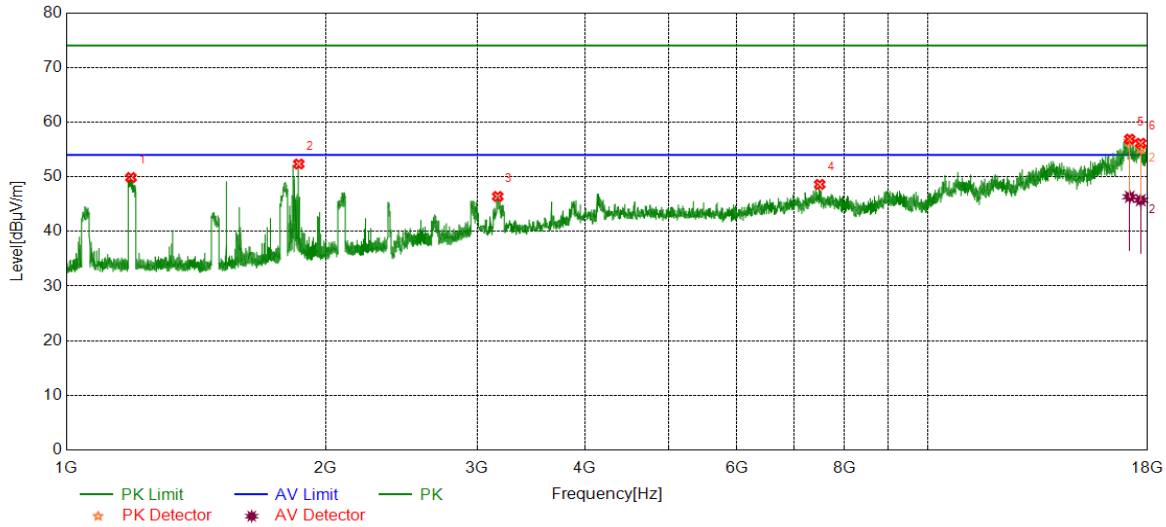


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1189.0236	55.42	-5.56	49.86	74.00	-24.14	peak
2	1862.1078	55.97	-3.63	52.34	74.00	-21.66	peak
3	3168.7711	44.19	2.21	46.40	74.00	-27.60	peak
4	7493.0616	39.40	9.20	48.60	74.00	-25.40	peak
5	17159.8950	36.74	19.74	56.48	74.00	-17.52	peak
		26.60	19.74	46.34	54.00	-7.66	average
6	17669.9587	35.45	19.70	55.15	74.00	-18.85	peak
		26.02	19.70	45.72	54.00	-8.28	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For below 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. For above 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

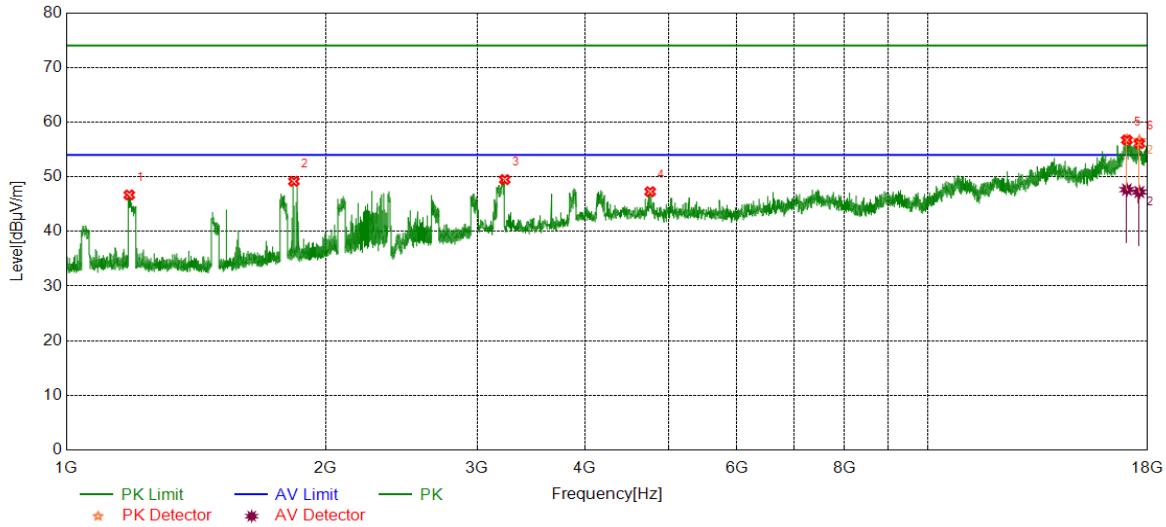


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1183.5229	52.28	-5.60	46.68	74.00	-27.32	peak
2	1837.8547	53.06	-3.90	49.16	74.00	-24.84	peak
3	3228.7786	47.75	1.73	49.48	74.00	-24.52	peak
4	4762.7203	42.14	5.14	47.28	74.00	-26.72	peak
5	17026.7533	36.61	20.20	56.81	74.00	-17.19	peak
		27.45	20.20	47.65	54.00	-6.35	average
6	17606.2008	37.71	18.92	56.63	74.00	-17.37	peak
		28.30	18.92	47.22	54.00	-6.78	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For below 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. For above 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

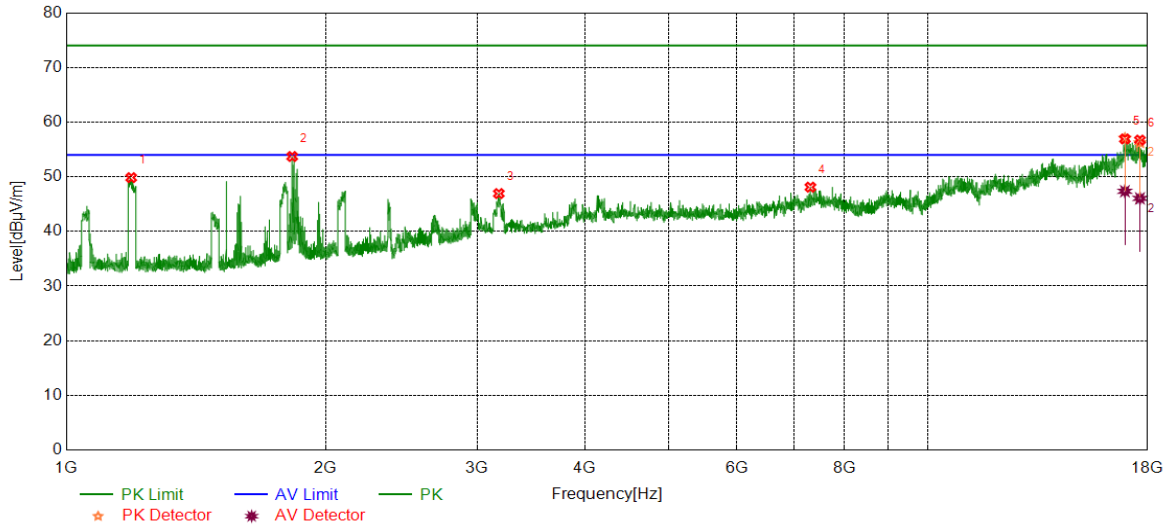


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1189.7737	55.39	-5.55	49.84	74.00	-24.16	peak
2	1829.3537	57.59	-3.88	53.71	74.00	-20.29	peak
3	3178.1473	44.71	2.22	46.93	74.00	-27.07	peak
4	7309.2887	39.25	8.85	48.10	74.00	-25.90	peak
5	16938.6173	37.11	19.94	57.05	74.00	-16.95	peak
		27.41	19.94	47.35	54.00	-6.65	average
6	17634.3293	36.89	19.35	56.24	74.00	-17.76	peak
		26.70	19.35	46.05	54.00	-7.95	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For below 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. For above 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

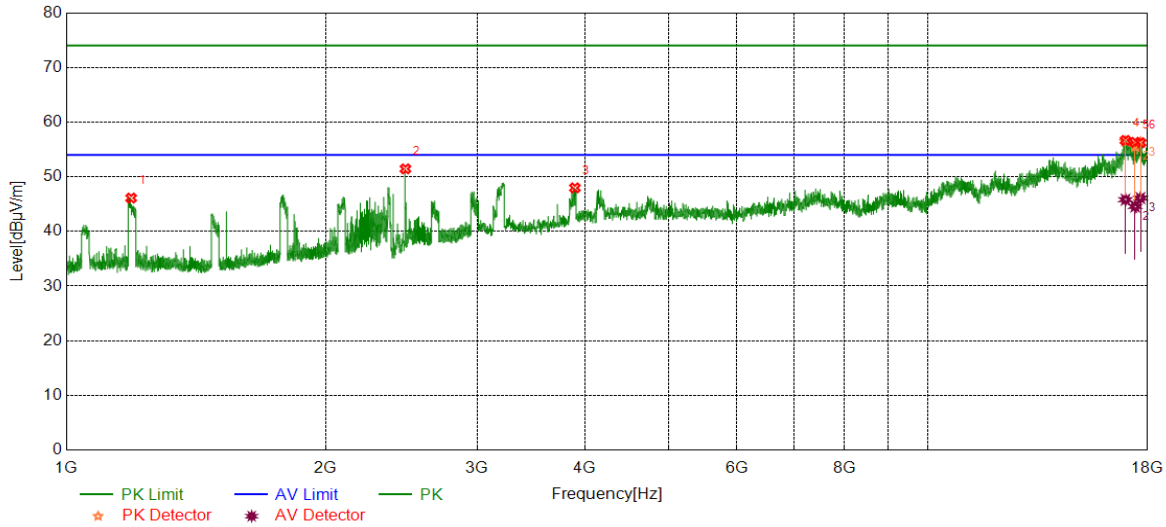

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1189.5237	51.66	-5.55	46.11	74.00	-27.89	peak
2	2476.1845	52.23	-0.78	51.45	74.00	-22.55	peak
3	3894.4868	44.11	3.86	47.97	74.00	-26.03	peak
4	16964.8706	36.37	20.11	56.48	74.00	-17.52	peak
		25.70	20.11	45.81	54.00	-8.19	average
5	17409.3012	36.5	19.04	55.54	74.00	-18.46	peak
		25.53	19.04	44.57	54.00	-9.43	average
6	17658.7073	37.02	19.29	56.31	74.00	-17.69	peak
		26.82	19.29	46.11	54.00	-7.89	average


- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For below 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 5. For above 3GHz part, Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



7.4. SPURIOUS EMISSIONS 18G ~ 26GHz

7.4.1. 8DPSK MODE

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

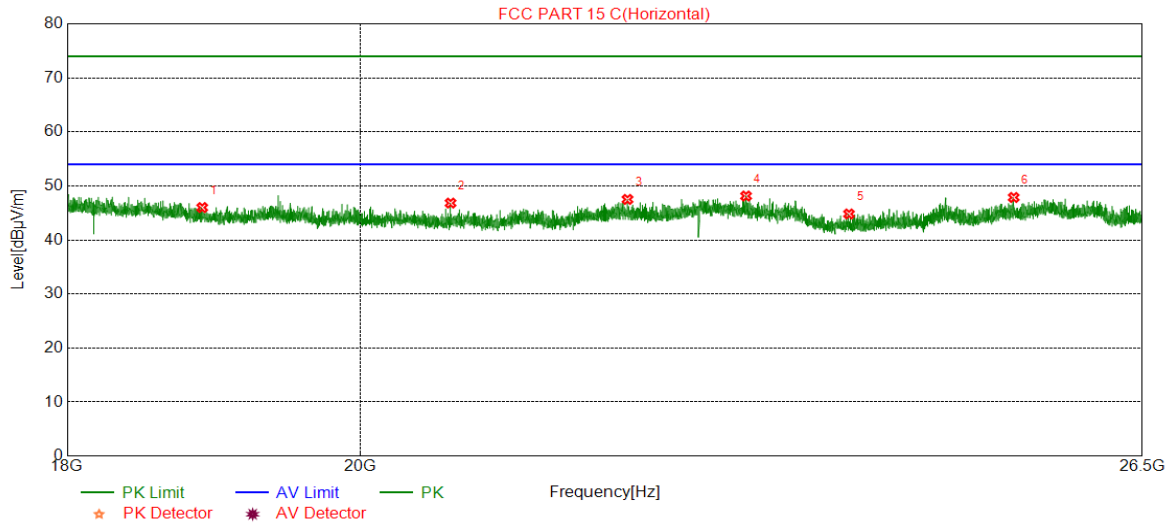


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18895.9896	47.10	-1.11	45.99	74.00	-28.01	peak
2	20662.4662	47.65	-0.83	46.82	74.00	-27.18	peak
3	22020.9021	47.31	0.19	47.50	74.00	-26.50	peak
4	22980.6481	46.91	1.22	48.13	74.00	-25.87	peak
5	23847.7348	45.71	-0.90	44.81	74.00	-29.19	peak
6	25303.9304	47.34	0.52	47.86	74.00	-26.14	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

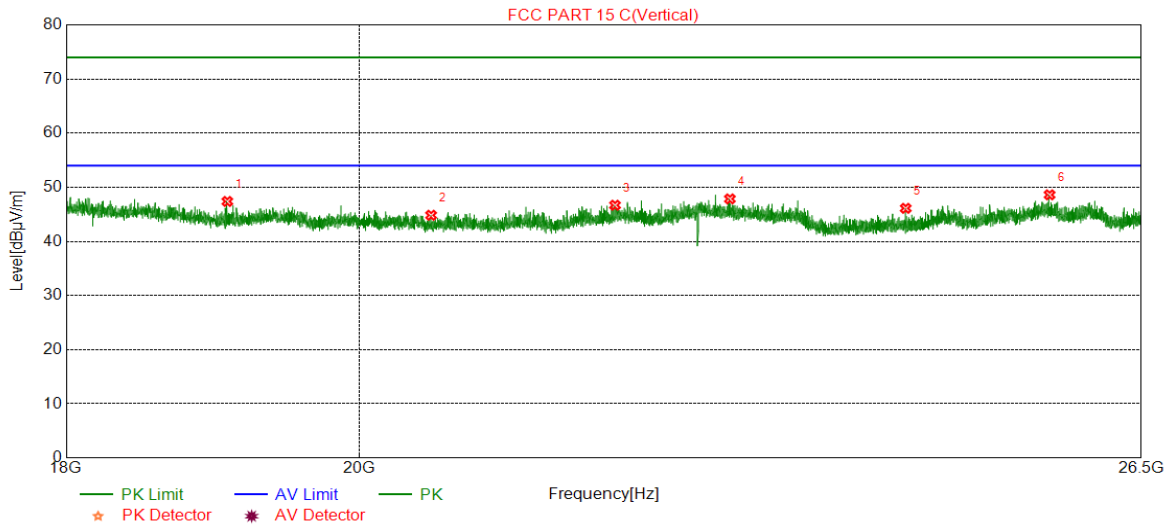

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19074.5075	48.45	-1.07	47.38	74.00	-26.62	peak
2	20525.6026	45.54	-0.71	44.83	74.00	-29.17	peak
3	21929.9430	46.61	0.07	46.68	74.00	-27.32	peak
4	22855.6856	46.73	1.12	47.85	74.00	-26.15	peak
5	24348.4348	46.88	-0.77	46.11	74.00	-27.89	peak
6	25642.2642	47.51	1.09	48.60	74.00	-25.40	peak


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All constructions and test modes have been tested, only the worst data record in the report

7.5. SPURIOUS EMISSIONS 30M ~ 1 GHz

7.5.1. 8DPSK MODE

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

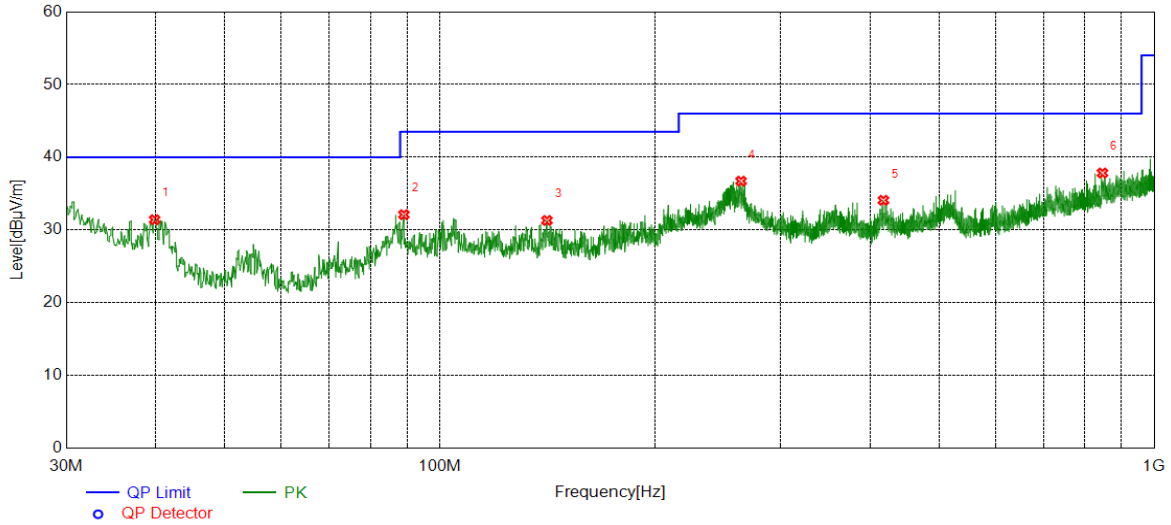


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.8950	10.58	20.84	31.42	40.00	-8.58	peak
2	89.0789	17.75	14.36	32.11	43.50	-11.39	peak
3	141.2701	11.45	19.86	31.31	43.50	-12.19	peak
4	264.0844	17.37	19.35	36.72	46.00	-9.28	peak
5	417.8448	10.68	23.40	34.08	46.00	-11.92	peak
6	846.4336	7.46	30.38	37.84	46.00	-8.16	peak

- Note: 1. Result Level = Read Level + Correct Factor.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

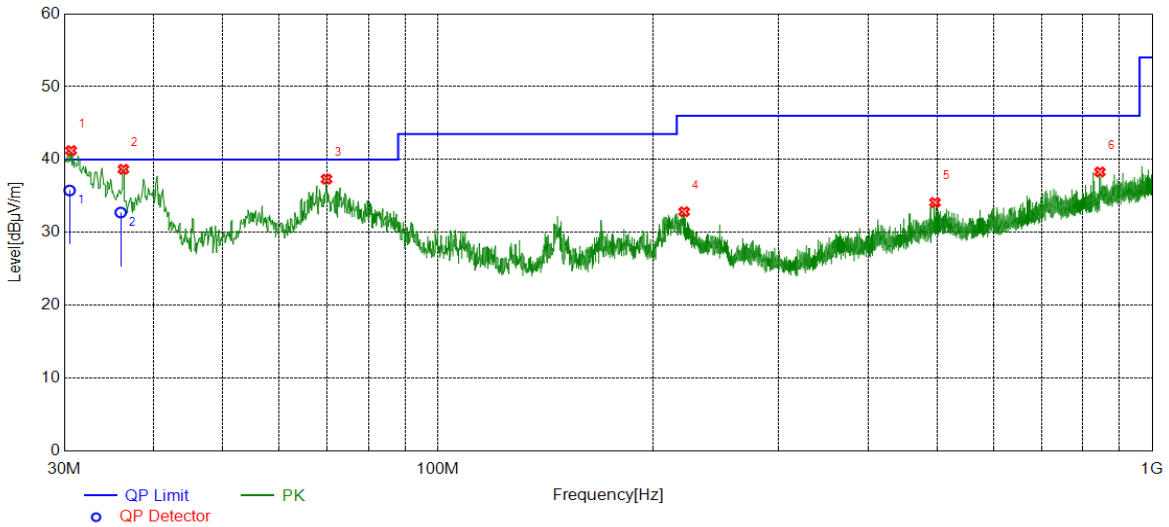

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.5214	8.94	26.82	35.76	40.00	-4.24	QP
2	35.9887	9.40	23.33	32.73	40.00	-7.27	QP
3	69.8710	22.57	14.74	37.31	40.00	-2.69	peak
4	221.2061	15.17	17.67	32.84	46.00	-13.16	peak
5	496.5197	8.48	25.63	34.11	46.00	-11.89	peak
6	844.8815	7.94	30.36	38.30	46.00	-7.70	peak

Note: 1. Result Level = Read Level + Correct Factor.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


Note: All constructions and test modes have been tested, only the worst data record in the report

7.6. SPURIOUS EMISSIONS BELOW 30M

7.6.1. 8DPSK MODE

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, Face-on)


9KHz~ 150kHz

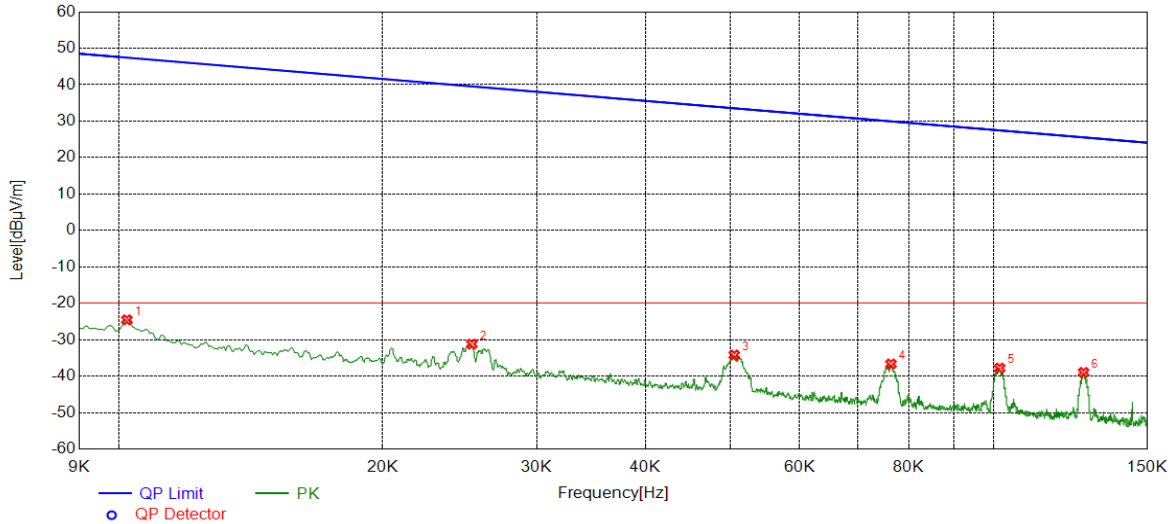

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0102	36.72	-61.25	-24.53	47.41	-71.94	peak
2	0.0253	29.80	-60.99	-31.19	39.55	-70.74	peak
3	0.0505	26.98	-61.16	-34.18	33.54	-67.72	peak
4	0.0763	24.86	-61.52	-36.66	29.95	-66.61	peak
5	0.1016	23.08	-60.87	-37.79	27.47	-65.26	peak
6	0.1267	22.20	-61.17	-38.97	25.55	-64.52	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report

150kHz ~ 490kHz

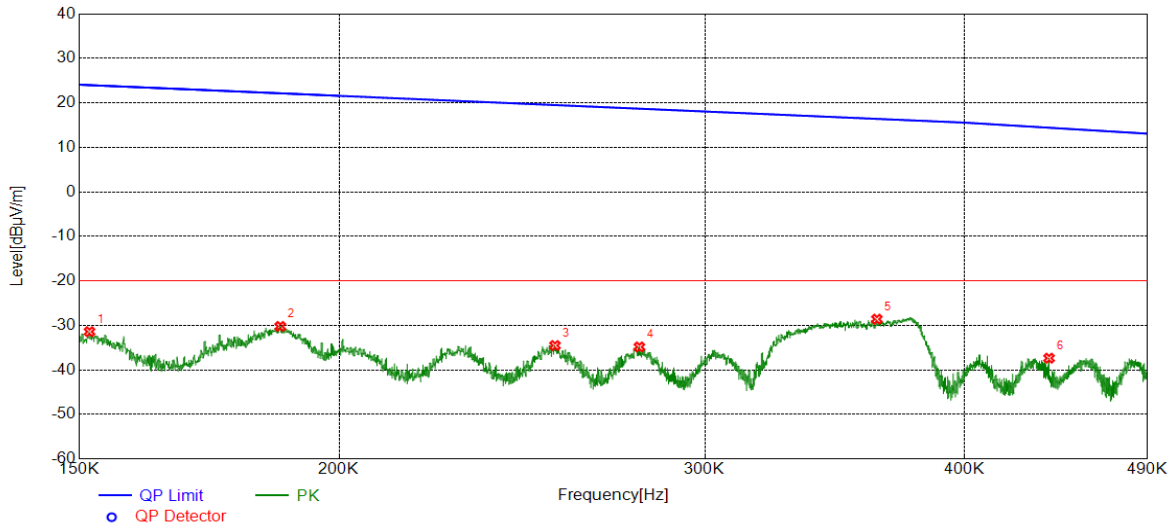


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1517	30.03	-61.44	-31.41	23.98	-55.39	peak
2	0.1874	31.03	-61.26	-30.23	22.15	-52.38	peak
3	0.2541	26.42	-60.94	-34.52	19.50	-54.02	peak
4	0.2790	26.08	-60.92	-34.84	18.69	-53.53	peak
5	0.3630	32.25	-60.84	-28.59	16.40	-44.99	peak
6	0.4393	23.42	-60.78	-37.36	14.41	-51.77	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report



490kHz ~ 30MHz

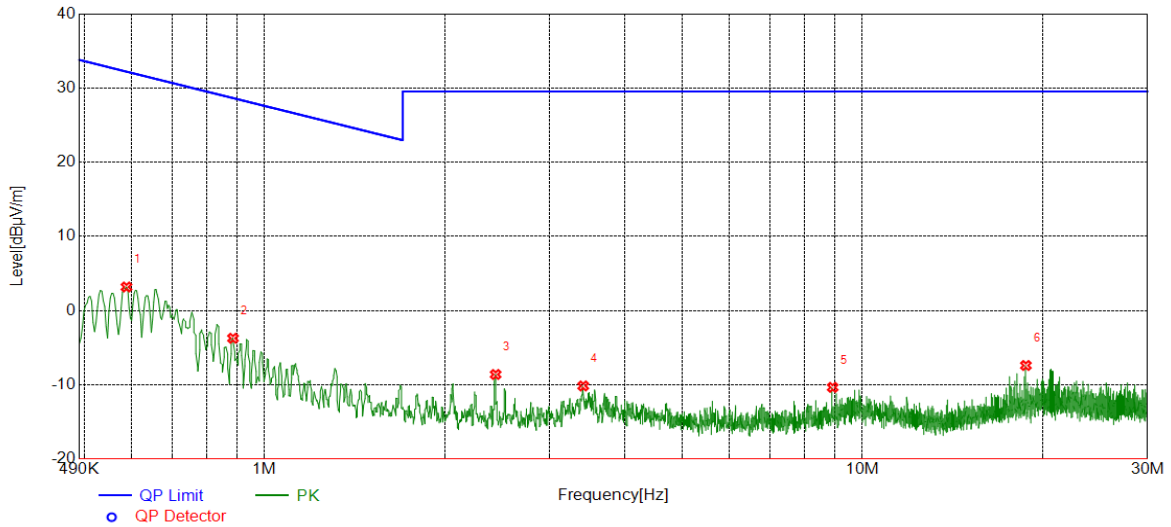

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5874	23.93	-20.75	3.18	32.22	-29.04	peak
2	0.8855	16.91	-20.64	-3.73	28.66	-32.39	peak
3	2.4349	11.83	-20.44	-8.61	29.54	-38.15	peak
4	3.4118	10.25	-20.41	-10.16	29.54	-39.70	peak
5	8.9189	8.93	-19.28	-10.35	29.54	-39.89	peak
6	18.7703	10.52	-17.92	-7.40	29.54	-36.94	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report

Note: All constructions and test modes have been tested, only the worst data record in the report


8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to CFR 47 FCC §15.207 (a)

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

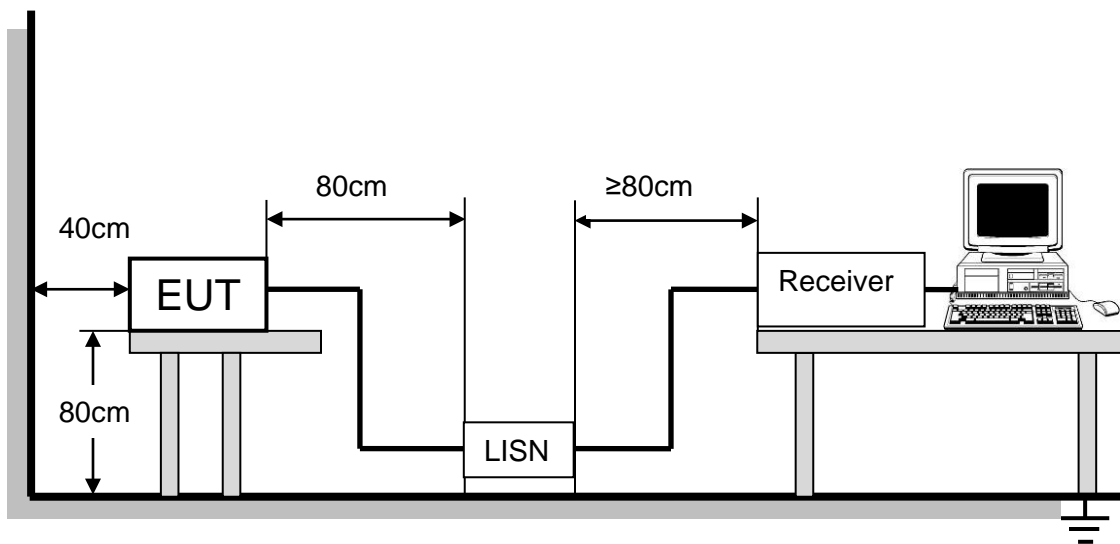

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 7 and 13 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT


Temperature	20°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V



TEST RESULTS

8.1. 8DPSK MODE


LINE N RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

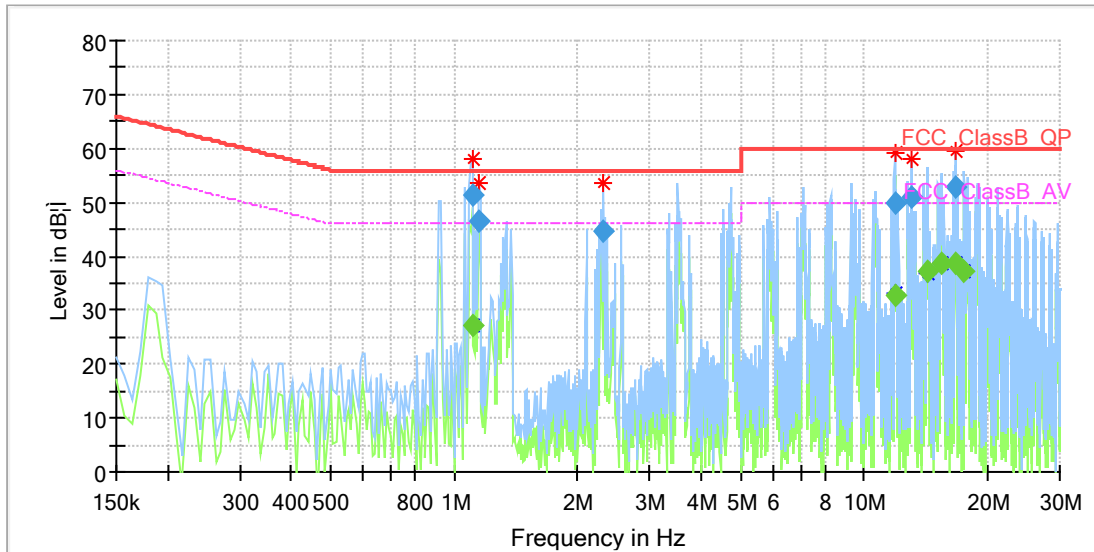

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
1.105200	---	27.23	46.00	18.77	1000.0	9.000	N	OFF	9.7
1.105200	51.25	---	56.00	4.75	1000.0	9.000	N	OFF	9.7
1.149975	46.39	---	56.00	9.61	1000.0	9.000	N	OFF	9.7
2.306663	44.64	---	56.00	11.36	1000.0	9.000	N	OFF	9.6
11.866125	---	32.92	50.00	17.08	1000.0	9.000	N	OFF	9.8
11.866125	49.72	---	60.00	10.28	1000.0	9.000	N	OFF	9.8
13.052663	51.10	---	60.00	8.90	1000.0	9.000	N	OFF	9.8
14.269050	---	37.31	50.00	12.69	1000.0	9.000	N	OFF	9.8
15.477975	---	38.86	50.00	11.14	1000.0	9.000	N	OFF	9.7
16.649588	---	38.54	50.00	11.46	1000.0	9.000	N	OFF	9.8
16.657050	52.72	---	60.00	7.28	1000.0	9.000	N	OFF	9.8
17.574938	---	37.31	50.00	12.69	1000.0	9.000	N	OFF	9.8

LINE L RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

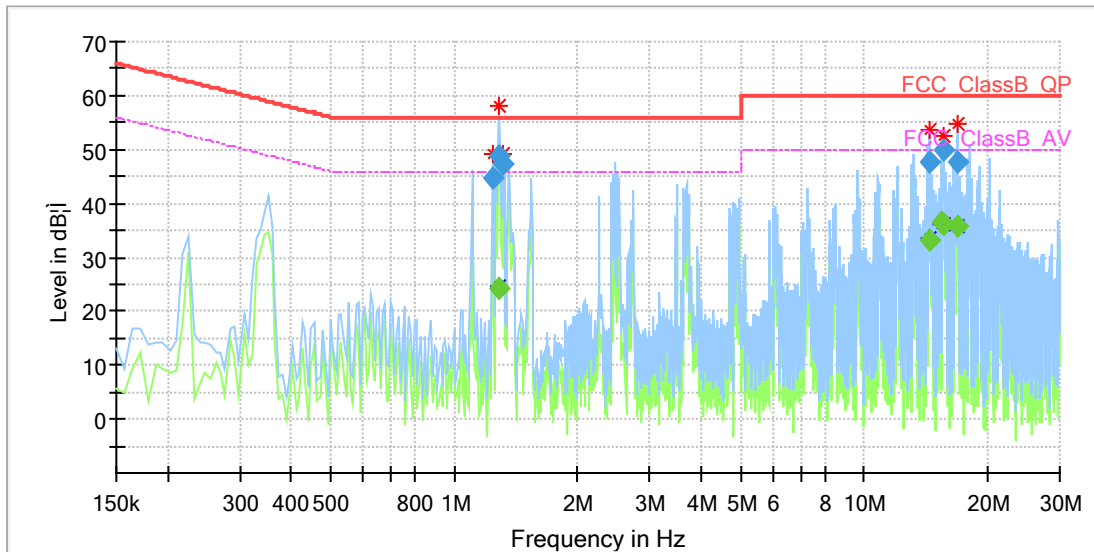

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
1.239525	44.66	---	56.00	11.34	1000.0	9.000	L1	OFF	9.5
1.291763	---	24.32	46.00	21.68	1000.0	9.000	L1	OFF	9.5
1.291763	48.62	---	56.00	7.38	1000.0	9.000	L1	OFF	9.5
1.321613	47.34	---	56.00	8.66	1000.0	9.000	L1	OFF	9.5
14.440688	---	33.02	50.00	16.98	1000.0	9.000	L1	OFF	9.8
14.448150	47.75	---	60.00	12.25	1000.0	9.000	L1	OFF	9.8
15.418275	---	36.46	50.00	13.54	1000.0	9.000	L1	OFF	9.8
15.604838	---	36.10	50.00	13.90	1000.0	9.000	L1	OFF	9.8
15.627225	---	35.97	50.00	14.03	1000.0	9.000	L1	OFF	9.8
15.634688	49.89	---	60.00	10.11	1000.0	9.000	L1	OFF	9.8
16.858538	---	35.82	50.00	14.18	1000.0	9.000	L1	OFF	9.8
16.858538	47.71	---	60.00	12.29	1000.0	9.000	L1	OFF	9.8

Note: 1. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector and Average detector mode re-measured. The point which exceeds the QP limit is measured by peak detector.
2. All the test modes have been tested, only the worst data record in the report.



9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

END OF REPORT