

TEST REPORT

Reference No..... : WTX21X06057037W-1
FCC ID : 2AVFE-HTCHC06
Applicant : Fortune Ship International Industrial Limited
Address : Unit C, 24/F, Golden Bear Industrial Centre, 66-82 Chai Wan Kok Street,
Tsuen Wan NT, HONGKONG
Product Name : Mobile phone holder
Test Model. : HTC HC06
Standards : FCC Part 18
Date of Receipt sample : Jun. 11, 2021
Date of Test..... : Jun. 11, 2021 to Jun. 22, 2021
Date of Issue : Jun. 22, 2021
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

WaltekTesting Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Jason Su / Project Engineer

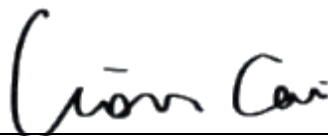

Lion Cai / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND OPERATION MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	6
1.7 TEST EQUIPMENT LIST AND DETAILS.....	7
2. SUMMARY OF TEST RESULTS	8
3. CONDUCTED EMISSIONS	9
3.1 STANDARD APPLICABLE.....	9
3.2 TEST PROCEDURE.....	9
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....	9
3.4 ENVIRONMENTAL CONDITIONS.....	9
3.5 TEST RECEIVER SETUP.....	10
3.6 SUMMARY OF TEST RESULTS/PLOTS.....	10
4. RADIATED EMISSIONS	19
4.1 TEST PROCEDURE.....	19
4.2 TEST RECEIVER SETUP.....	21
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	21
4.4 ENVIRONMENTAL CONDITIONS.....	21
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	21
APPENDIX PHOTOGRAPHS	34

Report version

Version No.	Date of issue	Description
Rev.00	Jun. 22, 2021	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Fortune Ship International Industrial Limited
 Address of applicant: Unit C, 24/F, Golden Bear Industrial Centre, 66-82
 Chai Wan Kok Street, Tsuen Wan NT, HONGKONG

Manufacturer: Fortune Ship International Industrial Limited
 Address of manufacturer: Unit C, 24/F, Golden Bear Industrial Centre, 66-82
 Chai Wan Kok Street, Tsuen Wan NT, HONGKONG

General Description of EUT	
Product Name:	Mobile phone holder
Trade Name:	HTC
Model No.:	HTC HC06
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	110~205KHz
Antenna Type:	Coil Antenna
Rated Voltage:	Input: DC5V / DC9V / DC12V
Rated Current:	Input: 2A
Rated Power:	Output: 5W / 7.5W / 10W / 15W

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	/	Input DC5V2A; Output 5W
TM2	Wireless Charging	/	Input DC9V2A; Output 10W
TM3	Wireless Charging	/	Input DC12V2A; Output 15W
TM4	Wireless Charging	/	Input DC5V2A; Output 7.5W

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
DC Cable	0.8	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Adapter	XIAOMI	MDY-08-ES	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ± 3.74 dB
		0.15-30MHz ± 3.34 dB
Radiated Emissions	Radiated	30-200MHz ± 4.52 dB
		0.2-1GHz ± 5.56 dB
		1-6GHz ± 3.84 dB
		6-18GHz ± 3.92 dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2021-03-30	2022-03-29
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-04-12	2022-04-11
Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A10179	2021-04-12	2022-04-11
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2021-04-15	2022-04-14

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 18.307 (b)	Conducted Emission	Compliant
§ 18.305 (b)	Radiated Emission	Compliant

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:


Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

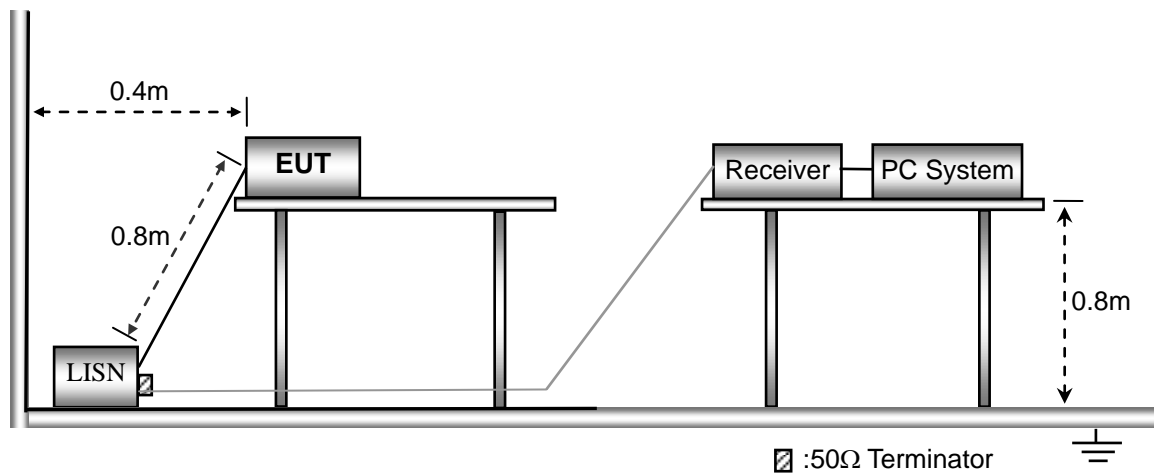

3.4 Environmental Conditions

Temperature:	23.5° C
Relative Humidity:	54%
ATM Pressure:	1016 mbar


3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal


3.6 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

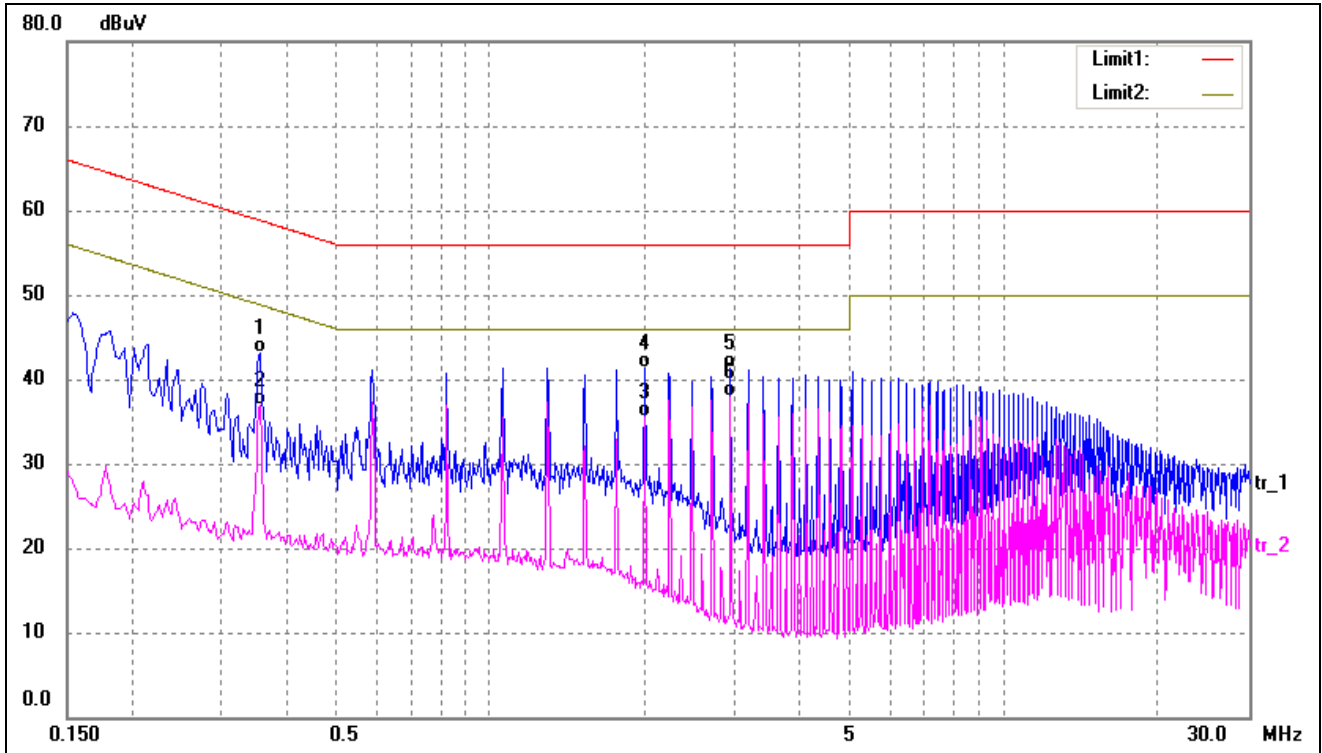


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3540	32.80	10.26	43.06	58.87	-15.81	QP
2	0.3540	26.55	10.26	36.81	48.87	-12.06	AVG
3	1.9980	25.27	10.29	35.56	46.00	-10.44	AVG
4	2.0020	30.97	10.29	41.26	56.00	-14.74	QP
5	2.9420	30.97	10.27	41.24	56.00	-14.76	QP
6*	2.9420	27.68	10.27	37.95	46.00	-8.05	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

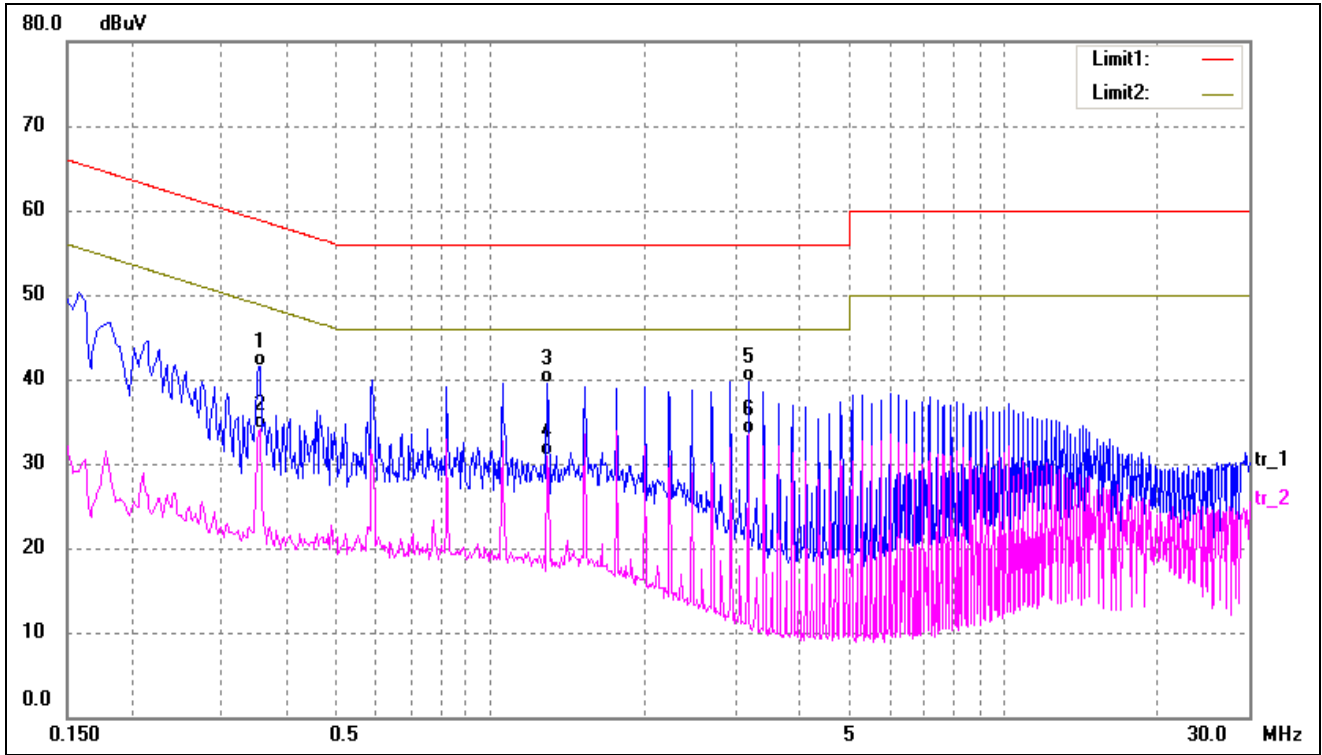


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3540	31.22	10.26	41.48	58.87	-17.39	QP
2	0.3540	23.79	10.26	34.05	48.87	-14.82	AVG
3	1.2940	29.32	10.22	39.54	56.00	-16.46	QP
4	1.2940	20.77	10.22	30.99	46.00	-15.01	AVG
5	3.1740	29.44	10.27	39.71	56.00	-16.29	QP
6*	3.1740	23.26	10.27	33.53	46.00	-12.47	AVG

Test mode:	TM2	Polarity:	Line
------------	-----	-----------	------

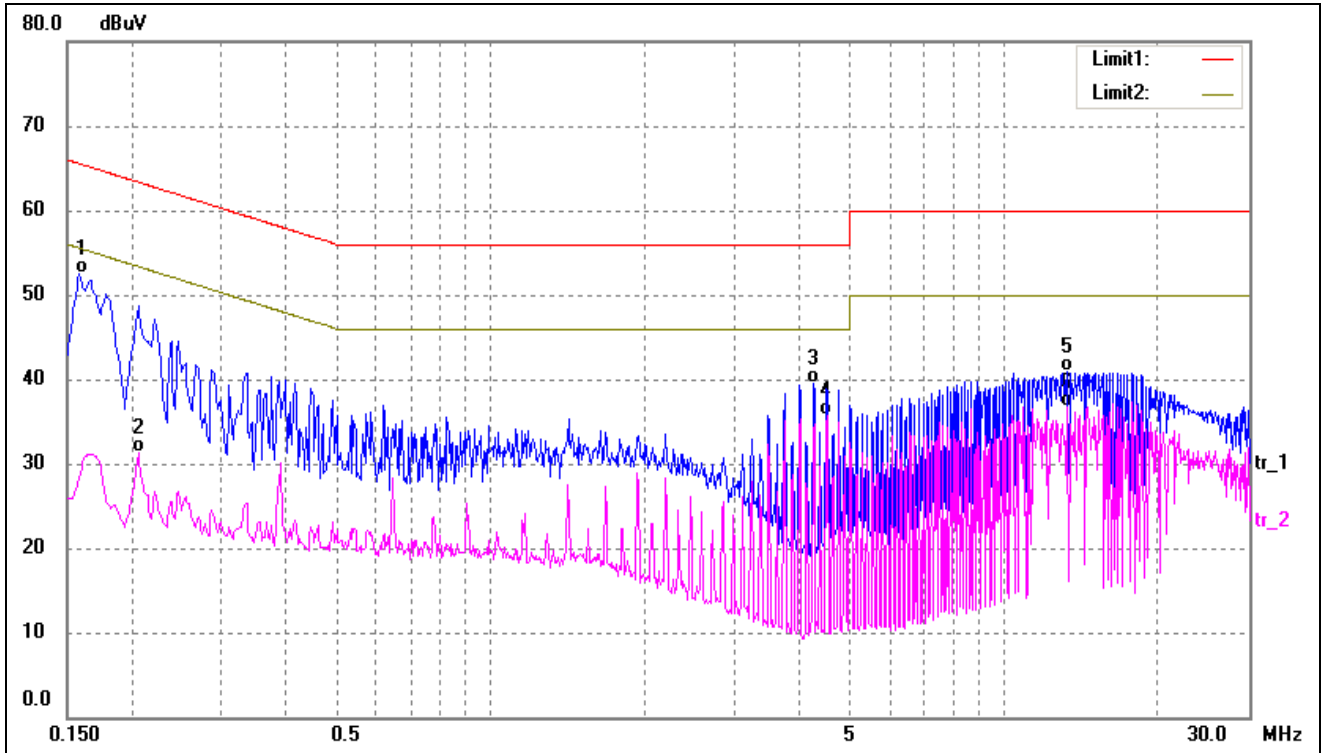


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	42.23	10.25	52.48	65.57	-13.09	QP
2	0.2060	20.98	10.27	31.25	53.37	-22.12	AVG
3	4.2580	29.18	10.24	39.42	56.00	-16.58	QP
4*	4.5260	25.42	10.24	35.66	46.00	-10.34	AVG
5	13.2860	30.45	10.47	40.92	60.00	-19.08	QP
6	13.2860	26.25	10.47	36.72	50.00	-13.28	AVG

Test mode:	TM2	Polarity:	Neutral
------------	-----	-----------	---------

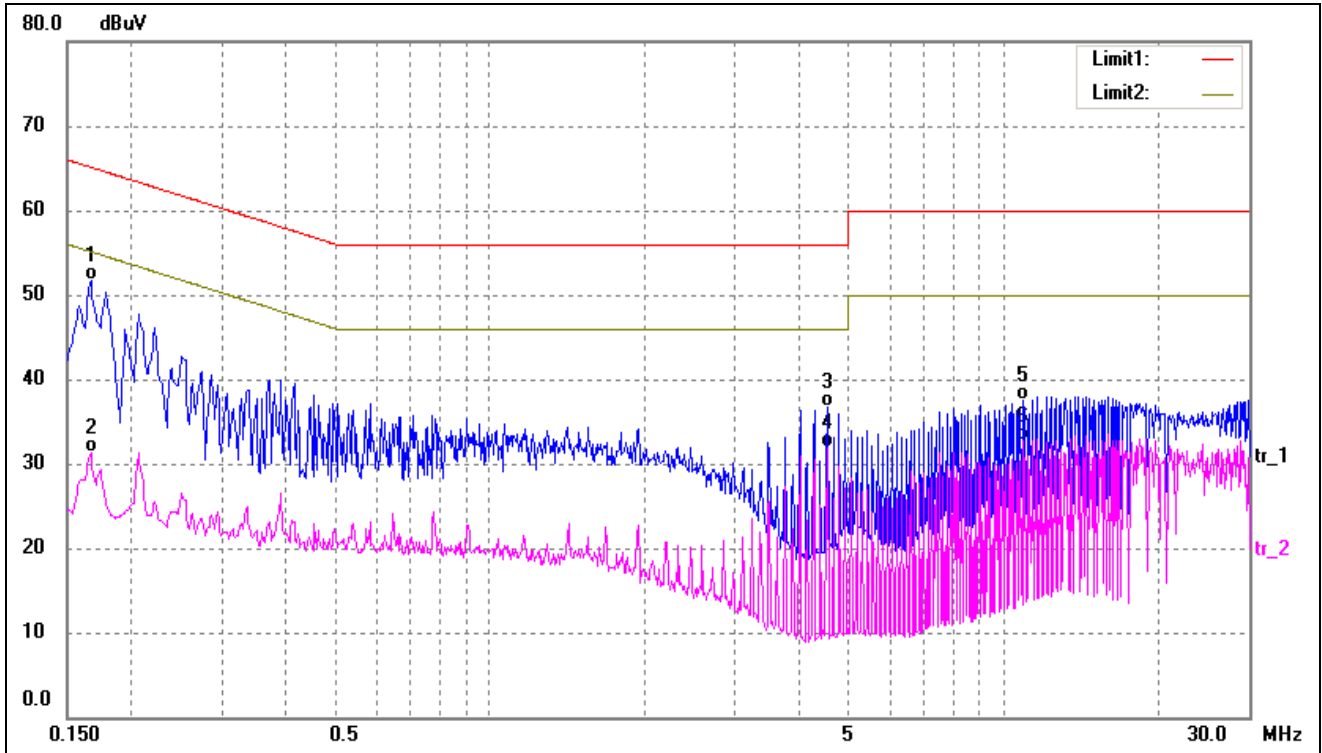


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1660	41.39	10.26	51.65	65.16	-13.51	QP
2	0.1660	20.97	10.26	31.23	55.16	-23.93	AVG
3	4.5260	26.53	10.24	36.77	56.00	-19.23	QP
4	4.5260	21.61	10.24	31.85	46.00	-14.15	AVG
5	10.8660	27.15	10.33	37.48	60.00	-22.52	QP
6	10.8660	22.30	10.33	32.63	50.00	-17.37	AVG

Test mode:	TM3	Polarity:	Line
------------	-----	-----------	------

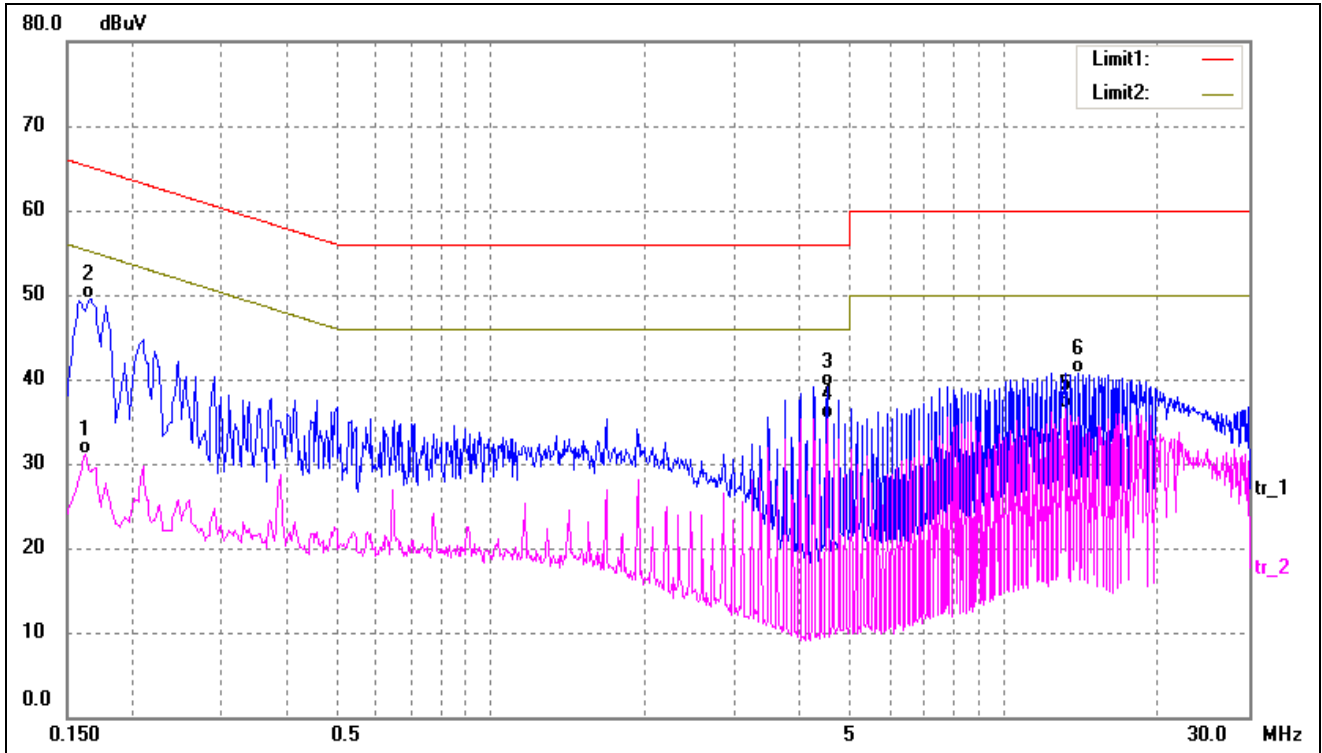


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	20.81	10.26	31.07	55.36	-24.29	AVG
2	0.1660	39.25	10.26	49.51	65.16	-15.65	QP
3	4.5260	28.78	10.24	39.02	56.00	-16.98	QP
4*	4.5260	25.15	10.24	35.39	46.00	-10.61	AVG
5	13.1860	25.97	10.47	36.44	50.00	-13.56	AVG
6	13.9620	30.27	10.52	40.79	60.00	-19.21	QP

Test mode:	TM3	Polarity:	Neutral
------------	-----	-----------	---------

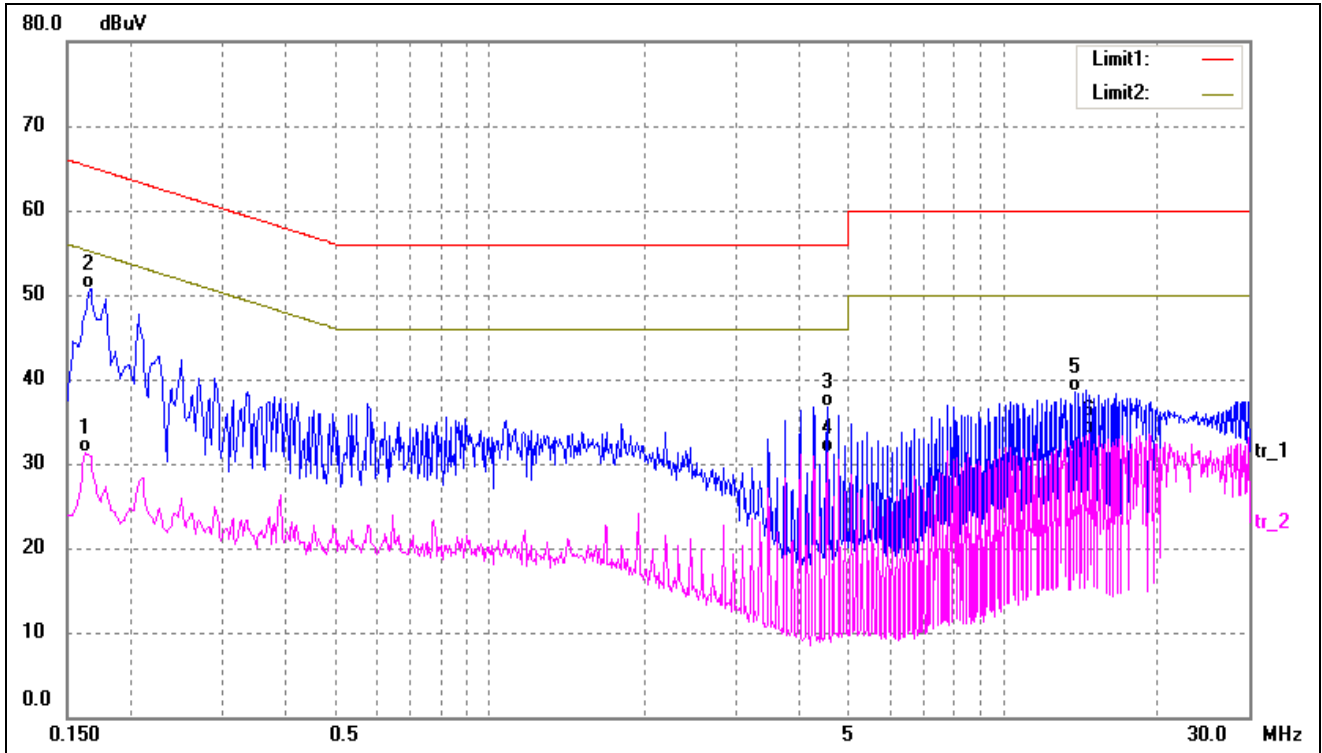


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	21.03	10.26	31.29	55.36	-24.07	AVG
2*	0.1660	40.46	10.26	50.72	65.16	-14.44	QP
3	4.5260	26.45	10.24	36.69	56.00	-19.31	QP
4	4.5260	21.10	10.24	31.34	46.00	-14.66	AVG
5	13.7060	28.02	10.51	38.53	60.00	-21.47	QP
6	14.7380	23.02	10.57	33.59	50.00	-16.41	AVG

Test mode:	TM4	Polarity:	Line
------------	-----	-----------	------

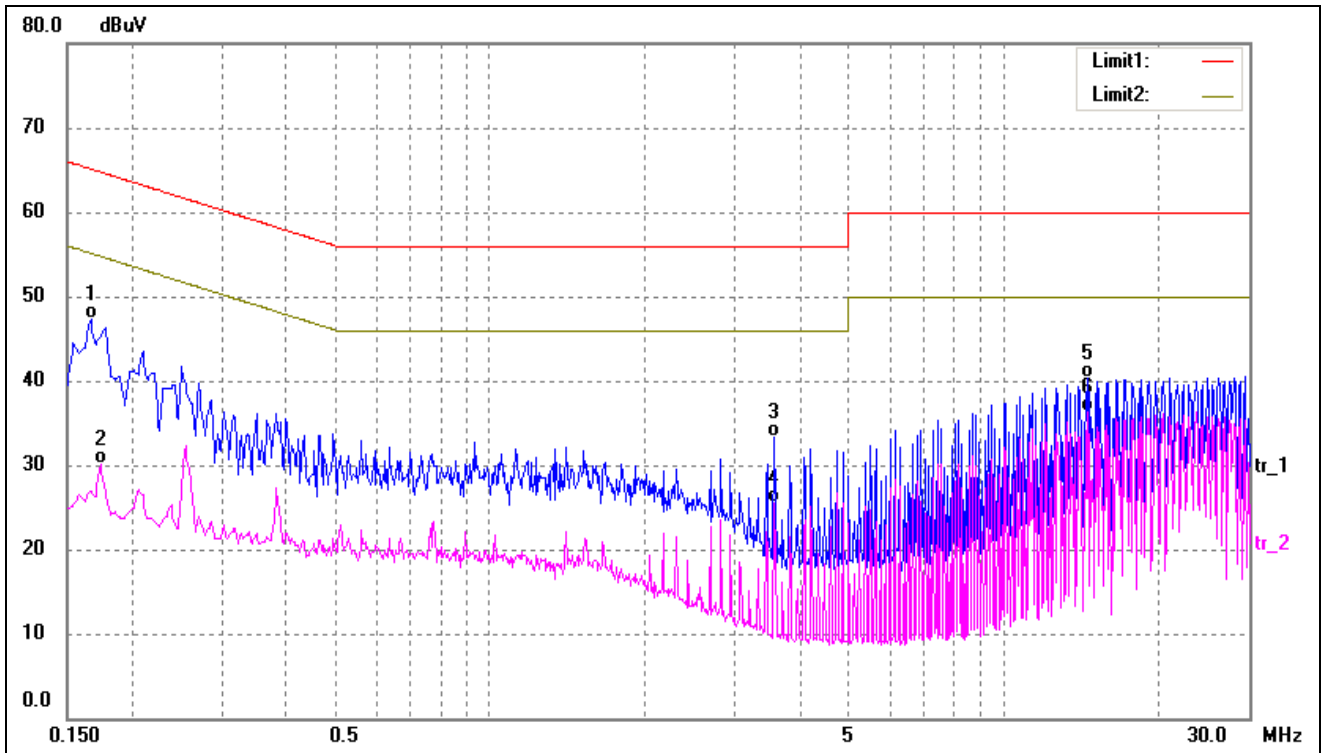

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1660	36.95	10.26	47.21	65.16	-17.95	QP
2	0.1740	19.93	10.25	30.18	54.77	-24.59	AVG
3	3.5820	23.08	10.26	33.34	56.00	-22.66	QP
4	3.5820	15.16	10.26	25.42	46.00	-20.58	AVG
5	14.5740	29.65	10.56	40.21	60.00	-19.79	QP
6*	14.5740	25.76	10.56	36.32	50.00	-13.68	AVG

Test mode:	TM4	Polarity:	Neutral
------------	-----	-----------	---------

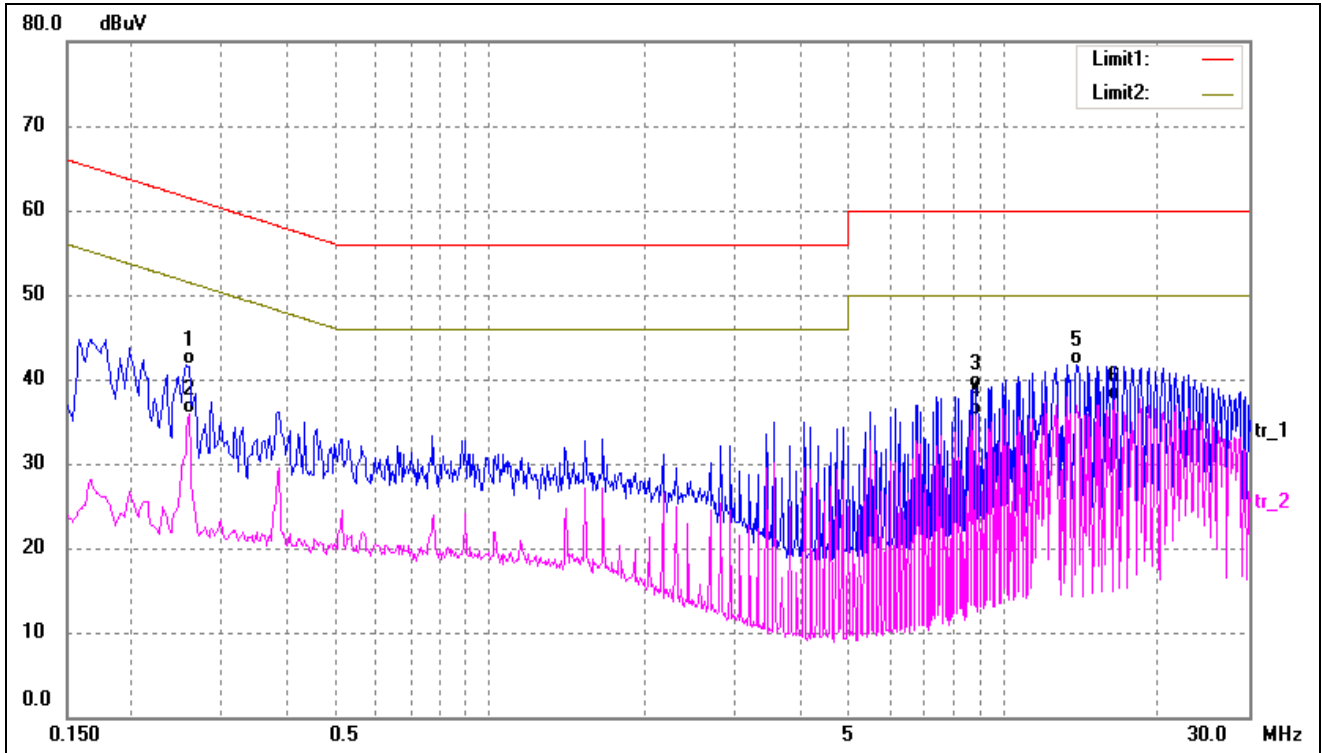

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2540	31.39	10.26	41.65	61.63	-19.98	QP
2	0.2580	25.60	10.26	35.86	51.50	-15.64	AVG
3	8.8100	28.62	10.27	38.89	60.00	-21.11	QP
4	8.8100	25.52	10.27	35.79	50.00	-14.21	AVG
5	13.9140	31.18	10.52	41.70	60.00	-18.30	QP
6*	16.4740	26.88	10.59	37.47	50.00	-12.53	AVG

4. Radiated Emissions


4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

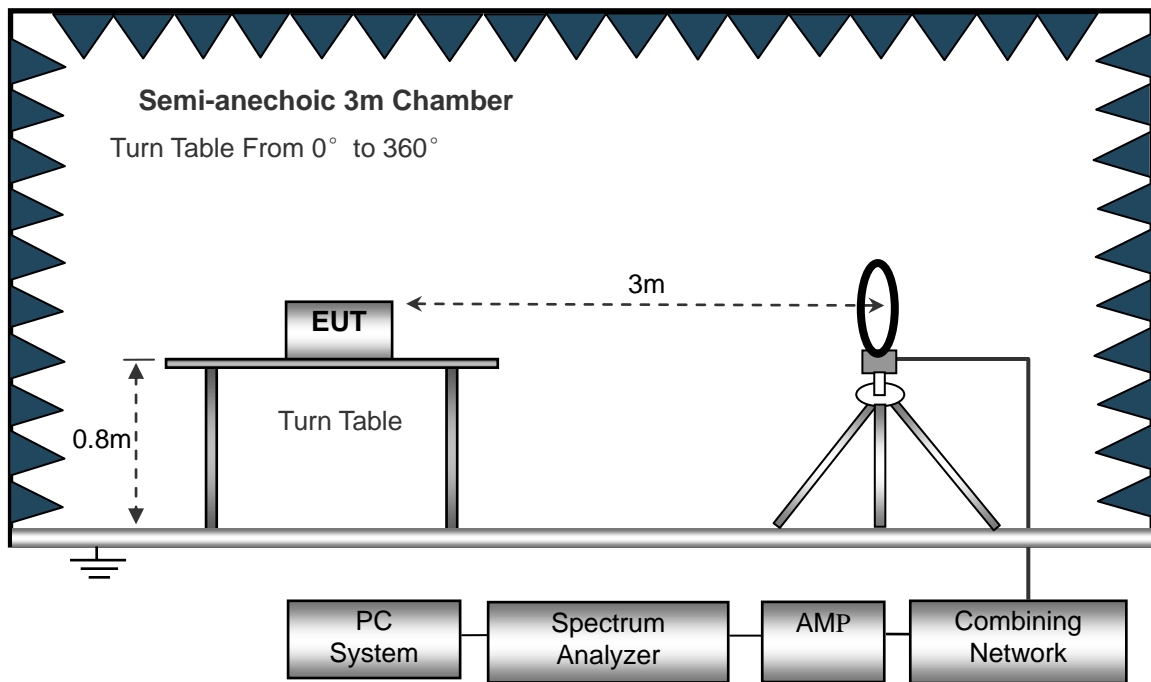

The test setup for emission measurement from 30 MHz to 1 GHz..

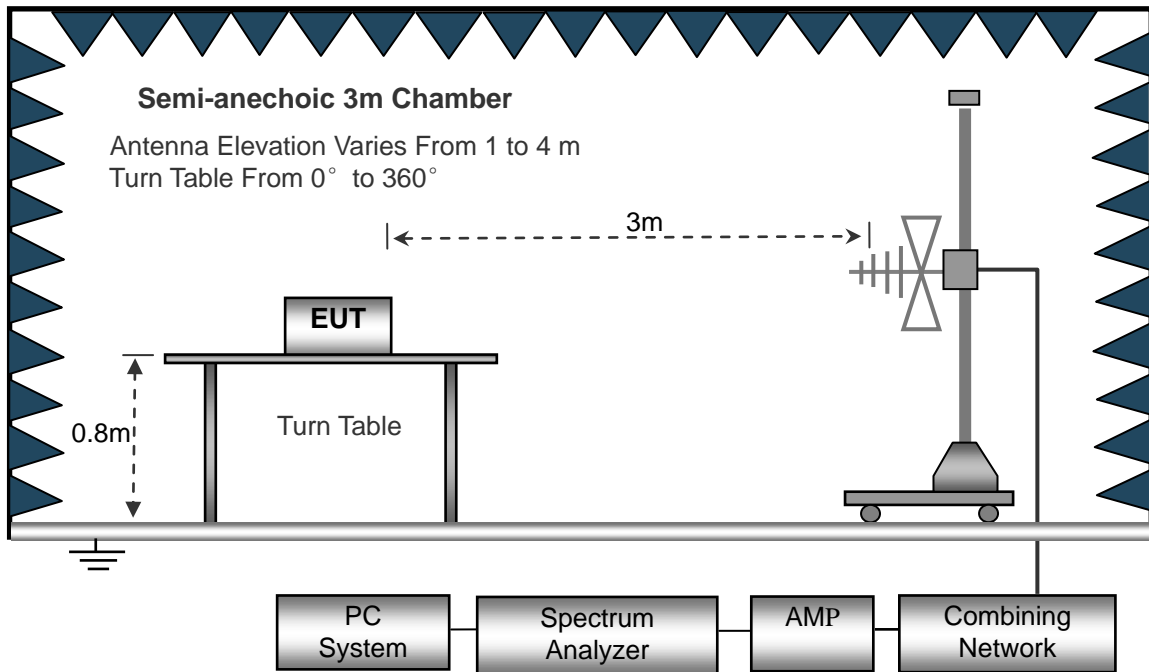

The test setup for emission measurement above 1 GHz..

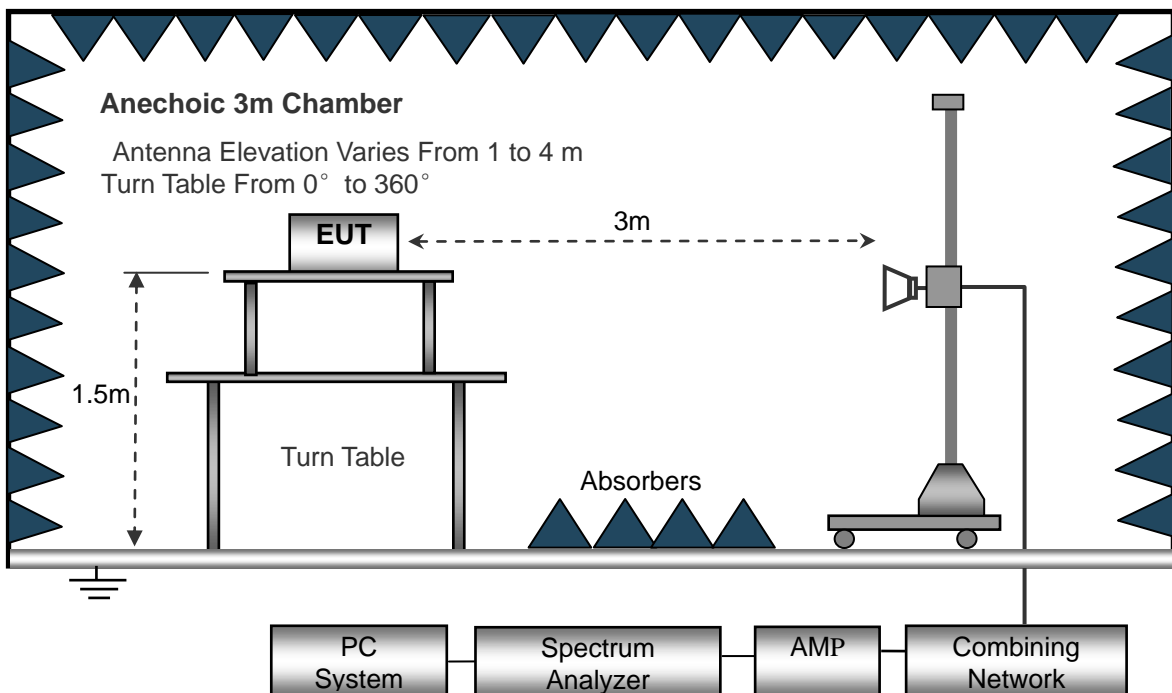

4.2 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCCPart18.305 Limit}$$


4.4 Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

4.5 Summary of Test Results/Plots


Plot of Radiated Emissions Test Data (Below 30MHz)

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

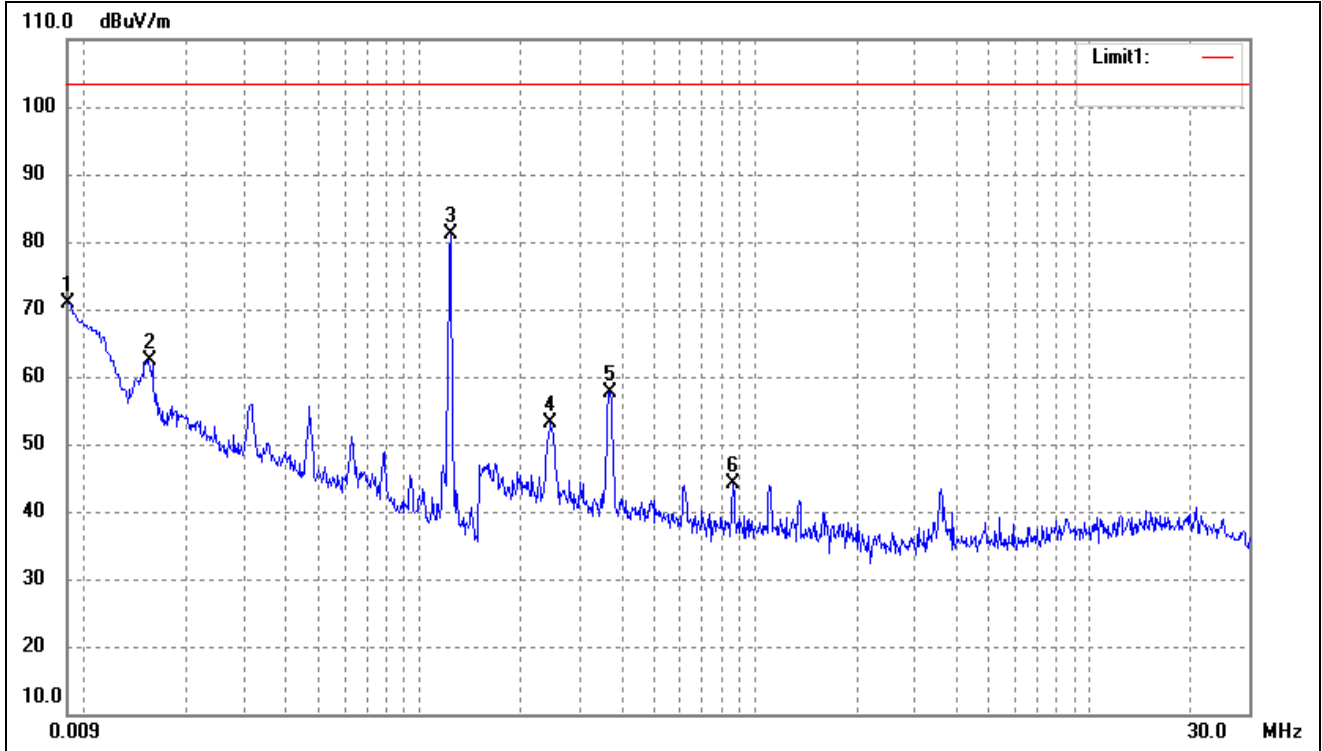


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0090	74.63	-3.69	70.94	103.50	-32.56	-	-	peak
2	0.0157	66.52	-4.08	62.44	103.50	-41.06	-	-	peak
3	0.1232	84.06	-3.01	81.05	103.50	-22.45	-	-	peak
4	0.2468	56.76	-3.54	53.22	103.50	-50.28	-	-	peak
5	0.3692	60.90	-3.37	57.53	103.50	-45.97	-	-	peak
6	0.8618	45.92	-1.79	44.13	103.50	-59.37	-	-	peak

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

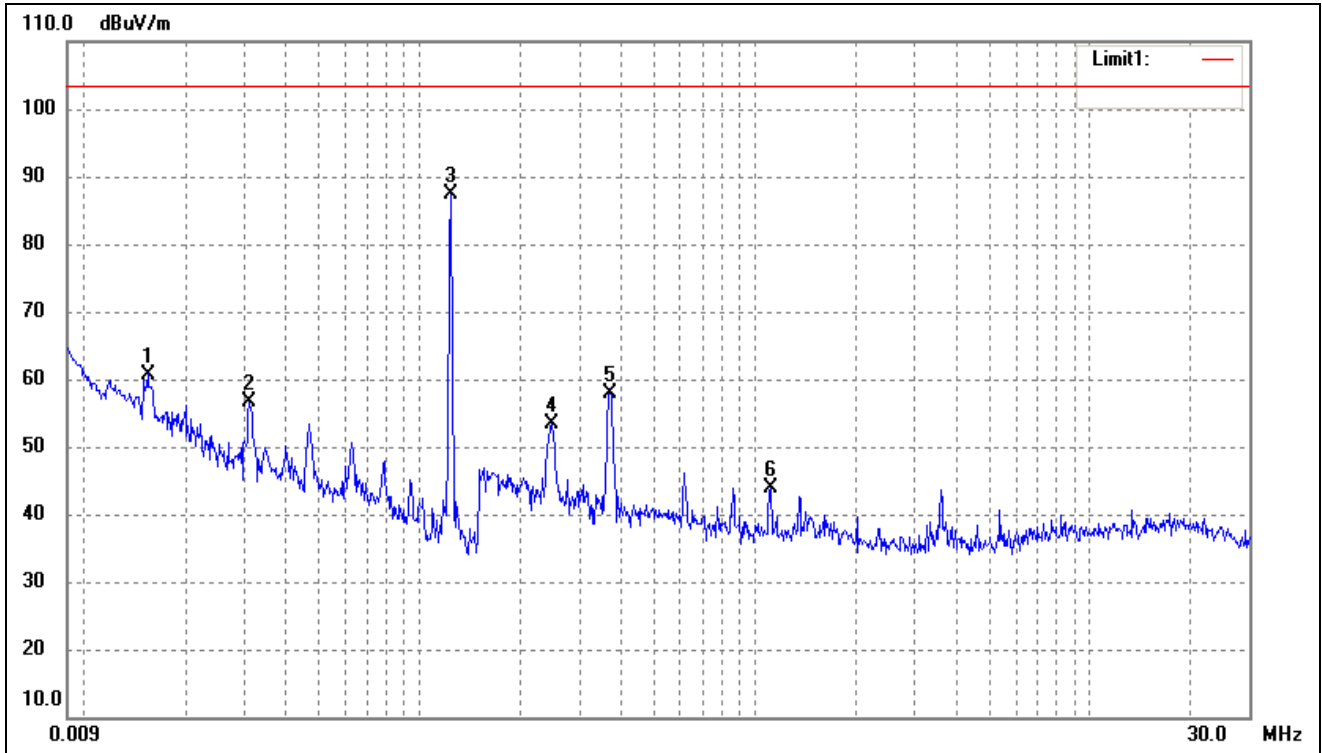


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0156	64.82	-4.07	60.75	103.50	-42.75	-	-	peak
2	0.0311	60.22	-3.64	56.58	103.50	-46.92	-	-	peak
3	0.1235	90.49	-3.00	87.49	103.50	-16.01	-	-	peak
4	0.2481	56.97	-3.55	53.42	103.50	-50.08	-	-	peak
5	0.3692	61.21	-3.37	57.84	103.50	-45.66	-	-	peak
6	1.1114	45.45	-1.60	43.85	103.50	-59.65	-	-	peak

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

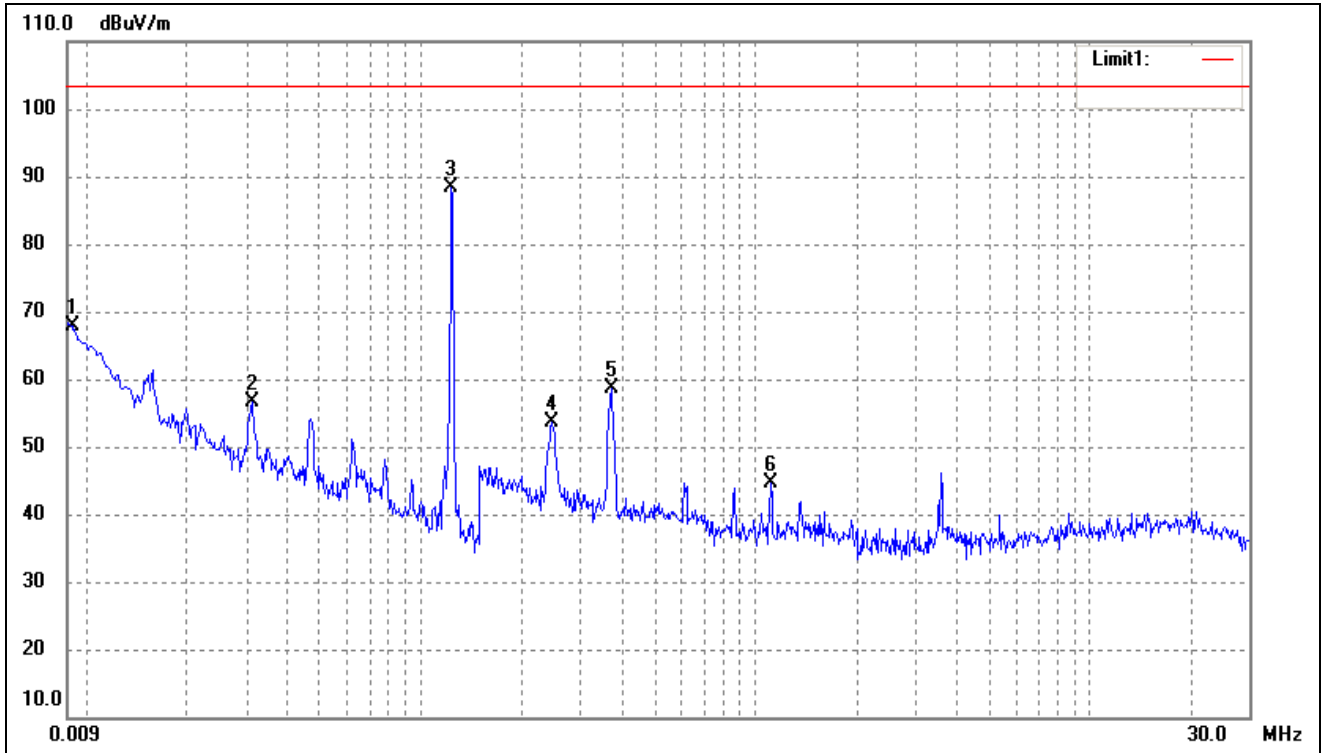

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0091	71.65	-3.70	67.95	103.50	-35.55	-	-	peak
2	0.0314	60.32	-3.62	56.70	103.50	-46.80	-	-	peak
3	0.1232	91.29	-3.01	88.28	103.50	-15.22	-	-	peak
4	0.2455	57.09	-3.54	53.55	103.50	-49.95	-	-	peak
5	0.3712	61.87	-3.36	58.51	103.50	-44.99	-	-	peak
6	1.1114	46.14	-1.60	44.54	103.50	-58.96	-	-	peak


Test mode:	TM4	Polarity:	Vertical
------------	-----	-----------	----------

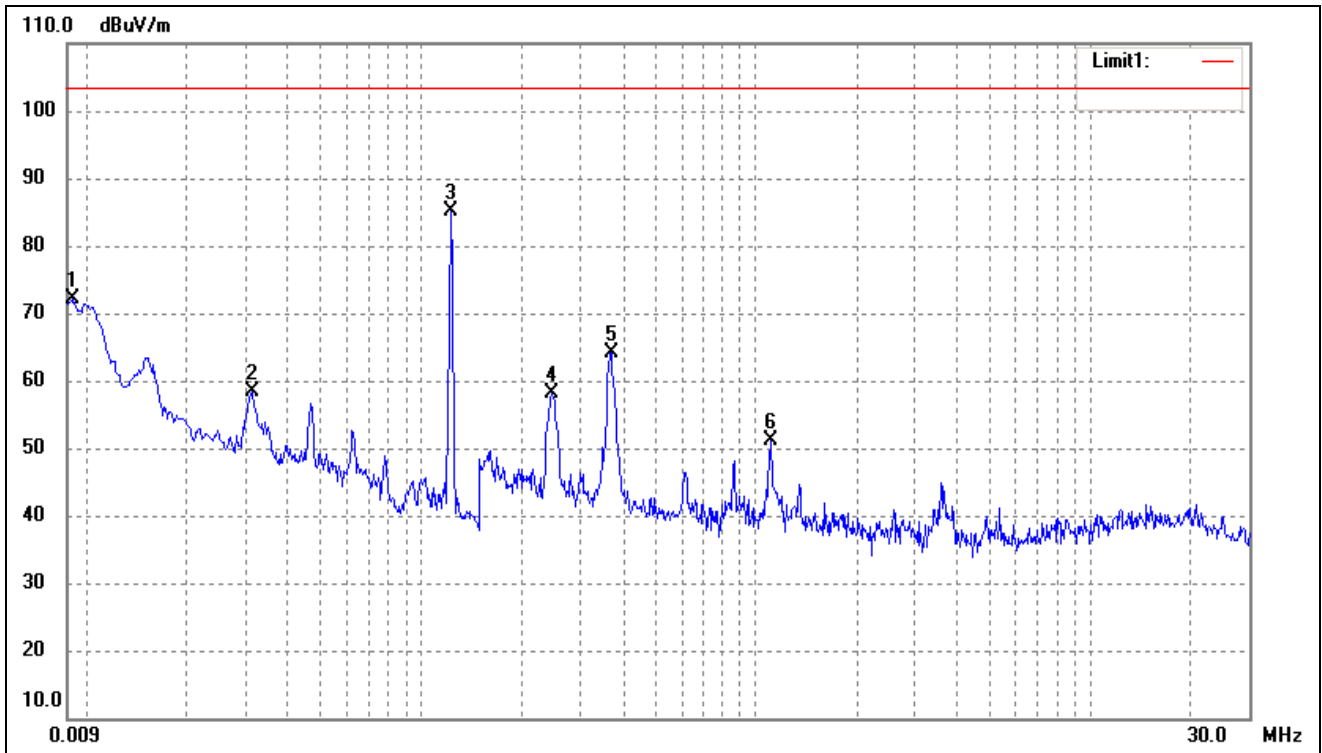

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0091	75.94	-3.70	72.24	103.50	-31.26			peak
2	0.0314	62.05	-3.62	58.43	103.50	-45.07			peak
3	0.1232	88.06	-3.01	85.05	103.50	-18.45			peak
4	0.2467	61.76	-3.54	58.22	103.50	-45.28			peak
5	0.3690	67.40	-3.37	64.03	103.50	-39.47			peak
6	1.1112	52.66	-1.60	51.06	103.50	-52.44			peak


Plot of Radiated Emissions Test Data (Above 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

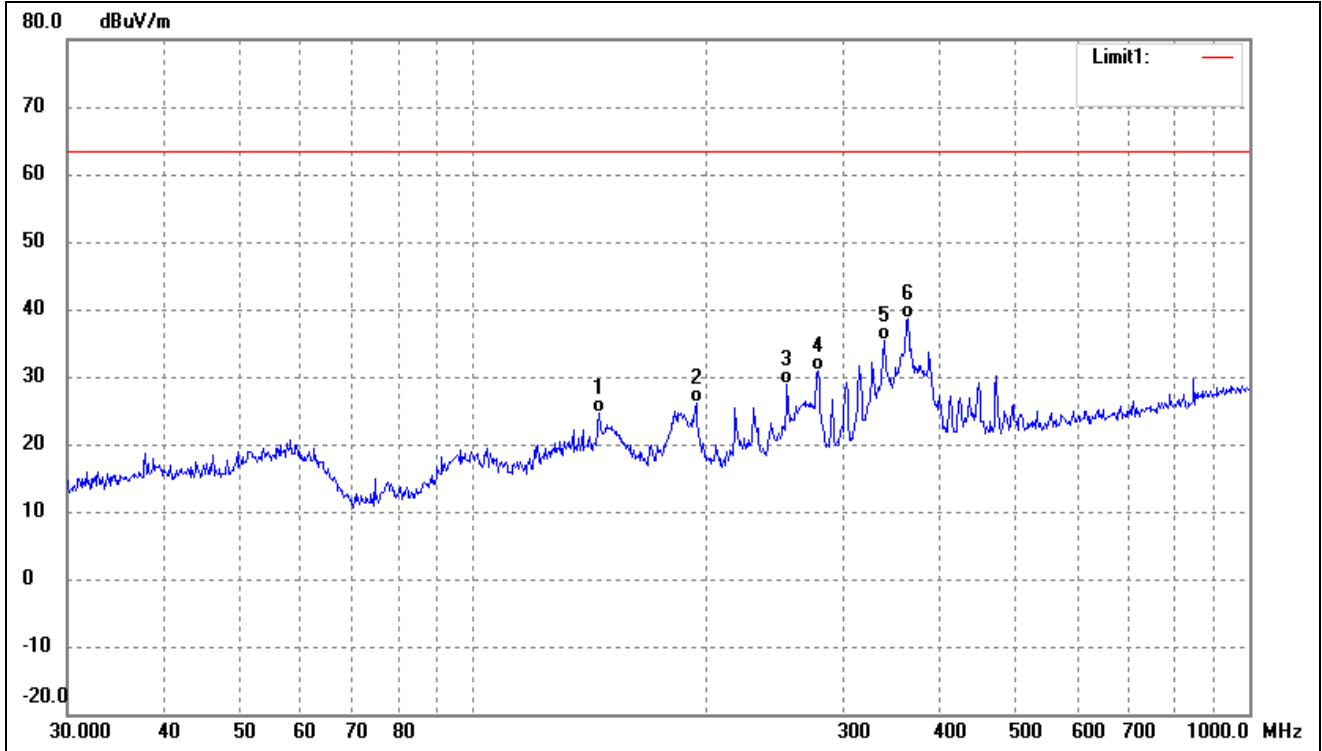


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	145.3506	39.90	-15.25	24.65	63.50	-38.85	-	-	QP
2	193.7728	38.74	-12.65	26.09	63.50	-37.41	-	-	QP
3	253.8367	39.64	-10.78	28.86	63.50	-34.64	-	-	QP
4	278.0669	40.86	-10.01	30.85	63.50	-32.65	-	-	QP
5	338.4001	43.69	-8.28	35.41	63.50	-28.09	-	-	QP
6	362.9845	46.01	-7.41	38.60	63.50	-24.90	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

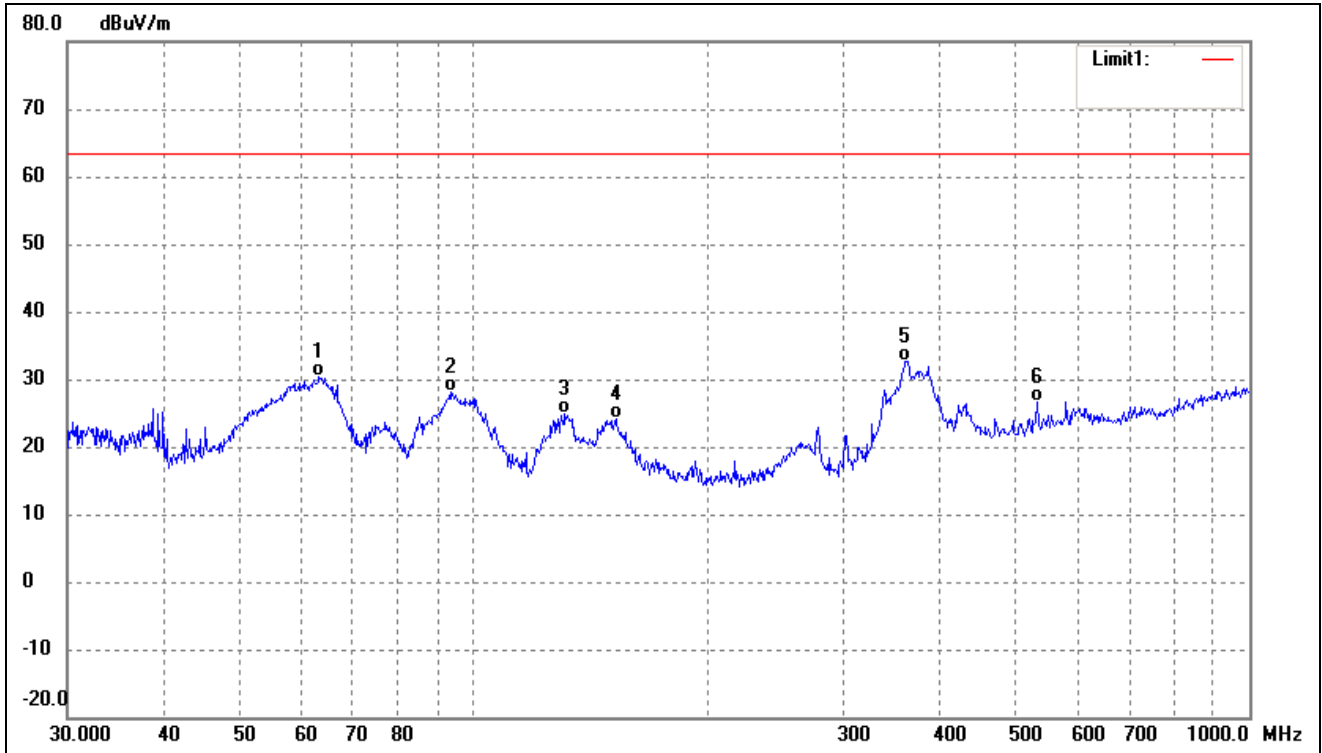


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	63.3132	43.88	-13.58	30.30	63.50	-33.20	-	-	QP
2	93.4402	40.58	-12.54	28.04	63.50	-35.46	-	-	QP
3	131.2965	39.63	-14.84	24.79	63.50	-38.71	-	-	QP
4	152.6641	39.33	-15.16	24.17	63.50	-39.33	-	-	QP
5	360.4477	40.10	-7.50	32.60	63.50	-30.90	-	-	QP
6	533.8321	31.58	-4.84	26.74	63.50	-36.76	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

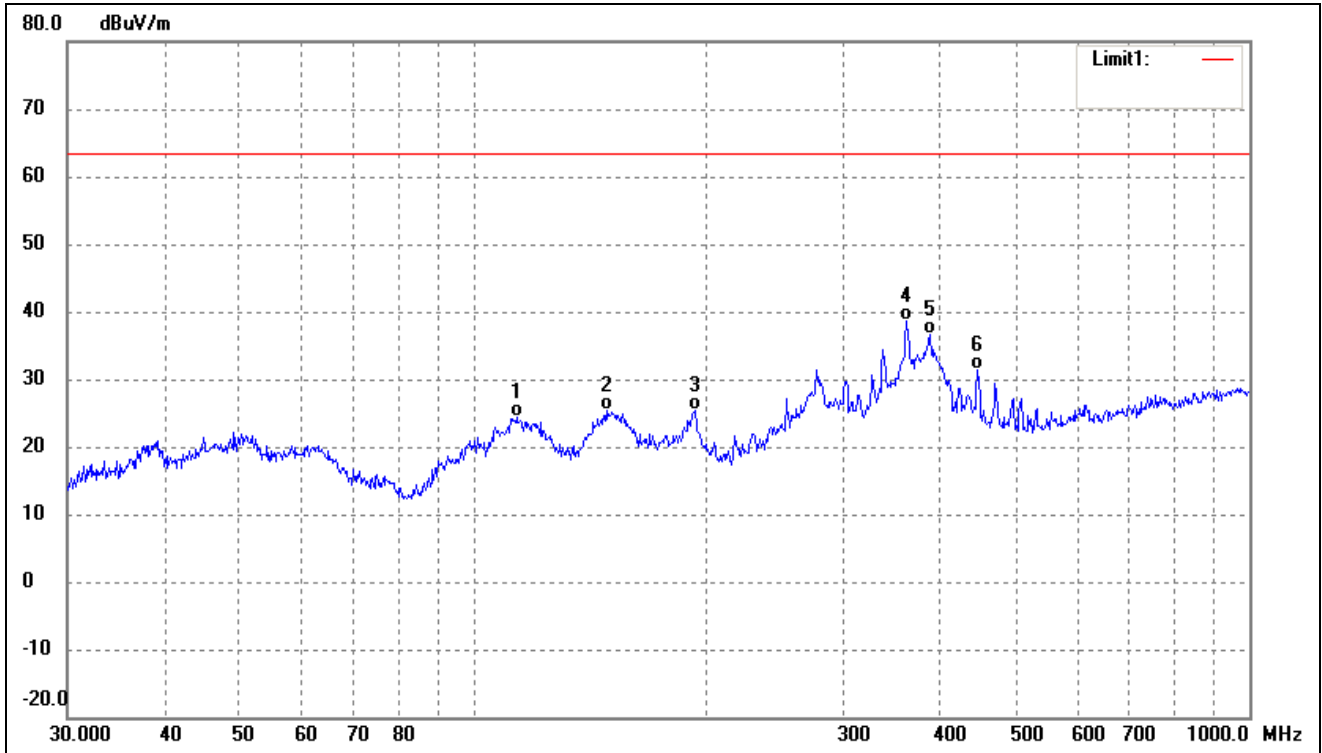


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	113.7143	37.50	-13.10	24.40	63.50	-39.10	-	-	QP
2	148.4410	40.63	-15.28	25.35	63.50	-38.15	-	-	QP
3	193.0945	38.01	-12.69	25.32	63.50	-38.18	-	-	QP
4	361.7139	46.01	-7.45	38.56	63.50	-24.94	-	-	QP
5	387.9920	43.24	-6.57	36.67	63.50	-26.83	-	-	QP
6	446.4141	36.79	-5.40	31.39	63.50	-32.11	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

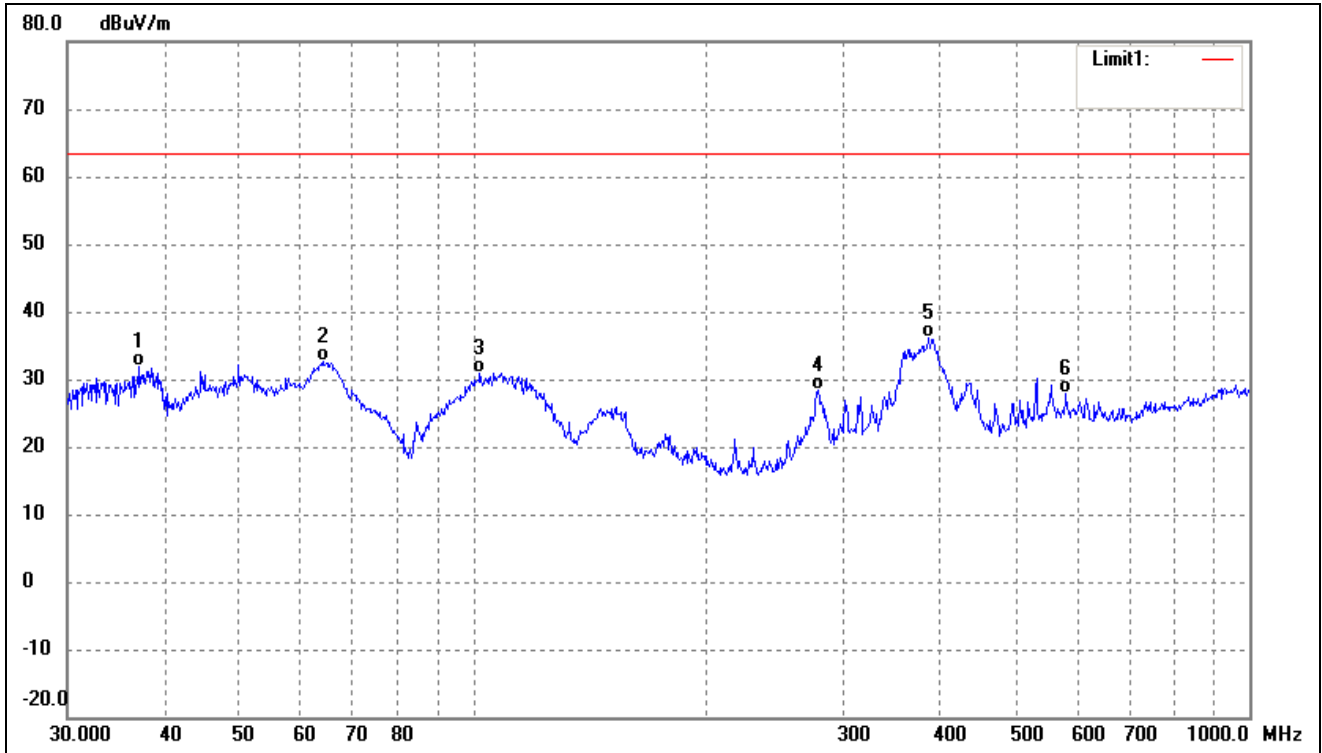


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.1550	43.19	-11.41	31.78	63.50	-31.72	-	-	QP
2	63.9828	46.29	-13.74	32.55	63.50	-30.95	-	-	QP
3	102.0014	43.18	-12.18	31.00	63.50	-32.50	-	-	QP
4	278.0669	38.41	-10.01	28.40	63.50	-35.10	-	-	QP
5	386.6338	42.81	-6.60	36.21	63.50	-27.29	-	-	QP
6	580.7026	31.97	-4.11	27.86	63.50	-35.64	-	-	QP

Test mode:	TM3	Polarity:	Horizontal
------------	-----	-----------	------------

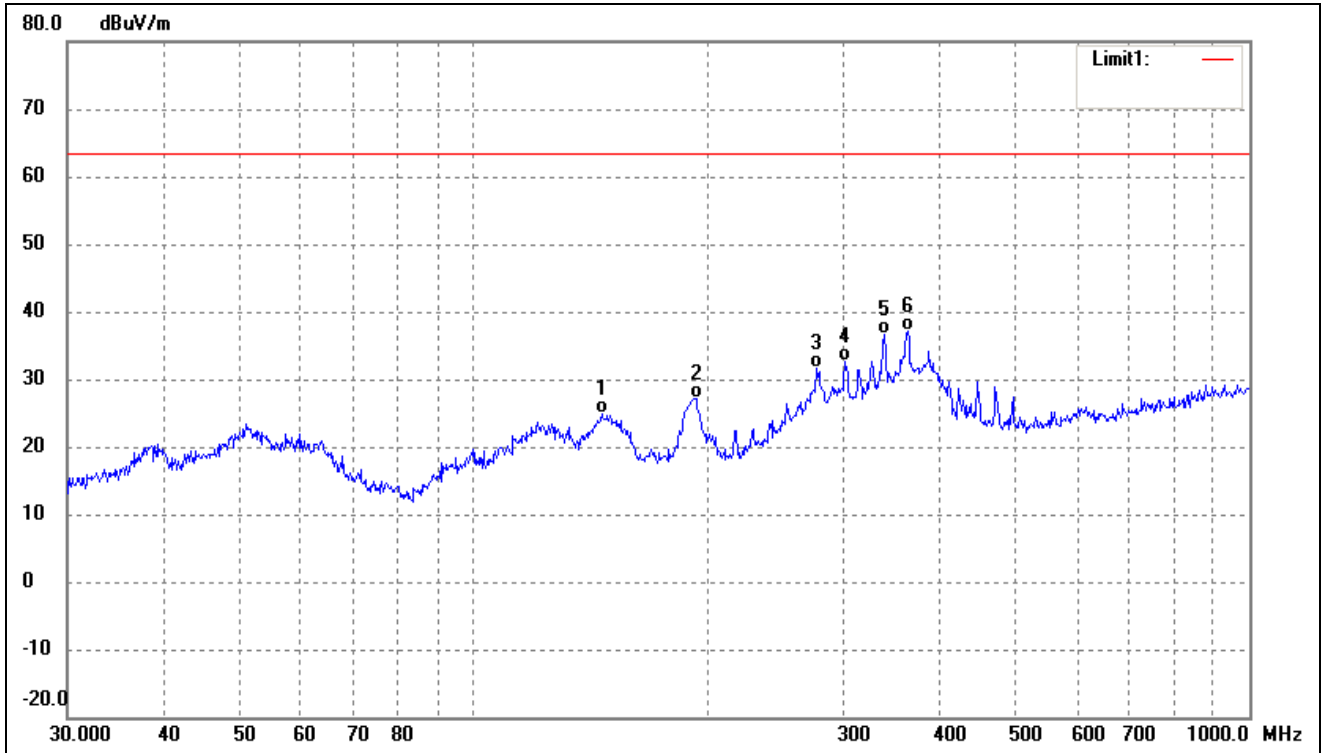


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	146.3735	40.12	-15.25	24.87	63.50	-38.63	-	-	QP
2	193.7728	39.84	-12.65	27.19	63.50	-36.31	-	-	QP
3	277.0935	41.62	-10.04	31.58	63.50	-31.92	-	-	QP
4	301.4224	41.86	-9.29	32.57	63.50	-30.93	-	-	QP
5	338.4001	44.84	-8.28	36.56	63.50	-26.94	-	-	QP
6	362.9845	44.63	-7.41	37.22	63.50	-26.28	-	-	QP

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

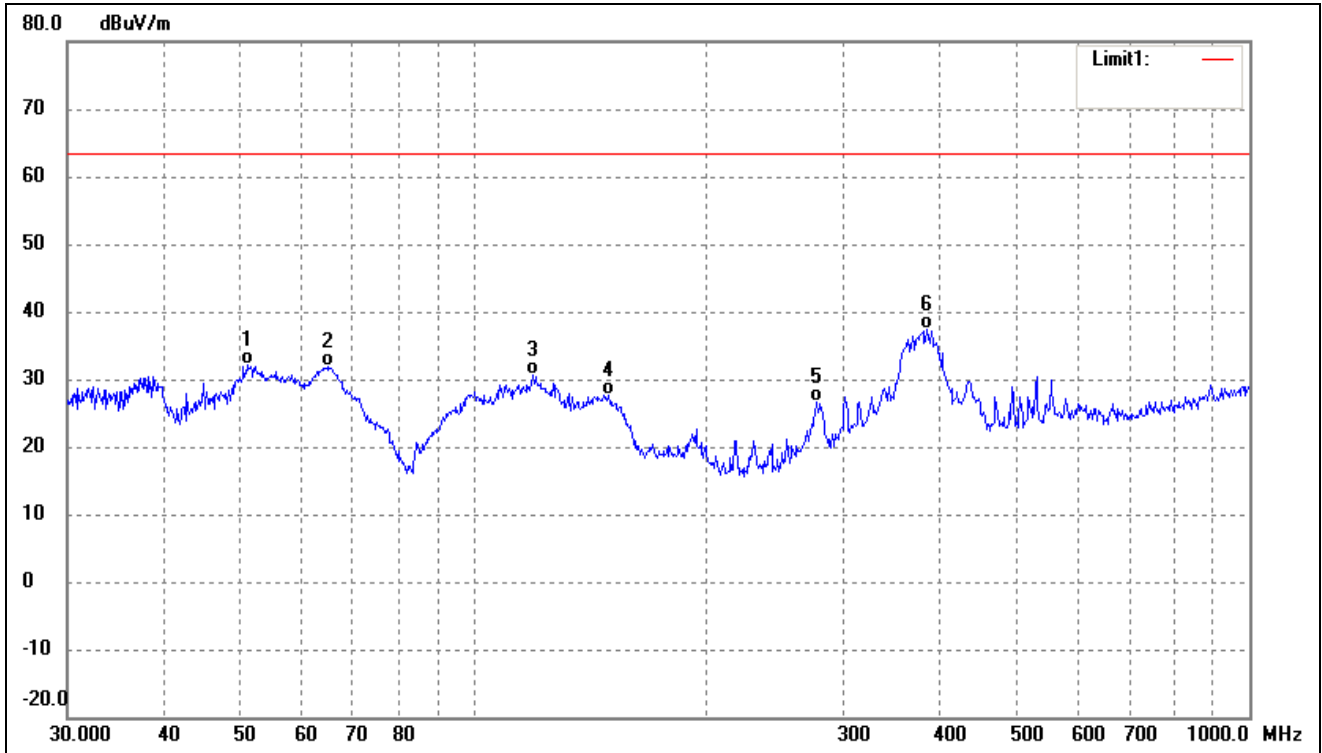


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.1209	43.29	-11.10	32.19	63.50	-31.31	-	-	QP
2	65.1145	45.78	-14.00	31.78	63.50	-31.72	-	-	QP
3	119.4361	44.40	-13.85	30.55	63.50	-32.95	-	-	QP
4	149.4857	43.00	-15.29	27.71	63.50	-35.79	-	-	QP
5	277.0935	36.75	-10.04	26.71	63.50	-36.79	-	-	QP
6	383.9318	44.18	-6.68	37.50	63.50	-26.00	-	-	QP

Test mode:	TM4	Polarity:	Horizontal
------------	-----	-----------	------------

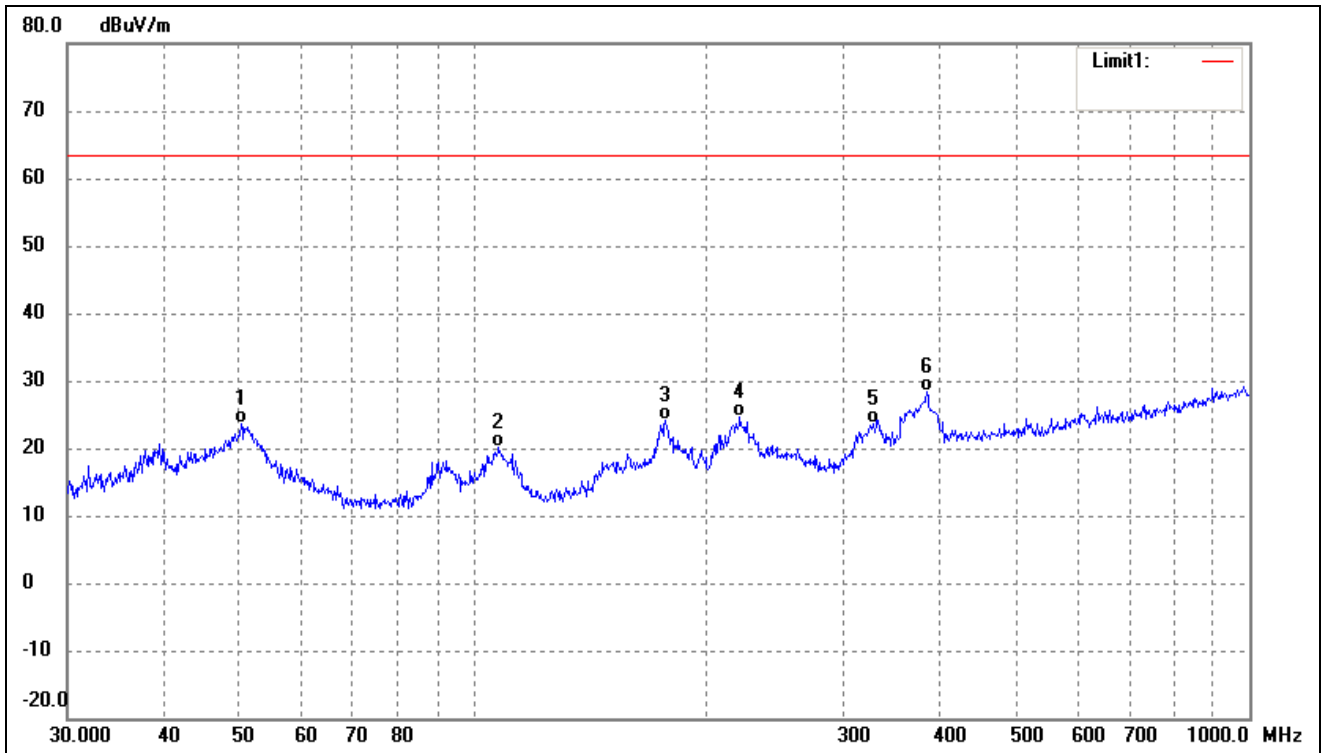

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.2325	34.67	-10.93	23.74	63.50	-39.76	-	-	QP
2	107.8877	32.54	-12.49	20.05	63.50	-43.45	-	-	QP
3	176.8878	38.27	-14.14	24.13	63.50	-39.37	-	-	QP
4	220.6171	36.45	-11.80	24.65	63.50	-38.85	-	-	QP
5	327.8873	32.21	-8.55	23.66	63.50	-39.84	-	-	QP
6	383.9318	35.02	-6.68	28.34	63.50	-35.16	-	-	QP

Test mode:	TM4	Polarity:	Vertical
------------	-----	-----------	----------

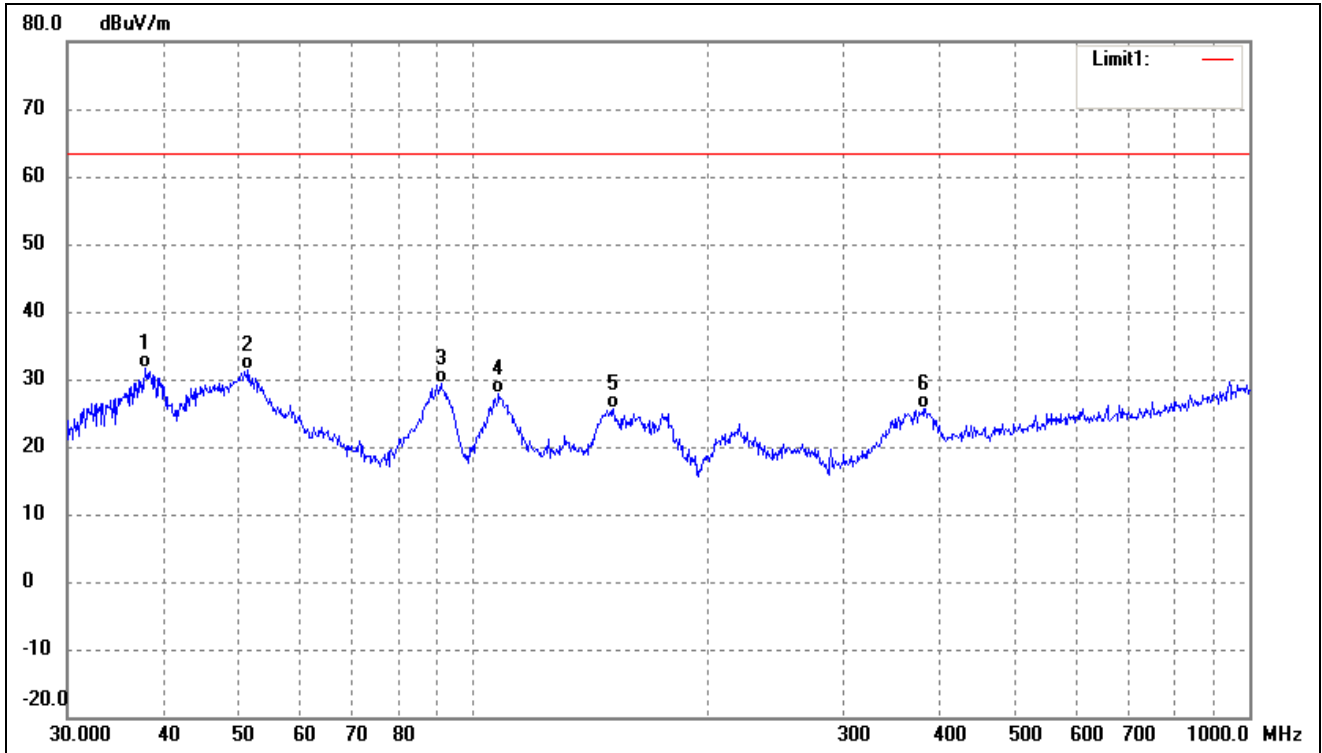

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.8121	42.98	-11.29	31.69	63.50	-31.81	-	-	QP
2	51.3005	42.61	-11.14	31.47	63.50	-32.03	-	-	QP
3	90.8554	42.14	-12.78	29.36	63.50	-34.14	-	-	QP
4	107.8877	40.33	-12.49	27.84	63.50	-35.66	-	-	QP
5	151.5972	40.79	-15.22	25.57	63.50	-37.93	-	-	QP
6	379.9141	32.37	-6.78	25.59	63.50	-37.91	-	-	QP

Remark: '-' Means 'the test Degree and Height are not recorded by the test software and only show the worst case in the test report.'

APPENDIXPHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******