

# TEST REPORT

## Part 15 Subpart C 15.249

**Equipment under test** LPWA Gateway

**Model name** CST-N001

**FCC ID** 2AVFH-CSTN001

**Applicant** Corners Co.Ltd

**Manufacturer** Corners Co.Ltd

**Date of test(s)** 2019.12.11 ~ 2019.12.20, 2020.01.03

**Date of issue** 2020.01.03

**Issued to**

**Corners Co.Ltd**

806, 26, Sangwon 1-gil, Seongdong-gu,  
Seoul, Republic of Korea

Tel: +82-70-7147-8361/ Fax: +82-31-8108-3717



**Issued by**

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,  
Gyeonggi-do, 14057, Korea

473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450
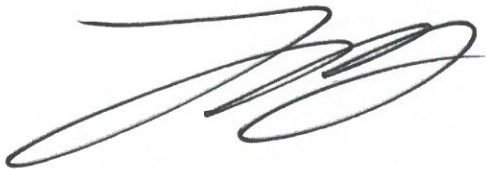
| Test and report completed by :                                                      | Report approval by :                                                                 |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |
| Jang-yeon Hwang<br>Test engineer                                                    | Hyeon-Su, Jang<br>Technical manager                                                  |



---

### Revision history

| Revision | Date of issue | Test report No.   | Description                              |
|----------|---------------|-------------------|------------------------------------------|
| -        | 2019.12.27    | KES-RF-19T0197    | Initial                                  |
| -        | 2020.01.03    | KES-RF-19T0197-R1 | Added Field strength of fundamental test |



---

## TABLE OF CONTENTS

|             |                                                                                         |    |
|-------------|-----------------------------------------------------------------------------------------|----|
| 1.          | General information .....                                                               | 4  |
| 1.1.        | EUT description .....                                                                   | 4  |
| 1.2.        | Test configuration.....                                                                 | 4  |
| 1.3.        | Information about derivative model .....                                                | 4  |
| 1.4.        | Accessory information.....                                                              | 4  |
| 1.5.        | Software and Firmware description.....                                                  | 4  |
| 1.6.        | Measurement results explanation example.....                                            | 5  |
| 1.7.        | Measurement Uncertainty .....                                                           | 5  |
| 1.8.        | Frequency/channel operations .....                                                      | 5  |
| 2.          | Summary of tests .....                                                                  | 6  |
| 3.          | Test results.....                                                                       | 7  |
| 3.1.        | 20 dB bandwidth .....                                                                   | 7  |
| 3.2.        | Field strength of fundamental & Radiated spurious emission & Out-of-band emission ..... | 10 |
| 3.3.        | AC conducted emissions .....                                                            | 24 |
| Appendix A. | Measurement equipment .....                                                             | 26 |
| Appendix B. | Test setup photos .....                                                                 | 27 |



## 1. General information

Applicant: Corners Co.Ltd  
Applicant address: 806, 26, Sangwon 1-gil, Seongdong-gu,  
Seoul, Republic of Korea  
Test site: KES Co., Ltd.  
Test site address: 3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,  
Gyeonggi-do, 14057, Korea  
473-21, Gayeo-ro, Yeuju-si, Gyeonggi-do, Korea  
Test Facility FCC Accreditation Designation No.: KR0100, Registration No.: 444148  
FCC rule part(s): 15.249  
FCC ID: 2AVFH-CSTN001  
Test device serial No.: ☐ Production ☒ Pre-production ☐ Engineering

### 1.1. EUT description

Equipment under test LPWA Gateway  
Frequency range 917.3 MHz ~ 923.3 MHz (125 kHz, 250 kHz)  
Model: CST-N001  
Modulation technique GFSK  
Number of channels 31ch : 917.3 MHz ~ 923.3 MHz (125 kHz, 250 kHz)  
Antenna type Dipole antenna : 2 dBi  
Power source AC 120V Adapter (Output : DC 12V / 1A )

### 1.2. Test configuration

The **Corners Co.Ltd LPWA Gateway FCC ID: 2AVFH-CSTN001** was tested per the guidance of ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

### 1.3. Information about derivative model

N/A

### 1.4. Accessory information

| Applicant | Equipment | Manufacturer | Model | Power source |
|-----------|-----------|--------------|-------|--------------|
| -         | -         | -            | -     | -            |

### 1.5. Software and Firmware description

The software and firmware installed in the EUT is 116

## 1.6. Measurement results explanation example

For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 0.85 + 10 = 10.85 \text{ (dB)}\end{aligned}$$

## 1.7. Measurement Uncertainty

| Test Item                                                                                                                                     |              | Uncertainty |
|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------|
| Uncertainty for Conduction emission test                                                                                                      |              | 2.62 dB     |
| Uncertainty for Radiation emission test<br>(include Fundamental emission)                                                                     | 9kHz - 30MHz | 4.54 dB     |
|                                                                                                                                               | 30MHz - 1GHz | 4.36 dB     |
|                                                                                                                                               | Above 1GHz   | 5.00 dB     |
| Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |              |             |

## 1.8. Frequency/channel operations

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 01  | 917.3           |
| .   | .               |
| 16  | 920.3           |
| .   | .               |
| 31  | 923.3           |



## 2. Summary of tests

| Reference                     | Parameter                                            | Test results |
|-------------------------------|------------------------------------------------------|--------------|
| 15.249(a)                     | Field strength of fundamental & Out-of-band emission | Pass         |
| 15.205<br>15.209<br>15.249(d) | Radiated spurious emission                           | Pass         |
| 15.215(c)                     | 20 dB bandwidth                                      | Pass         |
| 15.207(a)                     | AC conducted emissions                               | Pass         |


### 3. Test results

#### 3.1. 20 dB bandwidth

##### Test procedure

ANSI C63.10-2013

##### Test setup



#### Section 6.9.3

1. Use the following spectrum analyzer setting
2. Center frequency: Lowest, middle and highest channels
3. Span = approximately 2 to 3 times the 20dB bandwidth
4.  $RBW \geq 1\%$  of the 20dB bandwidth
5.  $VBW \geq 3 \times RBW$
6. Sweep = auto
7. Detector function = peak
8. Trace = max hold
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### Limit

Note: For reporting purpose only.



---


## Test results

### 125 kHz bandwidth

| Frequency(MHz) | 20 dB bandwidth(kHz) | Limit(MHz) |
|----------------|----------------------|------------|
| 917.3          | 140.38               | -          |
| 920.3          | 141.10               |            |
| 923.3          | 140.38               |            |

### 250 kHz bandwidth


| Frequency(MHz) | 20 dB bandwidth(kHz) | Limit(MHz) |
|----------------|----------------------|------------|
| 917.3          | 293.80               | -          |
| 920.3          | 293.80               |            |
| 923.3          | 293.80               |            |

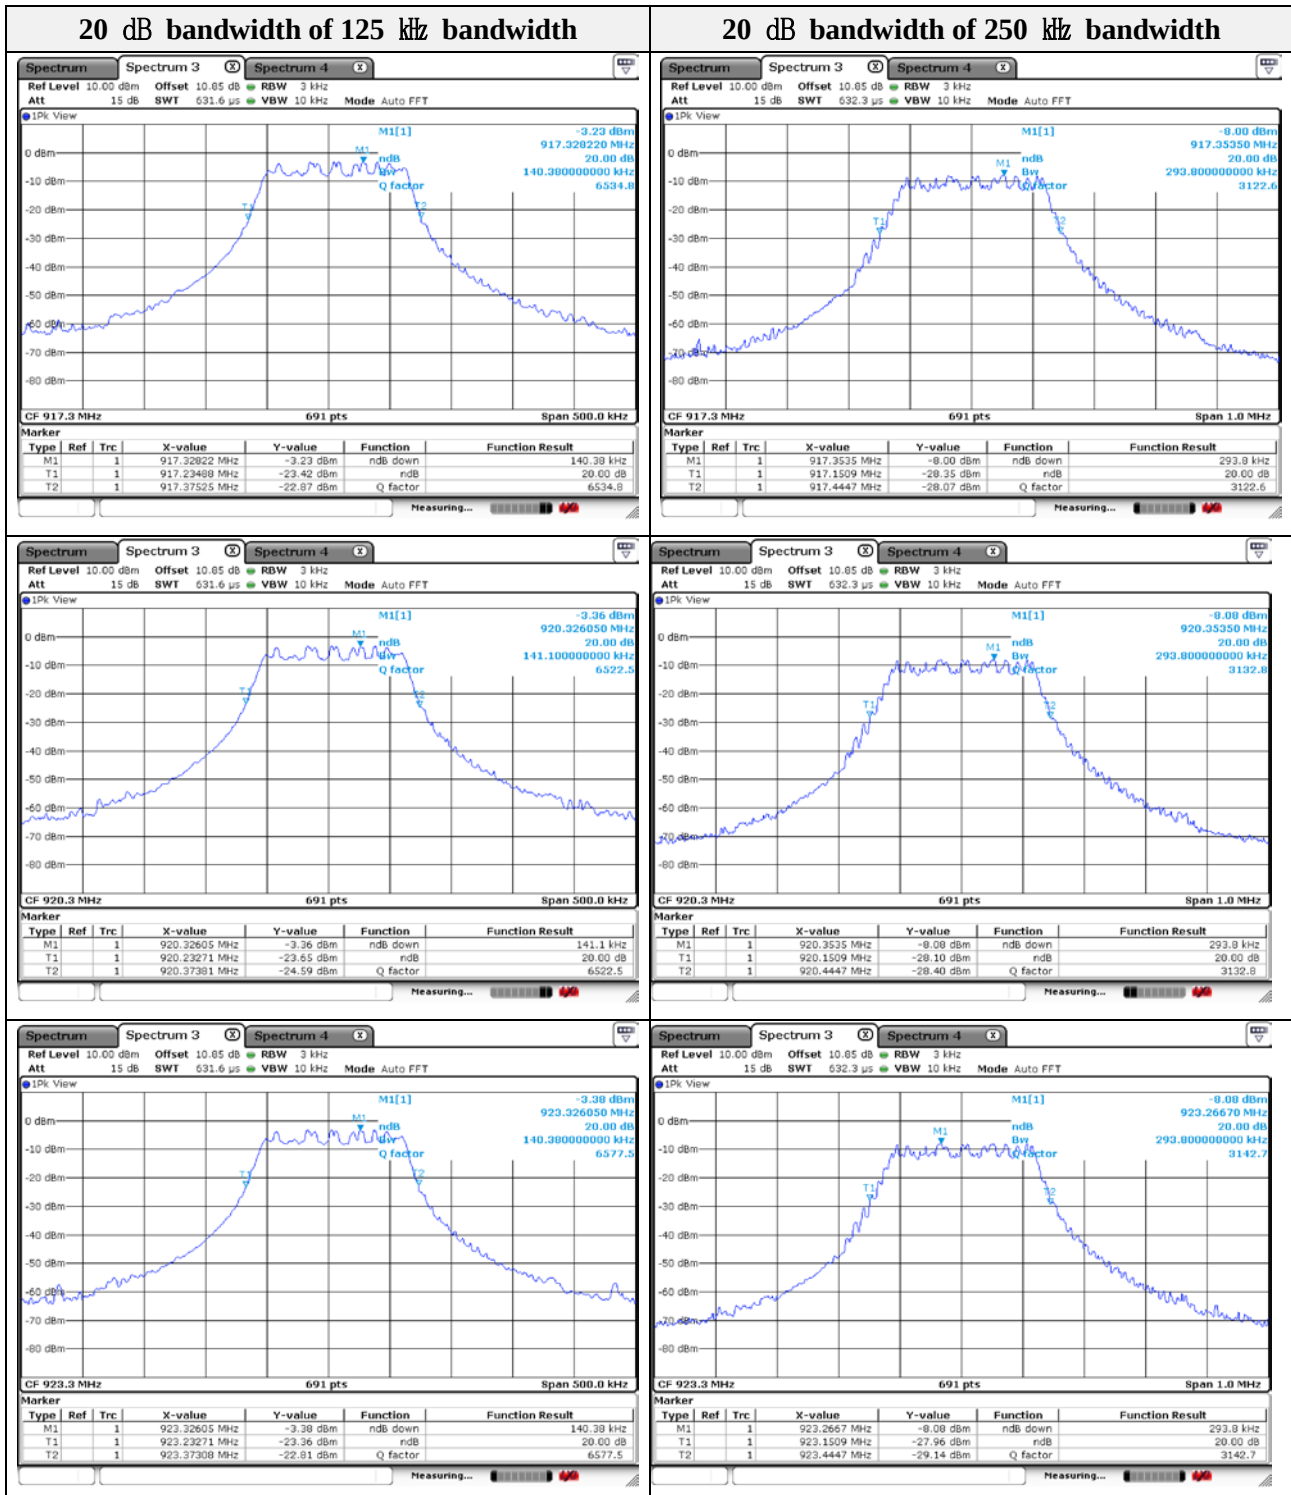


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### 3.2. Field strength of fundamental & Radiated spurious emission & Out-of-band emission Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

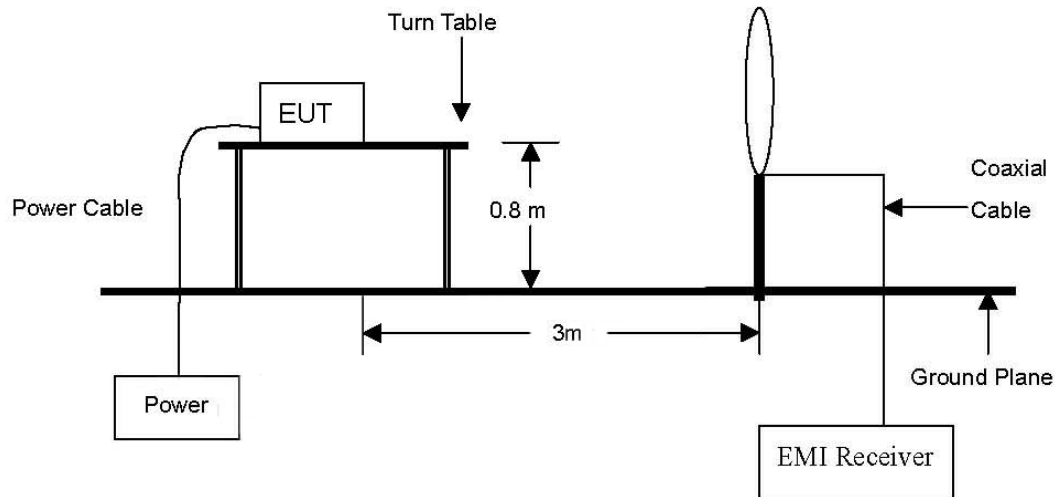

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

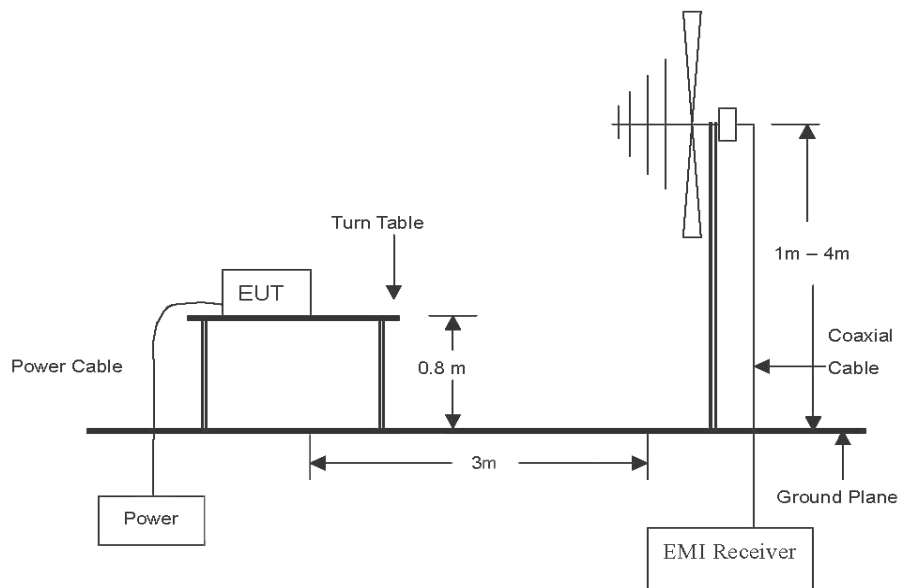

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

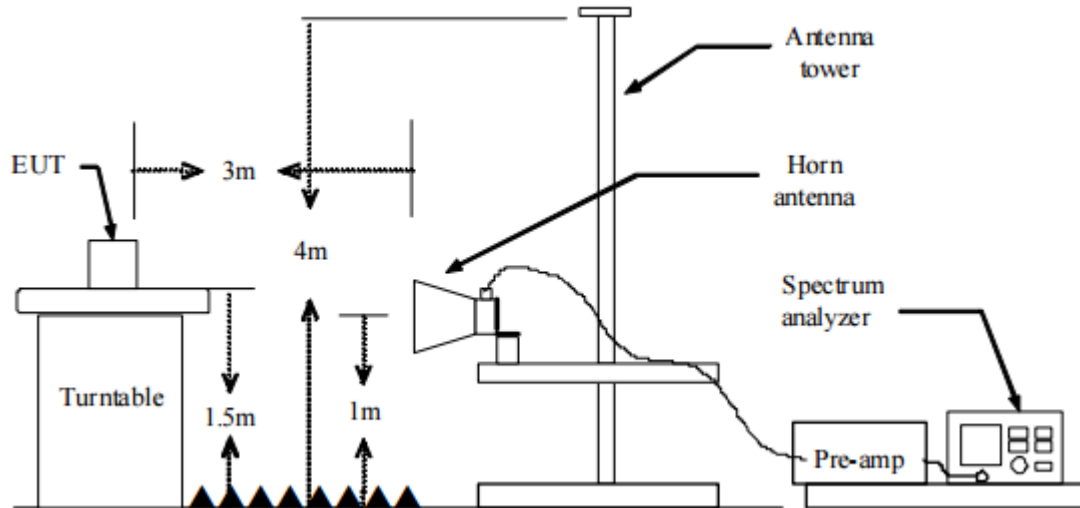

#### Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
4. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

#### Test procedure above 30 MHz

1. Spectrum analyzer settings for  $f < 1$  GHz:
  - ① Span = wide enough to fully capture the emission being measured
  - ② RBW = 100 kHz
  - ③ VBW  $\geq$  RBW
  - ④ Detector = quasi peak
  - ⑤ Sweep time = auto
  - ⑥ Trace = max hold
2. Spectrum analyzer settings for  $f \geq 1$  GHz: Peak
  - ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
  - ② RBW = 1 MHz
  - ③ VBW  $\geq$  3 MHz
  - ④ Detector = peak
  - ⑤ Sweep time = auto
  - ⑥ Trace = max hold
  - ⑦ Trace was allowed to stabilize

3. Spectrum analyzer settings for  $f \geq 1$  GHz: Average

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW  $\geq 3 \times$  RBW
- ④ Detector = RMS, if span/(# of points in sweep)  $\leq$  (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- ⑤ Averaging type = power(i.e., RMS)
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- ⑥ Sweep = auto
- ⑦ Trace = max hold
- ⑧ Perform a trace average of at least 100 traces.
- ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is  $10 \log(1/x)$ , where x is the duty cycle.
  - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is  $20 \log(1/x)$ , where x is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

**Note.**

1. The loop antenna was investigated with three polarizations, and horizontal and vertical polarizations were reported as the worst case.
2.  $f < 30$  MHz, extrapolation factor of 40 dB/decade of distance.  $F_d = 40 \log(D_m/D_s)$   
 $f \geq 30$  MHz, extrapolation factor of 20 dB/decade of distance.  $F_d = 20 \log(D_m/D_s)$   
Where:  
 $F_d$  = Distance factor in dB  
 $D_m$  = Measurement distance in meters  
 $D_s$  = Specification distance in meters
3. CF(Correction factors(dB)) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or  $F_d$ (dB)
4. Field strength(dB $\mu$ V/m) = Level(dB $\mu$ V) + CF (dB) + or DCF(dB)
5. Margin(dB) = Limit(dB $\mu$ V/m) - Field strength(dB $\mu$ V/m)
6. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **X orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **X orientation**.
8. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
9. According to exploratory test no any obvious emission were detected from 9kHz to 30MHz. Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.



### Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency (MHz) | Distance (Meters) | Radiated ( $\mu\text{V}/\text{m}$ ) |
|-----------------|-------------------|-------------------------------------|
| 0.009 ~ 0.490   | 300               | 2400/F(kHz)                         |
| 0.490 ~ 1.705   | 30                | 24000/F(kHz)                        |
| 1.705 ~ 30.0    | 30                | 30                                  |
| 30 ~ 88         | 3                 | 100**                               |
| 88 ~ 216        | 3                 | 150**                               |
| 216 ~ 960       | 3                 | 200**                               |
| Above 960       | 3                 | 500                                 |

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to 15.249(a)

| Fundamental frequency | Field strength of fundamental |        | Field strength of harmonics |        |
|-----------------------|-------------------------------|--------|-----------------------------|--------|
|                       | mV/m                          | dBuV/m | uV/m                        | dBuV/m |
| 902-928 MHz           | 50                            | 94     | 500                         | 54     |
| 2400-2483.5 MHz       | 50                            | 94     | 500                         | 54     |
| 5725-5875 MHz         | 50                            | 94     | 500                         | 54     |
| 24.0-24.25 GHz        | 250                           | 108    | 2500                        | 68     |

According to 15.249(d)

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated limit in FCC part 15C, Section 15.209, whichever is the lesser attenuation.

According to 15.249(e)

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.



### Duty cycle


Regarding to KDB 558074 D01\_v04, 6.0, the maximum duty cycles of all modes were investigated and set the spectrum analyzer as below.

Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100.

| Test mode  | T <sub>on</sub> time (ms) | Period (ms) | Duty cycle (Linear) | Duty cycle (%) | Duty cycle correction factor (dB) |
|------------|---------------------------|-------------|---------------------|----------------|-----------------------------------|
| BW 125 kHz | 86.96                     | 150.72      | 0.58                | 57.69          | 2.39                              |
| BW 250 kHz | 43.48                     | 100.00      | 0.43                | 43.48          | 3.62                              |

Duty cycle (Linear) = T<sub>on</sub> time/Period

DCF(Duty cycle correction factor (dB)) = 10log(1/duty cycle)

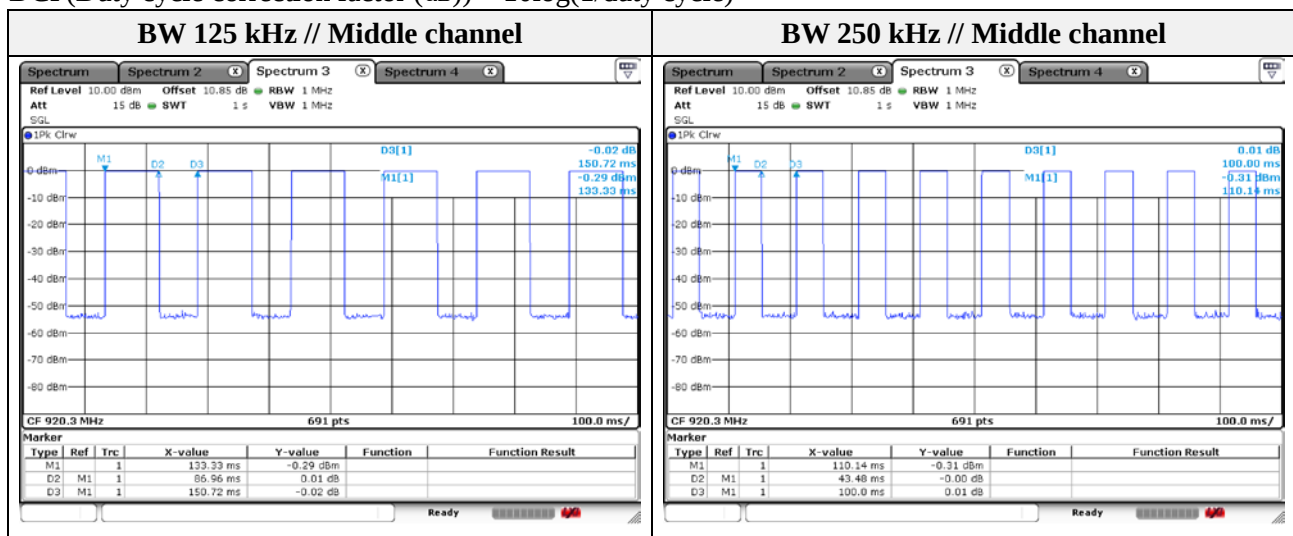



### Test result (Fundamental & Out-of-band emission)

Channel: 01  
BW: 250 kHz

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 917.31          | 63.55              | Peak        | H               | 33.83   | -        | 97.38                         | 114.00               | 16.62       |
| 917.29          | 52.69              | Average     | H               | 33.83   | 3.62     | 90.14                         | 94.00                | 3.86        |
| 917.16          | 59.24              | Peak        | V               | 33.83   | -        | 93.07                         | 114.00               | 20.93       |
| 902.00          | 9.50               | Peak        | H               | 33.35   | -        | 42.85                         | 46.00                | 3.15        |
| 902.00          | 9.75               | Peak        | V               | 33.35   | -        | 43.10                         | 46.00                | 2.90        |

Channel: 16  
BW: 250 kHz

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 920.40          | 63.91              | Peak        | H               | 33.93   | -        | 97.84                         | 114.00               | 16.16       |
| 920.28          | 52.51              | Average     | H               | 33.93   | 3.62     | 90.06                         | 94.00                | 3.94        |
| 920.24          | 59.37              | Peak        | V               | 33.93   | -        | 93.30                         | 114.00               | 20.70       |

Channel: 31  
BW: 250 kHz

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 923.41          | 64.14              | Peak        | H               | 34.02   | -        | 98.16                         | 114.00               | 15.84       |
| 923.28          | 54.05              | Average     | H               | 34.02   | 3.62     | 91.69                         | 94.00                | 2.31        |
| 923.19          | 59.34              | Peak        | V               | 34.02   | -        | 93.36                         | 114.00               | 20.64       |
| 928.00          | 9.42               | Peak        | H               | 34.17   | -        | 43.59                         | 46.00                | 2.41        |
| 928.00          | 9.33               | Peak        | V               | 34.17   | -        | 43.50                         | 46.00                | 2.50        |

Note.

1. worst-case emissions(for BW 250 kHz) are reported in this section.




### Test results (Below 30 MHz)


Mode: BW 250 kHz  
Distance of measurement: 3 meter  
Channel: 31 (Worst case)

| Frequency (MHz) | Level (dB $\mu$ V) | Ant. Pol. (H/V) | CF (dB) | Distance factor (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-----------------|---------|----------------------|-------------------------------|----------------------|-------------|
| 0.035           | 42.90              | H               | 18.90   | -80.00               | -18.20                        | 36.70                | 54.90       |
| 0.470           | 33.80              | H               | 19.80   | -80.00               | -26.40                        | 14.20                | 40.60       |
| 0.579           | 34.30              | H               | 20.10   | -40.00               | 14.40                         | 32.40                | 18.00       |
| 0.031           | 44.20              | V               | 18.80   | -80.00               | -17.00                        | 37.6                 | 54.60       |
| 0.478           | 32.00              | V               | 19.80   | -80.00               | -28.20                        | 14.00                | 42.20       |
| 0.549           | 28.40              | V               | 20.00   | -40.00               | 8.40                          | 32.80                | 24.40       |

### Horizontal

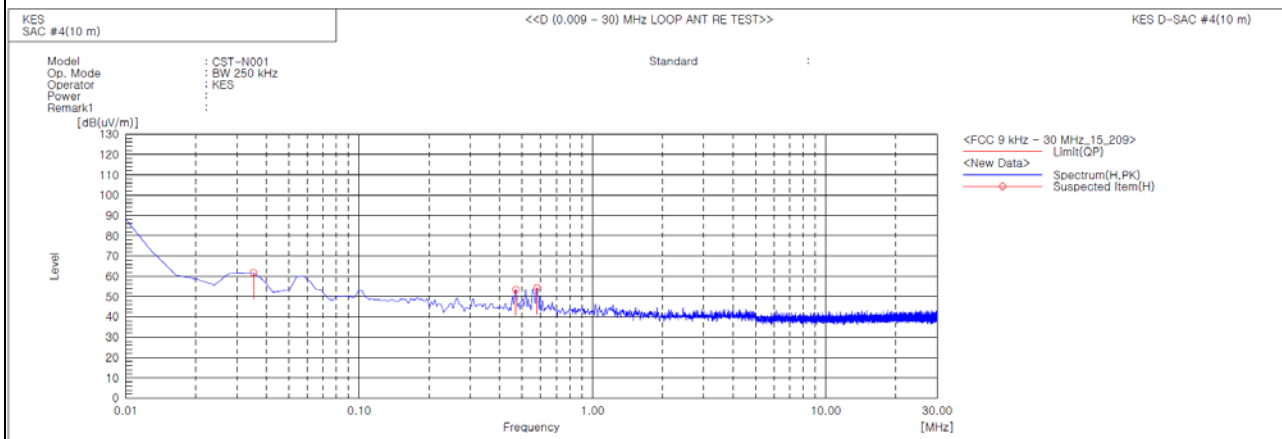

### Vertical

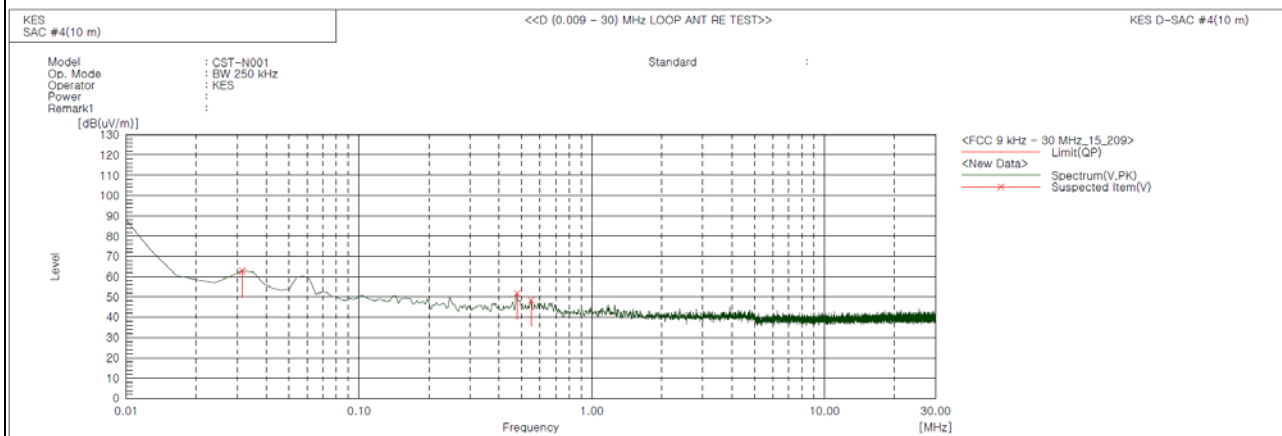


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## Test results (Below 1 000 MHz)

Mode: BW 250 kHz  
Distance of measurement: 3 meter  
Channel: 31 (Worst case)

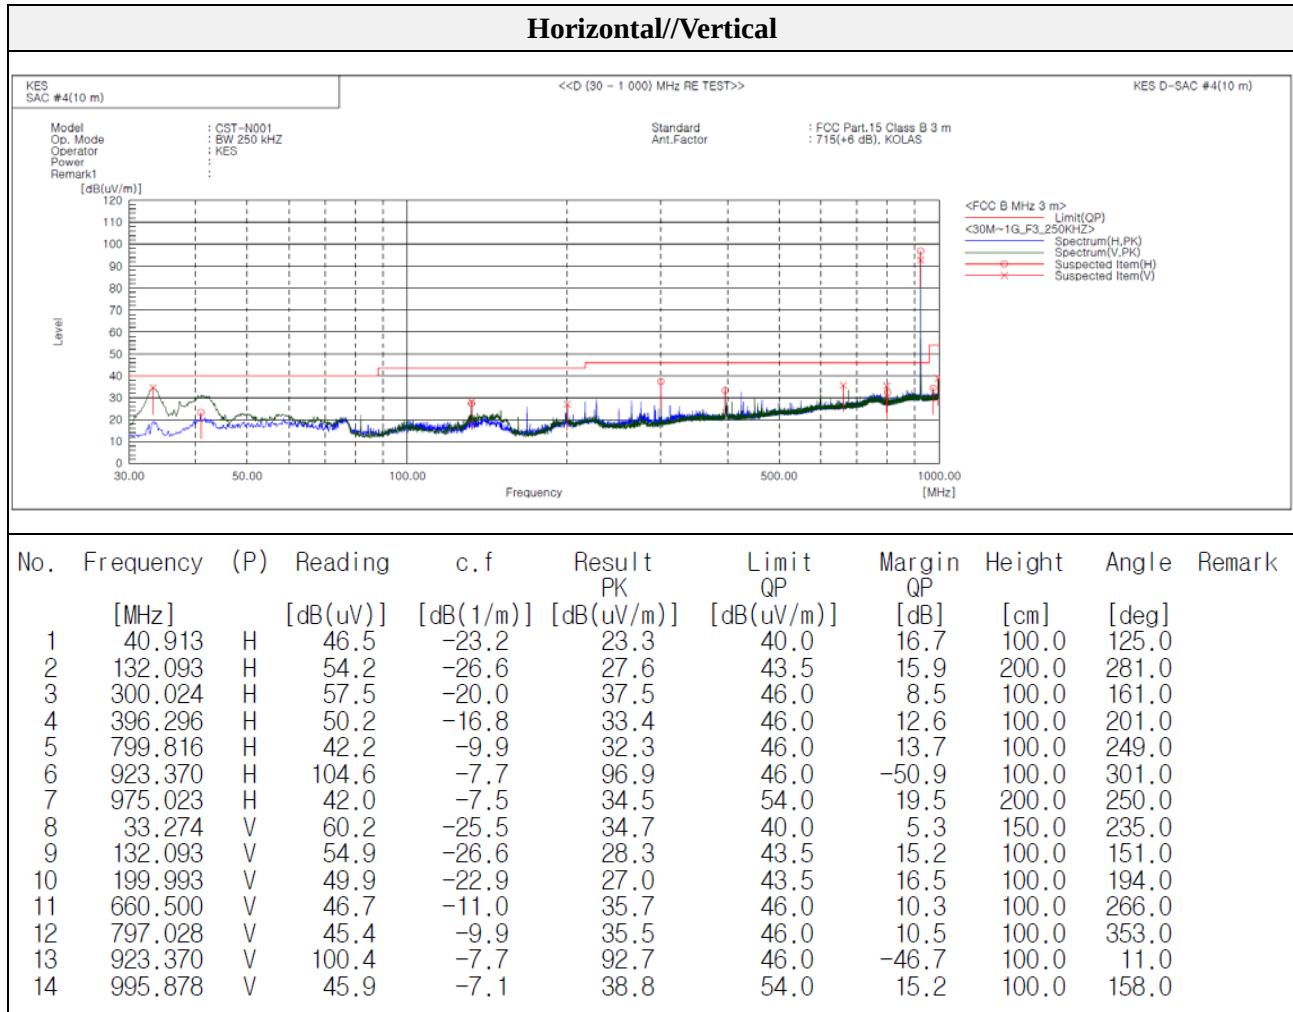

Note.


1. No.6, No.13 are Field strength of fundamental markers.



## Test results (Above 1 000 MHz)

Mode: BW 125 kHz  
Distance of measurement: 3 meter  
Channel: 01

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 111.00        | 49.99        | Peak        | H               | -8.43   | -        | 41.56                   | 74.00          | 32.44       |
| 1 449.00        | 49.05        | Peak        | H               | -6.28   | -        | 42.77                   | 74.00          | 31.23       |
| 2 999.30        | 47.83        | Peak        | H               | 1.80    | -        | 49.63                   | 74.00          | 24.37       |
| 1 202.00        | 54.08        | Peak        | V               | -7.85   | -        | 46.23                   | 74.00          | 27.77       |
| 1 397.00        | 52.18        | Peak        | V               | -6.60   | -        | 45.58                   | 74.00          | 28.42       |
| 2 999.30        | 47.06        | Peak        | V               | 1.80    | -        | 48.86                   | 74.00          | 25.14       |

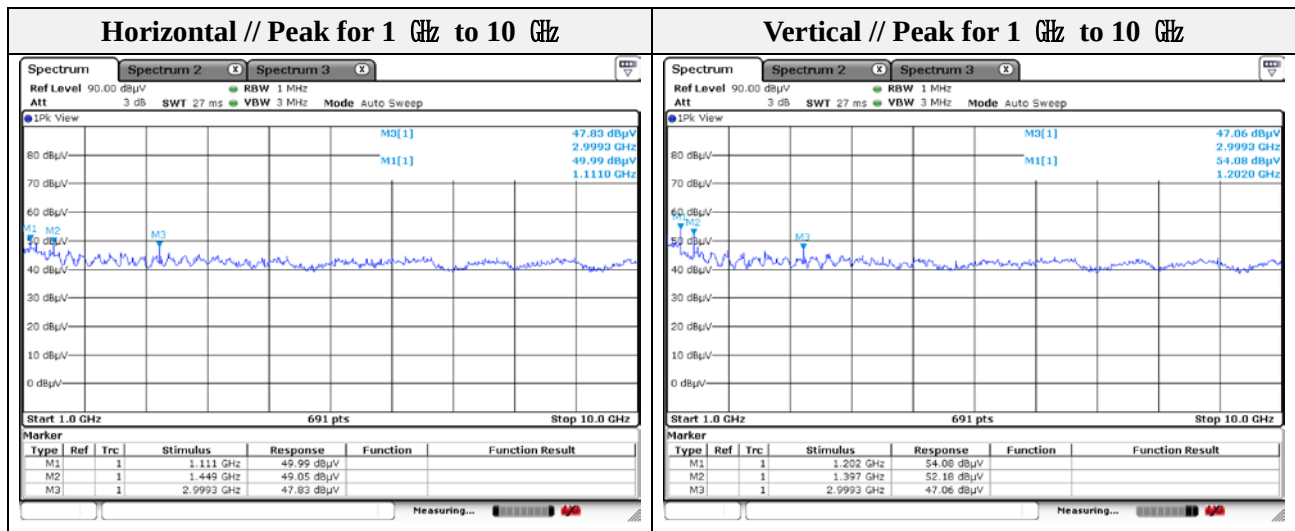


Note.

1. Average test would be performed if the peak result were greater than the average limit.



Mode: BW 125 kHz  
Distance of measurement: 3 meter  
Channel: 16

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 202.00        | 51.26        | Peak        | H               | -7.85   | -        | 43.41                   | 74.00          | 30.59       |
| 1 397.00        | 52.40        | Peak        | H               | -6.60   | -        | 45.80                   | 74.00          | 28.20       |
| 2 999.30        | 47.52        | Peak        | H               | 1.80    | -        | 49.32                   | 74.00          | 24.68       |
| 1 059.00        | 53.31        | Peak        | V               | -8.76   | -        | 44.55                   | 74.00          | 29.45       |
| 1 189.00        | 53.30        | Peak        | V               | -7.93   | -        | 45.37                   | 74.00          | 28.63       |
| 1 397.30        | 51.79        | Peak        | V               | -6.59   | -        | 45.20                   | 74.00          | 28.80       |

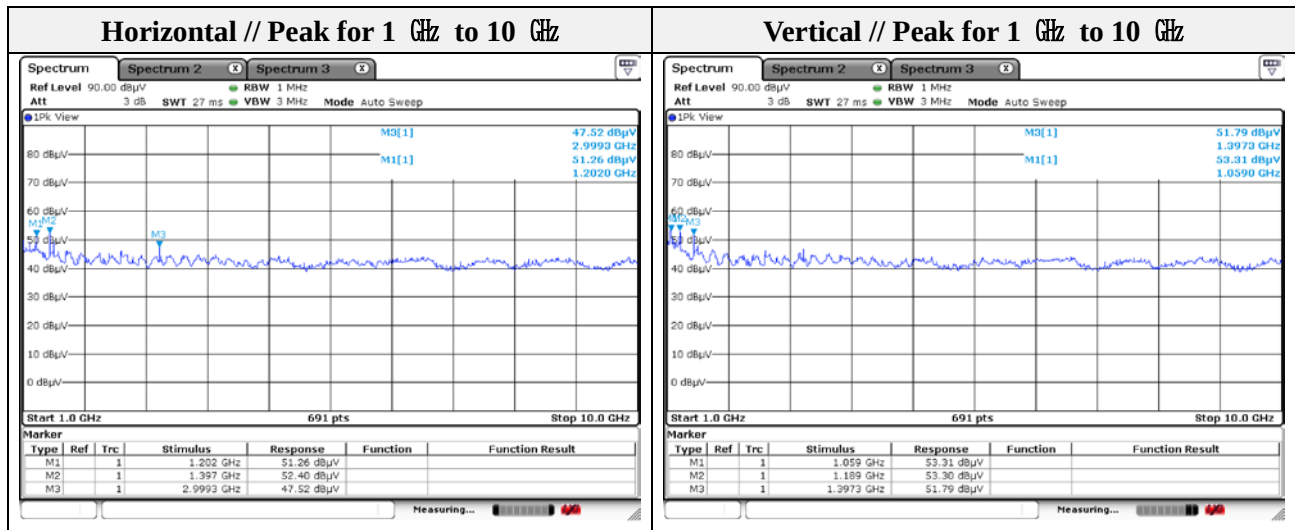


Note.

1. Average test would be performed if the peak result were greater than the average limit.



Mode: BW 125 kHz  
Distance of measurement: 3 meter  
Channel: 31

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 007.00        | 52.68        | Peak        | H               | -9.10   | -        | 43.58                   | 74.00          | 30.42       |
| 1 202.00        | 52.12        | Peak        | H               | -7.85   | -        | 44.27                   | 74.00          | 29.73       |
| 1 853.10        | 50.19        | Peak        | H               | -2.52   | -        | 47.67                   | 74.00          | 26.33       |
| 1 202.00        | 55.40        | Peak        | V               | -7.85   | -        | 47.55                   | 74.00          | 26.45       |
| 1 397.00        | 57.71        | Peak        | V               | -6.60   | -        | 51.11                   | 74.00          | 22.89       |
| 1 853.10        | 48.74        | Peak        | V               | -2.52   | -        | 46.22                   | 74.00          | 27.78       |

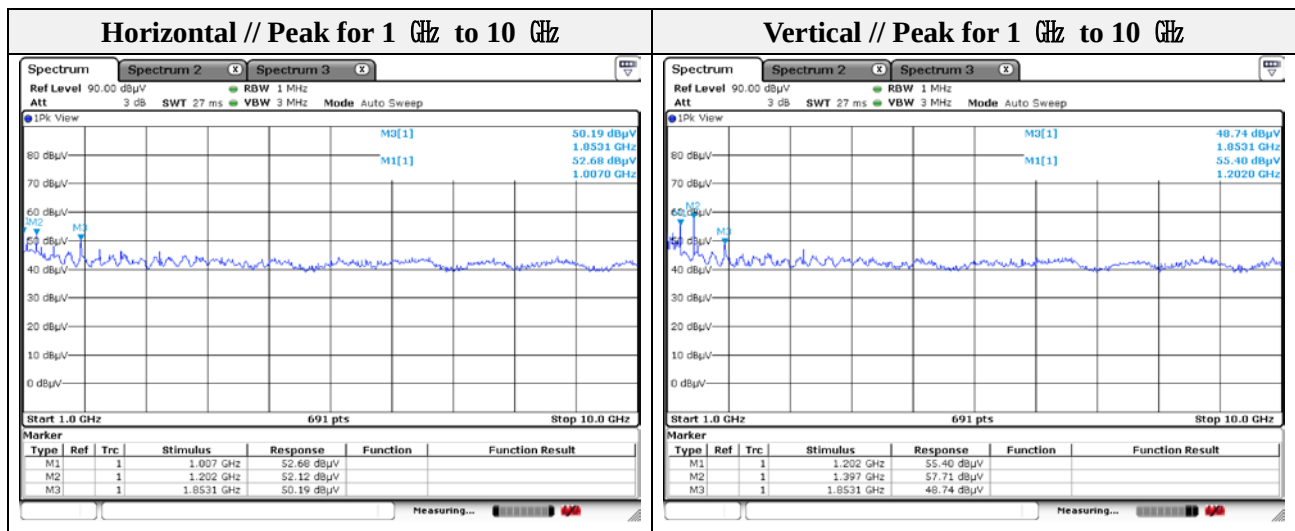


Note.

1. Average test would be performed if the peak result were greater than the average limit.



Mode: BW 250 kHz  
Distance of measurement: 3 meter  
Channel: 01

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 202.00        | 51.31        | Peak        | H               | -7.85   | -        | 43.46                   | 74.00          | 30.54       |
| 1 319.00        | 50.53        | Peak        | H               | -7.10   | -        | 43.43                   | 74.00          | 30.57       |
| 1 449.30        | 49.45        | Peak        | H               | -6.28   | -        | 43.17                   | 74.00          | 30.83       |
| 1 007.00        | 55.54        | Peak        | V               | -9.10   | -        | 46.44                   | 74.00          | 27.56       |
| 1 202.00        | 57.52        | Peak        | V               | -7.85   | -        | 49.67                   | 74.00          | 24.33       |
| 1 397.30        | 52.94        | Peak        | V               | -6.59   | -        | 46.35                   | 74.00          | 27.65       |

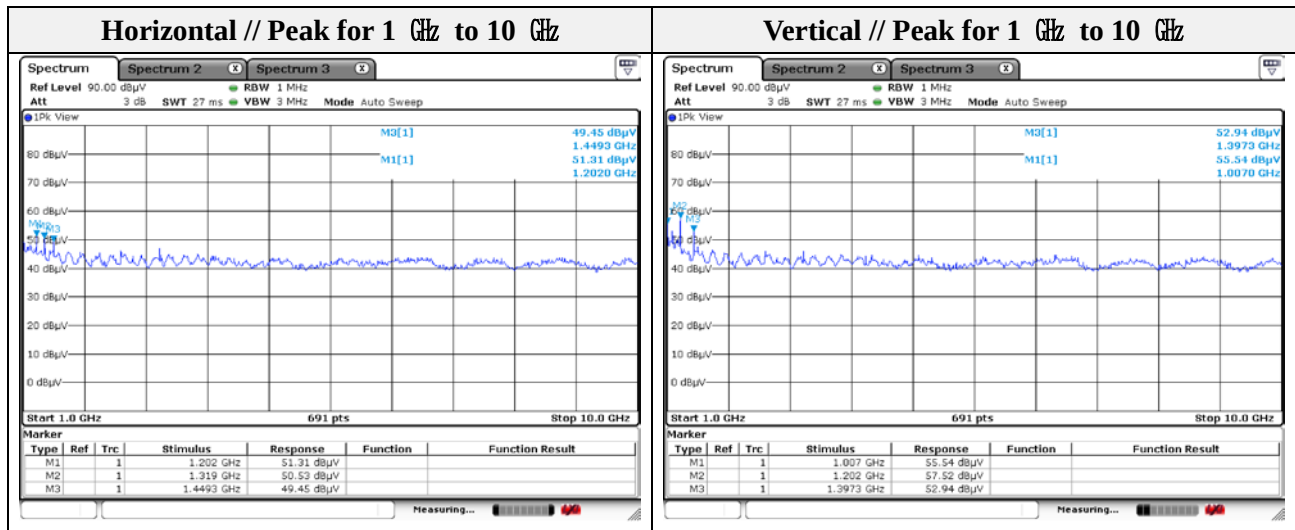


Note.

1. Average test would be performed if the peak result were greater than the average limit.



Mode: BW 250 kHz  
Distance of measurement: 3 meter  
Channel: 16

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 098.00        | 50.13        | Peak        | H               | -8.51   | -        | 41.62                   | 74.00          | 32.38       |
| 1 202.00        | 49.43        | Peak        | H               | -7.85   | -        | 41.58                   | 74.00          | 32.42       |
| 2 999.00        | 46.76        | Peak        | H               | 1.80    | -        | 48.56                   | 74.00          | 25.44       |
| 1 059.00        | 55.11        | Peak        | V               | -8.76   | -        | 46.35                   | 74.00          | 27.65       |
| 1 202.00        | 55.07        | Peak        | V               | -7.85   | -        | 47.22                   | 74.00          | 26.78       |
| 1 397.00        | 55.64        | Peak        | V               | -6.60   | -        | 49.04                   | 74.00          | 24.96       |

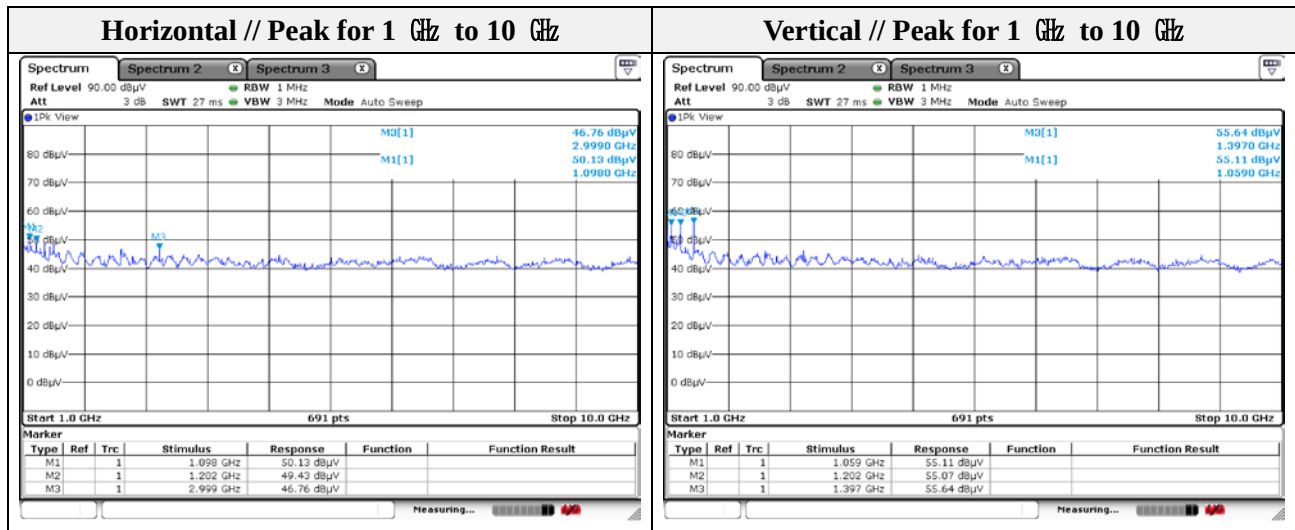


Note.

1. Average test would be performed if the peak result were greater than the average limit.



Mode: BW 250 kHz  
Distance of measurement: 3 meter  
Channel: 31

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 007.00        | 53.66        | Peak        | H               | -9.10   | -        | 44.56                   | 74.00          | 29.44       |
| 1 202.00        | 51.13        | Peak        | H               | -7.85   | -        | 43.28                   | 74.00          | 30.72       |
| 1 853.00        | 48.78        | Peak        | H               | -2.52   | -        | 46.26                   | 74.00          | 27.74       |
| 1 007.00        | 52.42        | Peak        | V               | -9.10   | -        | 43.32                   | 74.00          | 30.68       |
| 1 397.00        | 53.09        | Peak        | V               | -6.60   | -        | 46.49                   | 74.00          | 27.51       |
| 1 853.00        | 49.86        | Peak        | V               | -2.52   | -        | 47.34                   | 74.00          | 26.66       |

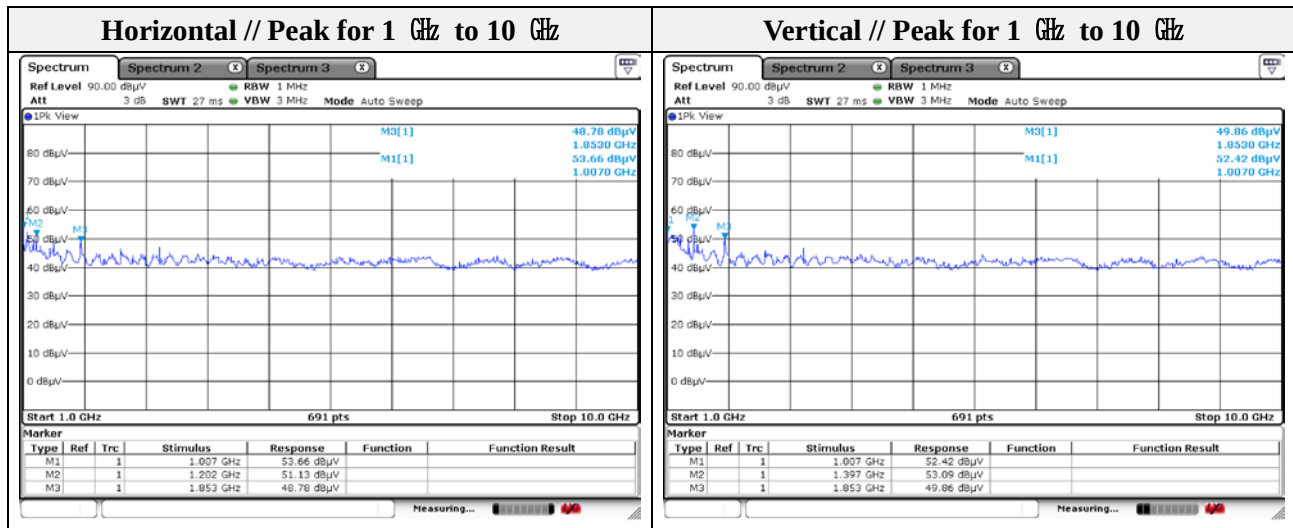


Note.

1. Average test would be performed if the peak result were greater than the average limit.

### 3.3. AC conducted emissions

#### Test setup

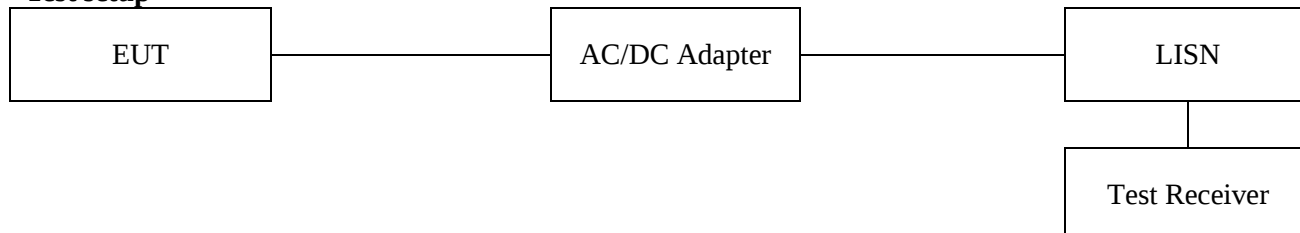

#### Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

| Frequency of Emission (MHz) | Conducted limit (dB $\mu$ V/m) |          |
|-----------------------------|--------------------------------|----------|
|                             | Quasi-peak                     | Average  |
| 0.15 – 0.50                 | 66 - 56*                       | 56 - 46* |
| 0.50 – 5.00                 | 56                             | 46       |
| 5.00 – 30.0                 | 60                             | 50       |


#### Note.

1. All AC line conducted spurious emission are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and the appropriate frequencies. All data rates and modes were investigated for conducted spurious emission. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.
3. Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).



## Test results


### Hot Line

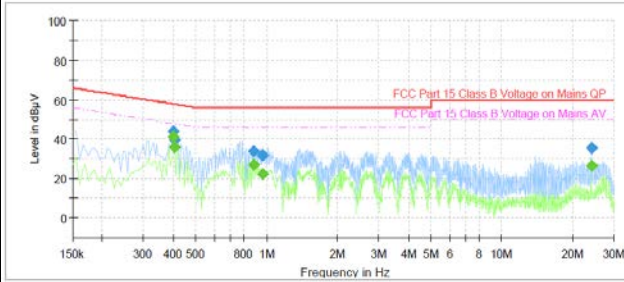

#### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.400000        | ---              | 41.09           | 47.85        | 6.76        | 1000.0          | 9.000           | L1   | 10.7       |
| 0.400000        | 43.75            | ---             | 57.85        | 14.10       | 1000.0          | 9.000           | L1   | 10.7       |
| 0.405000        | ---              | 36.25           | 47.75        | 11.50       | 1000.0          | 9.000           | L1   | 10.7       |
| 0.405000        | 39.52            | ---             | 57.75        | 18.23       | 1000.0          | 9.000           | L1   | 10.7       |
| 0.885000        | ---              | 26.98           | 46.00        | 19.02       | 1000.0          | 9.000           | L1   | 11.4       |
| 0.885000        | 34.13            | ---             | 56.00        | 21.87       | 1000.0          | 9.000           | L1   | 11.4       |
| 0.960000        | ---              | 22.46           | 46.00        | 23.54       | 1000.0          | 9.000           | L1   | 11.4       |
| 0.960000        | 31.77            | ---             | 56.00        | 24.23       | 1000.0          | 9.000           | L1   | 11.4       |
| 24.000000       | ---              | 26.60           | 50.00        | 23.40       | 1000.0          | 9.000           | L1   | 11.0       |
| 24.000000       | 35.24            | ---             | 60.00        | 24.76       | 1000.0          | 9.000           | L1   | 11.0       |

### Neutral Line

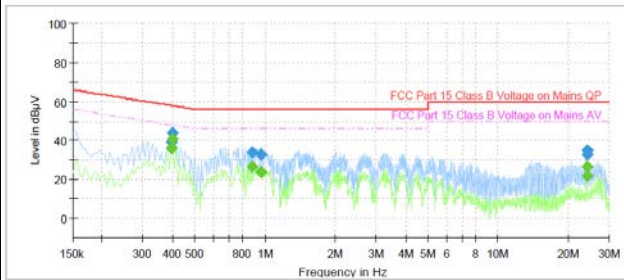

#### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.395000        | ---              | 35.88           | 47.96        | 12.08       | 1000.0          | 9.000           | N    | 10.7       |
| 0.395000        | 39.44            | ---             | 57.96        | 18.52       | 1000.0          | 9.000           | N    | 10.7       |
| 0.400000        | ---              | 40.93           | 47.85        | 6.92        | 1000.0          | 9.000           | N    | 10.7       |
| 0.400000        | 43.88            | ---             | 57.85        | 13.97       | 1000.0          | 9.000           | N    | 10.7       |
| 0.885000        | ---              | 26.60           | 46.00        | 19.40       | 1000.0          | 9.000           | N    | 11.4       |
| 0.885000        | 33.77            | ---             | 56.00        | 22.23       | 1000.0          | 9.000           | N    | 11.4       |
| 0.960000        | ---              | 23.66           | 46.00        | 22.34       | 1000.0          | 9.000           | N    | 11.4       |
| 0.960000        | 32.68            | ---             | 56.00        | 23.32       | 1000.0          | 9.000           | N    | 11.4       |
| 24.000000       | ---              | 26.28           | 50.00        | 23.72       | 1000.0          | 9.000           | N    | 11.0       |
| 24.000000       | 35.20            | ---             | 60.00        | 24.80       | 1000.0          | 9.000           | N    | 11.0       |
| 24.040000       | ---              | 21.89           | 50.00        | 28.11       | 1000.0          | 9.000           | N    | 11.0       |
| 24.040000       | 32.66            | ---             | 60.00        | 27.34       | 1000.0          | 9.000           | N    | 11.0       |

## Appendix A. Measurement equipment

| Equipment                           | Manufacturer               | Model           | Serial No.      | Calibration interval | Calibration due. |
|-------------------------------------|----------------------------|-----------------|-----------------|----------------------|------------------|
| Spectrum Analyzer                   | R&S                        | FSV30           | 101389          | 1 year               | 2020.01.16       |
| Spectrum Analyzer                   | R&S                        | FSV30           | 100736          | 1 year               | 2020.01.09       |
| 8360B Series Swept Signal Generator | HP                         | 83630B          | 3844A00786      | 1 year               | 2020.01.15       |
| Power Meter                         | Anritsu                    | ML2495A         | 1438001         | 1 year               | 2020.01.15       |
| Pulse Power Sensor                  | Anritsu                    | MA2411B         | 1339205         | 1 year               | 2020.01.15       |
| AC POWER SOURCE/<br>ANALYZER        | HP                         | 6813A           | 3729A00754      | 1 year               | 2020.01.15       |
| DC Power Supply                     | Agilent                    | 6632B           | MY43004130      | 1 year               | 2020.06.24       |
| Attenuator                          | KEYSIGHT                   | 8493C           | 82506           | 1 year               | 2020.01.15       |
| Loop Antenna                        | Schwarzbeck                | FMZB1513        | 225             | 2 years              | 2021.02.15       |
| Trilog-broadband antenna            | S/B                        | VULB 9163       | 714             | 2 years              | 2020.11.26       |
| Horn Antenna                        | A.H                        | SAS-571         | 414             | 2 years              | 2021.02.11       |
| Horn Antenna                        | SCHWARZBECK                | BBHA9170        | BBHA<br>9170550 | 2 years              | 2021.02.19       |
| High Pass Filter                    | Wainwright Instrument Gmbh | WHJS3000-10TT   | 1               | 1 year               | 2020.06.25       |
| Low Pass Filter                     | Wainwright Instrument Gmbh | WLK1.0/18G-10TT | 1               | 1 year               | 2020.06.24       |
| Preamplifier                        | R&S                        | SCU01           | 100603          | 1 year               | 2020.11.25       |
| Preamplifier                        | AGILENT                    | 8449B           | 3008A01742      | 1 year               | 2020.01.08       |
| EMI Test Receiver                   | R&S                        | ESR3            | 101781          | 1 year               | 2020.04.22       |
| EMI Test Receiver                   | R&S                        | ESU26           | 100552          | 1 year               | 2020.04.19       |
| Pulse Limiter                       | R&S                        | ESH3-Z2         | 101915          | 1 year               | 2020.11.25       |
| LISN                                | R&S                        | ENV216          | 101787          | 1 year               | 2020.01.04       |

## Peripheral devices

| Device     | Manufacturer         | Model No. | Serial No.    |
|------------|----------------------|-----------|---------------|
| Laptop     | LG Electronics Inc., | LGS53     | 306QCZP560949 |
| Test board | N/A                  | N/A       | N/A           |

## Appendix B. Test setup photos

