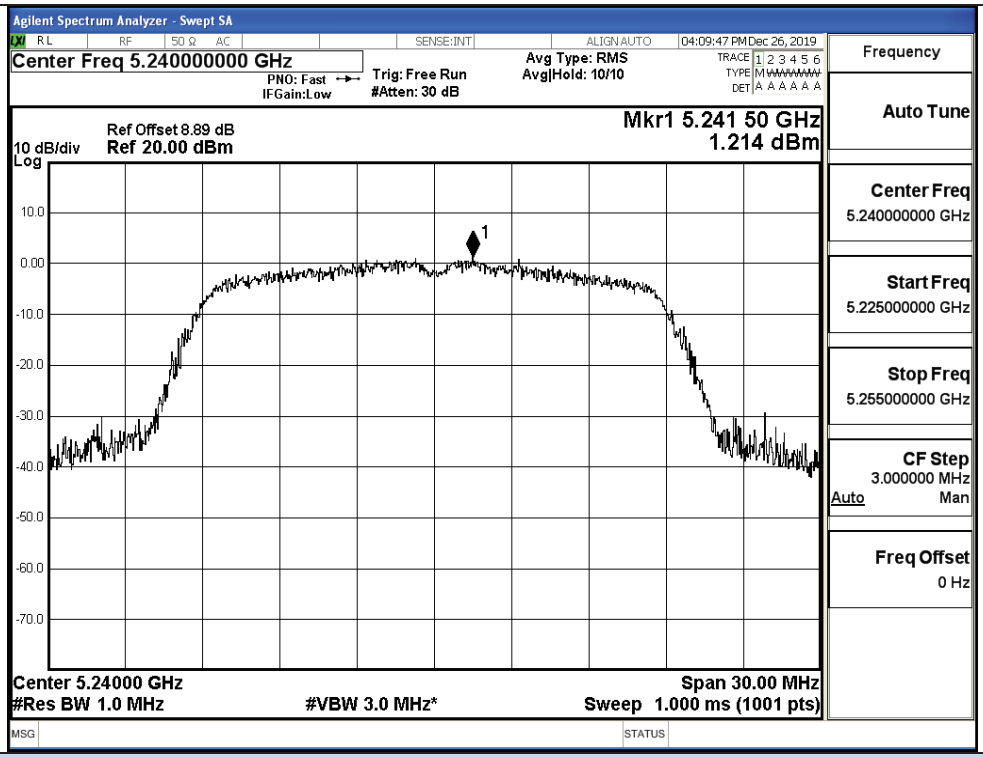

IEEE 802.11ac20 / Channel 48 / 5240MHz

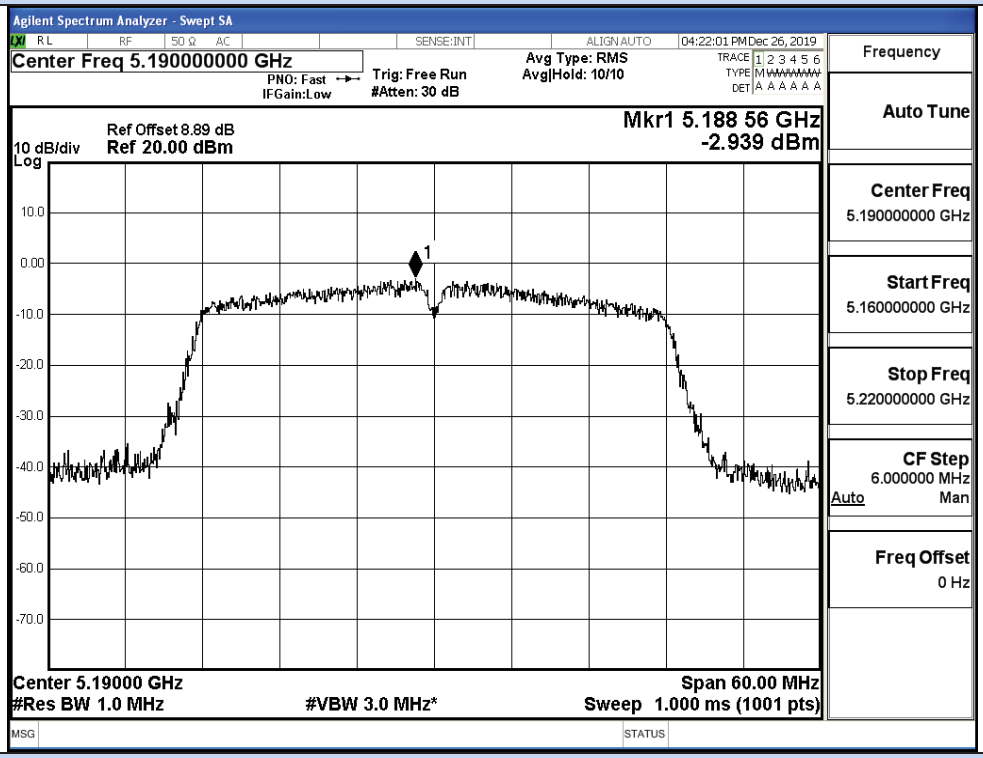

IEEE 802.11ac40 / Channel 38 / 5190MHz

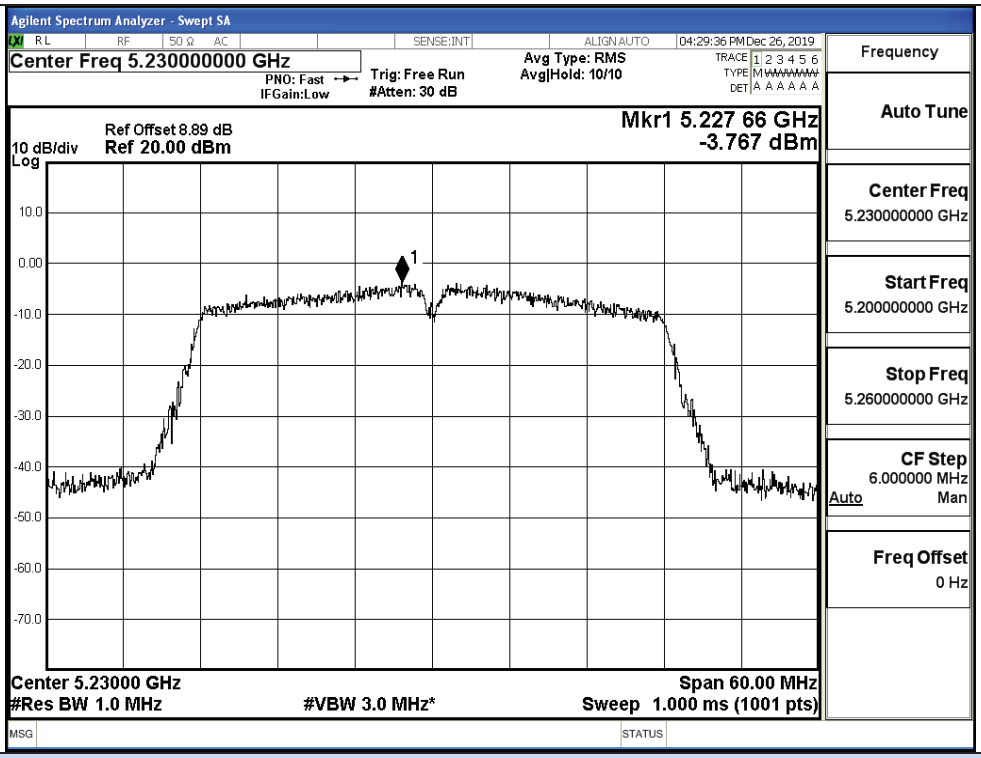

IEEE 802.11ac40 / Channel 46 / 5230MHz

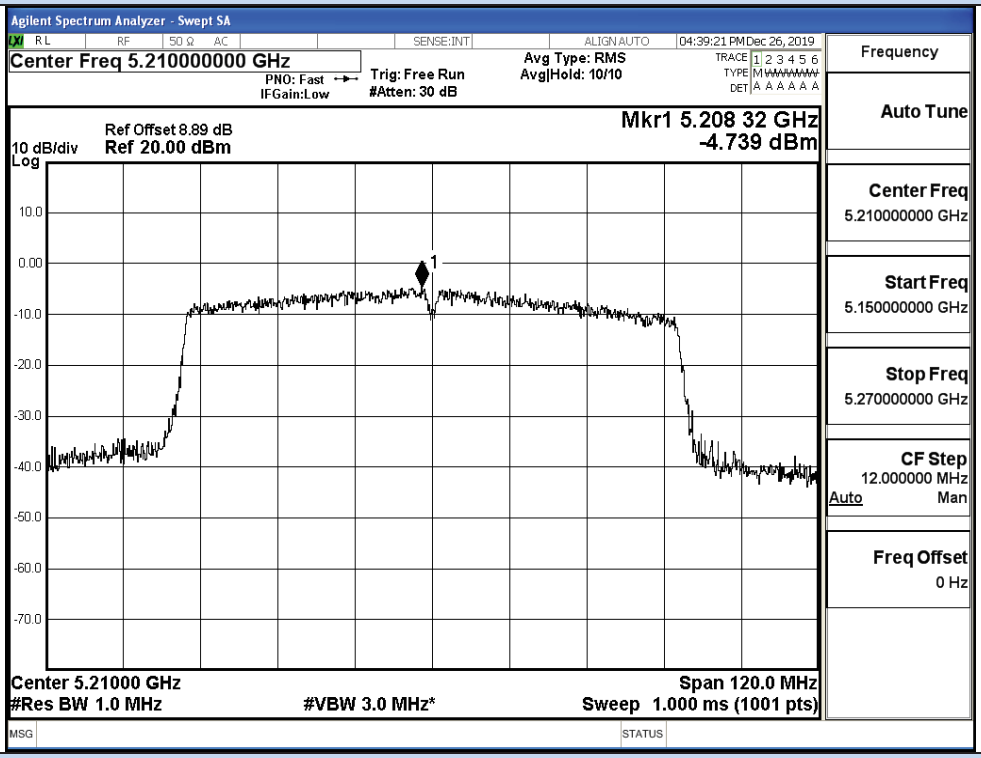

IEEE 802.11ac80 / Channel 42 / 5210MHz

ANT 1

Power Spectral Density

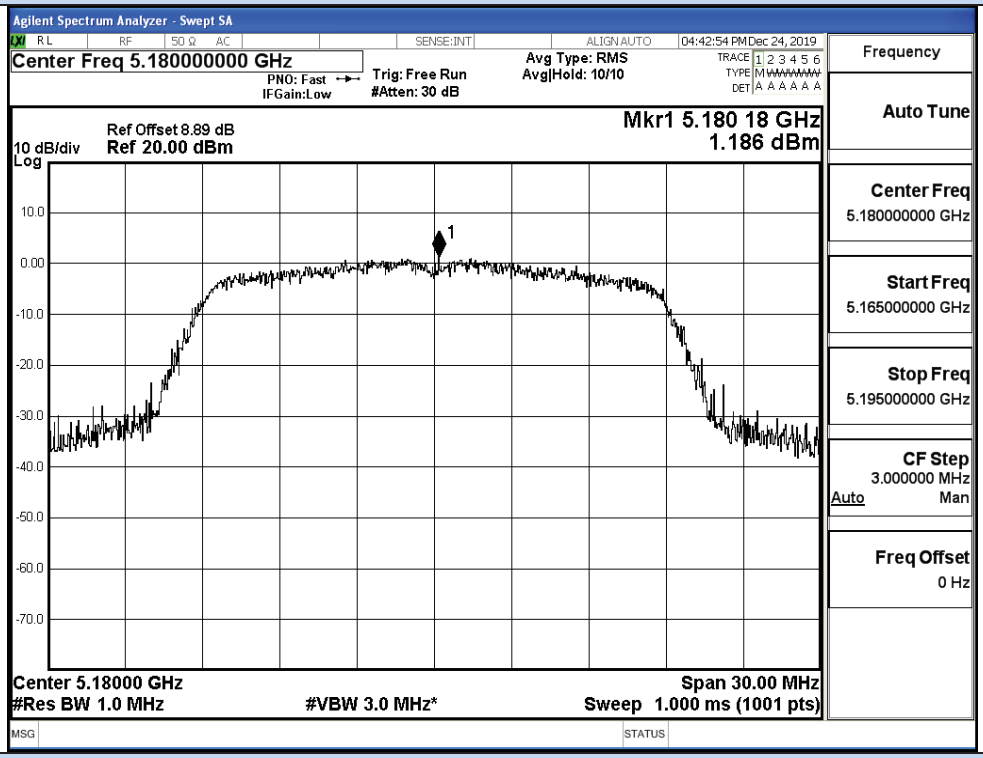

IEEE 802.11n20 / Channel 36 / 5180MHz

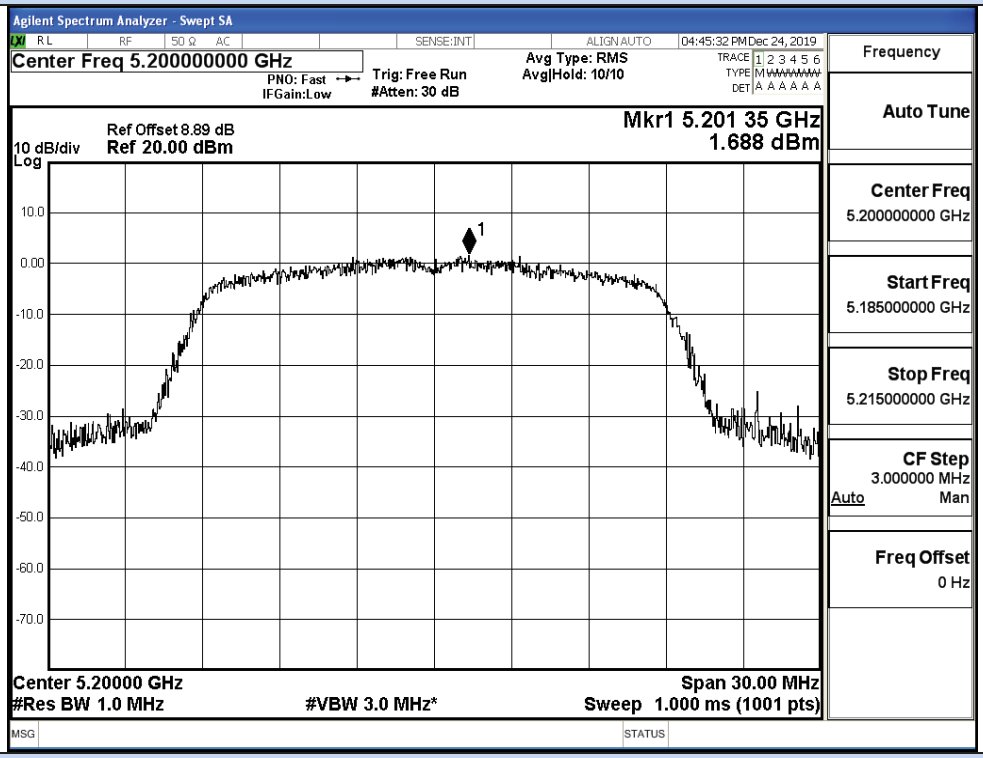

IEEE 802.11n20 / Channel 40 / 5200MHz

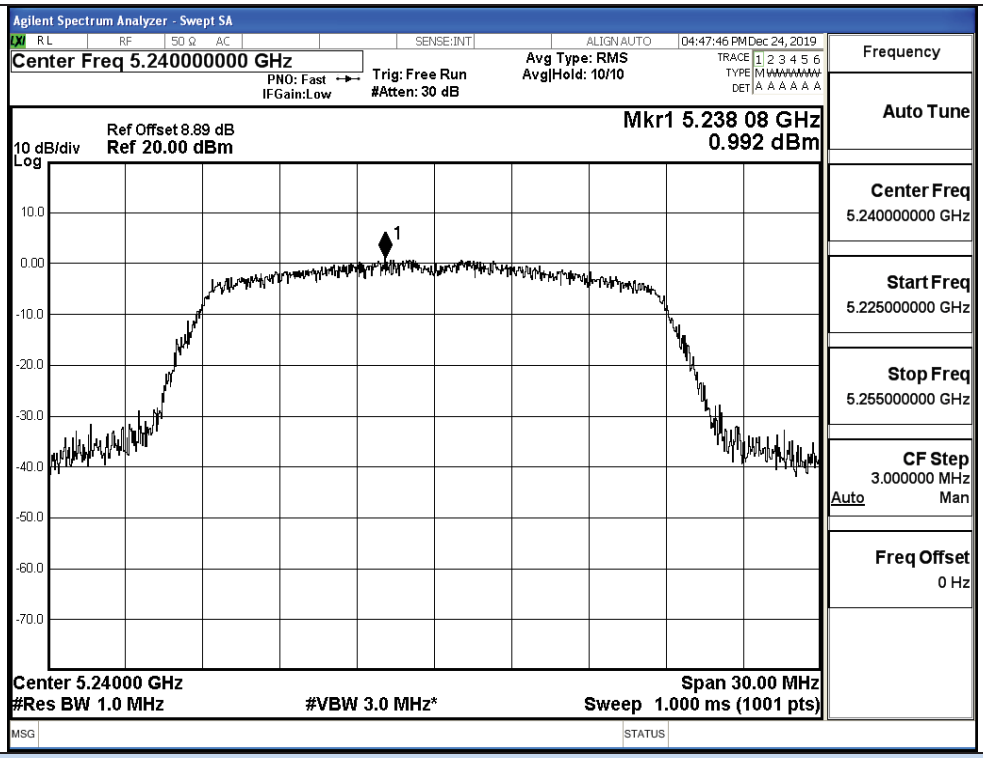

IEEE 802.11n20 / Channel 48 / 5240MHz

Power Spectral Density

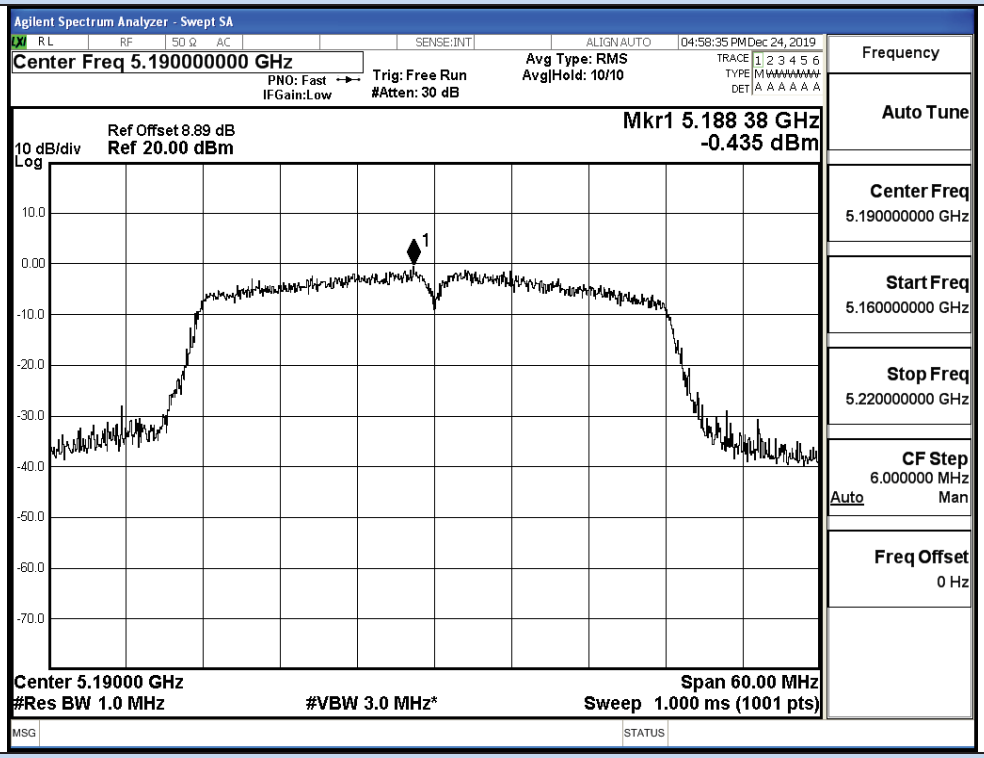

IEEE 802.11n40 / Channel 38 / 5190MHz

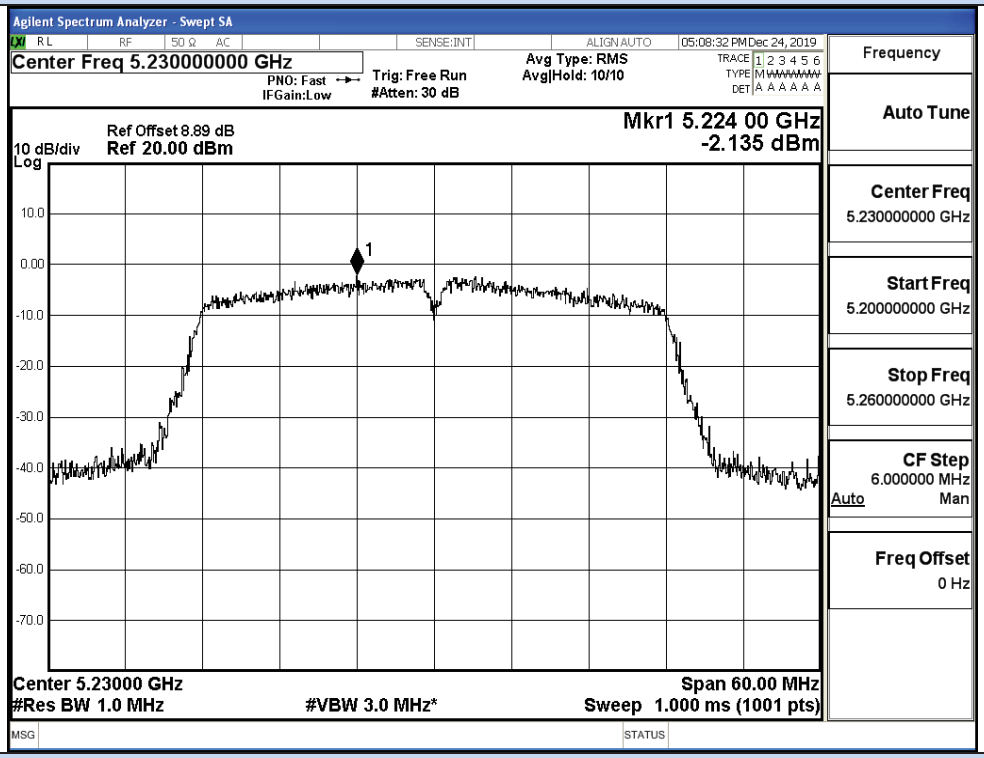

IEEE 802.11n40 / Channel 46 / 5230MHz

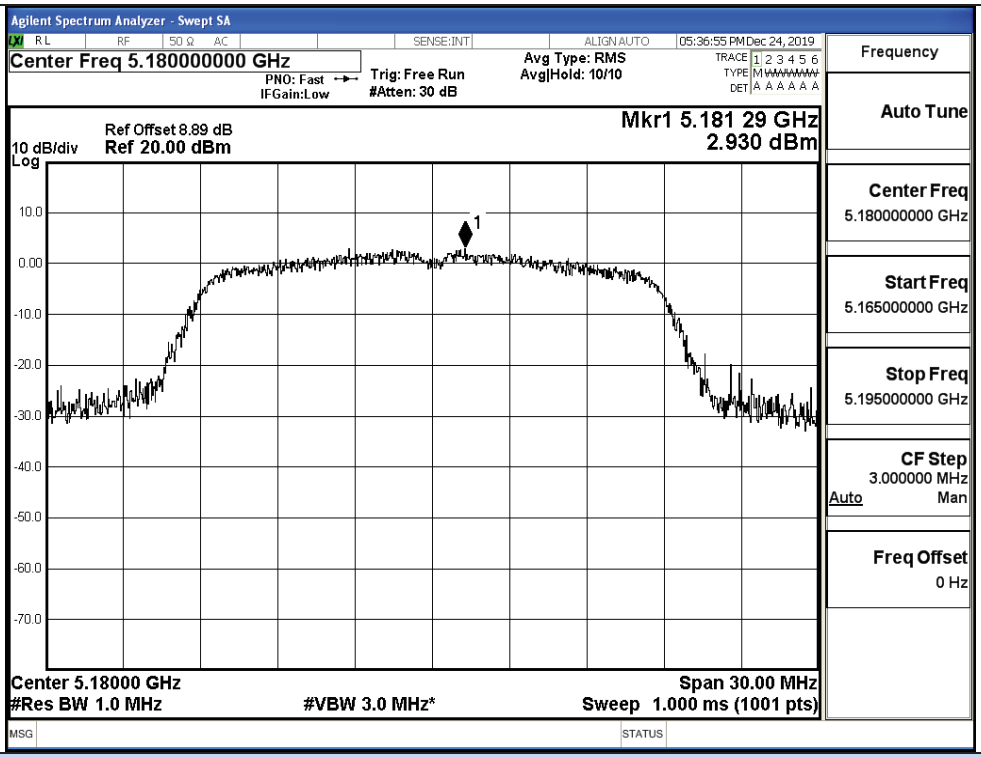

IEEE 802.11ac20 / Channel 36 / 5180MHz

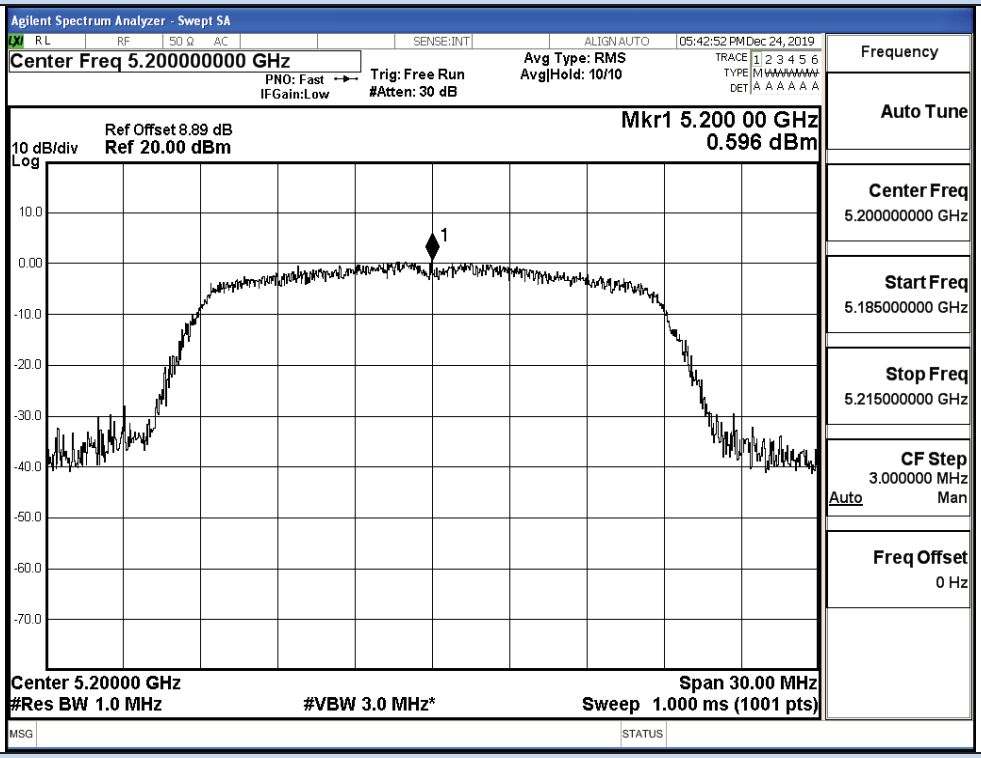

IEEE 802.11ac20 / Channel 40 / 5200MHz

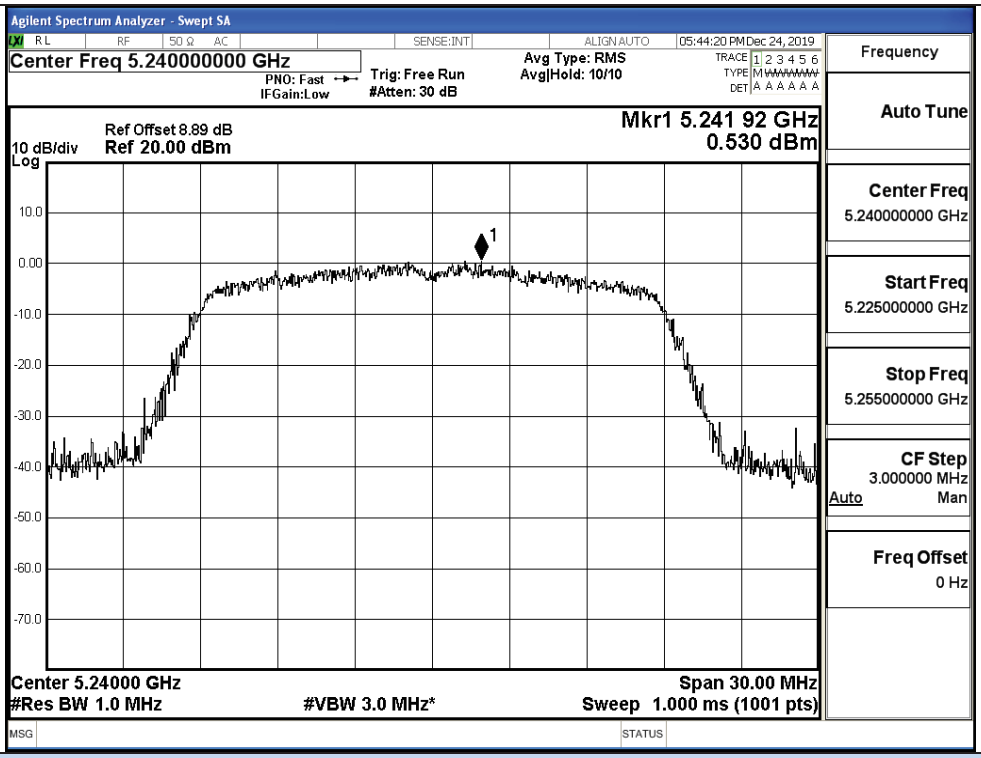

IEEE 802.11ac20 / Channel 48 / 5240MHz

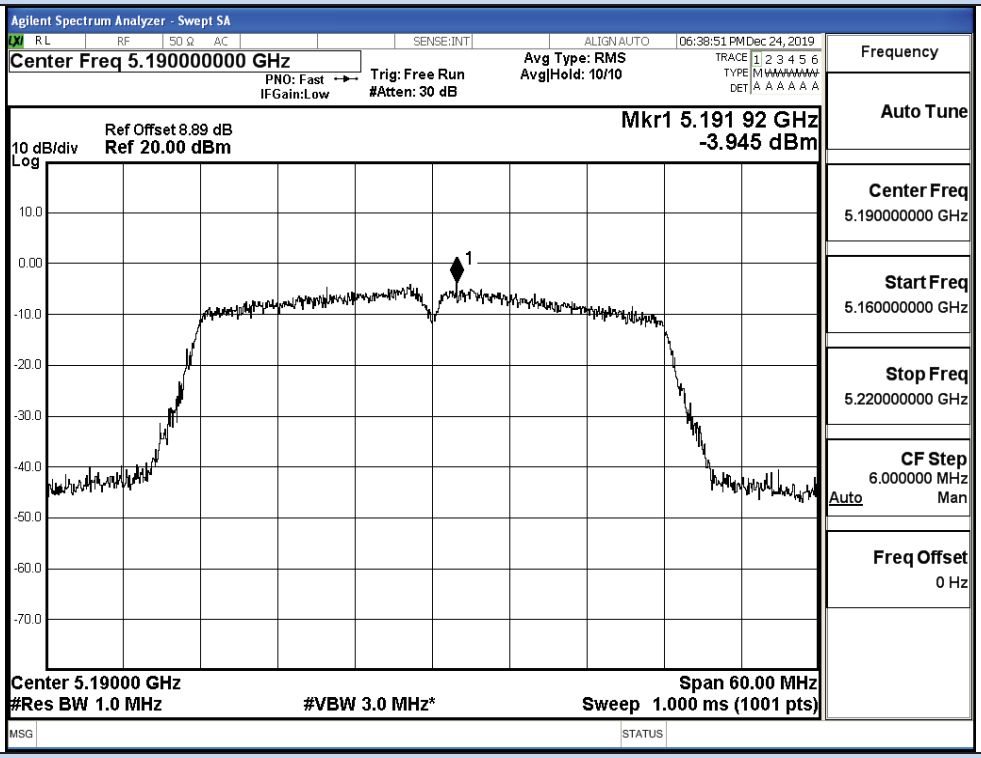

IEEE 802.11ac40 / Channel 38 / 5190MHz

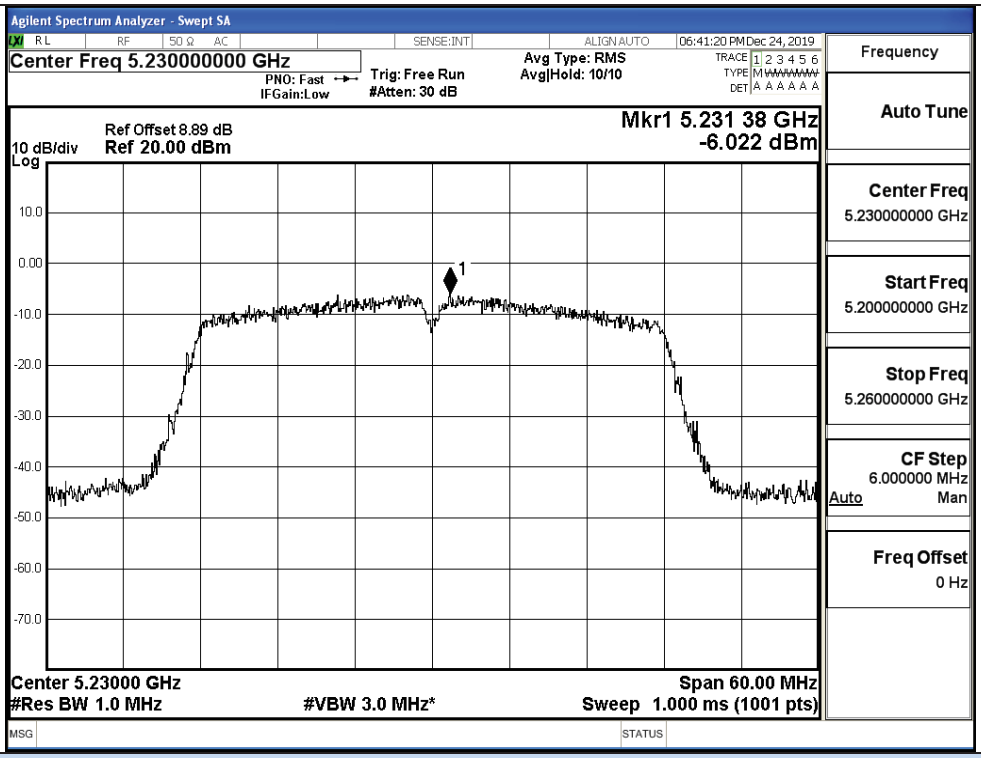

IEEE 802.11ac40 / Channel 46 / 5230MHz

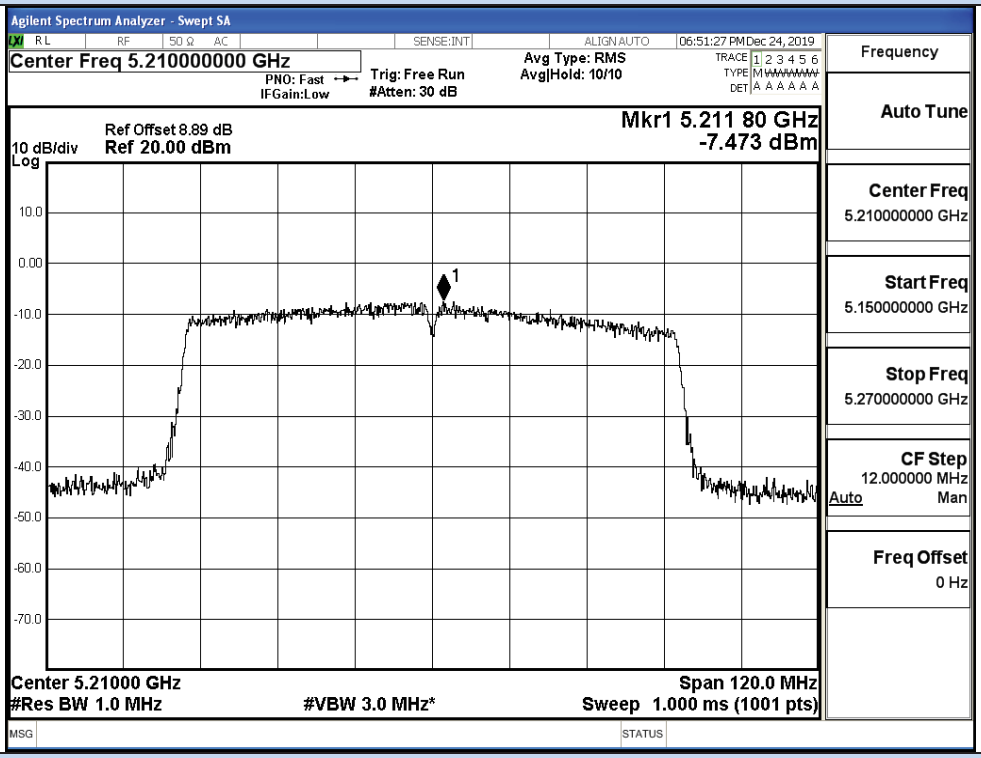

IEEE 802.11ac80 / Channel 42 / 5210MHz

D.4 Emission Bandwidth

Ant0

Test Mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Verdict
11A	36	5180	24.79	16.780	No Limit	Pass
	40	5200	22.55	16.672		Pass
	48	5240	20.89	16.592		Pass
11N20 SISO	36	5180	20.54	17.628	No Limit	Pass
	40	5200	20.27	17.641		Pass
	48	5240	20.22	17.619		Pass
11N40 SISO	38	5190	40.37	36.090	No Limit	Pass
	46	5230	40.58	36.024		Pass
11AC20 SISO	36	5180	20.31	17.664	No Limi	Pass
	40	5200	20.37	17.658		Pass
	48	5240	20.40	17.610		Pass
11AC40 SISO	38	5190	40.79	36.090	No Limi	Pass
	46	5230	40.15	35.913		Pass
11AC80 SISO	42	5210	80.76	75.155	No Limi	Pass

26dB Bandwidth

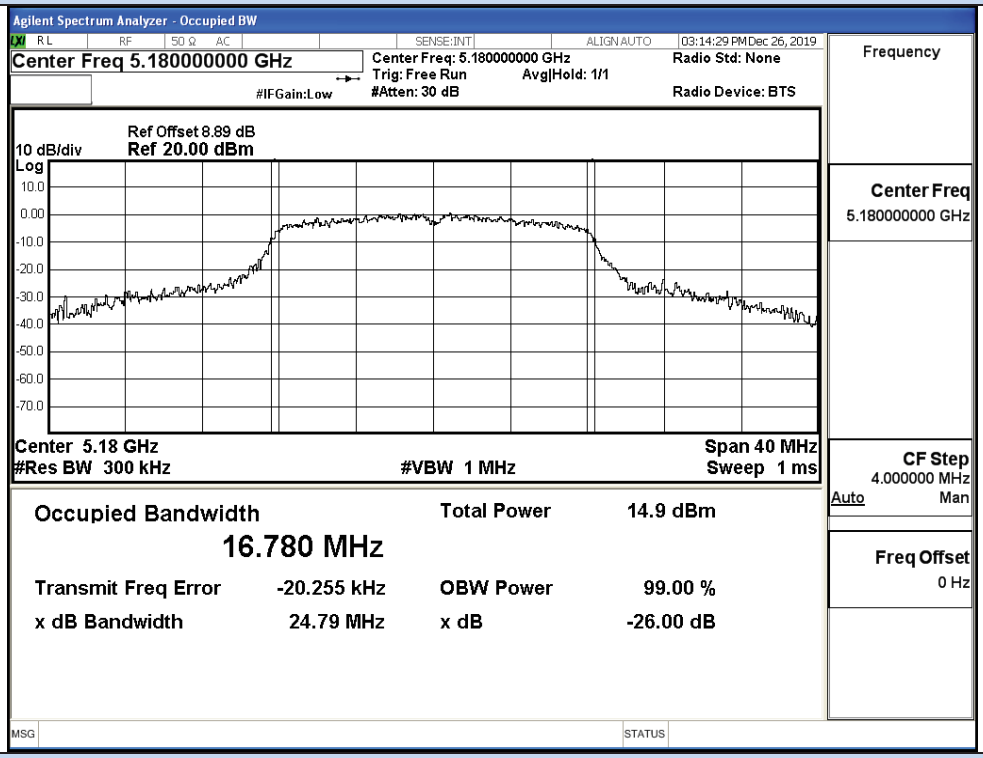

IEEE 802.11a / Channel 36 / 5180MHz

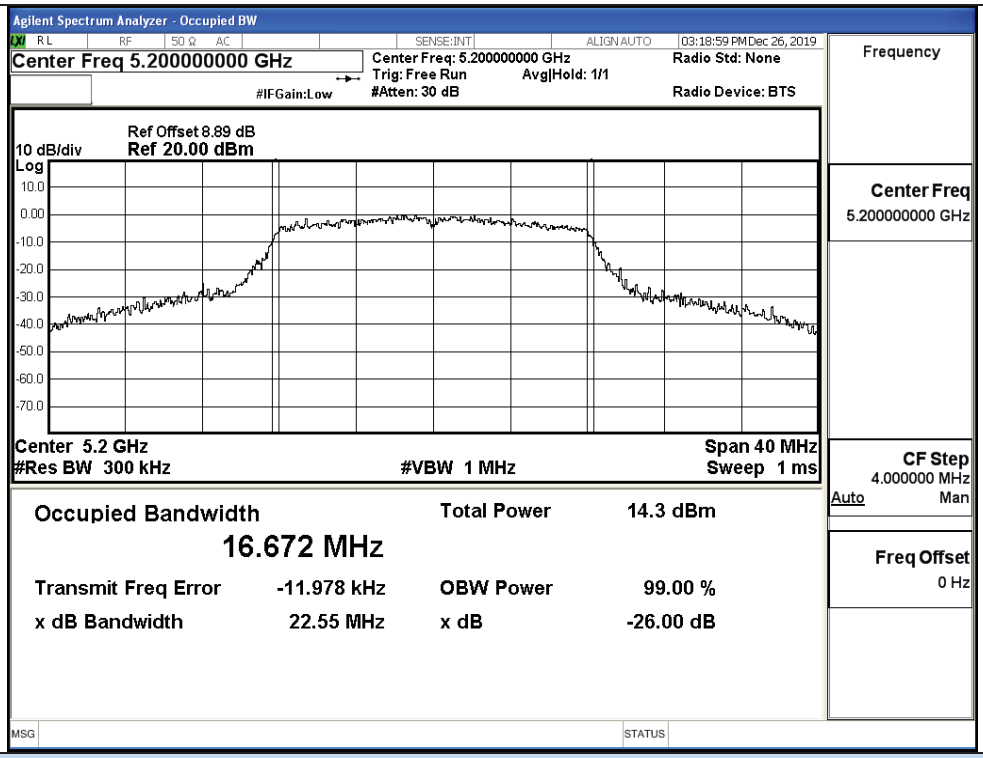

IEEE 802.11a / Channel 40 / 5200MHz

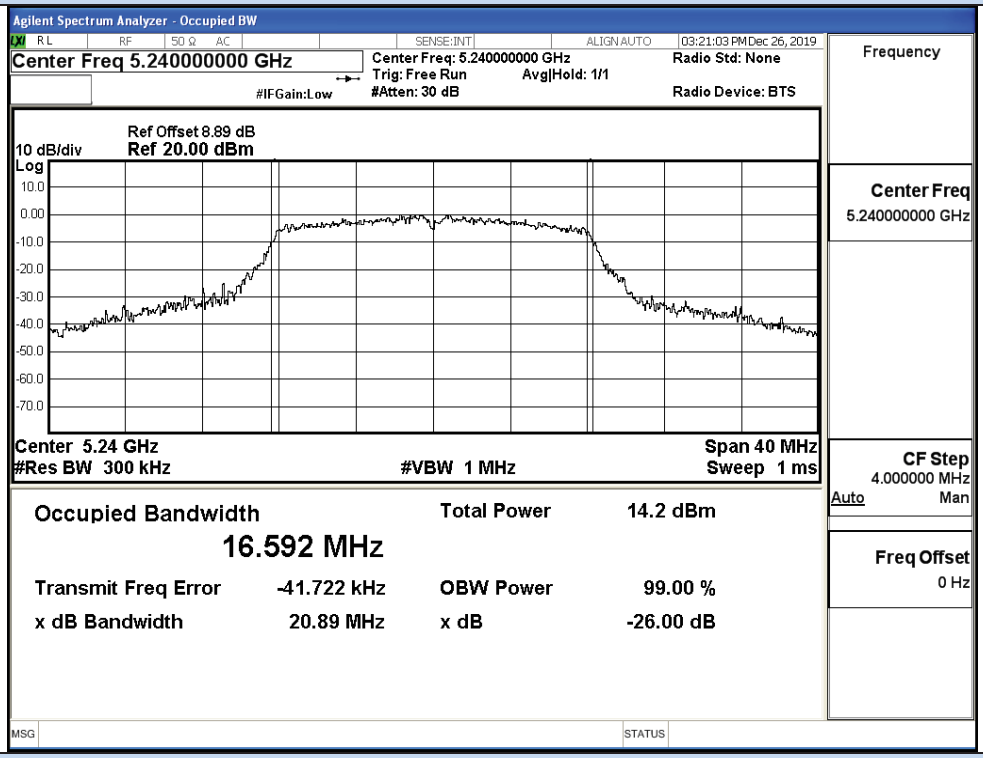

IEEE 802.11a / Channel 48 / 5240MHz

26dB Bandwidth

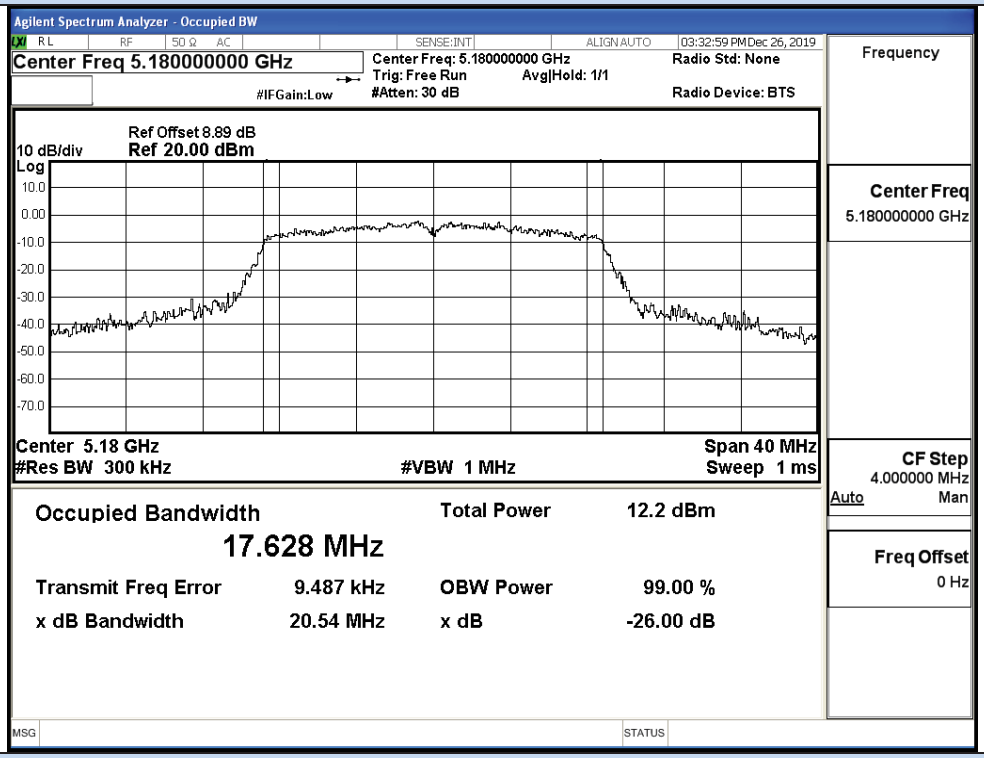

IEEE 802.11n20 / Channel 36 / 5180MHz

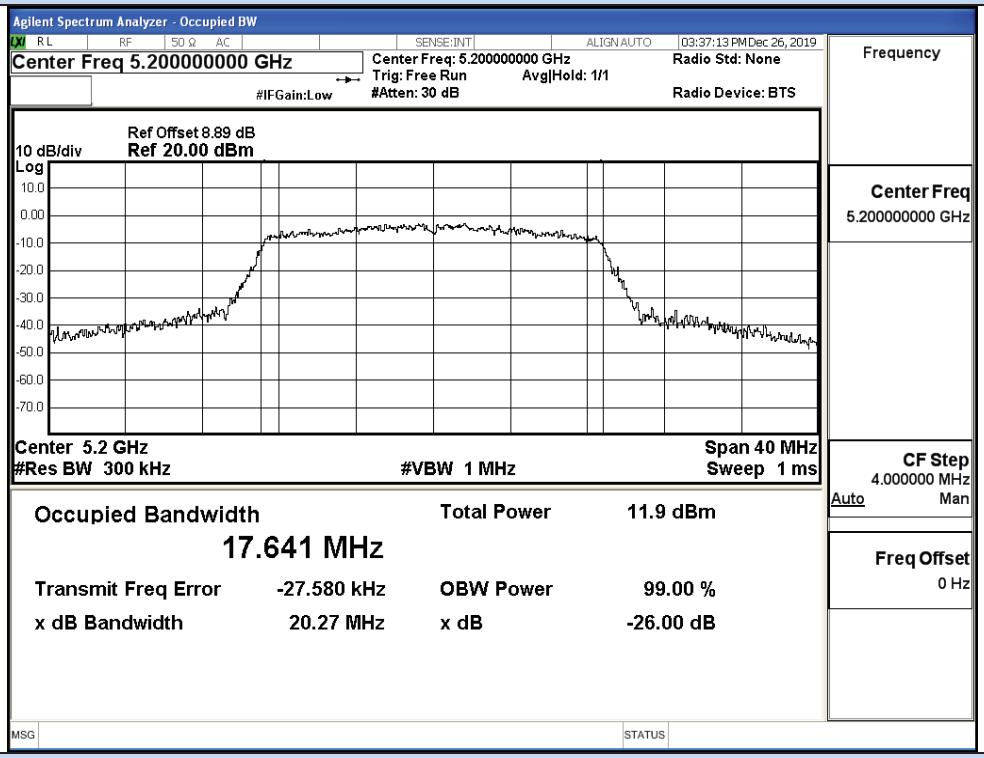

IEEE 802.11n20 / Channel 40 / 5200MHz

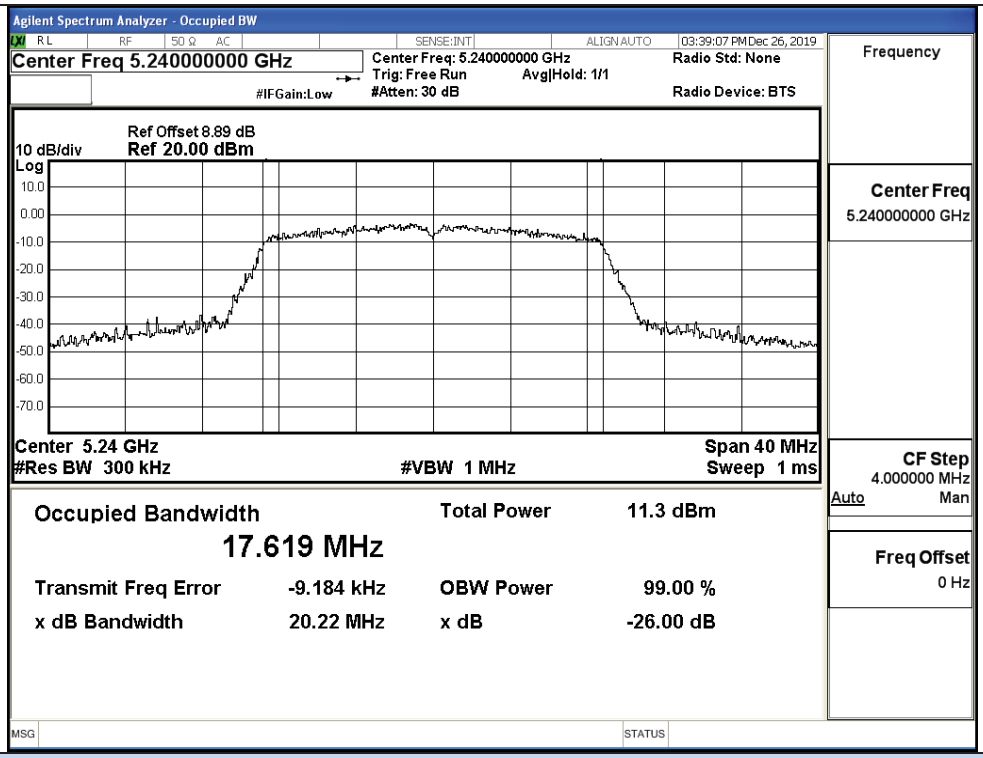

IEEE 802.11n20 / Channel 48 / 5240MHz

26dB Bandwidth

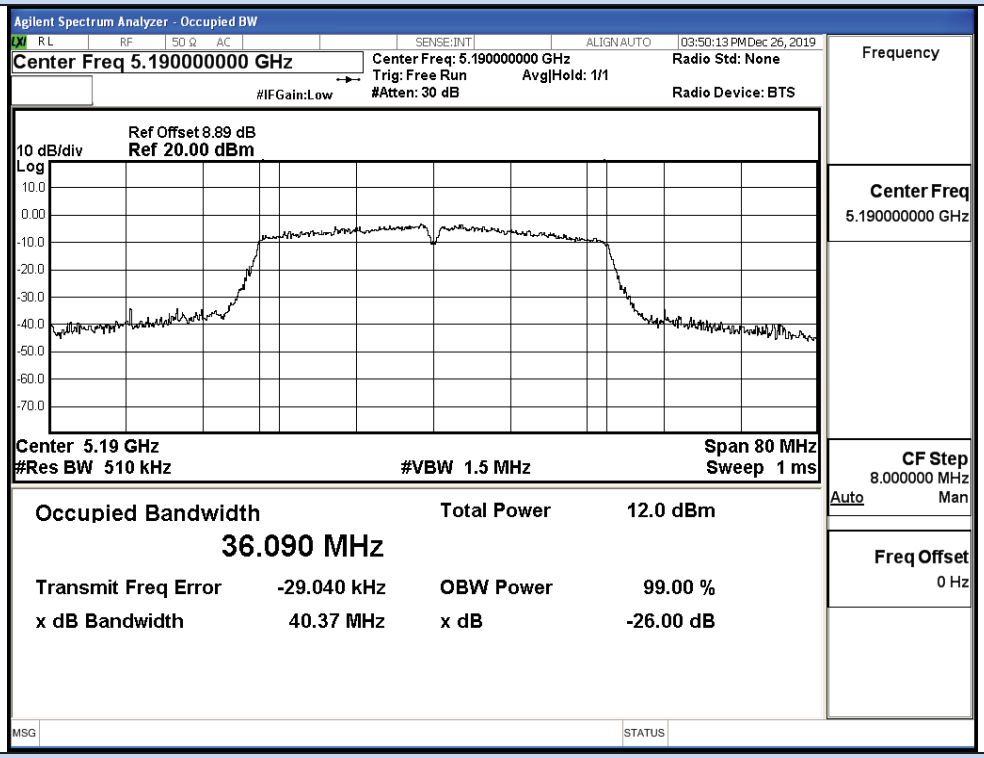

IEEE 802.11n40 / Channel 38 / 5190MHz

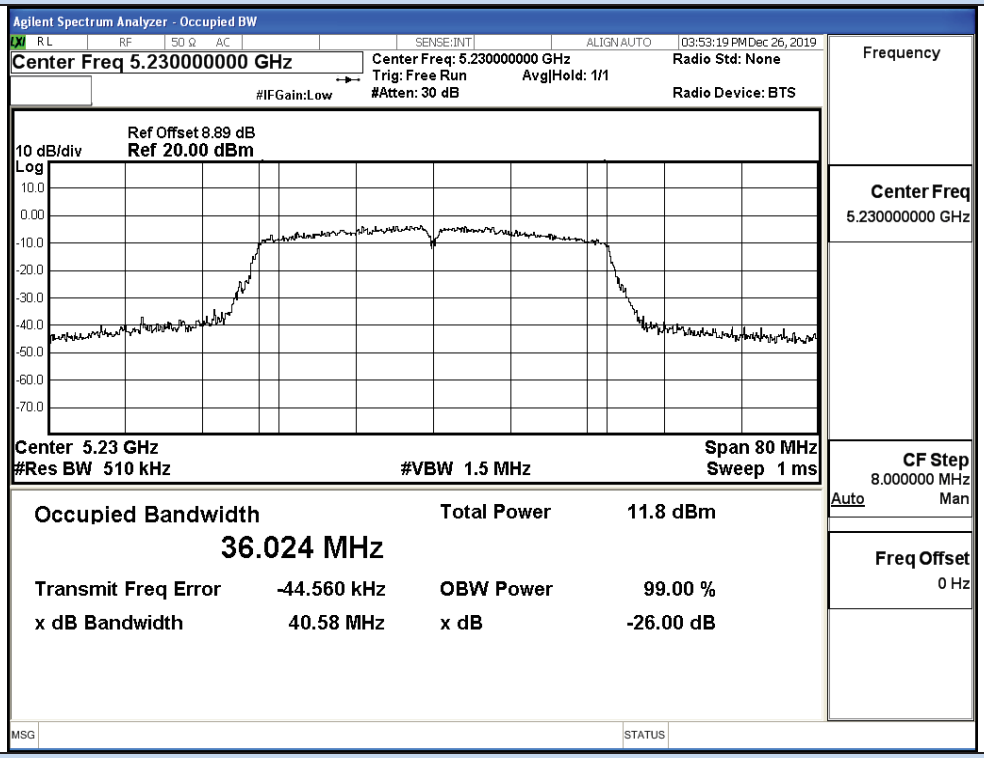

IEEE 802.11n40 / Channel 46 / 5230MHz

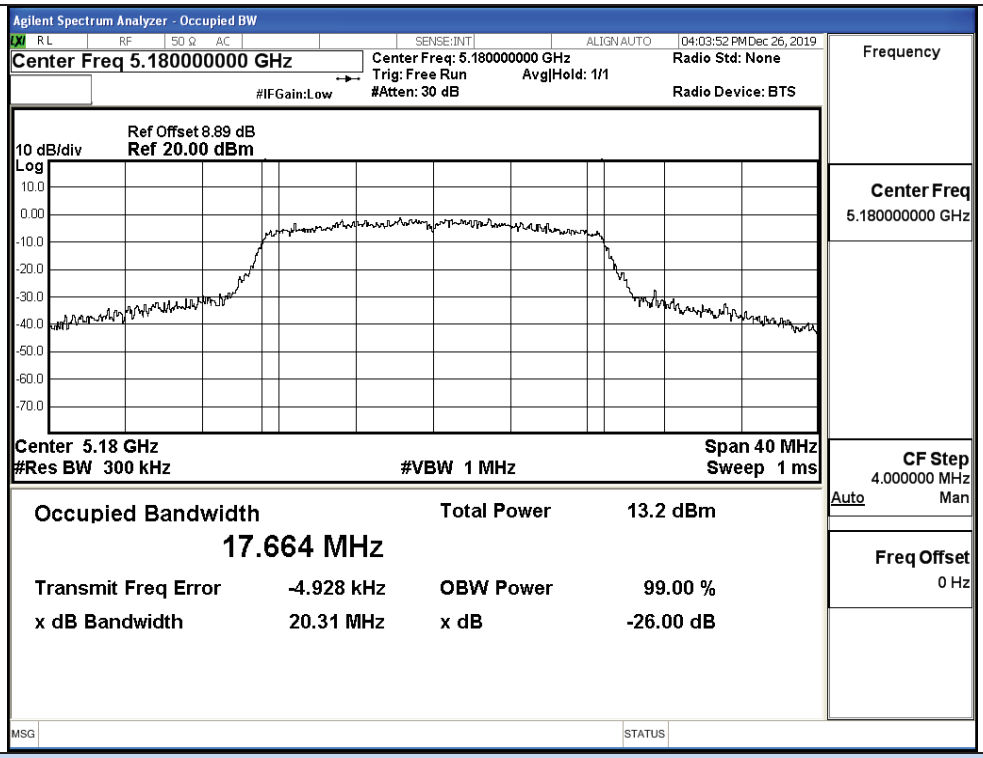

IEEE 802.11ac20 / Channel 36 / 5180MHz

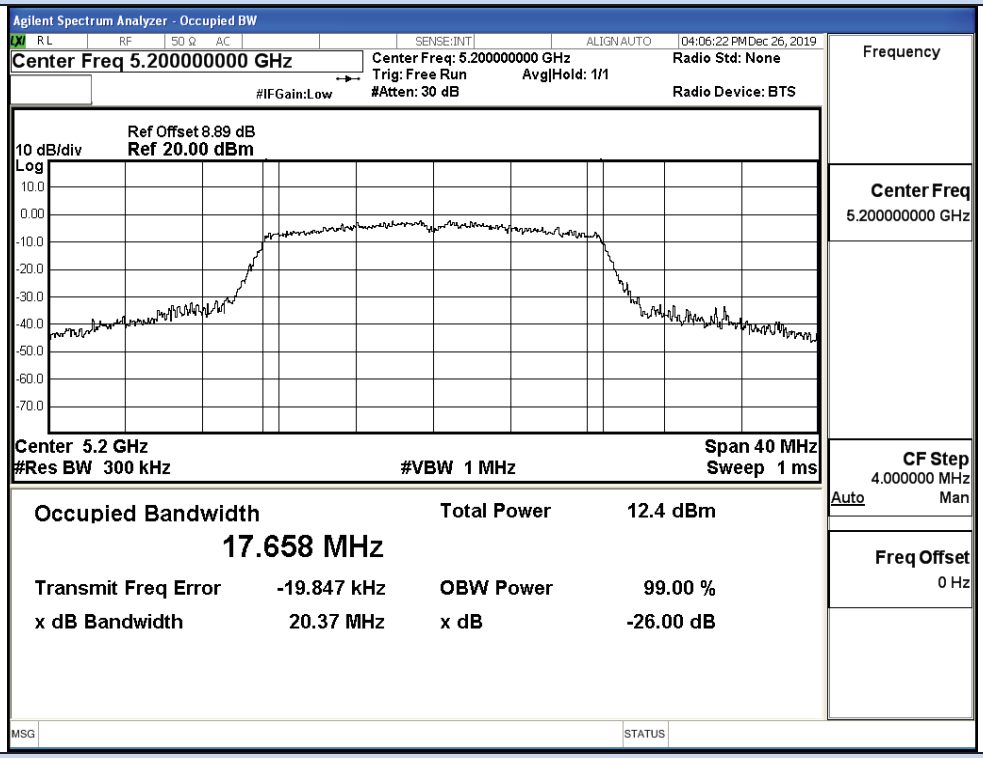

IEEE 802.11ac20 / Channel 40 / 5200MHz

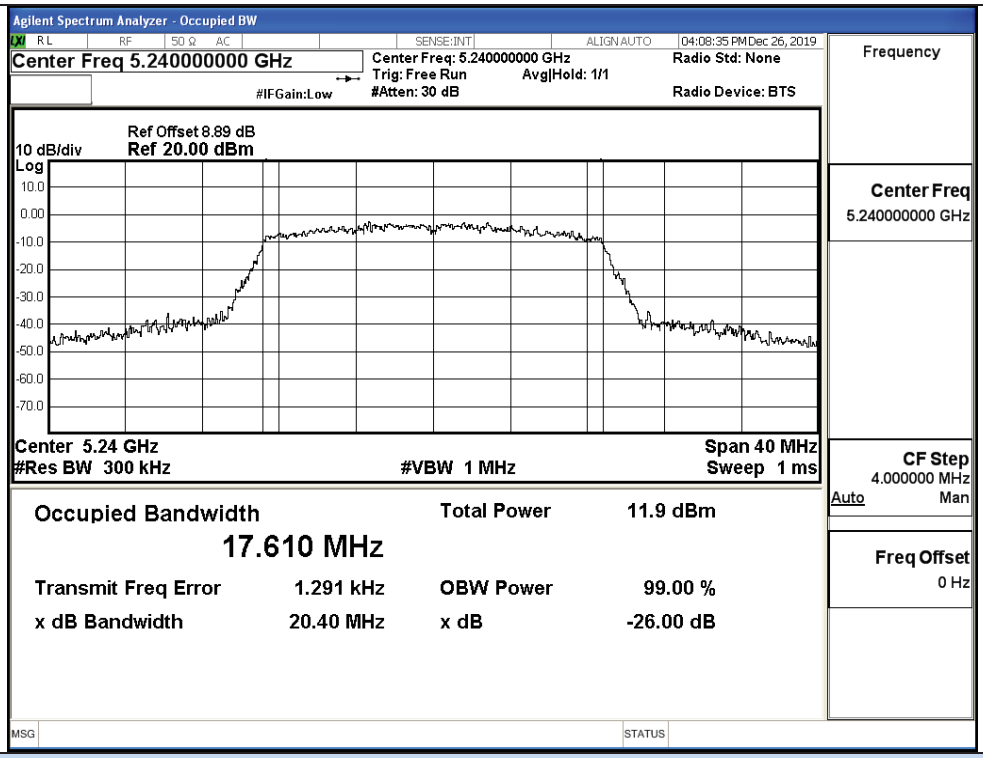

IEEE 802.11ac20 / Channel 48 / 5240MHz

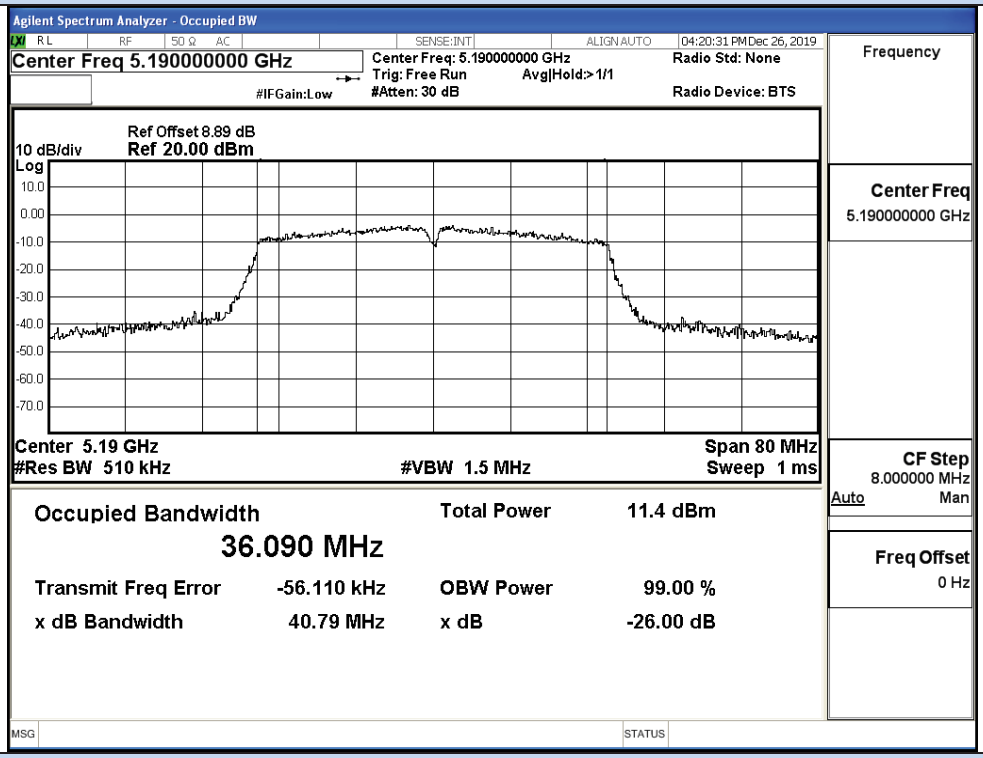

IEEE 802.11ac40 / Channel 38 / 5190MHz

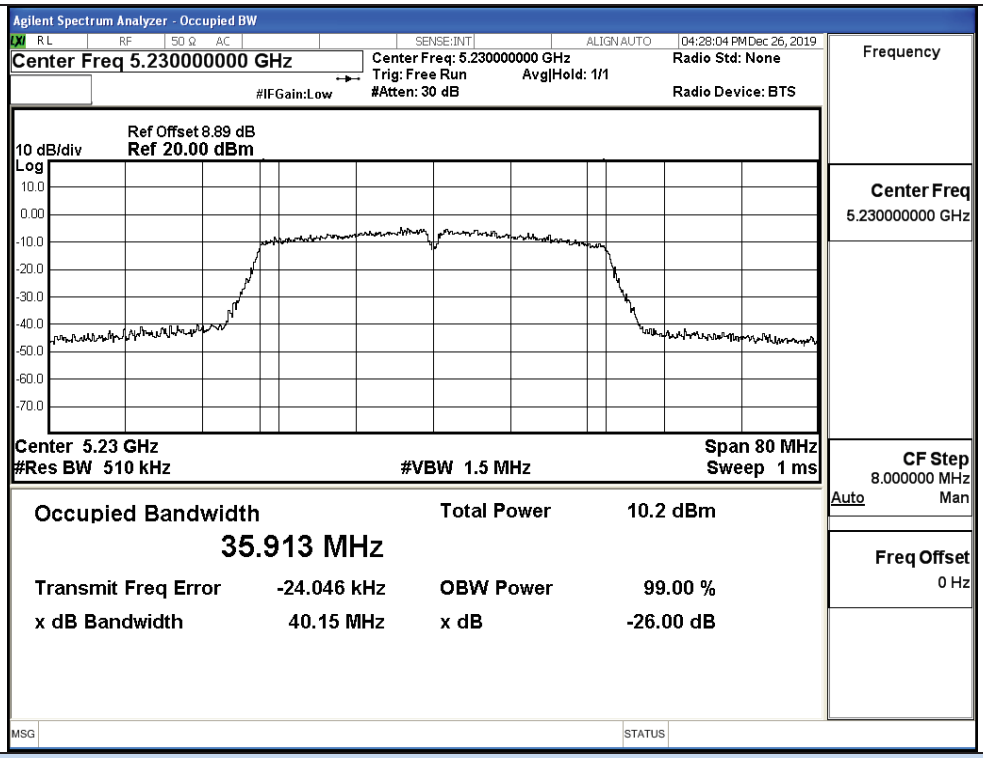

IEEE 802.11ac40 / Channel 46 / 5230MHz

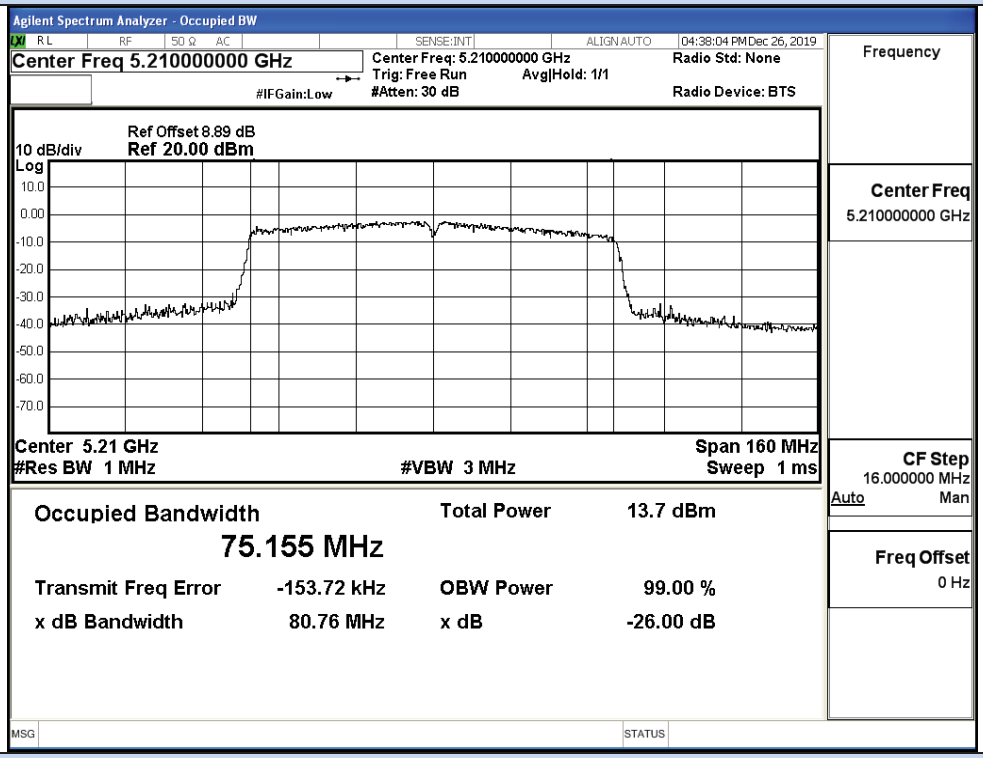

IEEE 802.11ac80 / Channel 42 / 5210MHz

Ant1

Test Mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Verdict
11A	36	5180	20.29	16.582	No Limit	Pass
	40	5200	20.12	16.591		Pass
	48	5240	19.90	16.570		Pass
11N20 SISO	36	5180	20.42	17.673	No Limit	Pass
	40	5200	20.48	17.642		Pass
	48	5240	20.03	17.585		Pass
11N40 SISO	38	5190	40.77	36.075	No Limit	Pass
	46	5230	40.92	36.028		Pass
11AC20 SISO	36	5180	25.43	17.725	No Limi	Pass
	40	5200	20.32	17.607		Pass
	48	5240	20.11	17.605		Pass
11AC40 SISO	38	5190	40.46	36.001	No Limi	Pass
	46	5230	40.37	35.993		Pass
11AC80 SISO	42	5210	81.00	75.180	No Limi	Pass

26dB Bandwidth

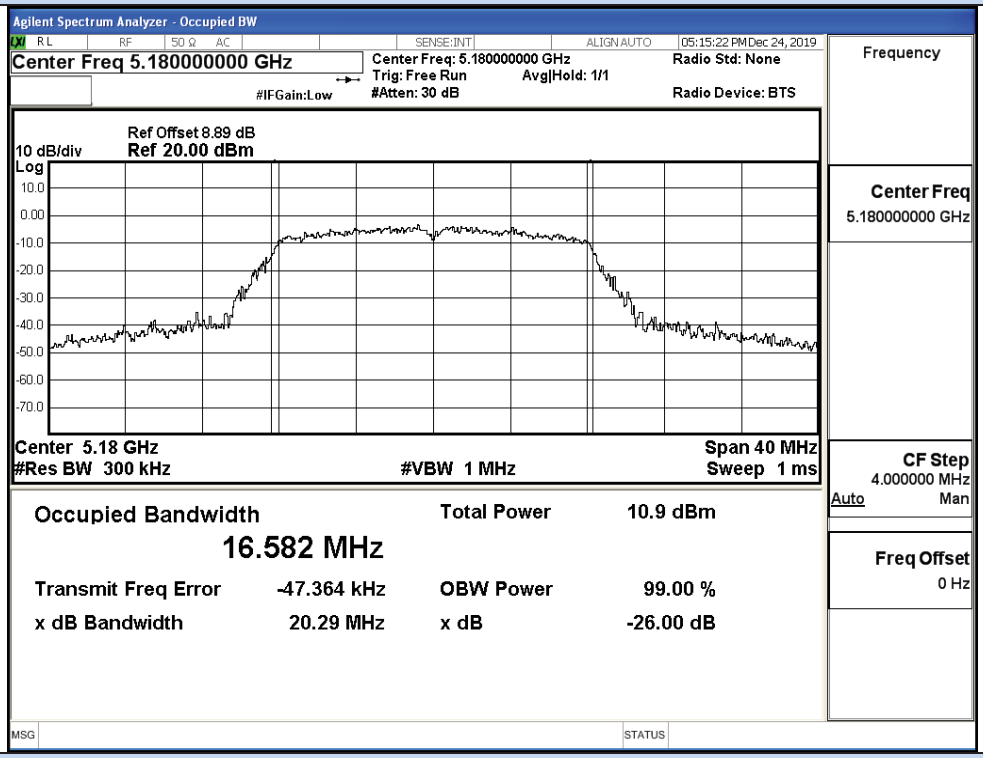

IEEE 802.11a / Channel 36 / 5180MHz

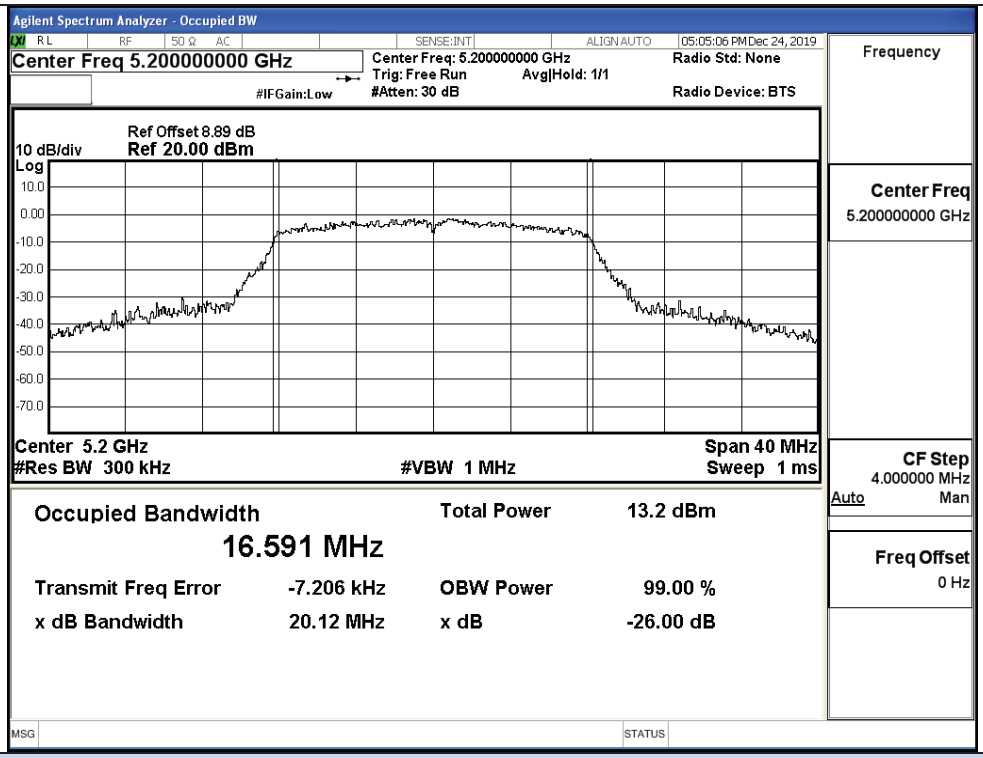

IEEE 802.11a / Channel 40 / 5200MHz

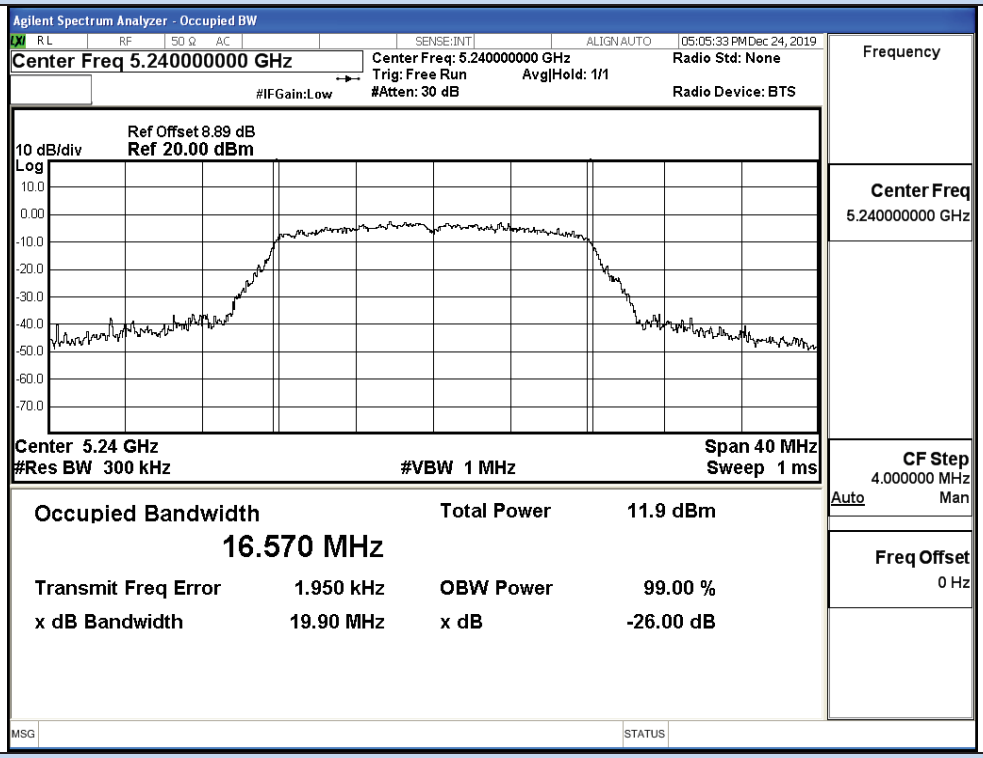

IEEE 802.11a / Channel 48 / 5240MHz

26dB Bandwidth

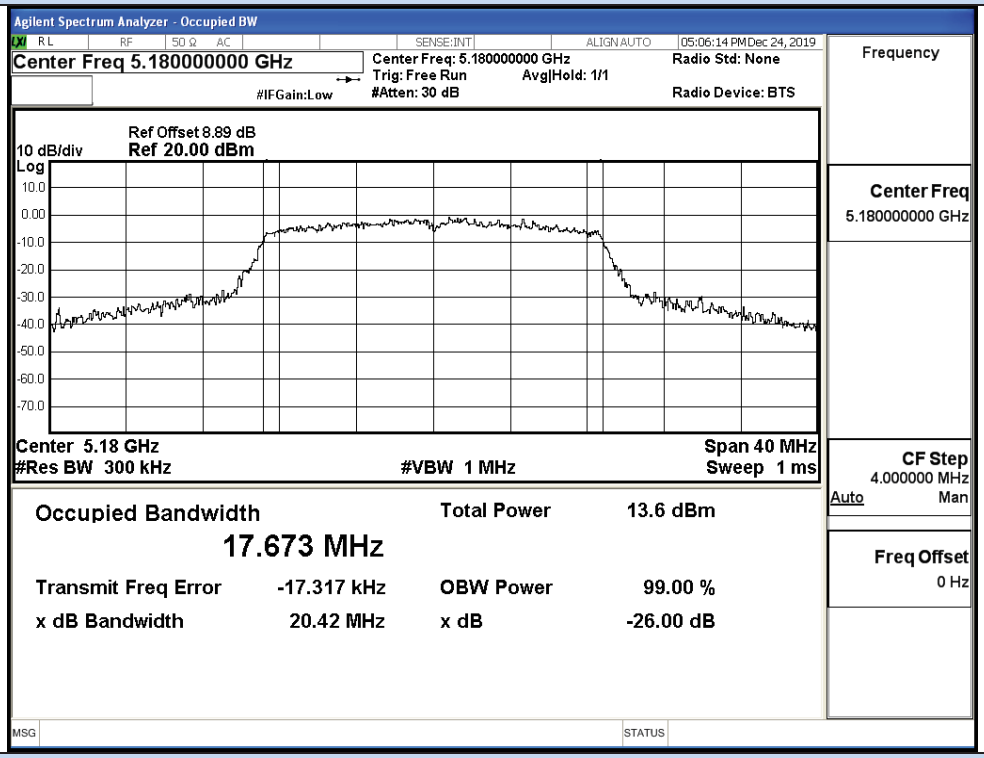

IEEE 802.11n20 / Channel 36 / 5180MHz

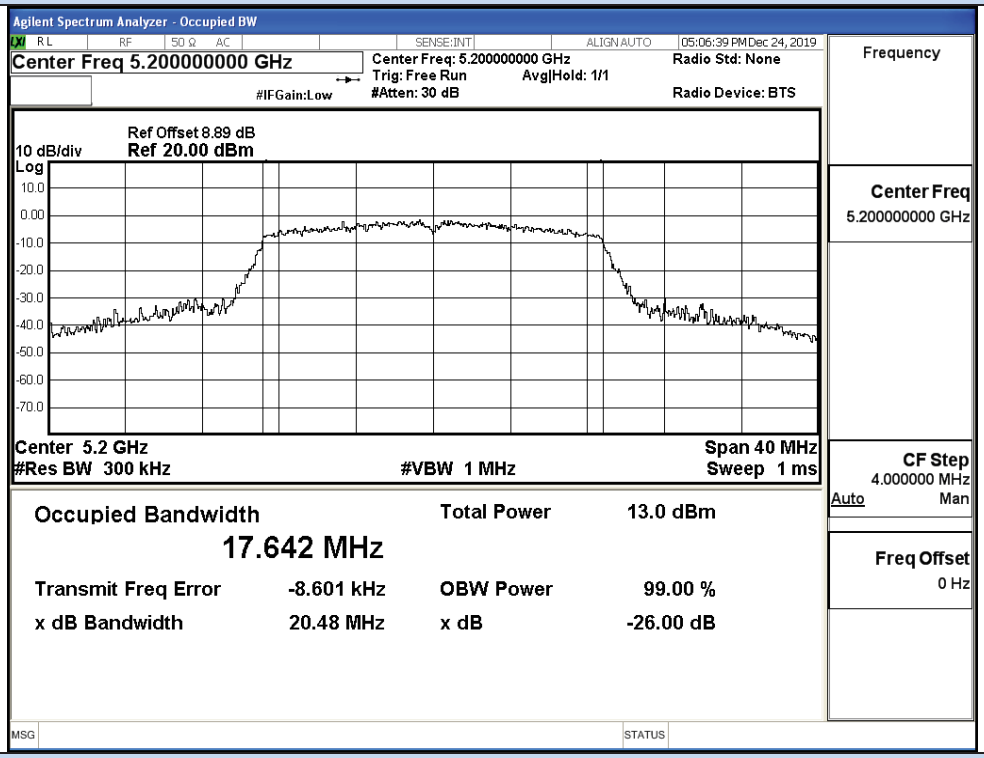

IEEE 802.11n20 / Channel 40 / 5200MHz

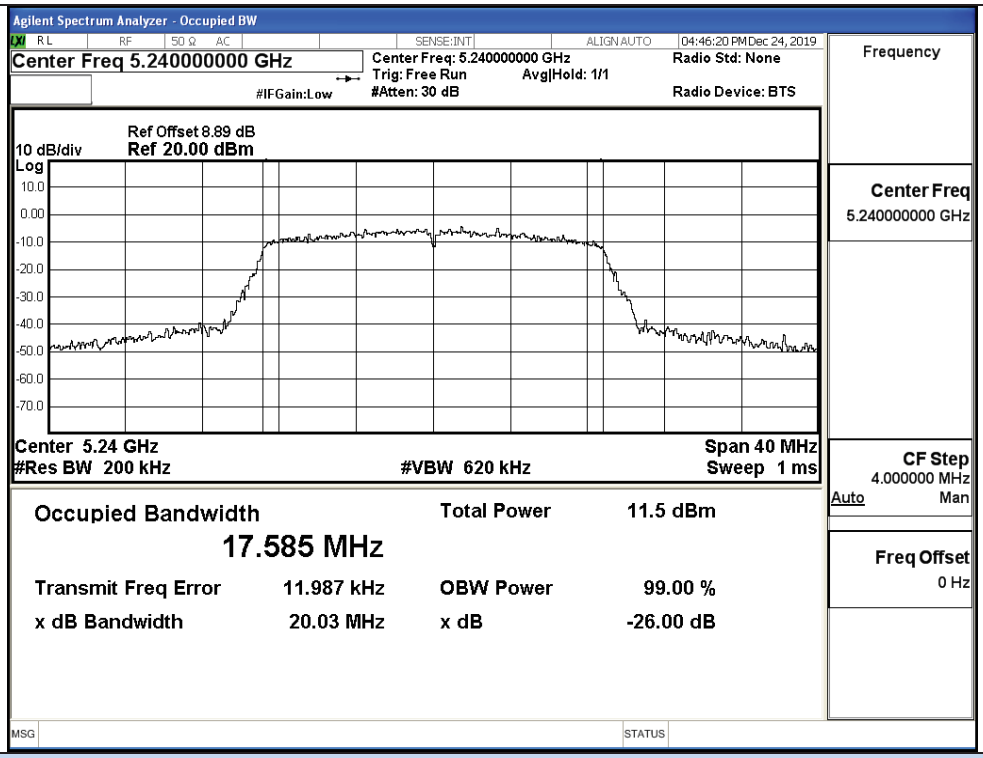

IEEE 802.11n20 / Channel 48 / 5240MHz

26dB Bandwidth

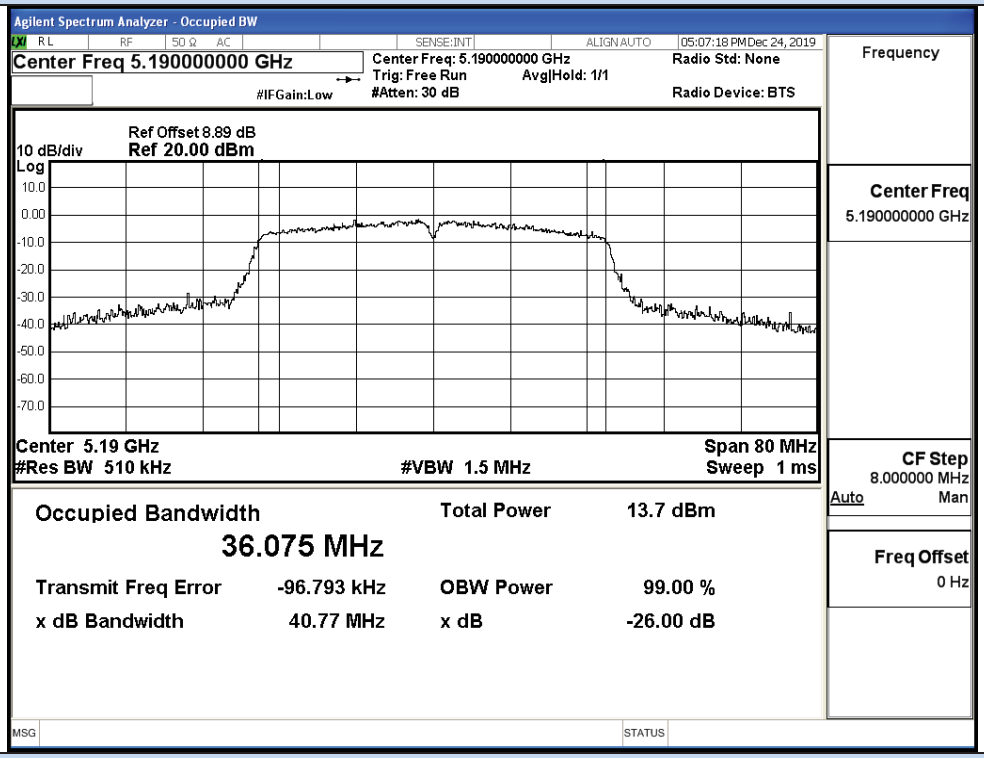

IEEE 802.11n40 / Channel 38 / 5190MHz

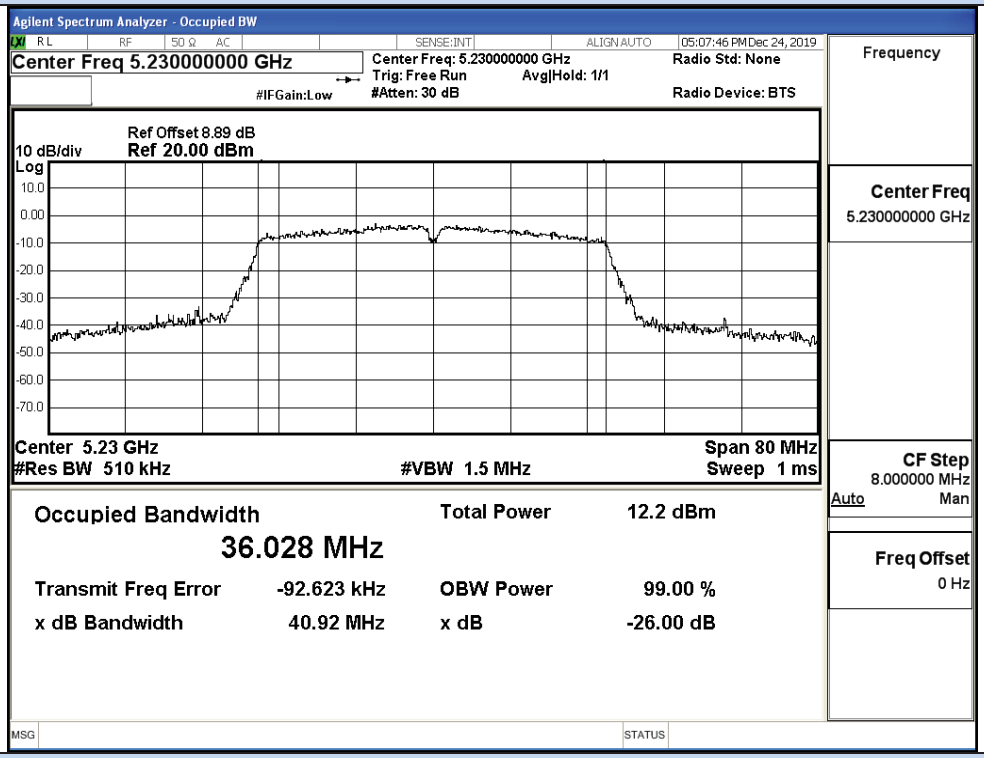

IEEE 802.11n40 / Channel 46 / 5230MHz

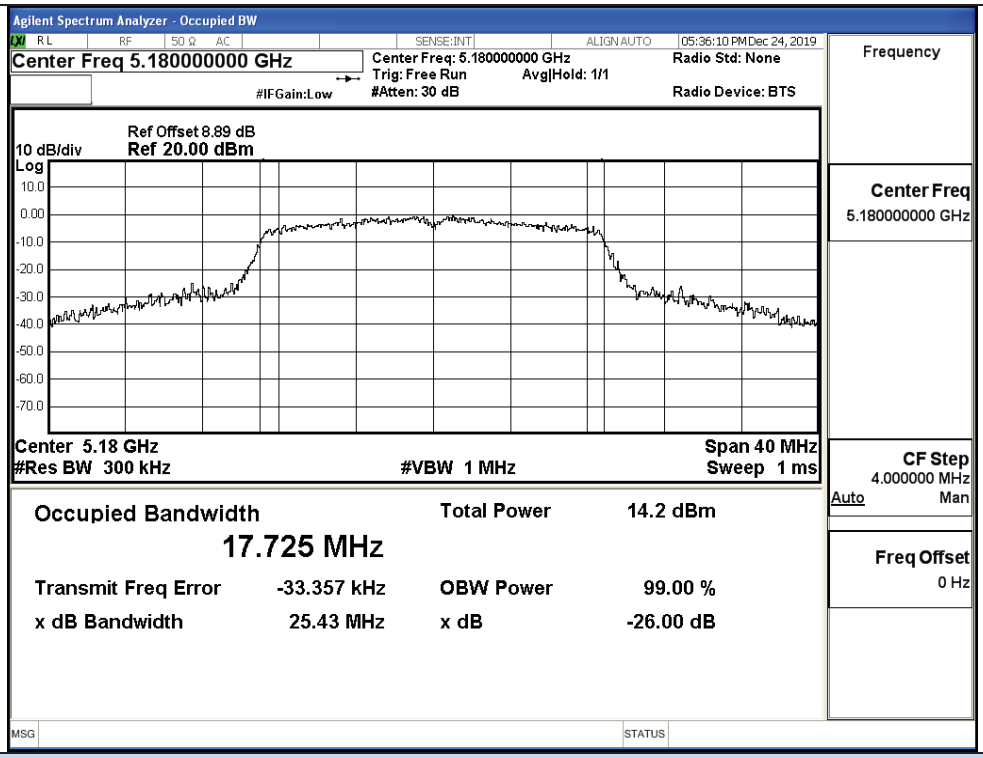

IEEE 802.11ac20 / Channel 36 / 5180MHz

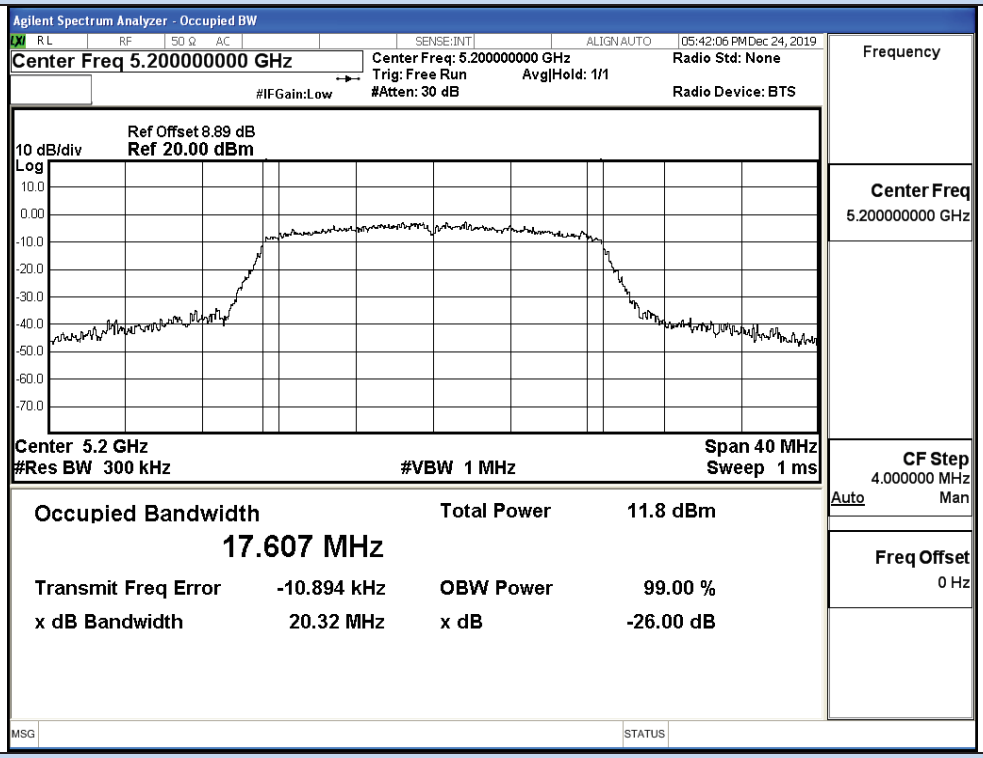

IEEE 802.11ac20 / Channel 40 / 5200MHz

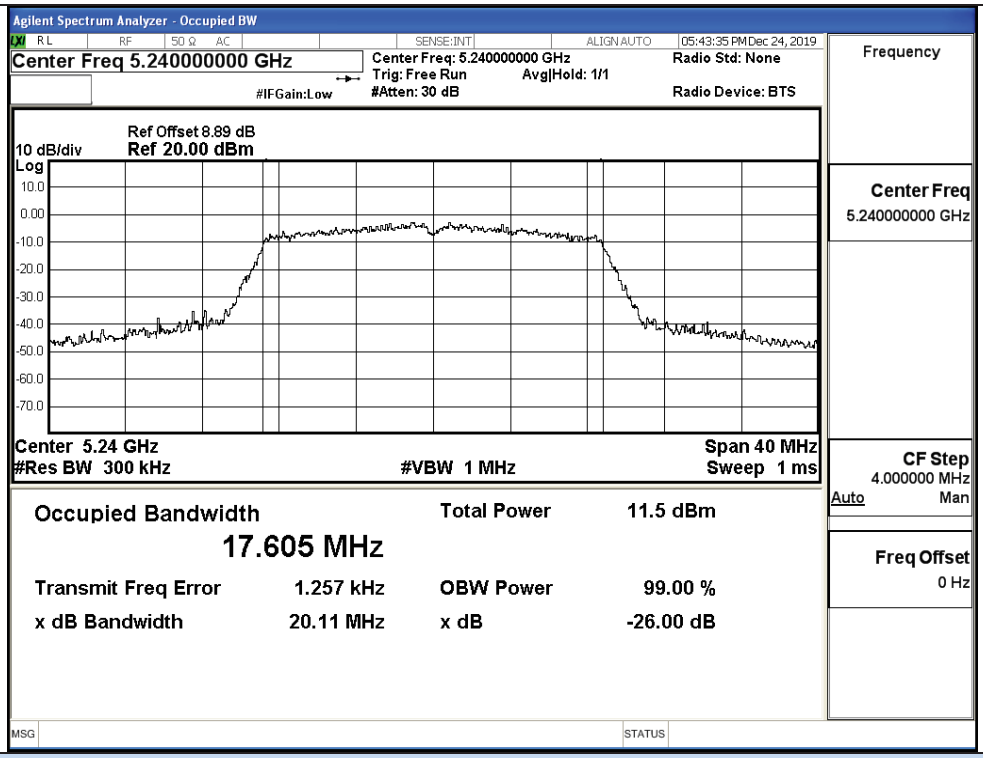

IEEE 802.11ac20 / Channel 48 / 5240MHz

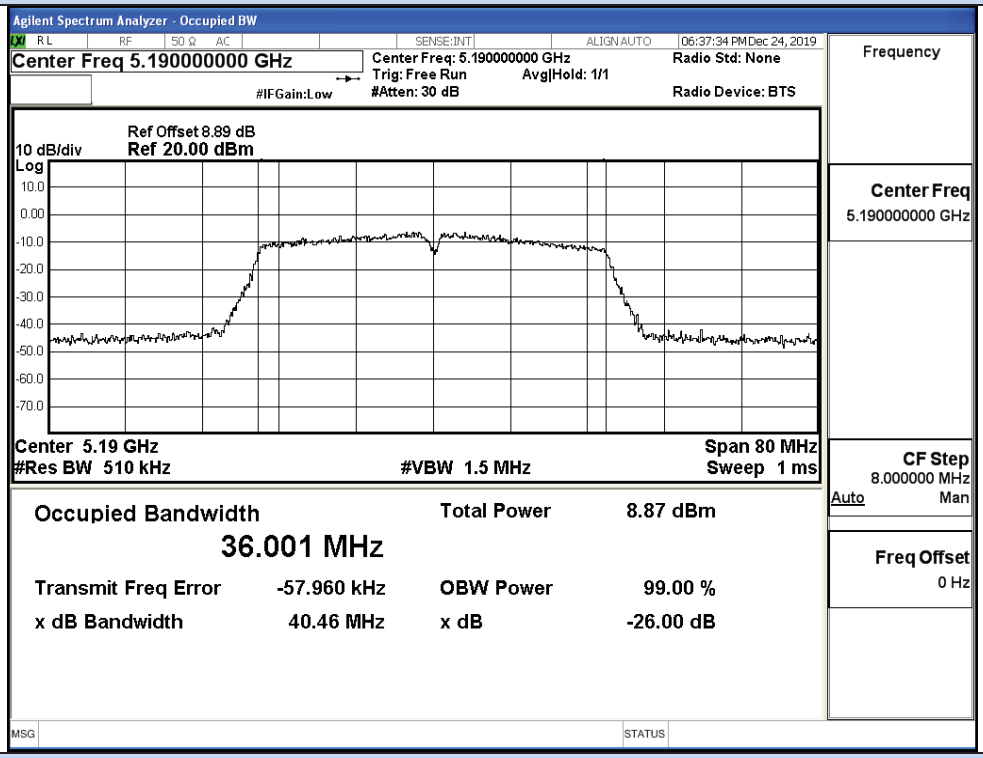

IEEE 802.11ac40 / Channel 38 / 5190MHz

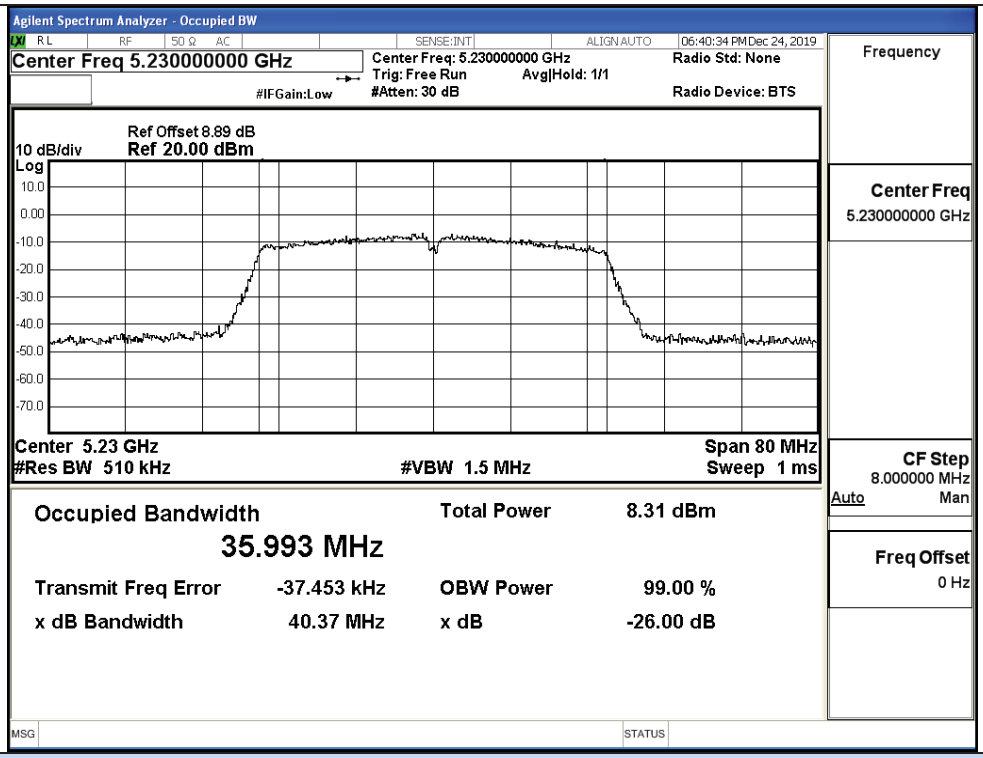

IEEE 802.11ac40 / Channel 46 / 5230MHz

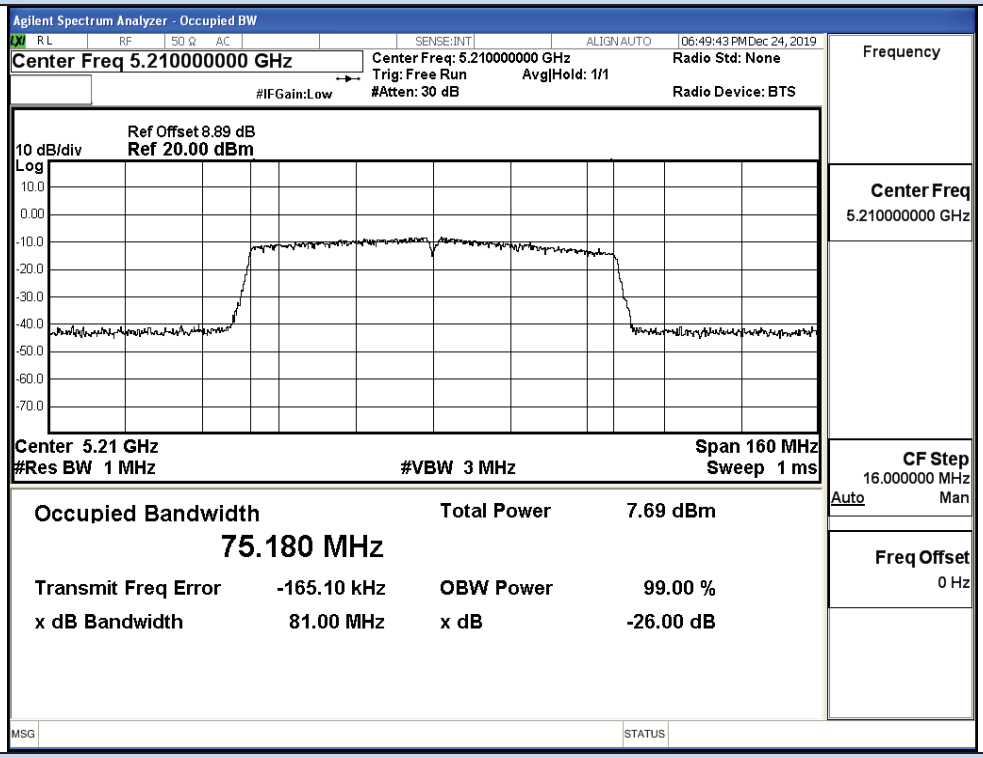

IEEE 802.11ac80 / Channel 42 / 5210MHz

Ant0+1

Test Mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Verdict
11N20 SISO	36	5180	20.48	17.654	No Limit	Pass
	40	5200	20.24	17.623		Pass
	48	5240	20.18	17.601		Pass
11N40 SISO	38	5190	40.06	36.006	No Limit	Pass
	46	5230	40.53	35.980		Pass
11AC20 SISO	36	5180	20.46	17.602	No Limi	Pass
	40	5200	20.30	17.607		Pass
	48	5240	20.45	17.622		Pass
11AC40 SISO	38	5190	40.25	36.029	No Limi	Pass
	46	5230	40.71	36.035		Pass
11AC80 SISO	42	5210	80.91	75.195	No Limi	Pass

26dB Bandwidth

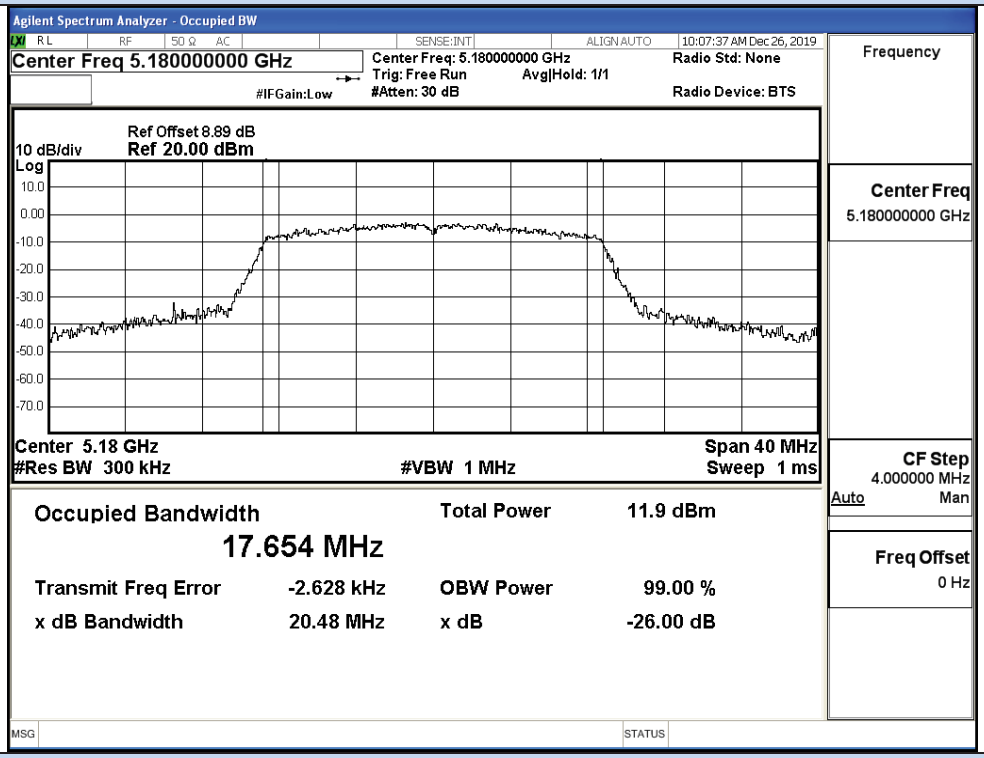

IEEE 802.11n20 / Channel 36 / 5180MHz

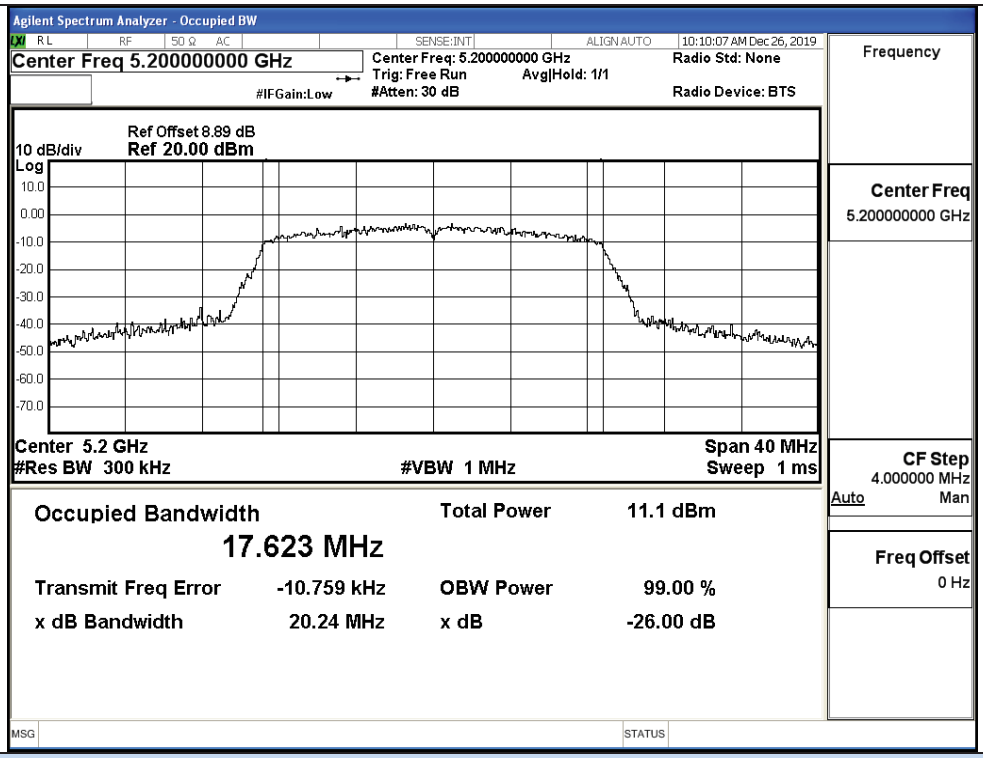

IEEE 802.11n20 / Channel 40 / 5200MHz

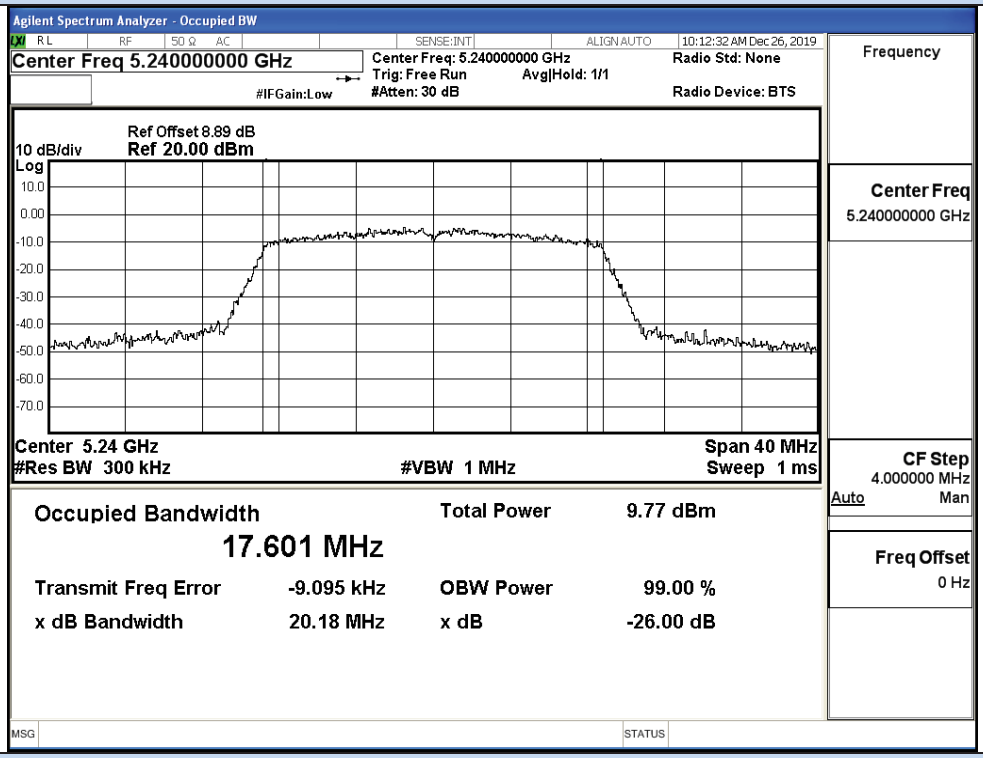

IEEE 802.11n20 / Channel 48 / 5240MHz

26dB Bandwidth

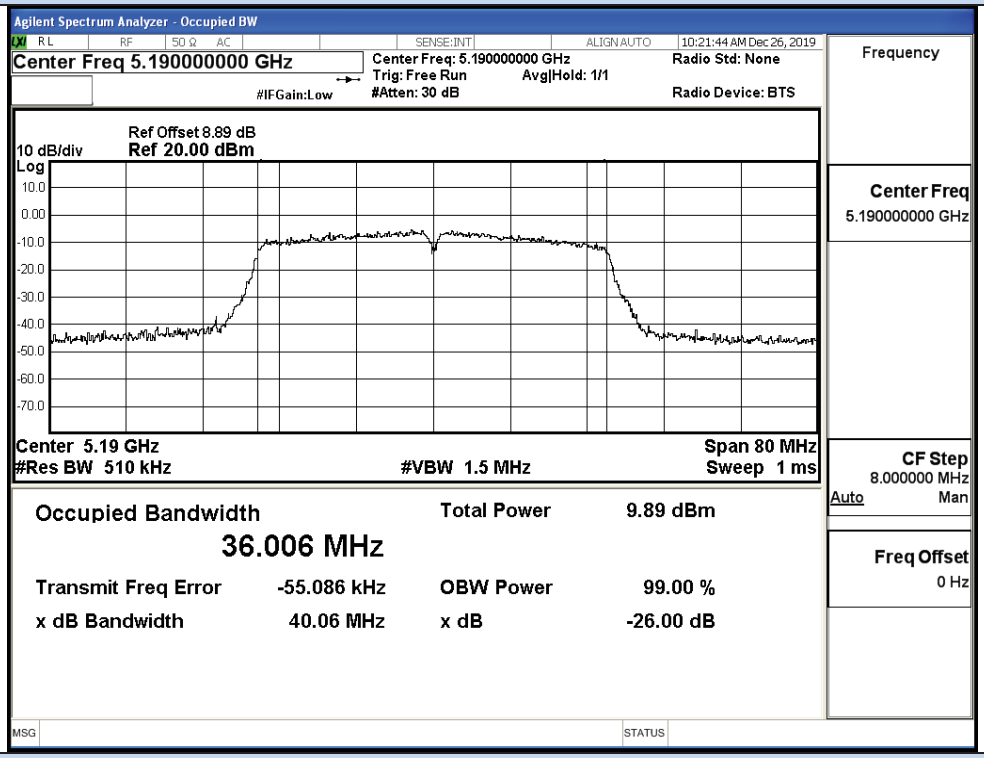

IEEE 802.11n40 / Channel 38 / 5190MHz

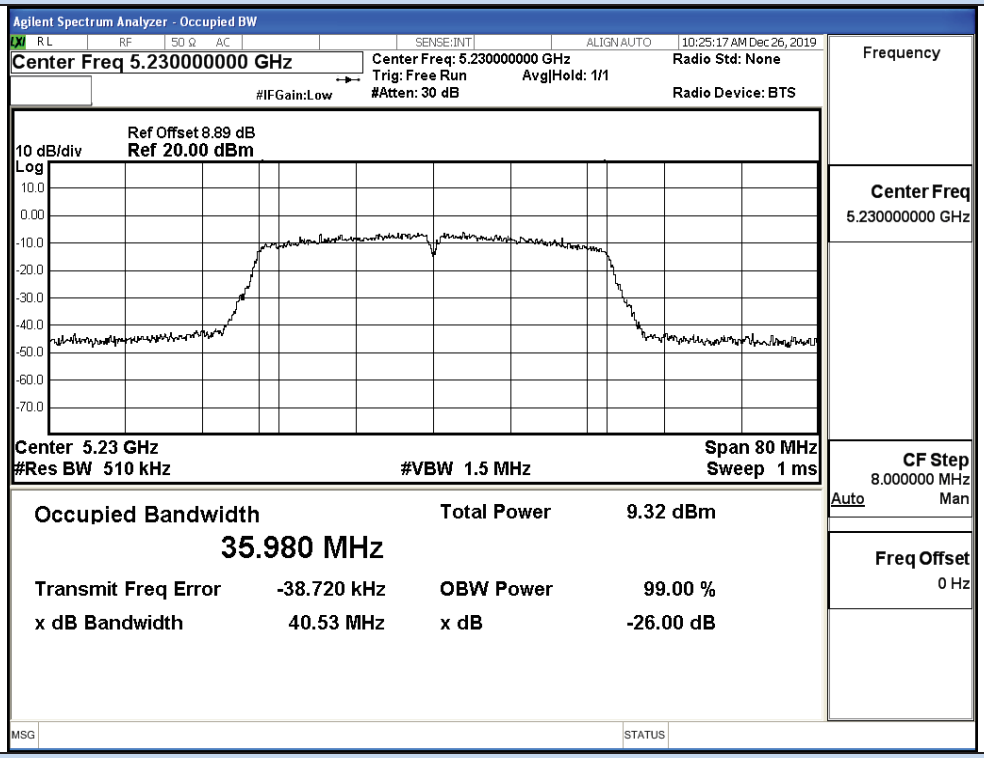

IEEE 802.11n40 / Channel 46 / 5230MHz

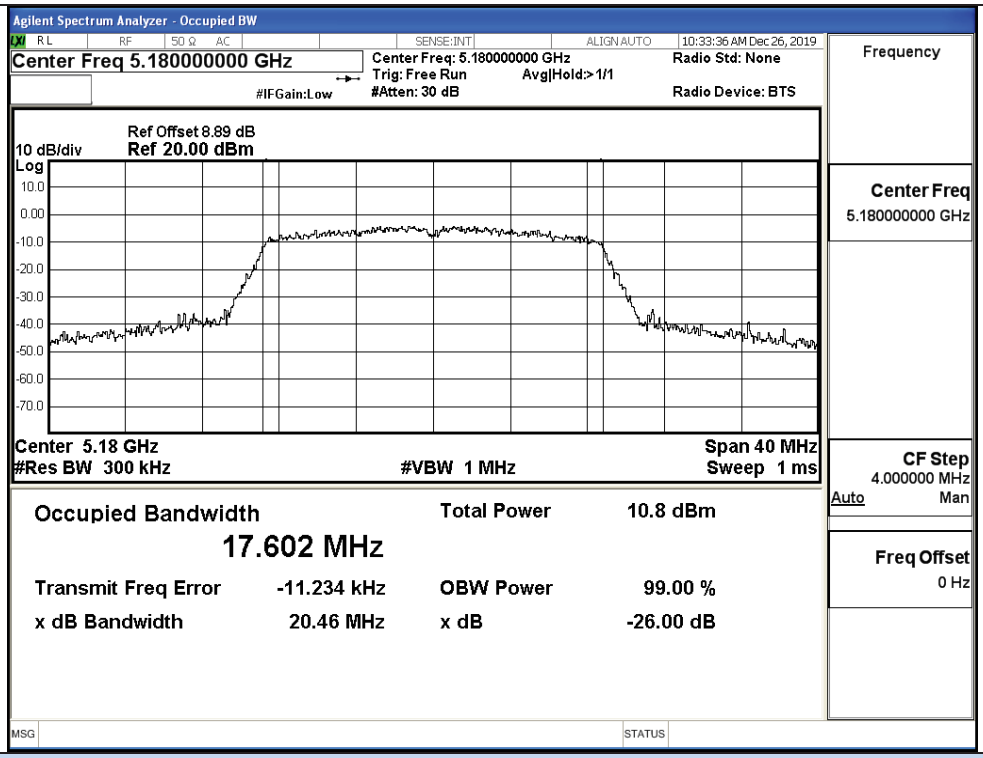

IEEE 802.11ac20 / Channel 36 / 5180MHz

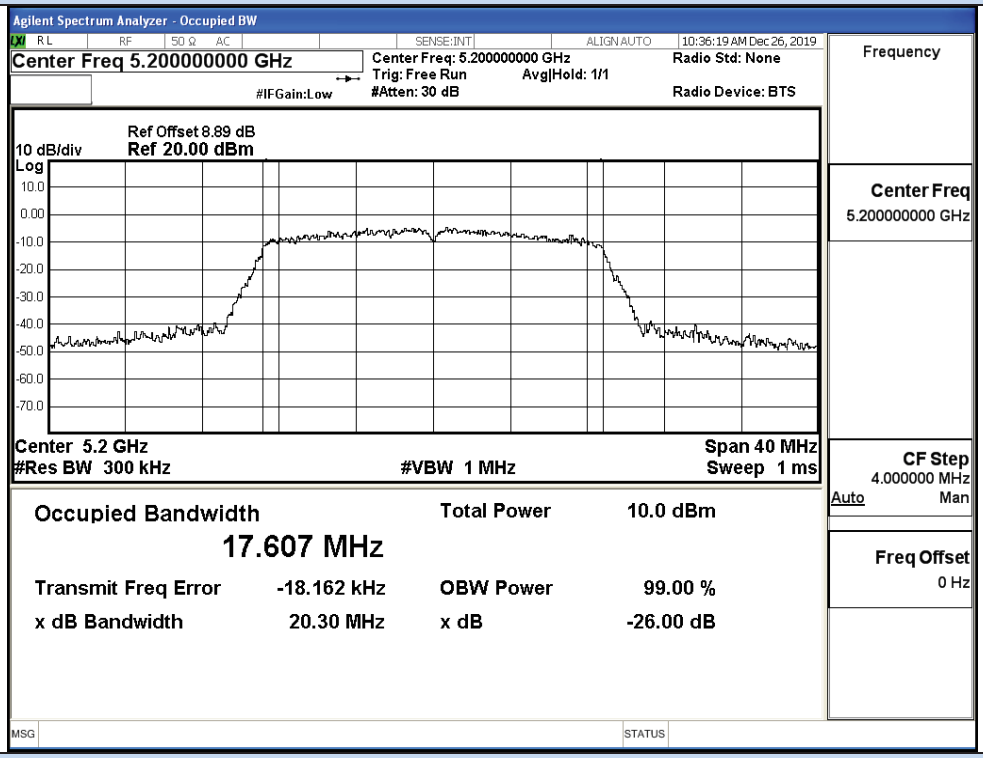

IEEE 802.11ac20 / Channel 40 / 5200MHz

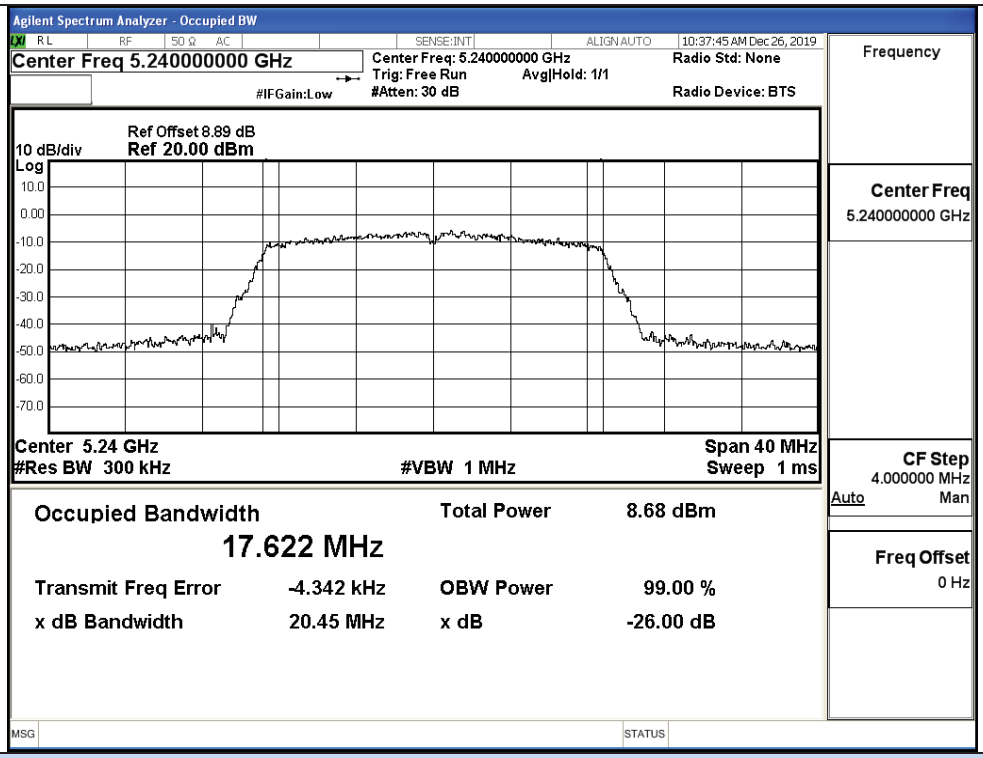

IEEE 802.11ac20 / Channel 48 / 5240MHz

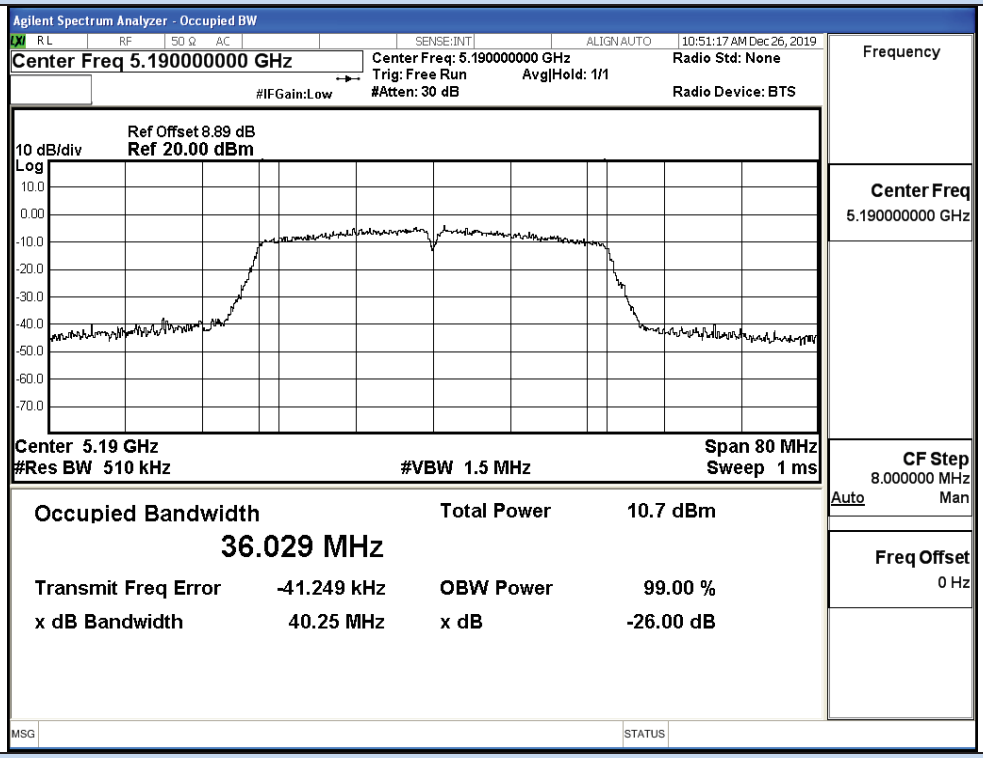

IEEE 802.11ac40 / Channel 38 / 5190MHz

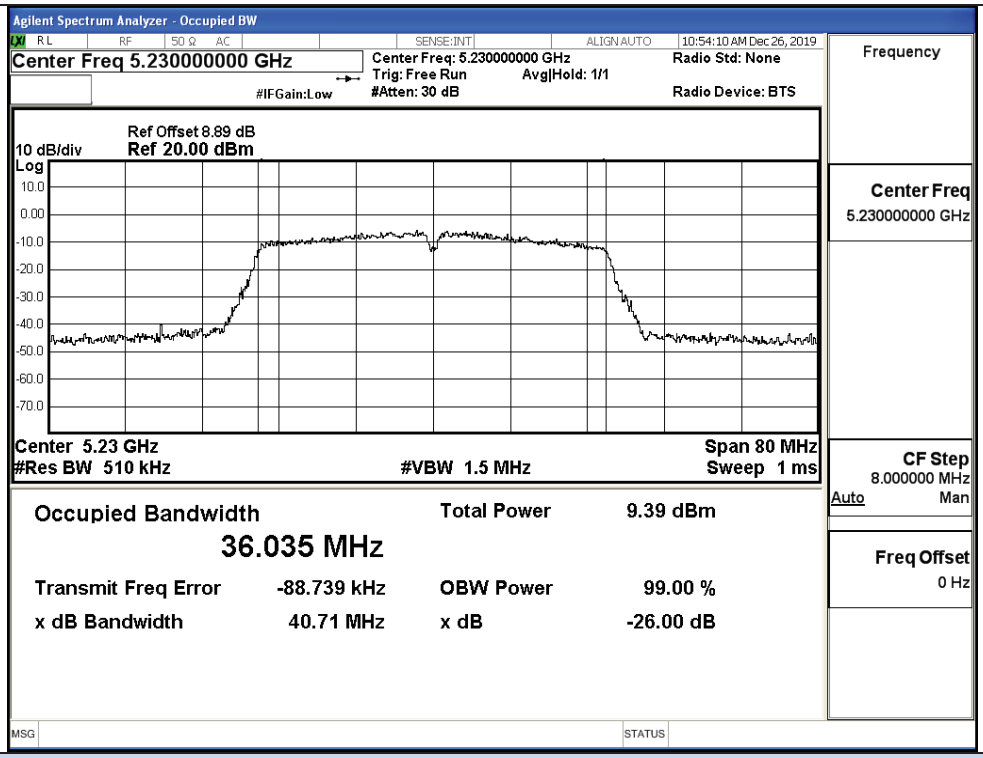

IEEE 802.11ac40 / Channel 46 / 5230MHz

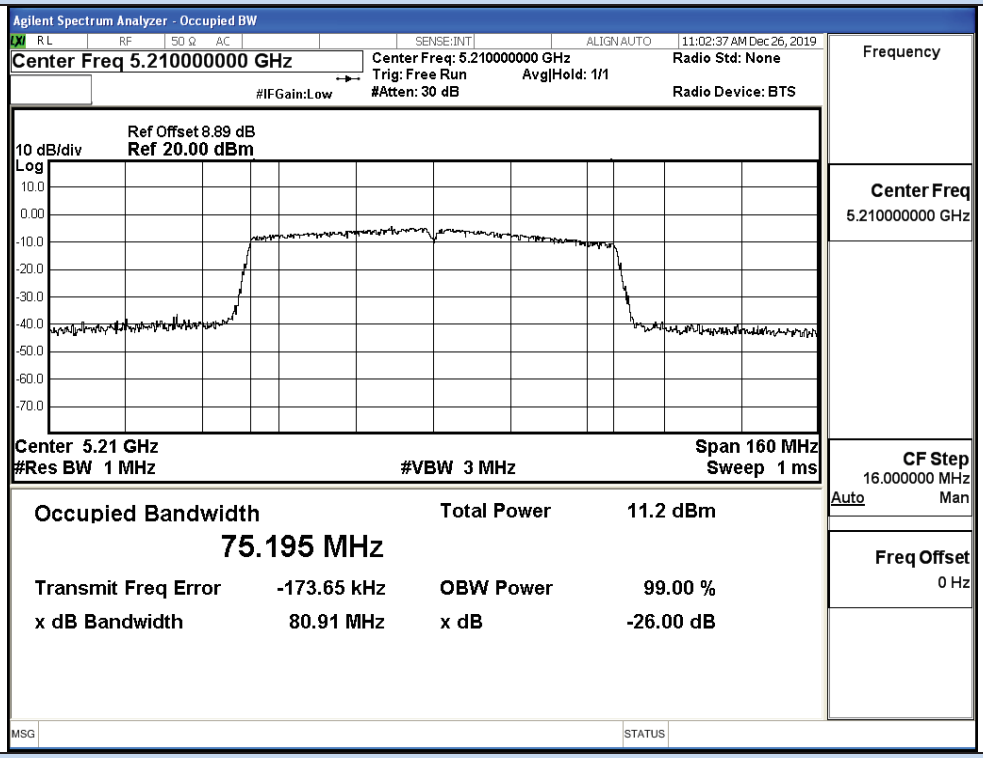

IEEE 802.11ac80 / Channel 42 / 5210MHz

D.5 Undesirable Emissions Measurement

Ant0

Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
11A	36	4500.0	-49.99	-3.38	0	47.24	Peak	68.20	Pass
		4500.0	-60.31	-3.38	0	36.92	Average	54.00	Pass
		5150.0	-42.89	-3.38	0	54.34	Peak	68.20	Pass
		5150.0	-54.59	-3.38	0	42.64	Average	54.00	Pass
	48	5350.0	-47.96	-3.38	0	49.27	Peak	68.20	Pass
		5350.0	-58.82	-3.38	0	38.41	Average	54.00	Pass
		5460.0	-49.04	-3.38	0	48.19	Peak	68.20	Pass
		5460.0	-59.13	-3.38	0	38.10	Average	54.00	Pass
11N20 SISO	36	4500.0	-50.70	-3.38	0	46.53	Peak	68.20	Pass
		4500.0	-60.37	-3.38	0	36.86	Average	54.00	Pass
		5150.0	-44.98	-3.38	0	52.24	Peak	68.20	Pass
		5150.0	-55.68	-3.38	0	41.54	Average	54.00	Pass
	48	5350.0	-47.32	-3.38	0	49.91	Peak	68.20	Pass
		5350.0	-58.72	-3.38	0	38.51	Average	54.00	Pass
		5460.0	-48.12	-3.38	0	49.11	Peak	68.20	Pass
		5460.0	-59.20	-3.38	0	38.03	Average	54.00	Pass
11N40 SISO	38	4500.0	-50.40	-3.38	0	46.83	Peak	68.20	Pass
		4500.0	-60.38	-3.38	0	36.85	Average	54.00	Pass
		5150.0	-36.25	-3.38	0	60.98	Peak	68.20	Pass
		5150.0	-51.09	-3.38	0	46.14	Average	54.00	Pass
	46	5350.0	-48.00	-3.38	0	49.23	Peak	68.20	Pass
		5350.0	-58.49	-3.38	0	38.74	Average	54.00	Pass
		5460.0	-48.51	-3.38	0	48.72	Peak	68.20	Pass
		5460.0	-58.95	-3.38	0	38.28	Average	54.00	Pass
11AC20 SISO	36	4500.0	-50.18	-3.38	0	47.05	Peak	68.20	Pass
		4500.0	-60.33	-3.38	0	36.90	Average	54.00	Pass
		5150.0	-44.65	-3.38	0	52.58	Peak	68.20	Pass
		5150.0	-55.55	-3.38	0	41.67	Average	54.00	Pass
	48	4500.0	-50.18	-3.38	0	47.05	Peak	68.20	Pass
		4500.0	-60.33	-3.38	0	36.90	Average	54.00	Pass
		5150.0	-44.65	-3.38	0	52.58	Peak	68.20	Pass
		5150.0	-55.55	-3.38	0	41.67	Average	54.00	Pass
11AC40 SISO	38	4500.0	-50.83	-3.38	0	46.40	Peak	68.20	Pass
		4500.0	-60.37	-3.38	0	36.86	Average	54.00	Pass
		5150.0	-41.99	-3.38	0	55.24	Peak	68.20	Pass
		5150.0	-53.92	-3.38	0	43.31	Average	54.00	Pass
	46	5350.0	-48.94	-3.38	0	48.29	Peak	68.20	Pass
		5350.0	-58.58	-3.38	0	38.65	Average	54.00	Pass
		5460.0	-47.90	-3.38	0	49.33	Peak	68.20	Pass
		5460.0	-58.97	-3.38	0	38.26	Average	54.00	Pass
11AC80 SISO	42	4500.0	-49.11	-3.38	0	48.12	Peak	68.20	Pass
		5150.0	-58.07	-3.38	0	39.16	Average	54.00	Pass
		4500.0	-48.06	-3.38	0	49.17	Peak	68.20	Pass
		5150.0	-58.48	-3.38	0	38.75	Average	54.00	Pass
		5350.0	-49.11	-3.38	0	48.12	Peak	68.20	Pass
		5460.0	-58.07	-3.38	0	39.16	Average	54.00	Pass
		5350.0	-48.06	-3.38	0	49.17	Peak	68.20	Pass
		5460.0	-58.48	-3.38	0	38.75	Average	54.00	Pass

E [dBuV/m]= Power [dBm] + Gain + Ground Factor + 95.26

The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater

Undesirable Emissions Measurement

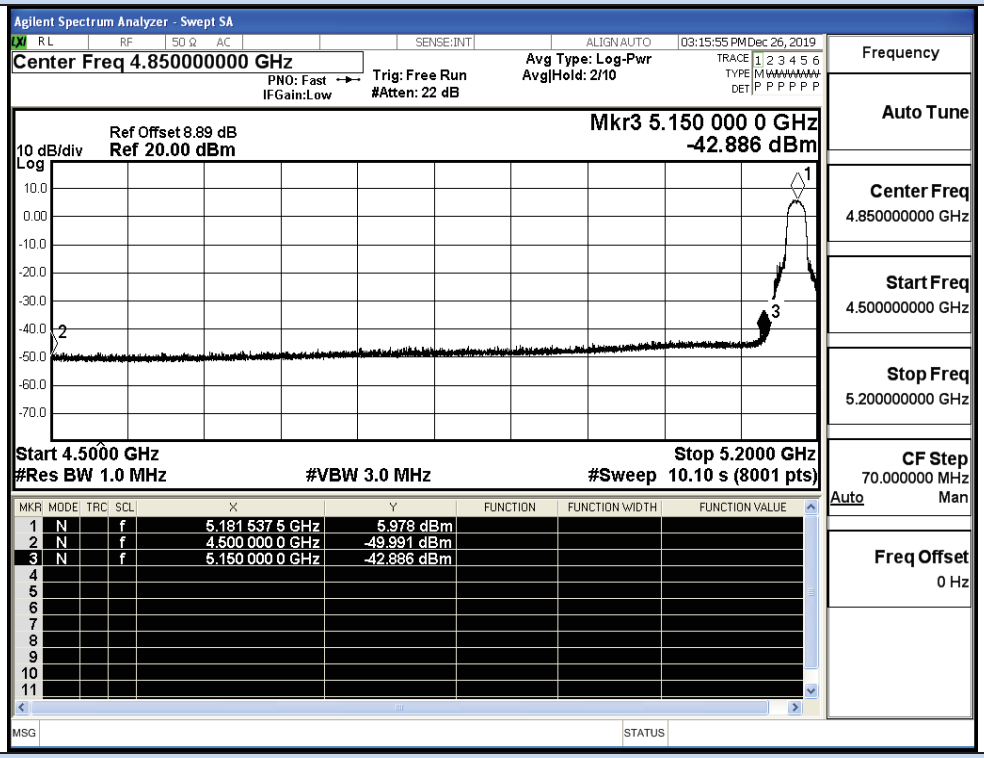

IEEE 802.11a / Channel 36 / 5180MHz / Peak

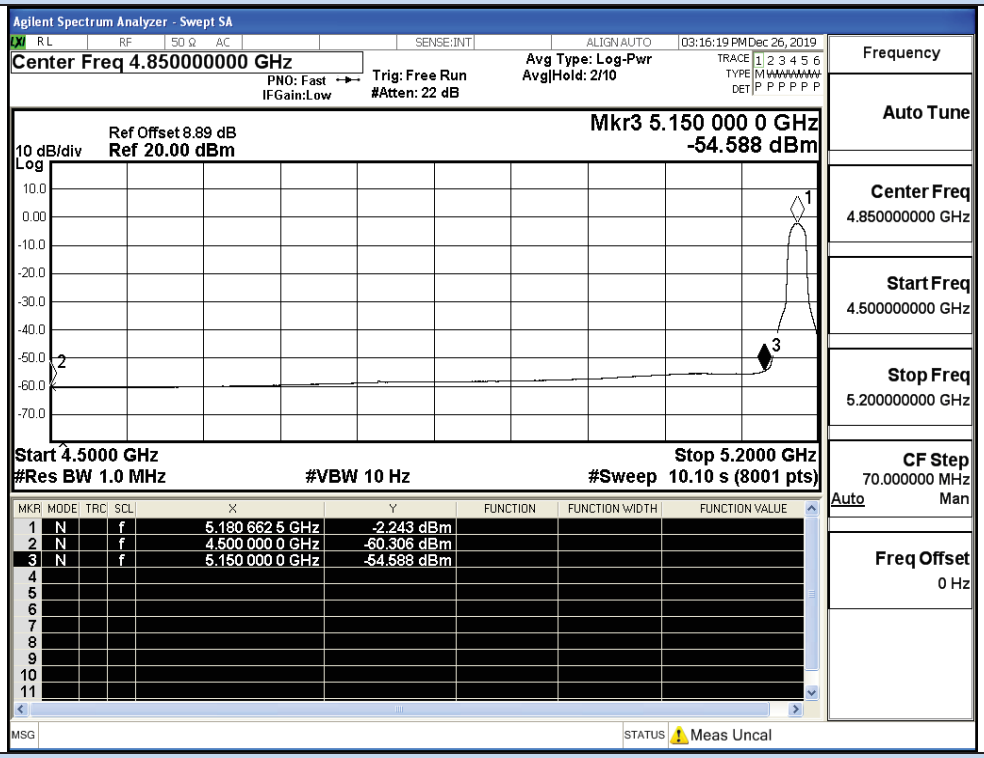

IEEE 802.11a / Channel 36 / 5180MHz / Average

Undesirable Emissions Measurement

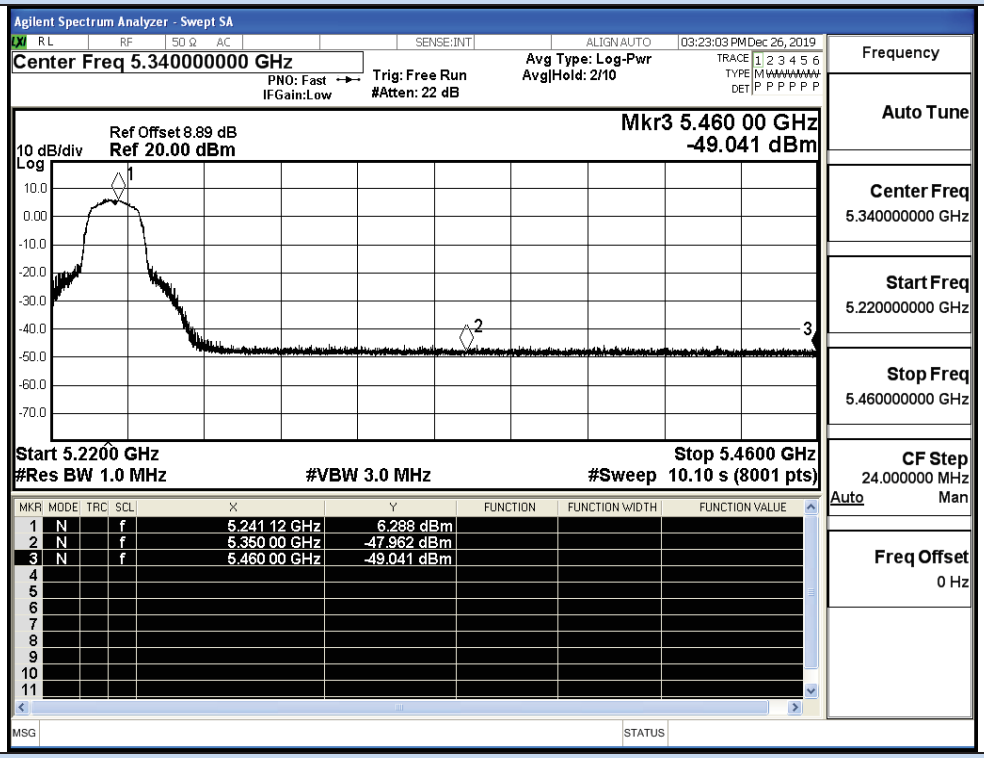

IEEE 802.11a / Channel 48 / 5240MHz / Peak

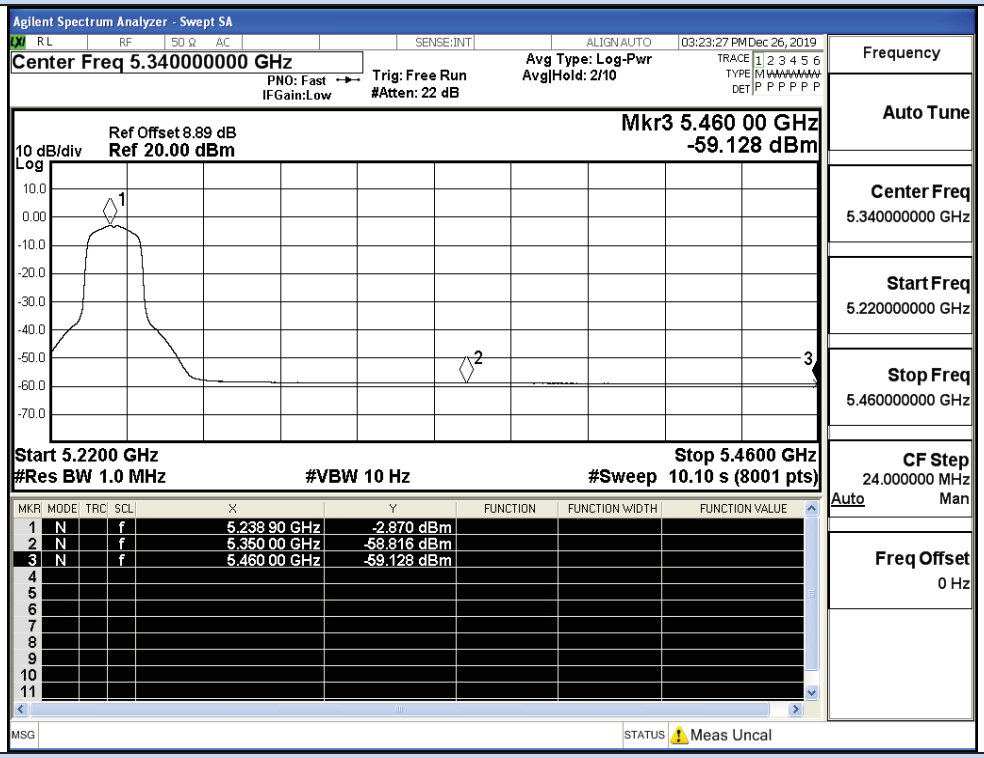

IEEE 802.11a / Channel 48 / 5240MHz / Average

Undesirable Emissions Measurement

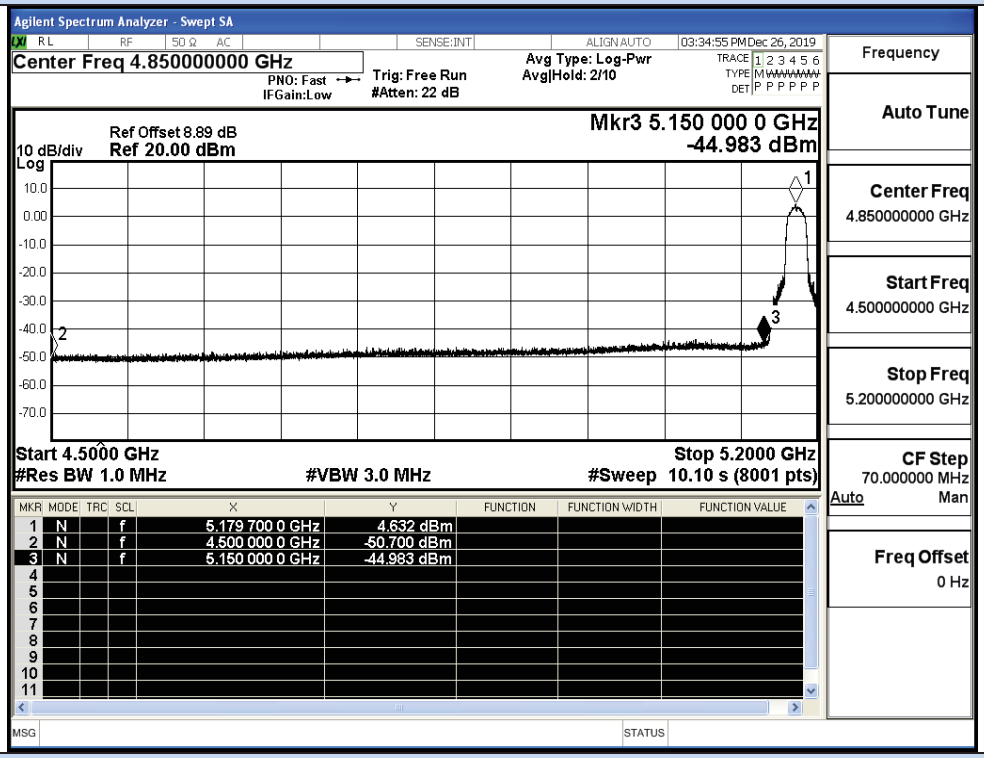

IEEE 802.11n20 / Channel 36 / 5180MHz / Peak

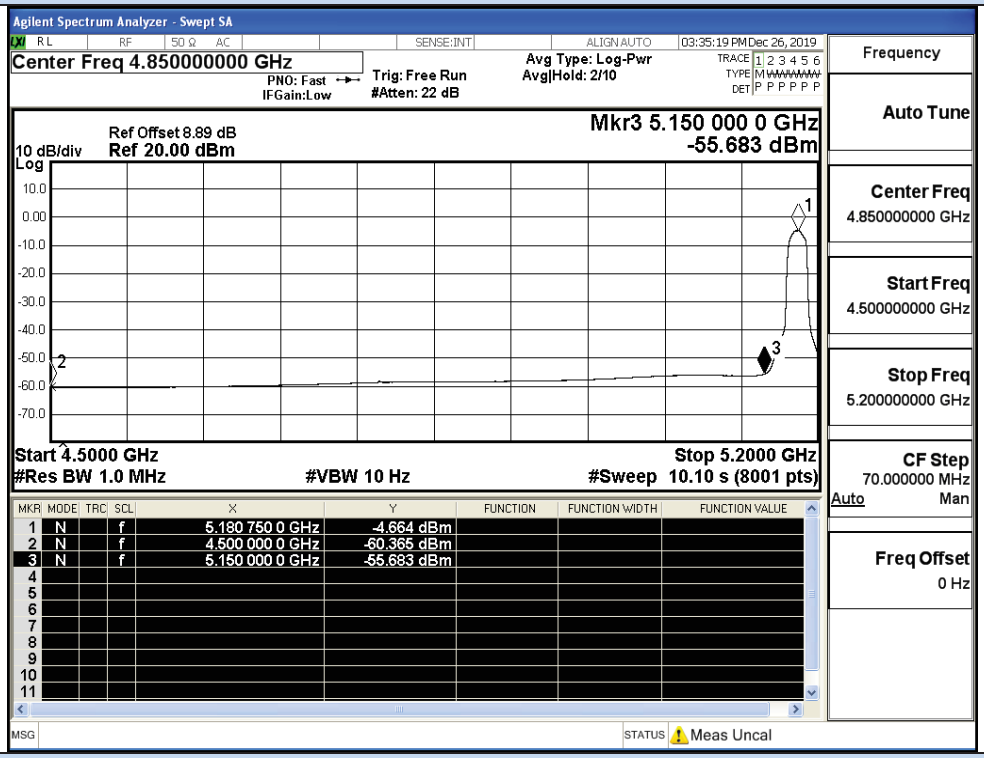

IEEE 802.11n20 / Channel 36 / 5180MHz / Average

Undesirable Emissions Measurement

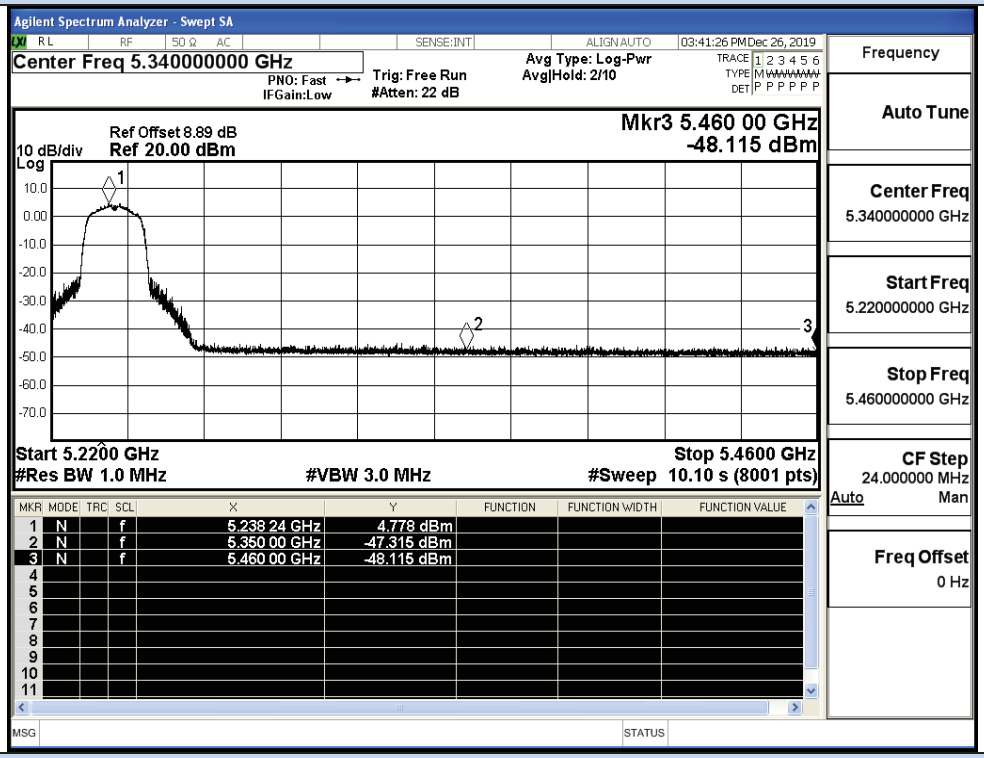

IEEE 802.11n20 / Channel 48 / 5240MHz / Peak

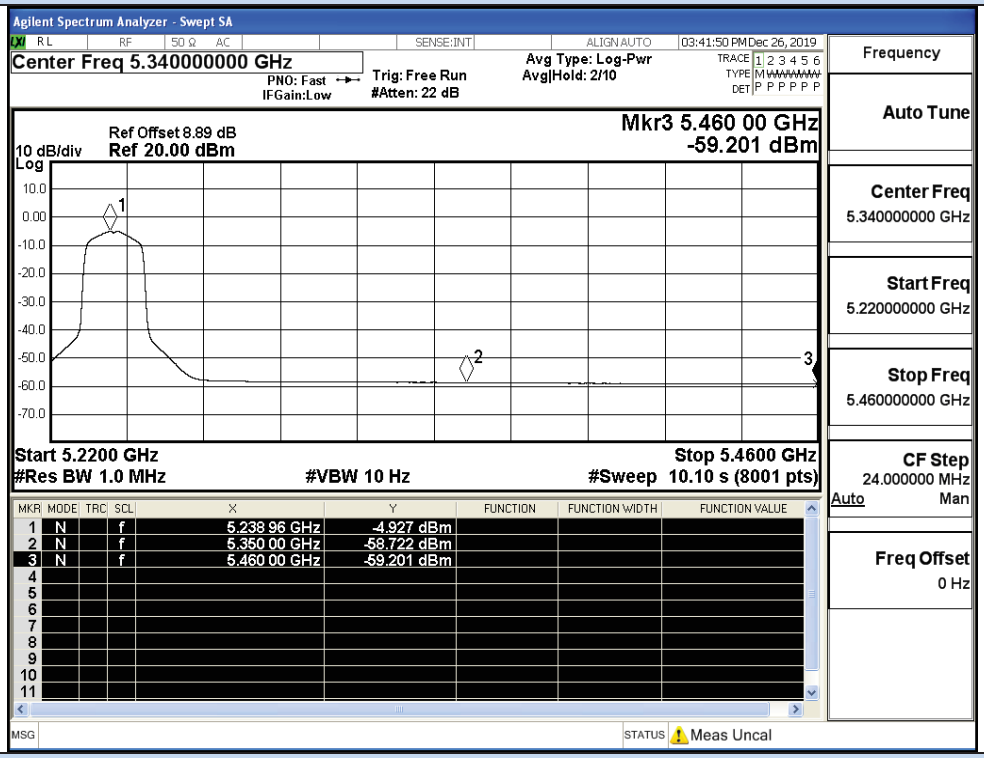

IEEE 802.11n20 / Channel 48 / 5240MHz / Average

Undesirable Emissions Measurement

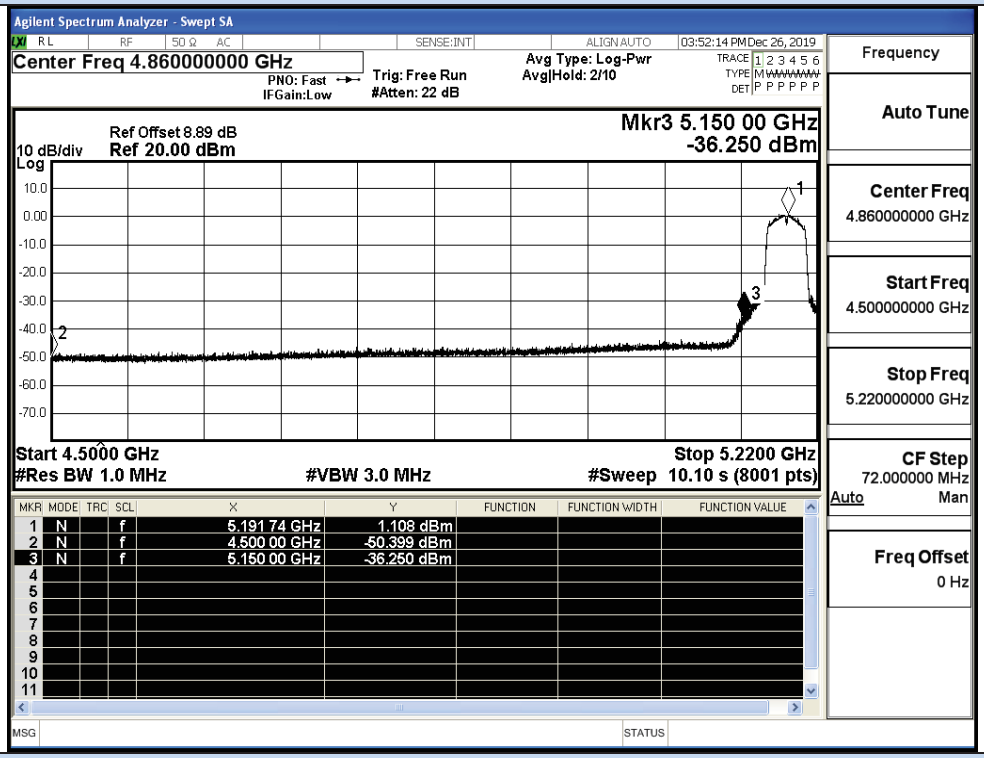

IEEE 802.11n40 / Channel 38 / 5190MHz / Peak

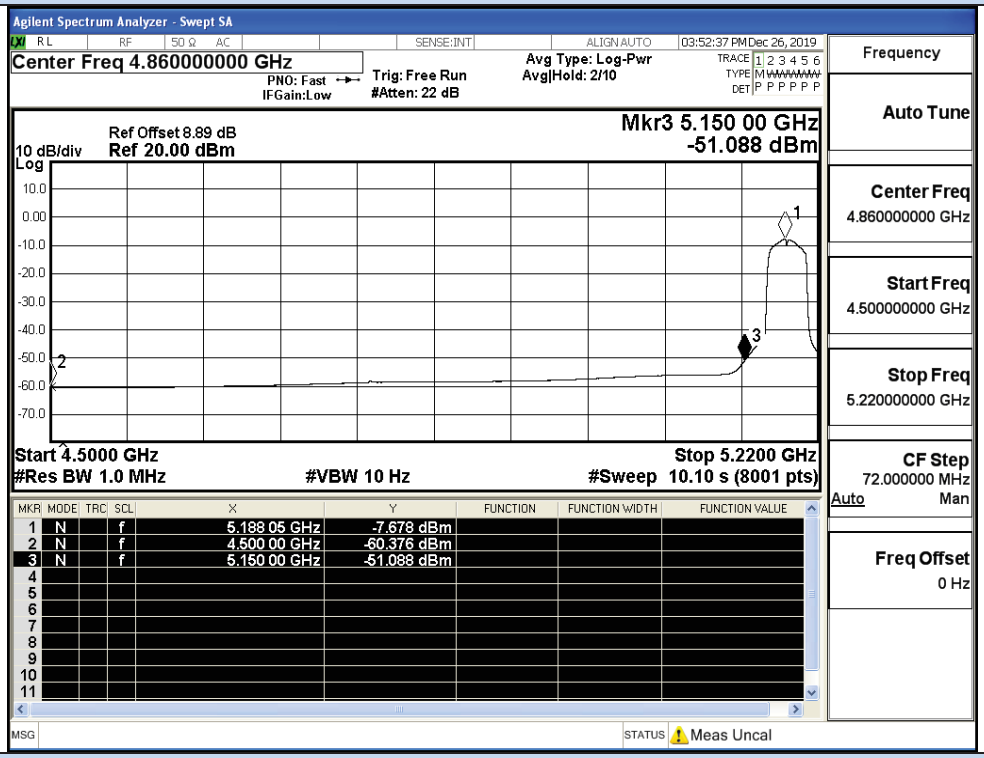

IEEE 802.11n40 / Channel 38 / 5190MHz / Average

Undesirable Emissions Measurement

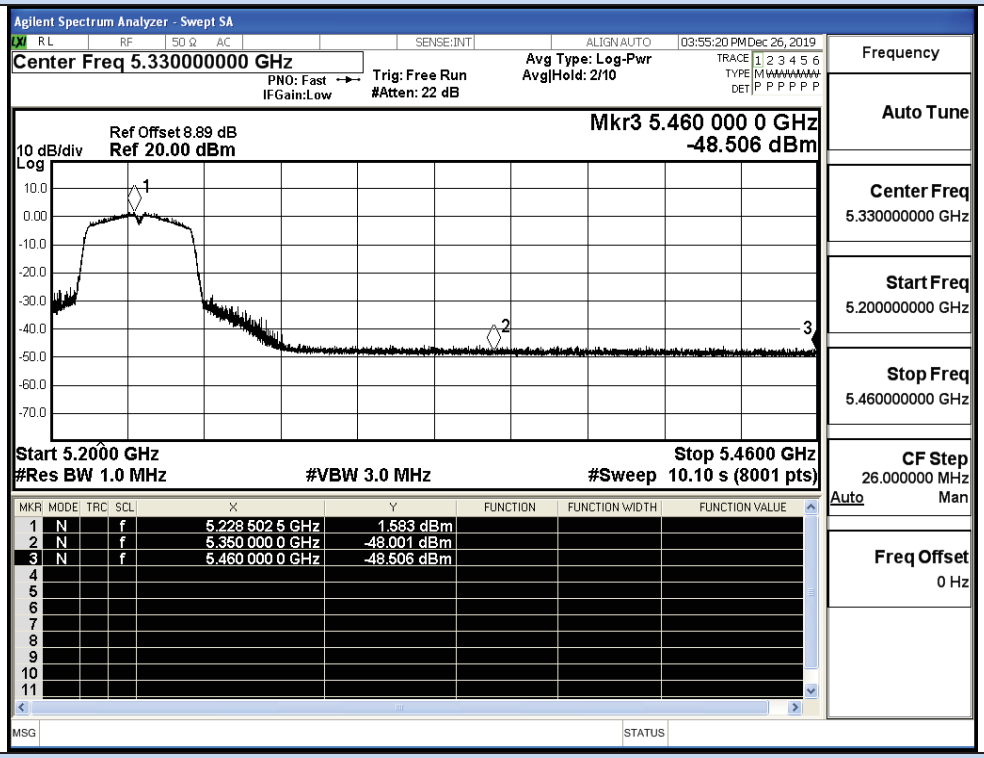

IEEE 802.11n40 / Channel 46 / 5230MHz / Peak

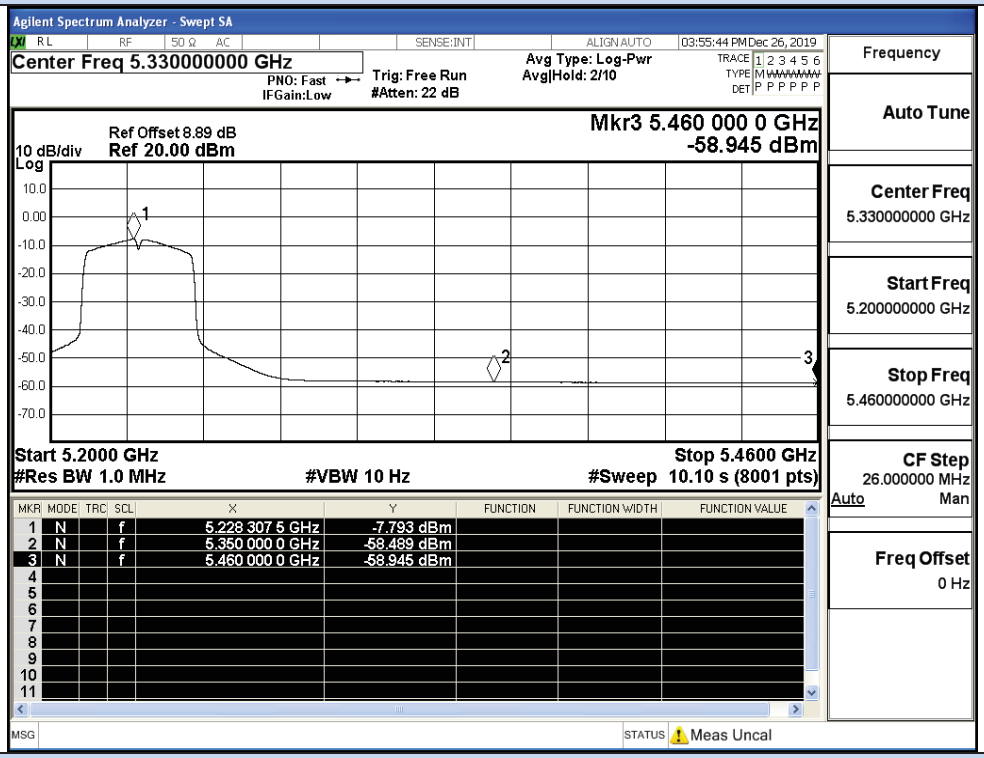

IEEE 802.11n40 / Channel 46 / 5230MHz / Average

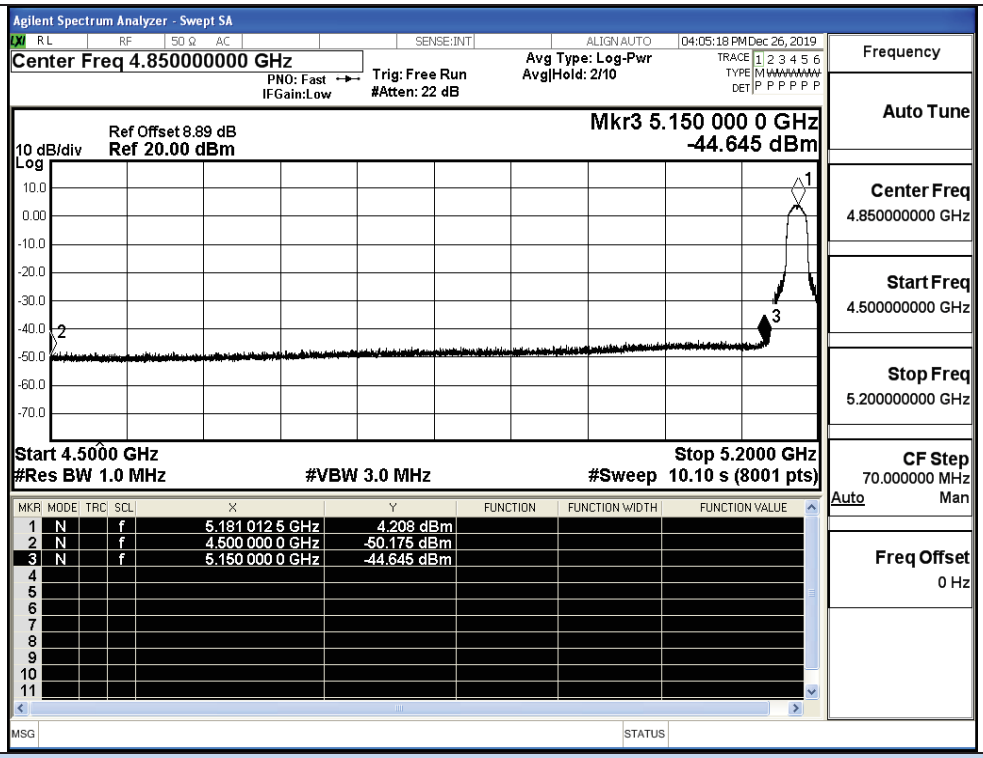

IEEE 802.11ac20 / Channel 36 / 5180MHz / Peak

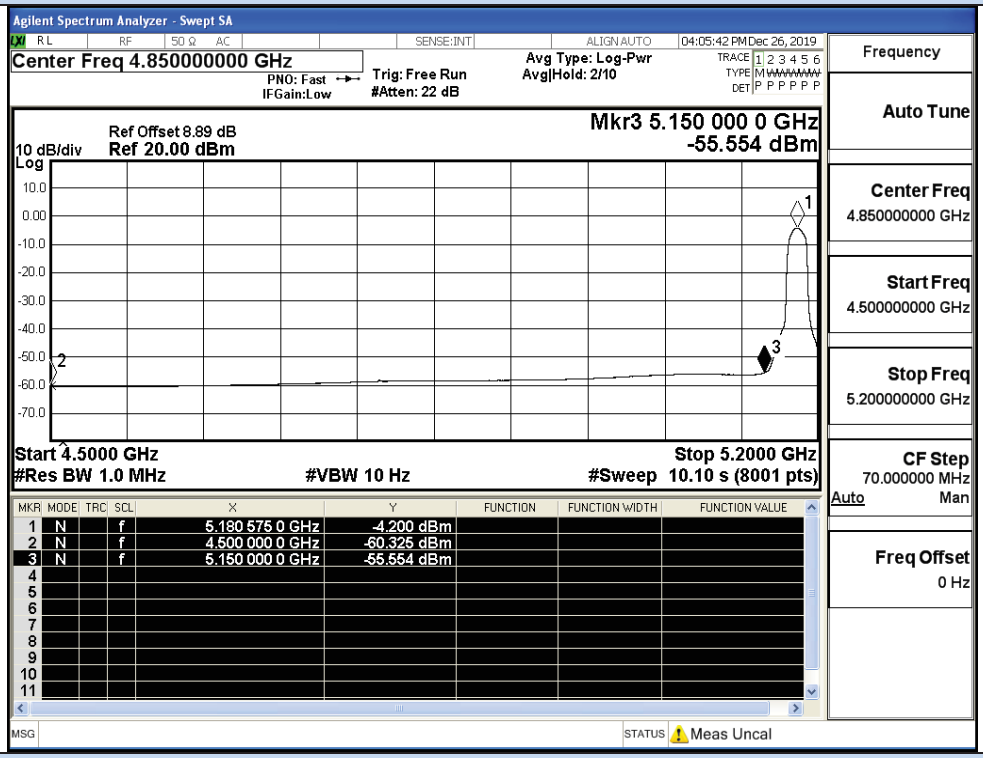

IEEE 802.11ac20 / Channel 36 / 5180MHz / Average

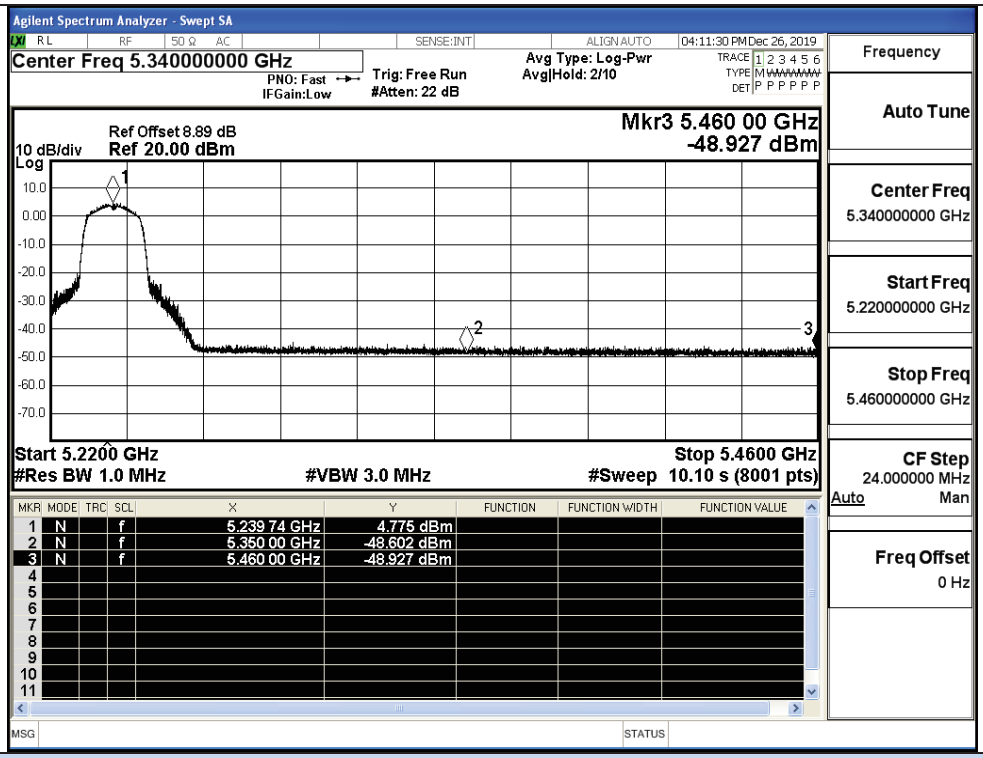

IEEE 802.11ac20 / Channel 48 / 5240MHz / Peak

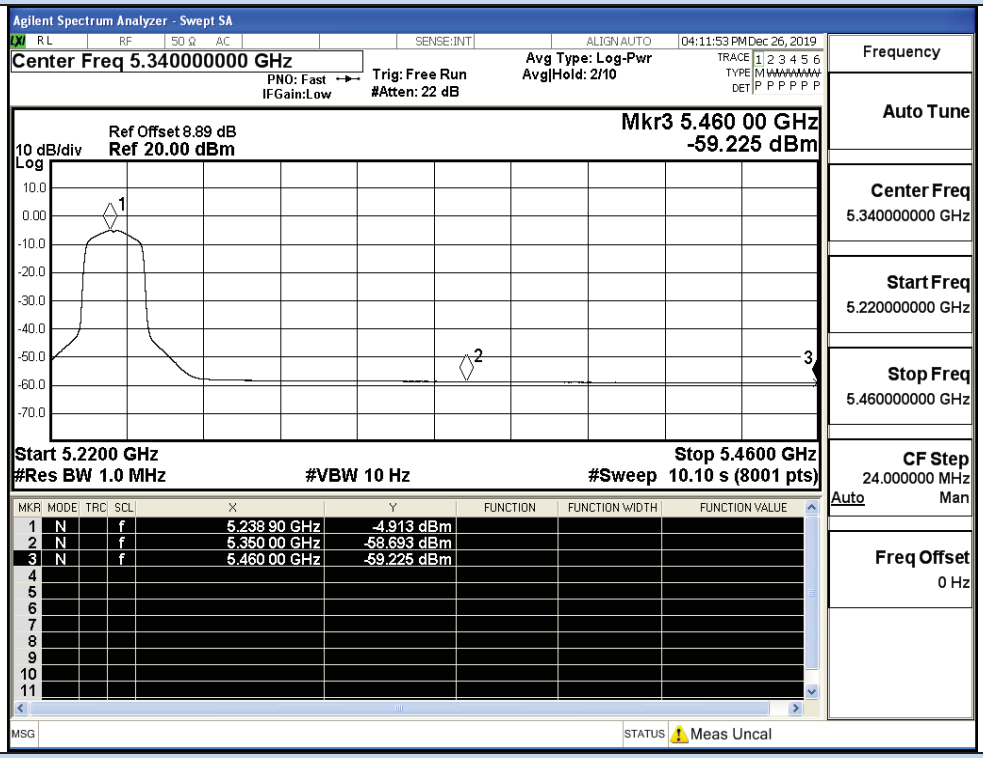

IEEE 802.11ac20 / Channel 48 / 5240MHz / Average

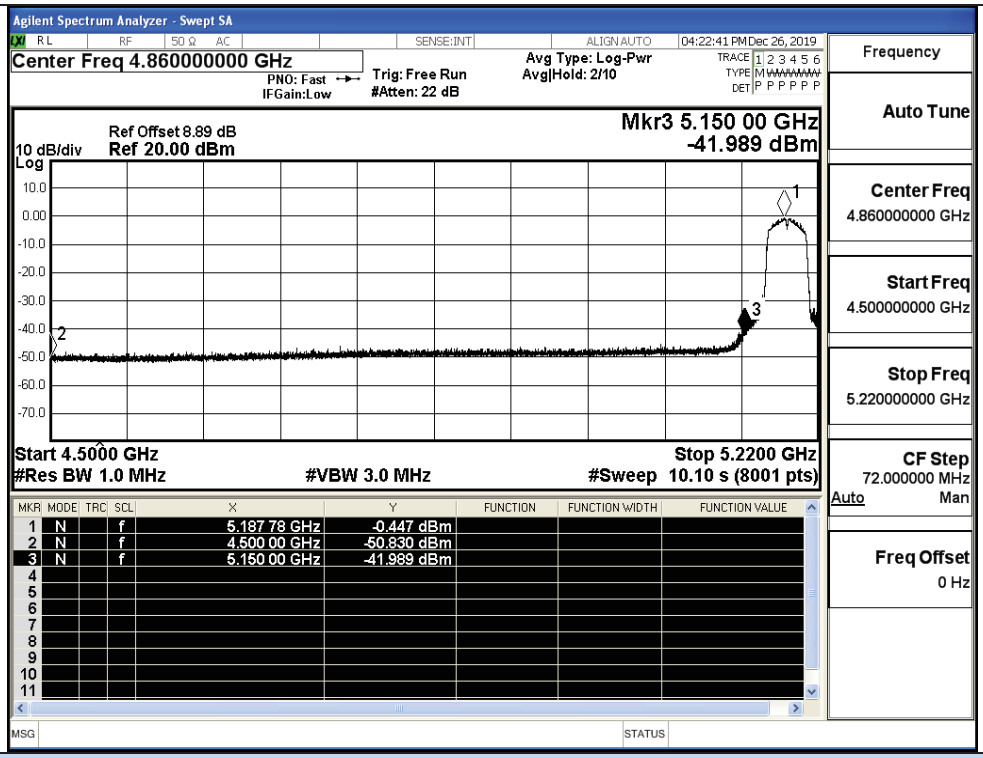

IEEE 802.11ac40 / Channel 38/ 5190MHz / Peak

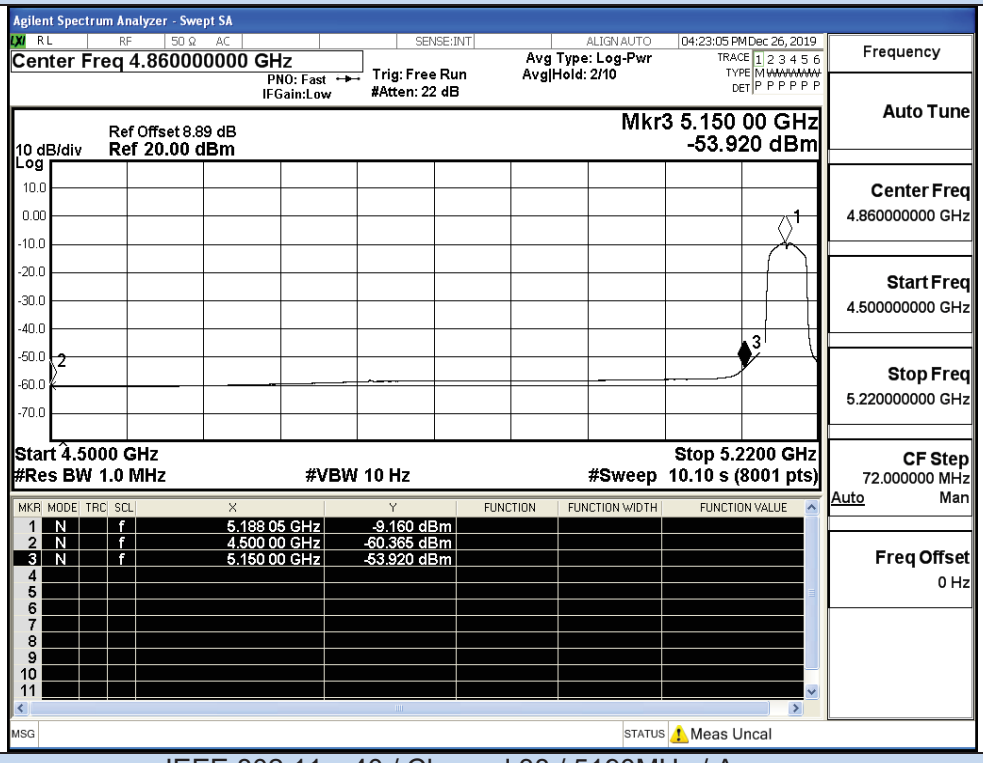

IEEE 802.11ac40 / Channel 38 / 5190MHz / Average

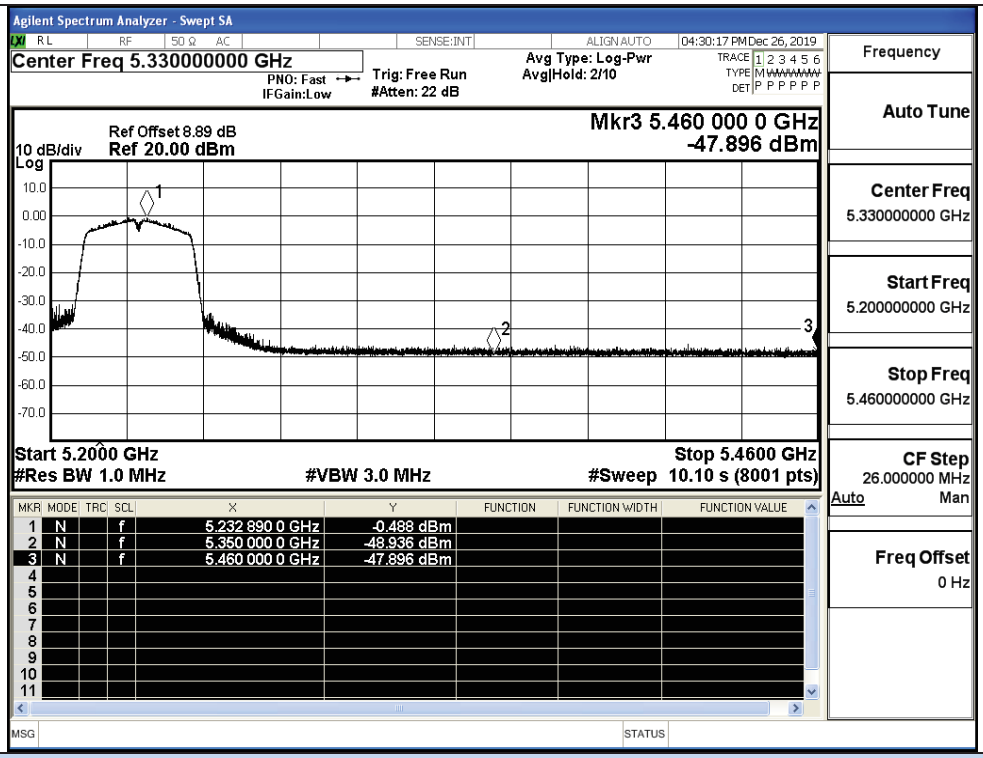

IEEE 802.11ac40 / Channel 46/ 5230MHz / Peak

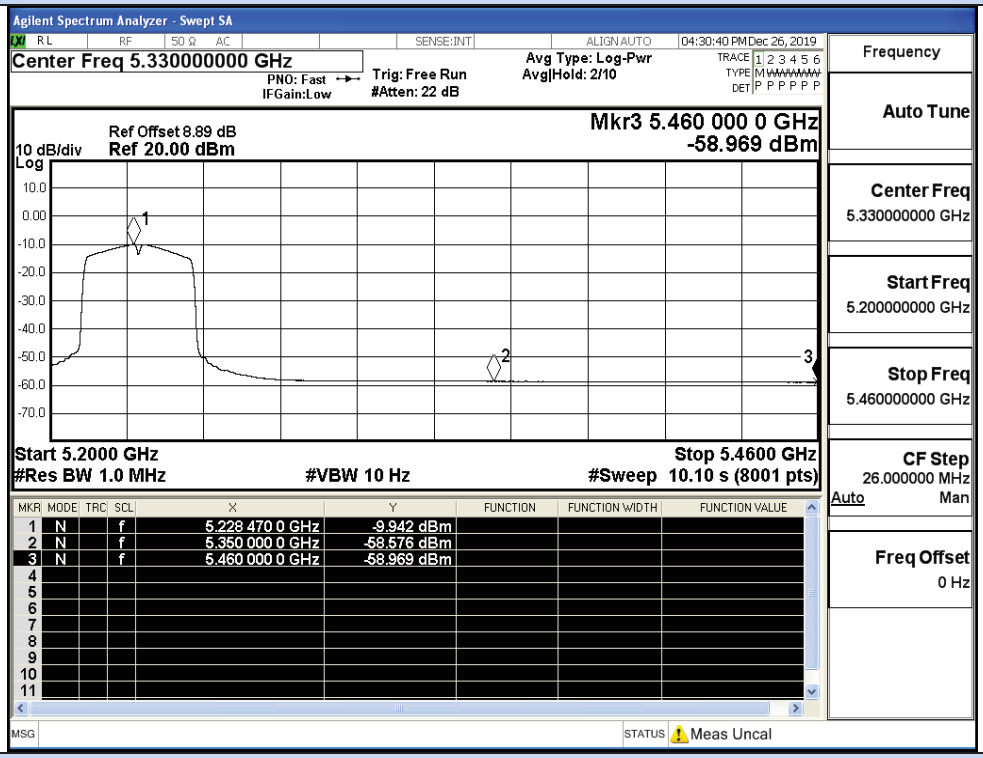

IEEE 802.11ac40 / Channel 46 / 5230MHz / Average

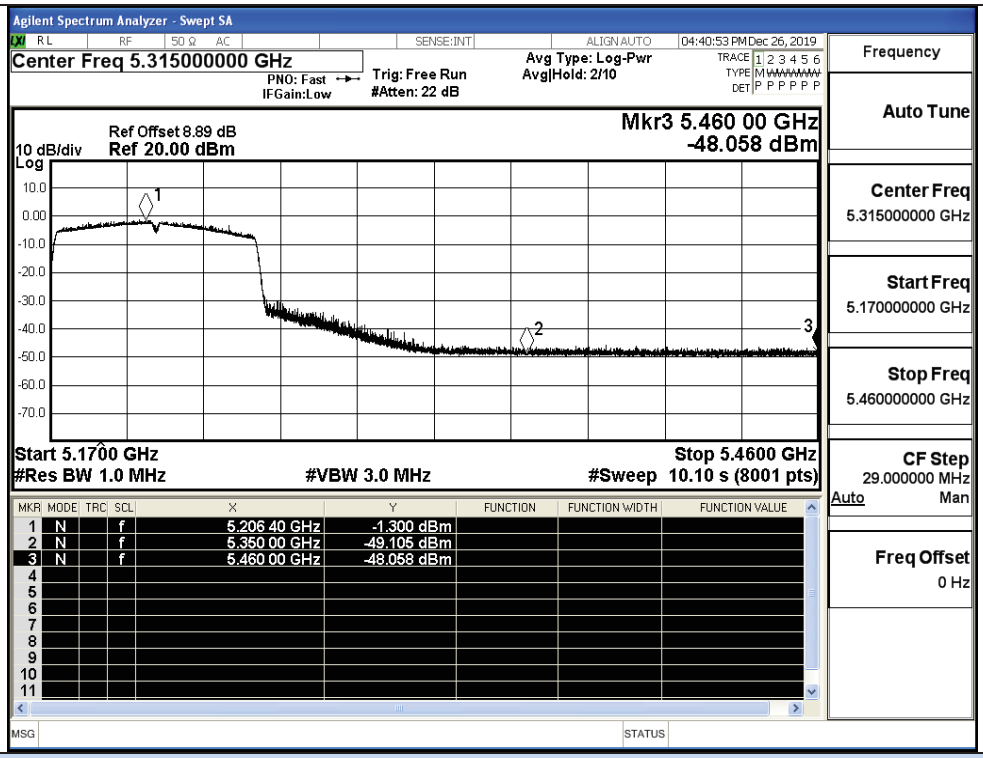

IEEE 802.11ac80 / Channel 42 / 5210MHz / Peak

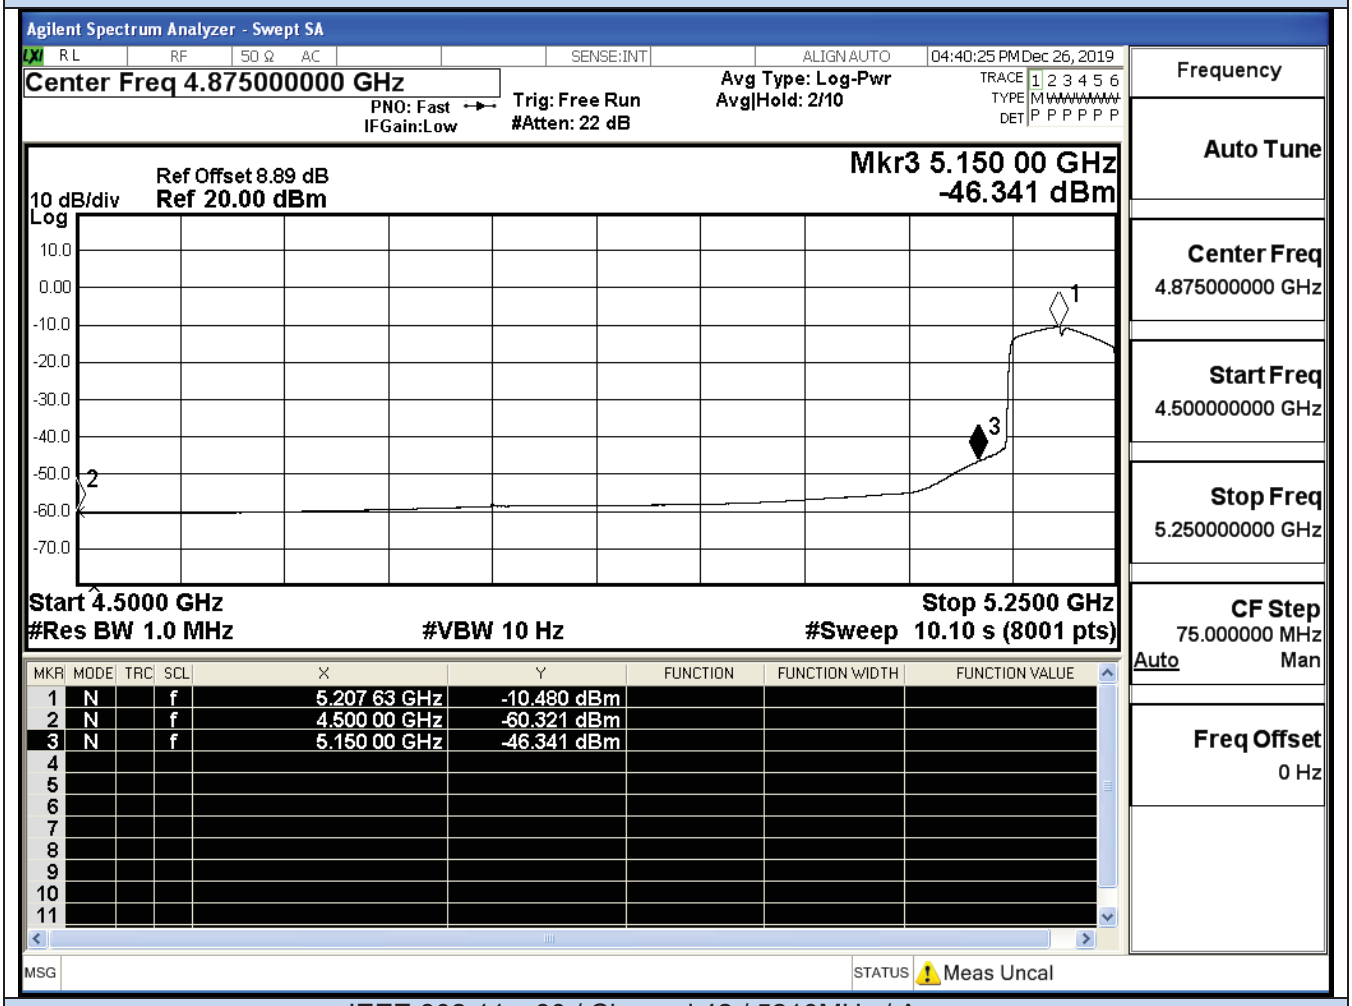

IEEE 802.11ac80 / Channel 42 / 5210MHz / Average

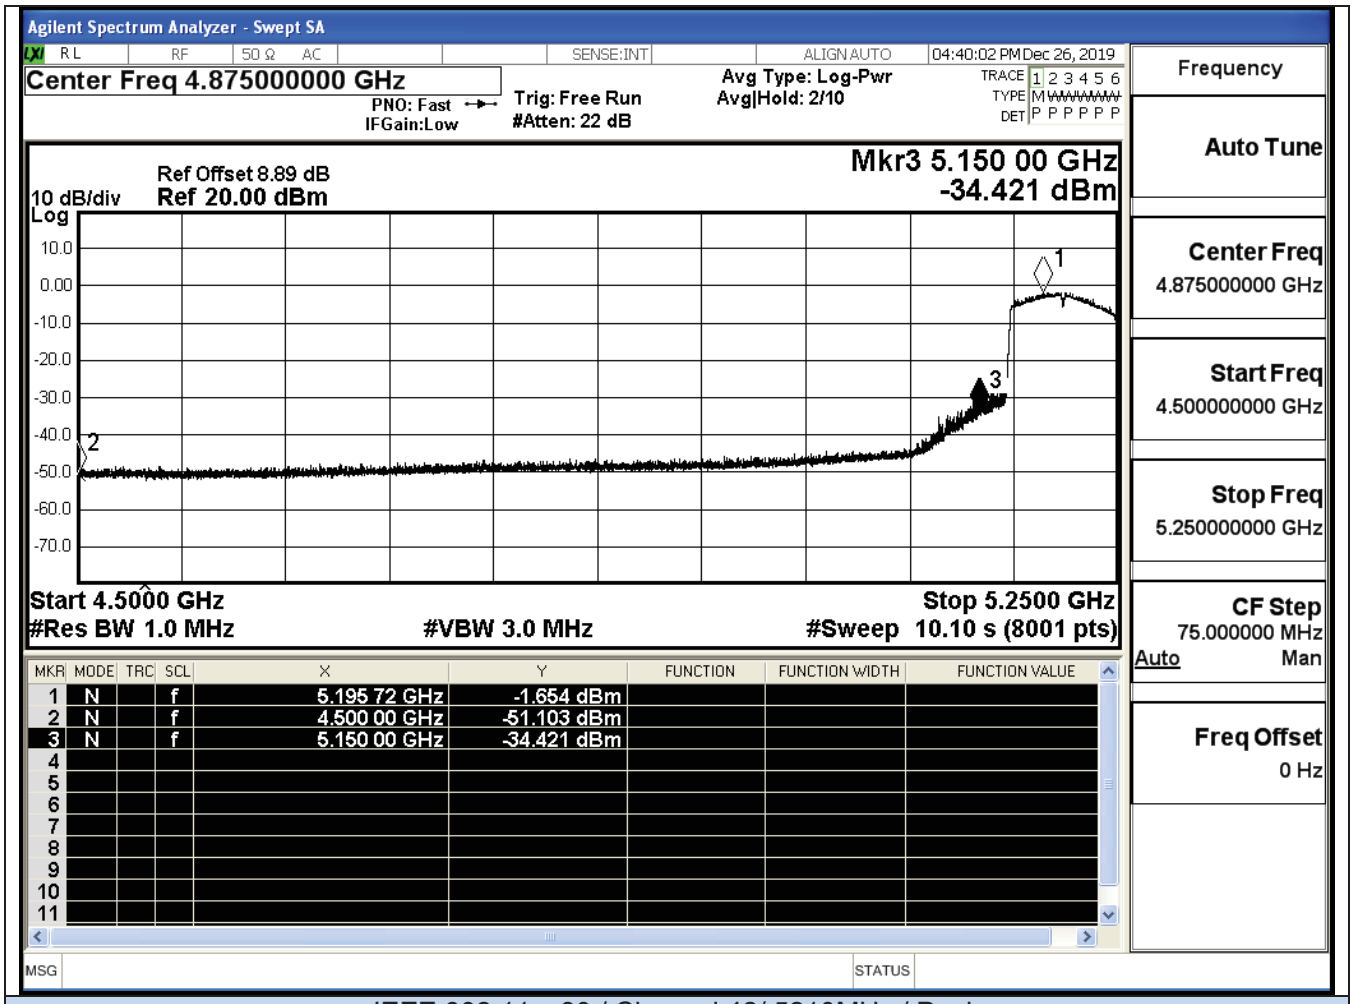

IEEE 802.11ac80 / Channel 42/ 5210MHz / Peak

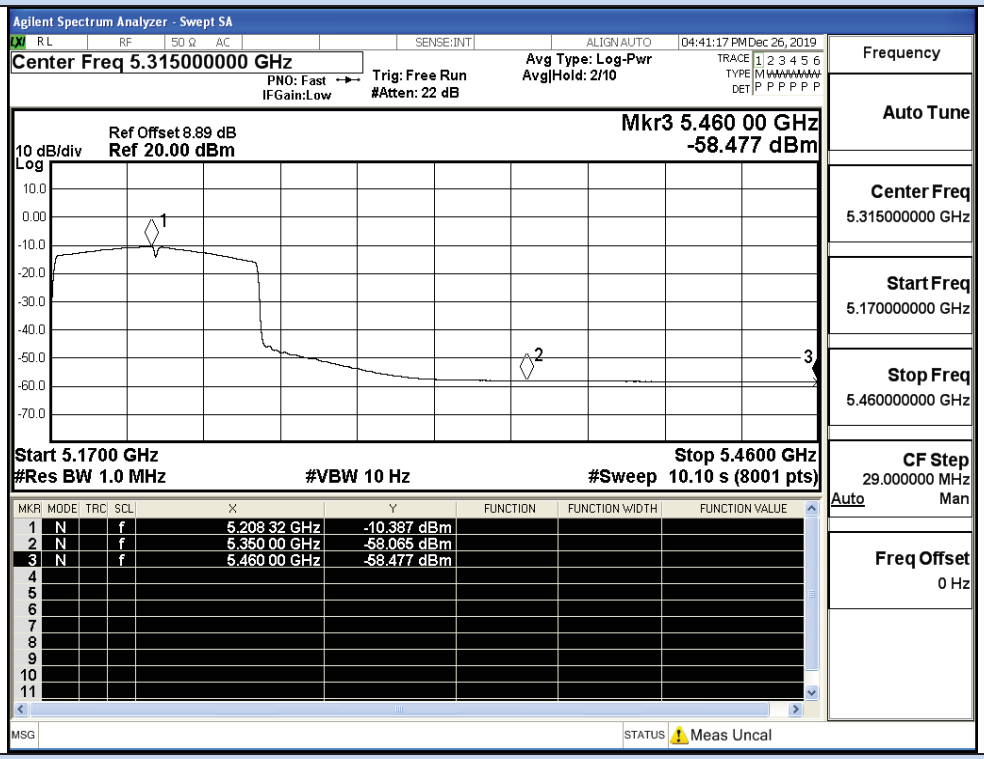

IEEE 802.11ac80 / Channel 42 / 5210MHz / Average

Ant1

Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
11A	36	4500.0	-50.28	-3.38	0	46.98	Peak	68.20	Pass
		4500.0	-60.34	-3.38	0	36.92	Average	54.00	Pass
		5150.0	-45.65	-3.38	0	51.61	Peak	68.20	Pass
		5150.0	-55.55	-3.38	0	41.71	Average	54.00	Pass
	48	5350.0	-48.80	-3.38	0	48.46	Peak	68.20	Pass
		5350.0	-58.75	-3.38	0	38.51	Average	54.00	Pass
		5460.0	-48.80	-3.38	0	48.46	Peak	68.20	Pass
		5460.0	-59.23	-3.38	0	38.03	Average	54.00	Pass
11N20 SISO	36	4500.0	-50.12	-3.38	0	47.14	Peak	68.20	Pass
		4500.0	-60.35	-3.38	0	36.91	Average	54.00	Pass
		5150.0	-45.24	-3.38	0	52.02	Peak	68.20	Pass
		5150.0	-55.67	-3.38	0	41.59	Average	54.00	Pass
	48	5350.0	-48.23	-3.38	0	49.03	Peak	68.20	Pass
		5350.0	-58.76	-3.38	0	38.50	Average	54.00	Pass
		5460.0	-47.85	-3.38	0	49.41	Peak	68.20	Pass
		5460.0	-59.24	-3.38	0	38.02	Average	54.00	Pass
11N40 SISO	38	4500.0	-50.72	-3.38	0	46.54	Peak	68.20	Pass
		4500.0	-60.32	-3.38	0	36.94	Average	54.00	Pass
		5150.0	-35.88	-3.38	0	61.38	Peak	68.20	Pass
		5150.0	-49.85	-3.38	0	47.41	Average	54.00	Pass
	46	5350.0	-48.47	-3.38	0	48.79	Peak	68.20	Pass
		5350.0	-58.61	-3.38	0	38.65	Average	54.00	Pass
		5460.0	-48.17	-3.38	0	49.09	Peak	68.20	Pass
		5460.0	-58.96	-3.38	0	38.30	Average	54.00	Pass
11AC20 SISO	36	4500.0	-50.80	-3.38	0	-48.80	Peak	68.20	Pass
		4500.0	-60.35	-3.38	0	-58.35	Average	54.00	Pass
		5150.0	-44.22	-3.38	0	-42.22	Peak	68.20	Pass
		5150.0	-54.61	-3.38	0	-52.61	Average	54.00	Pass
	48	4500.0	-50.80	-3.38	0	-48.80	Peak	68.20	Pass
		4500.0	-60.35	-3.38	0	-58.35	Average	54.00	Pass
		5150.0	-44.22	-3.38	0	-42.22	Peak	68.20	Pass
		5150.0	-54.61	-3.38	0	-52.61	Average	54.00	Pass
11AC40 SISO	38	4500.0	-49.03	-3.38	0	-47.03	Peak	68.20	Pass
		4500.0	-60.37	-3.38	0	-58.37	Average	54.00	Pass
		5150.0	-43.51	-3.38	0	-41.51	Peak	68.20	Pass
		5150.0	-55.53	-3.38	0	-53.53	Average	54.00	Pass
	46	5350.0	-48.08	-3.38	0	-46.08	Peak	68.20	Pass
		5350.0	-59.01	-3.38	0	-57.01	Average	54.00	Pass
		5460.0	-48.77	-3.38	0	-46.77	Peak	68.20	Pass
		5460.0	-59.13	-3.38	0	-57.13	Average	54.00	Pass
11AC80 SISO	42	4500.0	-48.60	-3.38	0	-46.60	Peak	68.20	Pass
		5150.0	-58.54	-3.38	0	-56.54	Average	54.00	Pass
		4500.0	-49.82	-3.38	0	-47.82	Peak	68.20	Pass
		5150.0	-58.65	-3.38	0	-56.65	Average	54.00	Pass
		5350.0	-48.60	-3.38	0	-46.60	Peak	68.20	Pass
		5460.0	-58.54	-3.38	0	-56.54	Average	54.00	Pass
		5350.0	-49.82	-3.38	0	-47.82	Peak	68.20	Pass
		5460.0	-58.65	-3.38	0	-56.65	Average	54.00	Pass

E [dBuV/m]= Power [dBm] + Gain + Ground Factor + 95.26

The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater

Undesirable Emissions Measurement

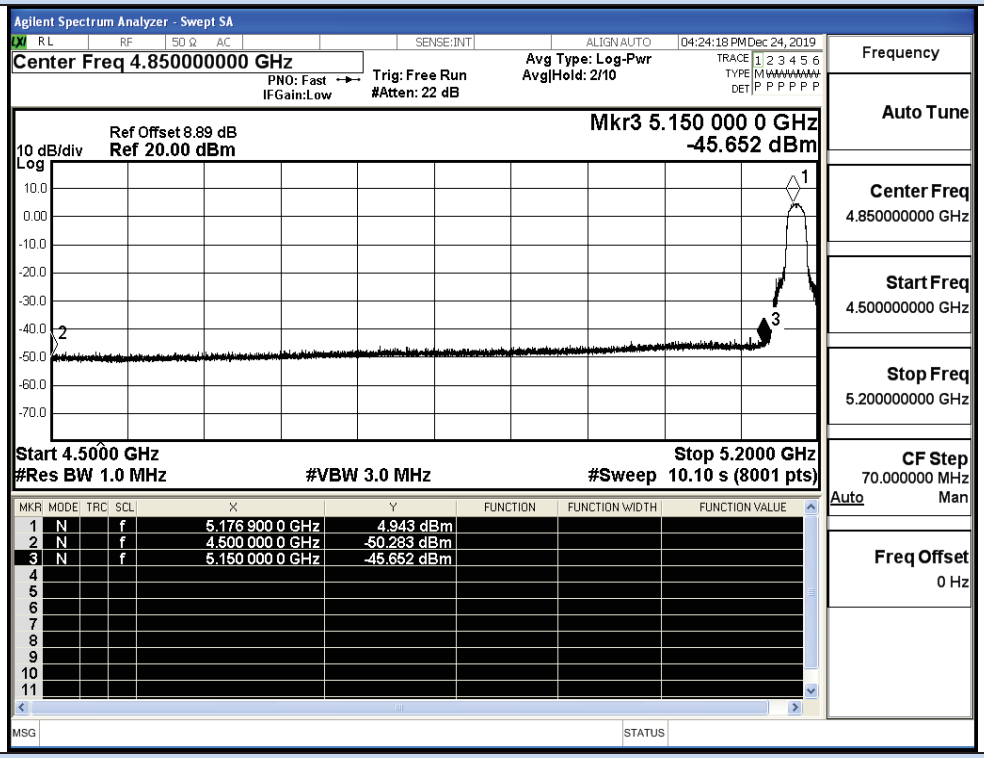

IEEE 802.11a / Channel 36 / 5180MHz / Peak

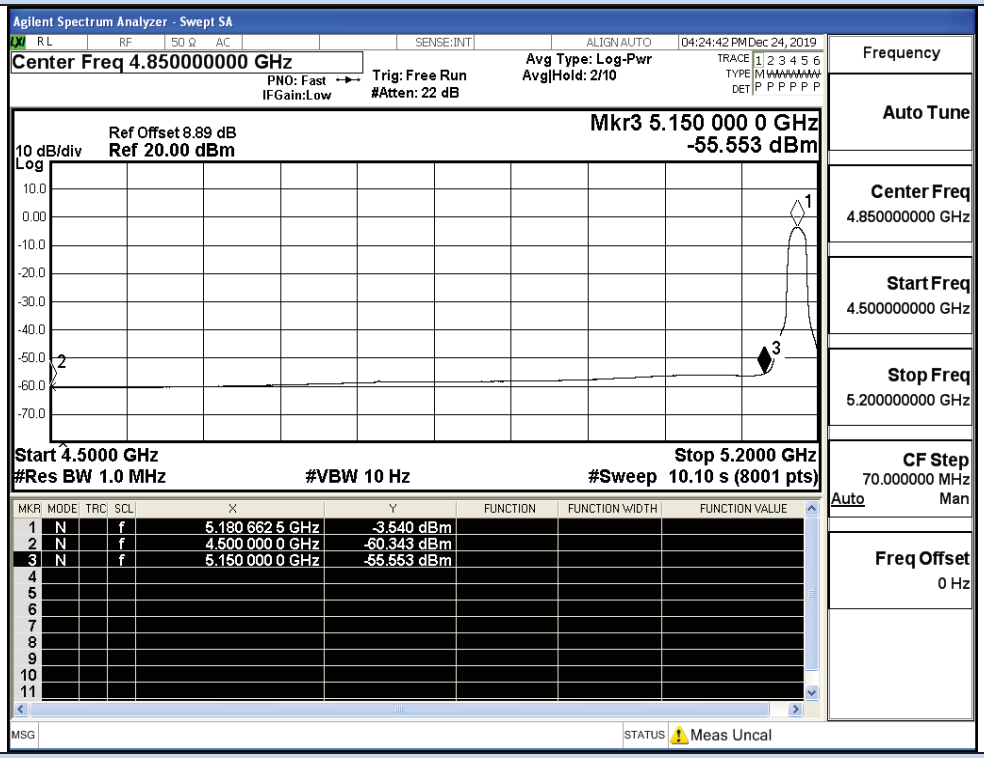

IEEE 802.11a / Channel 36 / 5180MHz / Average

Undesirable Emissions Measurement

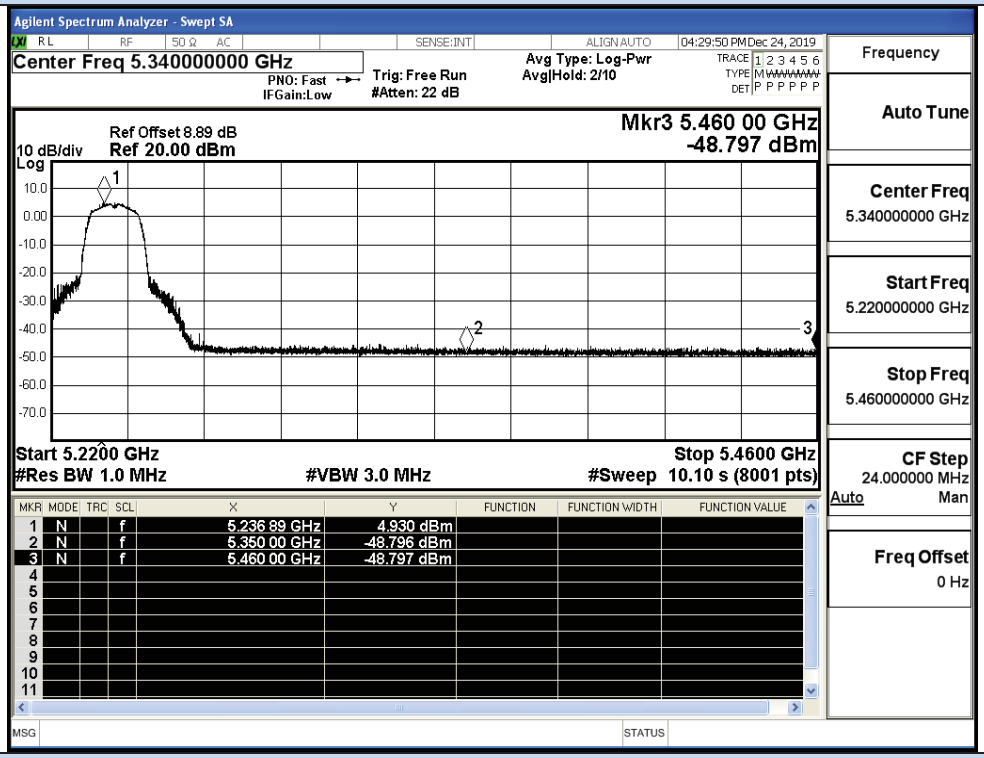

IEEE 802.11a / Channel 48 / 5240MHz / Peak

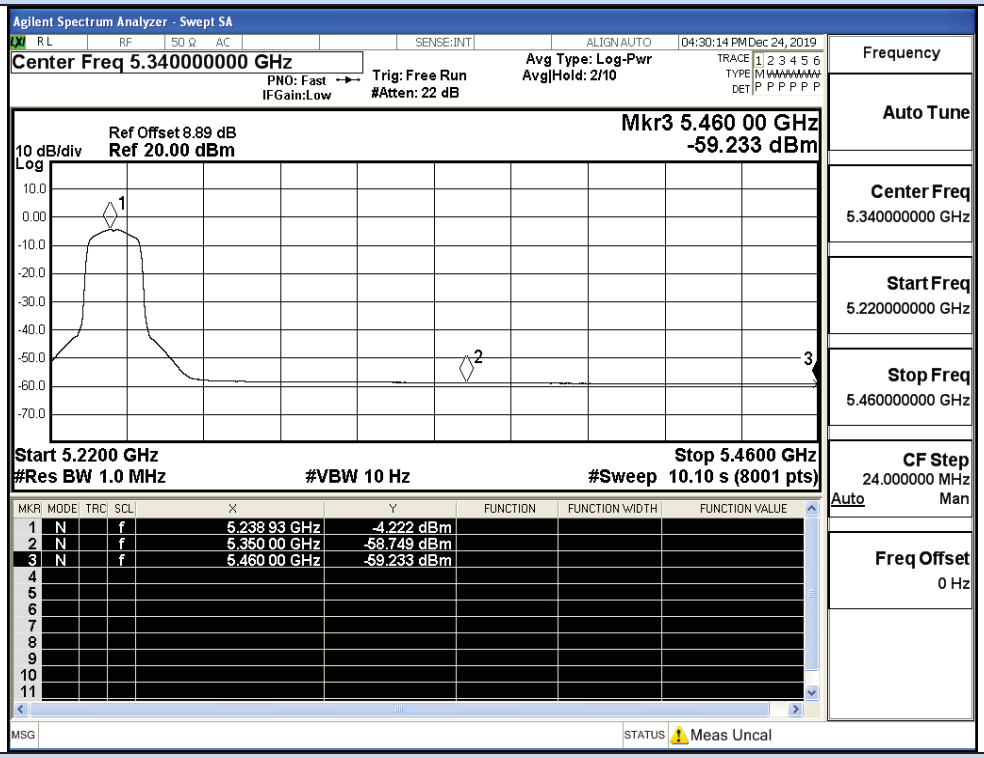

IEEE 802.11a / Channel 48 / 5240MHz / Average

Undesirable Emissions Measurement

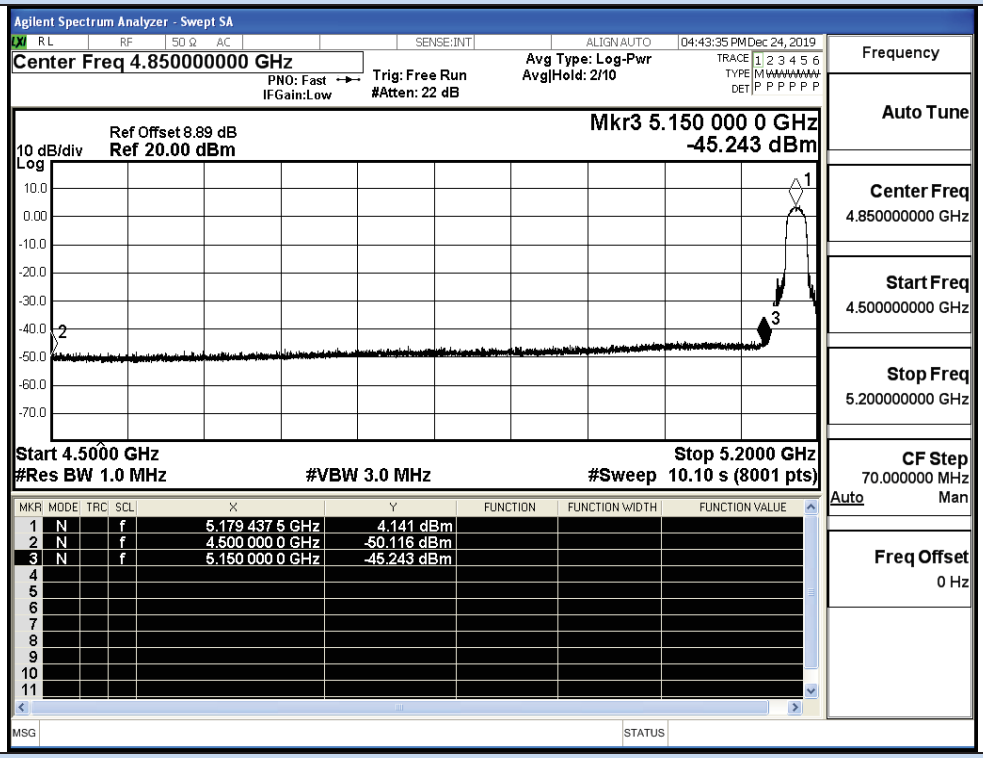

IEEE 802.11n20 / Channel 36 / 5180MHz / Peak

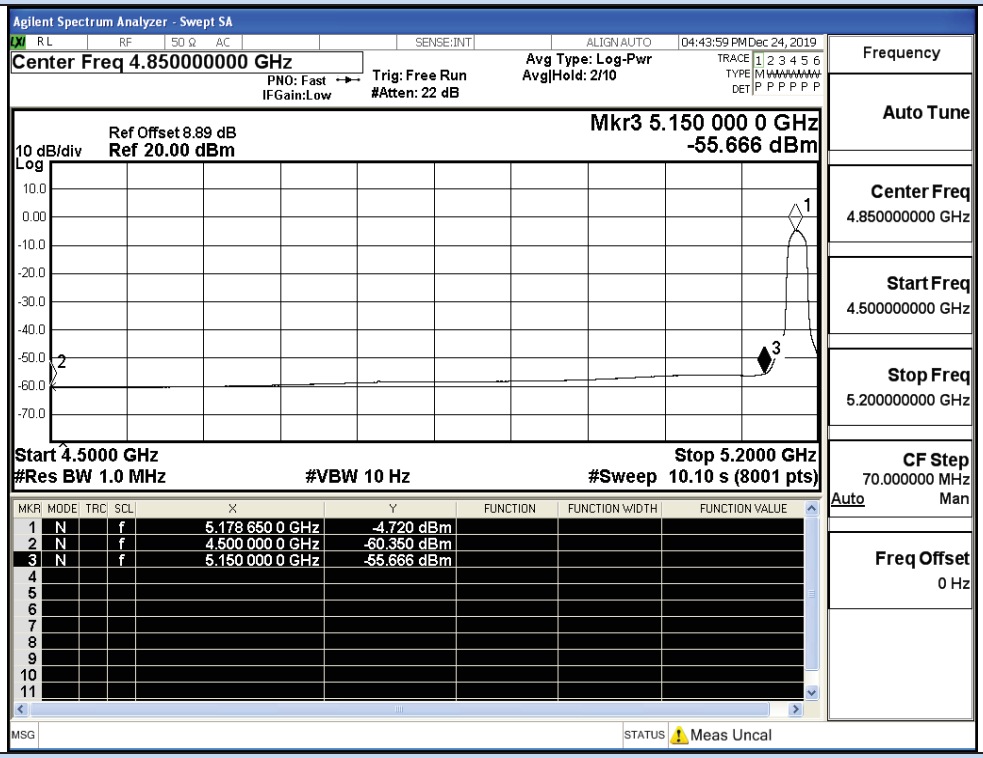

IEEE 802.11n20 / Channel 36 / 5180MHz / Average

Undesirable Emissions Measurement

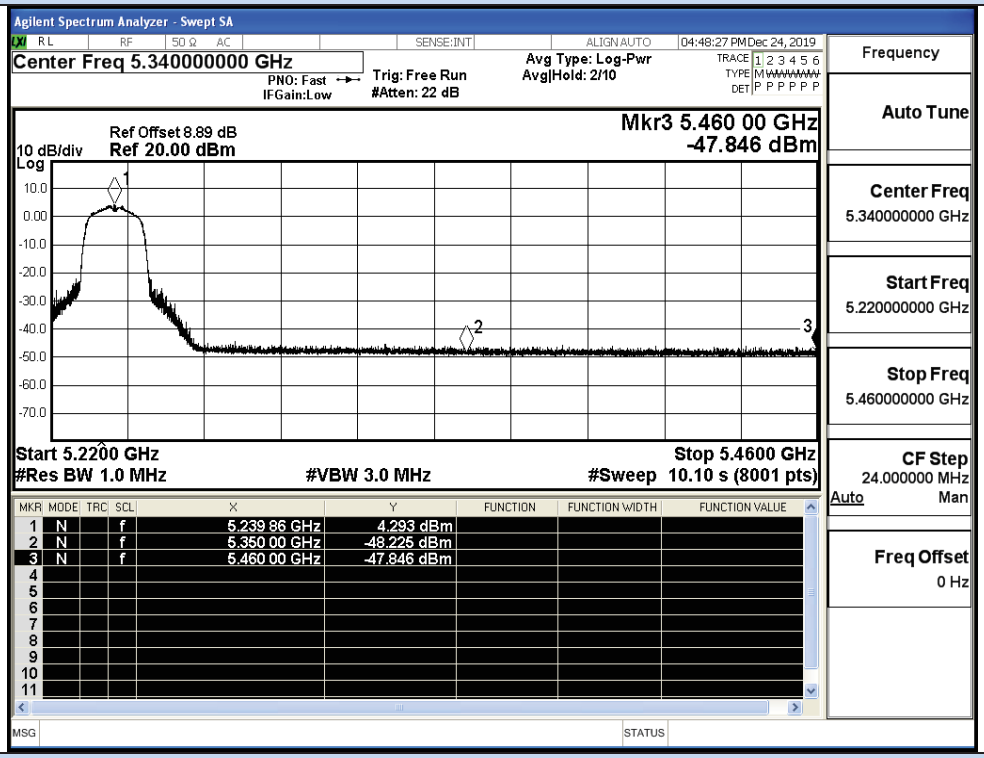

IEEE 802.11n20 / Channel 48 / 5240MHz / Peak

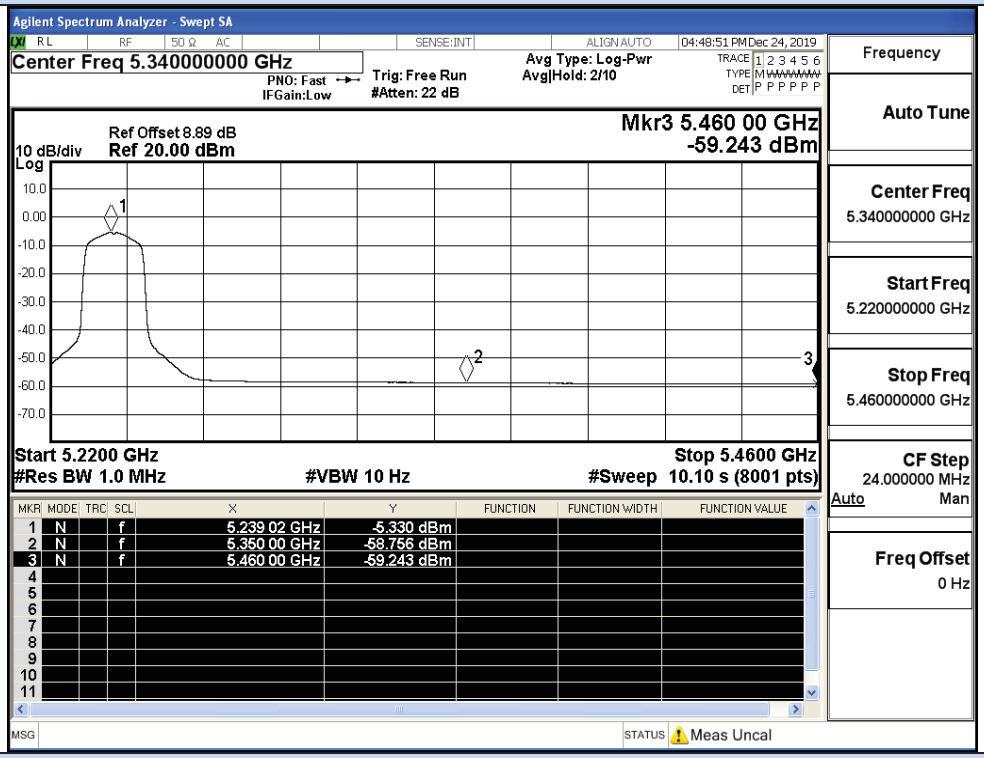

IEEE 802.11n20 / Channel 48 / 5240MHz / Average

Undesirable Emissions Measurement

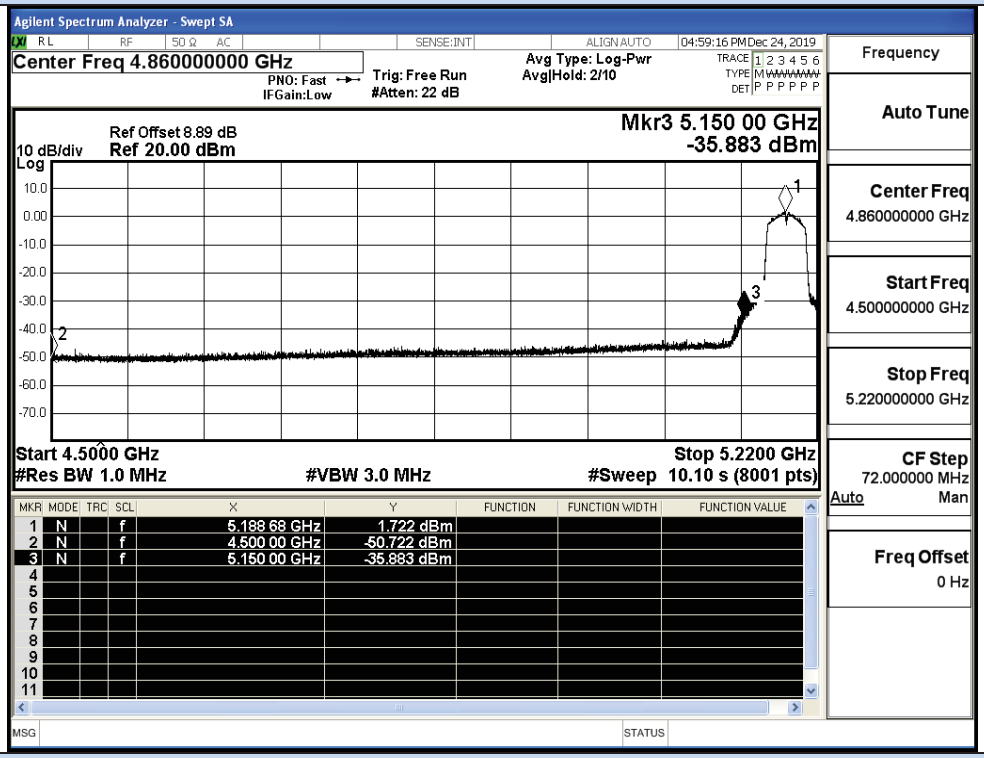

IEEE 802.11n40 / Channel 38 / 5190MHz / Peak

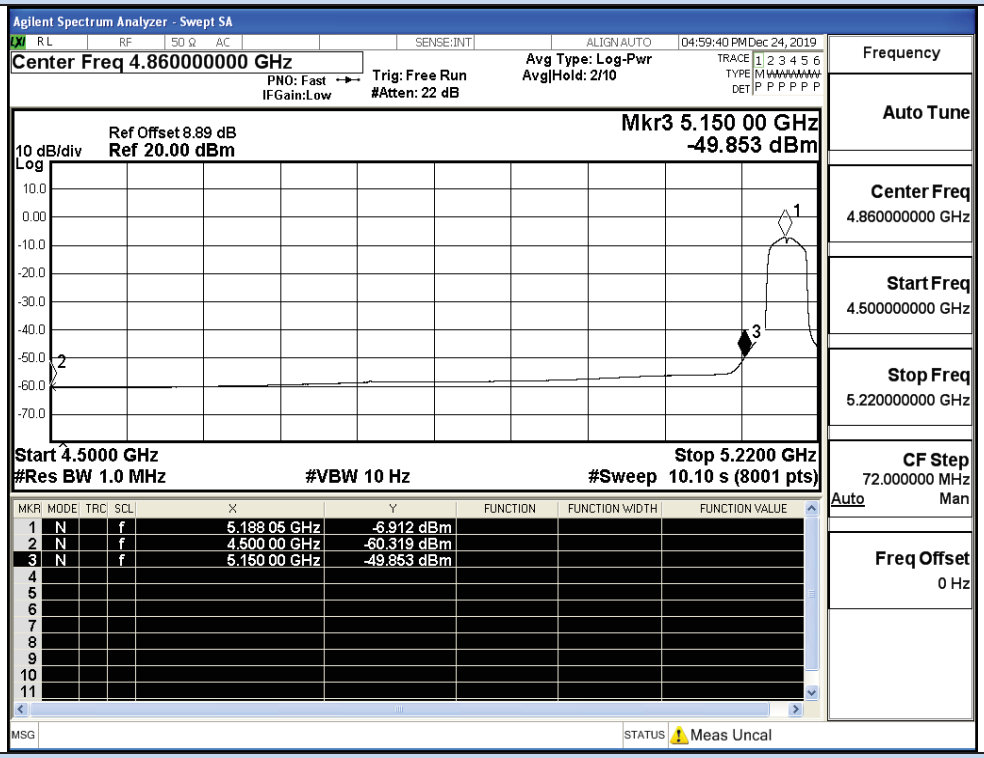

IEEE 802.11n40 / Channel 38 / 5190MHz / Average

Undesirable Emissions Measurement

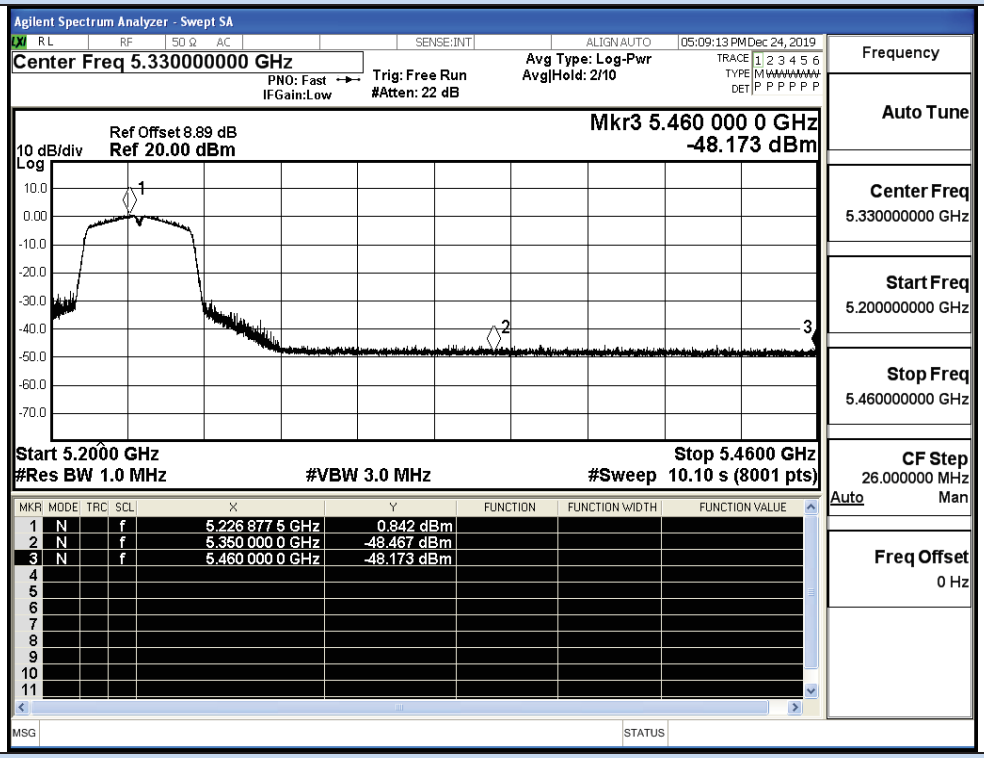

IEEE 802.11n40 / Channel 46 / 5230MHz / Peak

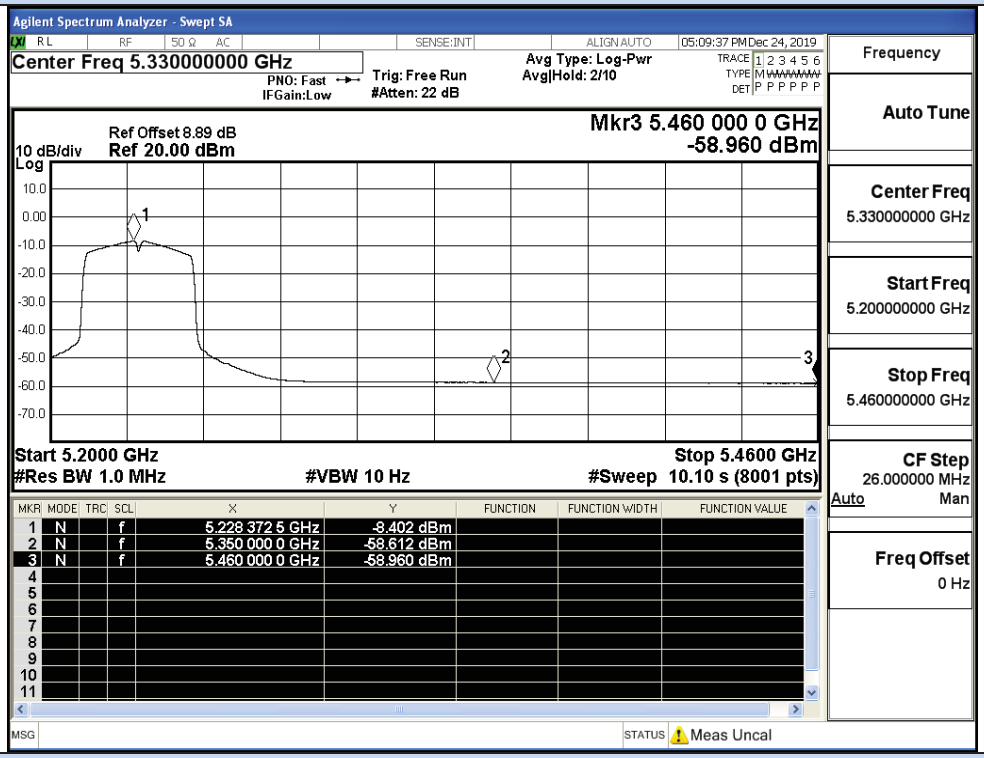

IEEE 802.11n40 / Channel 46 / 5230MHz / Average

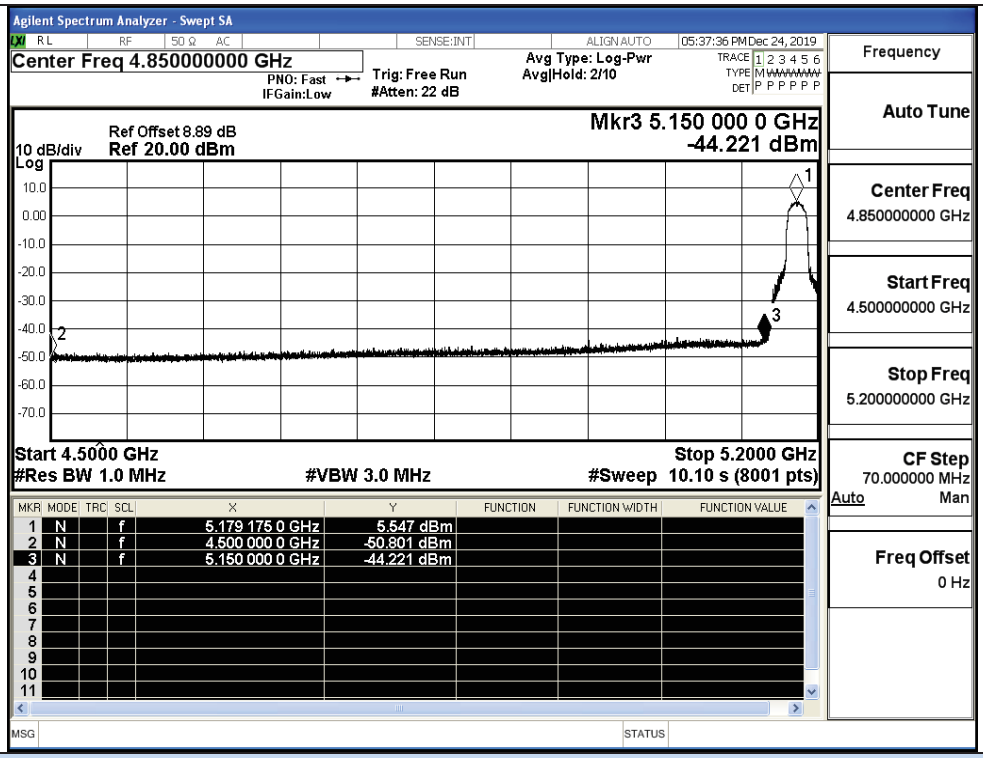

IEEE 802.11ac20 / Channel 36 / 5180MHz / Peak

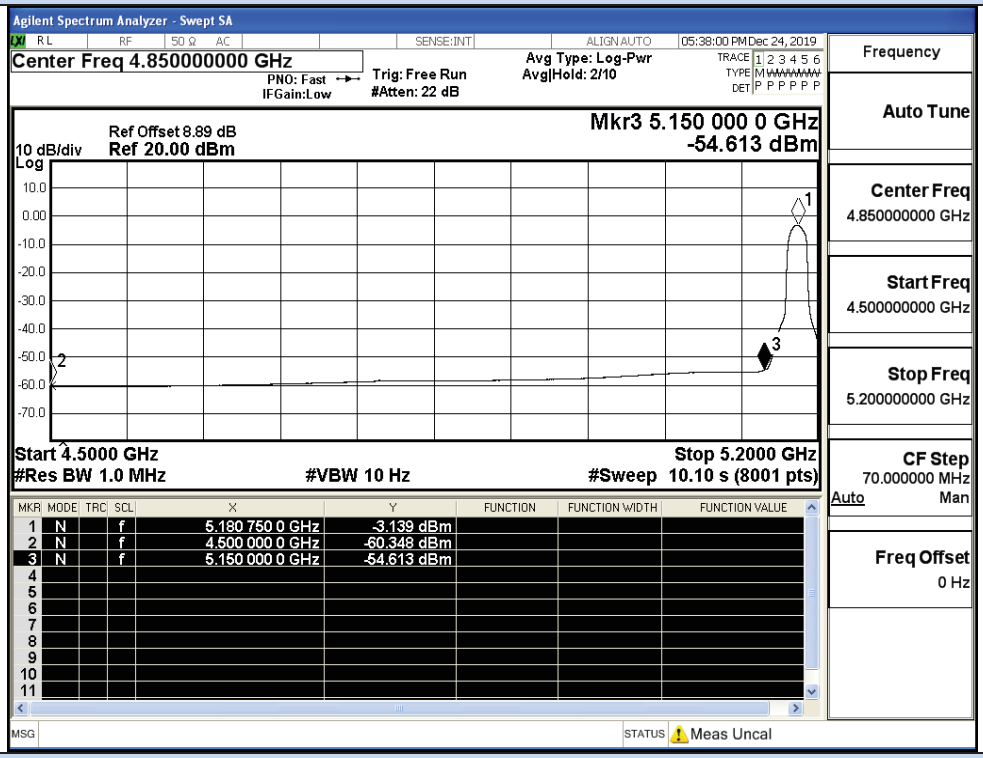

IEEE 802.11ac20 / Channel 36 / 5180MHz / Average

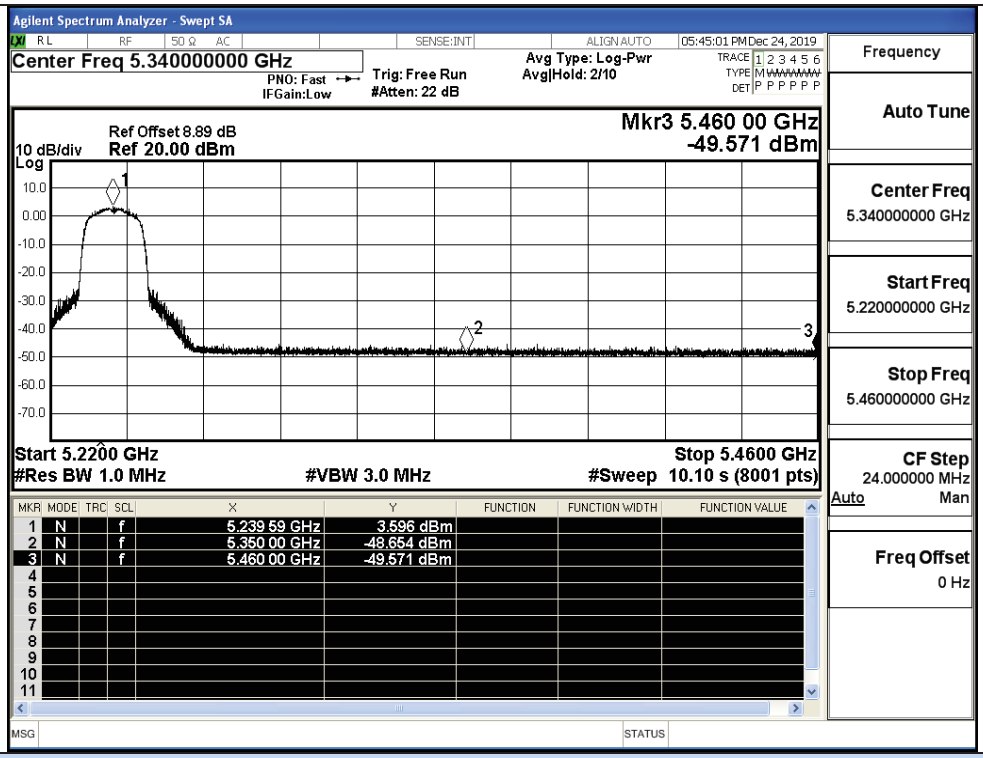

IEEE 802.11ac20 / Channel 48 / 5240MHz / Peak

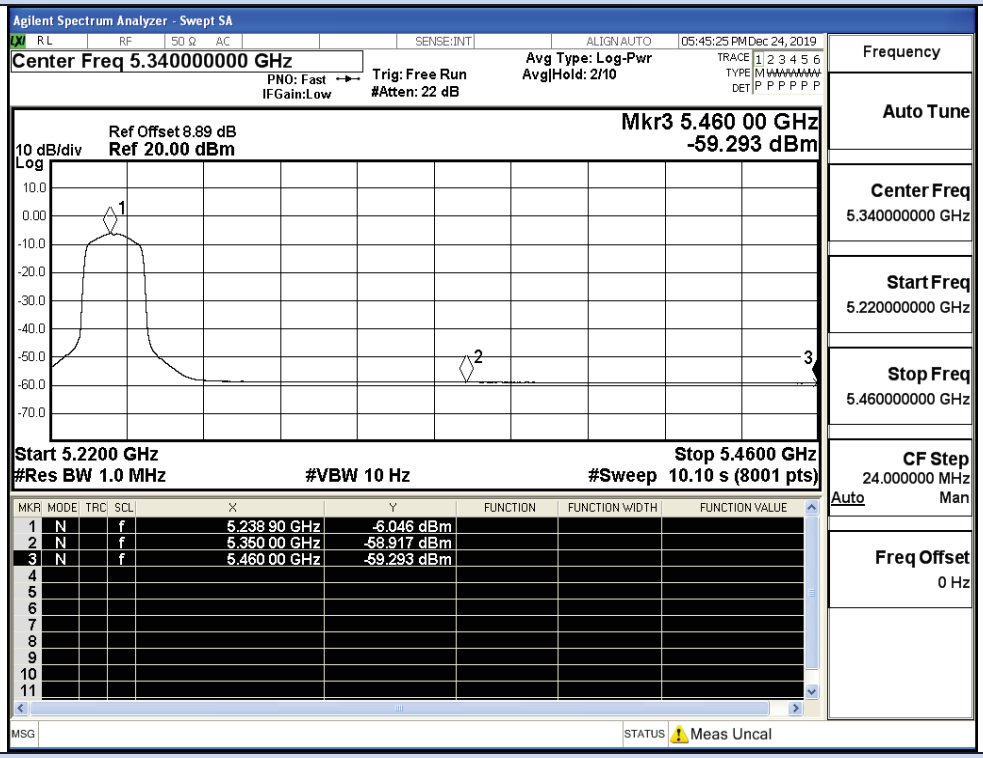

IEEE 802.11ac20 / Channel 48 / 5240MHz / Average

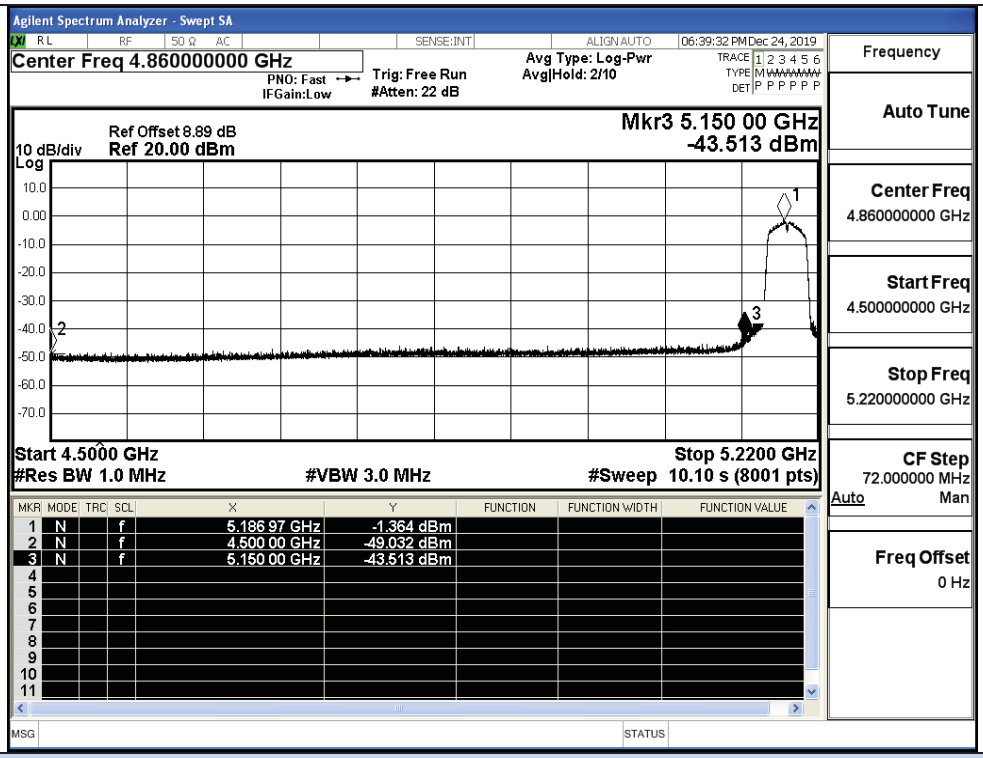

IEEE 802.11ac40 / Channel 38/ 5190MHz / Peak

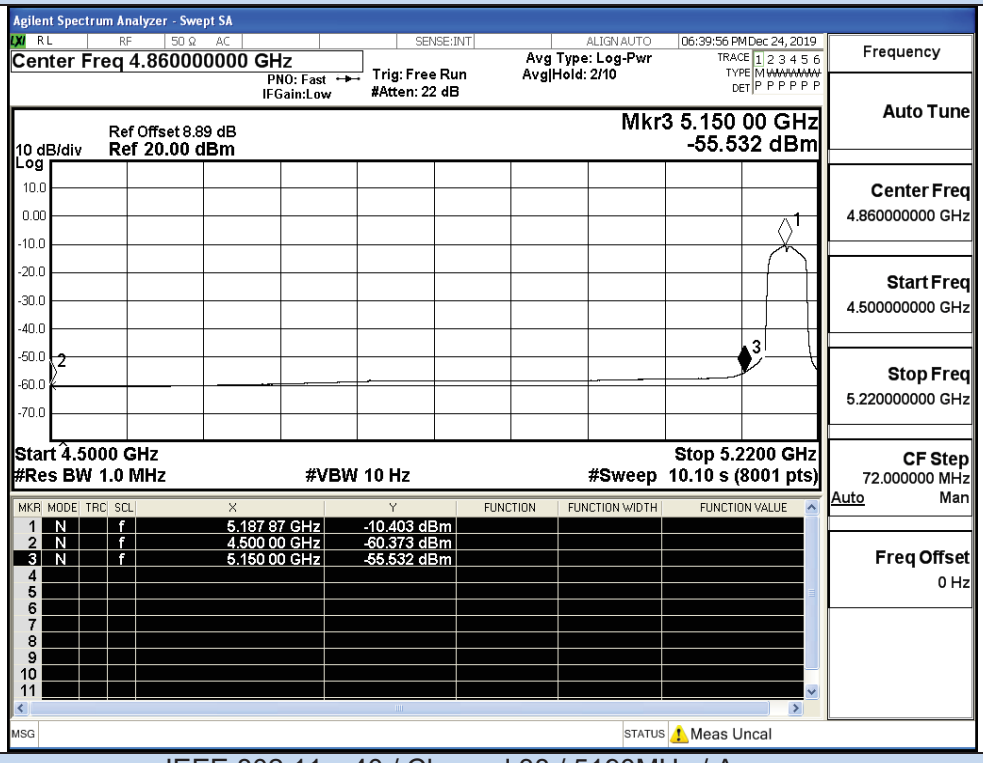

IEEE 802.11ac40 / Channel 38 / 5190MHz / Average

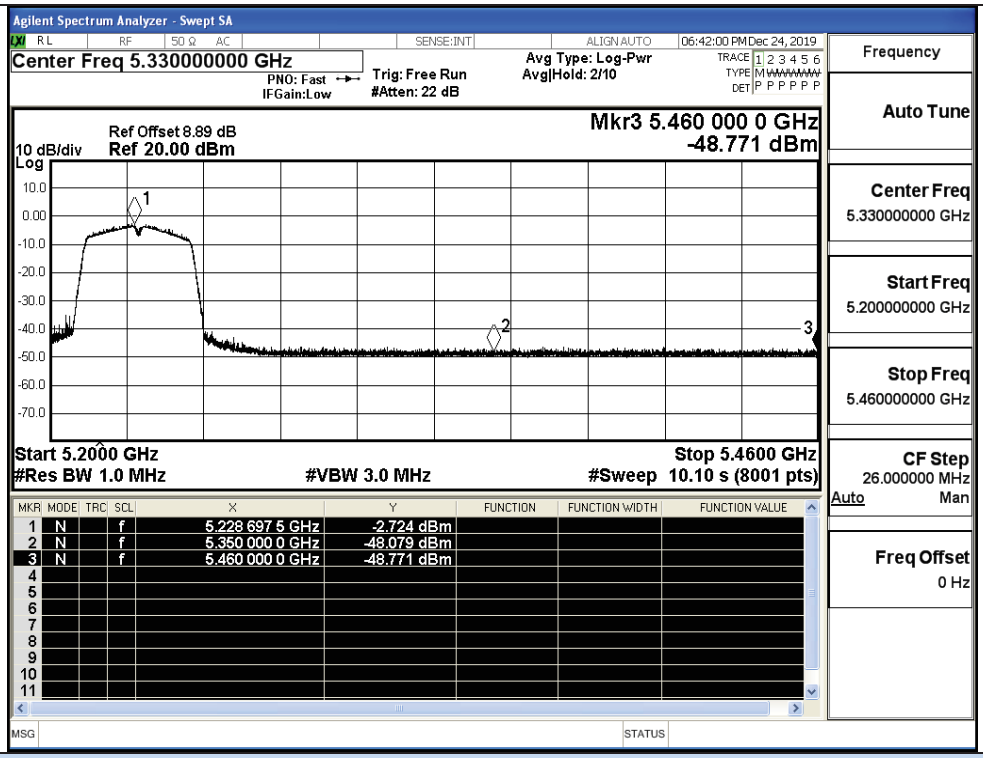

IEEE 802.11ac40 / Channel 46/ 5230MHz / Peak

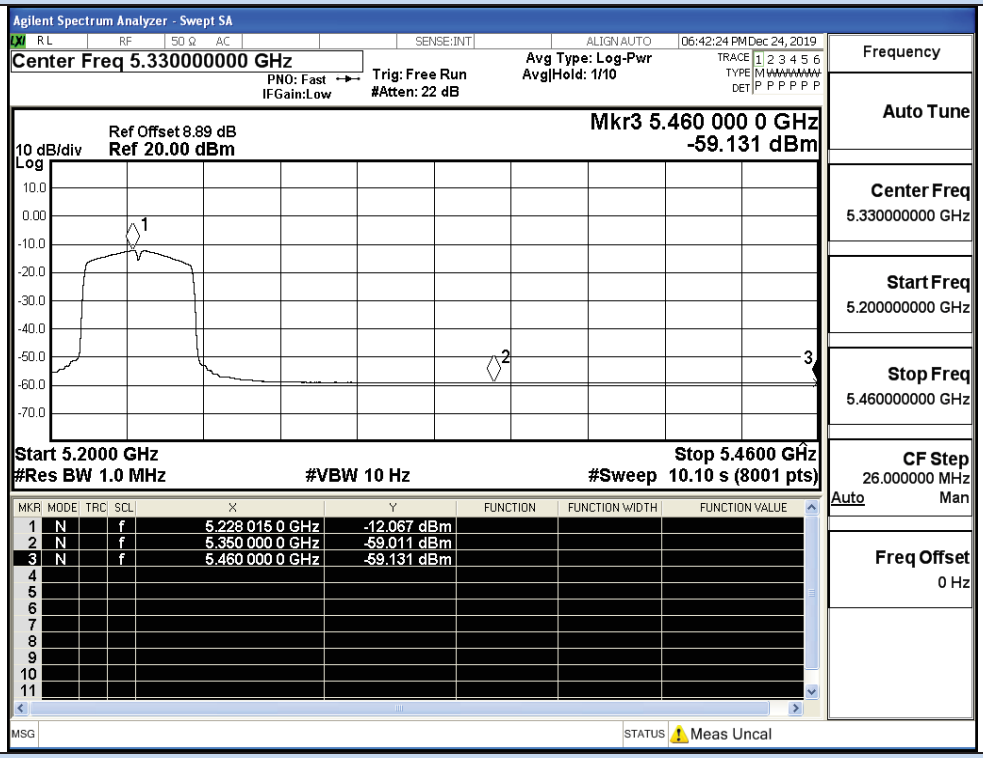

IEEE 802.11ac40 / Channel 46 / 5230MHz / Average

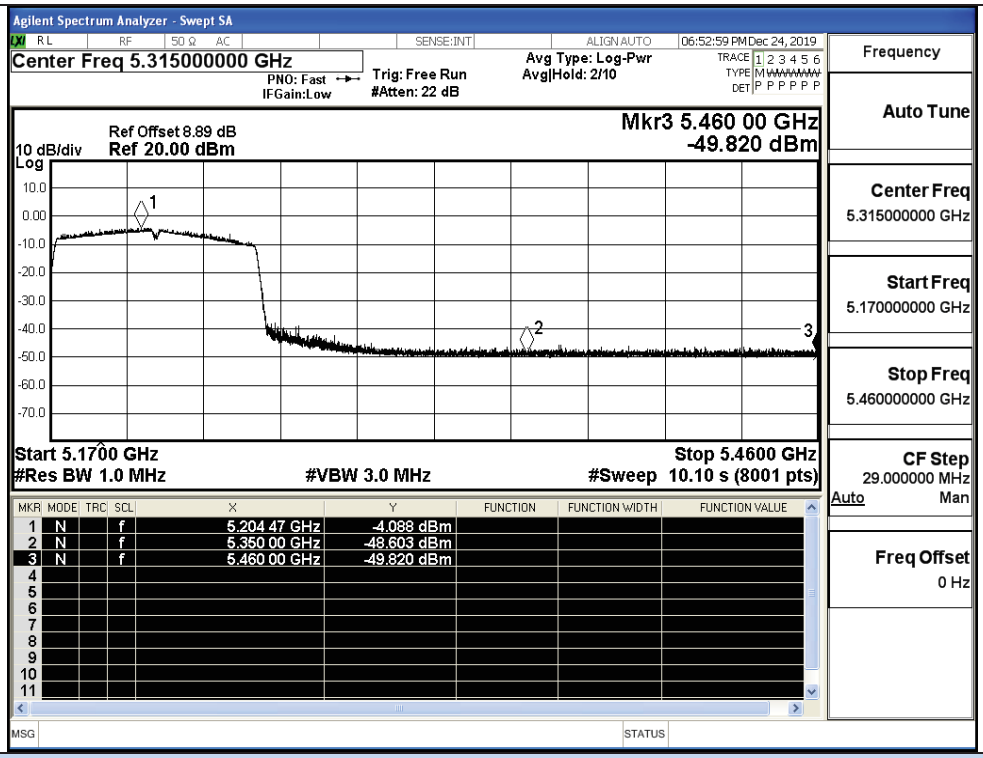

IEEE 802.11ac80 / Channel 42 / 5210MHz / Peak

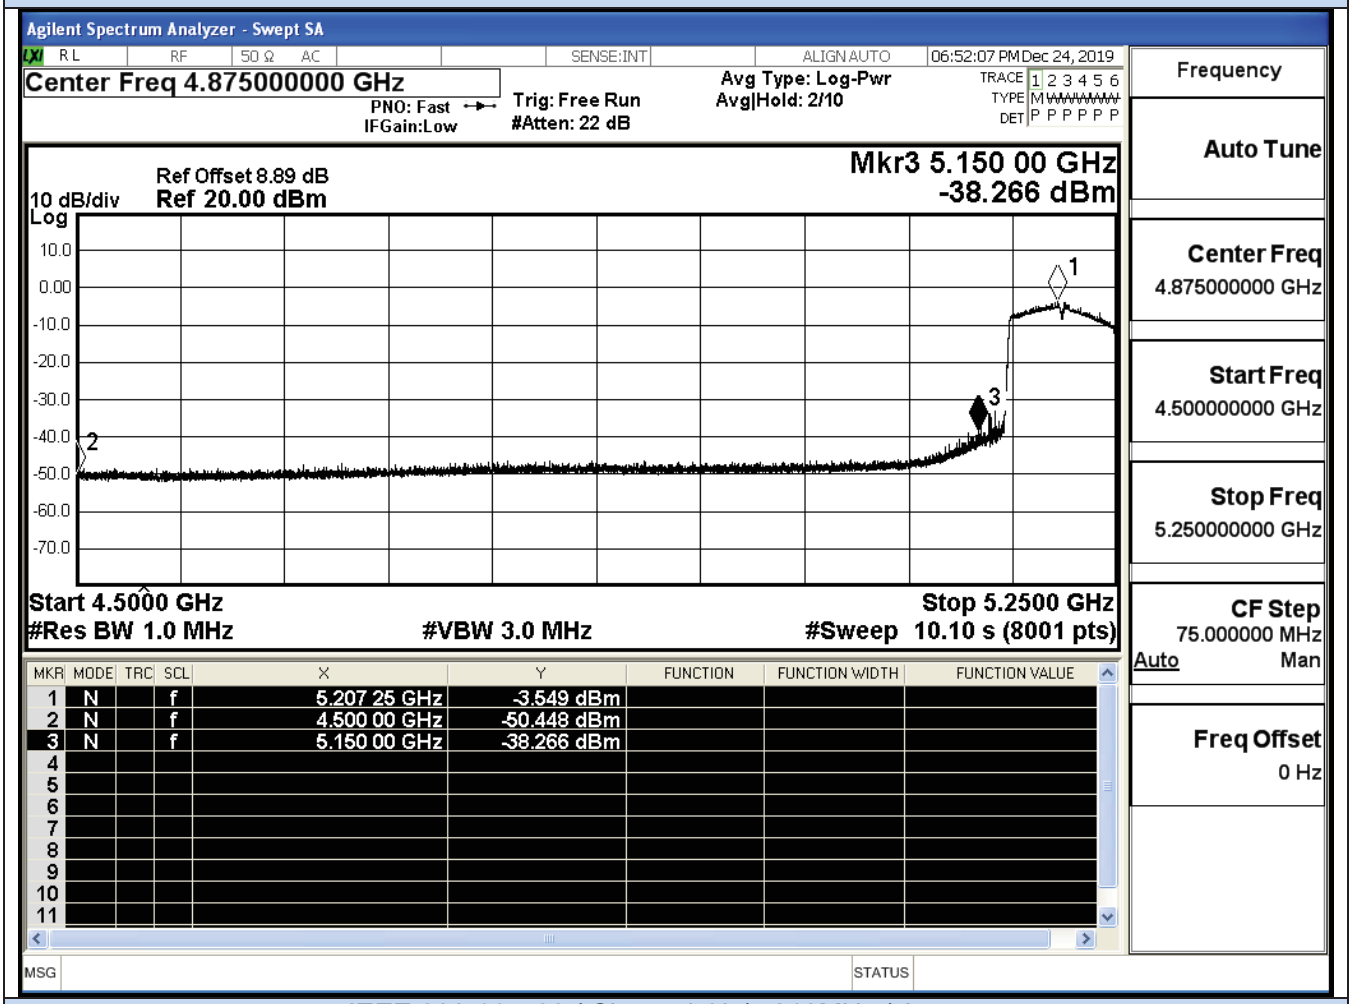

IEEE 802.11ac80 / Channel 42 / 5210MHz / Average

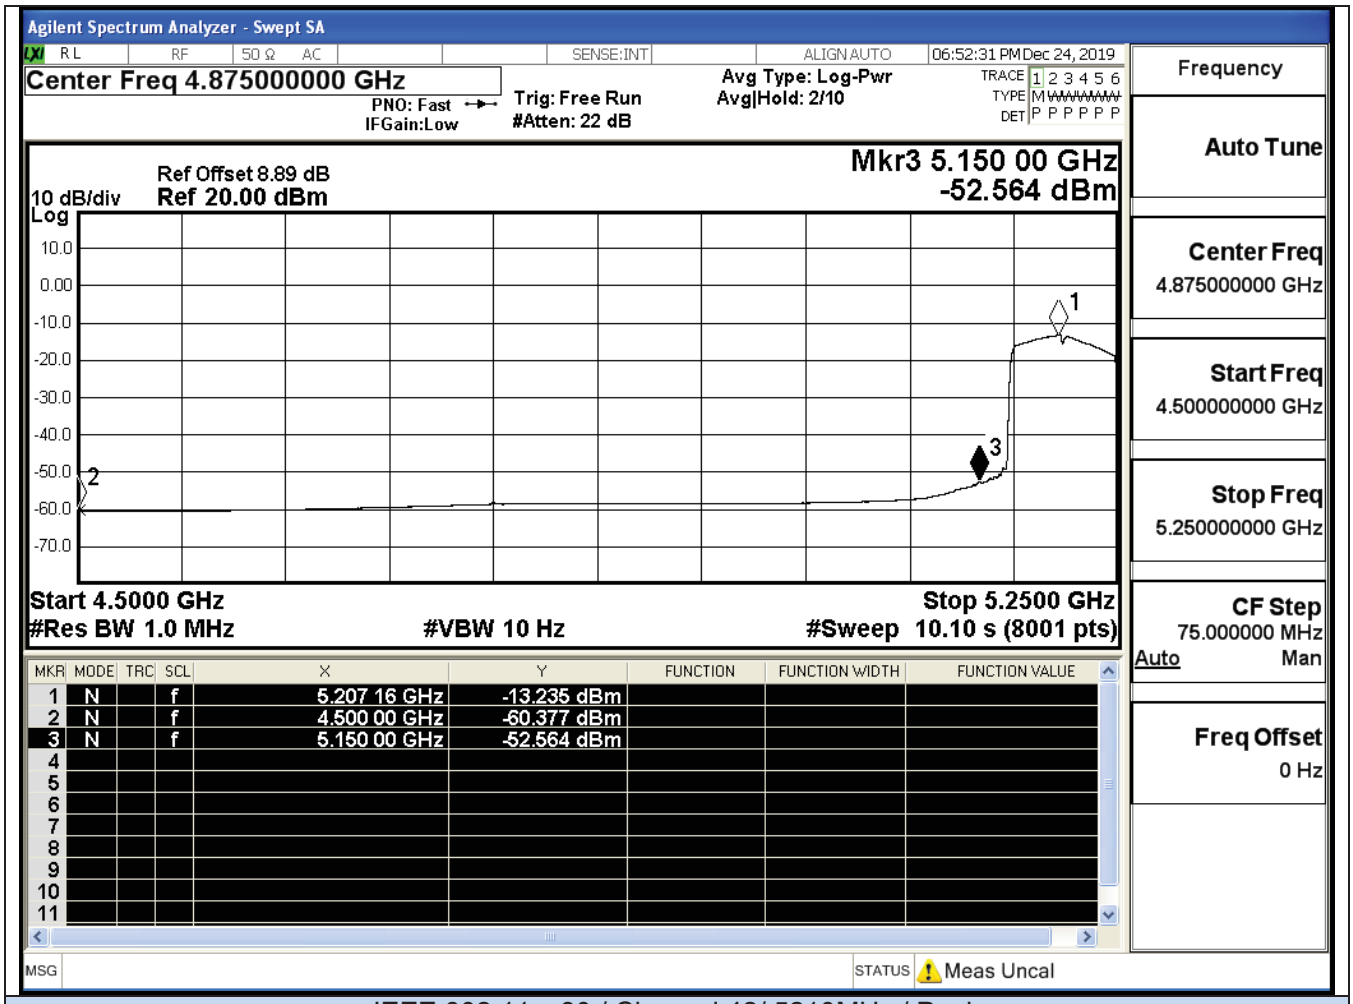

IEEE 802.11ac80 / Channel 42/ 5210MHz / Peak

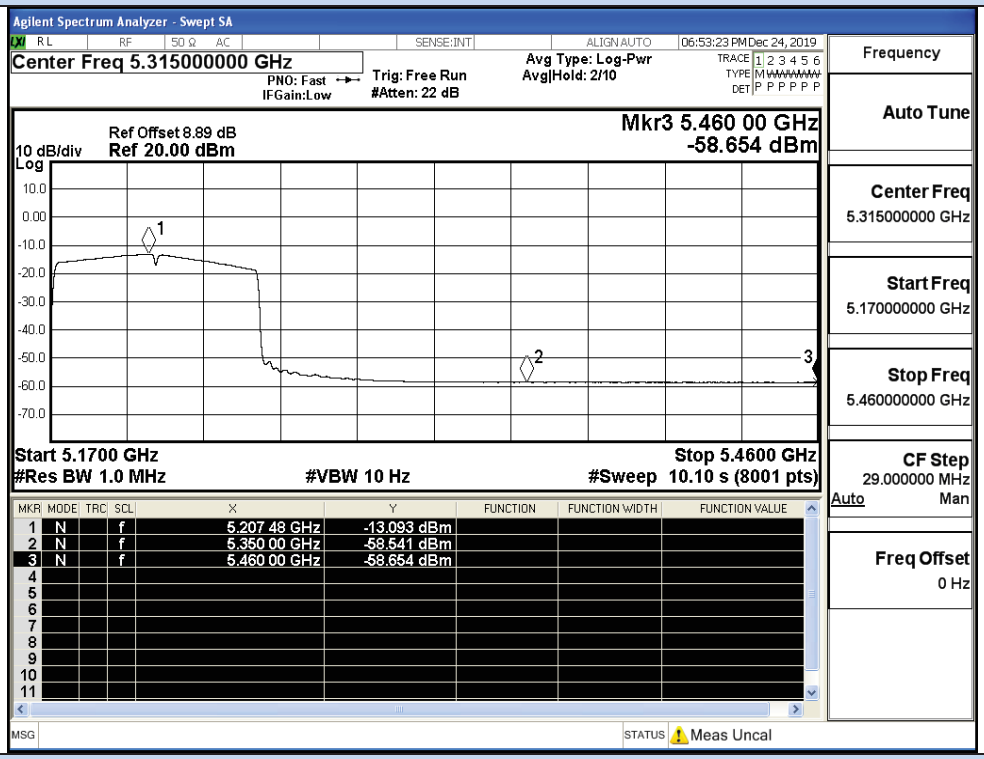

IEEE 802.11ac80 / Channel 42 / 5210MHz / Average

Ant0+1

Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
11N20 SISO	36	4500.0	-50.97	-0.37	0	46.29	Peak	68.20	Pass
		4500.0	-60.40	-0.37	0	36.86	Average	54.00	Pass
		5150.0	-46.77	-0.37	0	50.49	Peak	68.20	Pass
		5150.0	-56.86	-0.37	0	40.40	Average	54.00	Pass
	48	5350.0	-49.48	-0.37	0	47.78	Peak	68.20	Pass
		5350.0	-59.44	-0.37	0	37.82	Average	54.00	Pass
		5460.0	-49.45	-0.37	0	47.81	Peak	68.20	Pass
		5460.0	-59.51	-0.37	0	37.75	Average	54.00	Pass
11N40 SISO	38	4500.0	-49.24	-0.37	0	48.02	Peak	68.20	Pass
		4500.0	-60.45	-0.37	0	36.81	Average	54.00	Pass
		5150.0	-42.41	-0.37	0	54.85	Peak	68.20	Pass
		5150.0	-54.46	-0.37	0	42.80	Average	54.00	Pass
	46	5350.0	-48.71	-0.37	0	48.55	Peak	68.20	Pass
		5350.0	-59.16	-0.37	0	38.10	Average	54.00	Pass
		5460.0	-48.45	-0.37	0	48.81	Peak	68.20	Pass
		5460.0	-59.23	-0.37	0	38.03	Average	54.00	Pass
11AC20 SISO	36	4500.0	-49.52	-0.37	0	47.74	Peak	68.20	Pass
		4500.0	-60.44	-0.37	0	36.82	Average	54.00	Pass
		5150.0	-47.73	-0.37	0	49.53	Peak	68.20	Pass
		5150.0	-57.14	-0.37	0	40.12	Average	54.00	Pass
	48	4500.0	-49.52	-0.37	0	47.74	Peak	68.20	Pass
		4500.0	-60.44	-0.37	0	36.82	Average	54.00	Pass
		5150.0	-47.73	-0.37	0	49.53	Peak	68.20	Pass
		5150.0	-57.14	-0.37	0	40.12	Average	54.00	Pass
11AC40 SISO	38	4500.0	-50.28	-0.37	0	-48.28	Peak	68.20	Pass
		4500.0	-60.35	-0.37	0	-58.35	Average	54.00	Pass
		5150.0	-42.65	-0.37	0	-40.65	Peak	68.20	Pass
		5150.0	-54.49	-0.37	0	-52.49	Average	54.00	Pass
	46	5350.0	-49.88	-0.37	0	-47.88	Peak	68.20	Pass
		5350.0	-59.08	-0.37	0	-57.08	Average	54.00	Pass
		5460.0	-48.85	-0.37	0	-46.85	Peak	68.20	Pass
		5460.0	-59.13	-0.37	0	-57.13	Average	54.00	Pass
11AC80 SISO	42	4500.0	-49.67	-0.37	0	-47.67	Peak	68.20	Pass
		5150.0	-58.59	-0.37	0	-56.59	Average	54.00	Pass
		4500.0	-49.19	-0.37	0	-47.19	Peak	68.20	Pass
		5150.0	-58.70	-0.37	0	-56.70	Average	54.00	Pass
		5350.0	-49.67	-0.37	0	-47.67	Peak	68.20	Pass

		5460.0	-58.59	-0.37	0	-56.59	Average	54.00	Pass
		5350.0	-49.19	-0.37	0	-47.19	Peak	68.20	Pass
		5460.0	-58.70	-0.37	0	-56.70	Average	54.00	Pass

E [dBuV/m]= Power [dBm] + Gain + Ground Factor + 95.26

The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater

Undesirable Emissions Measurement

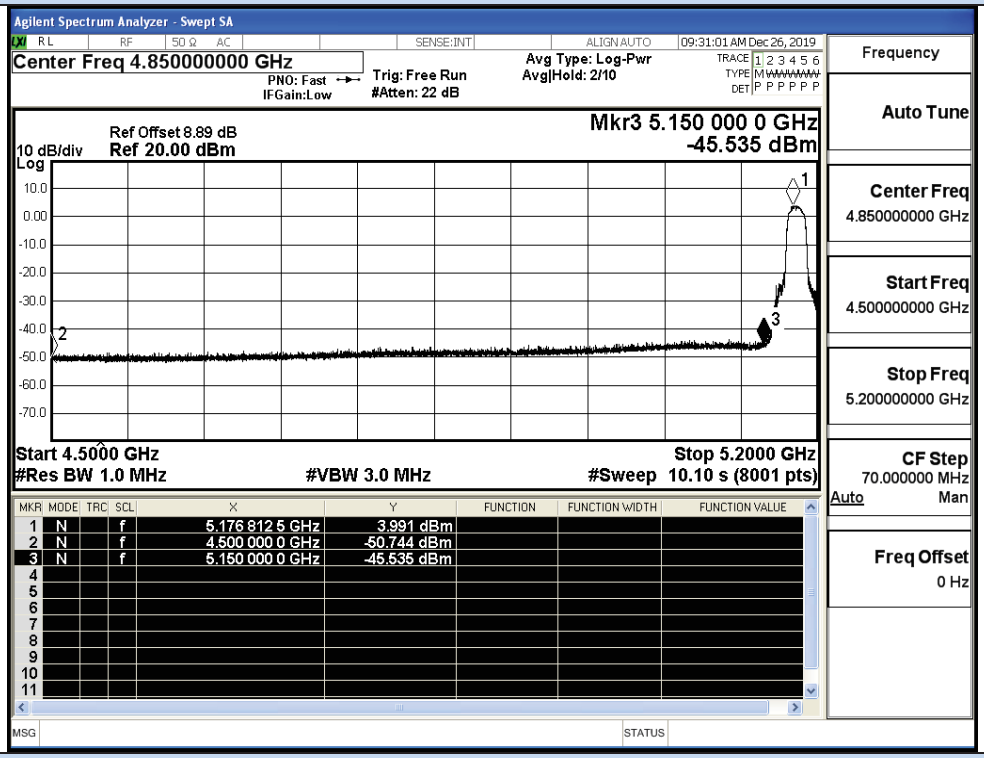

IEEE 802.11a / Channel 36 / 5180MHz / Peak

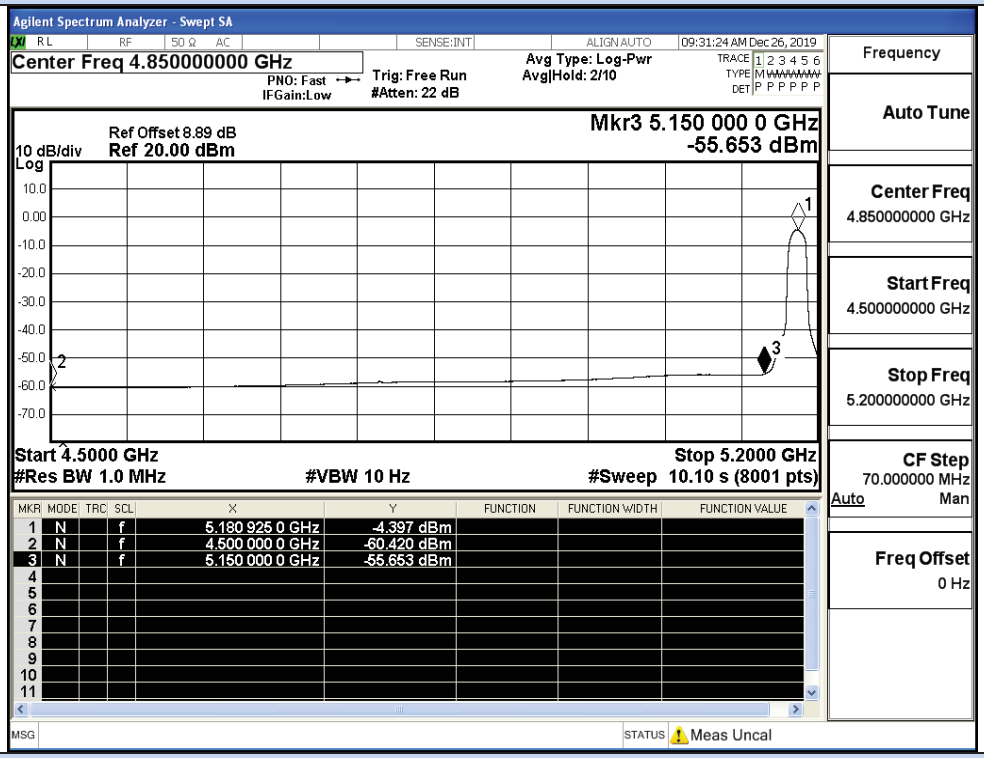

IEEE 802.11a / Channel 36 / 5180MHz / Average

Undesirable Emissions Measurement

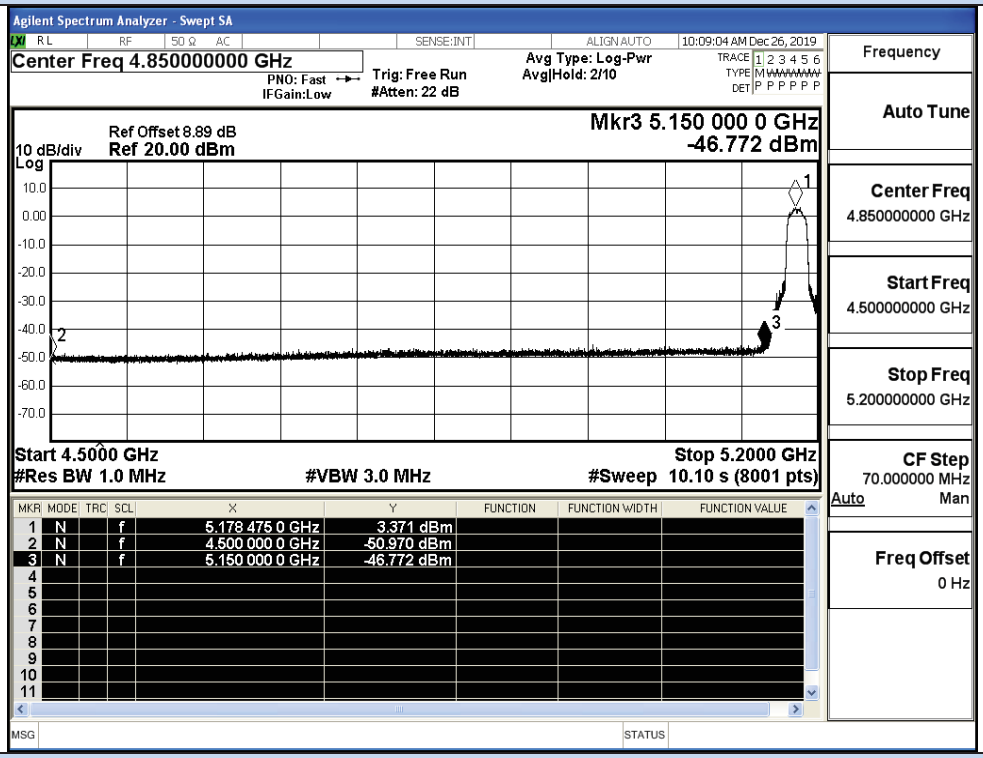

IEEE 802.11n20 / Channel 36 / 5180MHz / Peak

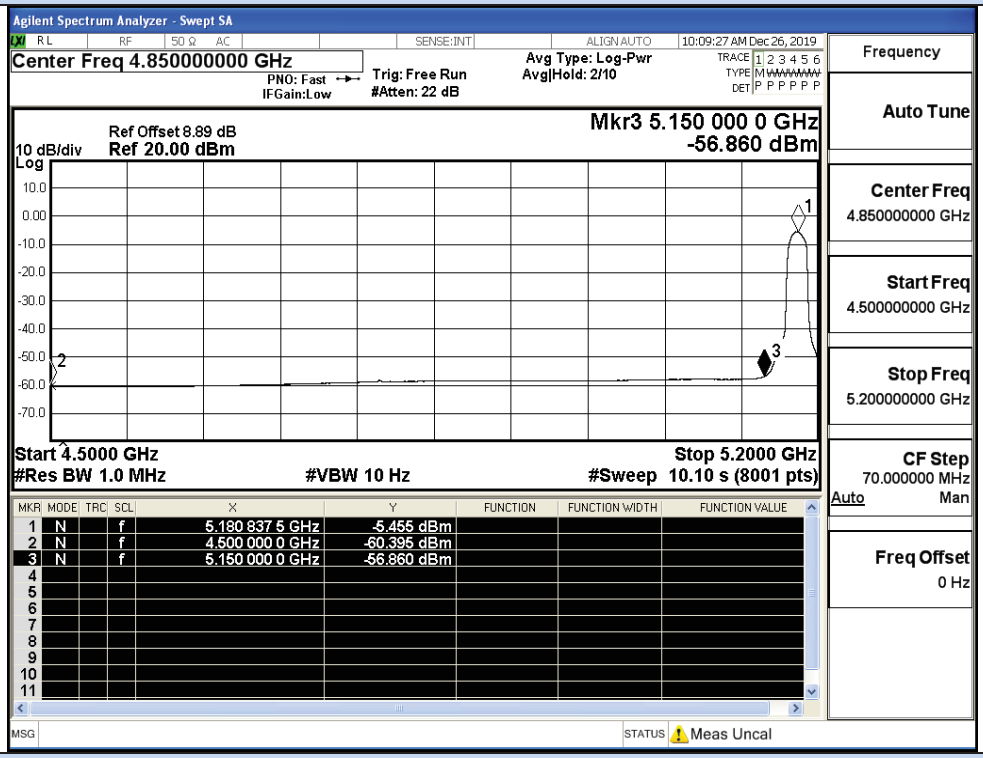

IEEE 802.11n20 / Channel 36 / 5180MHz / Average

Undesirable Emissions Measurement

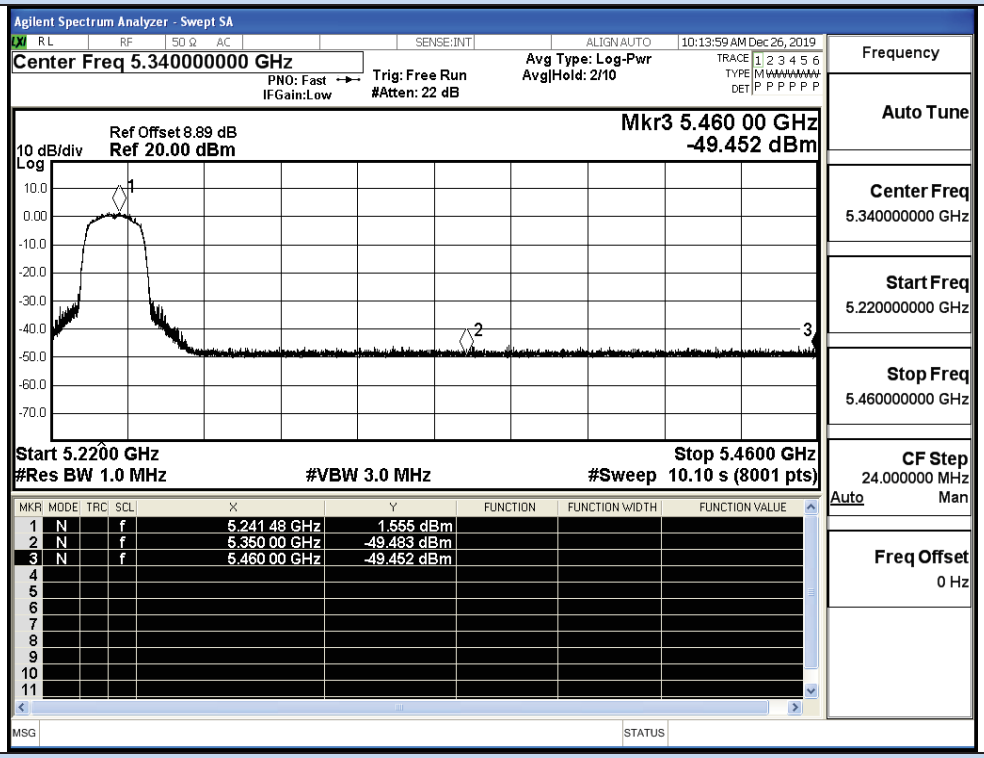

IEEE 802.11n20 / Channel 48 / 5240MHz / Peak

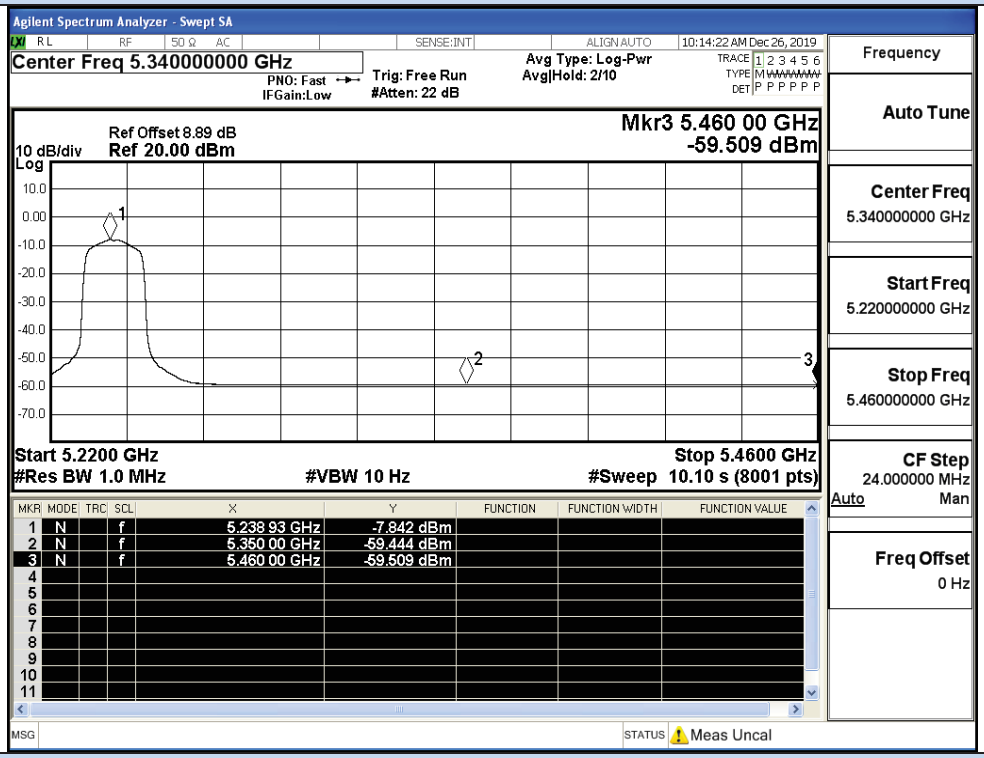

IEEE 802.11n20 / Channel 48 / 5240MHz / Average

Undesirable Emissions Measurement

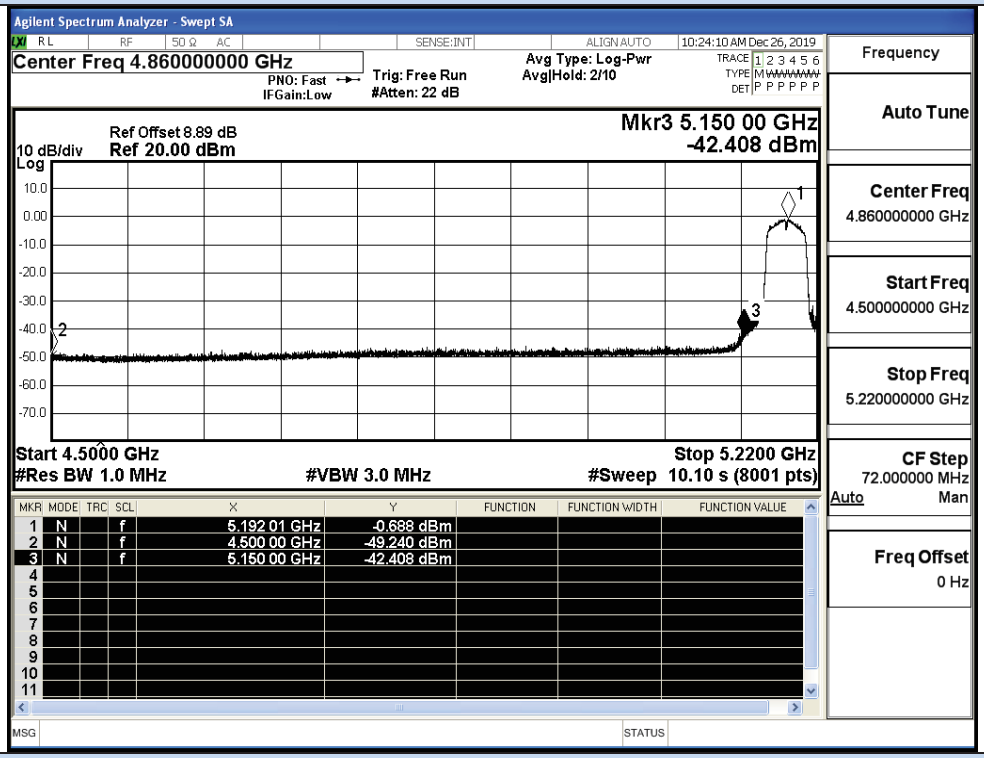

IEEE 802.11n40 / Channel 38 / 5190MHz / Peak

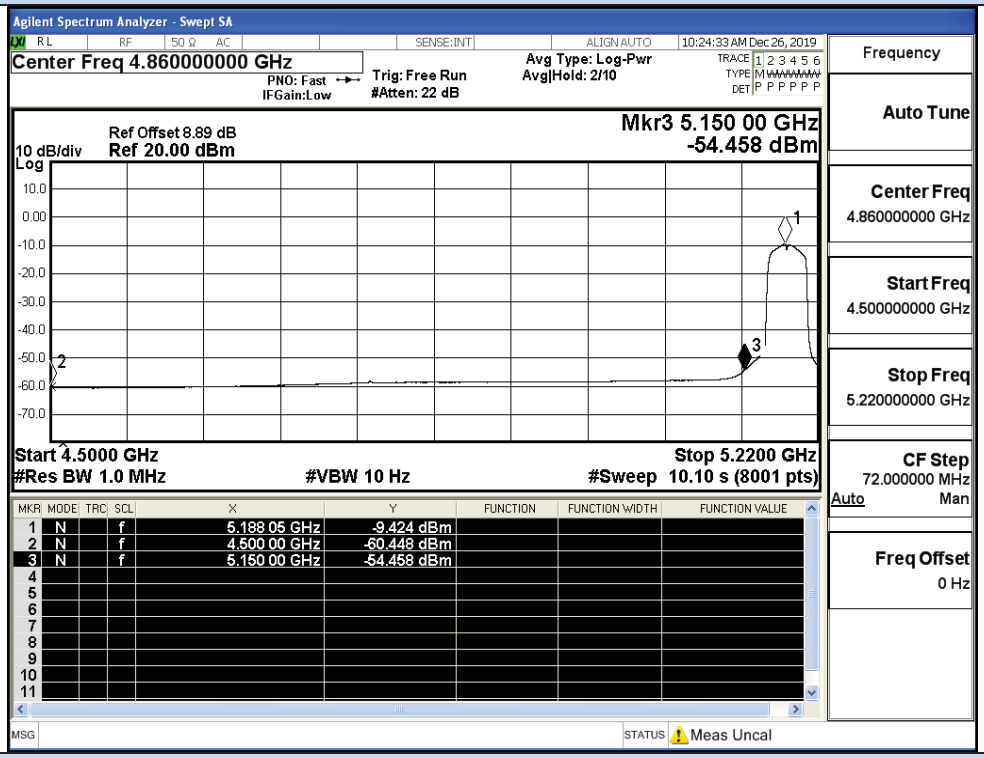

IEEE 802.11n40 / Channel 38 / 5190MHz / Average

Undesirable Emissions Measurement

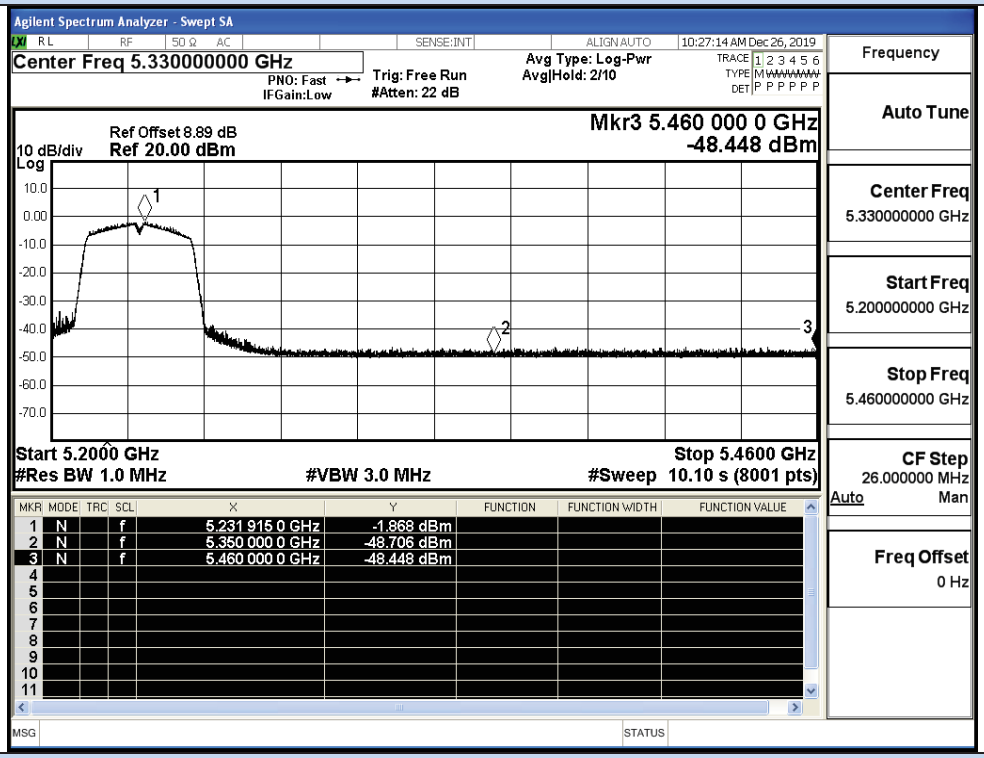

IEEE 802.11n40 / Channel 46 / 5230MHz / Peak

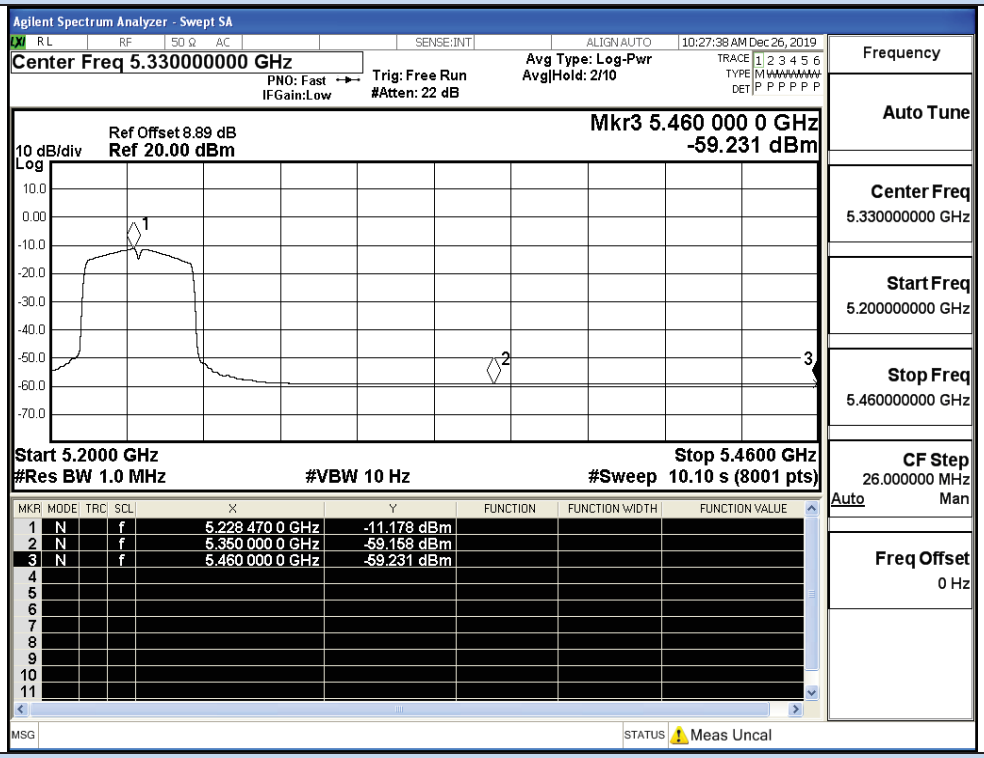

IEEE 802.11n40 / Channel 46 / 5230MHz / Average

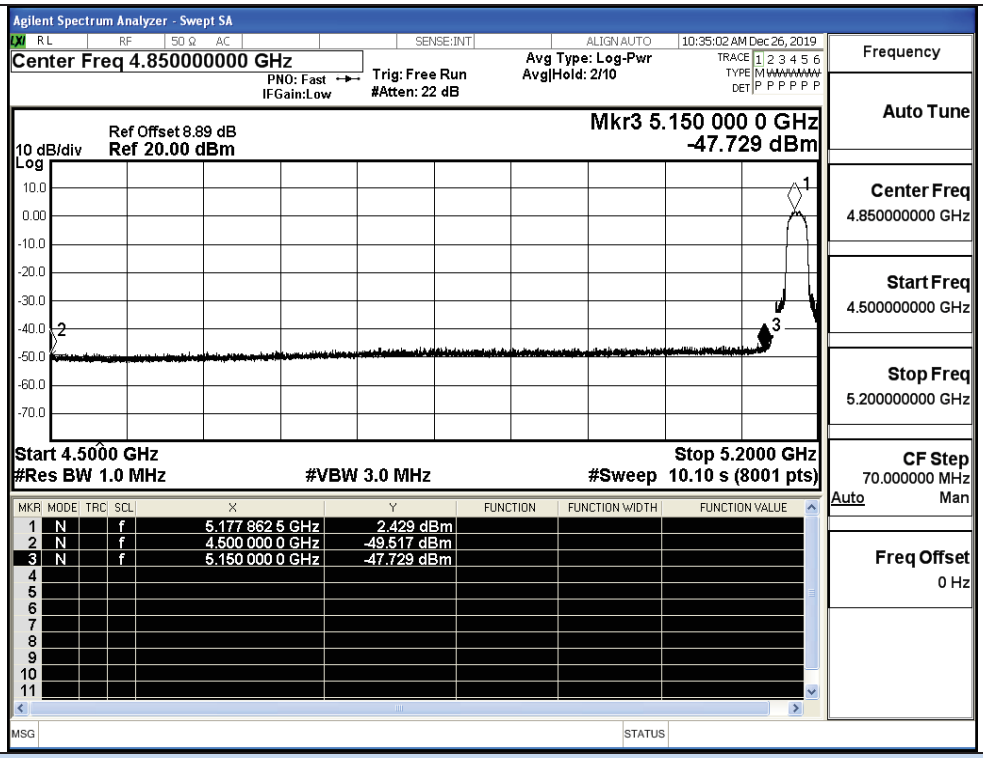

IEEE 802.11ac20 / Channel 36 / 5180MHz / Peak

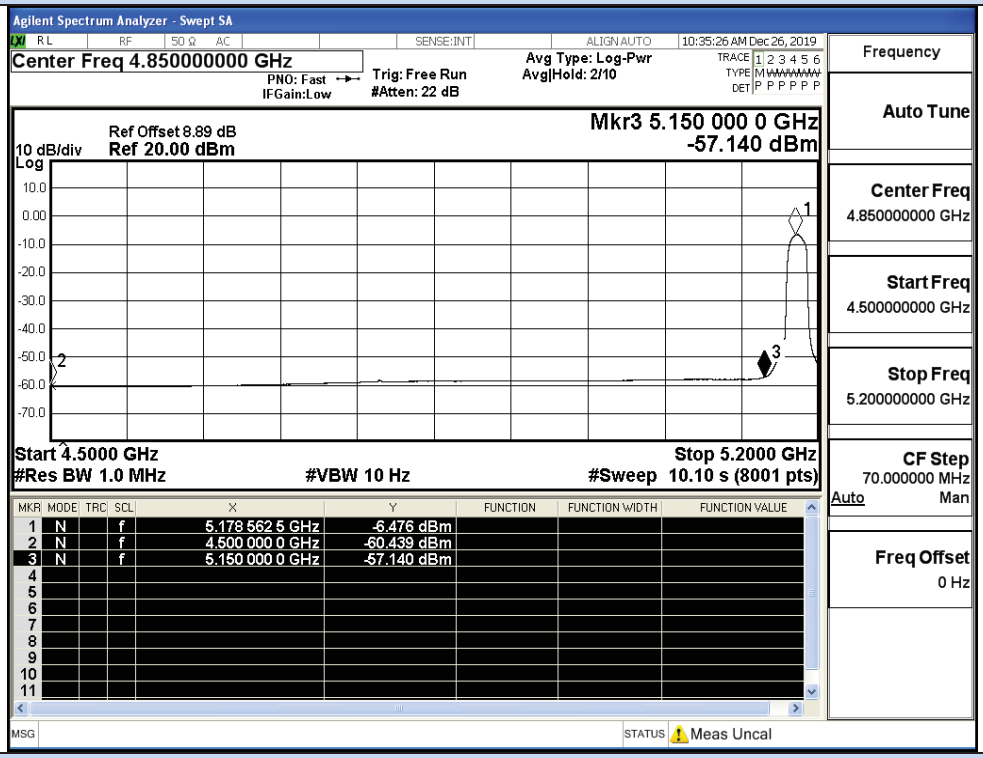

IEEE 802.11ac20 / Channel 36 / 5180MHz / Average

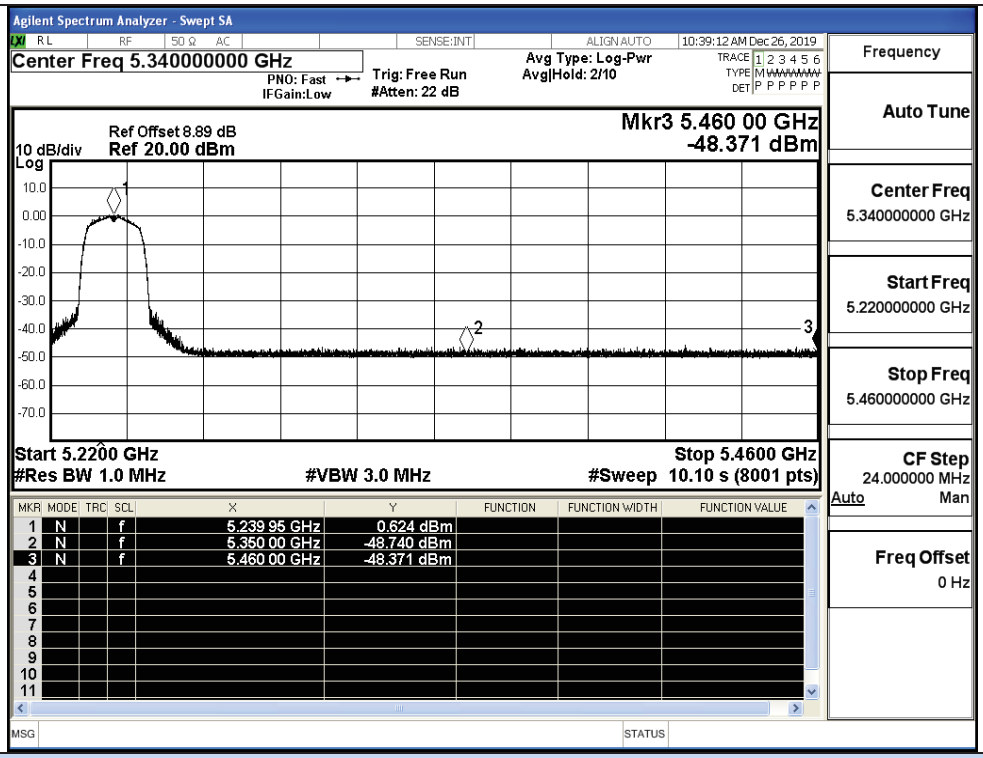

IEEE 802.11ac20 / Channel 48 / 5240MHz / Peak

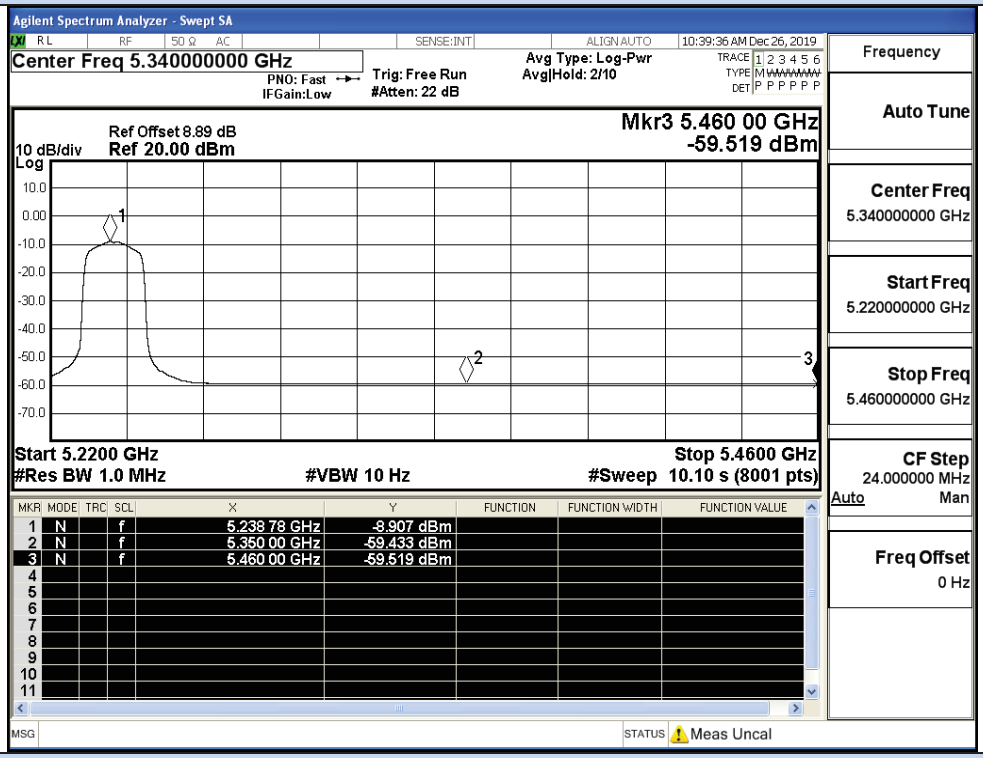

IEEE 802.11ac20 / Channel 48 / 5240MHz / Average

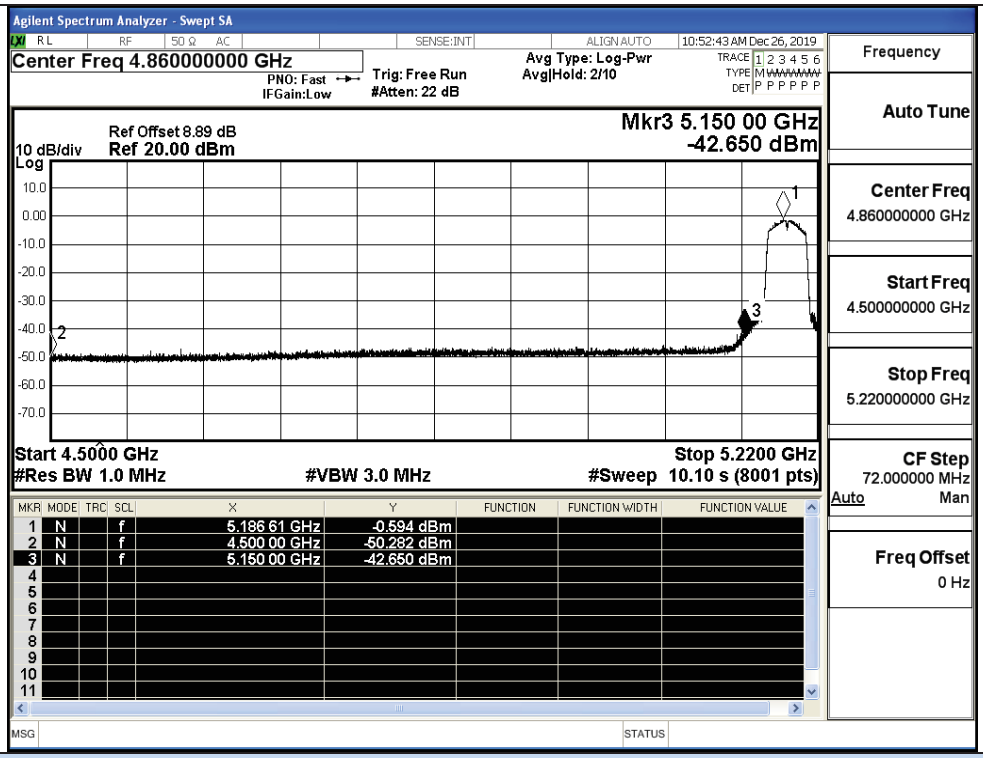

IEEE 802.11ac40 / Channel 38/ 5190MHz / Peak

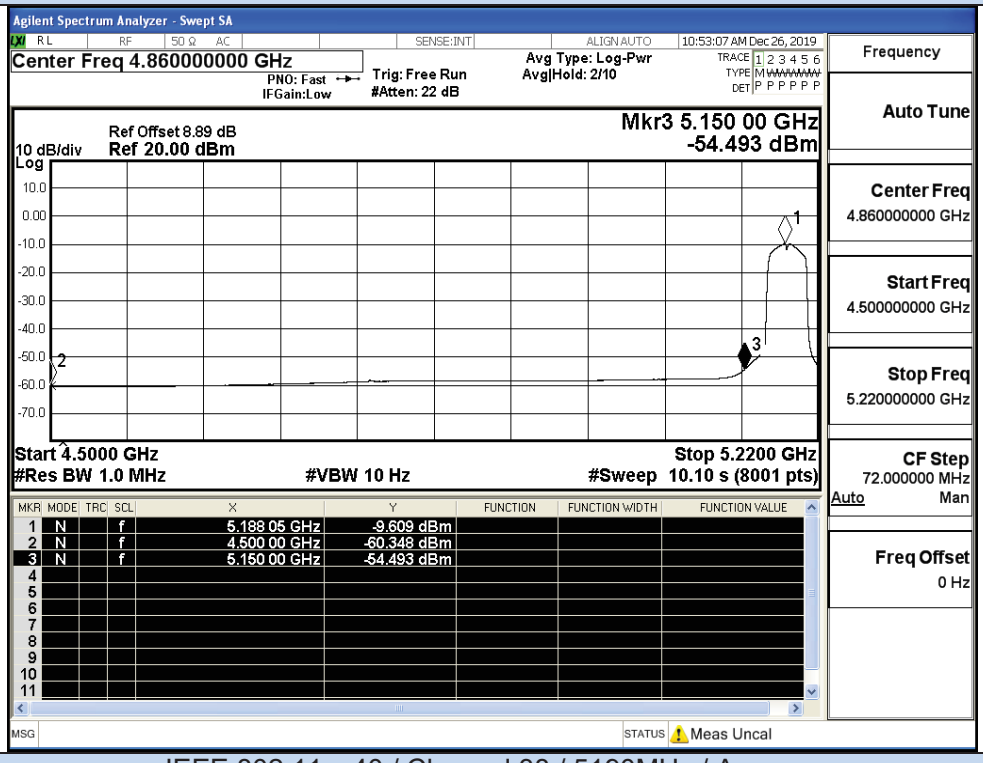

IEEE 802.11ac40 / Channel 38 / 5190MHz / Average

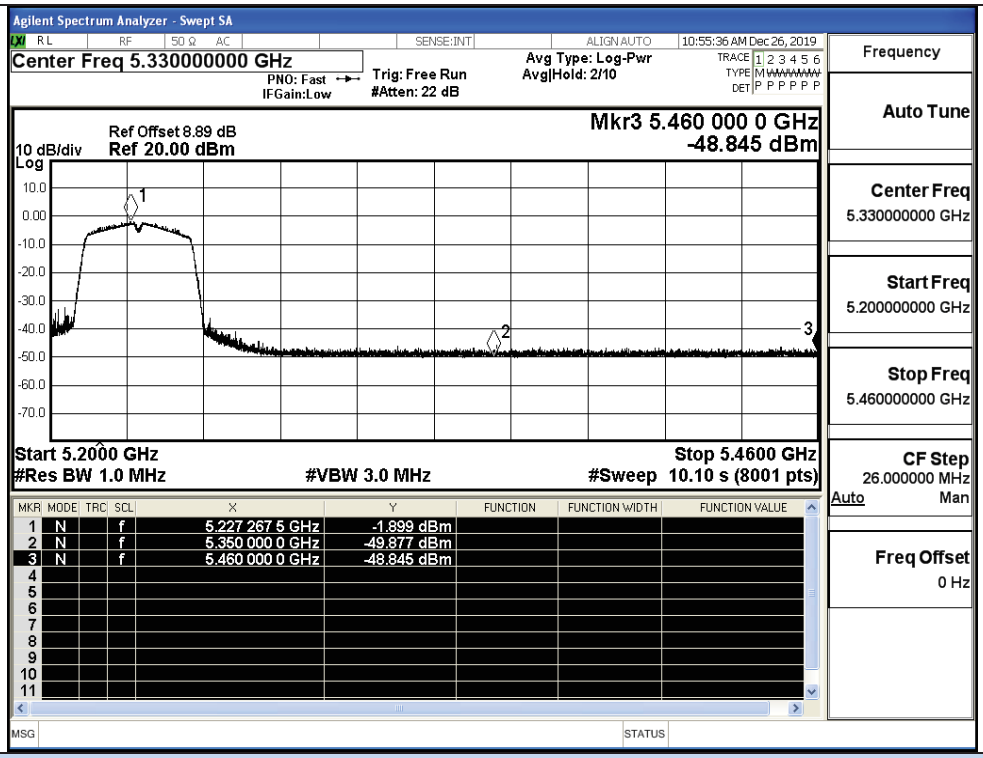

IEEE 802.11ac40 / Channel 46/ 5230MHz / Peak

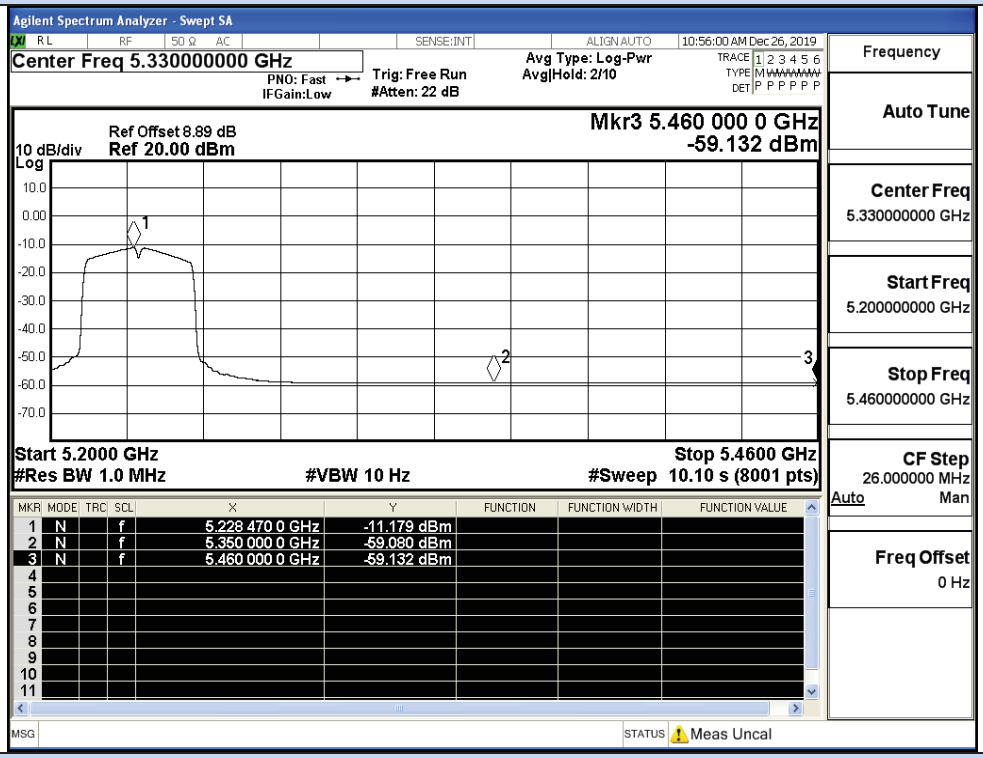

IEEE 802.11ac40 / Channel 46 / 5230MHz / Average

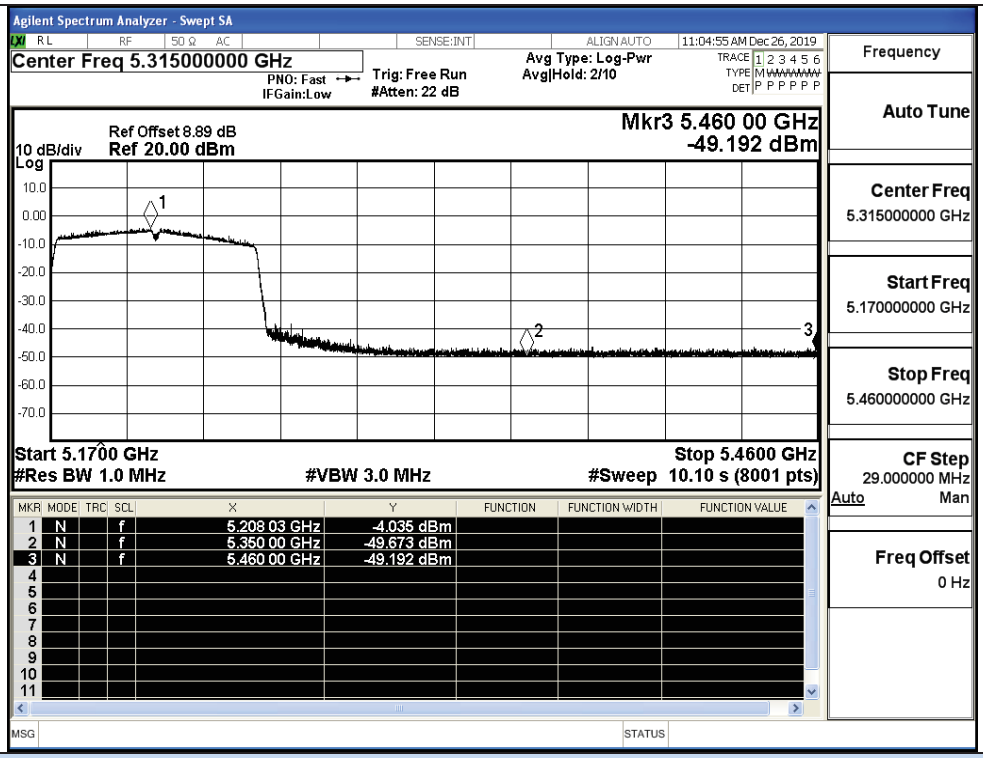

IEEE 802.11ac80 / Channel 42 / 5210MHz / Peak

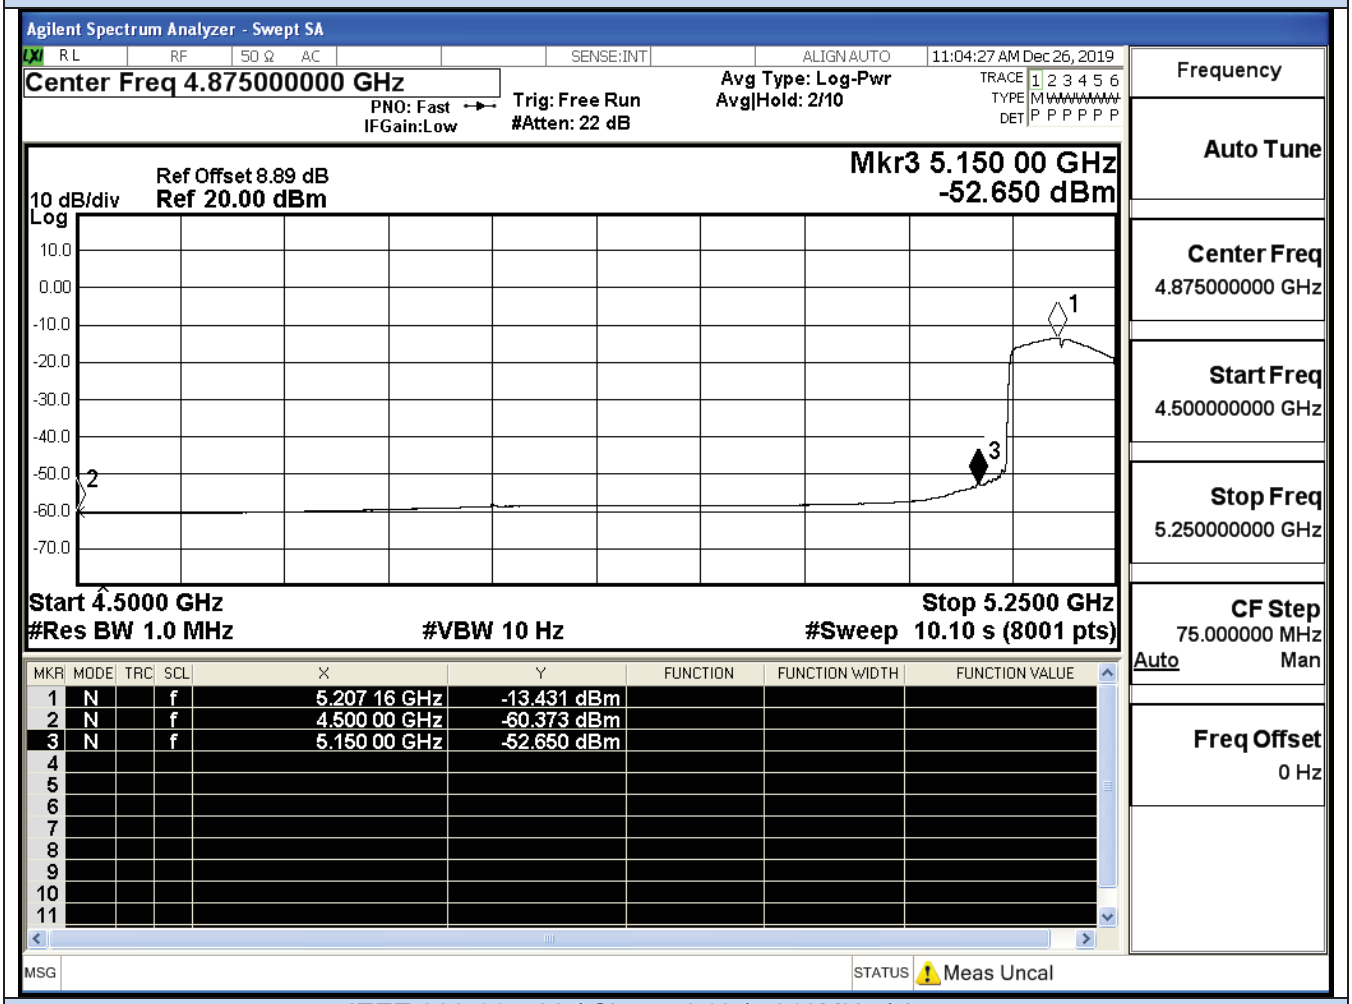

IEEE 802.11ac80 / Channel 42 / 5210MHz / Average

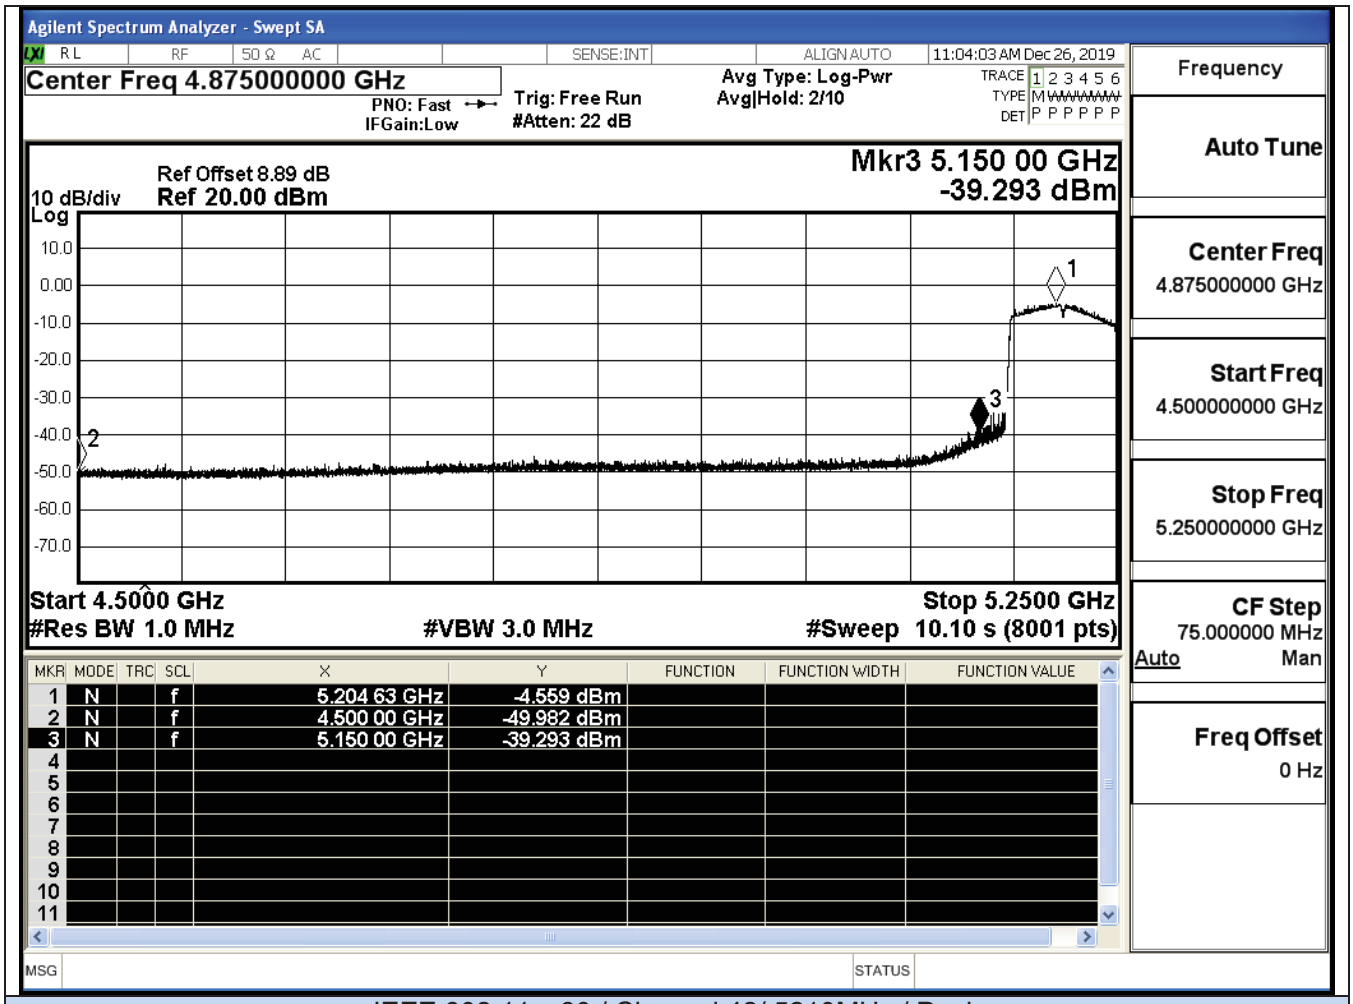

IEEE 802.11ac80 / Channel 42/ 5210MHz / Peak

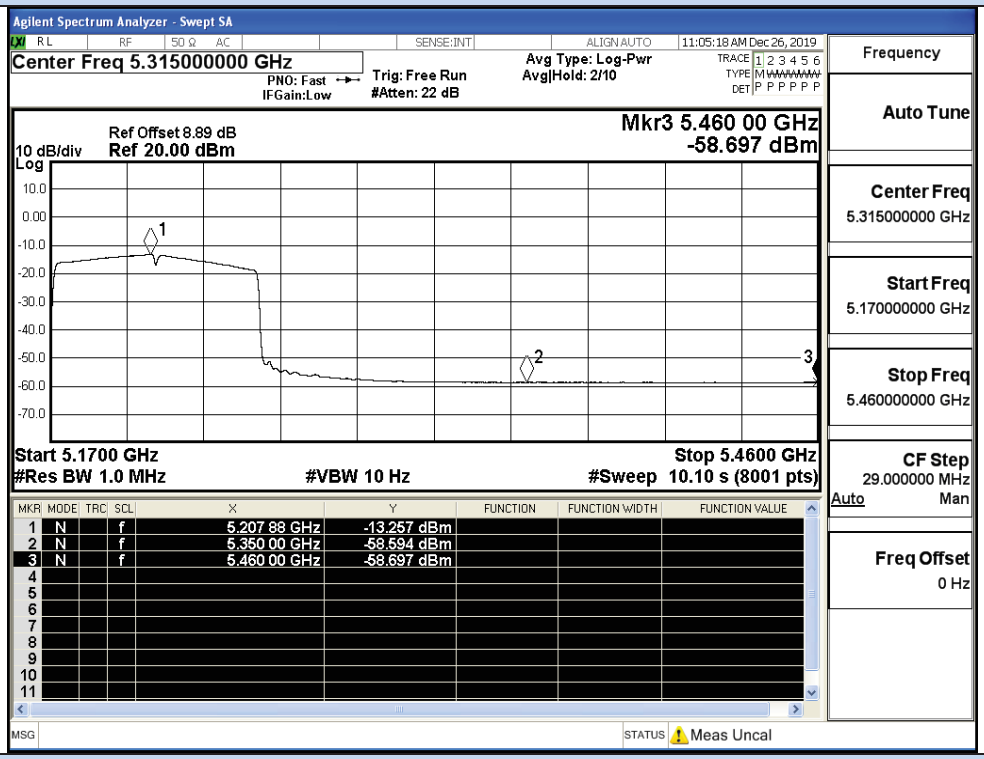

IEEE 802.11ac80 / Channel 42 / 5210MHz / Average