

# Test Report

**Report No.:** MTi210811012-01E2

**Date of issue:** Sept. 17, 2021

**Applicant:** Shenzhen Shi Aiker Electronic Technology Co., Ltd.

**Product:** Magnetic Wireless Power Bank

**Model(s):** KY300

**FCC ID:** 2AVG2-KY300

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

## Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

# Contents


<b>1</b>	<b>General Description .....</b>	<b>5</b>
1.1	Description of the EUT .....	5
1.2	Description of test modes .....	5
1.3	Description of support units .....	6
<b>2</b>	<b>Test facilities and accreditations .....</b>	<b>7</b>
2.1	Test laboratory .....	7
<b>3</b>	<b>List of test equipment .....</b>	<b>7</b>
<b>4</b>	<b>Test result.....</b>	<b>8</b>
4.2	Test setup .....	9
4.3	Test Procedures.....	10
4.4	Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03r01 .....	10
4.5	Test results .....	12
	<b>Photographs of the test setup.....</b>	<b>16</b>
	<b>Photographs of the EUT .....</b>	<b>16</b>

<b>Test Result Certification</b>	
<b>Applicant:</b>	<b>Shenzhen Shi Aiker Electronic Technology Co., Ltd.</b>
<b>Address:</b>	6th Floor, Building C, No. 9 East, Shangxue Technology Industrial City, Xinxue Community, Bantian Street, Longgang District, Shenzhen
<b>Manufacturer:</b>	<b>Shenzhen Shi Aiker Electronic Technology Co., Ltd.</b>
<b>Address:</b>	6th Floor, Building C, No. 9 East, Shangxue Technology Industrial City, Xinxue Community, Bantian Street, Longgang District, Shenzhen
<b>Product description</b>	
<b>Product name:</b>	Magnetic Wireless Power Bank
<b>Trademark:</b>	N/A
<b>Model name:</b>	KY300
<b>Serial Model:</b>	KY300-1, KY300-2, KY300-3
<b>Standards:</b>	FCC CFR 47 PART 1, § 1.1310
<b>Test method:</b>	KDB 680106 v03r01
<b>Date of Test</b>	
<b>Date of test:</b>	2021-08-23 ~ 2021-09-15
<b>Test result:</b>	Pass

**Test Engineer :**

---

(Yanice Xie)

**Reviewed By: :**

---

(Leon Chen)

**Approved By: :**

---

(Tom Xue)

# 1 General Description

## 1.1 Description of the EUT

Product name:	Magnetic Wireless Power Bank
Model name:	KY300
Series Model:	KY300-1, KY300-2, KY300-3
Model difference:	All the models are the same circuit and RF module, except the colors are different.
Electrical rating:	Input: DC 5V/2A, 9V/2A Wireless output: 15W/10W/7.5W/5W
Accessories:	USB-A to USB-C cable (0.35m)
<b>RF specification:</b>	
Operation frequency:	115 kHz – 205 kHz
Modulation type:	ASK
Antenna type:	Coil Antenna

## 1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
<b>For mobile exposure conditions</b>	
Mode 1	Stand-by mode
Mode 2	Operating mode (load: 5W)
Mode 3	Operating mode (load: 7.5W)
Mode 4	Operating mode (load: 10W)
Mode 5	Operating mode (load: 15W)
<b>The test data only show worst test mode: Mode 5</b>	
<b>For portable exposure conditions</b>	
Mode 1	Stand-by mode
Mode 2	Operating mode (load: 5W)
Mode 3	Operating mode (load: 7.5W)
Mode 4	Operating mode (load: 10W)
Mode 5	Operating mode (load: 15W)
<b>The test data only show worst test mode: Mode 5</b>	

### 1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Mobile Phone	iPhone12		APPLE
Mobile Phone	S9	/	Samsung
Mobile Phone	ELS-AN400	MDX0220902011546	Huawei
Adapter	HW-090200CH0	/	Huizhou BYD Electronics Co., Ltd.
Support cable list			
Description	Length (m)	From	To
/	/	/	/

### 1.4 Measurement uncertainty

Measurement	Uncertainty
Electric field strength (9kHz ~ 30MHz)	± 1.8 dB
Magnetic field strength (9kHz ~ 30MHz)	± 1.8 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2 Test facilities and accreditations

### 2.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

## 3 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E115	Electric and Magnetic Field Probe – Analyzer	Narda	EHP-200A	101166	2021/06/02	2022/06/01

## 4 Test result

### 4.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

**Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)**

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(i) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
<b>(ii) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz

\* = Plane-wave equivalent power density


**Note 1:** Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

**Note 2:** General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.




### 4.2 Test setup

For mobile exposure conditions:

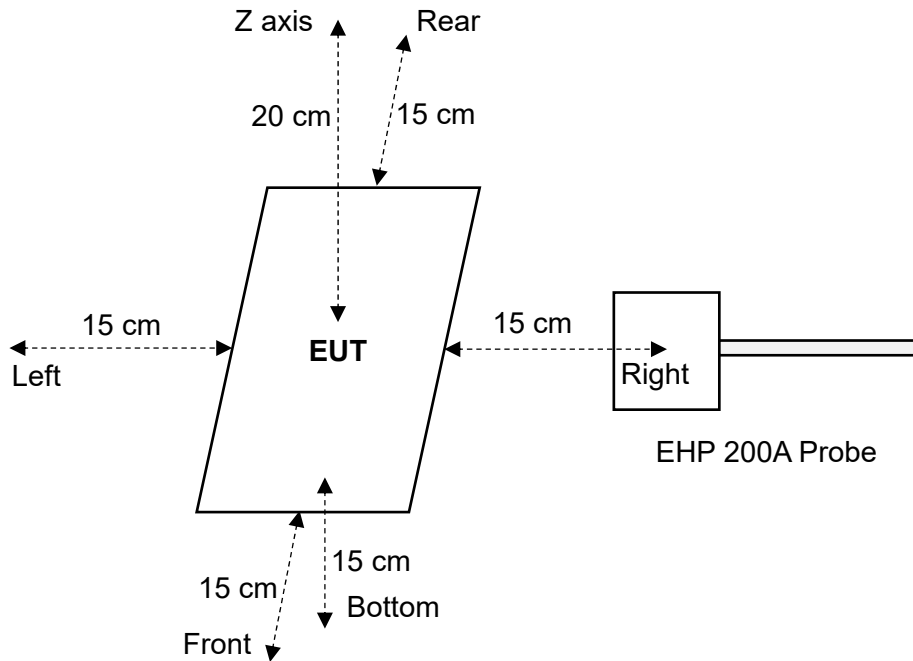

For portable exposure conditions:

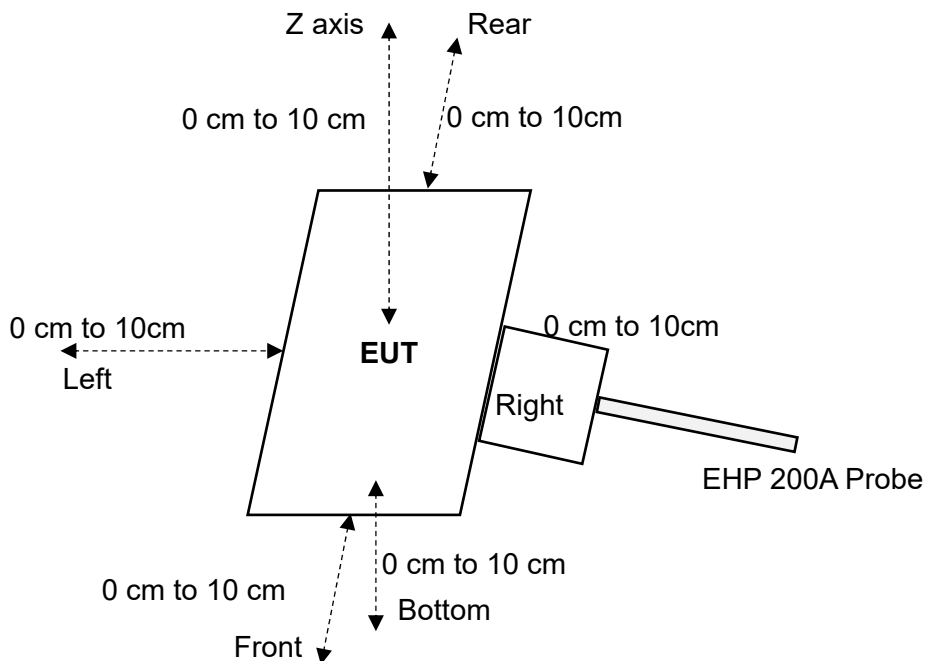

### 4.3 Test Procedures

For mobile exposure conditions:

- a. The RF exposure test was performed in anechoic chamber.
- b. E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the EUT and 20 cm above the top surface of the primary/client pair.
- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the dictates of KDB 680106 v03r01.

For portable exposure conditions:

- a. The RF exposure test was performed in anechoic chamber.
- b. Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 10 cm

**4.4 Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03r01**

Requirement	Device
1. Power transfer frequency is less than 1 MHz.	Yes. The operating frequencies: 115 kHz – 205 kHz
2. Output power from each primary coil is less than or equal to 15 watts	Yes. The output power: Mobile exposure conditions: 15W/10W/7.5W/5W Portable exposure conditions: 15W/10W/7.5W/5W
3. The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	Yes. The EUT have a source primary coil.
4. Client device is placed directly in contact with the transmitter.	Yes. The client device is placed directly in contact with the transmitter.
5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No. there are portable exposure conditions for the EUT.
6. The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	Yes. and H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 10 cm were also evaluated for portable use condition.

#### 4.5 Test results

##### 4.5.1 Mobile exposure conditions

###### Test condition 1: Mode 5 operating mode with client device (1 % battery status of client device)

Antenna	Probe Position	E -field (V/m)			H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
1	Z axis	0.4175	614	0.08%	0.0513	1.63	4.28%
	Left	0.4545			0.0518		
	Right	0.3894			0.0697		
	Front	0.3760			0.0501		
	Rear	0.5005			0.0513		
	Bottom	0.3617			0.0488		

###### Test condition 2: Mode 5 operating mode with client device (50 % battery status of client device)

Antenna	Probe Position	E -field (V/m)			H-field (A/m)		
		Measurement	Limit	Percentage (%)	Measurement	Limit	Max. Percentage (%)
1	Z axis	0.4089	614	0.07%	0.0513	1.63	4.46%
	Left	0.4175			0.0727		
	Right	0.3909			0.0513		
	Front	0.3611			0.0513		
	Rear	0.3894			0.0478		
	bottom	0.3922			0.0510		

###### Test condition 3: Mode 5 operating mode with client device (99 % battery status of client device)

Antenna	Probe Position	E -field (V/m)			H-field (A/m)		
		Measurement	Limit	Percentage (%)	Measurement	Limit	Max. Percentage (%)
1	Z axis	0.3546	614	0.06%	0.0608	1.63	3.73%
	Left	0.3525			0.0505		
	Right	0.3651			0.0513		
	Front	0.3445			0.0517		
	Rear	0.3740			0.0540		
	bottom	0.3466			0.0494		

#### 4.5.2 Portable exposure conditions

**Note:** operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.

**Test condition 1: Mode 5 operating mode with client device (1 % battery status of client device)**  
**-test distance: 0cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.7913	1.63	48.55%
	Left	0.4595		
	Right	0.5502		
	Front	0.2505		
	Rear	0.2590		
	Bottom	0.3038		

**Test condition 2: Mode 5 operating mode with client device (1 % battery status of client device)**  
**-test distance: 2cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.6144	1.63	37.69%
	Left	0.2429		
	Right	0.1969		
	Front	0.1991		
	Rear	0.1923		
	Bottom	0.1973		

**Test condition 3: Mode 5 operating mode with client device (1 % battery status of client device)  
 -test distance: 4cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.1909	1.63	11.71%
	Left	0.1851		
	Right	0.1598		
	Front	0.1801		
	Rear	0.1673		
	Bottom	0.1509		

**Test condition 4: Mode 5 operating mode with client device (1 % battery status of client device)  
 -test distance: 6cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.1074	1.63	6.59%
	Left	0.1038		
	Right	0.1005		
	Front	0.1021		
	Rear	0.0915		
	Bottom	0.1005		

**Test condition 5: Mode 5 operating mode with client device (1 % battery status of client device)  
 -test distance: 8cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0501	1.63	3.71%
	Left	0.0582		
	Right	0.0502		
	Front	0.0604		
	Rear	0.0505		
	Bottom	0.0490		

**Test condition 6: Mode 5 operating mode with client device (1 % battery status of client device)  
 -test distance: 10cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0465	1.63	3.08%
	Left	0.0502		
	Right	0.0493		
	Front	0.0498		
	Rear	0.0478		
	Bottom	0.0474		

## Photographs of the test setup

See the APPENDIX - Test Setup Photos.

## Photographs of the EUT

See the APPENDIX - EUT Photos.

**----End of Report----**