



**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C REQUIREMENT**

*OF*

**Cooling Magnetic Wireless Charger**

**Model No.: TEC01, TEC02**

**Trademark: YOSTAND**

**FCC ID: 2AVG9-TEC0X**

**Report No.: E01A23060795F00301**

**Issue Date: July 18, 2023**

*Prepared for*

**Shenzhen Yostand Technology Co., Ltd.**

**Room 701, Building 1, Jiuzhou Industrial Park, No.10, 19th Tongguan  
Road, Tianliao Community, Yutang Street, Guangming District,  
Shenzhen, Guangdong, China**

*Prepared by*

**Dong Guan Anci Electronic Technology Co., Ltd.**

**1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake  
Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr.,  
China.**

**This report shall not be reproduced, except in full, without the written approval of  
Dong Guan Anci Electronic Technology Co., Ltd.**

**VERIFICATION OF COMPLIANCE**

Applicant:	Shenzhen Yostand Technology Co., Ltd. Room 701, Building 1, Jiuzhou Industrial Park, No.10, 19th Tongguan Road, Tianliao Community, Yutang Street,Guangming District,Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Yostand Technology Co., Ltd. Room 701, Building 1, Jiuzhou Industrial Park, No.10, 19th Tongguan Road, Tianliao Community, Yutang Street,Guangming District,Shenzhen, Guangdong, China
Factory:	Shenzhen Yostand Technology Co., Ltd. Room 701, Building 1, Jiuzhou Industrial Park, No.10, 19th Tongguan Road, Tianliao Community, Yutang Street,Guangming District,Shenzhen, Guangdong, China
Product Description:	Cooling Magnetic Wireless Charger
Trade Mark:	YOSTAND
Model Number:	TEC01, TEC02

**We hereby certify that:**

The above equipment was tested by Dong Guan Anci Electronic Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.209(2022).

Date of Test : July 4, 2023 to July 26, 2023

Prepared by : \_\_\_\_\_

Dyson Dai/Editor

Reviewer &  
Authorized Signer : \_\_\_\_\_

Tiger Xu/ Supervisor



## Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	E01A23060795F00301

## Table of Contents

<b>1 GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION .....	4
1.2 RELATED SUBMITTAL(S) / GRANT(S) .....	5
1.3 TEST METHODOLOGY .....	5
1.4 SPECIAL ACCESSORIES .....	5
1.5 EQUIPMENT MODIFICATIONS .....	5
1.6 TEST FACILITY.....	5
<b>2 SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
2.1 EUT CONFIGURATION .....	6
2.2 EUT EXERCISE .....	6
2.3 TEST PROCEDURE .....	6
2.4 CONFIGURATION OF TESTED SYSTEM.....	7
<b>3 SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>4 TEST SYSTEM UNCERTAINTY.....</b>	<b>8</b>
<b>5 CONDUCTED EMISSIONS TEST .....</b>	<b>9</b>
5.1 MEASUREMENT PROCEDURE .....	9
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	9
5.3 MEASUREMENT EQUIPMENT USED.....	9
5.4 CONDUCTED EMISSION LIMIT .....	9
5.5 MEASUREMENT RESULT .....	10
5.6 CONDUCTED MEASUREMENT PHOTO.....	13
<b>6 RADIATED EMISSION TEST.....</b>	<b>14</b>
6.1 MEASUREMENT PROCEDURE .....	14
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	14
6.3 MEASUREMENT EQUIPMENT USED.....	15
6.4 RADIATED EMISSION LIMIT .....	15
6.5 MEASUREMENT RESULT .....	17
6.6 RADIATED MEASUREMENT PHOTOS.....	23
<b>7 20DB BANDWIDTH.....</b>	<b>24</b>
7.1 20DB BANDWIDTH LIMIT .....	24
7.2 TEST INSTRUMENTS.....	24
7.3 TEST PROCEDURE .....	24
7.4 TEST SETUP.....	24
7.5 TEST RESULT .....	24
<b>8 ANTENNA APPLICATION .....</b>	<b>26</b>
8.1 ANTENNA REQUIREMENT .....	26
8.2 RESULT .....	26

# 1 General Information

## 1.1 Product Description

Characteristics	Description
Product Name	Cooling Magnetic Wireless Charger
Model number	TEC01, TEC02
Operation Mode	Wireless Charging
Input Rating	Type-C USB:5V/3A,9V/2.22A
Power Supply	DC 5V/DC 9V
Operating Frequency	110-205KHz
Wireless Charging Power	10W Max
Modulation Technique	ASK
Antenna Type	Coil Antenna
Sample receipt date	June 29, 2023

## 1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for FCC ID: 2AVG9-TECOX filing to comply with the FCC Part 15, Subpart C Rules.

## 1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

## 1.4 Special Accessories

Not available for this EUT intended for grant.

## 1.5 Equipment Modifications

Not available for this EUT intended for grant.

## 1.6 Test Facility

Site Description  
Name of Firm : Dong Guan Anci Electronic Technology Co., Ltd.  
Site Location : 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake Hi-tech Industrial Development Zone, Dongguan City, evelopment Zone, Dongguan City, Guangdong Pr., China.

## **2 System Test Configuration**

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **2.2 EUT Exercise**

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

### **2.3 Test Procedure**

#### **2.3.1 Conducted Emissions**

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

#### **2.3.2 Radiated Emissions**

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the fixed in a particular direction according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

## 2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

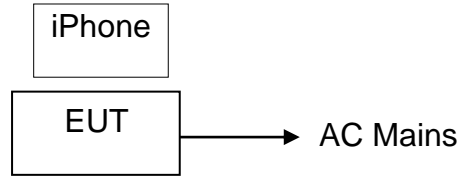


Table 2-1 Equipment Used in Tested System

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	Cooling Magnetic Wireless Charger	YOSTAND	TEC01	2AVG9-TEC0X	<b>EUT</b>
2.	iphone	Apple	A2176	N/A	<b>Support Equipment</b>

**Note:**

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

## 3 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.209	Radiated Emission	Compliant
§2.1049	20dB Bandwidth	Compliant
§15.203	Antenna Requirement	Compliant



## 4 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Remark: The coverage Factor ( $k=2$ ), and measurement Uncertainty for a level of Confidence of 95%

## 5 Conducted Emissions Test

### 5.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 5.2 Test SET-UP (Block Diagram of Configuration)

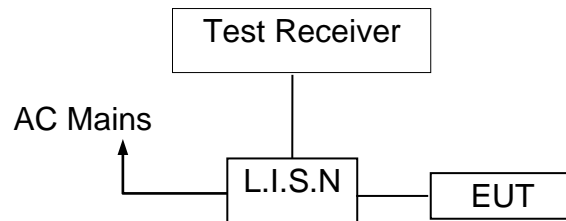

### 5.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Calibrated until
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-669	2024-05-09
10 db attenuator	JFW	50FP-010-H4	4360846-427-1	2024-05-09
RF Cable	N/A	N/A	2#	2024-05-09
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101358	2024-05-09
1# Shielded Room	chengyu	8m*4m*3.3m	N/A	2024-11-12
Test Software	Farad	EZ-EMC (Ver.ANCI-3A1)	N/A	N/A

### 5.4 Conducted Emission Limit

#### Conducted Emission

#### Frequency(MHz)

#### Quasi-peak

#### Average

0.15-0.5

66-56

56-46

0.5-5.0

56

46

5.0-30.0

60

50

**Note:** 1. The lower limit shall apply at the transition frequencies


2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

## 5.5 Measurement Result

Operation Mode:	TX	Test Date :	2023/07/06
Frequency Range:	0.15MHz~30MHz	Temperature :	26°C
Test Result:	PASS	Humidity :	54.3 %
Test By:	Vincent		


We pretested modes (Wireless Charging(10W), Wireless Charging(7.5W),Wireless Charging(5W)) for EUT. The worst test data see follow the table.

**Test mode: Wireless Charging 10W**

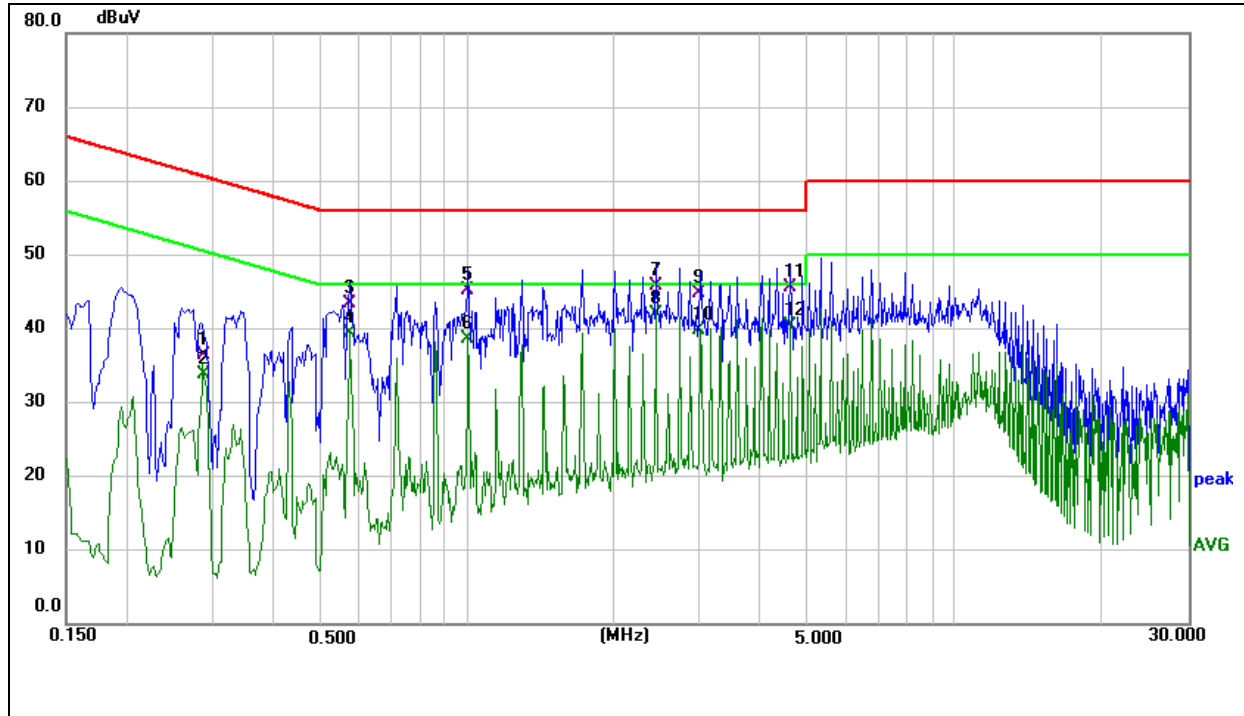

<b>Limit:</b>	<b>FCC Part 15 C Conduction(QP)</b>	<b>Phase:</b>	<b>L1</b>
<b>EUT:</b>	<b>Colling Magnetic Wireless Charger</b>	<b>Test Time:</b>	<b>2023/07/06</b>
<b>M/N.:</b>	<b>TEC01</b>	<b>Power Rating:</b>	<b>AC120V/60Hz</b>
<b>Mode:</b>	<b>Wireless Charging 10W</b>	<b>Test Engineer:</b>	<b>Vincent</b>

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.2878	26.36	10.14	36.50	60.59	-24.09	QP	
2	0.2878	23.68	10.14	33.82	50.59	-16.77	AVG	
3	0.5740	32.68	10.71	43.39	56.00	-12.61	QP	
4	0.5740	28.75	10.71	39.46	46.00	-6.54	AVG	
5	1.0020	35.49	9.61	45.10	56.00	-10.90	QP	
6	1.0020	29.02	9.61	38.63	46.00	-7.37	AVG	
7	2.4340	36.19	9.64	45.83	56.00	-10.17	QP	
8 *	2.4340	32.38	9.64	42.02	46.00	-3.98	AVG	
9	3.0059	35.07	9.65	44.72	56.00	-11.28	QP	
10	3.0059	30.23	9.65	39.88	46.00	-6.12	AVG	
11	4.5820	35.81	9.69	45.50	56.00	-10.50	QP	
12	4.5820	30.78	9.69	40.47	46.00	-5.53	AVG	

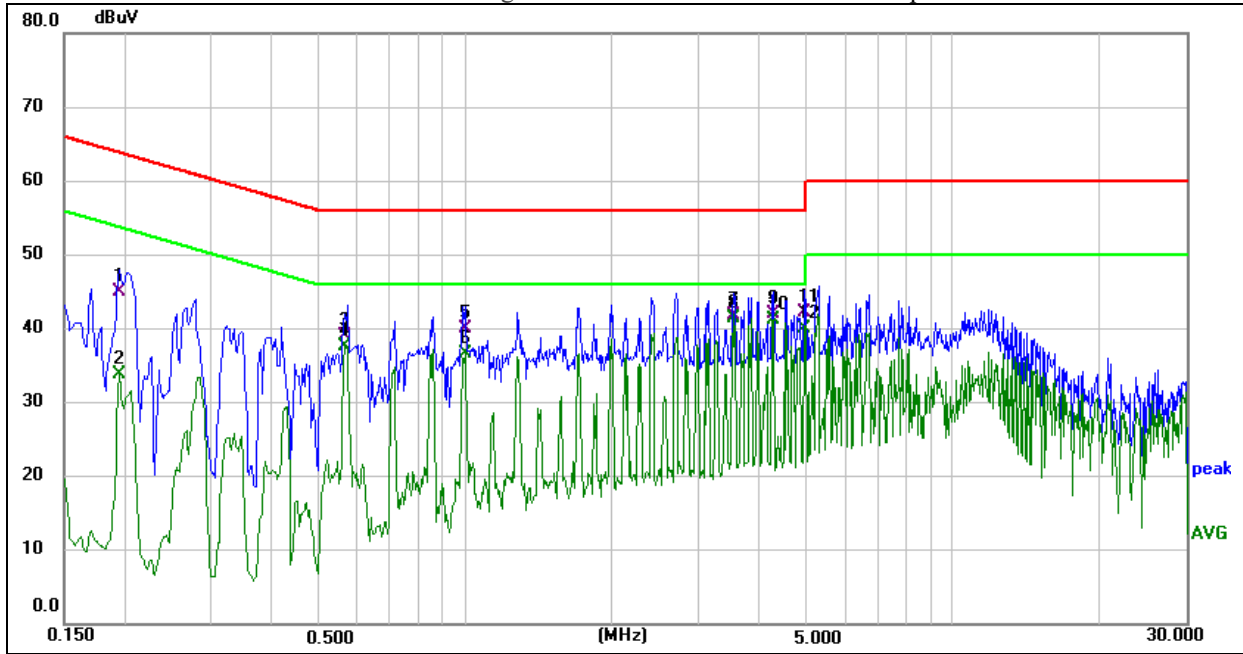

<b>Limit:</b>	<b>FCC Part 15 C Conduction(QP)</b>	<b>Phase:</b>	<b>L1</b>
<b>EUT:</b>	<b>Colling Magnetic Wireless Charger</b>	<b>Test Time:</b>	<b>2023/07/06</b>
<b>M/N.:</b>	<b>TEC01</b>	<b>Power Rating:</b>	<b>AC120V/60Hz</b>
<b>Mode:</b>	<b>Wireless Charging 10W</b>	<b>Test Engineer:</b>	<b>Vincent</b>

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1940	35.11	9.94	45.05	63.86	-18.81	QP	
2	0.1940	23.92	9.94	33.86	53.86	-20.00	AVG	
3	0.5660	28.25	10.71	38.96	56.00	-17.04	QP	
4	0.5660	26.99	10.71	37.70	46.00	-8.30	AVG	
5	0.9980	30.33	9.61	39.94	56.00	-16.06	QP	
6	0.9980	27.05	9.61	36.66	46.00	-9.34	AVG	
7	3.5580	32.14	9.66	41.80	56.00	-14.20	QP	
8 *	3.5580	31.66	9.66	41.32	46.00	-4.68	AVG	
9	4.2700	32.38	9.69	42.07	56.00	-13.93	QP	
10	4.2700	31.52	9.69	41.21	46.00	-4.79	AVG	
11	4.9380	32.48	9.70	42.18	56.00	-13.82	QP	
12	4.9380	30.24	9.70	39.94	46.00	-6.06	AVG	

### 5.6 Conducted Measurement Photo




## 6 Radiated Emission Test

### 6.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

### 6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

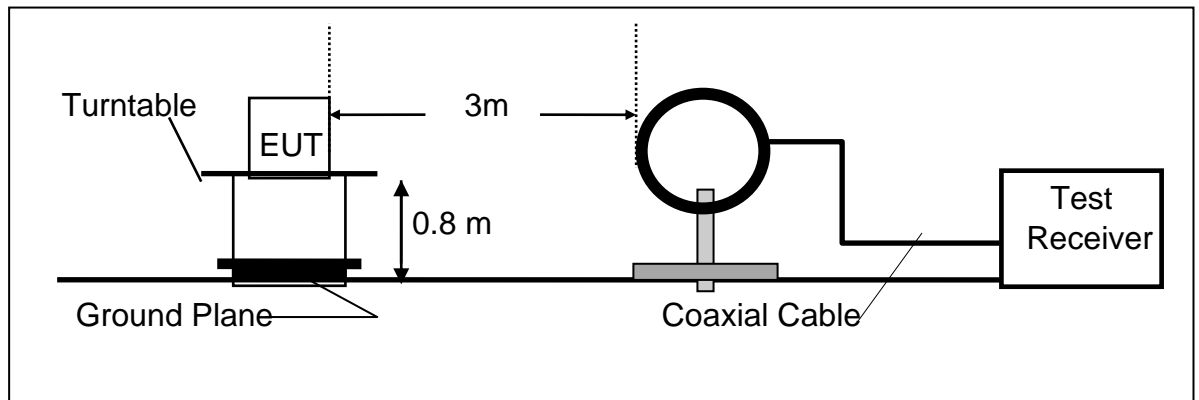

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

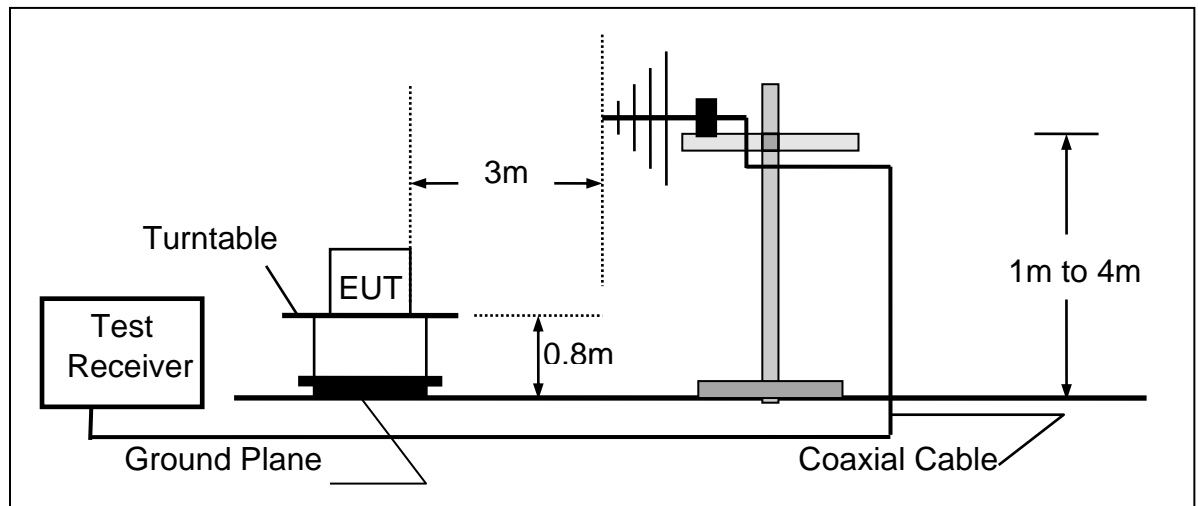

### 6.3 Measurement Equipment Used

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1.	EMI Test Receiver	Rohde & Schwarz	ESPI	100502	2023-10-07
2.	Pre-Amplifier	HP	8447D	2727A06172	2024-05-09
3.	Bilog Antenna	Schwarzbeck	VULB9163	VULB9163-588	2024-05-09
4.	Loop Antenna	Schwarzbeck	FMZB 1516	1516-141	2023-10-07
5.	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92 J-2m	N/A	2023-10-07
6.	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92 J-0.3m	N/A	2023-10-07
7.	RF Cable	N/A	N/A	6#	2024-05-09
8.	3m Semi-anechoic Chamber	chengyu	9m*6m*6m	N/A	2024-05-09
9.	Test Software	Farad	EZ-EMC Ver:ANCI-3A1	N/A	N/A

### 6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	$2400 / F(\text{KHz})$	300m	$10000 * 2400/F(\text{KHz})$	$20\log 2400/F(\text{KHz}) + 80$
0.490 – 1.705	$24000 / F(\text{KHz})$	30m	$100 * 24000/F(\text{KHz})$	$20\log 24000/F(\text{KHz}) + 40$
1.705 – 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 – 88.0	100	3m	100	$20\log 100$
88.0 – 216.0	150	3m	150	$20\log 150$
216.0 – 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$




## 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
  2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
  3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of  $\xi$  15.205, and the emissions located in restricted bands also comply with 15.209 limit.


### 6.5 Measurement Result

We pretested modes (Wireless Charging(10W), Wireless Charging(7.5W), Wireless Charging(5W)) for EUT. The worst mode (Wireless Charging(10W))test data see follow the table.

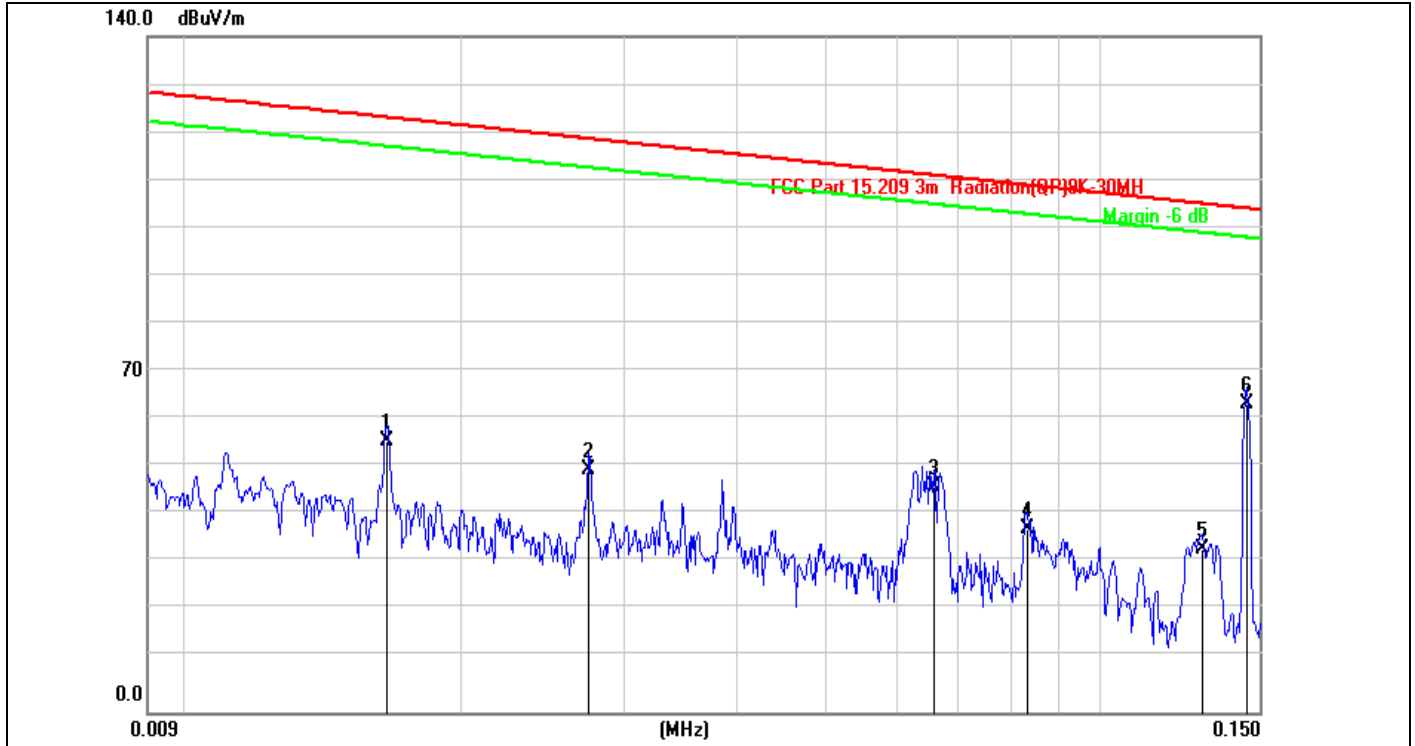

<b>Limit:</b>	FCC Part 15C 3m Radiation(QP)	<b>Antenna:</b>	Horizontal
<b>EUT:</b>	Coolong Magnetic Wireless Charger	<b>Temperature:</b>	24.3°C
<b>M/N.:</b>	TEC01	<b>Humidity:</b>	53.2%
<b>Mode:</b>	Wireless Charging 10W	<b>Power Rating:</b>	AC 120V/60Hz
<b>Test Engineer:</b>	Vincent	<b>Test Time:</b>	2023/07/17


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0165	35.99	20.34	56.33	123.24	-66.91	QP	100	236	
2	0.0275	29.96	20.18	50.14	118.80	-68.66	QP	100	254	
3	0.0658	27.15	19.70	46.85	111.23	-64.38	QP	100	120	
4	0.0833	18.25	19.71	37.96	109.18	-71.22	QP	100	103	
5	0.1296	14.01	19.64	33.65	105.35	-71.70	QP	100	271	
6 *	0.1450	44.24	19.64	63.88	104.37	-40.49	QP	100	152	

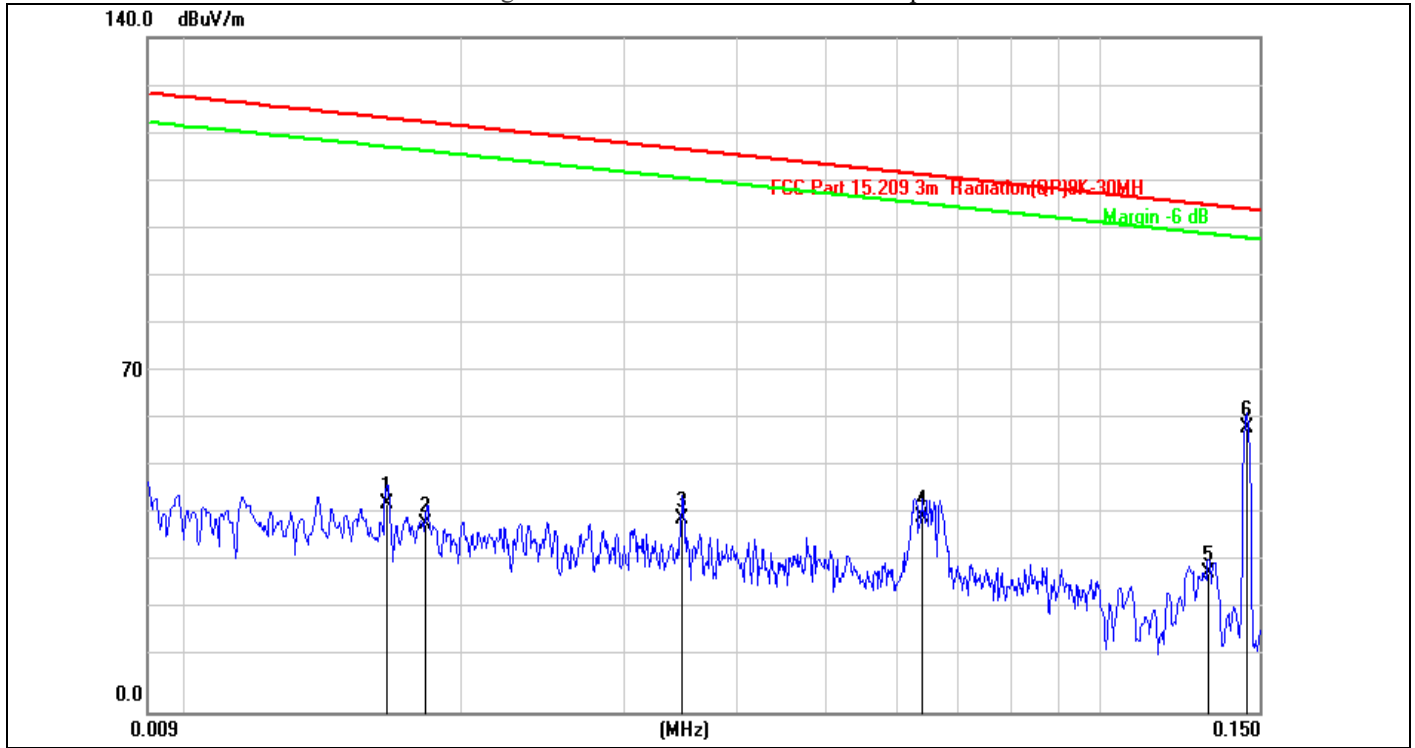

<b>Limit:</b>	FCC Part 15C 3m Radiation(QP)	<b>Antenna:</b>	Vertical
<b>EUT:</b>	Coolong Magnetic Wireless Charger	<b>Temperature:</b>	24.3°C
<b>M/N.:</b>	TEC01	<b>Humidity:</b>	53.2%
<b>Mode:</b>	Wireless Charging 10W	<b>Power Rating:</b>	AC 120V/60Hz
<b>Test Engineer:</b>	Vincent	<b>Test Time:</b>	2023/07/17


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0165	22.92	20.34	43.26	123.24	-79.98	QP	100	236	
2	0.0182	18.64	20.32	38.96	122.39	-83.43	QP	100	254	
3	0.0348	20.15	20.09	40.24	116.76	-76.52	QP	100	120	
4	0.0638	20.63	19.73	40.36	111.50	-71.14	QP	100	103	
5	0.1318	9.32	19.64	28.96	105.20	-76.24	QP	100	271	
6 *	0.1450	39.26	19.64	58.90	104.37	-45.47	QP	100	152	

- Note:**
- (1) All Readings are Peak Value.
  - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
  - (4) EUT lying on the table position is the worst case result in the report.

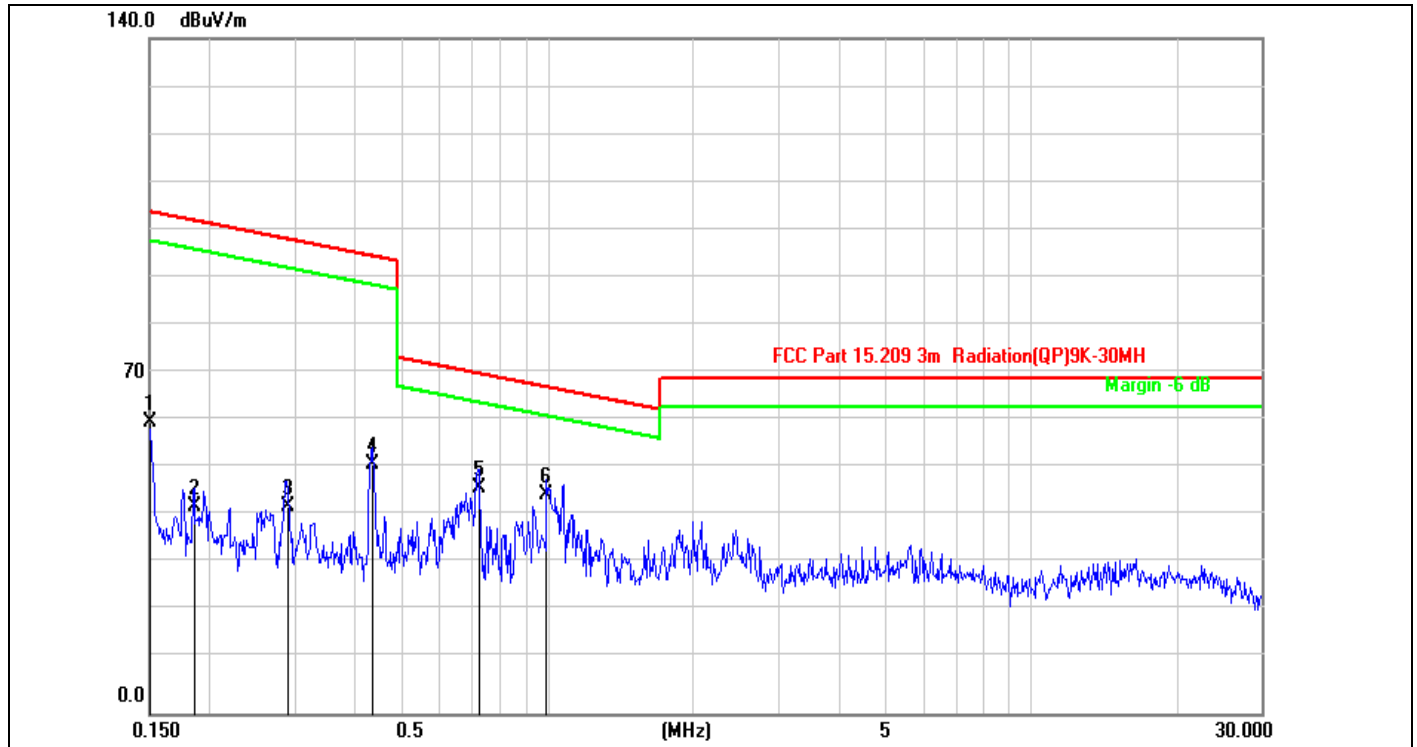

<b>Limit:</b>	FCC Part 15C 3m Radiation(QP)	<b>Antenna:</b>	Horizontal
<b>EUT:</b>	Coolong Magnetic Wireless Charger	<b>Temperature:</b>	24.3°C
<b>M/N.:</b>	TEC01	<b>Humidity:</b>	53.2%
<b>Mode:</b>	Wireless Charging 10W	<b>Power Rating:</b>	AC 120V/60Hz
<b>Test Engineer:</b>	Vincent	<b>Test Time:</b>	2023/07/17

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.1500	40.61	19.64	60.25	104.08	-43.83	QP	100	236	
2	0.1853	23.32	19.64	42.96	102.24	-59.28	QP	100	254	
3	0.2909	23.23	19.62	42.85	98.33	-55.48	QP	100	120	
4	0.4328	31.87	19.60	51.47	94.88	-43.41	QP	100	103	
5	0.7198	27.07	19.52	46.59	70.47	-23.88	QP	100	271	
6 *	0.9944	25.82	19.44	45.26	67.67	-22.41	QP	100	152	

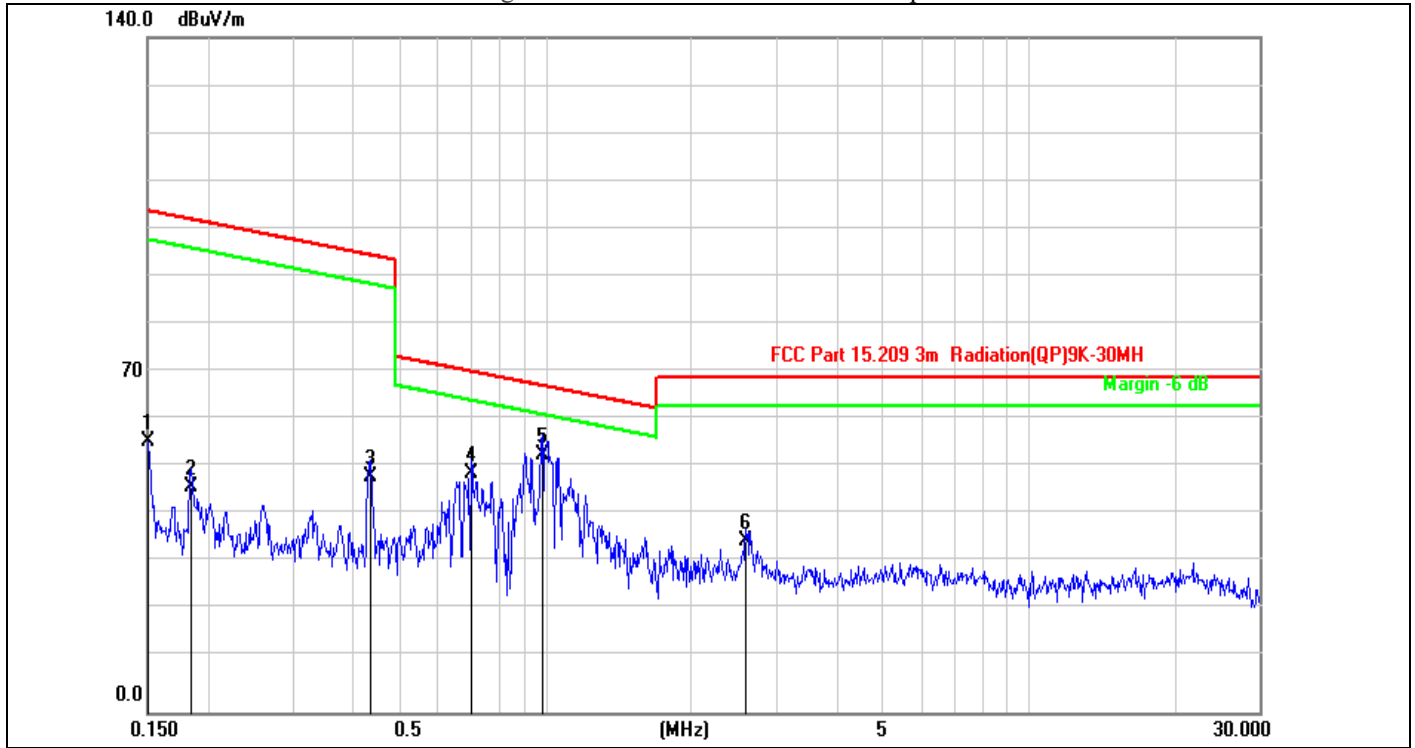


<b>Limit:</b>	FCC Part 15C 3m Radiation(QP)	<b>Antenna:</b>	Vertical
<b>EUT:</b>	Coolong Magnetic Wireless Charger	<b>Temperature:</b>	24.3°C
<b>M/N.:</b>	TEC01	<b>Humidity:</b>	53.2%
<b>Mode:</b>	Wireless Charging 10W	<b>Power Rating:</b>	AC 120V/60Hz
<b>Test Engineer:</b>	Vincent	<b>Test Time:</b>	2023/07/17

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.1500	36.71	19.64	56.35	104.08	-47.73	QP	100	236	
2	0.1844	27.21	19.64	46.85	102.28	-55.43	QP	100	254	
3	0.4328	29.36	19.60	48.96	94.88	-45.92	QP	100	120	
4	0.7010	30.15	19.53	49.68	70.70	-21.02	QP	100	103	
5 *	0.9839	34.02	19.45	53.47	67.76	-14.29	QP	100	271	
6	2.5945	16.03	19.59	35.62	69.50	-33.88	QP	100	152	


- Note:**
- (1) All Readings are Peak Value.
  - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
  - (4) EUT lying on the table position is the worst case result in the report.

We pretested modes (Wireless Charging(10W),Wireless Charging(7.5W),Wireless Charging(5W)) for EUT. The worst test data(Wireless Charging(10W)) see follow the table.

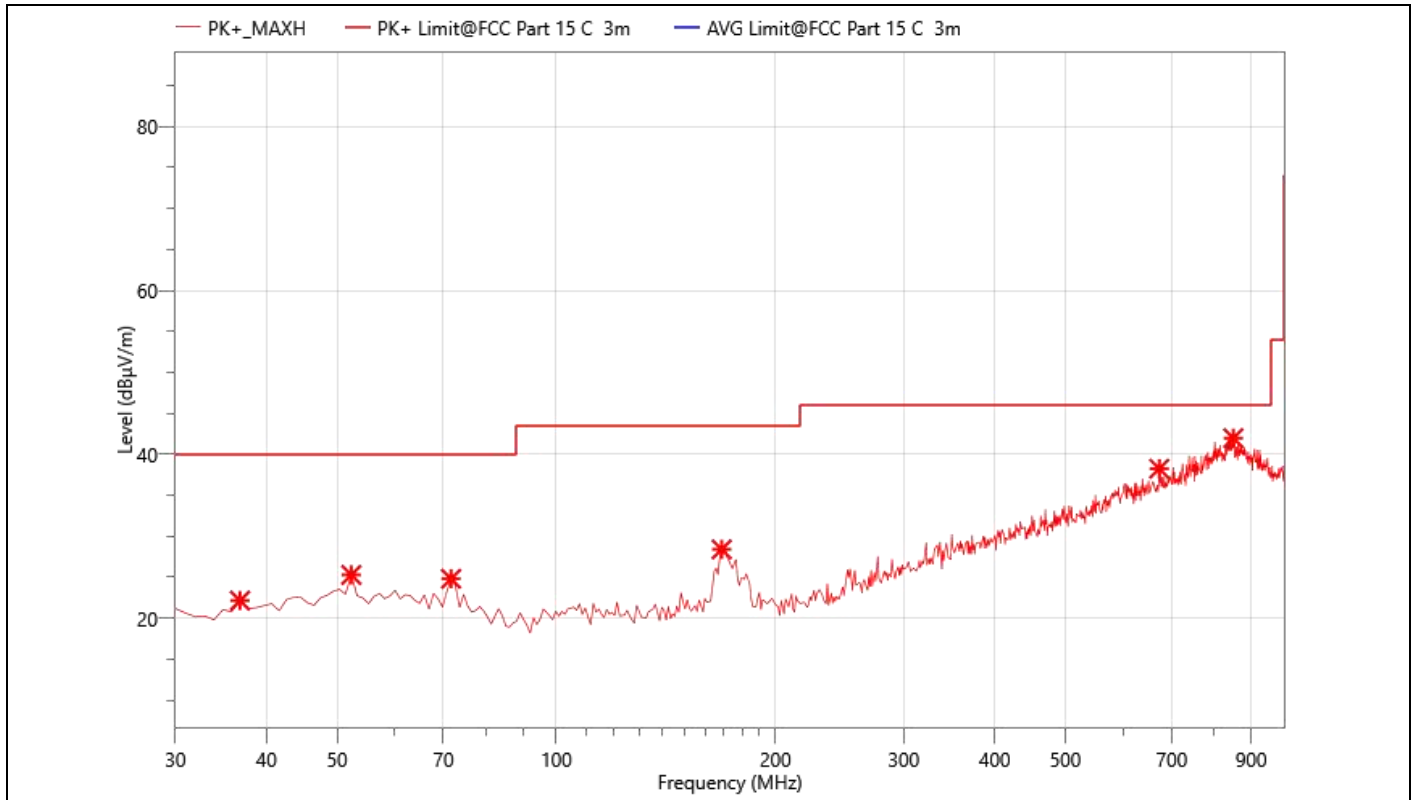

<b>Limit:</b>	<b>FCC Part 15C 3m Radiation(QP)</b>	<b>Antenna:</b>	<b>Horizontal</b>
<b>EUT:</b>	<b>Coolong Magnetic Wireless Charger</b>	<b>Temperature:</b>	<b>24.3°C</b>
<b>M/N.:</b>	<b>TEC01</b>	<b>Humidity:</b>	<b>54%RH</b>
<b>Mode:</b>	<b>Wireless Charging 10W</b>	<b>Power Rating:</b>	<b>AC 120V/60Hz</b>
<b>Test Engineer:</b>	<b>Big</b>	<b>Test Time:</b>	<b>2023/07/12</b>

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	36.790	27.40	-5.26	22.14	40.00	17.86	QP	100	45	
2	52.310	28.65	-3.38	25.27	40.00	14.73	QP	100	45	
3	71.710	29.88	-5.07	24.81	40.00	15.19	QP	100	27	
4	168.710	33.74	-5.35	28.39	43.50	15.11	QP	100	27	
5	673.110	28.77	9.47	38.24	46.00	7.76	QP	100	96	
6 *	850.620	28.16	13.81	41.97	46.00	4.03	QP	100	96	

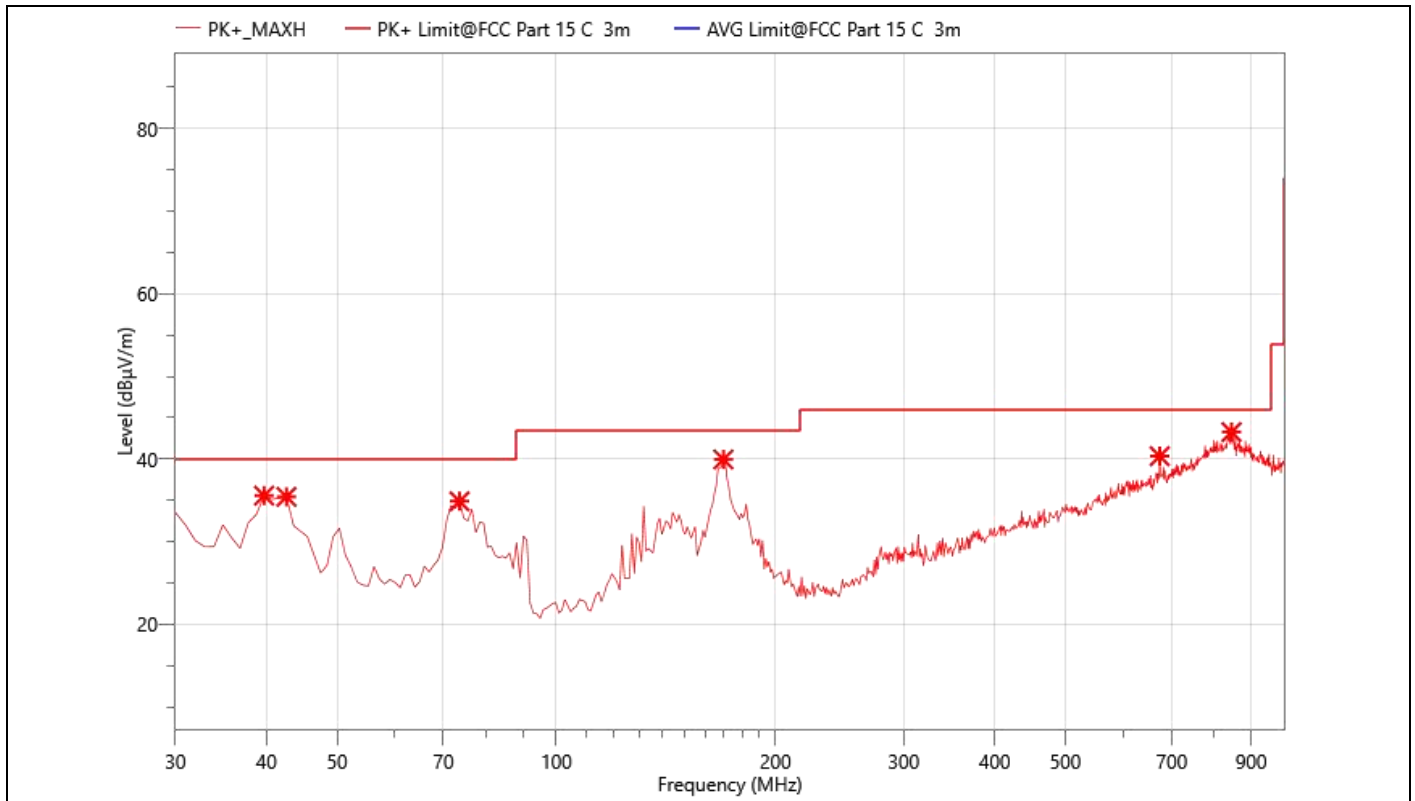

<b>Limit:</b>	<b>FCC Part 15C 3m Radiation(QP)</b>	<b>Antenna:</b>	<b>Vertical</b>
<b>EUT:</b>	<b>Coolong Magnetic Wireless Charger</b>	<b>Temperature:</b>	<b>24.3°C</b>
<b>M/N.:</b>	<b>TEC01</b>	<b>Humidity:</b>	<b>54%RH</b>
<b>Mode:</b>	<b>Wireless Charging 10W</b>	<b>Power Rating:</b>	<b>AC 120V/60Hz</b>
<b>Test Engineer:</b>	<b>Big</b>	<b>Test Time:</b>	<b>2023/07/12</b>

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	39.700	40.35	-4.77	35.58	40.00	4.42	QP	100	45	
2	42.610	39.90	-4.46	35.44	40.00	4.56	QP	100	45	
3	73.650	40.11	-5.21	34.90	40.00	5.10	QP	100	27	
4	169.680	45.40	-5.44	39.96	43.50	3.54	QP	100	27	
5	674.080	30.80	9.55	40.35	46.00	5.65	QP	100	96	
6 *	845.770	29.27	14	43.27	46.00	2.73	QP	100	96	

### 6.6 Radiated Measurement Photos

9kHz-30MHz



30MHz-1GHz





## 7 20db Bandwidth

### 7.1 20dB Bandwidth Limit

None: for reporting purposed only.


### 7.2 Test Instruments

Refer a test equipment and calibration data table in this test report.

### 7.3 Test Procedure

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1KHz RBW and 3KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


### 7.4 Test Setup



### 7.5 Test Result

Frequency (KHz)	20dB Bandwidth (KHz)	Results
128	2.697	PASS

### 20 dB Bandwidth Test plot

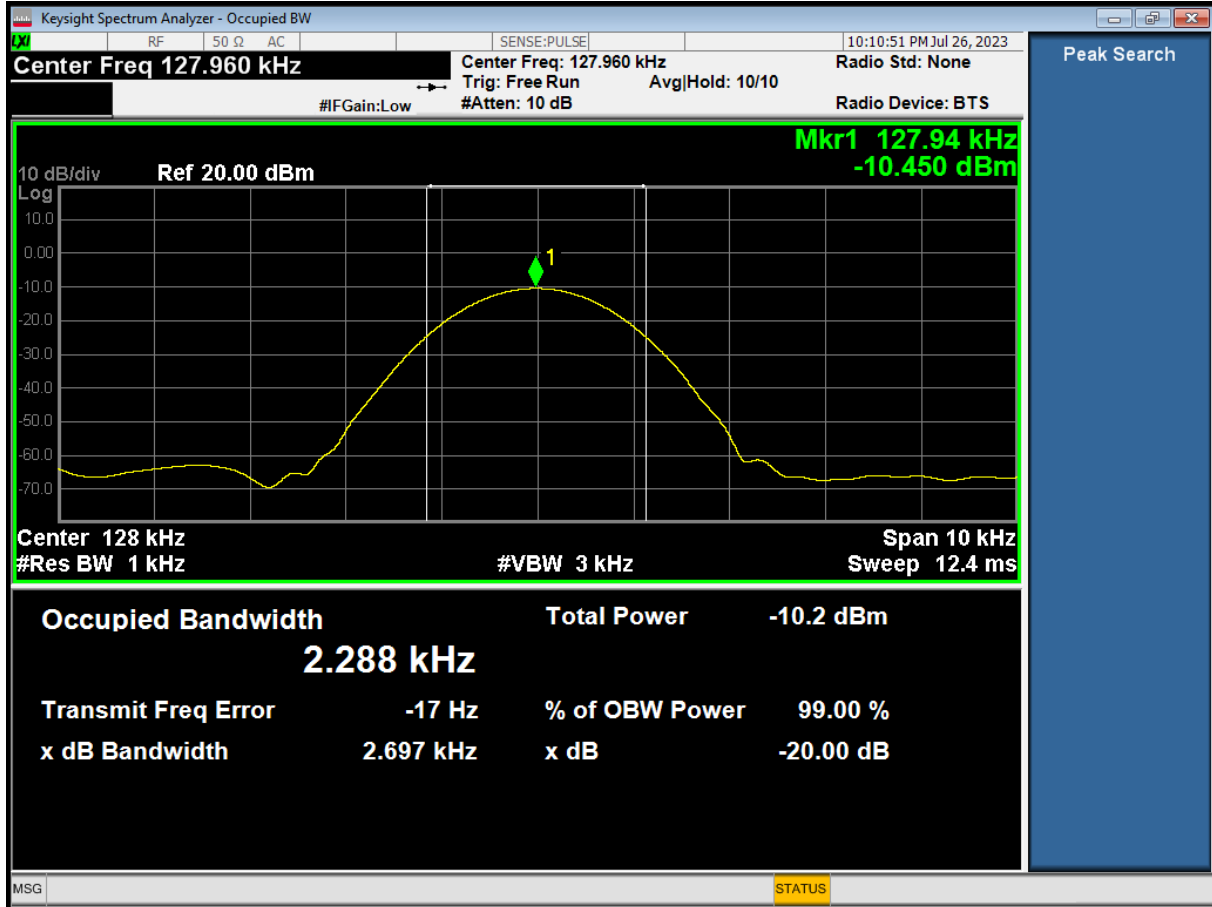

## **8 Antenna Application**

### **8.1 Antenna requirement**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **8.2 Result**

The EUT's antenna, permanent attached antenna, used an Induction coil and integrated on PCB, The antenna's gain meets the requirement.

## APPENDIX (Photos of EUT)

**External-1**



TEC01

**External-2**



TEC01



**External-3**




TEC01

**External-4**



TEC01

**External-5**

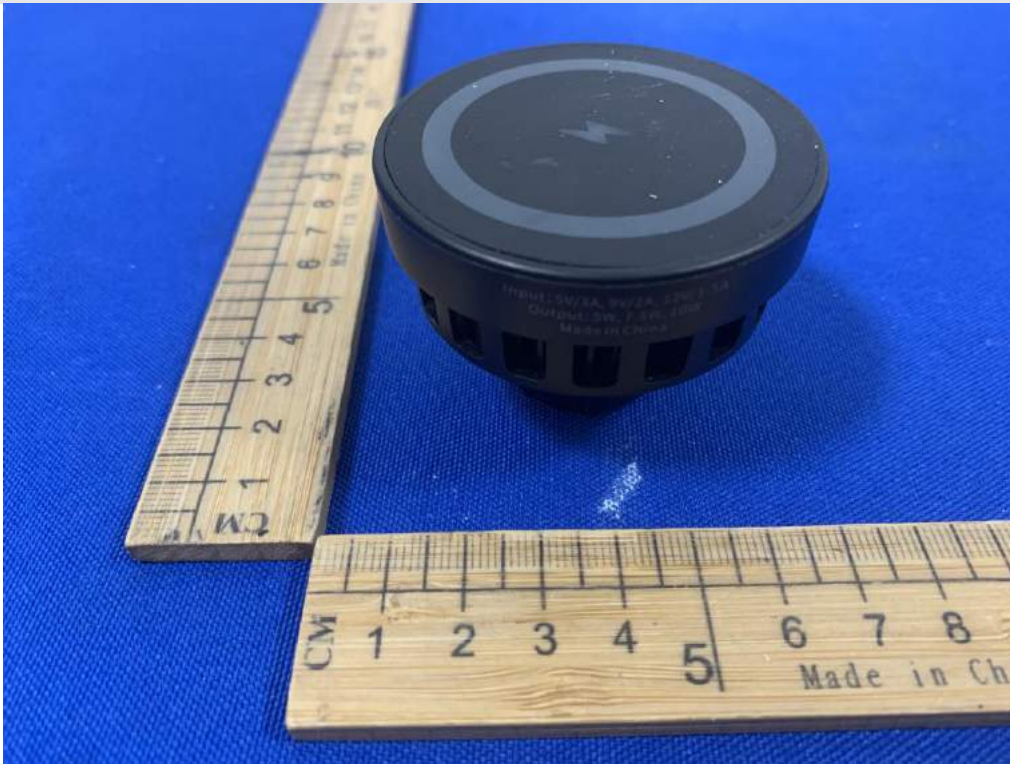

TEC01


**External-6**



TEC01



**External-7**

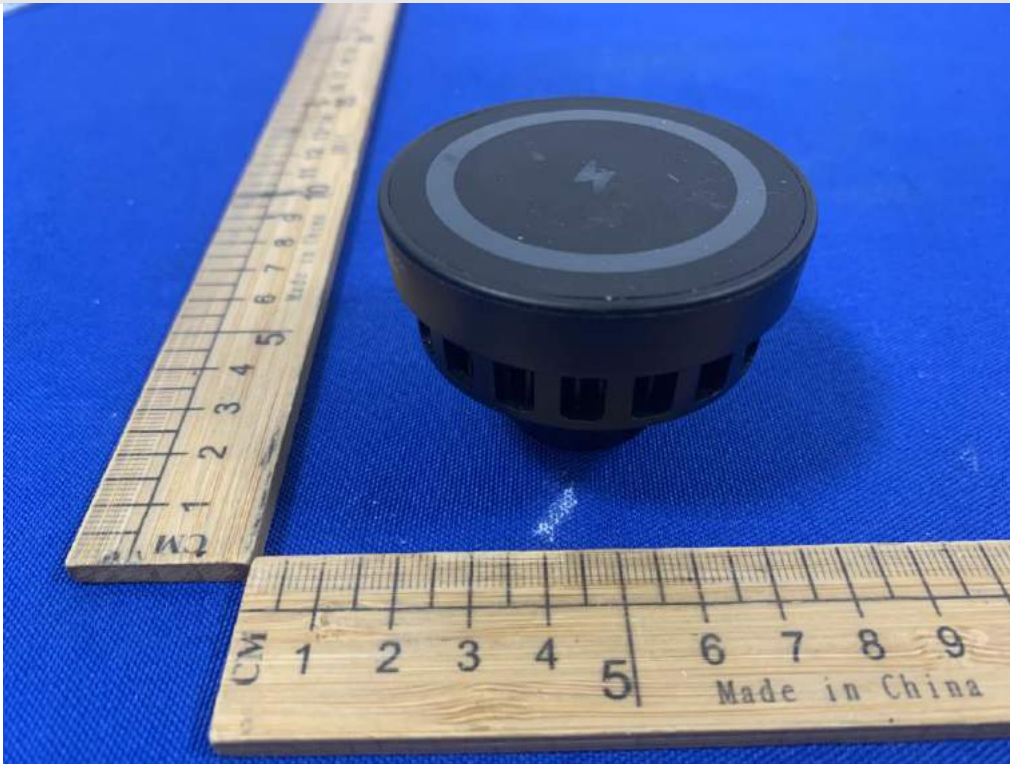

TEC01

**External-8**



TEC02



**External-9**



TEC02

**External-10**



TEC02

**External-11**



TEC02

**External-12**



TEC02



**External-13**



TEC02

**External-14**




TEC02

**Internal-1**



**Internal-2**

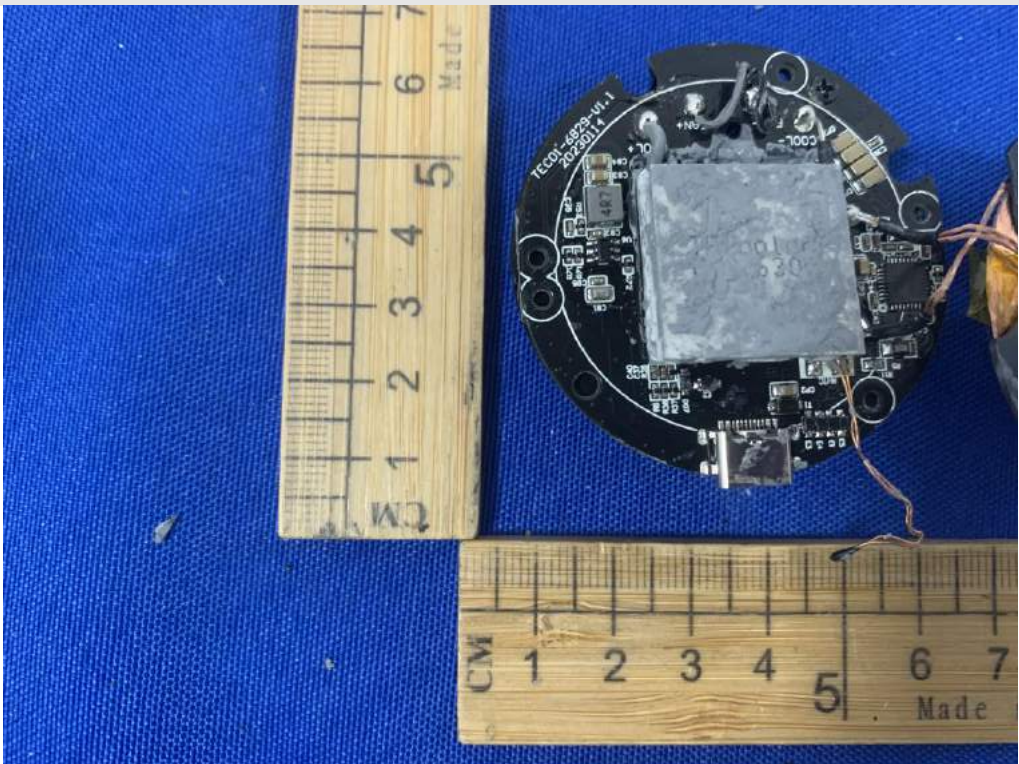




**Internal-3**



**Internal-4**

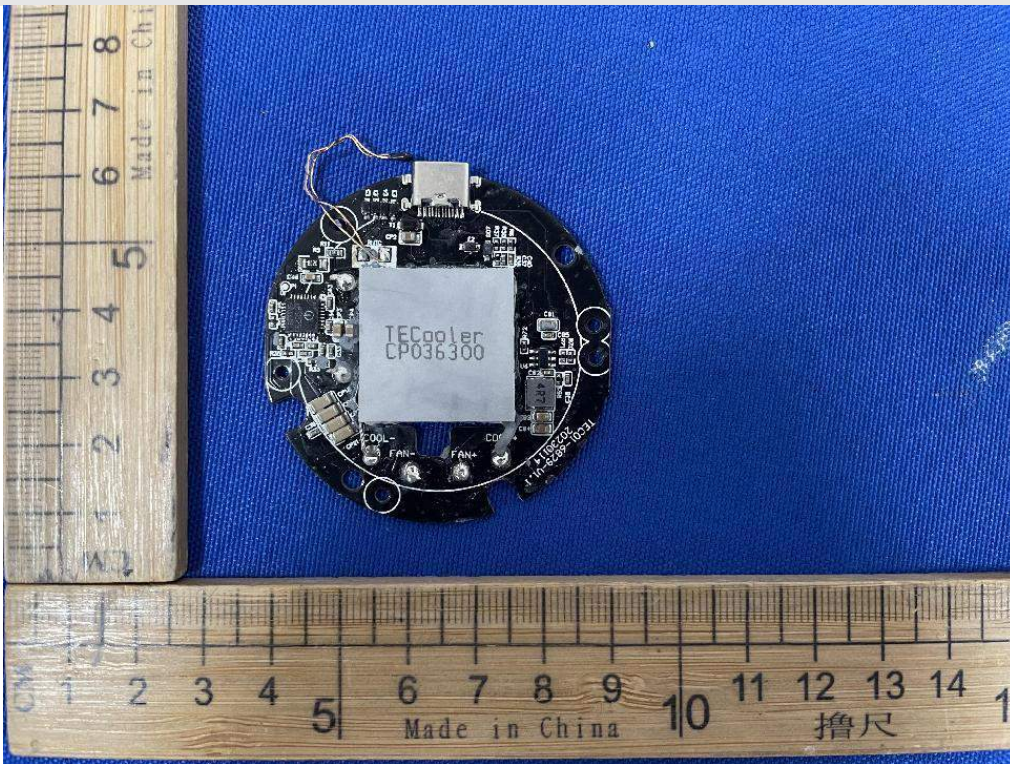




**Internal-5**



**Internal-6**

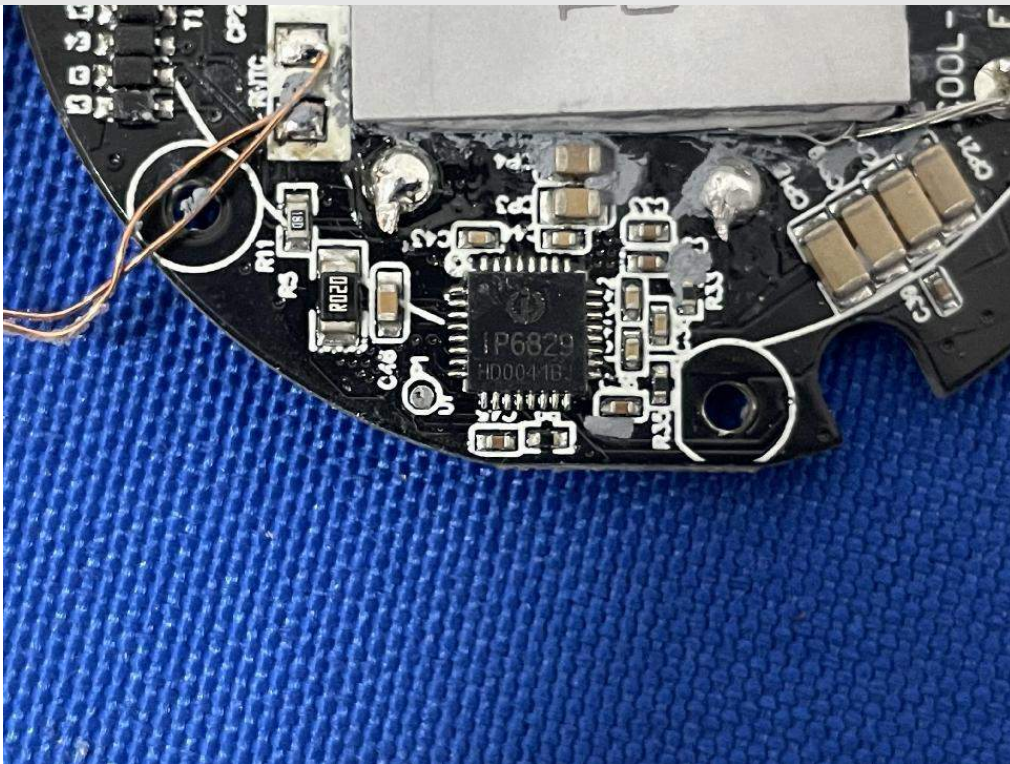

**--- END OF REPORT---**