



	TW600 Antenna	
Date of Issue: 2024-05-17		
Page (1) of (12)	iTd Drawing # 20240517	Revision #: Initial Release

Source Control Drawing

Part Description:	Bluetooth TWS headset
iTD Part Number:	TW600Antenna
iTD Software version	XHY-TW600-BT-V6.2
iTD Hardware version	

Customer Approval

(Please return this copy as a certification of your approval)

Approved by:	
Approval Date:	
Company Seal:	

PROPRIETARY NOTICE

These documents, and the contained information herein, are proprietary and are not to be reproduced, used or disclosed to others for manufacture or for any other purpose, except as specifically authorized, in writing, by iTD Corporation.



iTD Contact Information:

Eric Lin

Mb: 15060807099

Email: ljw@itdtek.com



Add: RongChenDaChuang building room 302, Dabao Road, Xin 'an Street 28, Bao An District, Shenzhen City

	TW600 Antenna	
Date of Issue: 2024-05-17		 ESD Sensitive
Page (2) of (12)	iTD Drawing # 20240517	Revision #: Initial Release

Number	Effective date	Change record
V1.0	2024-05-17	Initial release

1, The basic parameters:

A. Electrical Characteristics	
Frequency	2400MHZ~2500MHZ
VSWR	< 2.5
Avg Efficiency	25%
Impedance	50 ± 25 Ohm
Polarization	Linear
Peak Gain	2.4G:-0.51 dBi
B. Material & Mechanical Characteristics	
Material of Radiator	FPC black
Cable Type	/
Connector Type	/
Dimension	/
C. Environmental	
Operation Temperature	- 20 °C ~ + 60 °C
Storage Temperature	- 30 °C ~ + 70 °C

	TW600 Antenna	
Date of Issue: 2024-05-17		
<i>Page (3) of (12)</i>	iTD Drawing # 20240517	Revision #: Initial Release

--	--



2,Electrical Specification :

Those specifications were specially defined for TW600 model.


3, VSWR

1 Measuring Method


- 1.A 50Ωcoaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR
- 2.Keeping this jig away from metal at least 20cm

	TW600 Antenna	
Date of Issue: 2024-05-17		 ESD Sensitive
Page (4) of (12)	iTD Drawing # 20240517	Revision #: Initial Release

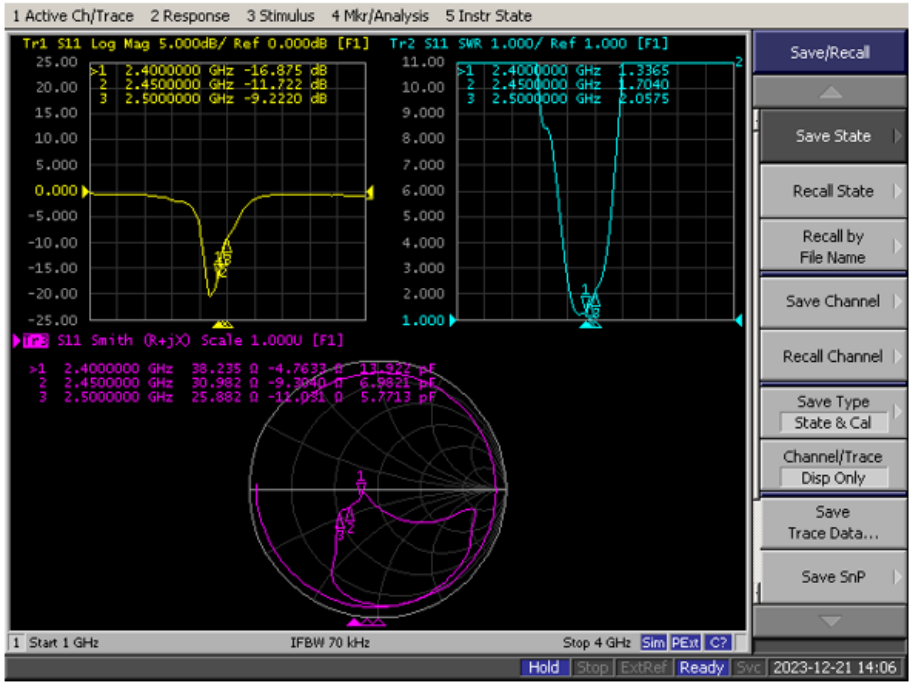

1. Return Loss&VSWR-L

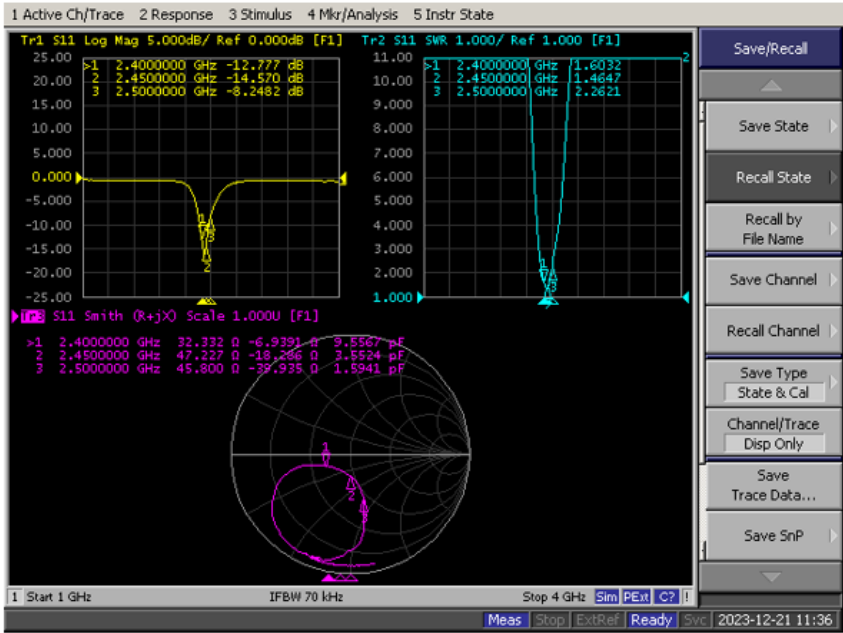

2. Return Loss&VSWR-R



4, Anechoic chamber

	TW600 Antenna	 RoHS Compliant
Date of Issue: 2024-05-17		 ESD Sensitive
<i>Page (5) of (12)</i>	iTD Drawing # 20240517	Revision #: Initial Release


Introduction:



Microwave darkroom and no reflection chamber, absorbing short wave darkroom dark room. Microwave darkroom by electromagnetic shielding room, filtering and isolation, grounding device, the ventilation duct, indoor distribution system, monitoring system, ceiling wave material part. It is based on the wave absorbing material as the lining of the shield room, it can absorb the most of the electromagnetic energy into the six wall is a better simulation of the free space conditions.

The main working principle of microwave anechoic chamber is according to the electromagnetic wave in the medium from the low magnetic guide magnetic direction of propagation rules, absorbing materials to guide the electromagnetic wave using high permeability, through resonance, a substantial absorption of electromagnetic wave radiation energy, by coupling the electromagnetic energy into heat energy.

main performance :

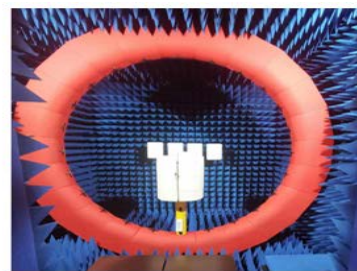
Frequency range:400MHz ~ 6GHz ceiling reflected wave loss materials: 400MHz ~ 6GHz is equal to or more than 15dB (microwave absorbing material by composite wave absorbing materials, namely tapered containing carbon sponge suction wave material paste in ferrite)



	TW600 Antenna	 RoHS Compliant
Date of Issue: 2024-05-17		 ESD Sensitive
Page (6) of (12)	iTD Drawing # 20240517	Revision #: Initial Release

5, Gain table of Antenna




L

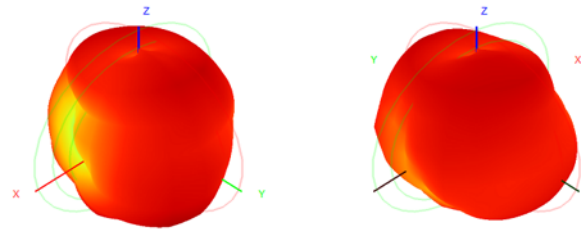

E1(xZ)

E2(yZ)

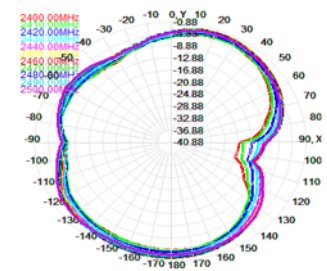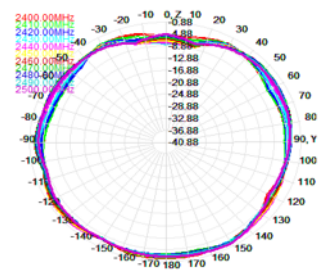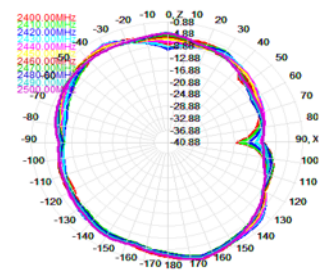

H (XY)





gain:

L			R		
Freq (MHz)	Effi (%)	Gain (dBi)	Freq (MHz)	Effi (%)	Gain (dBi)
2400	25.90	-0.97	2400	27.88	-0.75
2410	26.02	-1.00	2410	28.22	-1.03
2420	27.04	-0.92	2420	29.70	-0.98
2430	27.89	-0.92	2430	31.10	-0.93
2440	29.90	-0.76	2440	33.67	-0.92
2450	31.30	-0.79	2450	34.06	-1.29
2460	32.58	-0.75	2460	33.46	-1.66
2470	33.46	-0.72	2470	32.33	-1.82
2480	34.08	-0.67	2480	31.90	-1.76
2490	35.13	-0.55	2490	31.74	-1.41
2500	35.00	-0.51	2500	31.82	-0.97

OTA


	TW600 Antenna	
Date of Issue: 2024-05-17		 ESD Sensitive
<i>Page (7) of (12)</i>	iTD Drawing # 20240517	Revision #: Initial Release

L			R		
BAND	TRP (dBm)	TIS (dBm)	BAND	TRP (dBm)	TIS (dBm)
0	7.69	-90.29	0	7.89	-89.42
39	7.13	-87.25	39	6.73	-88.73
78	7.54	-88.92	78	6.24	-87.76


	TW600 Antenna	
Date of Issue: 2024-05-17		 ESD Sensitive
Page (8) of (12)	iTD Drawing # 20240517	Revision #: Initial Release



-L

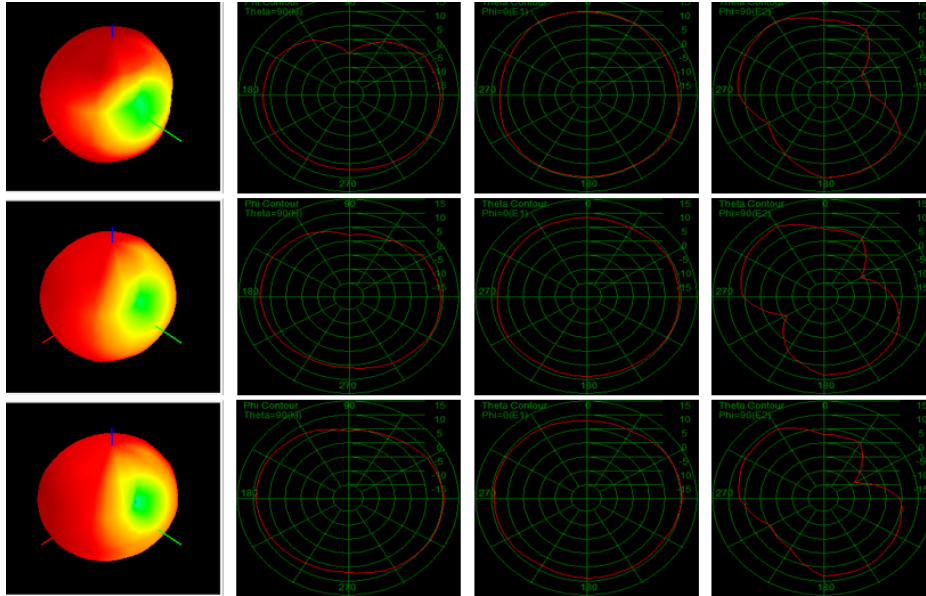TRP

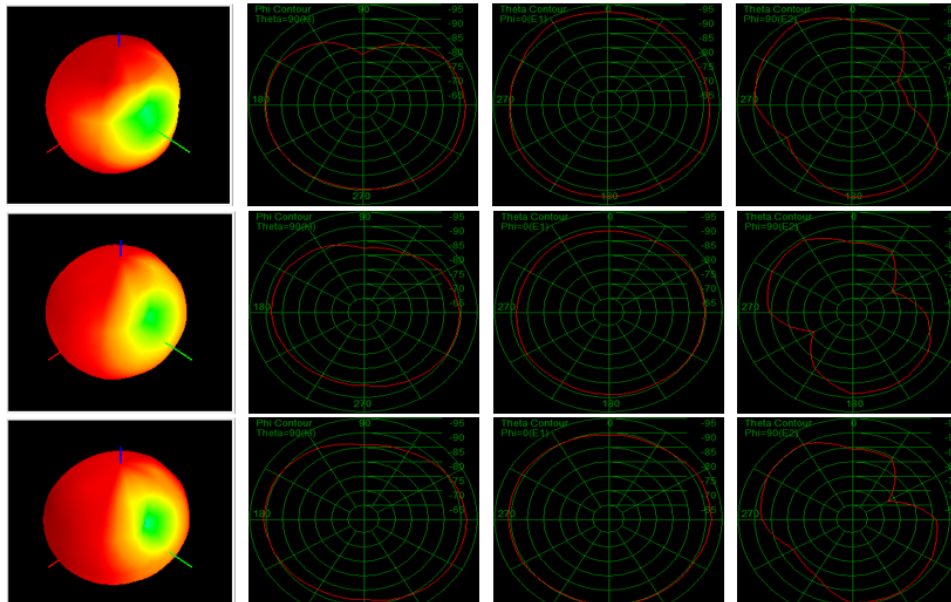


TIS




	TW600 Antenna	
Date of Issue: 2024-05-17		 ESD Sensitive
Page (9) of (12)	iTD Drawing # 20240517	Revision #: Initial Release



R

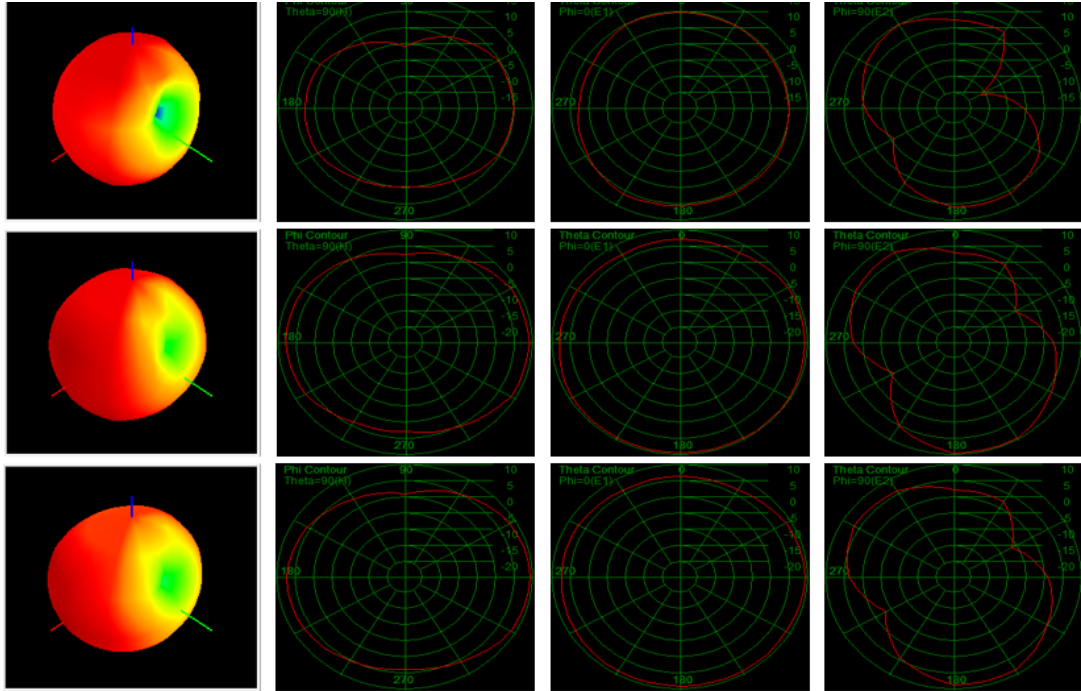TRP



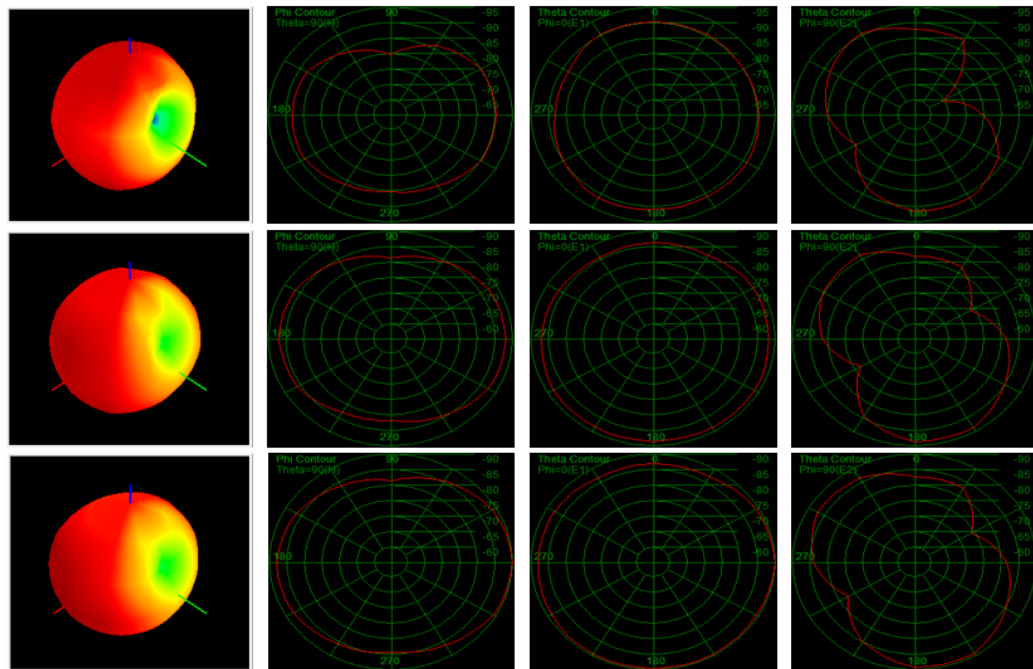

TIS



	TW600 Antenna	 RoHS Compliant
Date of Issue: 2024-05-17		 ESD Sensitive
Page (10) of (12)	iTD Drawing # 20240517	Revision #: Initial Release

6, Machine Picture:





	TW600 Antenna	 RoHS Compliant
Date of Issue: 2024-05-17		 ESD Sensitive
Page (11) of (12)	iTD Drawing # 20240517	Revision #: Initial Release

7, Antenna Dimension

unit: 26.42*13.93*6.20 mm



	TW600 Antenna	
Date of Issue: 2024-05-17		
Page (12) of (12)	iTD Drawing # 20240517	Revision #: Initial Release

8,ROHS:

Antenna TX.10.0251-TW600 meets RoHS requirements.

9, Product packaging instructions:

- A. packing should meet the moistureproof, vibration, pressure and mildew proof, etc.
- B. the smallest packing unit logo must have the manufacturer trademarks, product model, name, code and quantity.
- C. in the attached packing list, certificate of approval, and the factory inspection report.

*****END*****