

TEST REPORT

Product Name : Seating system control box
Brand Mark : N/A
Model No. : CU155+
FCC ID : 2AVJ8-CU155CCA
Report Number : BLA-EMC-202101-A1901
Date of Sample Receipt : 2021/1/7
Date of Test : 2021/1/7 to 2021/3/16
Date of Issue : 2021/7/12
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

DewertOkin Technology Group Co.,Ltd
Room 247, Tower 6, Guangfu Technology Part, JiaXing, Zhejiang

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

Jozu.

Review by:

Sueels

Approved by:

Jmen li

Date:

2021/7/12



REPORT REVISE RECORD

Version No.	Date	Description
00	2021/7/12	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	6
2	GENERAL INFORMATION	7
3	GENERAL DESCRIPTION OF E.U.T.	7
	OUTPUT:DC29V–2.0A.....	7
4	TEST ENVIRONMENT	8
5	TEST MODE	8
6	MEASUREMENT UNCERTAINTY	8
7	DESCRIPTION OF SUPPORT UNIT.....	9
8	LABORATORY LOCATION.....	9
9	TEST INSTRUMENTS LIST	10
1	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....	14
1.1	LIMITS	14
1.2	BLOCK DIAGRAM OF TEST SETUP	14
1.3	PROCEDURE	14
1.4	TEST DATA	16
2	CONDUCTED BAND EDGES MEASUREMENT.....	18
2.1	LIMITS	18
2.2	BLOCK DIAGRAM OF TEST SETUP	18
2.3	TEST DATA	19
3	CONDUCTED PEAK OUTPUT POWER	20
3.1	LIMITS	20
3.2	BLOCK DIAGRAM OF TEST SETUP	20
3.3	TEST DATA	21
4	MINIMUM 6DB BANDWIDTH	22
4.1	LIMITS	22
4.2	BLOCK DIAGRAM OF TEST SETUP	22
4.3	TEST DATA	22
5	ANTENNA REQUIREMENT	23
5.1	CONCLUSION	23

6	RADIATED SPURIOUS EMISSIONS	24
6.1	LIMITS	24
6.2	BLOCK DIAGRAM OF TEST SETUP	25
6.3	PROCEDURE	25
6.4	TEST DATA	27
7	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	35
7.1	LIMITS	35
7.2	BLOCK DIAGRAM OF TEST SETUP	36
7.3	PROCEDURE	36
7.4	TEST DATA	38
8	CONDUCTED SPURIOUS EMISSIONS	42
8.1	LIMITS	42
8.2	BLOCK DIAGRAM OF TEST SETUP	42
8.3	TEST DATA	43
9	POWER SPECTRUM DENSITY	44
9.1	LIMITS	44
9.2	BLOCK DIAGRAM OF TEST SETUP	44
9.3	TEST DATA	44
10	APPENDIX	45
10.1	APPENDIX : DTS BANDWIDTH	45
	<i>Test Result</i>	45
	<i>Test Graphs</i>	46
10.2	APPENDIX : OCCUPIED CHANNEL BANDWIDTH.....	47
	<i>Test Result</i>	47
	<i>Test Graphs</i>	48
10.3	APPENDIX : MAXIMUM CONDUCTED OUTPUT POWER	49
	<i>Test Result</i>	49
	<i>Test Graphs</i>	50
10.4	APPENDIX : MAXIMUM POWER SPECTRAL DENSITY	51
	<i>Test Result</i>	51
	<i>Test Graphs</i>	52
10.5	APPENDIX : BAND EDGE MEASUREMENTS	53
	<i>Test Result</i>	53
	<i>Test Graphs</i>	53

10.6	APPENDIX : CONDUCTED SPURIOUS EMISSION.....	54
	<i>Test Result</i>	54
	<i>Test Graphs</i>	55
	APPENDIX A: PHOTOGRAPHS OF TEST SETUP	58
	APPENDIX B: PHOTOGRAPHS OF EUT	60

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass

2 GENERAL INFORMATION

Applicant	DewertOkin Technology Group Co.,Ltd
Address	Room 247, Tower 6, Guangfu Technology Part, JiaXing, Zhejiang
Manufacturer	Shenzhen C&D Electronics Co., Ltd.
Address	9/F, Tower 9A, Baoneng Science&Technology Park, Qingxiang Road, Longhua New District, Shenzhen(518109) , China
Factory	Shenzhen C&D Electronics Co., Ltd.
Address	9/F, Tower 9A, Baoneng Science&Technology Park, Qingxiang Road, Longhua New District, Shenzhen(518109) , China
Product Name	Seating system control box
Test Model No.	CU155+

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	1004106b
Software Version	STM32_94014_Rev.4.4
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	PCB antenna
Antenna Gain:	2.3dBi(declared by the client)
Power supply:	Model No.:ZBHWX-A290020-A Input:100~240V, 50/60Hz, 1.5A Output:DC29V=2.0A

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Nomal	+22°C	DC29V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode with modulation
Remark: Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A
AC/DC Adapter	HWX	ZBHWX-A290020-A	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province,
China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	AT	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of Conducted Band Edges Measurement					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Peak Output Power					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Minimum 6dB Bandwidth					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Radiated Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9

Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Power Spectrum Density

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11

Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11
------------------	---------	--------	------------	------------	------------

BlueAsia

1 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

1.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

1.2 BLOCK DIAGRAM OF TEST SETUP

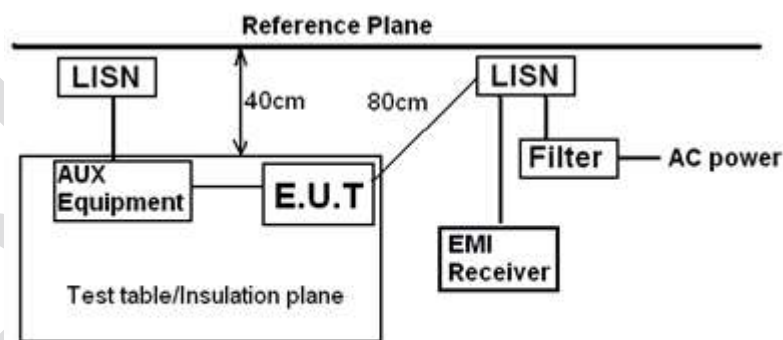

Remark:
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m

1.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 μ H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

1.4 TEST DATA

[Test Mode: TX]; [Line: Line]

AC 120V 60Hz

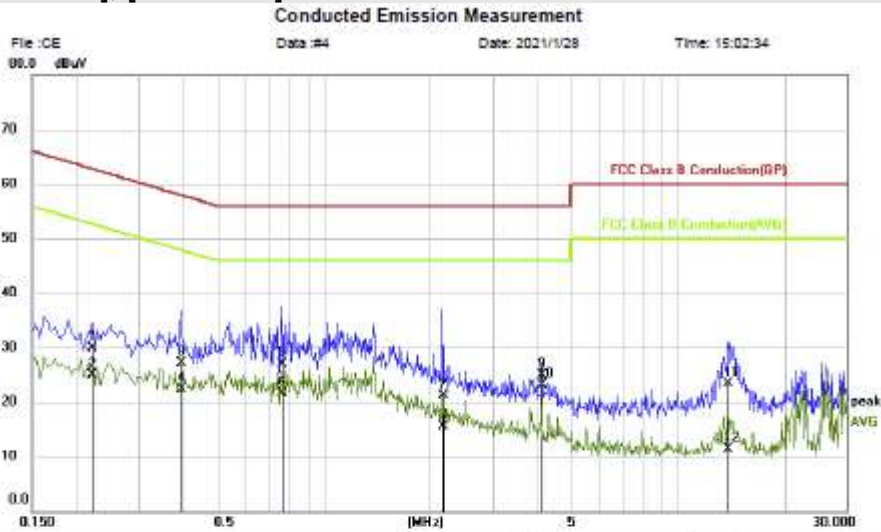


File: CE
 Data: #4
 Date: 2021/1/29
 Time: 15:02:34
 Site:
 Limit: FCC Class B Conduction(QP) Phase: **L1** Temperature:
 EUT: Seating system control box Power: Humidity: %
 M/N: CU155+
 Mode: TX mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2220	19.99	9.91	29.90	62.74	-32.84	QP	
2		0.2220	15.04	9.91	24.95	52.74	-27.79	AVG	
3		0.3940	17.50	9.69	27.19	57.98	-30.79	QP	
4		0.3940	12.67	9.69	22.36	47.98	-25.62	AVG	
5		0.7620	17.29	9.70	26.99	56.00	-29.01	QP	
6		0.7620	11.88	9.70	21.58	46.00	-24.42	AVG	
7		2.1660	11.19	9.82	21.01	56.00	-34.99	QP	
8		2.1660	5.76	9.82	15.58	46.00	-30.42	AVG	
9		4.1260	14.98	9.84	24.82	56.00	-31.18	QP	
10	*	4.1260	13.32	9.84	23.16	46.00	-22.84	AVG	
11		13.7940	13.35	9.96	23.31	60.00	-36.69	QP	
12		13.7940	1.44	9.96	11.40	50.00	-38.60	AVG	

Test Result: Pass

[TestMode: TX]; [Line: Neutral]

AC 120V 60Hz

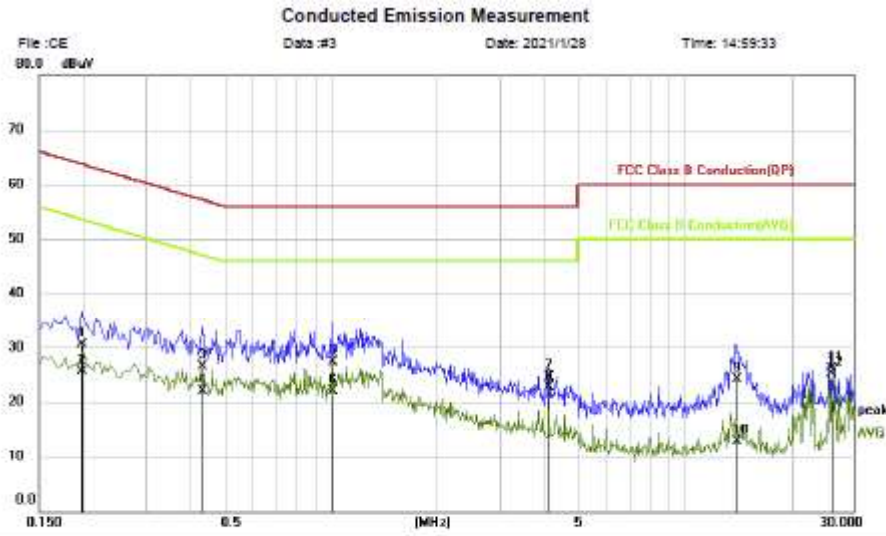

Site: Phase: **N** Temperature:
Limit: FCC Class B Conduction(QP) Power: Humidity: %
EUT: Seating system control box
M/N: CU155+
Mode: TX mode
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit		Detector	Comment
			Level	Factor	ment	dBuV	dB		
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1980	20.59	9.89	30.48	63.89	-33.21	QP	
2		0.1980	15.59	9.89	25.48	53.89	-28.21	AVG	
3		0.4340	16.81	9.70	26.51	57.18	-30.67	QP	
4		0.4340	12.17	9.70	21.87	47.18	-25.31	AVG	
5		1.0060	17.46	9.78	27.24	56.00	-28.76	QP	
6		1.0060	12.09	9.78	21.87	46.00	-24.13	AVG	
7		4.1260	14.60	9.84	24.44	56.00	-31.56	QP	
8	*	4.1260	12.83	9.84	22.67	46.00	-23.33	AVG	
9		13.9220	14.04	10.00	24.04	60.00	-35.96	QP	
10		13.9220	2.75	10.00	12.75	50.00	-37.25	AVG	
11		25.8779	16.18	10.02	26.20	60.00	-33.80	QP	
12		25.8779	15.07	10.02	25.09	50.00	-24.91	AVG	

Test Result: Pass


2 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

2.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

2.2 BLOCK DIAGRAM OF TEST SETUP

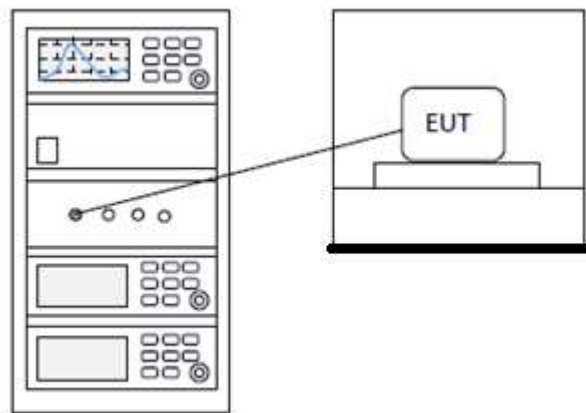

2.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


3 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

3.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

3.2 BLOCK DIAGRAM OF TEST SETUP

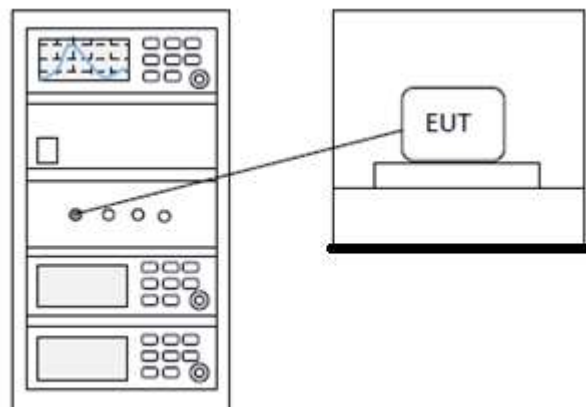

3.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


4 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

4.1 LIMITS

Limit:	≥ 500 kHz
--------	----------------

4.2 BLOCK DIAGRAM OF TEST SETUP

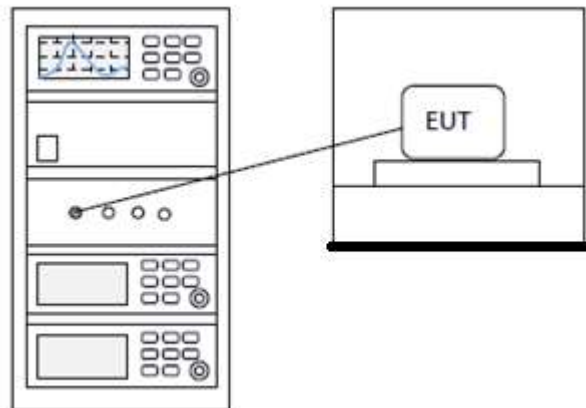

4.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

5 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


5.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.3dBi.

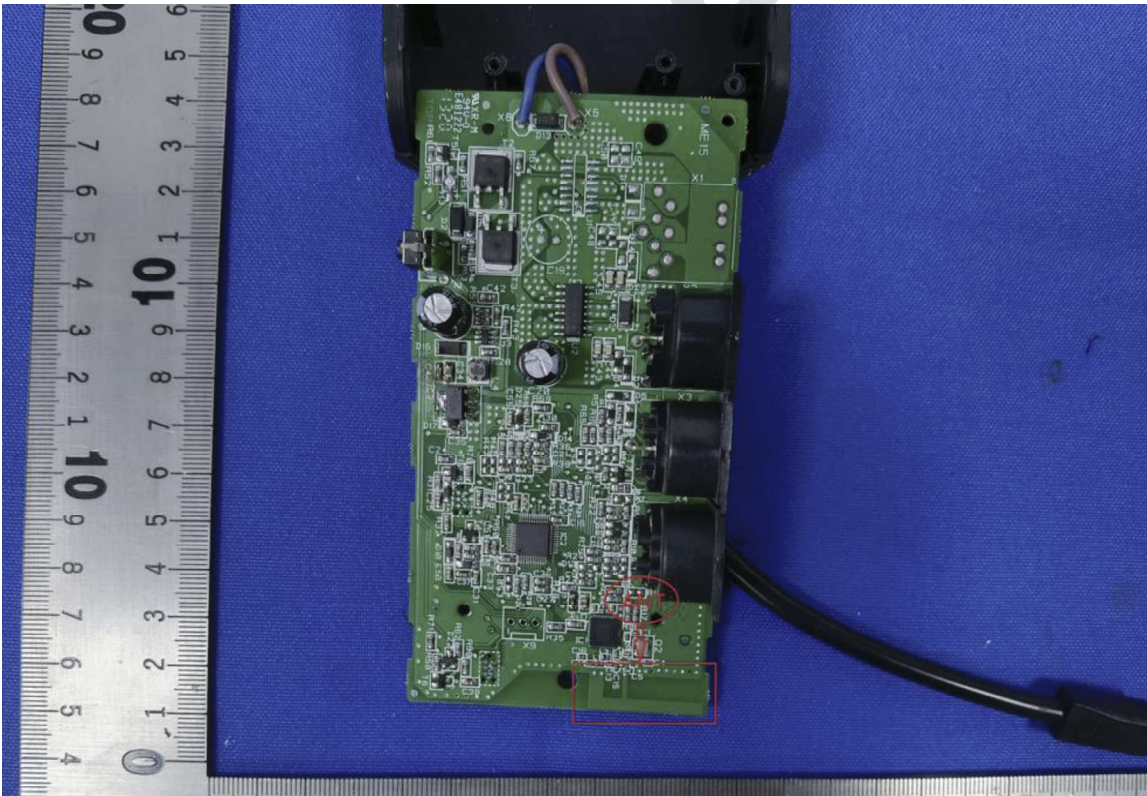

6 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX mode (SE) below 1G;TX mode (SE) Above 1G
Test Mode (Final Test)	TX mode (SE) below 1G;TX mode (SE) Above 1G
Tester	Jozu
Temperature	21℃
Humidity	48%

6.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.2 BLOCK DIAGRAM OF TEST SETUP

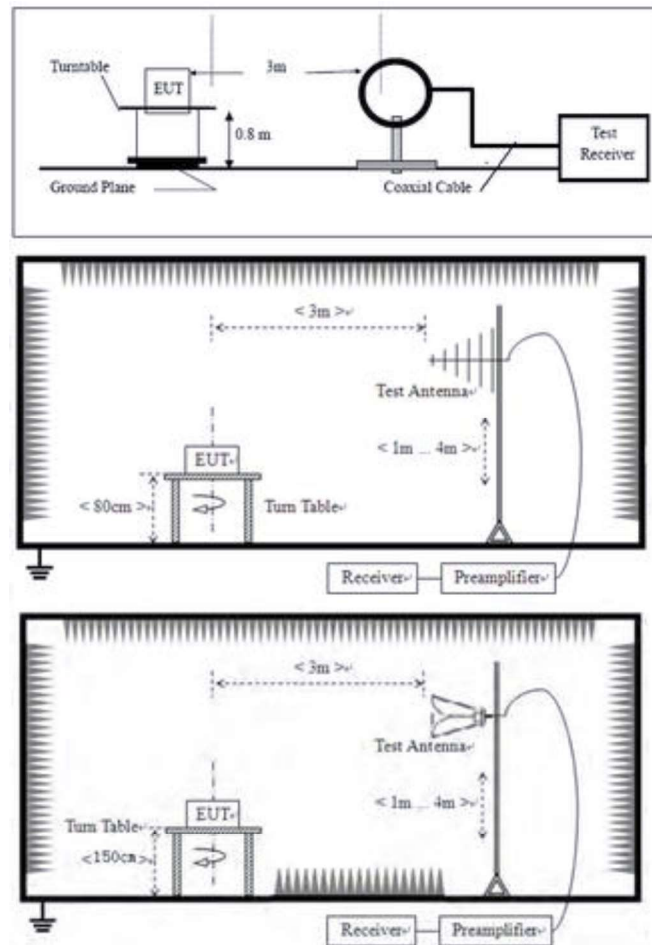

6.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.4 TEST DATA

[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

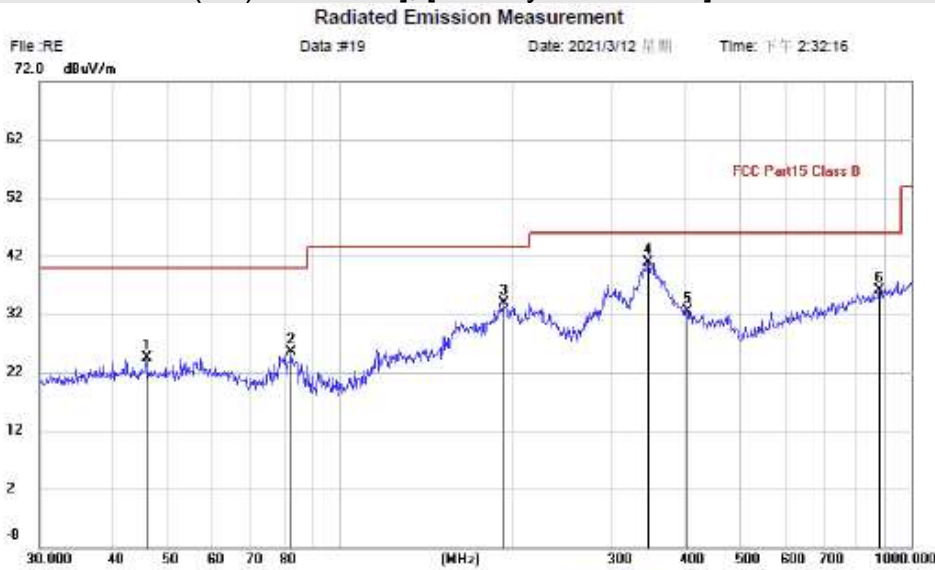


File: RE
72.0 dBuV/m
Data #19
Date: 2021/3/12 星期三
Time: 下午 2:32:16

Site: Polarization: *Horizontal* Temperature:
Limit: FCC Part15 Class B Power: Humidity: %
EUT: Seating system control bos Distance: 3m
M/N: CU155+
Mode: TX mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		46.0164	0.91	23.68	24.59	40.00	-15.41	QP		
2		82.3588	6.00	19.43	25.43	40.00	-14.57	QP		
3		194.4534	13.08	20.78	33.86	43.50	-9.64	QP		
4	*	346.8092	15.50	25.50	41.00	46.00	-5.00	QP		
5		406.0880	5.22	27.34	32.56	46.00	-13.44	QP		
6		878.3214	1.05	35.13	36.18	46.00	-9.82	QP		

Test Result: Pass

[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

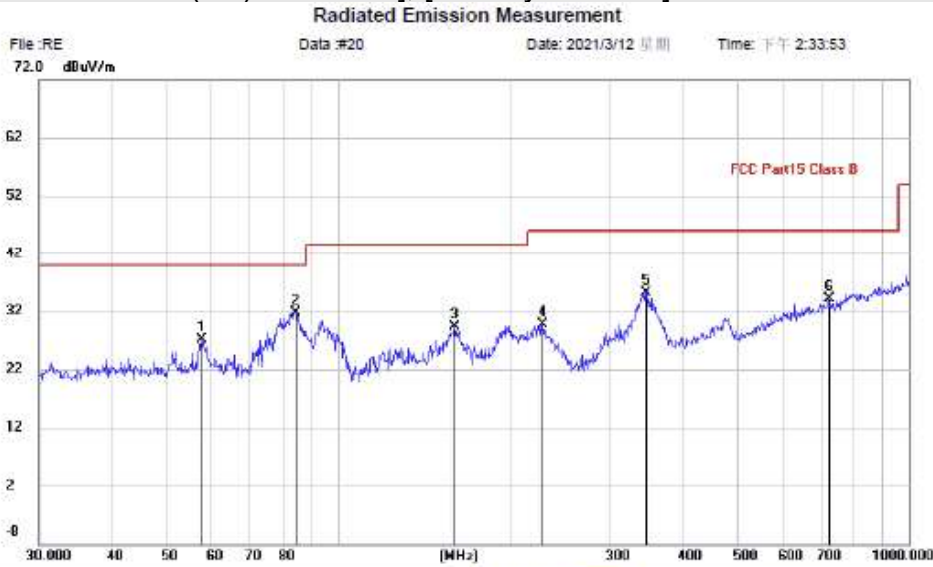


Site: Polarization: *Vertical* Temperature: Humidity: %
 Limit: FCC Part15 Class B Power: Distance: 3m
 EUT: Seating system control bos
 M/N: CU155+
 Mode: TX mode
 Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	57.7962	3.74	23.33	27.07	40.00	-12.93	QP	
2 *	84.4054	12.47	19.33	31.80	40.00	-8.20	QP	
3	160.3456	6.23	23.07	29.30	43.50	-14.20	QP	
4	228.4904	7.52	22.18	29.70	46.00	-16.30	QP	
5	346.8092	9.51	25.50	35.01	46.00	-10.99	QP	
6	721.7259	1.44	32.60	34.04	46.00	-11.96	QP	

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Horizontal]

Radiated Emission Measurement

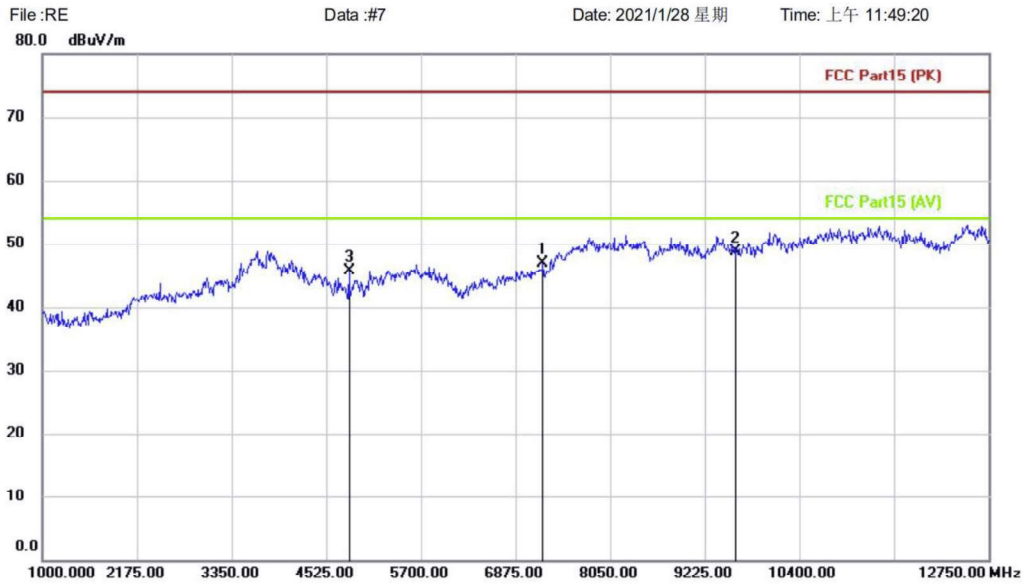

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Seating system control bos	Distance: 3m	
M/N: CU155+		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		7206.000	51.33	-4.42	46.91	74.00	-27.09	peak		
2	*	9608.000	49.03	-0.29	48.74	74.00	-25.26	peak		
3		4807.000	52.97	-7.27	45.70	74.00	-28.30	peak		


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Vertical]

Radiated Emission Measurement

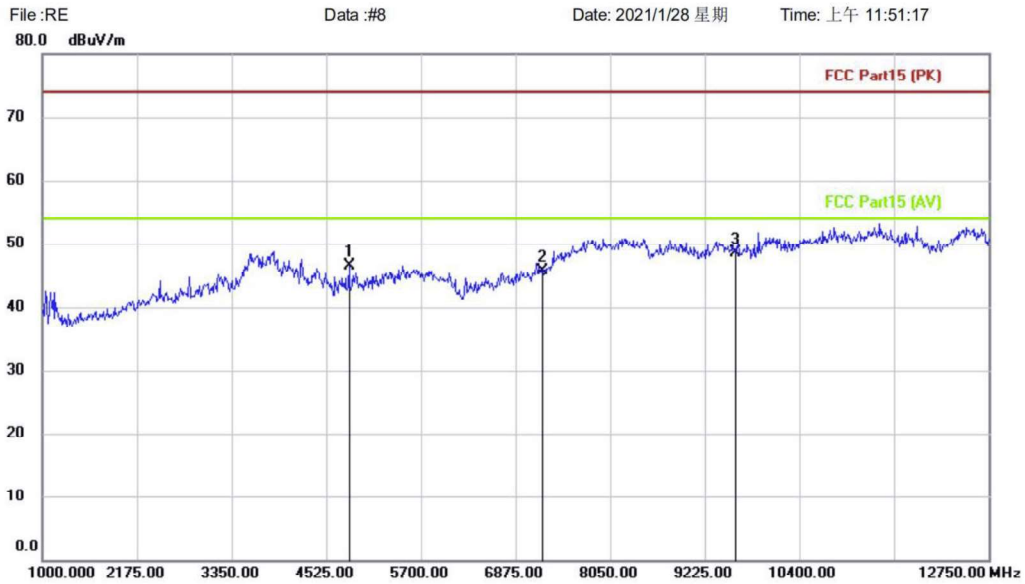

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Seating system control bos	Distance: 3m	
M/N: CU155+		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4807.000	53.83	-7.27	46.56	74.00	-27.44	peak		
2		7206.000	50.14	-4.42	45.72	74.00	-28.28	peak		
3	*	9608.000	48.84	-0.29	48.55	74.00	-25.45	peak		


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Horizontal]

Radiated Emission Measurement

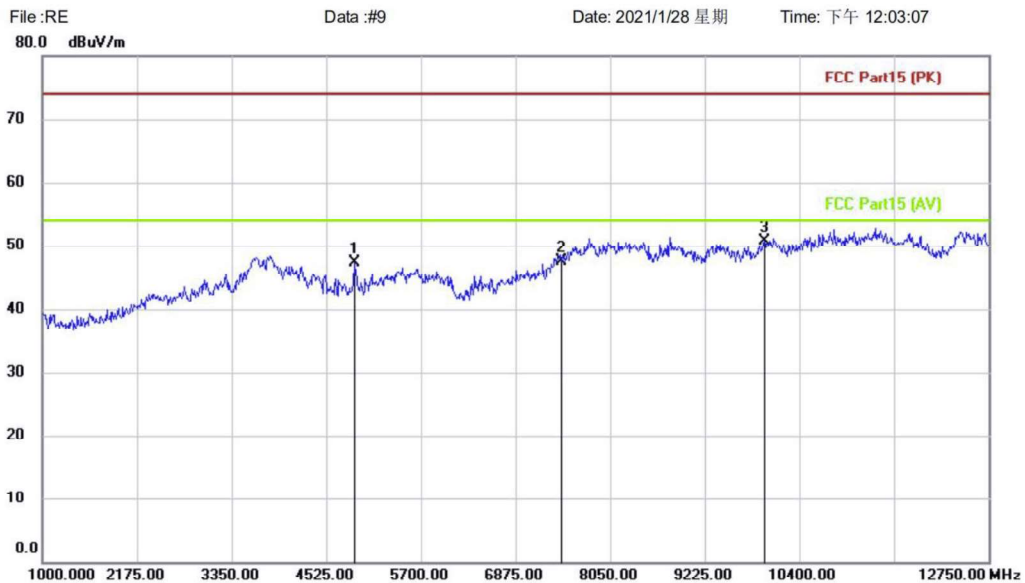

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Seating system control bos	Distance: 3m	
M/N: CU155+		
Mode: TX-M		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4877.500	54.74	-7.50	47.24	74.00	-26.76	peak		
2		7440.000	50.00	-2.43	47.57	74.00	-26.43	peak		
3	*	9960.000	48.77	1.92	50.69	74.00	-23.31	peak		


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Vertical]

Radiated Emission Measurement

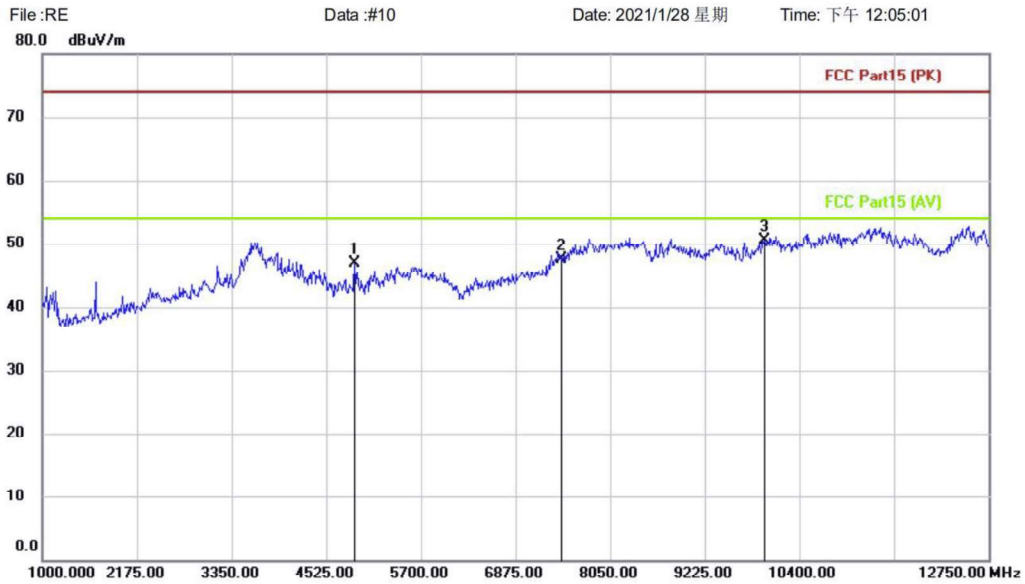

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Seating system control bos	Distance: 3m	
M/N: CU155+		
Mode: TX-M		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4877.500	54.47	-7.50	46.97	74.00	-27.03	peak		
2		7440.000	50.01	-2.43	47.58	74.00	-26.42	peak		
3	*	9960.000	48.57	1.92	50.49	74.00	-23.51	peak		


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Horizontal]

Radiated Emission Measurement

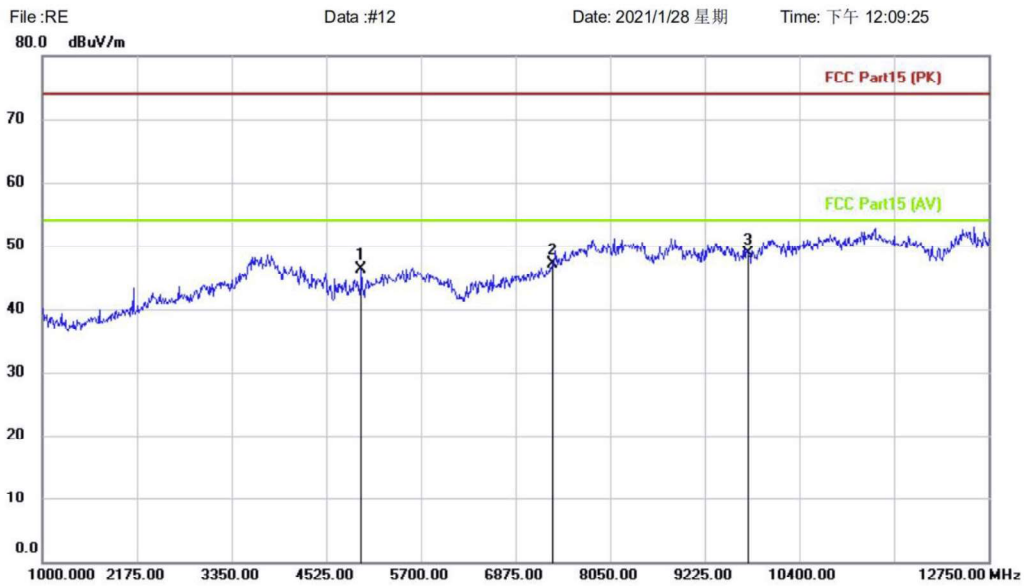

Site: Limit: FCC Part15 (PK) EUT: Seating system control bos M/N: CU155+ Mode: TX-H Note:

Polarization: **Horizontal** Power: Distance: 3m Temperature: Humidity: %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		4959.750	53.36	-6.99	46.37	74.00	-27.63			peak	
2		7323.000	50.44	-3.35	47.09	74.00	-26.91			peak	
3	*	9764.000	48.11	0.56	48.67	74.00	-25.33			peak	


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Vertical]

Radiated Emission Measurement

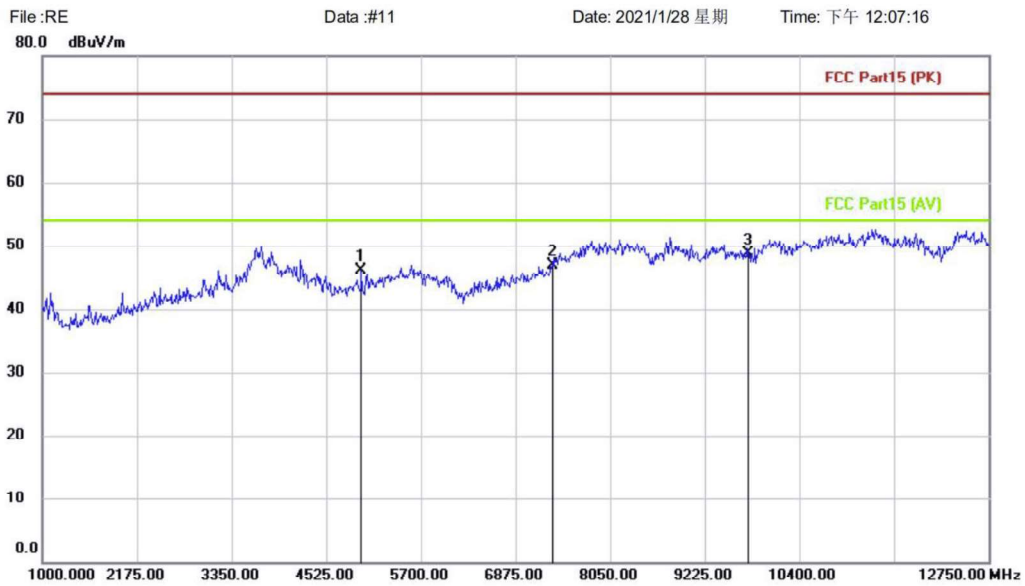

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Seating system control bos	Distance: 3m	
M/N: CU155+		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4959.750	53.11	-6.99	46.12	74.00	-27.88	peak		
2		7323.000	50.19	-3.35	46.84	74.00	-27.16	peak		
3	*	9764.000	48.17	0.56	48.73	74.00	-25.27	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

7 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	21°C
Humidity	48%

7.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2 BLOCK DIAGRAM OF TEST SETUP

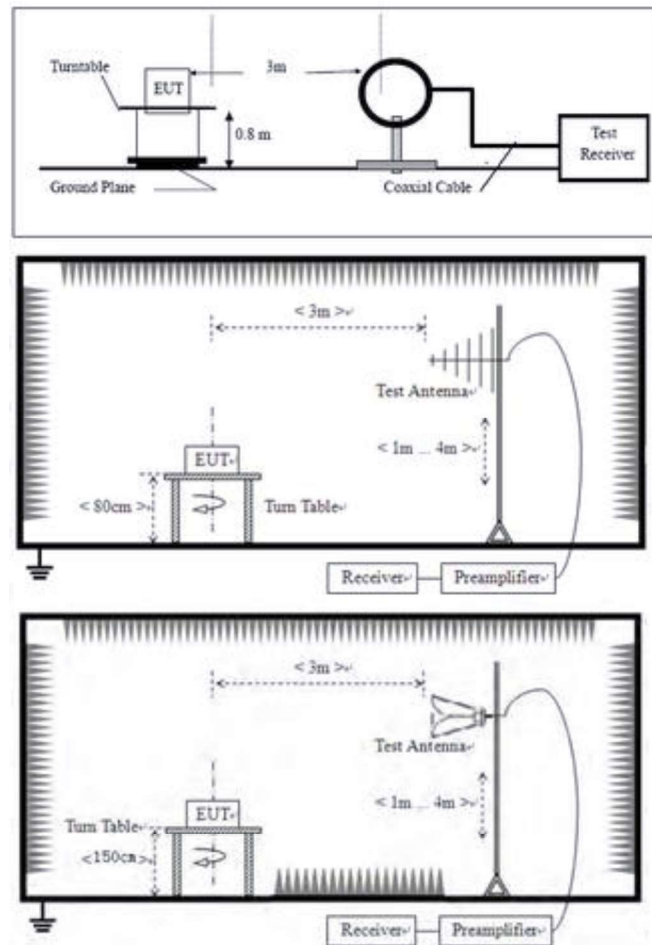

7.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

7.4 TEST DATA

[TestMode: TX]; [Polarity: Horizontal]

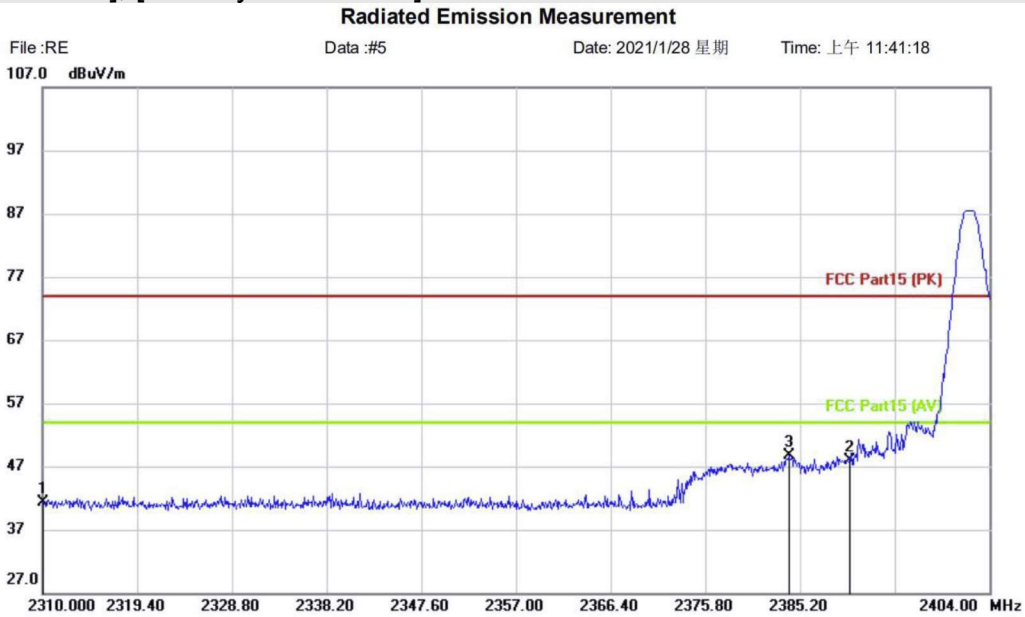

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Seating system control bos	Distance: 3m	
M/N: CU155+		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	56.13	-14.84	41.29	74.00	-32.71	peak		
2		2390.000	62.47	-14.60	47.87	74.00	-26.13	peak		
3	*	2384.072	63.24	-14.63	48.61	74.00	-25.39	peak		


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

Radiated Emission Measurement

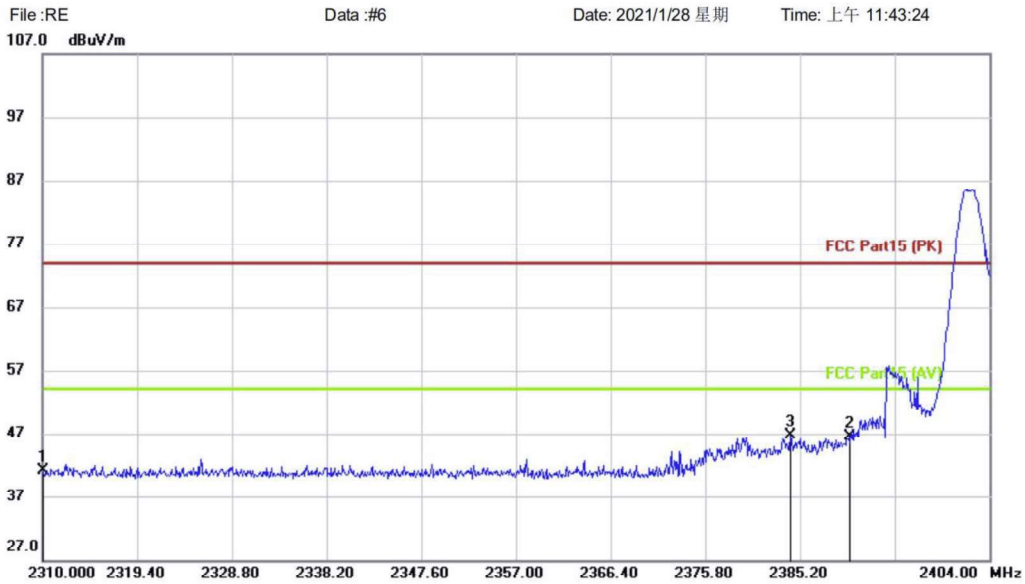

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Seating system control bos	Distance: 3m	
M/N: CU155+		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	55.86	-14.84	41.02	74.00	-32.98	peak		
2		2390.000	61.04	-14.60	46.44	74.00	-27.56	peak		
3	*	2384.260	61.25	-14.63	46.62	74.00	-27.38	peak		


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX]; [Polarity: Horizontal]

Radiated Emission Measurement

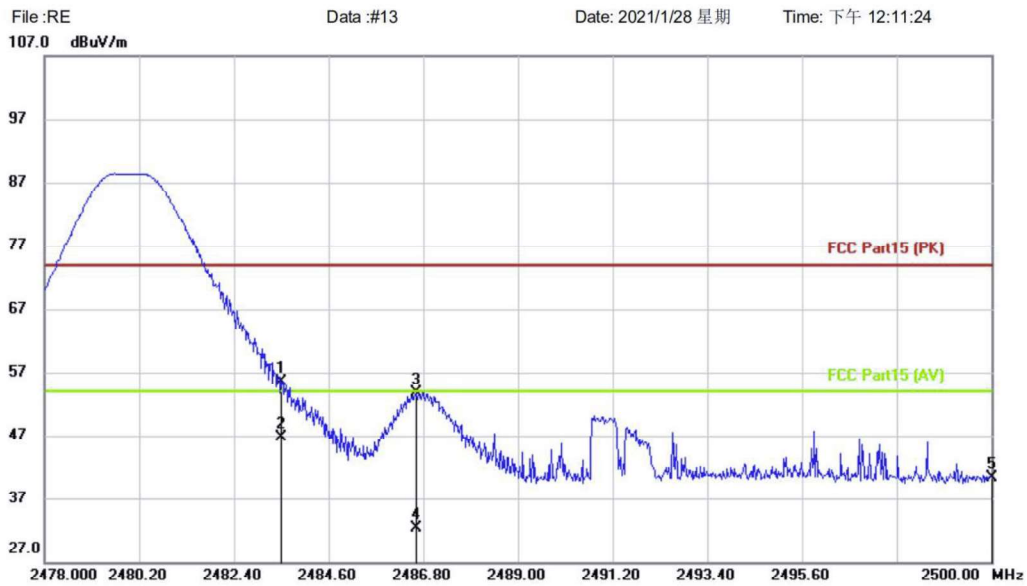

Site Polarization: **Horizontal** Temperature:
Limit: FCC Part15 (PK) Power: Humidity: %
EUT: Seating system control bos Distance: 3m
M/N: CU155+
Mode: TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2483.500	70.23	-14.79	55.44	74.00	-18.56	peak			
2	*	2483.500	61.44	-14.79	46.65	54.00	-7.35	AVG			
3		2486.624	68.54	-14.78	53.76	74.00	-20.24	peak			
4		2486.624	47.14	-14.78	32.36	54.00	-21.64	AVG			
5		2500.000	55.00	-14.72	40.28	74.00	-33.72	peak			


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

Radiated Emission Measurement

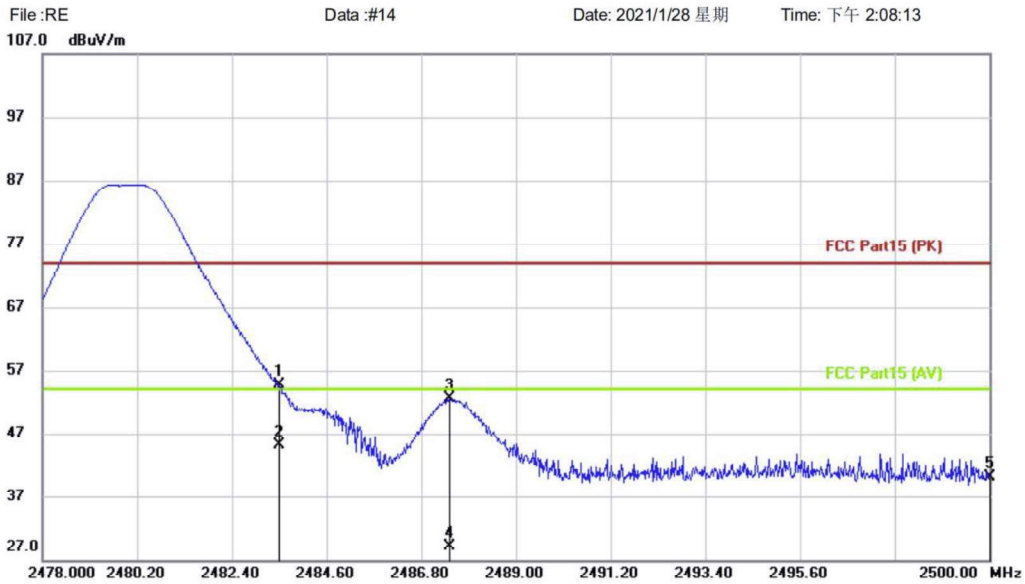

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Seating system control bos	Distance: 3m	
M/N: CU155+		
Mode: TX-H		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2483.500	69.55	-14.79	54.76	74.00	-19.24	peak			
2	*	2483.500	59.81	-14.79	45.02	54.00	-8.98	AVG			
3		2487.460	67.19	-14.78	52.41	74.00	-21.59	peak			
4		2487.460	43.82	-14.78	29.04	54.00	-24.96	AVG			
5		2500.000	54.80	-14.72	40.08	74.00	-33.92	peak			

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass


8 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

8.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

8.2 BLOCK DIAGRAM OF TEST SETUP

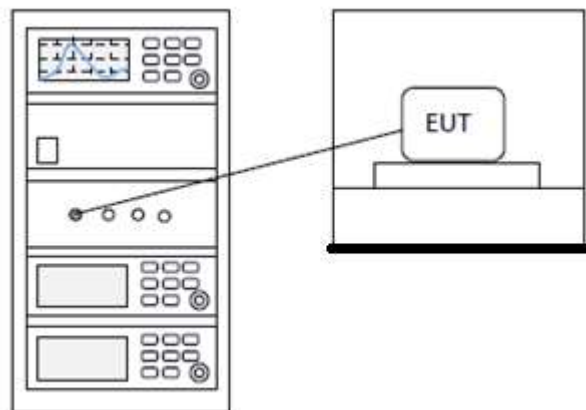

8.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


9 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

9.1 LIMITS

Limit:	$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission
---------------	--

9.2 BLOCK DIAGRAM OF TEST SETUP

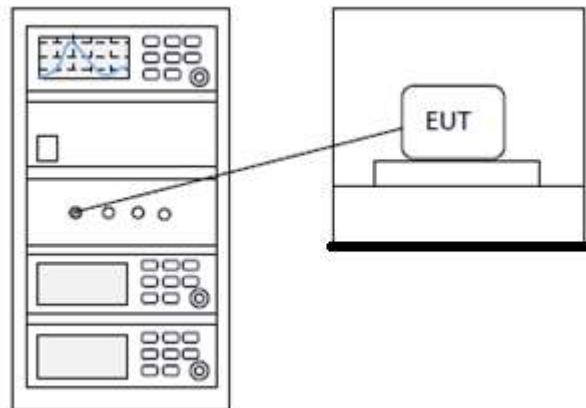

9.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details
--

10 APPENDIX


10.1 APPENDIX : DTS BANDWIDTH

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	0.860	2401.524	2402.384	>=0.5	PASS
		2442	0.780	2441.560	2442.340	>=0.5	PASS
		2480	0.840	2479.532	2480.372	>=0.5	PASS

BlueAsia

Test Graphs

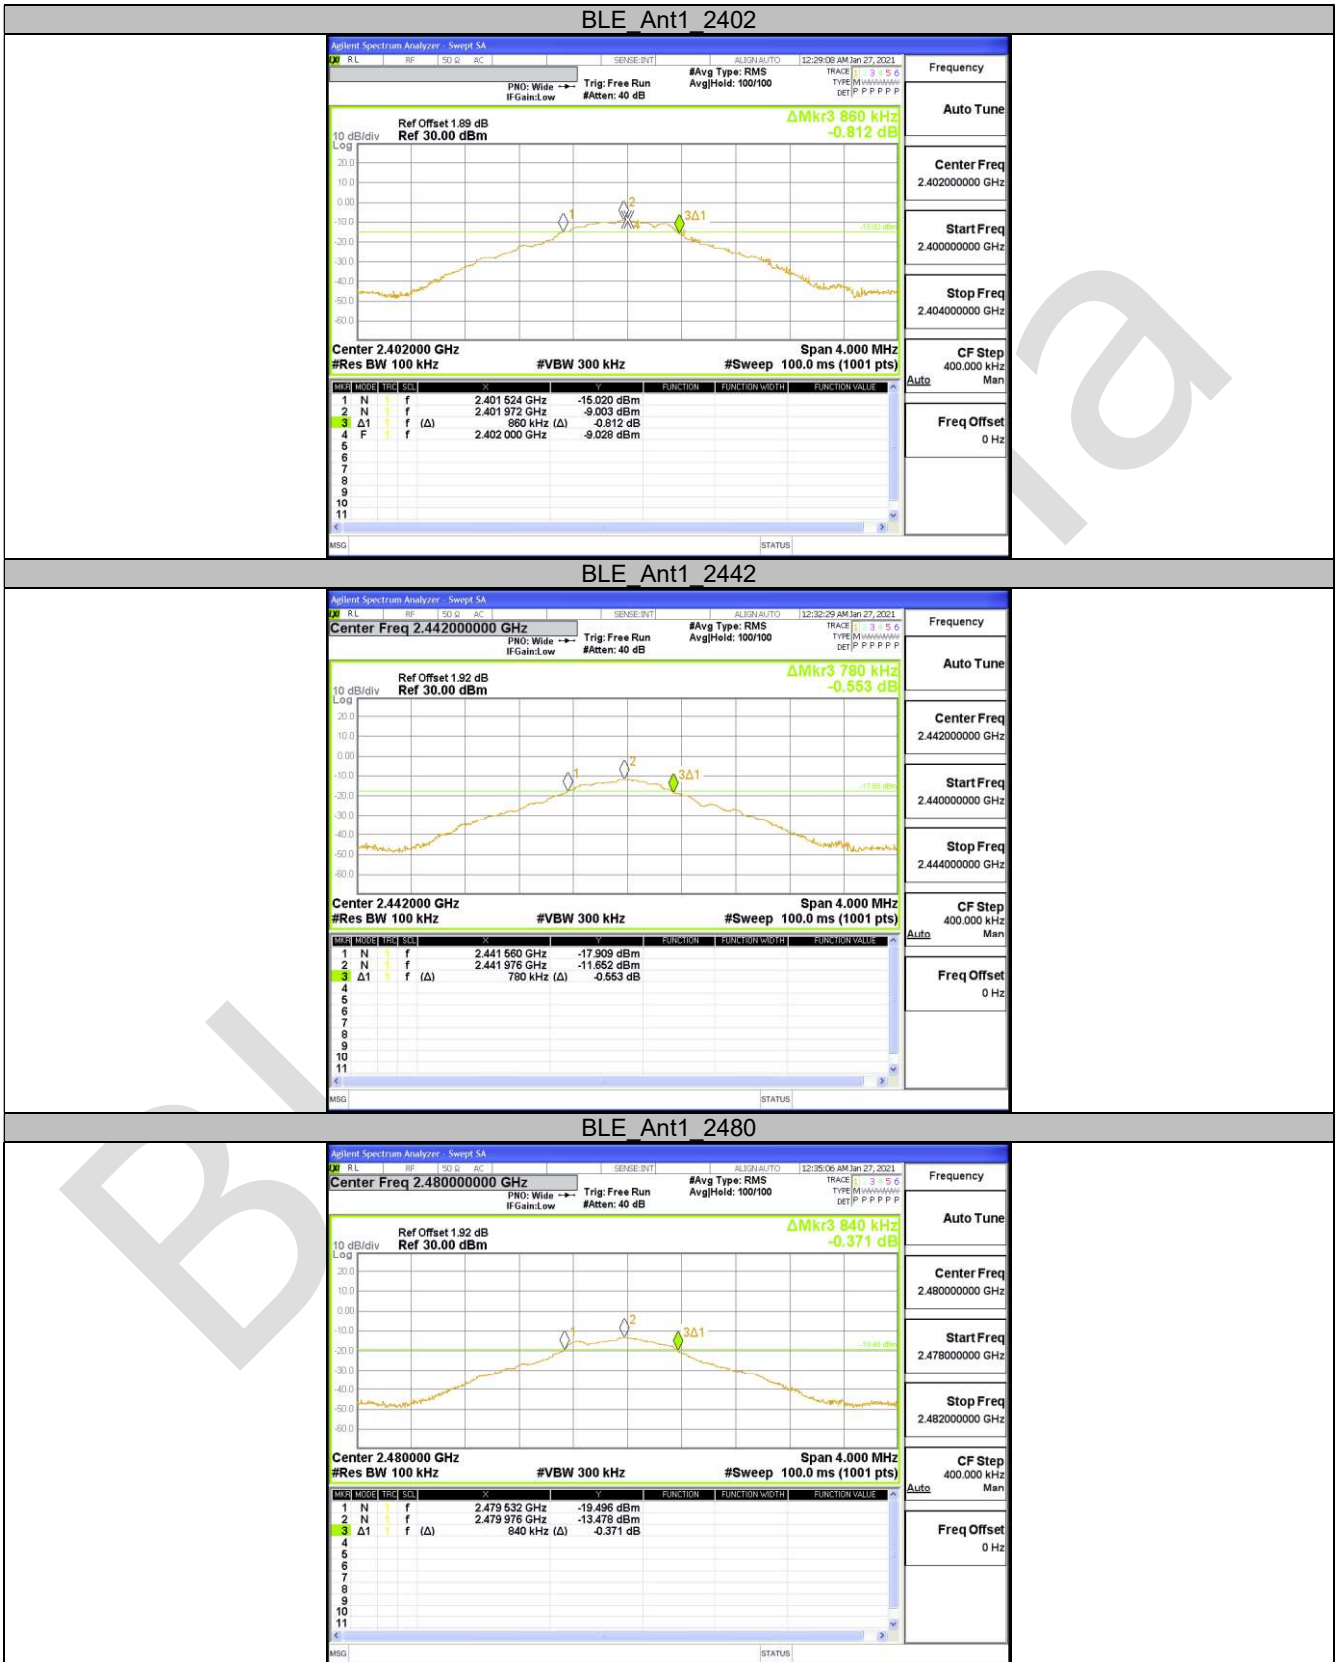

10.2 APPENDIX : OCCUPIED CHANNEL BANDWIDTH

Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	1.7245	2401.086	2402.811	---	PASS
		2442	1.7522	2441.078	2442.830	---	PASS
		2480	1.7811	2479.063	2480.844	---	PASS

BlueAsia

Test Graphs




10.3 APPENDIX : MAXIMUM CONDUCTED OUTPUT POWER**Test Result**

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	2402	-8.52	<=30	PASS
		2442	-11.14	<=30	PASS
		2480	-12.84	<=30	PASS

BlueAsia

Test Graphs

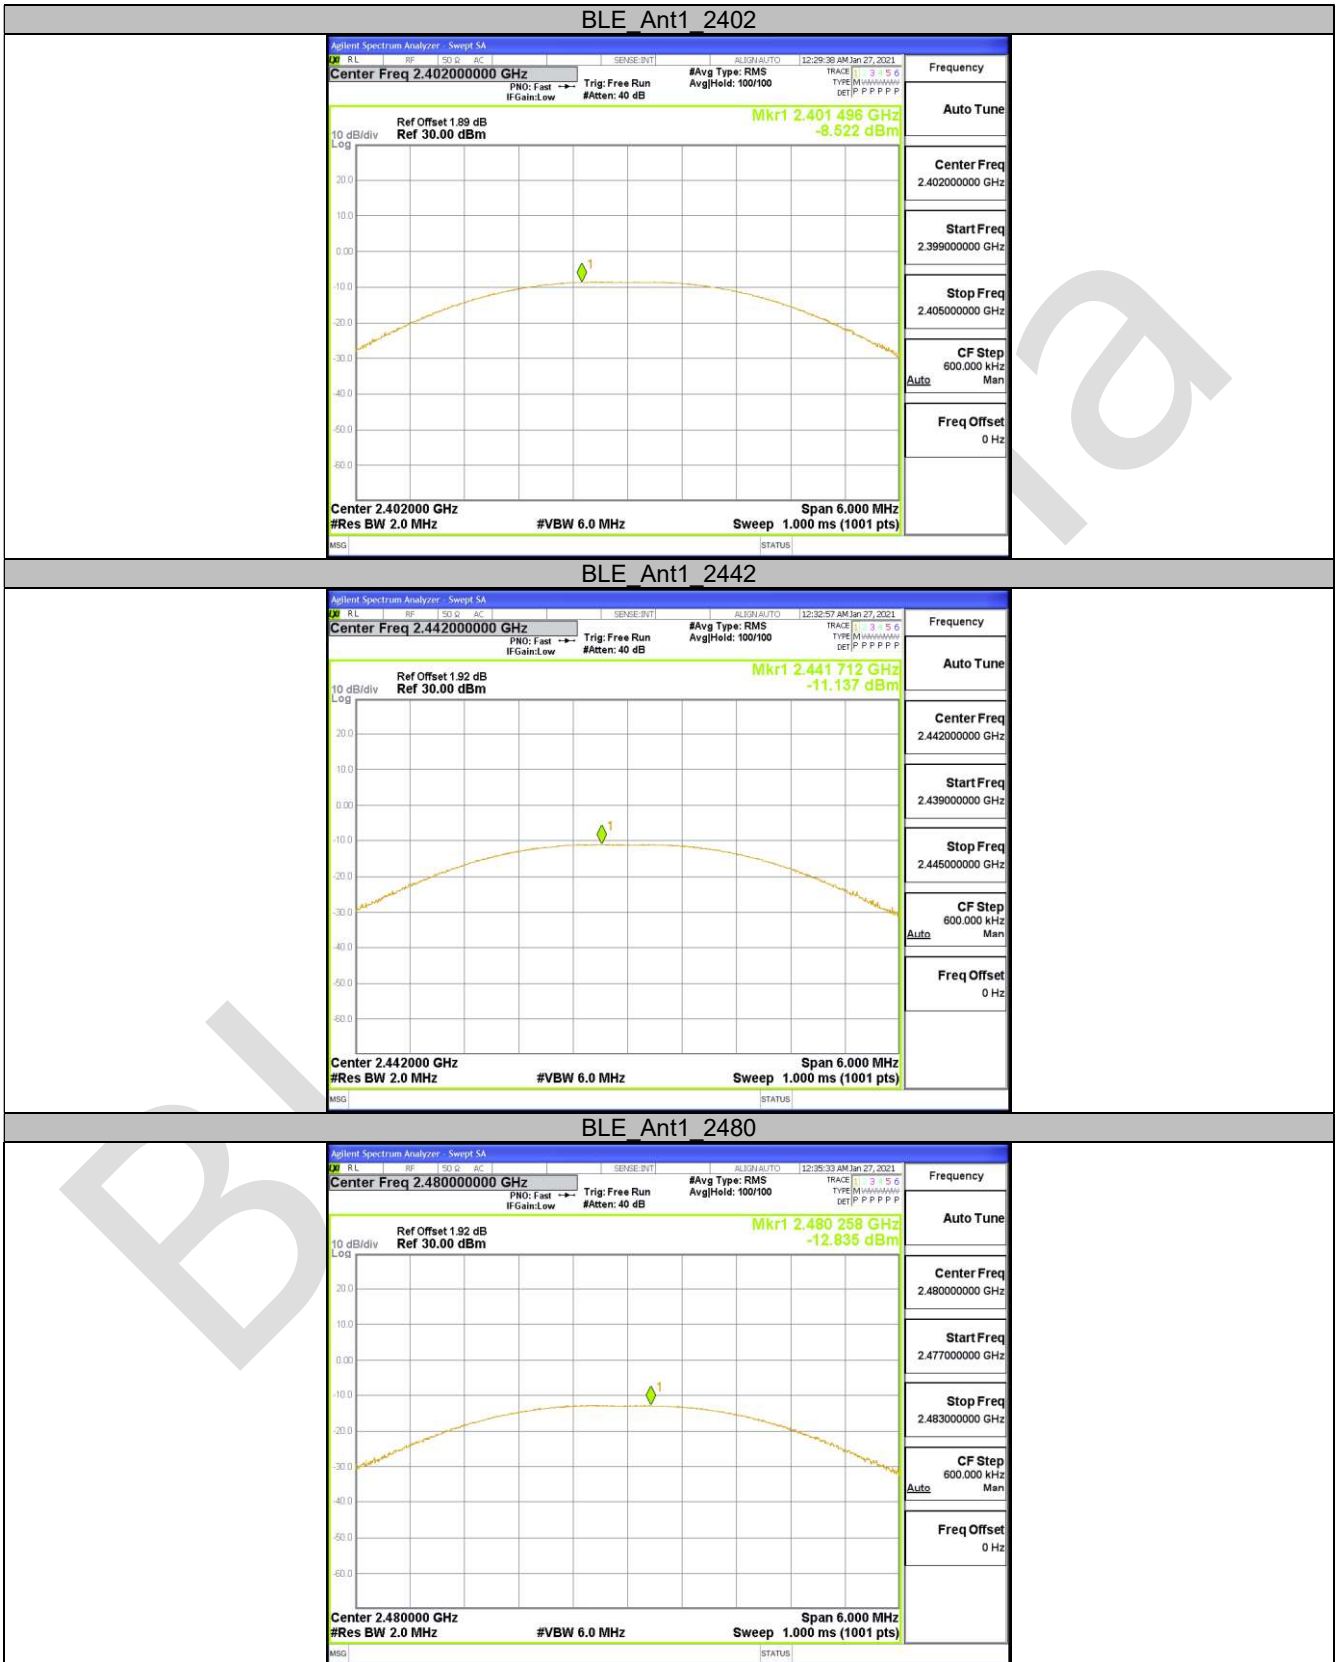


10.4 APPENDIX : MAXIMUM POWER SPECTRAL DENSITY**Test Result**

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE	Ant1	2402	-16.81	<=8	PASS
		2442	-19.21	<=8	PASS
		2480	-21.01	<=8	PASS

BlueAsia

Test Graphs

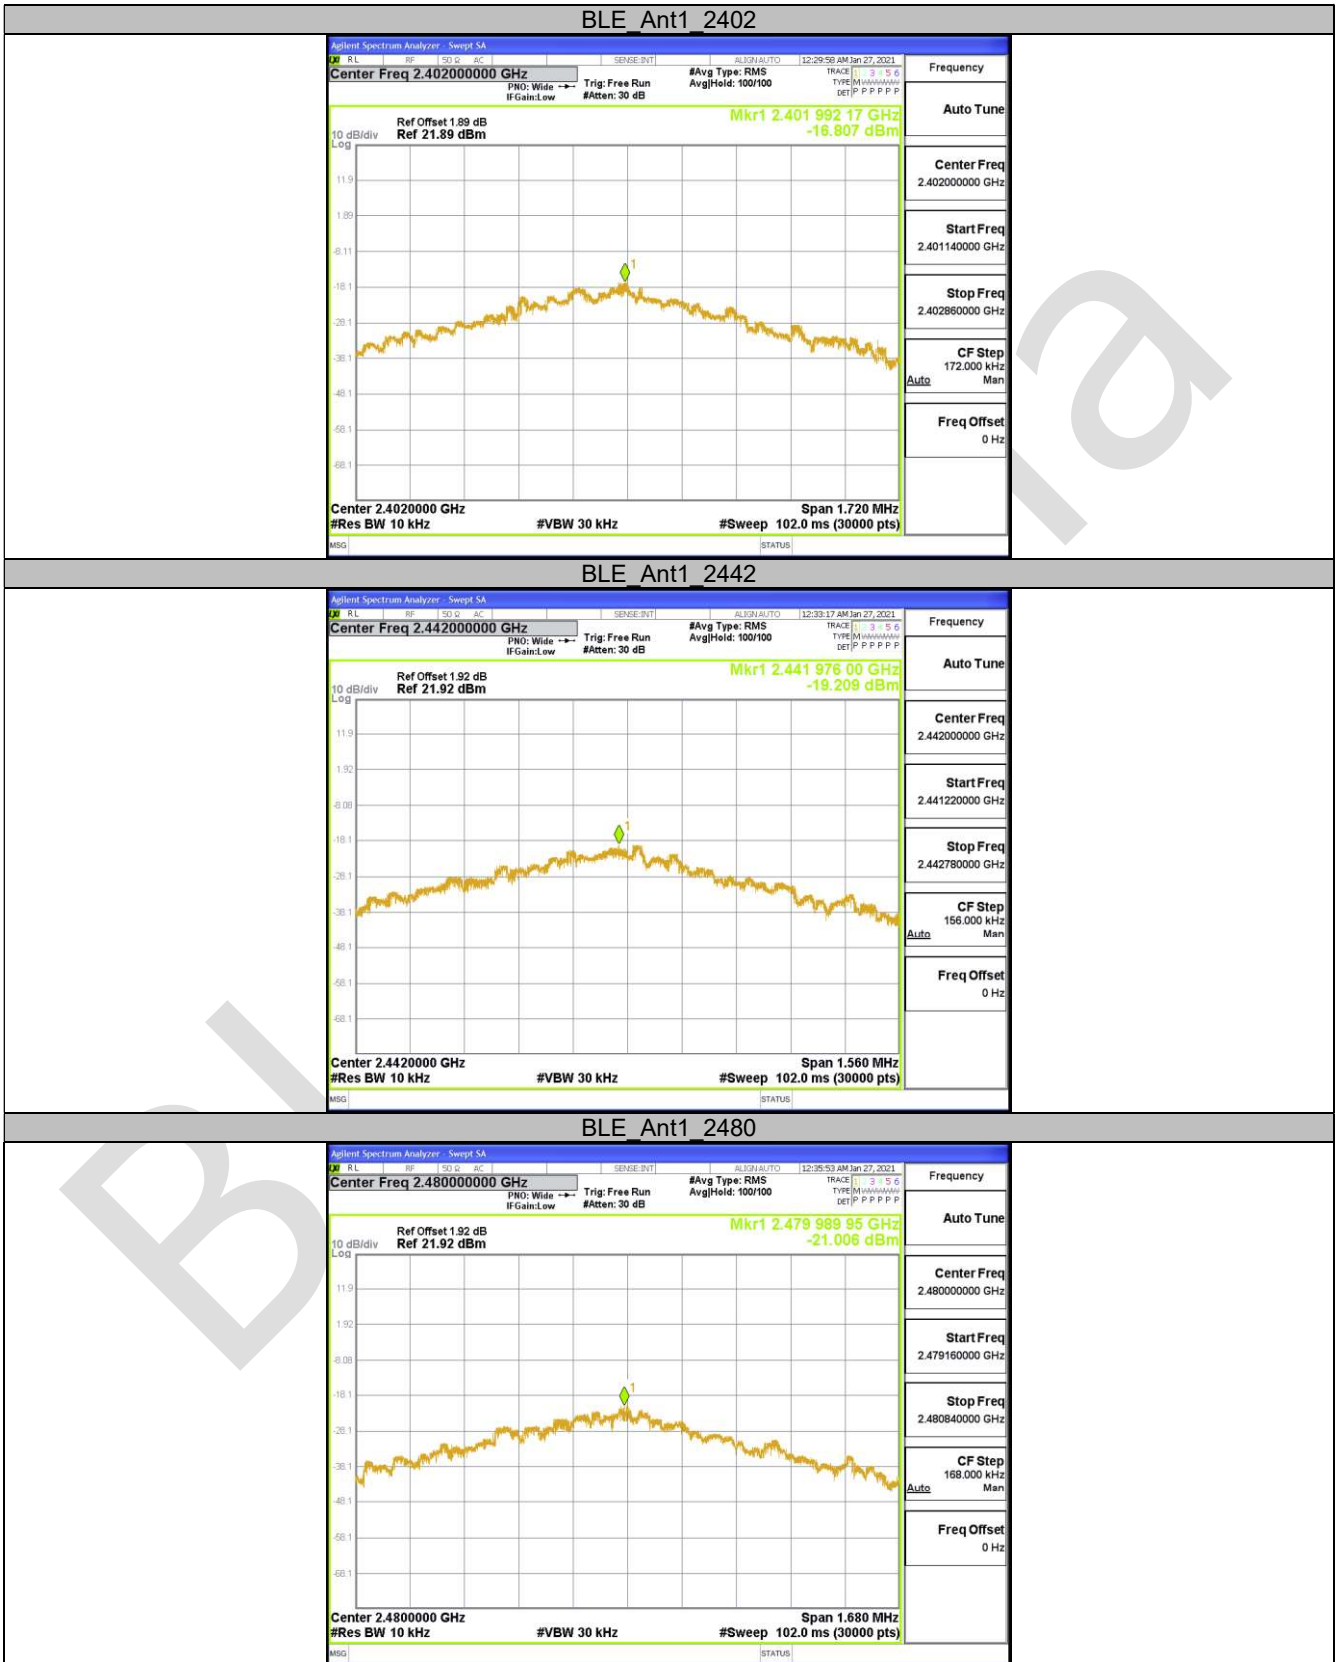

10.5 APPENDIX : BAND EDGE MEASUREMENTS

Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	Low	2402	-9.07	-55.74	<=-29.07	PASS
		High	2480	-13.58	-50.59	<=-33.58	PASS

Test Graphs




10.6 APPENDIX : CONDUCTED SPURIOUS EMISSION


Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	2402	Reference	-9.18	-9.18	---	PASS
			30~1000	30~1000	-65.22	<=-39.178	PASS
			1000~26500	1000~26500	-50.437	<=-39.178	PASS
		2442	Reference	-11.84	-11.84	---	PASS
			30~1000	30~1000	-66.301	<=-41.836	PASS
			1000~26500	1000~26500	-44.897	<=-41.836	PASS
		2480	Reference	-13.53	-13.53	---	PASS
			30~1000	30~1000	-63.682	<=-43.534	PASS
			1000~26500	1000~26500	-49.232	<=-43.534	PASS


Test Graphs




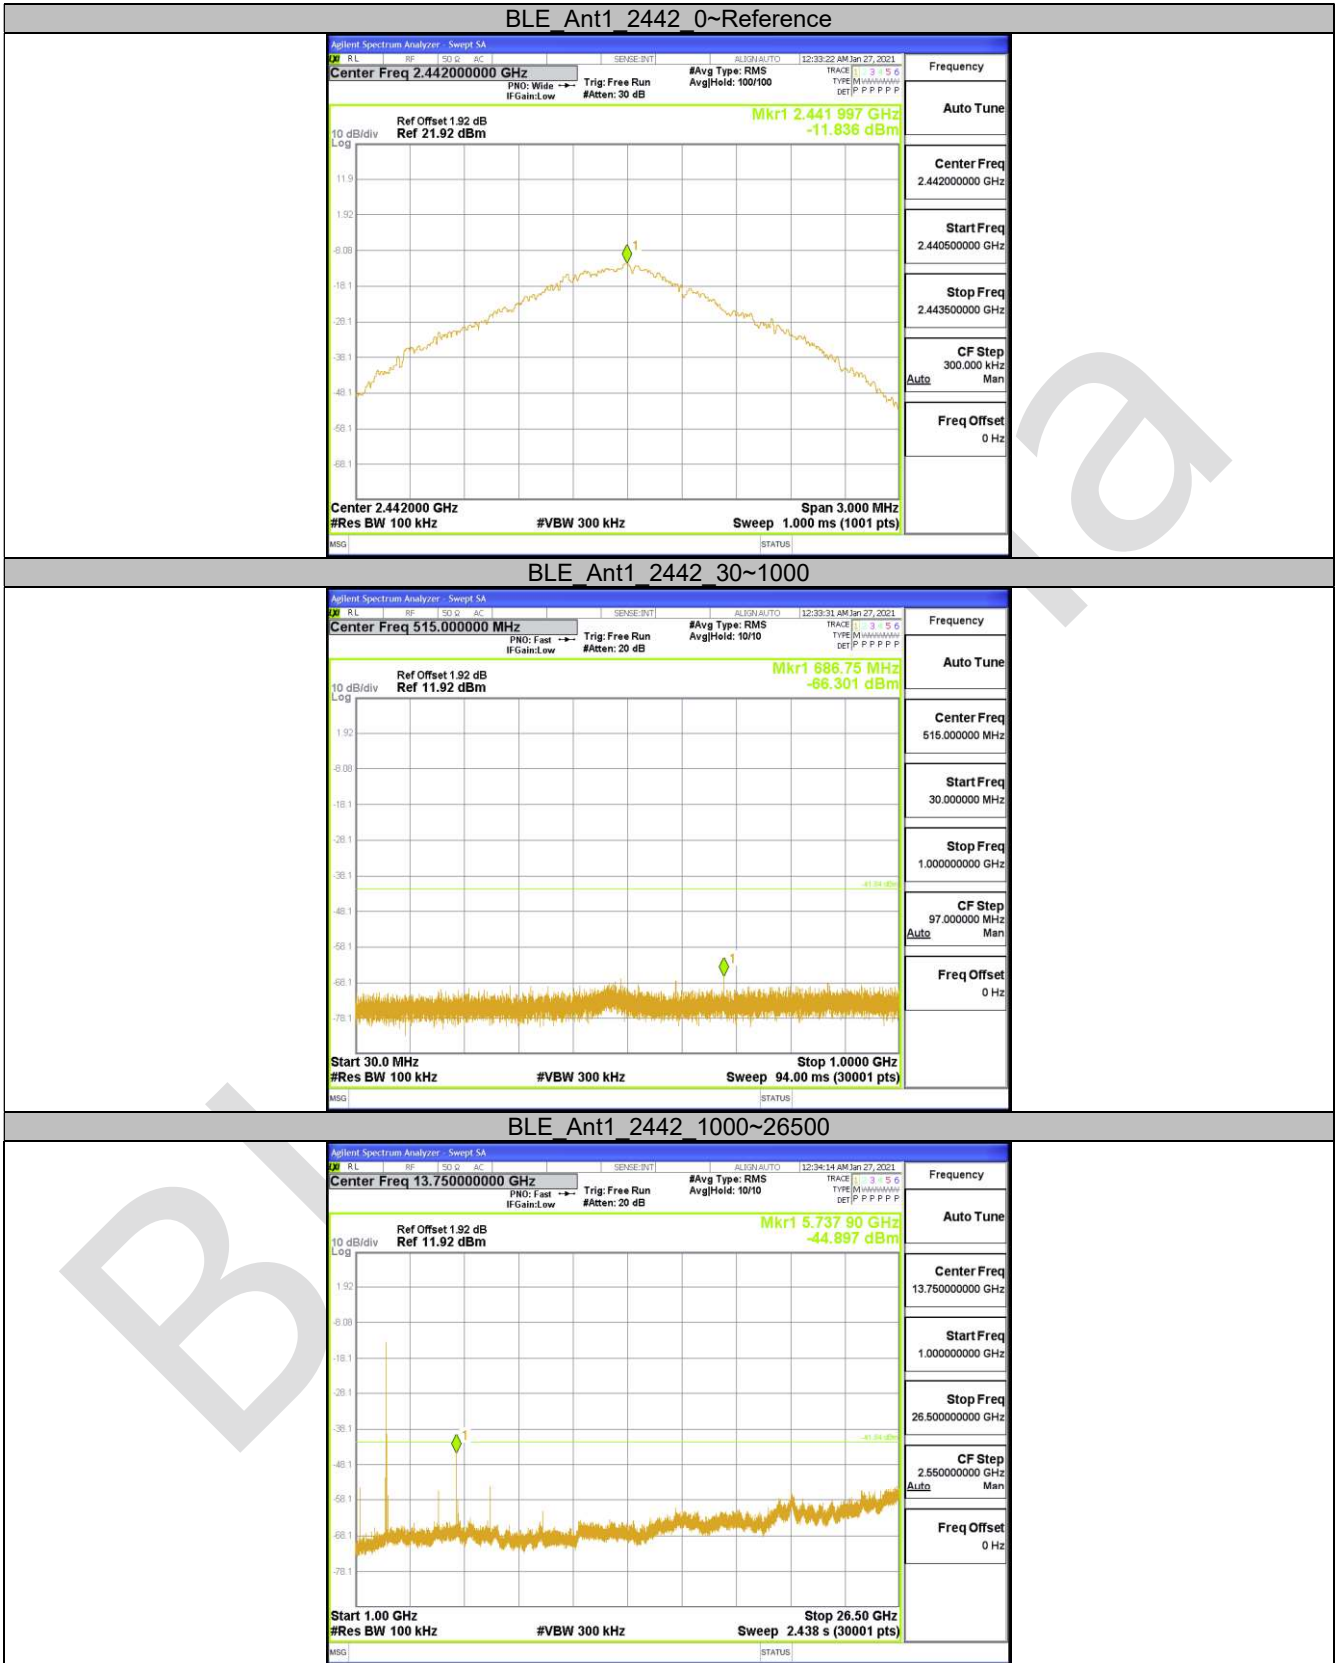

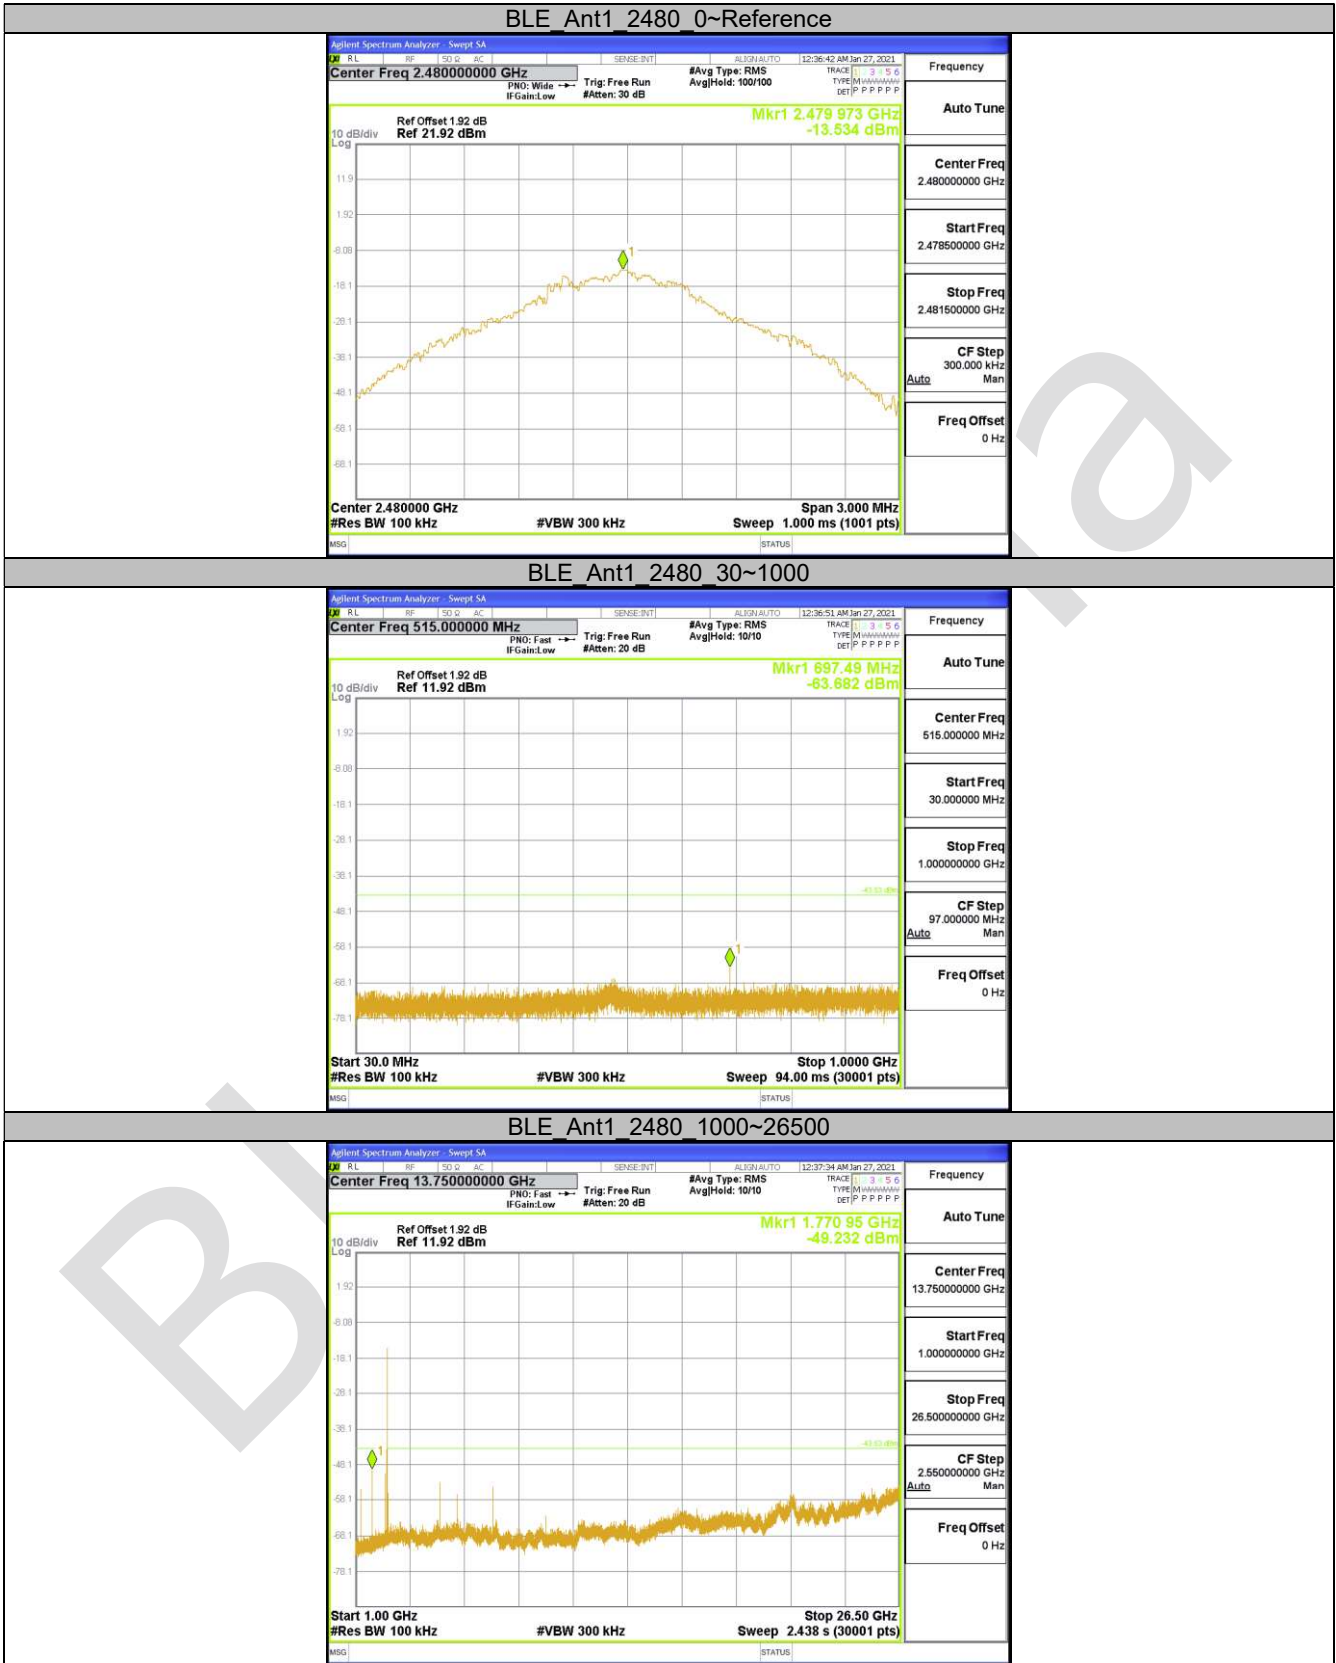

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

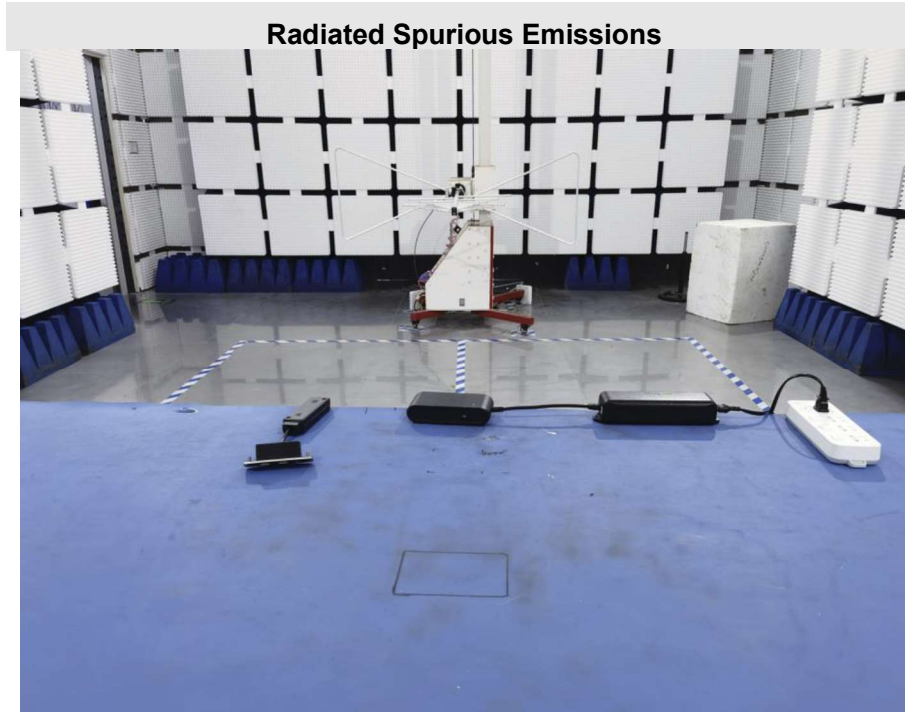

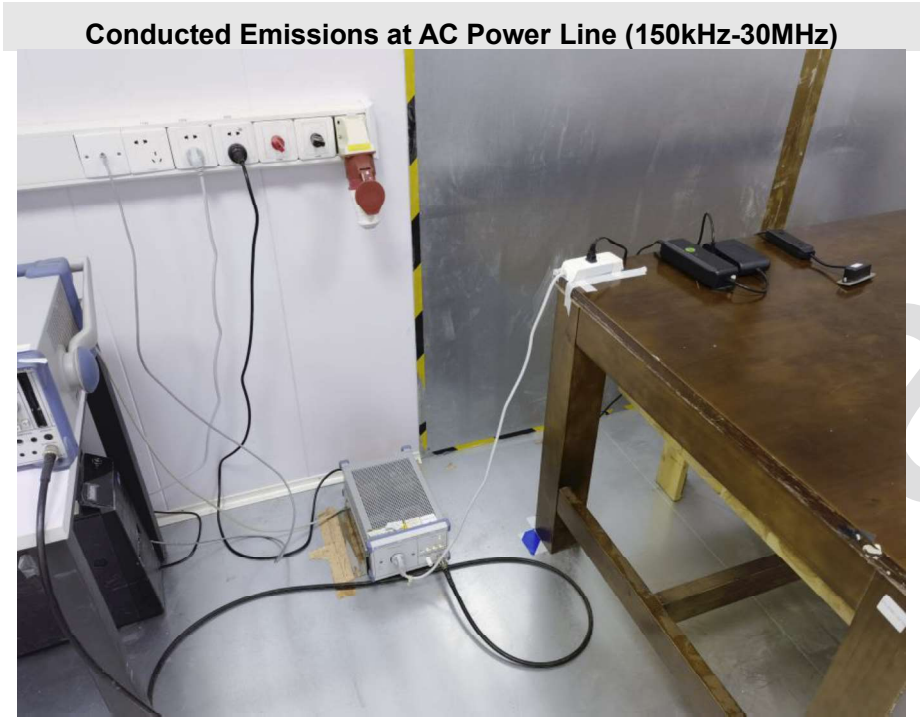

BlueAsia

APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202101-A1903

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia