



Report No.: FCC 1912276
File Reference No.: 2020-01-11

Applicant: Aeon Gold LLC

Product: Lagio Bluetooth Speakers

Model No.: AG-LAG-SPK-2

Trademark: Lagio

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for

the evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: January 11, 2020

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1912276 Page 2 of 84

Date: 2020-01-11



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — **Registration No.:5205A**

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 84

Report No.: FCC1912276

Date: 2020-01-11



Test Report Conclusion

Content

| 1.0 | General Details | 4 |
|------|-------------------------------------|----|
| 1.1 | Test Lab Details | 4 |
| 1.2 | Applicant Details | 4 |
| 1.3 | Description of EUT | 4 |
| 1.4 | Submitted Sample | 4 |
| 1.5 | Test Duration. | 4 |
| 1.6 | Test Uncertainty | 5 |
| 1.7 | Test By | 5 |
| 2.0 | List of Measurement Equipment | 6 |
| 3.0 | Technical Details | 7 |
| 3.1 | Summary of Test Results | 7 |
| 3.2 | Test Standards. | 7 |
| 4.0 | EUT Modification. | 7 |
| 5.0 | Power Line Conducted Emission Test. | 8 |
| 5.1 | Schematics of the Test. | 8 |
| 5.2 | Test Method and Test Procedure. | 8 |
| 5.3 | Configuration of the EUT | 8 |
| 5.4 | EUT Operating Condition. | 9 |
| 5.5 | Conducted Emission Limit. | 9 |
| 5.6 | Test Result. | 9 |
| 6.0 | Radiated Emission test | 14 |
| 6.1 | Test Method and Test Procedure. | 14 |
| 6.2 | Configuration of the EUT | 14 |
| 6.3 | EUT Operation Condition. | 14 |
| 6.4 | Radiated Emission Limit. | 15 |
| 7.0 | 20dB Bandwidth | 27 |
| 8.0 | Maximum Output Power | 39 |
| 9.0 | Carrier Frequency Separation. | 42 |
| 10.0 | Number of Hopping Channel. | 46 |
| 11.0 | Time of Occupancy (Dwell Time) | 50 |
| 12.0 | Out of Band Measurement. | 57 |
| 13.0 | Antenna Requirement. | 74 |
| 14.0 | FCC ID Label | 75 |
| 15.0 | Photo of Test Setup and EUT View. | 76 |

Report No.: FCC1912276 Page 4 of 84

Date: 2020-01-11



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Aeon Gold LLC

Address: 8 Devon Wood, San Antonio TX 78257 USA

Telephone: 1-210-262-7096 Fax: 1-210-262-7096

1.3 Description of EUT

Product: Lagio Bluetooth Speakers

Manufacturer: SHENZHEN FORM ELECTRONICS CO., LTD.

Address: 4F Bldg E, JunFeng Industrial Park, Lezhujiao, Xixiang, Bao'anDist, Shenzhen

China

Brand Name: Lagio

Model Number: AG-LAG-SPK-2

Additional Model Number: N/A

Software Version: FM0198 AB5305A MZH 98C4095E(Lagio) 20191227

Hardware Version: FM0198-V0.2 2019-9-12

Type of Modulation GFSK, 月/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: PCB antenna used. The gain of the antennas is 1.7dBi

Rating: Input: DC 5V or Built-in DC3.7V, 1800mAh,6.66Wh Li-ion battery

1.4 Submitted Sample: 1 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1912276 Page 5 of 84

Date: 2020-01-11



1.5 Test Duration 2019-12-28 to 2020-01-11

Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty = 6.0dB Occupied Channel Bandwidth Uncertainty = 5%

1.7 Test Engineer

Terry Tang The sample tested by

Print Name: Terry Tang

Page 6 of 84

Report No.: FCC1912276

Date: 2020-01-11



| 2.0 Test Equipment | | | | | |
|--------------------|--------------|----------------------|--------------|--------------------------|--------------------------|
| Instrument Type | Manufacturer | Model | Serial No. | Date of Cal. | Due Date |
| ESPI Test Receiver | R&S | ESPI 3 | 100379 | 2019-06-21 | 2020-06-20 |
| TWO Line-V-NETW | R&S | EZH3-Z5 | 100294 | 2019-06-21 | 2020-06-20 |
| TWO Line-V-NETW | R&S | EZH3-Z5 | 100253 | 2019-06-21 | 2020-06-20 |
| Impuls-Begrenzer | R&S | ESH3-Z2 | 100281 | 2019-06-21 | 2020-06-20 |
| Loop Antenna | EMCO | 6507 | 00078608 | 2020-06-20 | 2020-06-20 |
| Spectrum | R&S | FSIQ26 | 100292 | 2019-06-21 | 2020-06-20 |
| Horn Antenna | A-INFO | LB-180400-KF | J211060660 | 2019-06-21 | 2020-06-20 |
| Horn Antenna | R&S | BBHA 9120D | 9120D-631 | 2018-07-09 | 2021-07-08 |
| Power meter | Anritsu | ML2487A | 6K00003613 | 2019-08-22 | 2020-08-21 |
| Power sensor | Anritsu | MA2491A | 32263 | 2019-08-22 | 2020-08-21 |
| Bilog Antenna | Schwarebeck | VULB9163 | 9163/340 | 2018-07-04 | 2021-07-03 |
| 9*6*6 Anechoic | | | N/A | 2018-02-07 | 2021-02-06 |
| EMI Test Receiver | RS | ESVB | 826156/011 | 2019-06-21 | 2020-06-20 |
| EMI Test Receiver | RS | ESH3 | 860904/006 | 2019-06-21 | 2020-06-20 |
| Spectrum | HP/Agilent | ESA-L1500A | US37451154 | 2019-06-21 | 2020-06-20 |
| Spectrum | HP/Agilent | E4407B | MY50441392 | 2019-06-21 | 2020-06-20 |
| Spectrum | RS | FSP | 1164.4391.38 | 2019-01-20 | 2020-01-19 |
| RF Cable | Zhengdi | ZT26-NJ-NJ-8 M/FA | | 2019-06-21 | 2020-06-20 |
| RF Cable | Zhengdi | 7m | | 2019-06-21 | 2020-06-20 |
| RF Switch | EM | EMSW18 | 060391 | 2019-06-21 | 2020-06-20 |
| Pre-Amplifier | Schwarebeck | BBV9743 | #218 | 2019-06-21 | 2020-06-20 |
| Pre-Amplifier | HP/Agilent | 8449B | 3008A00160 | 2019-06-21 | 2020-06-20 |
| LISN | SCHAFFNER | NNB42 | 00012 | 2019-01-08 2020-01-07 | 2020-01-07 2020-01-07 |

Page 7 of 84

Report No.: FCC1912276

Date: 2020-01-11



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

| Requirement | CFR 47 Section | Result | Notes |
|---|---|--------|----------|
| Antenna Requirement | 15.203, 15.247(b)(4) | PASS | Complies |
| Maximum Peak Out Power | 15.247 (b)(1), (4) | PASS | Complies |
| Carrier Frequency Separation | 15.247(a)(1) | PASS | Complies |
| 20dB Channel Bandwidth | 15.247 (a)(1) | PASS | Complies |
| Number of Hopping Channels | 15.247(a)(iii), 15.247(b)(1) | PASS | Complies |
| Time of Occupancy (Dwell Time) | 15.247(a)(iii) | PASS | Complies |
| Spurious Emission, Band Edge, and Restricted bands | 15.247(d),15.205(a), 15.209 (a),15.109 | PASS | Complies |
| Conducted Emissions | 15.207(a), 15.107 | PASS | Complies |
| RF Exposure | 15.247(i), 1.1307(b)(1) | PASS | Complies |

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: FCC1912276 Page 8 of 84

Date: 2020-01-11



5. Power Line Conducted Emission Test

5.1 Schematics of the test

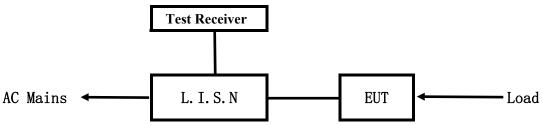


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~60Hz Block diagram of Test setup

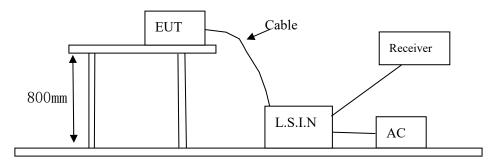

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Report No.: FCC1912276 Page 9 of 84

Date: 2020-01-11



A. EUT

| Device | Manufacturer | Model | FCC ID |
|-----------------|---------------------------|--------------|-------------------|
| Lagio Bluetooth | SHENZHEN FORM ELECTRONICS | AG-LAG-SPK-2 | 2AVJUAG-LAG-SPK-2 |
| Speakers | CO., LTD. | AG-LAG-SFK-2 | ZAVJUAU-LAU-SPK-Z |

B. Internal Device

| Device | Manufacturer | Model | Rating |
|--------|--------------|-------|--------|
| | | | |

C. Peripherals

| Device | Manufacturer | Model | Rating |
|--------------|--------------|----------------|----------------------------------|
| Power Supply | h.TV | S012BE80500200 | Input: 100-240V~, 50/60Hz, 0.5A; |
| | | | Output: DC5V, 2A |

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107,15.207

| Frequency | Class A Lim | its (dB μ V) | Class B Limits (dB µ V) | | |
|-------------------|------------------|---------------|-------------------------|---------------|--|
| (MHz) | Quasi-peak Level | Average Level | Quasi-peak Level | Average Level | |
| $0.15 \sim 0.50$ | 79.0 | 66.0 | 66.0~56.0* | 56.0~46.0* | |
| $0.50 \sim 5.00$ | 73.0 | 60.0 | 56.0 | 46.0 | |
| $5.00 \sim 30.00$ | 73.0 | 60.0 | 60.0 | 50.0 | |

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2020-01-11

Report No.: FCC1912276



Conducted Emission on Live Terminal (150kHz to 30MHz) A:


EUT Operating Environment

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: RX mode Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

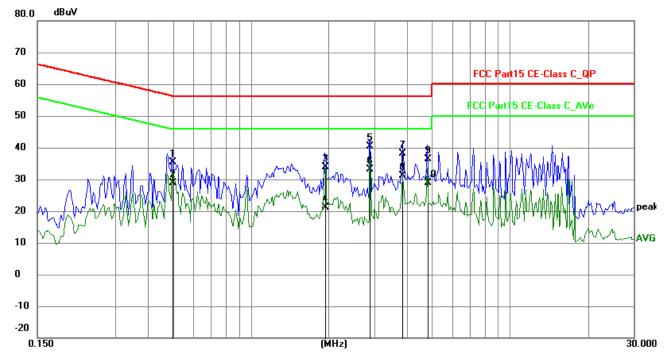

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1 | 0.4971 | 25.73 | 9.77 | 35.50 | 56.05 | -20.55 | QP | Р |
| 2 | 0.4971 | 19.11 | 9.77 | 28.88 | 46.05 | -17.17 | AVG | Р |
| 3 | 1.9362 | 24.04 | 9.80 | 33.84 | 56.00 | -22.16 | QP | Р |
| 4 | 1.9362 | 11.37 | 9.80 | 21.17 | 46.00 | -24.83 | AVG | Р |
| 5 | 2.8839 | 30.56 | 9.84 | 40.40 | 56.00 | -15.60 | QP | Р |
| 6 | 2.8839 | 23.21 | 9.84 | 33.05 | 46.00 | -12.95 | AVG | Р |
| 7 | 3.8502 | 28.30 | 9.88 | 38.18 | 56.00 | -17.82 | QP | Р |
| 8 | 3.8502 | 21.23 | 9.88 | 31.11 | 46.00 | -14.89 | AVG | Р |
| 9 | 4.8096 | 26.36 | 9.92 | 36.28 | 56.00 | -19.72 | QP | Р |
| 10 | 4.8096 | 18.95 | 9.92 | 28.87 | 46.00 | -17.13 | AVG | Р |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: FCC1912276

Date: 2020-01-11



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: RX mode Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

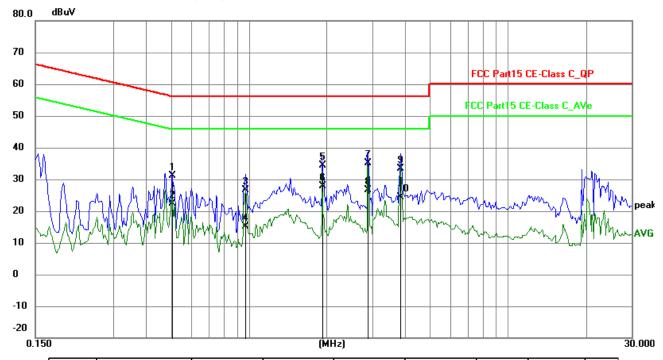

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1 | 0.5049 | 21.34 | 9.77 | 31.11 | 56.00 | -24.89 | QP | Р |
| 2 | 0.5049 | 12.73 | 9.77 | 22.50 | 46.00 | -23.50 | AVG | Р |
| 3 | 0.9735 | 16.96 | 9.79 | 26.75 | 56.00 | -29.25 | QP | Р |
| 4 | 0.9735 | 5.23 | 9.79 | 15.02 | 46.00 | -30.98 | AVG | Р |
| 5 | 1.9245 | 24.58 | 9.80 | 34.38 | 56.00 | -21.62 | QP | Р |
| 6 | 1.9245 | 18.15 | 9.80 | 27.95 | 46.00 | -18.05 | AVG | Р |
| 7 | 2.8839 | 25.18 | 9.84 | 35.02 | 56.00 | -20.98 | QP | Р |
| 8 | 2.8839 | 16.72 | 9.84 | 26.56 | 46.00 | -19.44 | AVG | Р |
| 9 | 3.8502 | 23.49 | 9.88 | 33.37 | 56.00 | -22.63 | QP | Р |
| 10 | 3.8502 | 14.40 | 9.88 | 24.28 | 46.00 | -21.72 | AVG | Р |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2020-01-11



C: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

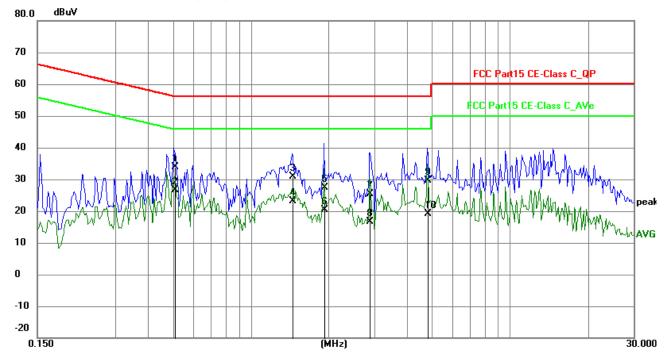

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1 | 0.5088 | 24.15 | 9.77 | 33.92 | 56.00 | -22.08 | QP | Р |
| 2 | 0.5088 | 16.88 | 9.77 | 26.65 | 46.00 | -19.35 | AVG | Р |
| 3 | 1.4448 | 21.06 | 9.79 | 30.85 | 56.00 | -25.15 | QP | Р |
| 4 | 1.4448 | 13.26 | 9.79 | 23.05 | 46.00 | -22.95 | AVG | Р |
| 5 | 1.9245 | 17.55 | 9.80 | 27.35 | 56.00 | -28.65 | QP | Р |
| 6 | 1.9245 | 10.65 | 9.80 | 20.45 | 46.00 | -25.55 | AVG | Р |
| 7 | 2.8839 | 15.49 | 9.84 | 25.33 | 56.00 | -30.67 | QP | Р |
| 8 | 2.8839 | 6.74 | 9.84 | 16.58 | 46.00 | -29.42 | AVG | Р |
| 9 | 4.8096 | 19.62 | 9.92 | 29.54 | 56.00 | -26.46 | QP | Р |
| 10 | 4.8096 | 9.21 | 9.92 | 19.13 | 46.00 | -26.87 | AVG | Р |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: FCC1912276 Page 13 of 84

Date: 2020-01-11



D: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

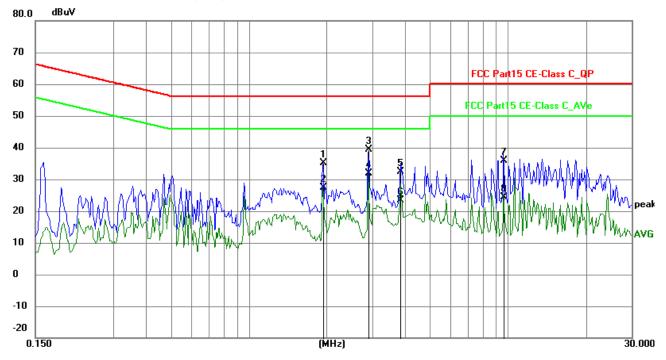

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|-----|--------------------|----------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1 | 1.9323 | 25.24 | 9.80 | 35.04 | 56.00 | -20.96 | QP | Р |
| 2 | 1.9323 | 17.68 | 9.80 | 27.48 | 46.00 | -18.52 | AVG | Р |
| 3 | 2.8878 | 29.52 | 9.84 | 39.36 | 56.00 | -16.64 | QP | Р |
| 4 | 2.8878 | 22.02 | 9.84 | 31.86 | 46.00 | -14.14 | AVG | Р |
| 5 | 3.8603 | 22.54 | 9.88 | 32.42 | 56.00 | -23.58 | QP | Р |
| 6 | 3.8603 | 13.44 | 9.88 | 23.32 | 46.00 | -22.68 | AVG | Р |
| 7 | 9.6183 | 25.65 | 10.14 | 35.79 | 60.00 | -24.21 | QP | Р |
| 8 | 9.6183 | 14.25 | 10.14 | 24.39 | 50.00 | -25.61 | AVG | Р |

Report No.: FCC1912276 Page 14 of 84


Date: 2020-01-11



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

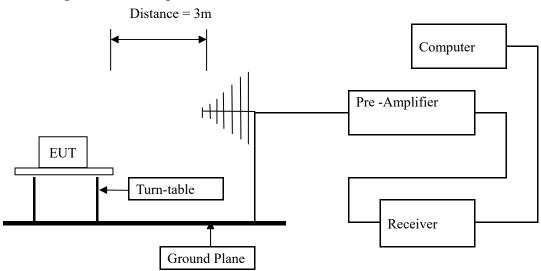

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1912276 Page 15 of 84

Date: 2020-01-11



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

| Frequency Range (MHz) | Distance (m) | Field strength (dB μ V/m) |
|-----------------------|--------------|---------------------------|
| 30-88 | 3 | 40.0 |
| 88-216 | 3 | 43.5 |
| 216-960 | 3 | 46.0 |
| Above 960 | 3 | 54.0 |

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. 8DPSK was the worse case because it has highest output power
- 5. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 6. Battery fully charged

Report No.: FCC1912276

Date: 2020-01-11



Page 16 of 84

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass


Page 17 of 84 Report No.: FCC1912276

Date: 2020-01-11



Test Figure: RX mode

H

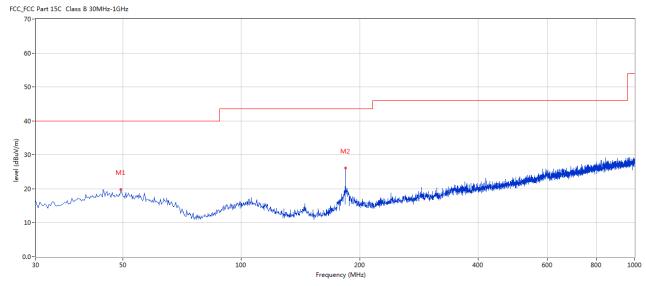


| No. | Frequency | Results | Factor | Limit | Over | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | Limit (dB) | | | (cm) | | |
| 1 | 49.395 | 19.85 | -11.28 | 40.0 | -20.15 | Peak | 343.00 | 100 | Н | Pass |
| 2 | 183.949 | 26.16 | -14.97 | 43.5 | -17.34 | Peak | 107.00 | 200 | Н | Pass |


Report No.: FCC1912276 Page 18 of 84

Date: 2020-01-11



Test Figure: RX mode



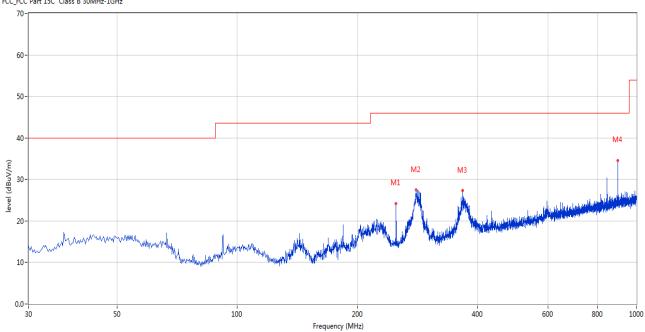

| No. | Frequency | Results | Factor (dB) | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|-------------|----------|------------|----------|--------|--------|-----|---------|
| | (MHz) | (dBuV/m) | | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 249.893 | 24.23 | -12.08 | 47.0 | -22.77 | Peak | 360.00 | 200 | V | Pass |
| 2 | 280.440 | 27.47 | -11.49 | 47.0 | -19.53 | Peak | 235.00 | 100 | V | Pass |
| 3 | 366.506 | 27.32 | -9.50 | 47.0 | -19.68 | Peak | 309.00 | 100 | V | Pass |
| 4 | 897.691 | 34.60 | -1.76 | 47.0 | -12.40 | Peak | 360.00 | 200 | V | Pass |


Page 19 of 84 Report No.: FCC1912276

Date: 2020-01-11



Test Figure: TX mode

H

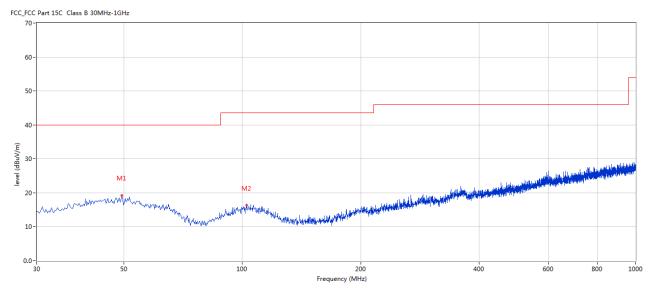

| No. | Frequency | Results | Factor | Limit | Over | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | Limit (dB) | | | (cm) | | |
| 1 | 49.395 | 19.27 | -11.28 | 40.0 | -20.73 | Peak | 97.00 | 100 | Н | Pass |
| 2 | 102.489 | 16.34 | -13.41 | 43.5 | -27.16 | Peak | 75.00 | 100 | Н | Pass |


Report No.: FCC1912276 Page 20 of 84

Date: 2020-01-11



Test Figure: TX mode



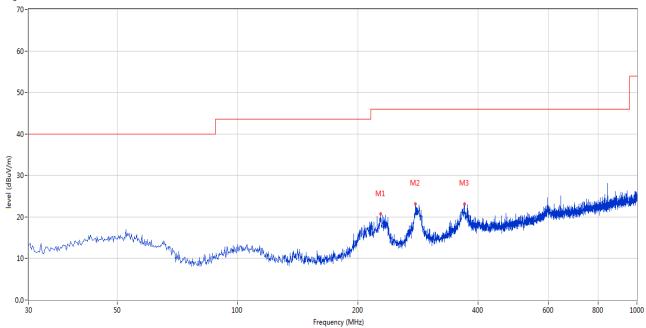

| No. | Frequency | Results | Factor (dB) | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|-------------|----------|------------|----------|--------|--------|-----|---------|
| | (MHz) | (dBuV/m) | | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 228.073 | 20.69 | -12.77 | 40.0 | -19.31 | Peak | 78.00 | 100 | V | Pass |
| 2 | 278.743 | 23.17 | -11.56 | 47.0 | -23.83 | Peak | 223.00 | 100 | V | Pass |
| 3 | 369.900 | 23.17 | -9.57 | 47.0 | -23.83 | Peak | 0.00 | 100 | ٧ | Pass |

Report No.: FCC1912276 Page 21 of 84

Date: 2020-01-11




Test Figures above 1GHz:

Please refer to the following test plots for details:

Low Channel: Vertical

FCC_FCC Part 15B Class B 1GHz-18GHz - 2

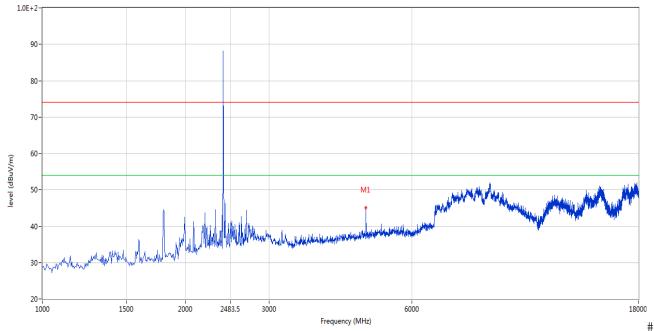


| No. | Frequency | Results | Factor (dB) | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|-------------|----------|------------|----------|-------|--------|-----|---------|
| | (MHz) | (dBuV/m) | | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 4802.799 | 45.05 | 3.12 | 54.0 | -8.95 | Peak | 95.00 | 100 | V | Pass |

Report No.: FCC1912276 Page 22 of 84

Date: 2020-01-11



Low Channel: Horizontal

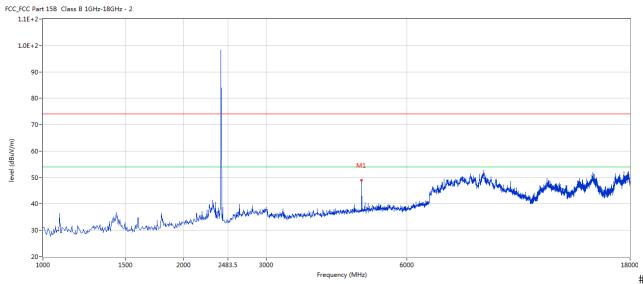


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 4802.799 | 49.89 | 3.12 | 54.0 | -4.11 | Peak | 214.00 | 100 | Н | Pass |

Report No.: FCC1912276 Page 23 of 84

Date: 2020-01-11



Middle Channel: Horizontal

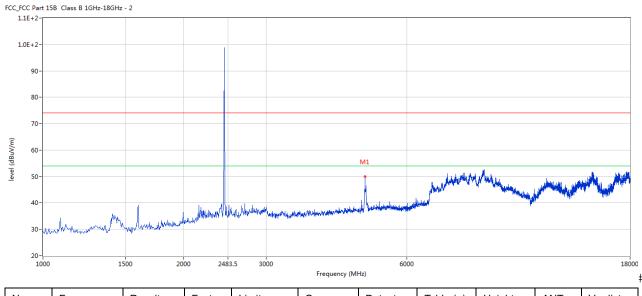


| No. | Frequency | Results | Factor | Limit | Over | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | Limit (dB) | | | (cm) | | |
| 1 | 4879.280 | 50.04 | 3.20 | 54.0 | -3.96 | Peak | 224.00 | 100 | Н | Pass |

Report No.: FCC1912276 Page 24 of 84

Date: 2020-01-11



Middle Channel: Vertical

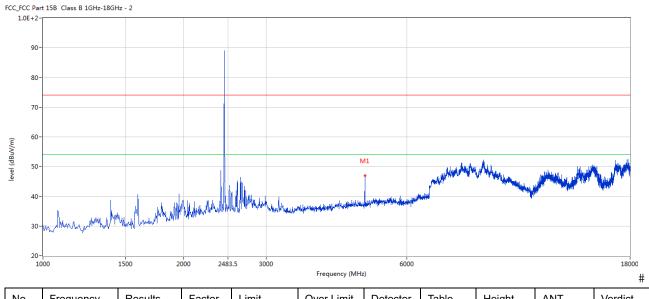


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 4883.529 | 46.89 | 3.20 | 54.0 | -7.11 | Peak | 180.00 | 100 | V | Pass |

Page 25 of 84 Report No.: FCC1912276

Date: 2020-01-11



High Channel: Horizontal

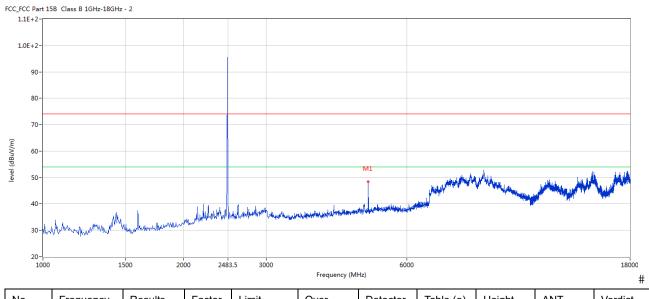


| No. | Frequency | Results | Factor | Limit | Over | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | Limit (dB) | | | (cm) | | |
| 1 | 4960.010 | 49.31 | 3.36 | 54.0 | -4.69 | Peak | 234.00 | 100 | Н | Pass |

Report No.: FCC1912276 Page 26 of 84

Date: 2020-01-11



High Channel: Vertical

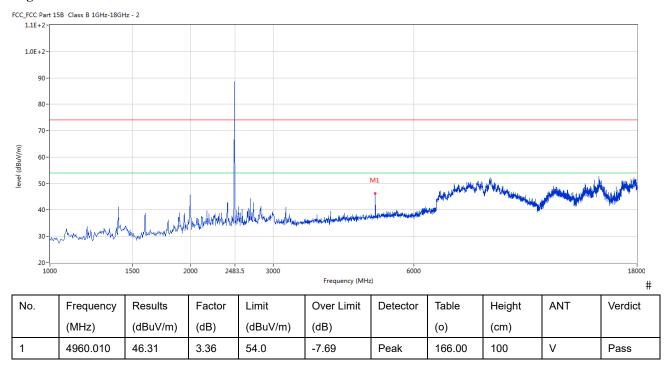

Note: 1. Level = Reading + AF + Cable - Preamp

- 2. For the radiated emissions above 18G and below 30MHz, it is the floor noise.
- 3. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Report No.: FCC1912276

Date: 2020-01-11



Page 27 of 84

7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

| JI | ype of habitanian of six | | | | | | | | | | |
|----------|--------------------------|--------------------------|------------------------|--------------|--|--|--|--|--|--|--|
| EUT | Lagio | Bluetooth Speakers | Model | AG-LAG-SPK-2 | | | | | | | |
| Mode | Ke | ep Transmitting | Input Voltage | DC3.7V | | | | | | | |
| Temperat | ure | 24 deg. C, | Humidity | 56% RH | | | | | | | |
| Channel | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Minimum Limit (kHz) | Pass/ Fail | | | | | | | |
| Low | 2402 | 1034 | | Pass | | | | | | | |
| Middle | 2441 | 2441 1034 | | Pass | | | | | | | |
| High | 2480 | 2480 1029 | | Pass | | | | | | | |

Page 28 of 84


Report No.: FCC1912276

Date: 2020-01-11



Test Figure:

1. Condition: Low Channel

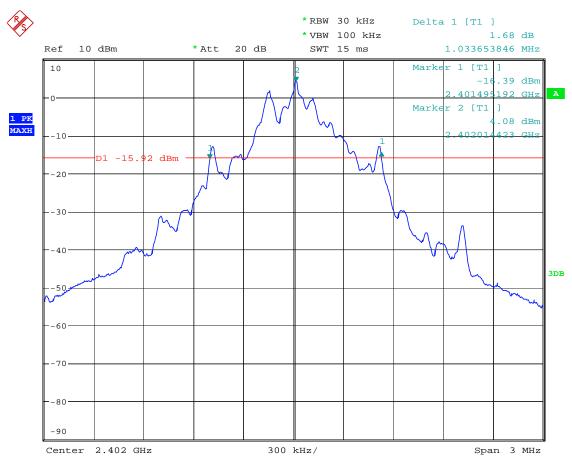


Date: 7.JAN.2020 16:51:00

Report No.: FCC1912276 Page 29 of 84

Date: 2020-01-11



2. Condition: Middle Channel

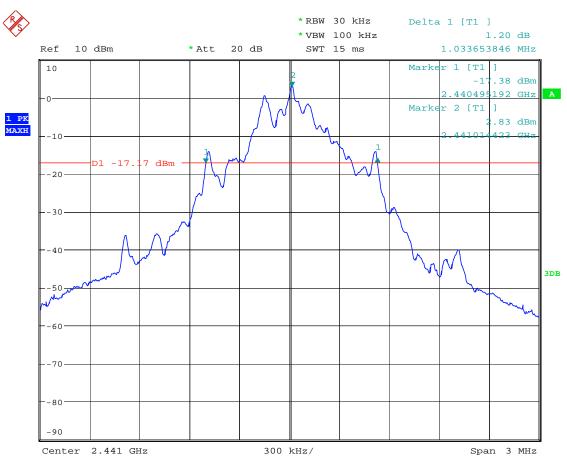


Date: 7.JAN.2020 16:52:45

Report No.: FCC1912276 Page 30 of 84

Date: 2020-01-11



3. High Channel

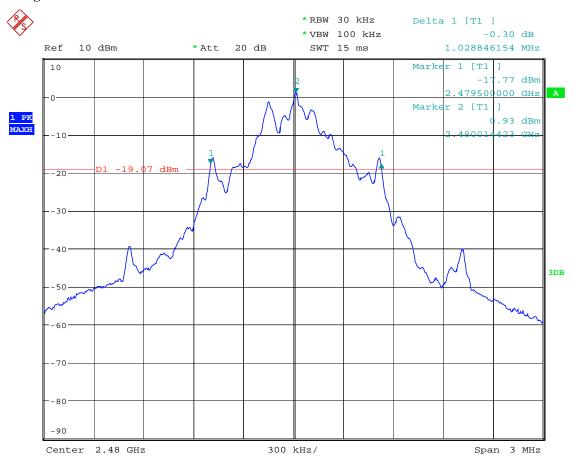

Date: 7.JAN.2020 16:55:34

Page 31 of 84 Report No.: FCC1912276

Date: 2020-01-11



Test Result

Type of Modulation: $\sqrt{1/4}$ DQPSK

| EUT | Lagio | Bluetooth Speakers | Model | AG-LAG-SPK-2 |
|----------|-------------------------|--------------------------|------------------------|--------------|
| Mode | K | eep Transmitting | Input Voltage | DC3.7V |
| Temperat | ure | 24 deg. C, | Humidity | 56% RH |
| Channel | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Maximum Limit (kHz) | Pass/ Fail |
| Low | 2402 | 1120 | | Pass |
| Middle | 2441 | 2441 1125 | | Pass |
| High | 2480 | | | Pass |

Page 32 of 84


Report No.: FCC1912276

Date: 2020-01-11



Test Figure:

1. Condition: Low Channel

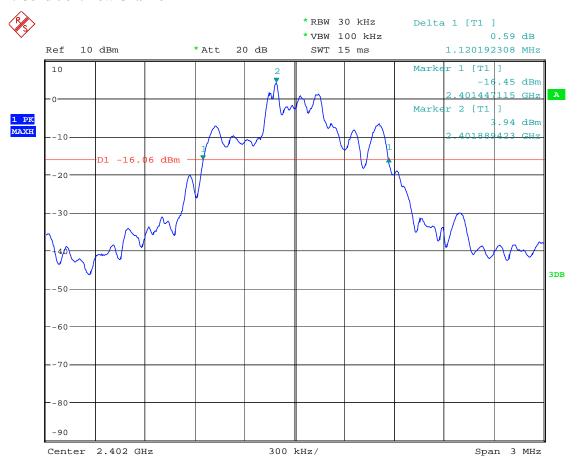

Date: 7.JAN.2020 16:48:53


Page 33 of 84

Report No.: FCC1912276

Date: 2020-01-11



2. Condition: Middle Channel

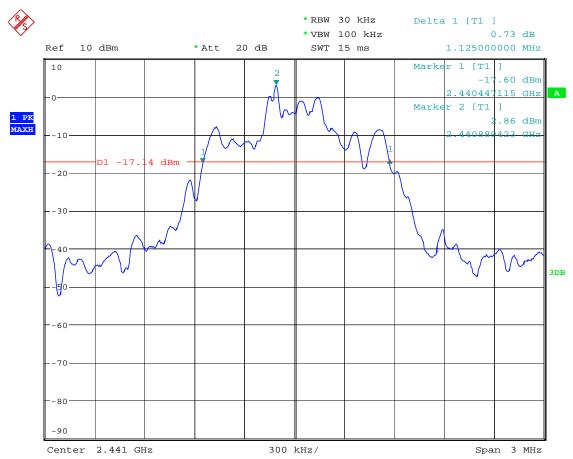


Date: 7.JAN.2020 16:47:08

Report No.: FCC1912276 Page 34 of 84

Date: 2020-01-11



3. High Channel

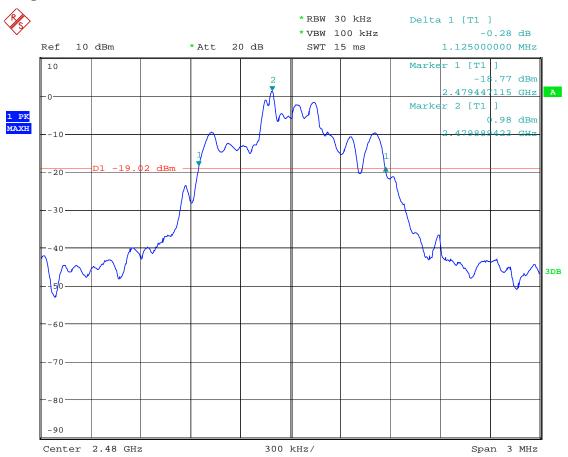

Date: 7.JAN.2020 16:44:59

Page 35 of 84 Report No.: FCC1912276

Date: 2020-01-11



Test Result

Type of Modulation: 8DPSK

| EUT | Lagio | Bluetooth Speakers | Model | AG-LAG-SPK-2 |
|----------|-------------------------|--------------------------|------------------------|--------------|
| Mode | Ko | eep Transmitting | Input Voltage | DC3.7V |
| Temperat | ure | 24 deg. C, | Humidity | 56% RH |
| Channel | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Maximum Limit (kHz) | Pass/ Fail |
| Low | 2402 | 1212 | | Pass |
| Middle | 2441 | 1221 | | Pass |
| High | 2480 | 1216 | | Pass |

Page 36 of 84


Report No.: FCC1912276

Date: 2020-01-11



Test Figure:

1. Condition: Low Channel

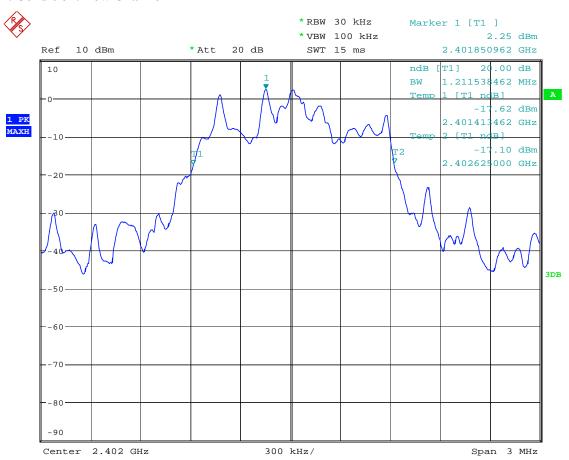


Date: 7.JAN.2020 16:41:50

Report No.: FCC1912276 Page 37 of 84

Date: 2020-01-11



2. Condition: Middle Channel

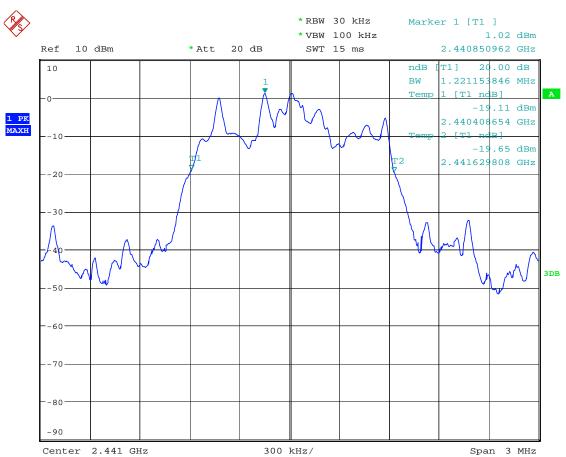

Date: 7.JAN.2020 16:42:47


Page 38 of 84

Report No.: FCC1912276

Date: 2020-01-11



3. High Channel

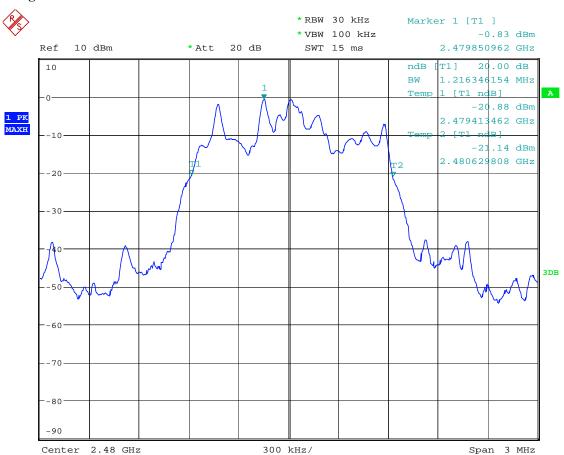

Date: 7.JAN.2020 16:43:23

Report No.: FCC1912276 Page 39 of 84

Date: 2020-01-11



8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = 60s; Detector function = PK; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 40 of 84

Report No.: FCC1912276

Date: 2020-01-11



8.4Test Results

Type of Modulation: GFSK

| EUT | Lagio | Lagio Bluetooth Speakers | | Model | AG-LAG-SPK-2 |
|-------------|-------------------------|--------------------------|-------|------------------------|--------------|
| Mode | K | eep Transmitting | Input | Voltage | DC3.7V |
| Temperature | е | 24 deg. C, | | idity | 56% RH |
| Channel | Channel Frequency (MHz) | Max. Power Output (dBm | n) | Peak Power Limit (dBm) | Pass/ Fail |
| Low | 2402 | 4.11 | | 30 | Pass |
| Middle | 2441 | 3.34 | | 30 | Pass |
| High | 2480 | 1.40 | | 30 | Pass |

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Type of Modulation: Л/4DQPSK

| EUT | | Lagio Bluetooth Speakers | | Model | | AG-LAG-SPK-2 |
|-------------------|------------------------|--------------------------|-------------------------|-------|---------------|--------------|
| Mode | Mode Keep Transmitting | | Input Voltage | | DC3.7V | |
| Temperature | e | | 24 deg. C, | Humi | idity | 56% RH |
| Channel Frequency | | nannel Frequency | Max. Power Output (dBm) | | Peak Power | Pass/ Fail |
| | | (MHz) | Peak | | Limit (dBm) | |
| Low | | 2402 | 5.53 | | 30 | Pass |
| Middle | | 2441 | 4.58 | | 30 | Pass |
| High | | 2480 | 2.86 | | 30 | Pass |

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: FCC1912276 Page 41 of 84

Date: 2020-01-11



Type of Modulation: 8DPSK

| EUT | Lagio | Lagio Bluetooth Speakers | | Model | AG-LAG-SPK-2 |
|-------------|-------------------------|-------------------------------|--|------------------------|--------------|
| Mode | Ke | Keep Transmitting | | ıt Voltage | DC3.7V |
| Temperature | e | 24 deg. C, Hur | | umidity | 56% RH |
| Channel | Channel Frequency (MHz) | Max. Power Output (dBm) Peak | | Peak Power Limit (dBm) | Pass/ Fail |
| Low | 2402 | 5.60 | | 30 | Pass |
| Middle | 2441 | 4.61 | | 30 | Pass |
| High | 2480 | 2.89 | | 30 | Pass |

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Report No.: FCC1912276

Date: 2020-01-11



Page 42 of 84

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 43 of 84

Report No.: FCC1912276

Date: 2020-01-11




9.4Test Result

Type of Modulation: GFSK

| EUT | Lagio Bluetooth S | Model | AG- | -LAG-SPK-2 | |
|------------------------------|-------------------|-----------------|------------------|------------|------------|
| Mode | Hopping On I | | Input Voltage | DC3.7V | |
| Temperature | 24 deg. C, | | Humidity | | 56% RH |
| Carrier Frequency Separation | | | Limit | | Pass/ Fail |
| | 1.000MHz | ≥ 25 kHz or 2/3 | of the 20 dB ban | dwidth | Pass |

Test Plots

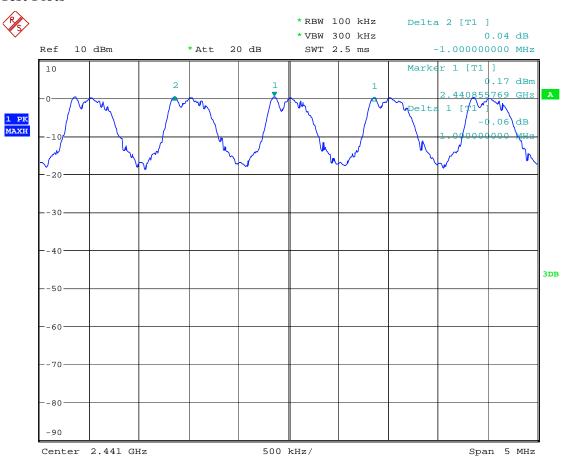

Date: 7.JAN.2020 13:22:18

Report No.: FCC1912276 Page 44 of 84


Date: 2020-01-11



Type of Modulation: Л/4DQPSK

| EUT | Lagio Bluetooth S | Model | AG | -LAG-SPK-2 | |
|------------------------------|-------------------|---------------|-------------------|------------|------------|
| Mode | Hopping On I | | Input Voltage | DC3.7V | |
| Temperature | 24 deg. C, | | Humidity | 56% RH | |
| Carrier Frequency Separation | | | Limit | | Pass/ Fail |
| 1.000MHz | | ≥ 25 kHz or 2 | /3 of 20 dB bandy | vidth | Pass |

Test Plots

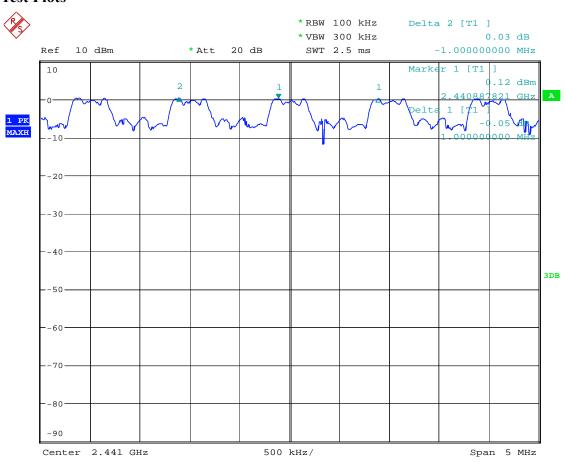

Date: 7.JAN.2020 14:22:53

Report No.: FCC1912276 Page 45 of 84

Date: 2020-01-11



Type of Modulation: 8DPSK

| EUT | Lagio Bluetooth S | Model | AG | -LAG-SPK-2 | |
|-------------|----------------------|---------------|-------------------|------------|------------|
| Mode | Hopping On II | | Input Voltage | DC3.7V | |
| Temperature | 24 deg. C, | | Humidity | 56% RH | |
| Carrier I | Frequency Separation | | Limit | | Pass/ Fail |
| | 1.000MHz | ≥ 25 kHz or 2 | /3 of 20 dB bandy | vidth | Pass |

Test Plots



Date: 7.JAN.2020 15:40:09

Report No.: FCC1912276

Date: 2020-01-11



Page 46 of 84

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 47 of 84

Report No.: FCC1912276

Date: 2020-01-11




10.4Test Result

Type of Modulation: GFSK

| EUT | Lagio Bluetooth Speakers | | Model | AG | -LAG-SPK-2 | |
|-------------------------|--------------------------|----------------|---------------|--------|------------|--|
| Mode | Hopping On Inp | | Input Voltage | DC3.7V | | |
| Temperature | 2 | 24 deg. C, | Humidity | 56% RH | | |
| Operating Frequency Nur | | Number of hopp | ping channels | Limit | Pass/ Fail | |
| 2402-2480MHz | | 79 | | ≥ 15 | Pass | |

Test Plot

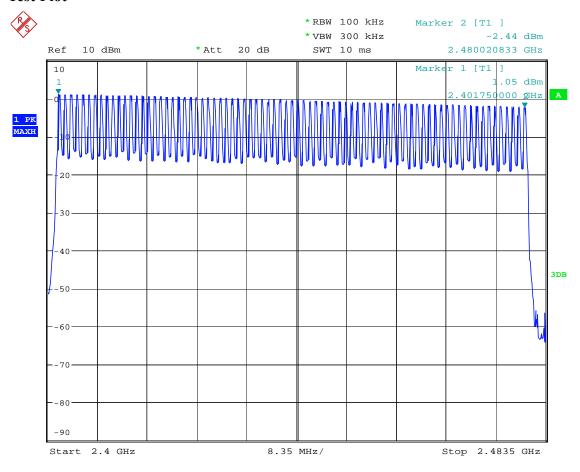

Date: 7.JAN.2020 11:24:57

Page 48 of 84

Report No.: FCC1912276


Date: 2020-01-11



Type of Modulation: Л/4DQPSK

| EUT | Lagio Bluetooth Speakers | | Model | AG-LAG-SPK-2 |
|---------------------|--------------------------|----------------------------|------------------|--------------|
| Mode | Hopping On | | Input Voltage | DC3.7V |
| Temperature | | 24 deg. C, | Humidity | 56% RH |
| Operating Frequency | | Number of hopping channels | Limit | Pass/ Fail |
| 2402-2480MHz | | 79 | ≥ 15 | Pass |

Test Plot

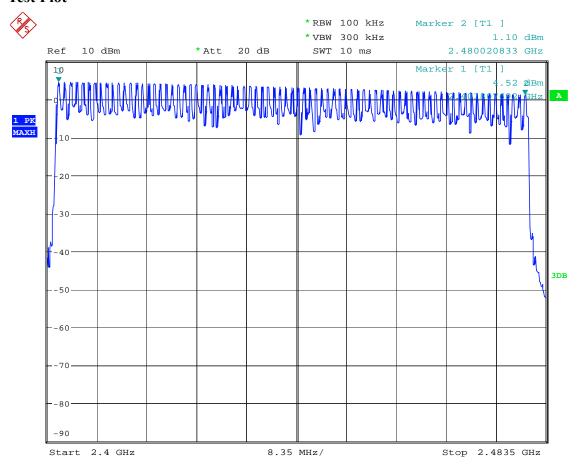

Date: 7.JAN.2020 14:57:10

Report No.: FCC1912276 Page 49 of 84


Date: 2020-01-11



Type of Modulation: 8DPSK

| EUT | Lagio Bluetooth Speakers | | M | odel | A | G-LAG-SPK-2 |
|---------------------|--------------------------|----------------------------|-------|----------|-----|-------------|
| Mode | Hopping On | | Input | Voltage | | DC3.7V |
| Temperature | | 24 deg. C, | | dity | | 56% RH |
| Operating Frequency | | Number of hopping channels | ng | Liı | mit | Pass/ Fail |
| 2402-2480MHz | | 79 | | <u> </u> | 15 | Pass |

Test Plot

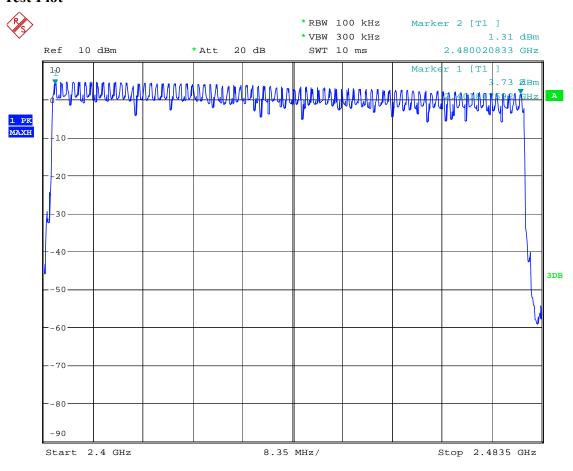

Date: 7.JAN.2020 15:10:11

Report No.: FCC1912276

Date: 2020-01-11



Page 50 of 84

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: FCC1912276 Page 51 of 84

Date: 2020-01-11



11.4 Test Result

Type of Modulation: GFSK

| EUT | Lagio Bluer | tooth Speakers | Model | AG-I | LAG-SPK-2 | | |
|------------|-------------|---------------------------|----------|-------------------|-----------|--------|--|
| Mode | Keep Tr | ransmitting Input Voltage | | Keep Transmitting | | DC3.7V | |
| Temperatur | e 24 c | leg. C, | Humidity | 5 | 66% RH | | |
| Channel | Reading | Hoping | g Rate | Actual | Limit | | |
| | DH5 | | | | | | |
| Middle | 2.949ms | 266.667 | 7 hop/s | 0.315s | 0.4s | | |

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: DH5 was the worst case.

Page 52 of 84


Report No.: FCC1912276

Date: 2020-01-11



Test Plots:

DH5

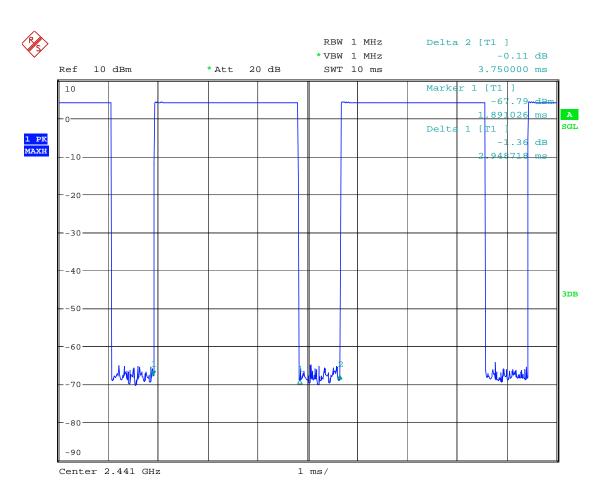

Date: 7.JAN.2020 17:36:48

Report No.: FCC1912276

Date: 2020-01-11



Page 53 of 84

Test Result

Type of Modulation: Л/4DQPSK

| EUT | Lagio Bluetooth Speakers | | Model | AG-I | LAG-SPK-2 | | | |
|------------|--------------------------|---------------------------|----------|-------------------|-----------|--------|--|--|
| Mode | Keep Ti | ransmitting Input Voltage | | Keep Transmitting | | DC3.7V | | |
| Temperatur | e 24 c | deg. C, | Humidity | 5 | 66% RH | | | |
| Channel | Reading | Hoping | g Rate | Actual | Limit | | | |
| | DH5 | | | | | | | |
| Middle | 2.949ms | 266.667 | 7 hop/s | 0.315s | 0.4s | | | |

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 2DH5 was the worst case.

Page 54 of 84


Report No.: FCC1912276

Date: 2020-01-11



Test Plots:

2DH5

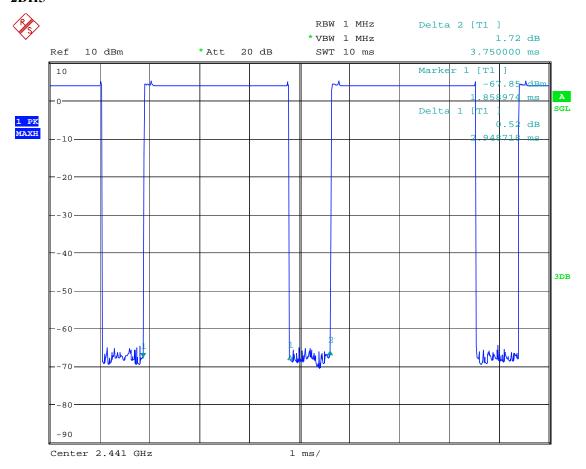

Date: 7.JAN.2020 17:34:19

Report No.: FCC1912276 Page 55 of 84

Date: 2020-01-11



Type of Modulation: 8DPSK

| EUT | Lagio Bluet | Lagio Bluetooth Speakers | | AG-I | LAG-SPK-2 | | |
|------------|-------------|---------------------------|----------|-------------------|-----------|--------|--|
| Mode | Keep Tr | ransmitting Input Voltage | | Keep Transmitting | | DC3.7V | |
| Temperatur | e 24 d | eg. C, | Humidity | 56% RH | | | |
| Channel | Reading | Hoping | g Rate | Actual | Limit | | |
| | DH5 | | | | | | |
| Middle | 2.965ms | 266.667 | 7 hop/s | 0.316s | 0.4s | | |

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 3DH5 was the worst case.

Page 56 of 84


Report No.: FCC1912276

Date: 2020-01-11



Test Plots:

3DH5

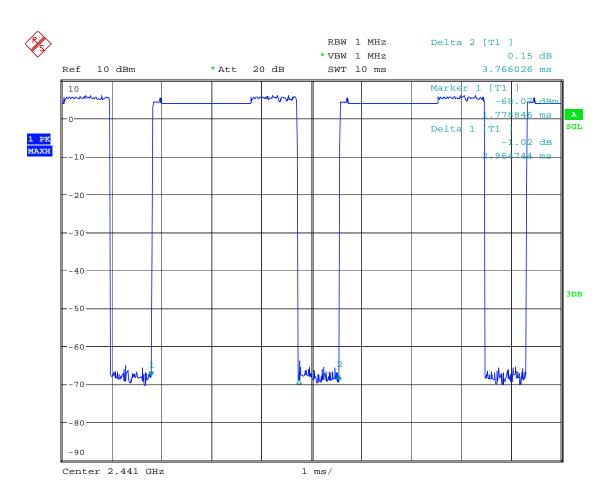

Date: 7.JAN.2020 17:31:28

Report No.: FCC1912276


Date: 2020-01-11



Page 57 of 84

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule. 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 58 of 84

Report No.: FCC1912276

Date: 2020-01-11




Type of Modulation: GFSK

Band Edge Test Result 12.4

| Product: | Lagio Bluetooth Speakers | Test Mode: | Low Channel |
|--------------|--------------------------|---------------|-------------|
| Mode | Keeping Transmitting | Input Voltage | DC3.7V |
| Temperature | 24 deg. C | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

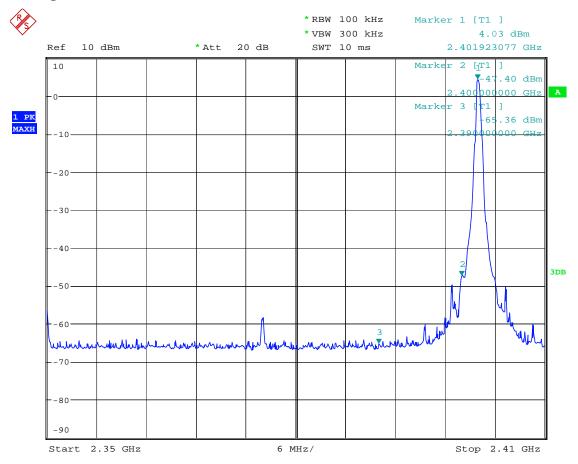

Date: 7.JAN.2020 16:32:39

Page 59 of 84

Date: 2020-01-11




Type of Modulation: GFSK

Band Edge Test Result 12.4

Report No.: FCC1912276

| Product: | Lagio Bluetooth Speakers | Test Mode: | High Channel |
|--------------|--------------------------|---------------|--------------|
| Mode | Keeping Transmitting | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

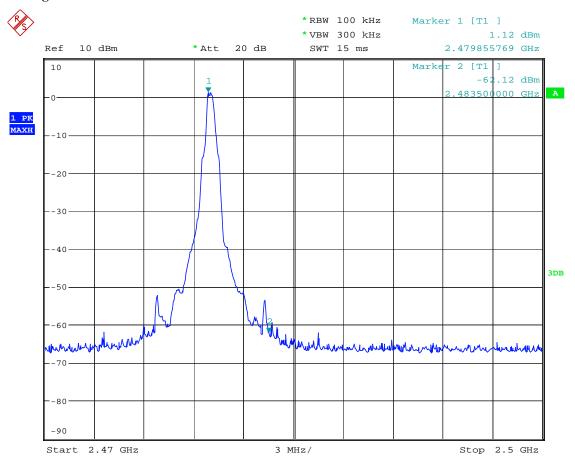

Date: 7.JAN.2020 16:31:06

Report No.: FCC1912276 Page 60 of 84

Date: 2020-01-11




Type of Modulation: GFSK

Band Edge Test Result

| Product: | Lagio Bluetooth Speakers | Test Mode: | Hopping mode |
|--------------|--------------------------|---------------|--------------|
| Mode | Hopping On | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

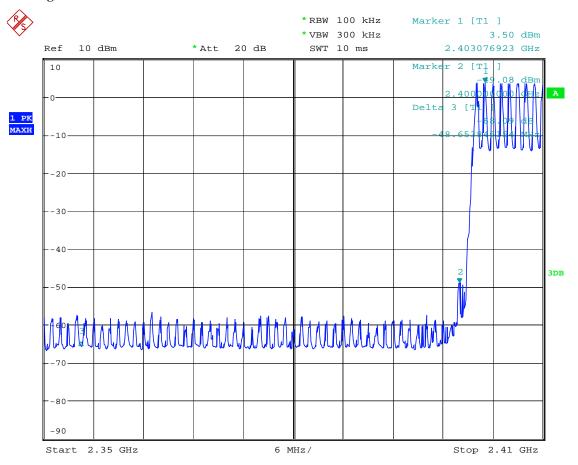

Date: 7.JAN.2020 16:13:17

Report No.: FCC1912276 Page 61 of 84

Date: 2020-01-11




Type of Modulation: GFSK

Band Edge Test Result

| Product: | Lagio Bluetooth Speakers | Test Mode: | Hopping mode |
|--------------|--------------------------|---------------|--------------|
| Mode | Hopping On | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

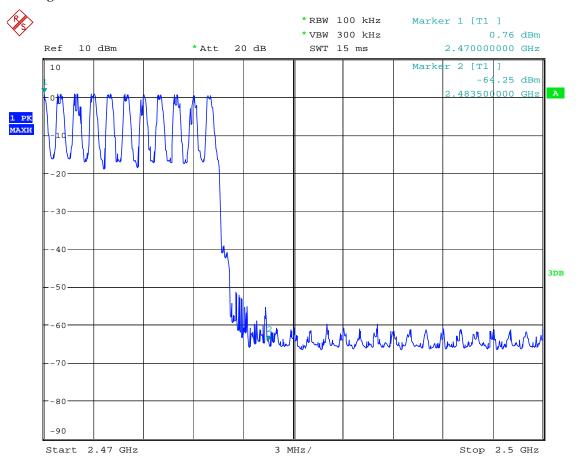

Date: 7.JAN.2020 16:15:50

Page 62 of 84

Report No.: FCC1912276

Date: 2020-01-11




Type of Modulation: Л/4DQPSK

Out of Band Test Result 12.4

| Product: | Lagio Bluetooth Speakers | Test Mode: | Low Channel |
|--------------|--------------------------|---------------|-------------|
| Mode | Keeping Transmitting | Input Voltage | DC3.7V |
| Temperature | 24 deg. C | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

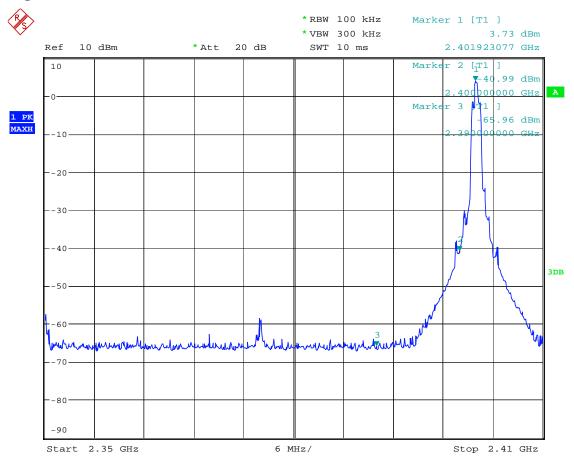

Date: 7.JAN.2020 16:33:53

Page 63 of 84 Report No.: FCC1912276

Date: 2020-01-11




Type of Modulation: Л/4DQPSK

Band Edge Test Result 12.4

| Product: | Lagio Bluetooth Speakers | Test Mode: | High Channel |
|--------------|--------------------------|---------------|--------------|
| Mode | Keeping Transmitting | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

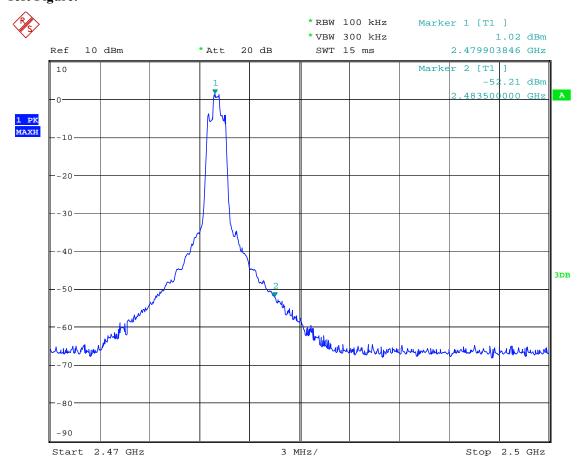

Date: 7.JAN.2020 16:30:07

Report No.: FCC1912276 Page 64 of 84

Date: 2020-01-11




Type of Modulation: $\pi/4DQPSK$

Out of Band Test Result

| Product: | Lagio Bluetooth Speakers | Test Mode: | Hopping mode |
|--------------|--------------------------|---------------|--------------|
| Mode | Hopping On | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

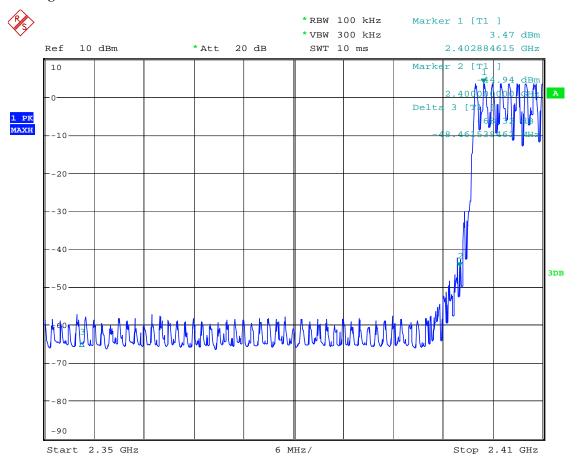

Date: 7.JAN.2020 16:11:01

Page 65 of 84

Report No.: FCC1912276

Date: 2020-01-11




Type of Modulation: $\pi/4DQPSK$

Out of Band Test Result

| Product: | Lagio Bluetooth Speakers | Test Mode: | Hopping mode |
|--------------|--------------------------|---------------|--------------|
| Mode | Hopping On | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

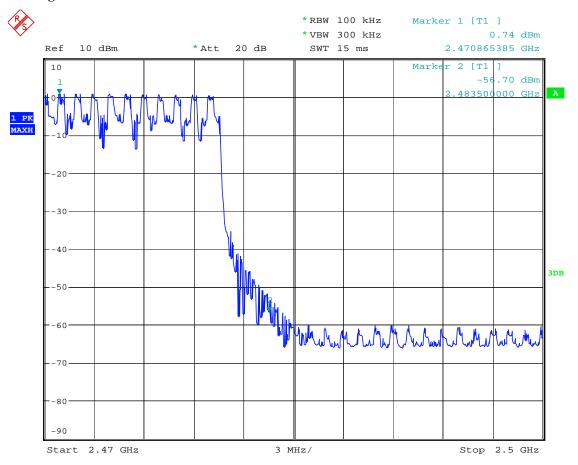

Date: 7.JAN.2020 16:19:42

Report No.: FCC1912276 Page 66 of 84

Date: 2020-01-11




Type of Modulation: 8DPSK

12.4 Band Edge Test Result

| Product: | Lagio Bluetooth Speakers | Test Mode: | Low Channel |
|--------------|--------------------------|---------------|-------------|
| Mode | Keeping Transmitting | Input Voltage | DC3.7V |
| Temperature | 24 deg. C | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

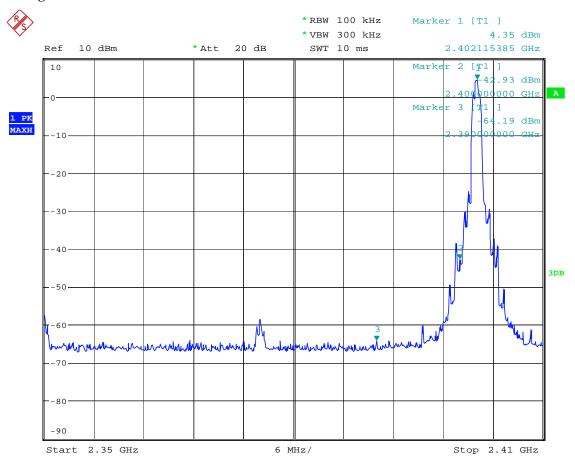

Date: 7.JAN.2020 16:35:50

Page 67 of 84 Report No.: FCC1912276

Date: 2020-01-11




Type of Modulation: 8DPSK

Band Edge Test Result 12.4

| Product: | Lagio Bluetooth Speakers | Test Mode: | High Channel |
|--------------|--------------------------|---------------|--------------|
| Mode | Keeping Transmitting | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

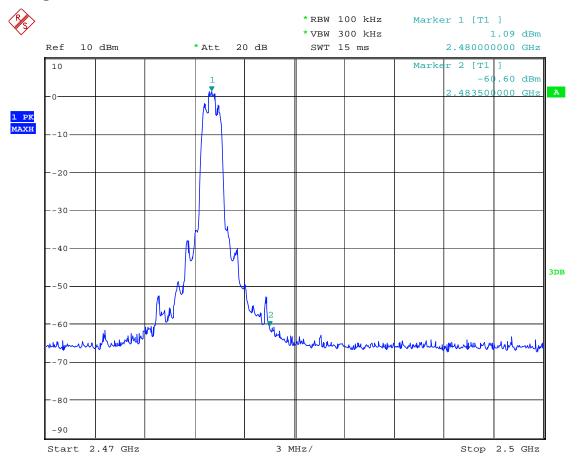

Date: 7.JAN.2020 16:29:24

Report No.: FCC1912276 Page 68 of 84

Date: 2020-01-11




Type of Modulation: 8DPSK

Band Edge Test Result

| Product: | Lagio Bluetooth Speakers | Test Mode: | Hopping mode |
|--------------|--------------------------|---------------|--------------|
| Mode | Hopping On | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

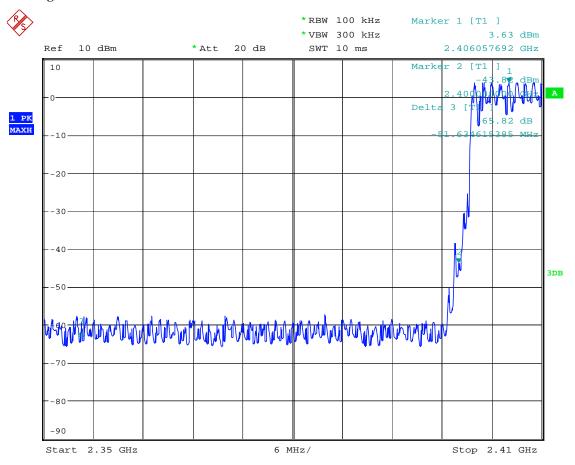

Date: 7.JAN.2020 16:07:18

Page 69 of 84 Report No.: FCC1912276

Date: 2020-01-11




Type of Modulation: 8DPSK

Band Edge Test Result

| Product: | Lagio Bluetooth Speakers | Test Mode: | Hopping mode |
|--------------|--------------------------|---------------|--------------|
| Mode | Hopping On | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

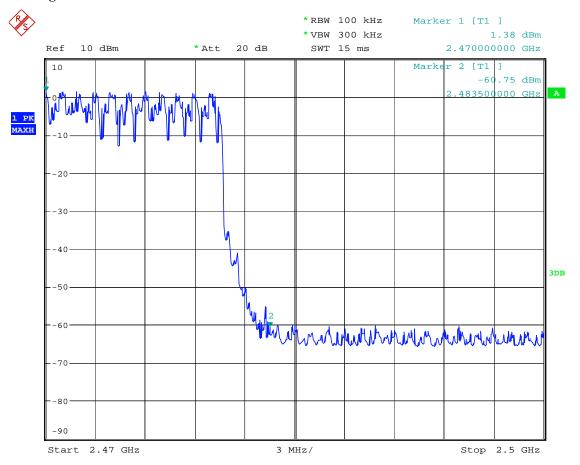

Date: 7.JAN.2020 16:27:45

Page 70 of 84 Report No.: FCC1912276

Date: 2020-01-11



12.4 Restrict Band Measurement

| | EUT | Lagio | Lagio Bluetooth Speakers Keep Transmitting | | | Model Input Voltage | | | AG-LAG-SPK-2 DC3.7V | | | |
|----------------|-----------------------------|--|---|----------|------------|---------------------|-----------|----------|------------------------|---------|--|--|
| | Mode | Ke | | | | | | | | | | |
| 7 | emperature | | 24 deg. C, | | Humidity | | 56% RH | | | | | |
| - | Test Result: | Pass | | | M | Modulation Type | | | 8DPSK | | | |
| | C Part 15B Class B 1GHz-1 | 3GHz - 2 | | | | | | | | | | |
| 1.1 | LE+2- | | | | | | | | | | | |
| 1.0 | 12- | | | | | | | | | | | |
| | 90- | | | | | | | | + | | | |
| | 80- | | | | | | | | / \ | | | |
| | 70- | | | | | | | | | | | |
| (iii | | | | | | | | ſ | , | \ | | |
| level (dBuV/m) | 60- | | | | | | | | | | | |
| eve | 50- | | | | | | M1 | Mari Mal | | | | |
| | 40- | | | | | | | | | | | |
| | 30- | the first state of the state of | | | | | | | | | | |
| | | | | | | | | | | | | |
| | 20- 2350 Frequency (MHz) | | | | | | | | | | | |
| | | | | T | 1 | · I | 1 | ı | Г | # | | |
| No | ' ' | Results | Factor | Limit | Over | Detector | Table (o) | Height | ANT | Verdict | | |
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | Limit (dB) | | | (cm) | | | | |
| 1 | 2390 | 46.22 | -3.53 | 54.0 | -7.78 | Peak | 0.00 | 100 | Н | Pass | | |

Page 71 of 84 Report No.: FCC1912276

Date: 2020-01-11



12.4 Restrict Band Measurement

| | EUT | | Lagio Bluetooth Speakers Model AG-LAC | | | | | | LAG-SPK | L-2 | | | |
|-----------|------------|----------------------|---------------------------------------|--------|----------|---------------|------------------------|--------|--------------|---------------------------------------|--------------|--|--|
| | Mode | | Keep Transmitting 24 deg. C, | | | Inpu | Input Voltage Humidity | | DC3.7V | | | | |
| Temperatu | | erature | | | | H | | | 56% RH | | | | |
| - | Test 1 | Result: | Pass | | | Modu | Modulation Type | | | 8DPSK | | | |
| | CC Part 1: | 5B Class B 1GHz-18GF | łz - 2 | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 1.0 | 0E+2- | | | | | | | | | | | | |
| | 90- | | | | | | | | | | | | |
| | 80- | | | | | | | | | + | | | |
| | 70- | | | | | | | | | / \ | | | |
| | | | | | | | | | , | / \ | | | |
| | 60- | | | | | | | | | \ | | | |
| | 50- | | | | | | | M1 | Lancata da 🗸 | | | | |
| | 40- | | | | | | | | | | | | |
| | 30- | | | | | | | | | | | | |
| | 20- | | | | | | | | | | | | |
| | 2350 | | | | | Frequency (MH | z) | | | | 2410 | | |
| No | | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | # Verdict | | |
| NU | <i>)</i> . | | | | | | Defector | | | AINI | verdict | | |
| | | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | Deale | (0) | (cm) | \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ | Dana | | |
| 1 | | 2390 | 43.83 | -3.53 | 54.0 | -10.17 | Peak | 118.00 | 100 | V | Pass | | |

Page 72 of 84 Report No.: FCC1912276

Date: 2020-01-11



12.4 Restrict Band Measurement

| | EUT | Lagio Bluetooth Speakers | | | S | Model | | | AG-LAG-SPK-2 | | |
|-------|--------------------------|--|-------------------|----------|------------|--|-----------|-----------------------------|--------------------------|---------|--|
| | Mode | | Keep Transmitting | | | Input Voltage | | | DC3.7V | | |
| Te | emperature | pperature 24 | | | | Humidity Modulation Type | | | 56% RH 8DPSK | | |
| T | est Result: | | Pass | | | | | | | | |
| C_FCC | Part 15B Class B 1GHz-1 | 8GHz - 2 | | | | | | | | | |
| 1.0E | | | | | | | | | | | |
| | programme and the second | | | | | | | | | | |
| | 90- | | | | | | | | | | |
| | 50- | | | | | | | | | | |
| | 70- | | | | | | | | | | |
| | 50 - | 1 | | | | | | | | | |
| | 50- | | | | | | | | | | |
| | | July more resident | | | l . | | | | | | |
| | | Later bridge and better being the beautiful the second | | | | The state of the s | | والمراب المالة فيتوم والمال | Anthony Hall Control And | | |
| | 30- | | | | | | | | | · | |
| | 20- | 2483.5 | | | | | 2500 | | | | |
| | | | | | | 1Hz) | | | | # | |
| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict | |
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | | |
| | 2483.5 | 49.54 | -3.57 | 54.0 | -4.46 | Peak | 64.00 | 100 | Н | Pass | |

Report No.: FCC1912276 Page 73 of 84

Date: 2020-01-11



12.4 Restrict Band Measurement

| EUT | | UT | Lagio Bluetooth Speakers | | | | Model | | | AG-LAG-SPK-2 | | | | | |
|----------------|--------|---|--------------------------|-------------|-------------------|--------------|-------------------|-----------------------|---------------------------|----------------------|----------------|--|--|--|--|
| Mode | | lode | Keep Transmitting | | |] | Input Voltage | | DC3.7V | | | | | | |
| Temperature | | | 24 deg. C, | | | | Humidity | | | 56% RH | | | | | |
| | Test | Result: | Pass | | | M | Modulation Type | | | 8DPSK | | | | | |
| | | 5B Class B 1GHz-18GH | lz - 2 | | | | | | | | | | | | |
| 1. | .1E+2- | | | | | | | | | | | | | | |
| 1. | .0E+2- | | | | | | | | | | | | | | |
| | 90- |)- | | | | | | | | | | | | | |
| | 80- | | | کمر | | | | | | | | | | | |
| | - | | | | | | | | | | | | | | |
| | 70- | | | _/ | | | | | | | | | | | |
| level (dBuV/m) | 60- | | | | <u> </u> | | | | | | | | | | |
| evel (d | 50- | | <i>y</i> | y Pr | | 1 | | | | | | | | | |
| | 40-11 | San | | | | Market Land | ana madanasahasah | de tile er til er til | na mandal militan, akuata | والمخالفات المتعادية | الموالية برايي | | | | |
| | 40- | MINIMARAMAN MANAGAN | | | | and and | | | | | | | | | |
| | 30- | | | | | | | | | | | | | | |
| | | | | | | 2483.5 | | | | | 2500 | | | | |
| | 20- | | | | | | | | | Frequency (MHz) | | | | | |
| | 20- |) | | | | | Hz) | | | | # | | | | |
| No | | Frequency | Results | Factor | Limit | | Detector | Table (o) | Height | ANT | # Verdict | | | | |
| No | | 1 | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Frequency (M | | Table (o) | Height (cm) | ANT | 1 | | | | |

Note: 1. For Restricted band test, only the 8DPSK is worst case and only worse case was reported.

2. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Report No.: FCC1912276

Date: 2020-01-11



Page 74 of 84

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

PCB antenna used. The gain of the antennas is 1.7dBi.

Report No.: FCC1912276 Page 75 of 84

Date: 2020-01-11




14.0 FCC ID Label

FCC ID: 2AVJUAG-LAG-SPK-2

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

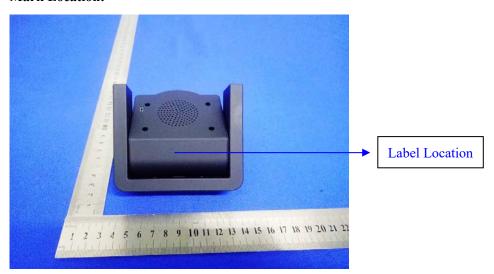


Report No.: FCC1912276 Page 76 of 84

Date: 2020-01-11



15.0 **Photo of testing**

Conducted Emission Test Setup:

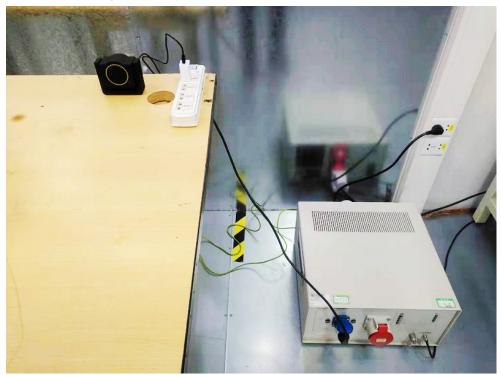


Page 77 of 84

Report No.: FCC1912276

Date: 2020-01-11



Radiated Emission Test Setup:

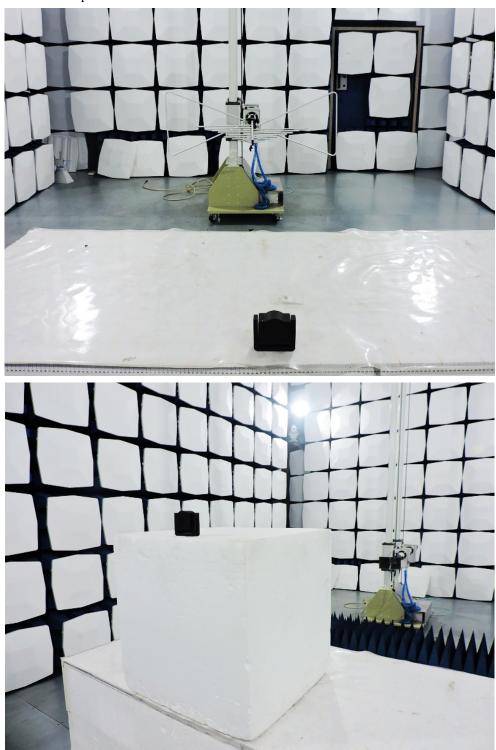

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No.: FCC1912276


Date: 2020-01-11



Photographs - EUT

Outside view

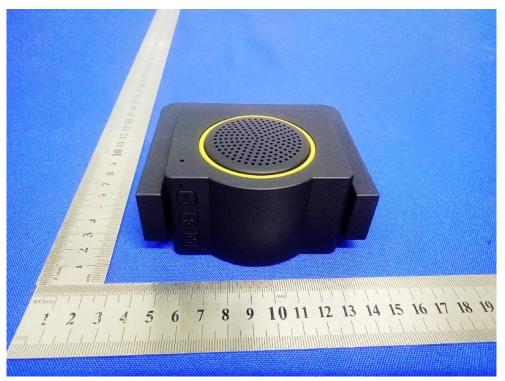

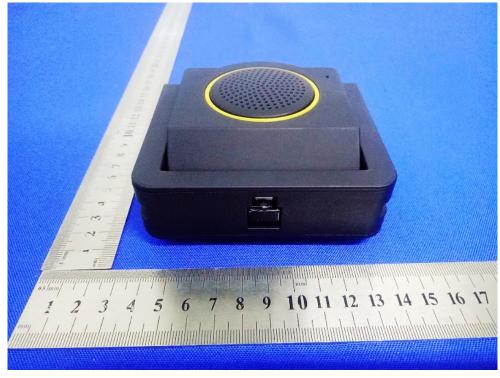

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 79 of 84


Report No.: FCC1912276

Date: 2020-01-11



Outside view



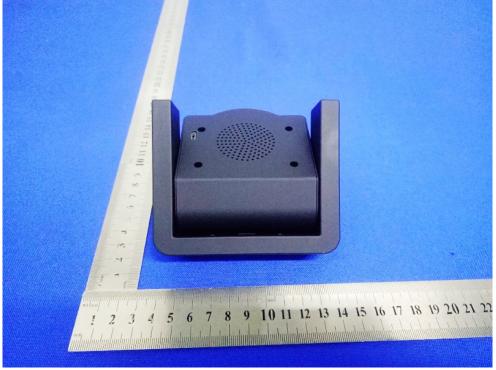

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 80 of 84

Report No.: FCC1912276

Date: 2020-01-11



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 81 of 84


Report No.: FCC1912276

Date: 2020-01-11



Inside view



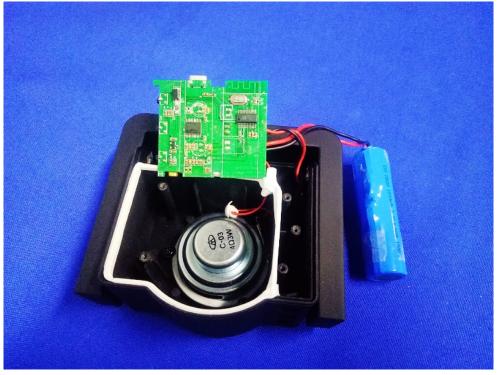

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 82 of 84

Report No.: FCC1912276

Date: 2020-01-11



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 83 of 84

Report No.: FCC1912276

Date: 2020-01-11



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No.: FCC1912276

Date: 2020-01-11



Inside view

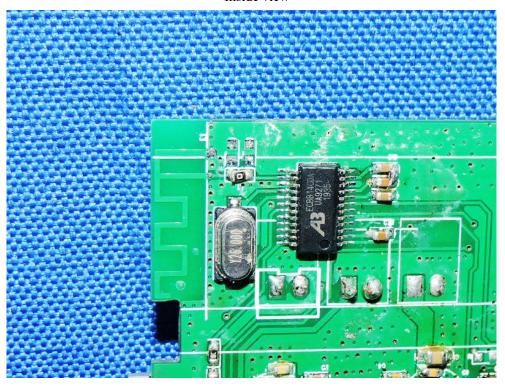

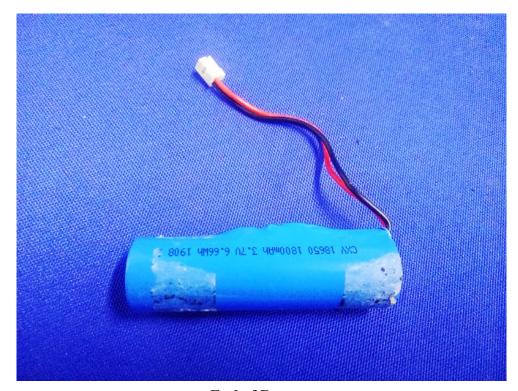

-- End of Report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.