

# TEST REPORT



**Dt&C Co., Ltd.**

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042  
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2308-0115(2)

2. Customer

- Name (FCC) : Smart Radar System, Inc.
- Address (FCC) : 3rd Floor, Fine Venture Bldg, 41 Seongnam-daero 925gil, Bundang-gu Seongnam-si, Gyeonggi-do South Korea 13496

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : Radar Module / RM68-SE

FCC ID : 2AVKZRM68-SE

5. Test Method Used : ANSI C63.10-2013



Test Specification : Part 15.255

6. Date of Test : 2023.07.21 ~ 2023.08.21

7. Testing Environment : Refer to appended test report.

8. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager
	Name : JaeHyeok Bang 	Name : JaeJin Lee  (Signature)

2023 . 08 . 30 .

**Dt&C Co., Ltd.**

If this report is required to confirmation of authenticity, please contact to [report@dtnc.net](mailto:report@dtnc.net)

## Test Report Version

Test Report No.	Date	Description	Revised By	Reviewed By
DRTFCC2308-0115	Aug. 23, 2023	Initial issue	JaeHyeok Bang	JaeJin Lee
DRTFCC2308-0115(1)	Aug. 29, 2023	Update the test result	JaeHyeok Bang	JaeJin Lee
DRTFCC2308-0115(2)	Aug. 30, 2023	Typo correction in section 8.2	JaeHyeok Bang	JaeJin Lee

# Table of Contents

<b>1. EUT DESCRIPTION</b>	<b>4</b>
<b>2. INFORMATION ABOUT TESTING</b>	<b>5</b>
2.1. Transmitting configuration of EUT	5
2.2. Auxiliary equipment	5
2.3. Tested environment	6
2.4. EMI suppression Device(s) / Modifications	6
2.5. Measurement Uncertainty	6
<b>3. SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>4. TEST METHODOLOGY</b>	<b>8</b>
4.1. EUT configuration	8
4.2. EUT exercise	8
4.3. General test procedures	8
4.4. Description of test modes	8
<b>5. INSTRUMENT CALIBRATION</b>	<b>9</b>
<b>6. FACILITIES AND ACCREDITATIONS</b>	<b>9</b>
6.1. Facilities	9
6.2. Equipment	9
<b>7. ANTENNA REQUIREMENTS</b>	<b>9</b>
<b>8. TEST RESULTS</b>	<b>10</b>
8.1. 6dB Bandwidth	10
8.2. Equivalent Isotropic Radiated Power	12
8.3. Radiated spurious emissions	14
8.4. Frequency stability	20
8.5. AC line conducted emissions	22
<b>9. LIST OF TEST EQUIPMENT</b>	<b>25</b>
<b>APPENDIX I</b>	<b>27</b>

## 1. EUT DESCRIPTION

<b>FCC Equipment Class</b>	FDS – Part 15 Field Disturbance Sensor
<b>Product</b>	Radar Module
<b>Model Name</b>	RM68-SE
<b>Add Model Name</b>	-
<b>Serial Number</b>	EOS 2214
<b>Power Supply</b>	DC 5 V
<b>Frequency Range</b>	61.0 ~ 61.5 GHz
<b>Max. RF Output Power (EIRP)</b>	5.58 dBm
<b>Modulation Type</b>	FMCW (Frequency Modulated Continuous Wave)
<b>Antenna Specification</b>	<b>Antenna type:</b> Serial Feeding Antenna <b>Antenna gain(Max):</b> 14.2 dBi

Note: This EUT supports 61~61.5GHz FMCW radar.

## 2. INFORMATION ABOUT TESTING

### 2.1. Transmitting configuration of EUT

Test Mode	Description	Test Frequency(GHz)
Sweep Active	-	61.248 7

### 2.2. Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

### 2.3. Tested environment

Temperature	: 21 °C ~ 25 °C
Relative humidity content	: 41 % ~ 46 %
Details of power supply	: DC 5 V

### 2.4. EMI suppression Device(s) / Modifications

EMI suppression device(s) added and/or modifications made during testing  
 → None

### 2.5. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014 and ANSI C 63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

Test items	Measurement uncertainty
AC conducted emission	3.4 dB (The confidence level is about 95 %, $k = 2$ )
Radiated spurious emission (1 GHz Below)	4.8 dB (The confidence level is about 95 %, $k = 2$ )
Radiated spurious emission (1 GHz ~ 18 GHz)	5.0 dB (The confidence level is about 95 %, $k = 2$ )
Radiated spurious emission (18 GHz Above)	5.2 dB (The confidence level is about 95 %, $k = 2$ )

### 3. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Status Note 1
15.255(e)(2)	6 dB Bandwidth	NA	Radiated	<b>C</b>
15.255(c)(2)(v)	Equivalent Isotropic Radiated Power	Refer to the section 8.2		<b>C</b>
15.255(d) 15.255(c)(2) 15.209	Radiated Spurious Emissions	Refer to the section 8.3		<b>C</b>
15.255(f)	Frequency Stability	Within the frequency band		<b>C</b>
15.207	AC Line Conducted Emissions	< Part 15.207 limits	AC Line Conducted	<b>C</b>
15.203	Antenna Requirements	Part 15.203	-	<b>C</b>
Note 1: <b>C</b> =Comply <b>NC</b> =Not Comply <b>NT</b> =Not Tested <b>NA</b> =Not Applicable				

## 4. TEST METHODOLOGY

The measurement procedures described in the ANSI C63.10-2013 was used in measurement of the EUT.

### 4.1. EUT configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 4.2. EUT exercise

The EUT was operated in the test mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.255 under the FCC Rules Part 15 Subpart C.

### 4.3. General test procedures

#### Conducted Emissions

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector

#### Radiated Emissions

The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axes.

### 4.4. Description of test modes

The EUT has been tested with all modes of operating conditions to determine the worst case emission characteristics. A test program is used to control the EUT for staying in continuous transmitting mode.



## 5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

## 6. FACILITIES AND ACCREDITATIONS

### 6.1. Facilities

<b>Dt&amp;C Co., Ltd.</b>		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.		
The test site complies with the requirements of § 2.948 according to ANSI C63.4-2014.		
- FCC & ISED MRA Designation No.: KR0034		
- ISED#: 5740A		
<a href="http://www.dtnc.net">www.dtnc.net</a>		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

### 6.2. Equipment

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, loop, horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 7. ANTENNA REQUIREMENTS

### 7.1. According to FCC 47 CFR §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The antenna is permanently attached on the main PCB.**

**Therefore this E.U.T Complies with the requirement of §15.203**

## 8. TEST RESULTS

### 8.1. 6dB Bandwidth

#### ■ Test Requirements and limit

##### Part 15.255(e)(2)

For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth spectrum analyzer.

#### ■ Test Configuration:

Refer to the APPENDIX I.

#### ■ Test Procedure:

##### ANSI C63.10-2013 – Section 9.3

The following procedure was used for measurement of the bandwidth for millimeter-wave devices;

- Spectrum analyzer settings:

- 1) Span equal to approximately two times to three times the EBW, centered on the carrier frequency.
- 2) RBW = 100 kHz
- 3) VBW = 300 kHz
- 4) Sweep = auto.
- 5) Detector function = peak.
- 6) Trace = max hold. Allow the trace to stabilize.
- 7) Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure the specified dB down one side of the emission.
- 8) Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker- delta frequency reading at this point is the specified emission bandwidth.


#### ■ Test Results: **Comply**

Test Mode	Frequency(GHz)	Test Results(MHz)
Sweep Active	61.248 7	476.876

Result plots

6 dB Bandwidth

Tested Frequency: 61.248 7 GHz

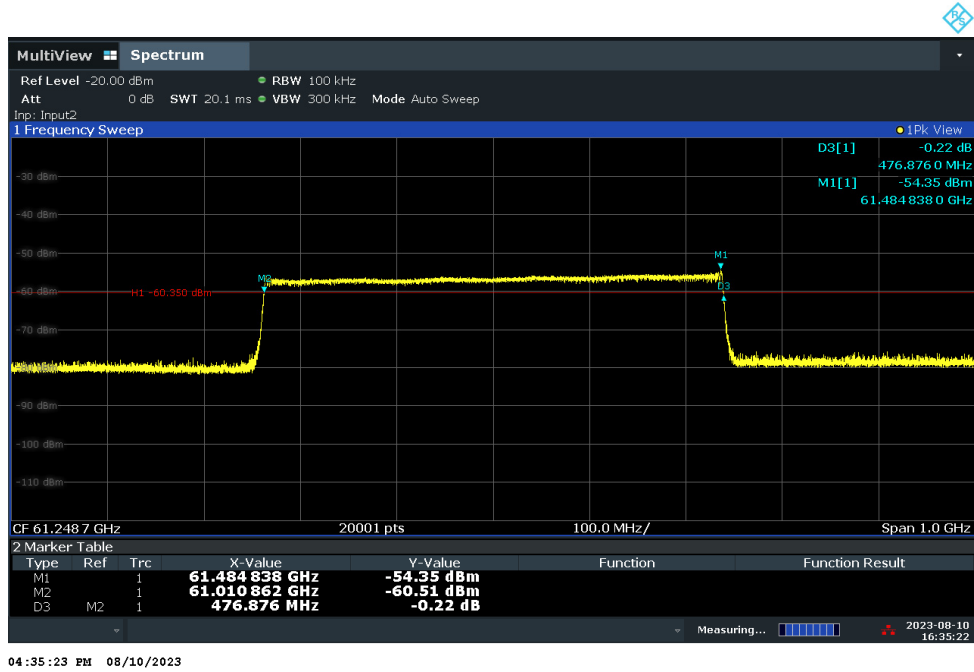

## 8.2. Equivalent Isotropic Radiated Power

### ■ Test Requirements and limit

#### FCC Part 15.255(c)(2)(v)

61.0–61.5 GHz: For field disturbance sensors/radars that occupy 500 MHz bandwidth or less that are contained wholly within the frequency band 61.0–61.5 GHz, the average power of any emission, measured during the transmit interval, shall not exceed 40 dBm, and the peak power of any emission shall not exceed 43 dBm. In addition, the average power of any emission outside of the 61.0–61.5 GHz band, measured during the transmit interval, but still within the 57–71 GHz band, shall not exceed 10 dBm, and the peak power of any emission shall not exceed 13 dBm.

### ■ Test Configuration:

Refer to the APPENDIX I.

### ■ Test Procedure:

#### ANSI C63.10-2013 – Section 9.11

The following procedure was used for measurement of the output power for millimeter-wave devices;

- 1) The measurements were performed at 3m test site.
- 2) The EUT is placed on a non-conductive table is 1.5 meter above test site ground plane.
- 3) The measurement procedure described in ANSI C63.10-2013 Section 9.9 was followed, to find maximum signal.
- 4) The average and peak voltages was recorded from the DSO.
- 5) Replace the EUT with mm-wave source to the RF input port of the instrumentation system.
- 6) The mm-wave source is unmodulated.
- 7) Adjust the amplitude of the mm-wave source such that the DSO indicates a voltage equal to the peak voltage recorded in step 4).
- 8) Without changing any settings, replace the DSO with the mm-wave power meter.
- 9) Measure and note the power.

#### **Far field distance ( $R_m$ )**

$$R_m = 2D^2 / \lambda,$$

Where, D=the largest dimension of the antenna /  $\lambda$ =the wavelength of the emissions

Frequency Range(GHz)	$\lambda$ (cm)	D (cm)	Rm (m)	Measurement Distance(m)
61.0 ~ 61.5	0.488	5.68	1.32	2.00

■ **Test Results: Comply**

**Peak power:**

Measurement distance(D)	Frequency (GHz)	ANT Pol	DSO Reading [mV]	Power Meter Level[dBm]	Antenna Gain [dBi]	E (dBuV/m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2 m	61.248 7	V	24.70	-43.99	24.75	104.26	5.58	43.00	37.42

**Average power:**

Measurement distance(D)	Frequency (GHz)	ANT Pol	DSO Reading [mV]	Power Meter Level[dBm]	Antenna Gain [dBi]	E (dBuV/m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2 m	61.248 7	V	22.20	-44.18	24.75	104.07	5.29	40.00	34.71

**Note.**

1. Sample calculation.

$$E = 126.8 - 20\log(\lambda) + P - G$$

where

E is the field strength of the emission at the measurement distance, in dB $\mu$ V/m

P is the power measured at the output of the test antenna, in dBm

$\lambda$  is the wavelength of the emission under investigation [300/fMHz], in m

G is the gain of the test antenna, in dBi

$$EIRP = E_{Meas} + 20\log(d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

$E_{Meas}$  is the field strength of the emission at the measurement distance, in dB $\mu$ V/m

$d_{Meas}$  is the measurement distance, in m

### 8.3. Radiated spurious emissions

■ **Test Requirements and limit, §15.255(d), §15.209, §15.255(c)(2)**

▪ **FCC Part 15.255(d):** Limits on spurious emissions

- (1) The power density of any emissions outside the 57-71 GHz band shall consist solely of spurious emissions.
- (2) Radiated emissions below 40 GHz shall not exceed the general limits in §15.209.
- (3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm<sup>2</sup> at a distance of 3 meters.
- (4) The levels of the spurious emissions shall not exceed the level of the fundamental emission.

▪ **FCC Part 15.209(a):** the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2 400/F (kHz)	300
0.490 – 1.705	2 4000/F (kHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

■ **Test Configuration:**

Refer to the APPENDIX I.

■ **Test Procedure:**

**ANSI C63.10-2013 – Section 9.12 & 9.13**

The following procedure was used for measurement of the radiated spurious emissions.

- 1) The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements at above 1 GHz, the table height is 1.5 m
- 2) The table was rotated 360 degrees to determine the position of the highest radiation.
- 3) During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 0.5 ~ 3 meter away from the interference-receiving antenna.
- 4) For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
- 5) The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 6) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 7) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

**- Spectrum analyzer settings:**

1. Frequency Range: Below 1GHz

RBW = 100 or 120 kHz, VBW = 3 x RBW, Detector = Peak or Quasi Peak

2. Frequency Range: ≤ 40GHz

Peak Measurement

RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Sweep time = Auto, Trace mode = Max Hold until the trace stabilizes

Average Measurement > 1GHz

RBW = 1 MHz, VBW ≥ 1/T, Detector = Peak, Sweep Time = Auto, Trace Mode = Max Hold until the trace stabilizes

3. Frequency Range: Above 40GHz

RBW = 1 MHz, VBW = 1 or 3 MHz, Detector = Peak or average, Sweep time = Auto, Trace mode = Max Hold until the trace stabilizes

**Far field distance ( $R_m$ )**

$$R_m = 2D^2 / \lambda,$$

Where, D=the largest dimension of the measurement antenna /  $\lambda$ =the wavelength of the emissions

Frequency Range(GHz)	$\lambda$ (cm)	D(cm)	$R_m$ (m)	Measurement Distance(m)
40 ~ 50	0.60	6.20	1.28	1.60
50 ~ 70	0.43	5.70	1.52	1.60
70 ~ 90	0.33	4.60	1.27	0.70
90 ~ 140	0.21	2.60	0.63	0.70
140 ~ 200	0.15	1.90	0.48	0.70

■ **Test Results: Comply**

Frequency Range: 9 kHz ~ 1 GHz

Tested Frequency: 61.248 7 GHz

Frequency (MHz)	EUT Axis	ANT Pol	Detector Mode	Measured Level(dBuV)	TF (dB/m)	DCF(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
38.73	Z	V	QP	46.00	-9.05	NA	36.95	40.00	3.05
42.61	Z	V	QP	45.30	-8.66	NA	36.64	40.00	3.36
48.43	Z	V	QP	36.60	-8.38	NA	28.22	40.00	11.78
117.30	Z	H	QP	40.20	-8.67	NA	31.53	43.52	11.99
122.15	Z	H	QP	40.00	-8.23	NA	31.77	43.52	11.75
126.03	Z	H	QP	41.60	-7.98	NA	33.62	43.52	9.90

**Note.**

1. The worst case data was reported. No other spurious and harmonic emissions were found above listed frequencies.

2. Information of DCF(Distance Correction Factor)

For finding emissions, the test distance might be reduced. In this case, the distance factor is applied to the result.

- Calculation of distance factor =  $20 \log(\text{applied distance} / \text{required distance})$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

3. Sample Calculation.


Margin = Limit – Result / Result = Measured Level + TF + DCF /  $TF = AF + CL - AG$

Where, TF = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

4. The worst-case plot(Y axis) is attached below.

**Worst data plot (Measured Level),**

**Tested frequency: 61.248 7 GHz Z axis**

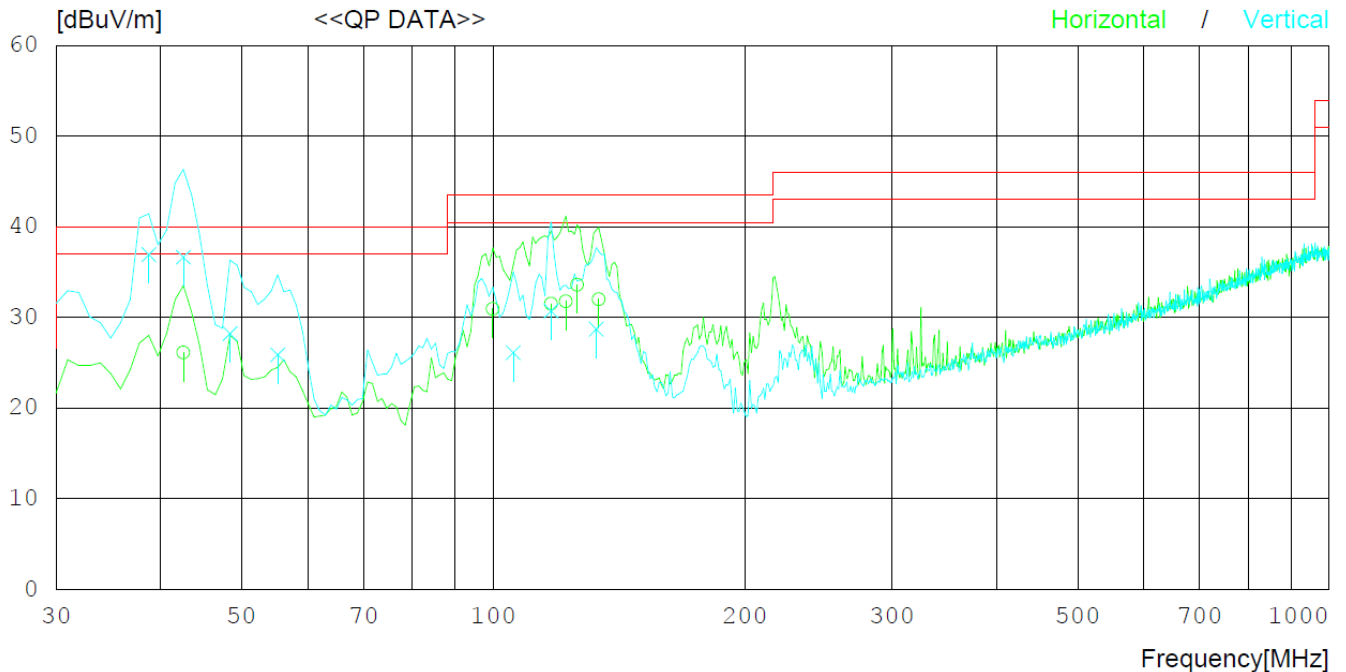



Frequency Range: 1 ~ 40 GHz  
 Tested frequency: 61.248 7 GHz

Frequency (MHz)	ANT Pol	Detector Mode	Measured Level(dBuV)	TF (dB/m)	DCF(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
14 399.56	V	PK	37.49	20.70	-5.46	52.73	74.00	21.27
14 399.61	V	AV	26.29	20.70	-5.46	41.53	54.00	12.47
28 799.25	H	PK	49.20	9.97	-6.02	53.15	74.00	20.85
28 799.34	H	AV	46.47	9.97	-6.02	50.42	54.00	3.58

**Note.**

1. No other spurious and harmonic emissions were found above listed frequencies.
2. Information of Distance Factor

For finding emissions, the test distance might be reduced. In this case, the distance factor is applied to the result.

- Calculation of distance factor =  $20 \log(\text{applied distance} / \text{required distance})$


When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Measured Level} + \text{TF} + \text{Distance factor} \quad / \quad \text{TF} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

**Worst data plot (Measured Level) Tested frequency: 61.248 7 GHz**  
**Y axis & Hor**

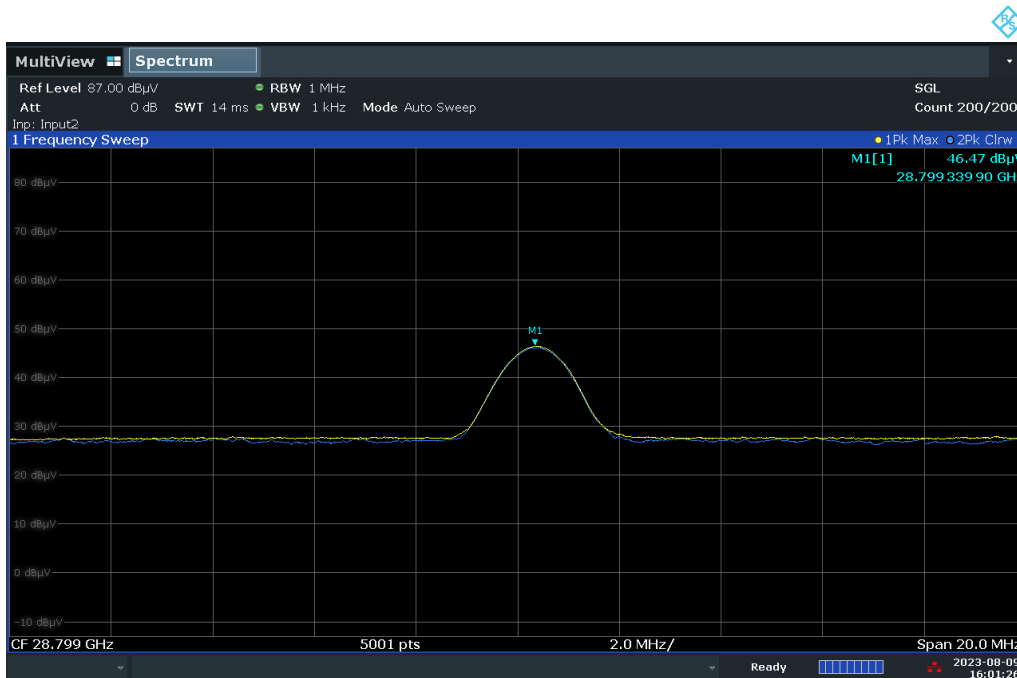

04:01:27 PM 08/09/2023

Frequency Range: 40 ~ 84.5 GHz  
 Tested frequency: 61.248 7 GHz

Measurement distance(D)	Frequency (MHz)	ANT Pol	Measured Level(dBm)	AFCLAG (dB/m)	E (dBuV/m)	EIRP (dBm)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
1.6 m	40 655.86	V	-48.19	-2.01	56.80	-43.82	0.037	90.00
1.6 m	43 199.13	V	-58.60	-1.89	46.51	-54.11	0.003	90.00
1.6 m	57 598.93	V	-60.53	16.52	62.99	-37.63	0.153	90.00
1.6 m	57 598.73	V	-61.10	16.52	62.42	-38.20	0.134	90.00
1.6 m	*66 820.95	V	-66.24	18.96	59.72	-40.90	0.072	90.00
1.6 m	*79 605.77	V	-56.96	-1.17	48.87	-51.75	0.006	90.00
1.6 m	*83 961.18	V	-54.78	4.82	57.04	-43.58	0.039	90.00

**Note.**

- The radiated emissions were investigated up to 200GHz. And no other spurious and harmonic emissions were found above listed frequencies.
- Sample Calculation.

$$E(\text{dBuV/m}) = \text{Measured level (dBuV)} + 107 + \text{AFCLAG}(\text{dB/m})$$

where, E=field strength / AFCLAG = Antenna Factor(dB/m) + Cable Loss(dB/m) – Amplifier Gain(dB)

EIRP(dBm) = E(dBuV/m) + 20log(D) - 104.7; where, D is measurement distance (in the far field region) in m.

$$PD = \text{EIRP}_{\text{Linear}} / 4\pi d^2$$


Where, PD = the power density at the distance specified by the limit, in W/m<sup>2</sup>

EIRP<sub>Linear</sub> = EIRP, in watts

D = is the distance at which the power density limit is specified, in m

- \* Noise floor

**Worst data plot (Measured Level) Tested frequency: 61.248 7 GHz  
 Z axis & Ver**

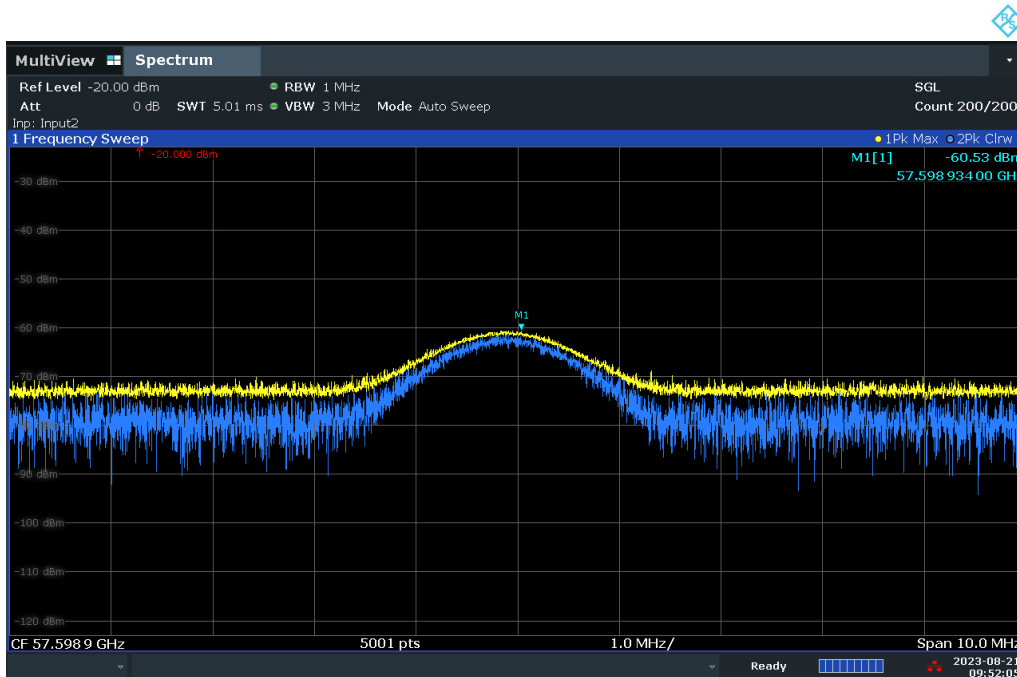

09:52:06 AM 08/21/2023

Frequency Range: 84.5 ~ 200 GHz  
 Tested frequency: 61.248 7 GHz

Measurement distance(D)	Frequency (MHz)	ANT Pol	Measured Level(dBm)	AFCL (dB/m)	E (dBuV/m)	EIRP (dBm)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
0.7 m	*88 049.10	V	-73.45	45.97	79.52	-28.28	1.31	90.00
0.7 m	*90 200.75	V	-69.03	47.15	85.12	-22.68	4.77	90.00
0.7 m	*128 915.53	V	-59.66	47.92	95.26	-12.54	49.27	90.00
0.7 m	*153 124.03	V	-66.02	51.17	92.15	-15.65	24.07	90.00
0.7 m	*191 543.39	V	-64.73	51.95	94.22	-13.58	38.77	90.00

**Note.**

1. The radiated emissions were investigated up to 200GHz. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$E(\text{dBuV/m}) = \text{Measured level (dBuV)} + 107 + \text{AFCL}(\text{dB/m})$$

The mixer loss was applied to the measured level by SA correction factor.

where,  $E = \text{field strength} / \text{AFCLAG} = \text{Antenna Factor}(\text{dB/m}) + \text{Cable Loss}(\text{dB/m})$

$\text{EIRP}(\text{dBm}) = E(\text{dBuV/m}) + 20\log(D) - 104.7$ ; where, D is measurement distance (in the far field region) in m.

$$\text{PD} = \text{EIRP}_{\text{Linear}} / 4\pi d^2$$


Where, PD = the power density at the distance specified by the limit, in W/m<sup>2</sup>

$\text{EIRP}_{\text{Linear}} = \text{EIRP}$ , in watts

D = is the distance at which the power density limit is specified, in m

3. \* Noise floor

**Worst data plot (Measured Level) Tested frequency: 61.248 7 GHz**  
**Z axis & Ver**

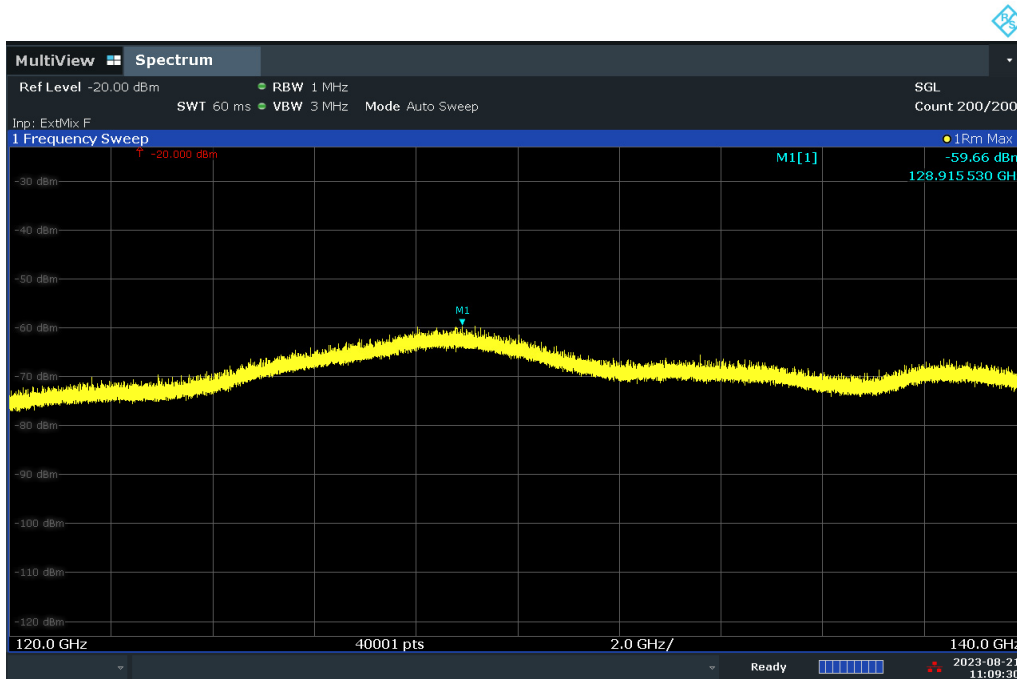


11:09:31 AM 08/21/2023

## 8.4. Frequency stability

### ■ Test Requirements and limit

- **FCC Part 15.255(f):** Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range  $-20$  to  $+50$  degrees Celsius with an input voltage variation of 85 % to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

### ■ Test Configuration:

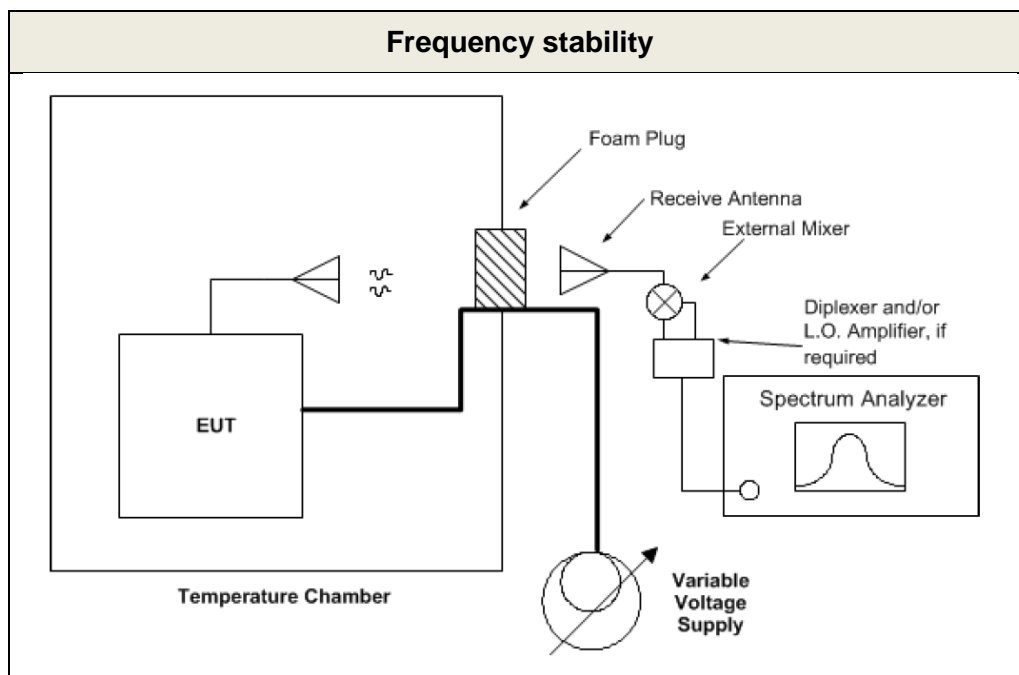

### ■ Test Procedure:

#### ANSI C63.10-2013 – Section 9.14

- 1) With the EUT at ambient temperature (approximately  $25$  °C) and voltage source set to the EUT nominal operating voltage (100 %), record the spectrum mask of the EUT emission on the spectrum analyzer.
- 2) Vary EUT power supply between 85% and 115% of nominal, and record the frequency excursion of the EUT emission mask.
- 3) Set the power supply to 100 % nominal setting, and raise EUT operating temperature to  $50$  °C. Record the frequency excursion of the EUT emission mask.
- 4) Repeat step 3) at each  $10$  °C increment down to  $-20$  °C.

■ Test Results: **Comply**

Test Mode : Sweep Active

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	Measured low frequency(F <sub>L</sub> )(GHz)	Measured high frequency(F <sub>H</sub> )(GHz)
100%	5.00	+20(Ref)	61.010 391	61.488 435
100%		-30	61.011 368	61.488 552
100%		-20	61.010 511	61.488 564
100%		-10	61.010 545	61.488 224
100%		0	61.010 542	61.487 867
100%		+10	61.010 892	61.488 375
100%		+20	61.010 391	61.488 435
100%		+30	61.010 379	61.488 215
100%		+40	61.010 187	61.488 073
100%		+50	61.010 427	61.488 128
115%	5.75	+20	61.010 359	61.488 632
85%	4.25	+20	61.010 258	61.488 830

Note: Fundamental emissions were contained within the frequency bands.

## 8.5. AC line conducted emissions

### ■ Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### ■ Test Configuration:

See test photographs for the actual connections between EUT and support equipment.

### ■ Test Procedure:

Conducted emissions from the EUT were measured according to the ANSI C63.10-2013.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

Test Results: **Comply**

AC Line Conducted Emissions (Graph)

Tested Frequency: 61.248 7 GHz

Results of Conducted Emission

DTNC



Date 2023-08-18

Order No. DTNC2308-05761  
 Model No. RM68-SE  
 Serial No.  
 Test Condition Sweep Active

Reference No.  
 Power Supply  
 Temp/Humi. 23 °C / 45 %  
 Operator JaeHyeok Bang

Memo

LIMIT : FCC P15.207 AV  
 FCC P15.207 QP

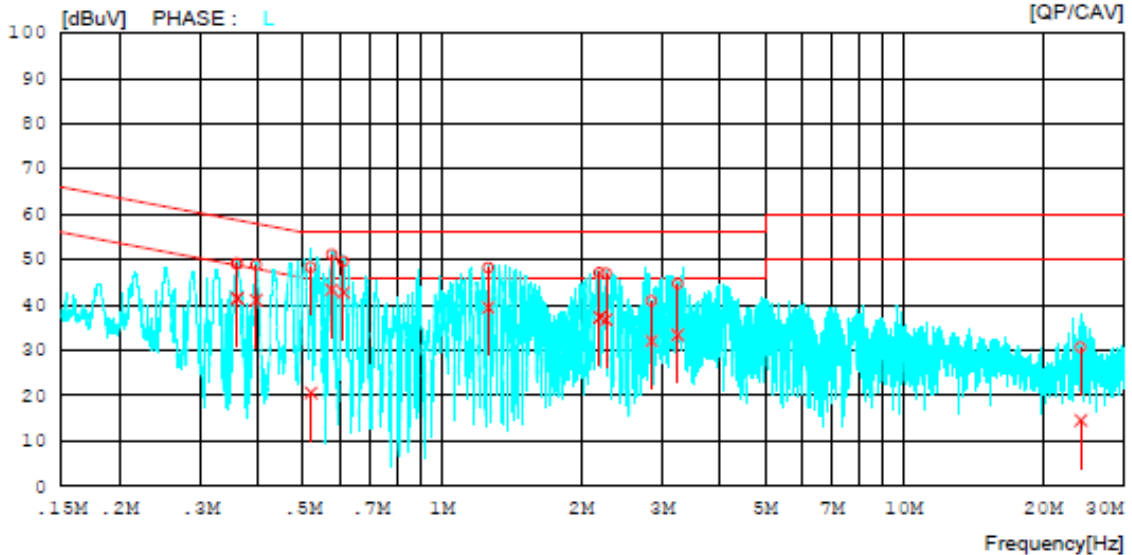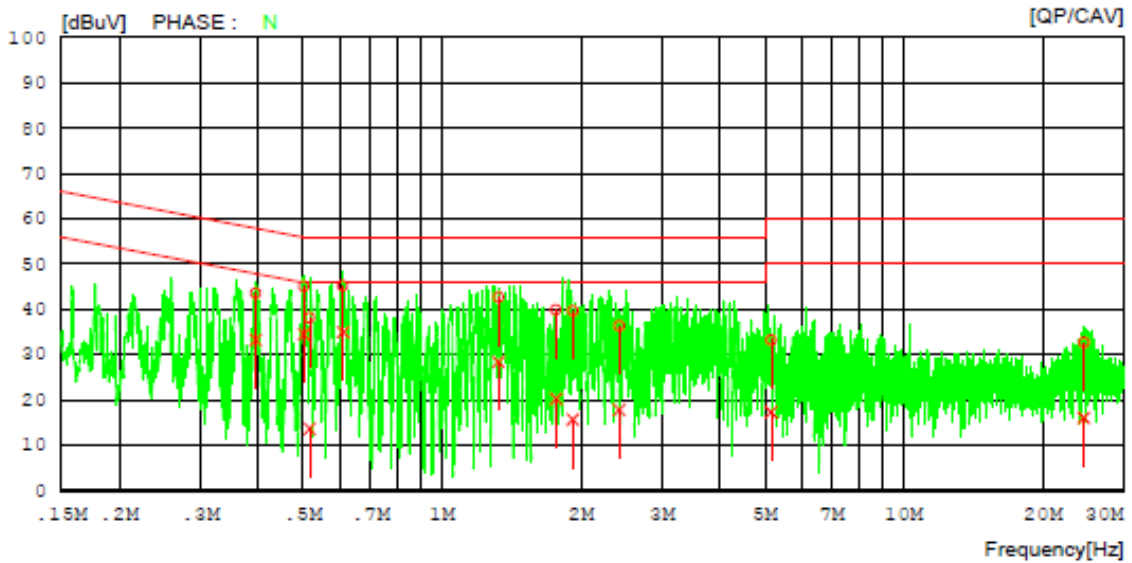

**AC Line Conducted Emissions (List)**

Tested Frequency: 61.248 7 GHz

## Results of Conducted Emission

DTNC

Date 2023-08-18

Order No.	DTNC2308-05761	Reference No.	
Model No.	RM68-SE	Power Supply	
Serial No.		Temp/Humi.	23 'C / 45 %
Test Condition	Sweep Active	Operator	JaeHyeok Bang

Memo

 LIMIT : FCC P15.207 AV  
 FCC P15.207 QP

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.39498	33.58	23.27	9.99	43.57	33.26	57.96	47.96	14.39	14.70	N
2	0.50198	35.10	24.55	10.00	45.10	34.55	56.00	46.00	10.90	11.45	N
3	0.51650	28.11	3.69	10.00	38.11	13.69	56.00	46.00	17.89	32.31	N
4	0.61017	35.16	24.98	9.99	45.15	34.97	56.00	46.00	10.85	11.03	N
5	1.32500	32.61	18.41	10.02	42.63	28.43	56.00	46.00	13.37	17.57	N
6	1.76580	29.83	10.23	10.04	39.87	20.27	56.00	46.00	16.13	25.73	N
7	1.92020	29.65	5.68	10.04	39.69	15.72	56.00	46.00	16.31	30.28	N
8	2.41920	26.36	7.84	10.05	36.41	17.89	56.00	46.00	19.59	28.11	N
9	5.15980	23.00	7.10	10.20	33.20	17.30	60.00	50.00	26.80	32.70	N
10	24.54320	22.06	5.53	10.59	32.65	16.12	60.00	50.00	27.35	33.88	N
11	0.35995	39.21	31.56	9.89	49.10	41.45	58.73	48.73	9.63	7.28	L
12	0.36012	39.22	31.57	9.89	49.11	41.46	58.73	48.73	9.62	7.27	L
13	0.39595	38.92	31.17	9.89	48.81	41.06	57.94	47.94	9.13	6.88	L
14	0.52000	38.43	10.69	9.90	48.33	20.59	56.00	46.00	7.67	25.41	L
15	0.57750	41.23	33.46	9.90	51.13	43.36	56.00	46.00	4.87	2.64	L
16	0.61169	39.68	32.77	9.89	49.57	42.66	56.00	46.00	6.43	3.34	L
17	1.25960	38.21	29.41	10.02	48.23	39.43	56.00	46.00	7.77	6.57	L
18	2.19480	37.01	27.29	10.04	47.05	37.33	56.00	46.00	8.95	8.67	L
19	2.26840	36.82	26.70	10.04	46.86	36.74	56.00	46.00	9.14	9.26	L
20	2.84200	30.81	21.97	10.05	40.86	32.02	56.00	46.00	15.14	13.98	L
21	3.23920	34.66	23.33	10.06	44.72	33.39	56.00	46.00	11.28	12.61	L
22	24.15280	20.35	4.16	10.34	30.69	14.50	60.00	50.00	29.31	35.50	L



## 9. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent	N9020A	22/12/16	23/12/16	MY50110097
Spectrum Analyzer	Rohde Schwarz	FSW85	23/06/23	24/06/23	101778
Receiver	Rohde Schwarz	ESCI3	23/06/23	24/06/23	100798
Thermohygrometer	XIAOMI	MHO-C201	22/12/16	23/12/16	00089675
Thermohygrometer	BODYCOM	BJ5478	22/12/16	23/12/16	120612-2
Multimeter	FLUKE	17B+	22/12/16	23/12/16	36390701WS
Signal Generator	Rohde Schwarz	SMBV100A	22/12/16	23/12/16	255571
Signal Generator	ANRITSU	MG3695C	22/12/16	23/12/16	173501
DC Power Supply	Agilent Technologies	66332A	22/12/16	23/12/16	US37473831
DC Power Supply	SM techno	SDP30-5D	22/12/16	23/12/16	305DKA013
Loop Antenna	ETS-Lindgren	6502	22/04/22	24/04/22	00203480
Hybrid Antenna	Schwarzbeck	VULB 9160	22/12/16	23/12/16	3362
PreAmplifier	H.P	8447D	22/12/16	23/12/16	2944A07774
HORN ANT	ETS	3117	22/12/16	23/12/16	00140394
PreAmplifier	Agilent	8449B	22/12/16	23/12/16	3008A02108
HORN ANT	A.H.Systems	SAS-574	23/06/23	24/06/23	155
PreAmplifier	tsj	MLA-1840-J02-45	23/06/23	24/06/23	16966-10728
Horn Antenna	MI Wave	RX ANT-5 261U+410U	23/06/23	24/06/23	108
PreAmplifier	Norden Millimeter Inc.	NA4060G50N8P12	22/12/16	24/12/16	1003
Horn Antenna	MI Wave	RX ANT-6 261V+410V	23/06/23	24/06/23	110
PreAmplifier	ERAVABT	SBL-5037533550-151-E1-ET	22/12/16	23/12/16	10394-01
Horn Antenna	MI Wave	RX ANT-7 261E	23/06/23	24/06/23	113
PreAmplifier	Norden Millimeter Inc.	NN6090G40N5P-2	22/12/16	24/12/16	1001
Harmonic mixer	Rohde Schwarz	FS-Z90	23/06/23	24/06/23	101714
Horn Antenna	MI Wave	RX ANT-8 261F	23/06/23	24/06/23	114
Harmonic mixer	Rohde Schwarz	FS-Z140	23/06/23	24/06/23	101009
Horn Antenna	MI Wave	RX ANT-9 261G	23/06/23	24/06/23	116
Harmonic mixer	Rohde Schwarz	FS-Z220	21/10/07	23/10/07	101012
RF Detector	SAGE Millimeter	SFD-503753-15SF-P1	22/12/16	23/12/16	17841-01
DIGITAL STORAGE OSCILLOSCOPE	Tektronix	TDS2022B	22/12/16	23/12/16	C058651
Power meter & Power sensor	Rohde Schwarz	NRP2, NRP110T	22/12/16	23/12/16	106060, 101002
Level setting Attenuator	SAGE Millimeter	STA-30-15-M1	22/12/16	23/12/16	10390-01
Temp & Humi Test Chamber	SJ Science	SJ-TH-S50	22/12/14	23/12/14	U5542113
Multiplier	OML, Inc.	S15MS	23/06/23	24/06/23	170821-1
EMI Test Receiver	ROHDE&SCHWARZ	ESCI7	23/01/31	24/01/31	100910
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	22/08/22	23/08/22	101333
LISN	SCHWARZBECK	NSLK 8128 RC	22/10/26	23/10/26	8128 RC-387
Thermo Hygro Meter	TESTO	608-H1	23/01/13	24/01/13	45084791
High-pass filter	Wainwright	WHKX12-935-1000-15000-40SS	22/12/16	23/12/16	7
High-pass filter	Wainwright	WHKX10-2838-3300-18000-60SS	22/12/16	23/12/16	2
High-pass filter	Wainwright	WHKX6-6320-8000-26500-40CC	22/12/16	23/12/16	2
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-1
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-2
Cable	Junkosah	MWX241/B	23/01/04	24/01/04	M-3

Cable	Junkosah	MWX221	23/01/04	24/01/04	M-4
Cable	Junkosah	MWX221	23/01/04	24/01/04	M-5
Cable	DTNC	Cable	23/01/04	24/01/04	M-6
Cable	JUNFLON	J12J101757-00	23/01/04	24/01/04	M-7
Cable	HUBER+SUHNER	SUCOFLEX104	23/01/04	24/01/04	M-8
Cable	HUBER+SUHNER	SUCOFLEX106	23/01/04	24/01/04	M-9
Cable	DTNC	Cable	23/01/04	24/01/04	RFC-69
Cable	Junkosha	MWX241	23/01/03	24/01/03	mmW-1
Cable	Junkosha	MWX241	23/01/03	24/01/03	mmW-4
Cable	Junkosha	MWX261	23/01/03	24/01/03	mmW-6
Cable	SAGE MILLIMETER Inc	SCW-1M1M024-F1	23/01/03	24/01/03	mmW-10
Cable	HUBER+SUHNER	SUCOFLEX 104	23/01/03	24/01/03	mmW-8
Cable	HUBER+SUHNER	SUCOFLEX 104	23/01/03	24/01/03	mmW-9
Test Software	tsj	Radiated Emission Measurement	NA	NA	Version 2.00.0147
Test Software	tsj	Noise Terminal Measurement	NA	NA	Version 2.00.0185

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

APPENDIX I

Test set up diagrams

