

RF Exposure Report

Report No.: AGC07487190301FH03

APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Stealth Wireless Charger
BRAND NAME : CIJI
MODEL NAME : QB01, QB11, QB21, QB31, QB41, QB51
APPLICANT : SHENZHEN CIJI TECHNOLOGY CO., LTD.
DATE OF ISSUE : Jan. 15, 2020
STANDARD(S) : KDB680106 D01 RF Exposure Wireless Charging Base
App v03
REPORT VERSION : V1.0

Attestation of Global Compliance(Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan. 15, 2020	Valid	Initial Release



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION.....	5
2.1. PRODUCT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES.....	6
4. SYSTEM TEST CONFIGURATION	6
5. TEST FACILITY	7
6. RADIO FREQUENCY (RF) EXPOSURE TEST	8
6.1. LIMITS.....	8
6.2. TEST SETUP.....	8
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	11



1. VERIFICATION OF CONFORMITY


Applicant	SHENZHEN CIJI TECHNOLOGY CO.,LTD.
Address	Room 1807, Overseas Chinese Scholars Venture Building, No.29 Gaoxin South Ring Road, Nanshan District, Shenzhen, China, 518057
Manufacturer	SHENZHEN CIJI TECHNOLOGY CO.,LTD.
Address	Room 1807, Overseas Chinese Scholars Venture Building, No.29 Gaoxin South Ring Road, Nanshan District, Shenzhen, China, 518057
Factory	SHENZHEN CIJI TECHNOLOGY CO.,LTD.
Address	Room 1807, Overseas Chinese Scholars Venture Building, No.29 Gaoxin South Ring Road, Nanshan District, Shenzhen, China, 518057
Product Designation	Stealth Wireless Charger
Brand Name	CIJI
Test Model:	QB01
Series Model	QB11, QB21, QB31, QB41, QB51
Model Difference	All the same except for the model name and front appearance
Date of test	Jan. 13, 2020 to Jan. 15, 2020
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in KDB680106 D01.

The results of testing in this report apply to the product/system which was tested only.


Prepared By



Sky Dong
(Project Engineer)

Jan. 15, 2020


Reviewed By



Max Zhang
(Reviewer)

Jan. 15, 2020

Approved By



Forrest Lei
(Authorized Officer)

Jan. 15, 2020

2. GENERAL INFORMATION

2.1.PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	110-205 kHz
Test Frequency	126.3kHz
Maximum field strength	53.14dBuV/m(PK)@3m
Number of channels	1
Antenna Designation	Integrated Antenna (Met 15.203 Antenna requirement)
Hardware Version	2.1
Software Version	4.4.1
Power Supply	DC 19V by adapter



3. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Wireless charging Mode(Full load)
2	Wireless charging Mode(Half load)
3	Wireless charging Mode(Null load)
Note:	
1. The mode 1 was the worst case and only the data of the worst case record in this report.	

4. SYSTEM TEST CONFIGURATION

Item	Equipment	Model No.	ID or Specification	Remark
1	Qi wirelesss charger	MCWCUN0035BL	2AVL7QBX1	EUT
2	Adapter	DYS618-19094W-1	DC 19V/0.94A	Marketed
3	Wireless Load	N/A	10W	Support

5. TEST FACILITY

TestSite	Attestation of Global Compliance(Shenzhen) Co., Ltd
Location	1-2/F,Building19,JunfengIndustrialPark,ChongqingRoad,HepingCommunity,FuhaiStreet,Bao'anDistrict,Shenzhen,Guangdong,China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Broadband Field Meter	Narda Safety Test Solutions GmbH	NBM-550	J-0004	Jun.12,2019	Jun.11,2020
Probe FHP	Narda Safety Test Solutions GmbH	EHP-50F	J-0015	Jun.12,2019	Jun.11,2020




6. RADIO FREQUENCY(RF) EXPOSURETEST

6.1. LIMITS

For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m.

6.2. TEST SETUP

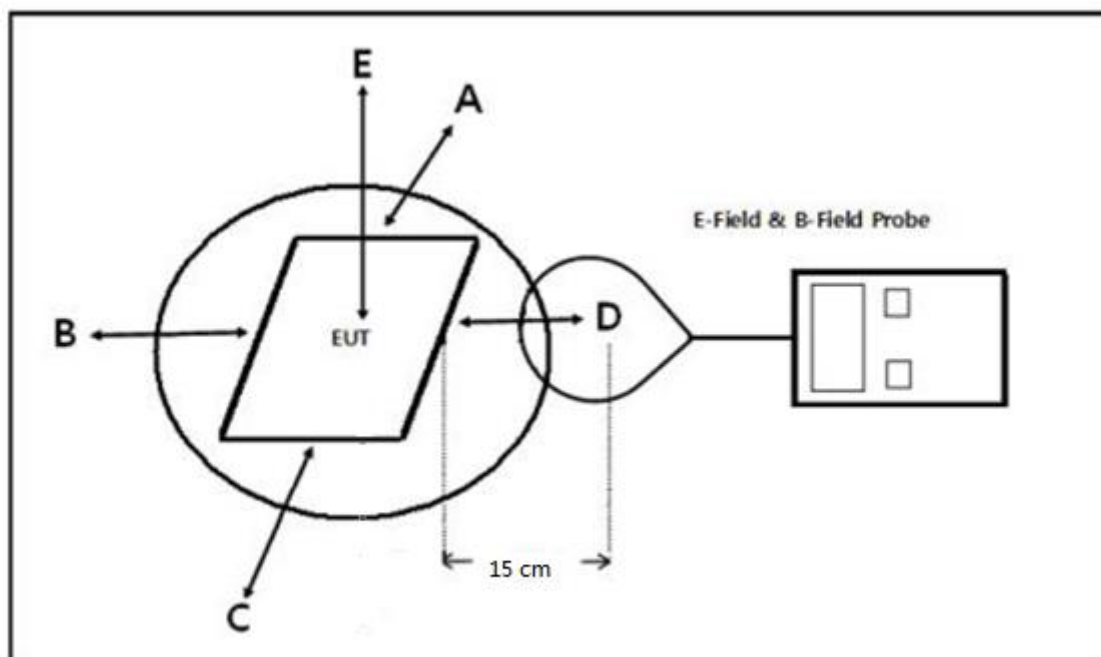

Note: Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT; Position E: Top of EUT(20 cm measure distance);

6.3. TEST PROCEDURE

The EUT was placed on a non-conductive table top and the ancillary equipment (e.g.mobile phone) was placed on the EUT for charging.

Maximum E-field and H-field measurements were tested 15cm from each side of the EUT. For top side the measure distance is 20cm.

Along the side of the EUT to center of E-field probe and H-field probe were positioned at the location to search maximum field strength.



6.4. TEST RESULT

Test condition: Mode 1

E-field strength test result:

Frequency Range	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Limit (V/m)
126.3kHz	2.03	2.01	2.06	2.04	2.96	614

H-field strength test result:

Frequency Range	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Limit (A/m)
126.3kHz	0.96	0.87	1.07	0.96	1.57	1.63

Test condition: Mode 2

E-field strength test result:

Frequency Range	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Limit (V/m)
134.5kHz	1.67	1.68	1.66	1.68	1.89	614

H-field strength test result:

Frequency Range	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Limit (A/m)
134.5kHz	0.54	0.51	0.62	0.57	0.87	1.63



Test condition: Mode 3

E-field strength test result:

Frequency Range	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Limit (V/m)
138.9kHz	1.29	1.30	1.31	1.28	1.35	614

H-field strength test result:

Frequency Range	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Limit (A/m)
138.9kHz	0.24	0.23	0.25	0.22	0.28	1.63



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline: 400 089 2118

APPENDIX A:PHOTOGRAPHS OF TEST SETUP

Position E

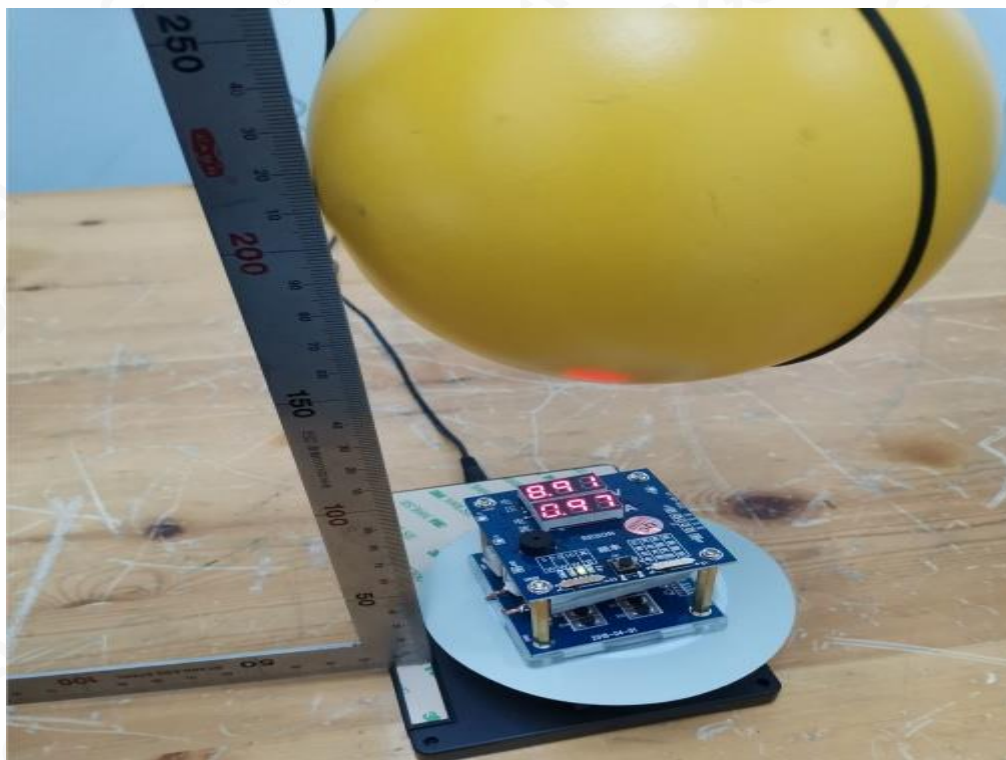

Position A

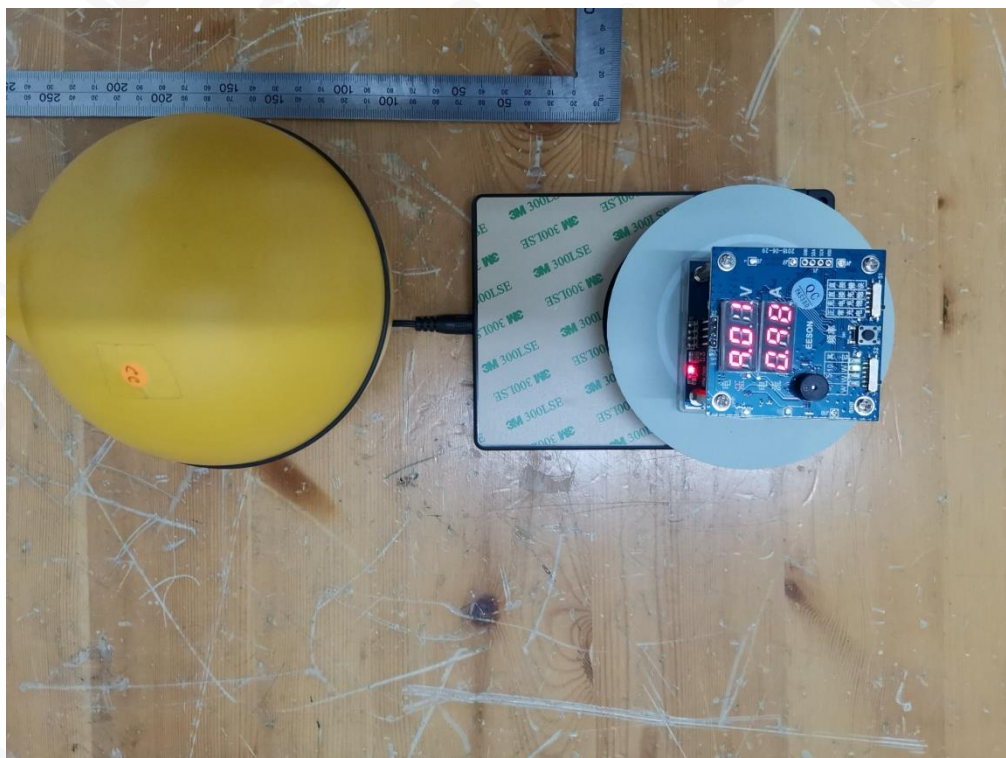

Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118


Position B

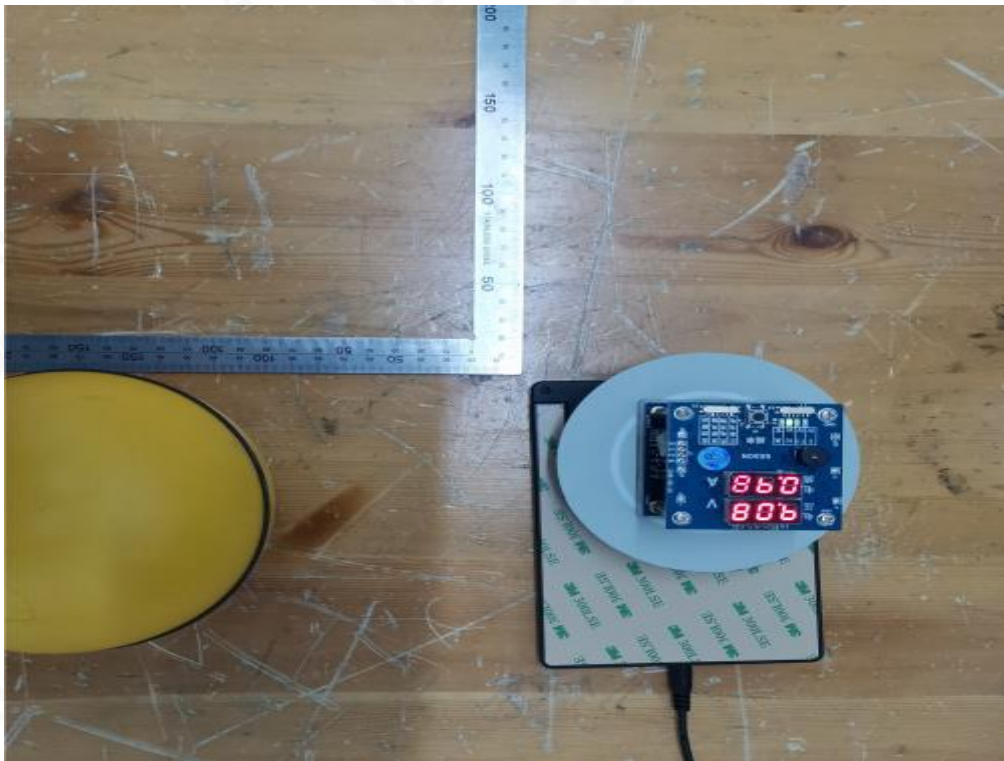

Position C



Position D

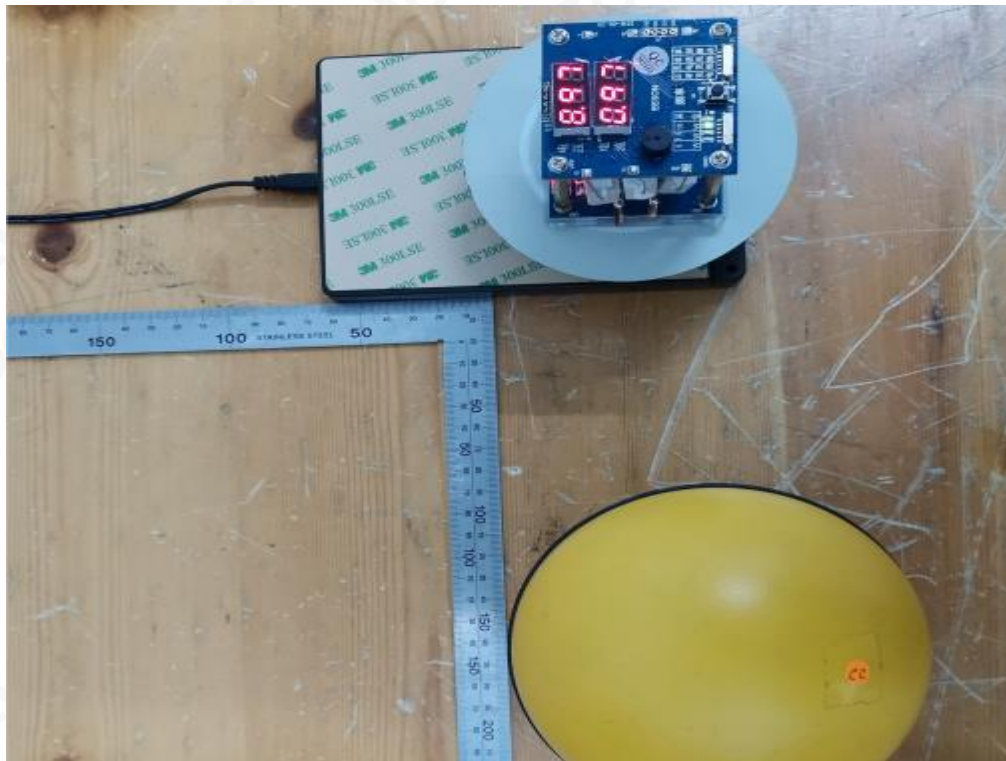

----END OF REPORT----



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118