

# Nalloy, LLC

TEST REPORT FOR

JZ7XYR

Tested to The Following Standards:

FCC Part 15 Subpart C Section(s)

15.207 & 15.247  
(FHSS 902-928MHz)

Report No.: 108788-58

Date of issue: November 16, 2023



Test Certificate # 803.01

This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

This report contains a total of 55 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.



**TABLE OF CONTENTS**

Administrative Information ..... 3

    Test Report Information ..... 3

    Report Authorization ..... 3

    Test Facility Information ..... 4

    Software Versions ..... 4

    Site Registration & Accreditation Information ..... 4

    Summary of Results ..... 5

    Modifications During Testing ..... 5

    Conditions During Testing ..... 5

    Equipment Under Test ..... 6

    General Product Information ..... 7

FCC Part 15 Subpart C ..... 11

    15.247(a) Transmitter Characteristics ..... 11

        15.247(a)(1)(i) Occupied Bandwidth ..... 12

        15.247(a)(1) Carrier Separation ..... 14

        15.247(a)(1)(i) Number of Hopping Channels ..... 15

        15.247(a)(1)(i) Average Time of Occupancy ..... 16

    15.247(b)(2) Output Power ..... 18

    15.247(d) RF Conducted Emissions & Band Edge ..... 21

    15.247(d) Radiated Emissions & Band Edge ..... 29

    15.207 AC Conducted Emissions ..... 48

Supplemental Information ..... 54

    Measurement Uncertainty ..... 54

    Emissions Test Details ..... 54

## ADMINISTRATIVE INFORMATION

### Test Report Information

**REPORT PREPARED FOR:**

Nalloy, LLC  
2301 5th Avenue  
Seattle, WA 98108

Representative: Naga Suryadevara  
Customer Reference Number: 2D-11530595

**REPORT PREPARED BY:**

Viviana Prado  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

Project Number: 108788

**DATE OF EQUIPMENT RECEIPT:**


October 16, 2023

**DATE(S) OF TESTING:**

October 16, 17, 19, 23-27, 2023 to November 2, 2023

### Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



**Steve Behm**  
*Director of Quality Assurance & Engineering Services*  
*CKC Laboratories, Inc.*

## Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable, and affordable test results.

TEST LOCATION(S):  
CKC Laboratories, Inc.  
22116 23rd Drive SE, Suite A  
Bothell, WA 98021

## Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.20

## Site Registration & Accreditation Information

Location	*NIST CB #	FCC	Canada	Japan
Canyon Park, Bothell, WA	US0103	US1024	3082C	A-0136
Brea, CA	US0103	US1024	3082D	A-0136
Fremont, CA	US0103	US1024	3082B	A-0136
Mariposa, CA	US0103	US1024	3082A	A-0136

\*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

## SUMMARY OF RESULTS

### Standard / Specification: FCC Part 15 Subpart C - 15.247 (FHSS 902-928MHz)

Test Procedure	Description	Modifications	Results
15.247(a)(1)(i)	Occupied Bandwidth	NA	Pass
15.247(a)(1)	Carrier Separation	NA	Pass
15.247(a)(1)(i)	Number of Hopping Channels	NA	Pass
15.247(a)(1)(i)	Average Time of Occupancy	NA	Pass
15.247(b)(2)	Output Power	NA	Pass
15.247(d)	RF Conducted Emissions & Band Edge	NA	Pass
15.247(d)	Radiated Emissions & Band Edge	NA	Pass
15.207	AC Conducted Emissions	NA	Pass

NA = Not Applicable

#### ISO/IEC 17025 Decision Rule

The equipment sample utilized for testing is selected by the manufacturer. The declaration of pass or fail herein is a binary statement for simple acceptance rule (ILAC G8) based upon assessment to the specification(s) listed above, without consideration of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

### Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

#### Summary of Conditions

No modifications were made during testing.

**Modifications listed above must be incorporated into all production units.**

### Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

#### Summary of Conditions

None

## EQUIPMENT UNDER TEST (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

### Configuration 1

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
NA	Nalloy, LLC	JZ7XYR	NA

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Laptop	Chuwi	Herobook Pro	JHeroBP2563201012960
AC Adapter	Apple	A1357	NA

### Configuration 2

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
NA	Nalloy, LLC	JZ7XYR	NA

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Laptop	Chuwi	Herobook Pro	JHeroBP2563201012960
NA	Nalloy, LLC	24F9HC	NA
Laptop (for WISA network)	Lenovo	X230	9901661685
PoE Injector	Microsemi	PD-9601GC	NA

### Configuration 5

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
NA	Nalloy, LLC	JZ7XYR	NA

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Laptop	HP	Elitebook	5CG213CCQ6
PoE Injector	Microsemi	PD-9601GC	NA
Wireless Access Point	Nalloy, LLC	LSMGY4	G3L201153016001D


## General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Radio Module
Type of Wideband System:	Proprietary FHSS
Operating Frequency Range:	902.4-927.6MHz
Number of Hopping Channels:	64
Receiver Bandwidth and Synchronization:	The manufacturer declares the receiver input bandwidth matches the transmit channel bandwidth and shifts frequencies in synchronization with the transmitter.
Modulation Type(s):	GFSK-2
Maximum Duty Cycle:	Tested 100% as worst case
Number of TX Chains:	1
Antenna Type(s) and Gain:	Swivel Type Dipole, 1.57dBi declared per manufacturer
Beamforming Type:	NA
Antenna Connection Type:	External Connector
Nominal Input Voltage:	5VDC
Firmware / Software used for Test:	<p>Realterm 2.0.0.70</p> <p>Railtest_v3.01_Mongoose_EV1_200kB_GFSK2_902.4M_0-63ch_BER_mode_0dBm_Stream_PA1.8V.hex</p> <p>ihm-halcyon-node-halcyon-2.2.0 (1).hex</p>
The validity of results is dependent on the stated product details, the accuracy of which the manufacturer assumes full responsibility.	

**Block Diagram of Test Setup(s)**

**Configuration 1**


**Test Setup Block Diagram**

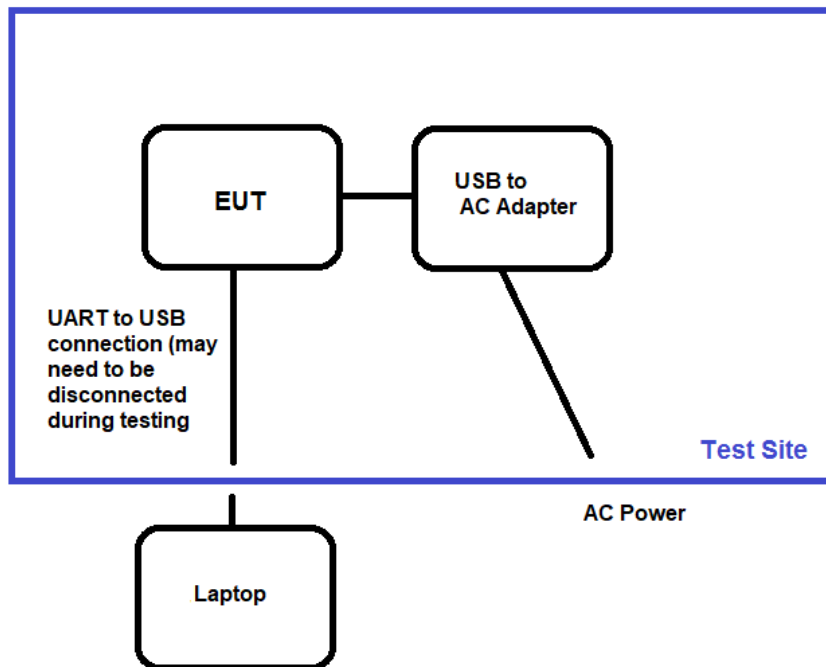




Configuration 2

**Test Setup Block Diagram**

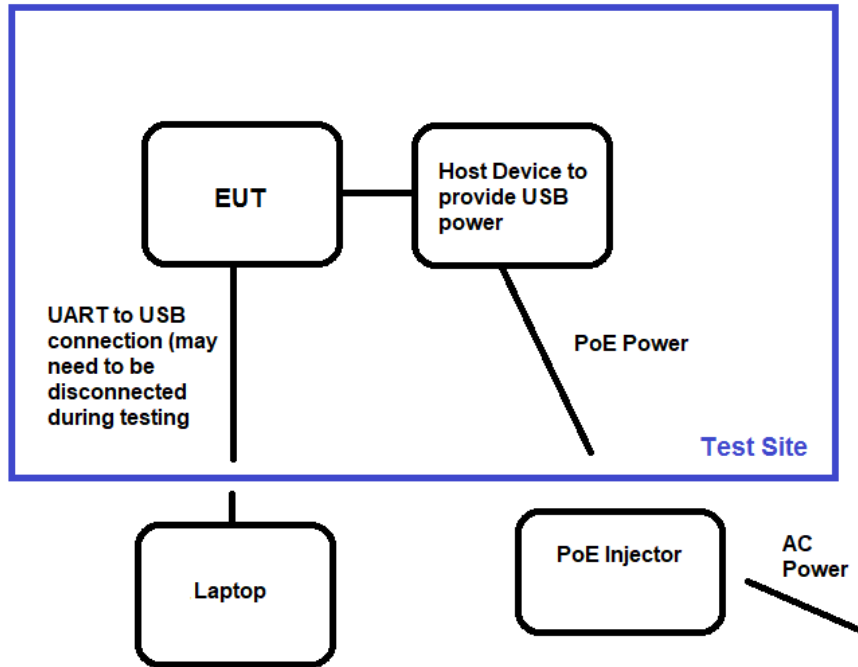

Configuration 5

**Test Setup Block Diagram**

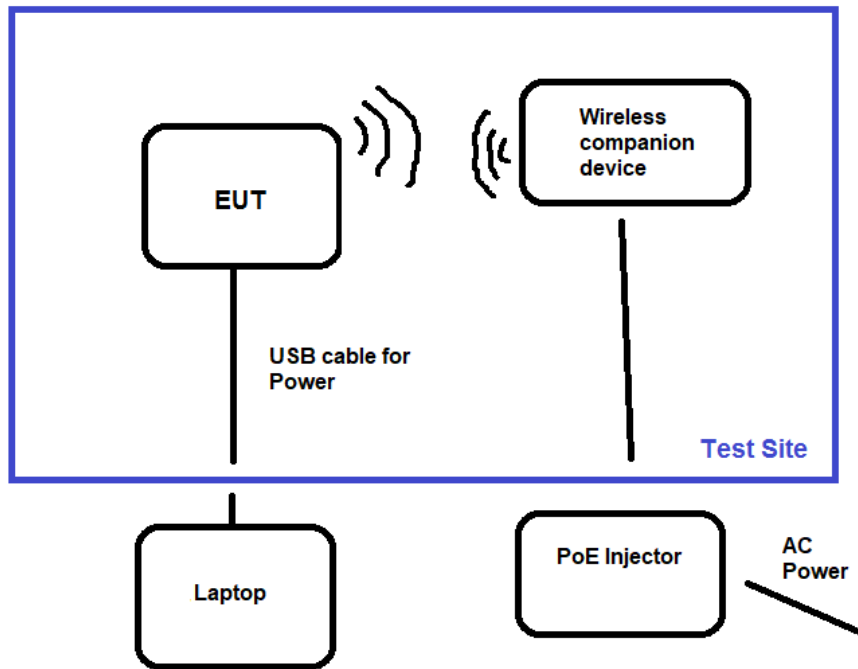

## FCC Part 15 Subpart C

**Note:** Test setup photos are located in a separate attachment, #108788-58\_TestSetupPhotos

### 15.247(a) Transmitter Characteristics

Test Setup/Conditions			
Test Location:	Bothell Lab Bench	Test Engineer:	M. Atkinson/M. Harrison
Test Method:	ANSI C63.10 (2013)	Test Date(s):	10/23/23 to 11/2/23
Configuration:	1 and 5		
Test Setup:	EUT is directly connected to spectrum analyzer with appropriate attenuation and cables. The EUT is continuously transmitting being controlled through support laptop. Normal operation firmware is used for the time of occupancy measurement with a near field probe.		


Environmental Conditions			
Temperature (°C)	20-22	Relative Humidity (%):	38-55

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
03803	Spectrum Analyzer	Agilent	E4440A	2/23/2022	2/23/2024
P07226	Attenuator	Pasternack	PE7004-6	8/25/2023	8/25/2025
P07610	Cable	Andrews	Heliac	4/19/2023	4/19/2025
02673	Spectrum Analyzer	Agilent	E4446A	3/2/2023	3/2/2025


### 15.247(a)(1)(i) Occupied Bandwidth Bandwidth

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
902.4	1	GFSK-2	248.118	≤500	Pass
914.8	1	GFSK-2	248.335	≤500	Pass
927.6	1	GFSK-2	247.942	≤500	Pass


### Plot(s)

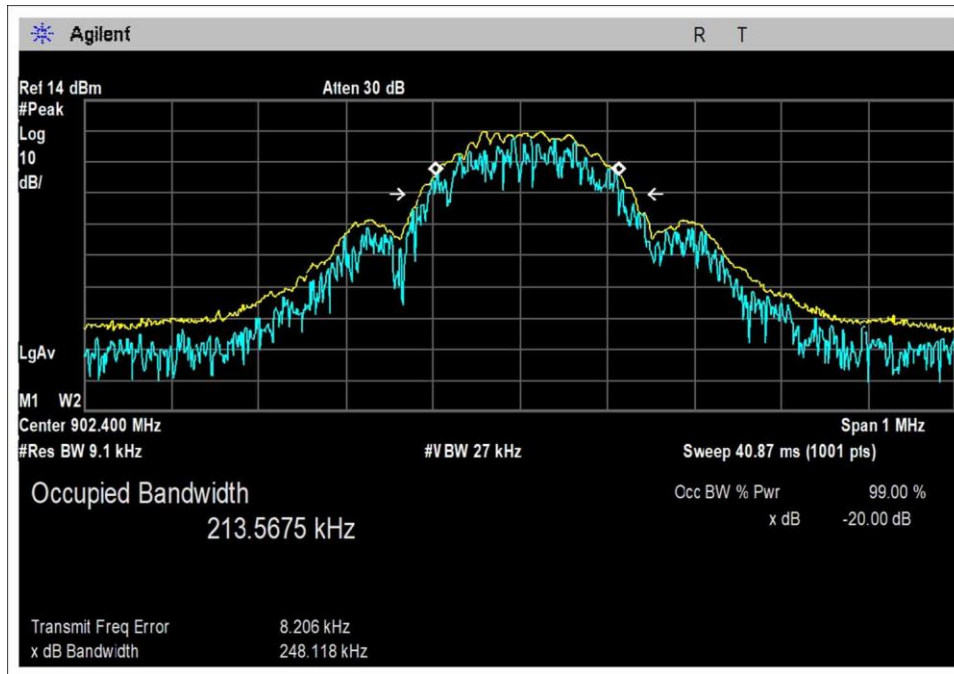

Low Channel

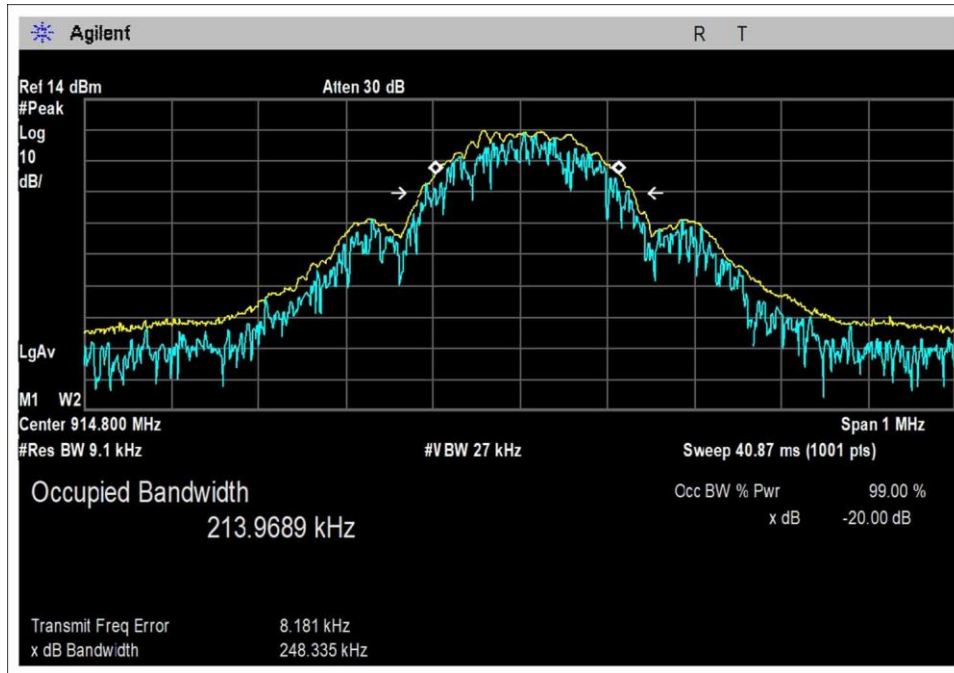

Middle Channel

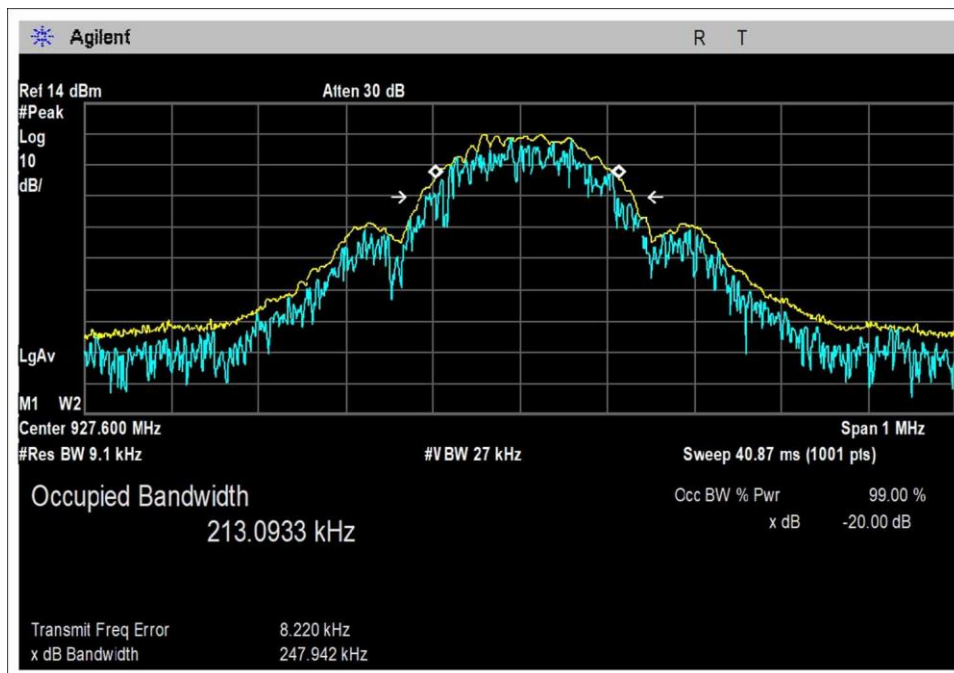


High Channel

### 15.247(a)(1) Carrier Separation

Test Data Summary				
Limit applied: 20dB bandwidth of the hopping channel.				
Antenna Port	Operational Mode	Measured (kHz)	Limit (kHz)	Results
1	Transmitting	396.3	>248.335	Pass

### Plot(s)

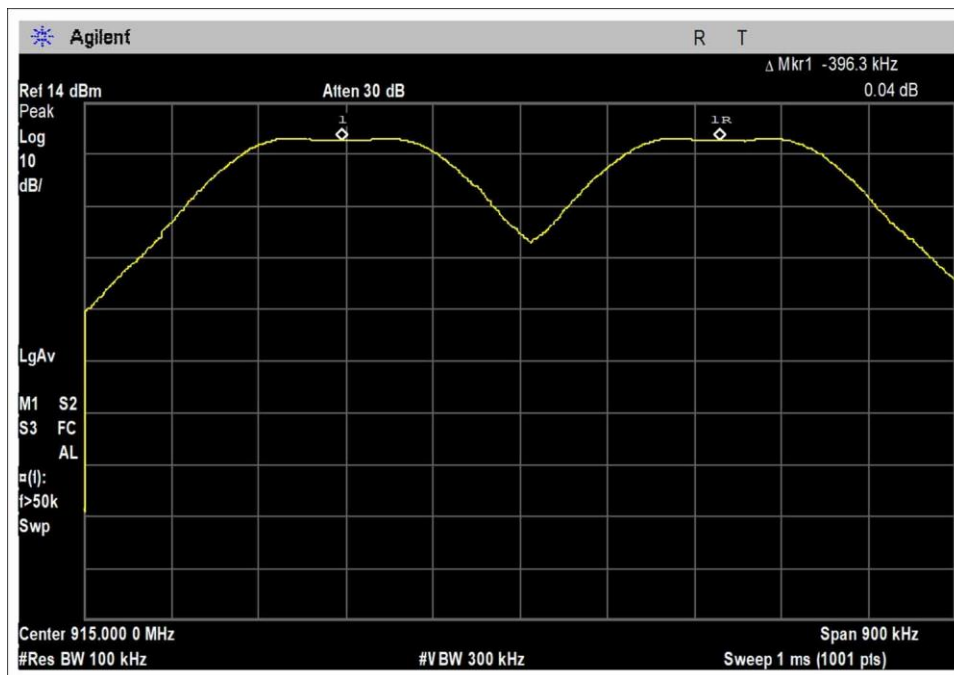


Channel Separation

### 15.247(a)(1)(i) Number of Hopping Channels

Test Data Summary				
$Limit = \begin{cases} 50 \text{ Channels} & 20 \text{ dB BW} < 250 \text{ kHz} \\ 25 \text{ Channels} & 20 \text{ dB BW} \geq 250 \text{ kHz} \end{cases}$				
Antenna Port	Operational Mode	Measured (Channels)	Limit (Channels)	Results
1	Transmitting	64	$\geq 50$	Pass

### Plot(s)

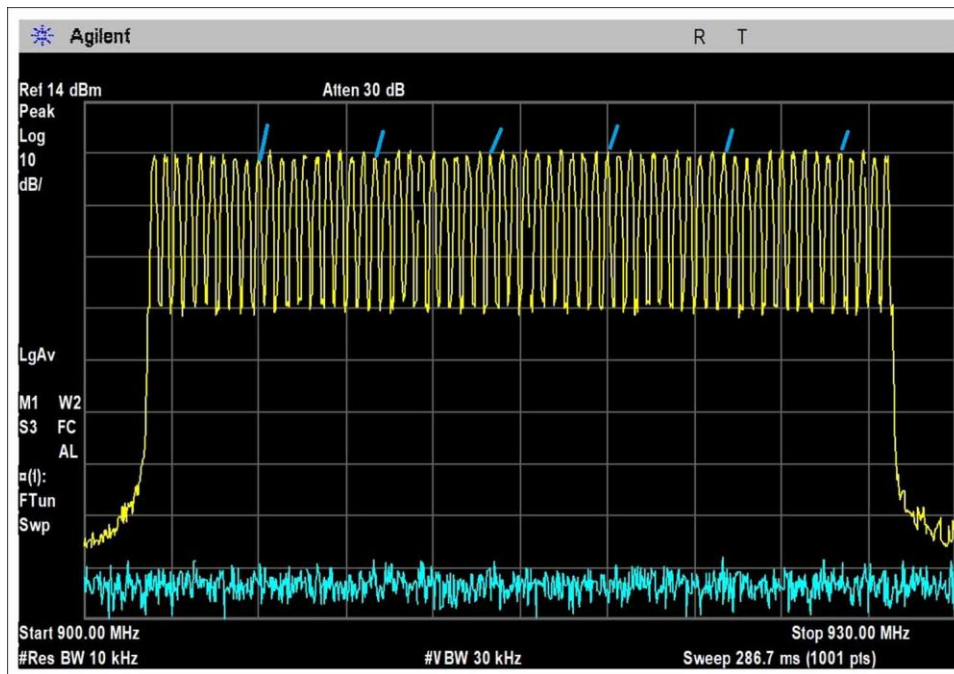

Number Channels - Marked

### 15.247(a)(1)(i) Average Time of Occupancy

Test Data Summary				
Observation Period, $P_{obs}$ is derived from the following: $P_{obs} = \begin{cases} 20 \text{ Seconds} &   20 \text{ dB BW} < 250\text{kHz} \\ 10 \text{ Seconds} &   20 \text{ dB BW} \geq 250\text{kHz} \end{cases}$				
Antenna Port	Operational Mode	Measured (ms)	Limit (ms/ $P_{obs}$ )	Results
1	Transmitting	4.2	$\leq 400$	Pass

Measured results are calculated as follows:


$$Dwell\ time = \left( \sum_{Bursts} RF\ Burst\ On\ Time + \sum_{Control} Control\ Signal\ On\ time \right) \Big|_{P_{obs}}$$

**Actual Calculated Values:**


Parameter	Value
Observation Period ( $P_{obs}$ ):	20s
Number of RF Bursts / $P_{obs}$ :	1
On time of RF Burst:	4.2ms
Number of Control or other signals / $P_{obs}$ :	0
On time of Control or other Signals:	0
Total Measured On Time:	4.2ms



**Plot(s)**

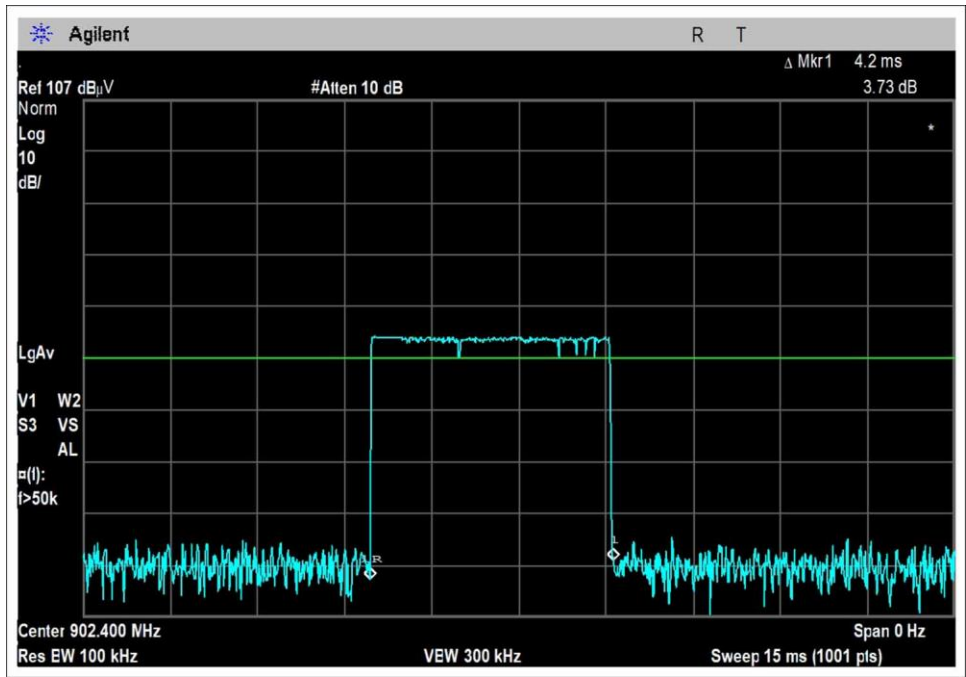

Pulse Width 4.2ms

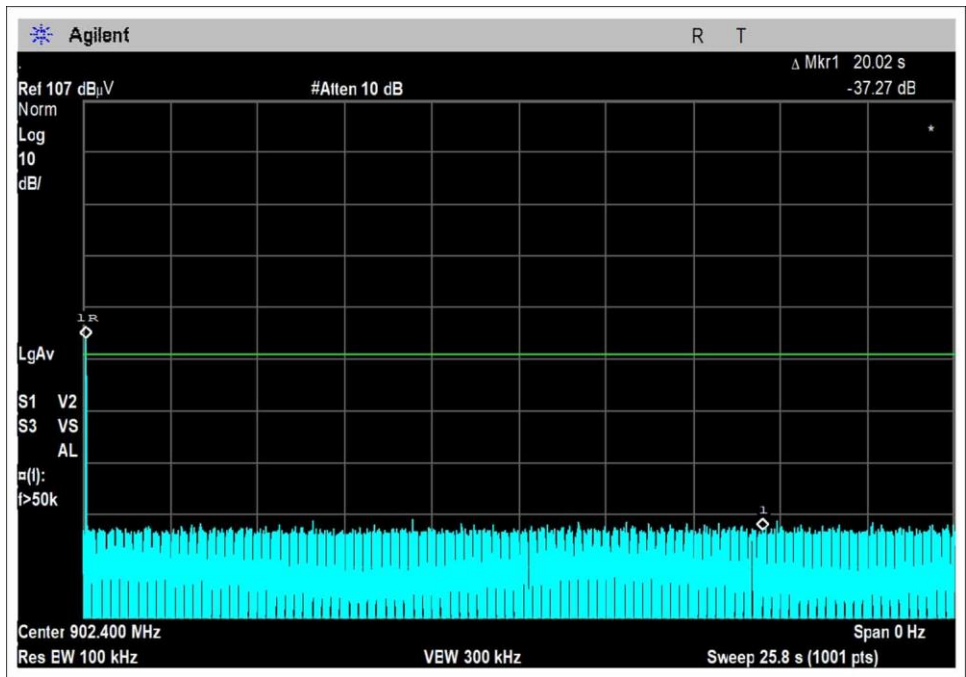

Pulses in 20s

## 15.247(b)(2) Output Power

### Test Setup/Conditions

Test Location:	Bothell Lab Bench	Test Engineer:	M. Atkinson
Test Method:	ANSI C63.10 (2013)	Test Date(s):	10/23/23 to 10/27/23
Configuration:	1		
Test Setup:	EUT is directly connected to spectrum analyzer with appropriate attenuation and cables. The EUT is continuously transmitting being controlled through support laptop. The correction factor for the system has been loaded into the spectrum analyzer.		

### Environmental Conditions

Temperature (°C)	20-22	Relative Humidity (%):	38-55
------------------	-------	------------------------	-------

### Test Equipment

Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
03803	Spectrum Analyzer	Agilent	E4440A	2/23/2022	2/23/2024
P07226	Attenuator	Pasternack	PE7004-6	8/25/2023	8/25/2025
P07610	Cable	Andrews	Heliac	4/19/2023	4/19/2025
1318	Multimeter	Fluke	85	7/20/2023	7/20/2025
P07788	DC 5 amp Power Supply	Rigol	DP711	1/19/2022	1/19/2024

### Test Data Summary - Voltage Variations

Frequency (MHz)	Modulation	V <sub>Minimum</sub> (dBm)	V <sub>Nominal</sub> (dBm)	V <sub>Maximum</sub> (dBm)	Max Deviation from V <sub>Nominal</sub> (dB)
902.4	GFSK-2	14.5	14.5	14.5	0.0
914.8	GFSK-2	14.3	14.3	14.3	0.0
927.6	GFSK-2	14.2	14.2	14.2	0.0

Test performed using operational mode with the highest output power, representing worst case.

### Parameter Definitions:

Measurements performed at input voltage V<sub>Nominal</sub> ± 15%.


Parameter	Value
V <sub>Nominal</sub> :	5.00VDC
V <sub>Minimum</sub> :	4.25VDC
V <sub>Maximum</sub> :	5.75VDC

### Test Data Summary - RF Conducted Measurement


$$Limit = \begin{cases} 30dBm \text{ Conducted}/36dBm \text{ EIRP} & | \geq 50 \text{ Channels} \\ 24dBm \text{ Conducted}/30dBm \text{ EIRP} & | < 50 \text{ Channels (min 25)} \end{cases}$$

Frequency (MHz)	Modulation	Ant Gain	Measured (dBm)	Limit (dBm)	Results
902.4	GFSK-2	1.57 dBi	14.5	≤30	Pass
914.8	GFSK-2	1.57 dBi	14.3	≤30	Pass
927.6	GFSK-2	1.57 dBi	14.2	≤30	Pass


Plots

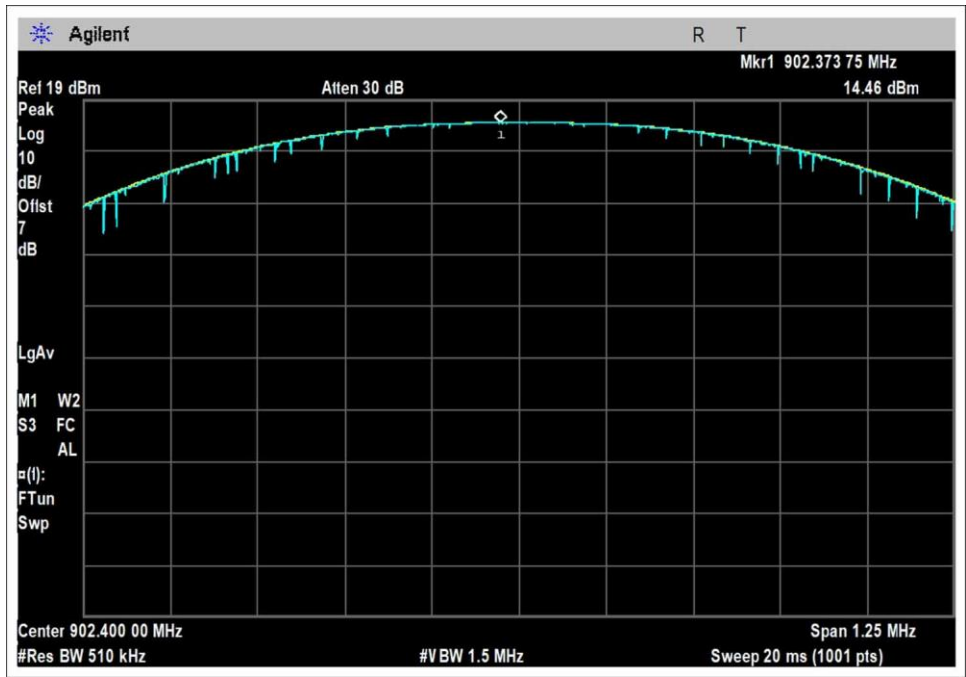

Low Channel

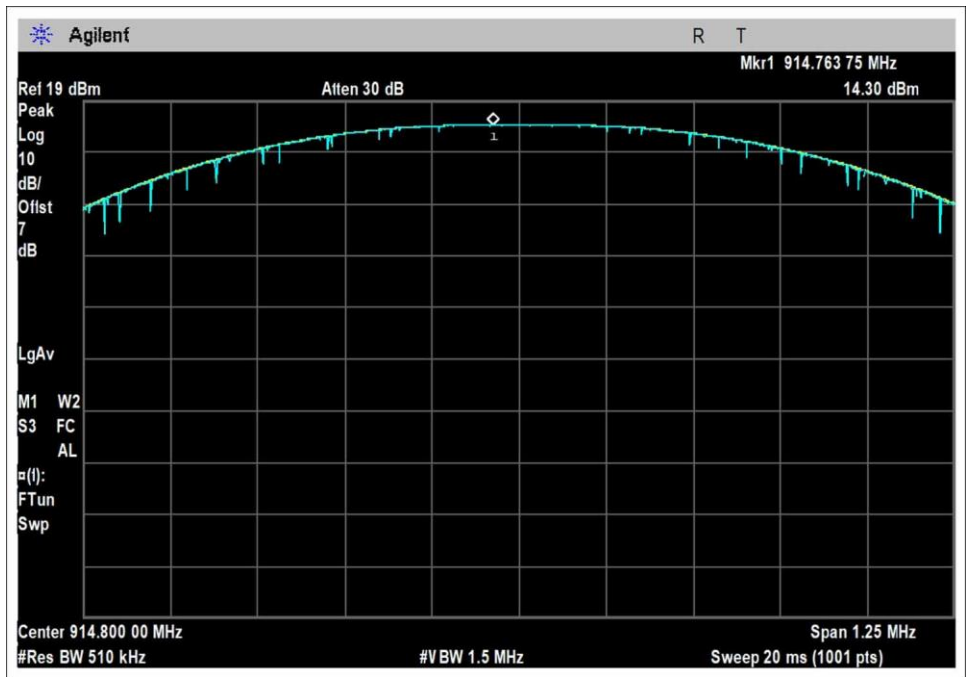

Middle Channel

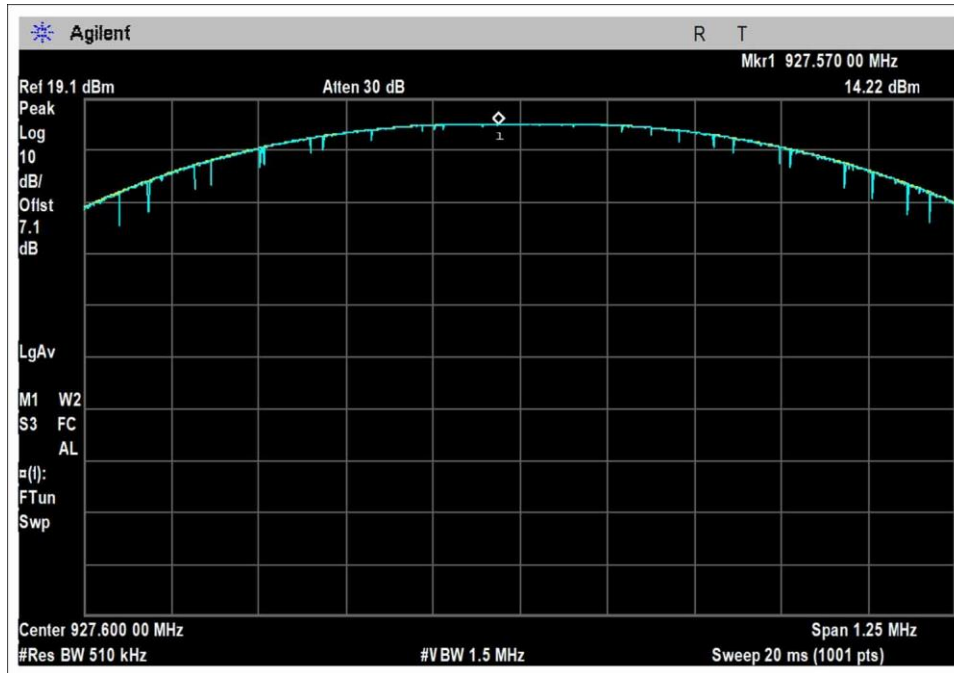

High Channel

## 15.247(d) RF Conducted Emissions & Band Edge

### Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)  
 Customer: **Nalloy, LLC**  
 Specification: **15.247(d) Conducted Spurious Emissions**  
 Work Order #: **108788** Date: 10/23/2023  
 Test Type: **Conducted Emissions** Time: 15:37:57  
 Tested By: Michael Atkinson Sequence#: 22  
 Software: EMITest 5.03.20 120V 60Hz

#### Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


#### Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

#### Test Conditions / Notes:

Test Environment Conditions:  
 Temperature: 22°C  
 Humidity: 55%  
 Pressure: 100.9.6kPa  
  
 Test Method: ANSI C63.10 (2013)  
  
 Frequency Range: 9kHz-10GHz  
  
 Test Setup:  
 EUT is directly connected to spectrum analyzer with appropriate attenuation and cables. The EUT is continuously transmitting being controlled through support laptop.  
  
 Low, Middle, and High channels investigated.

Nalloy, LLC WO#: 108788 Sequence#: 22 Date: 10/23/2023  
 15.247(d) Conducted Spurious Emissions Test Lead: 120V 60Hz RF Port

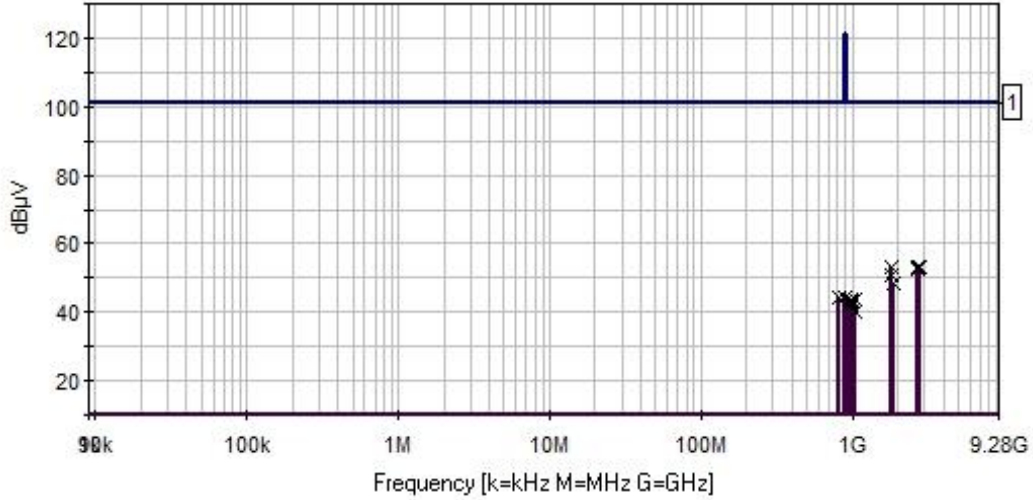

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN03803	Spectrum Analyzer	E4440A	2/23/2022	2/23/2024
T1	ANP07226	Attenuator	PE7004-6	8/25/2023	8/25/2025
T2	ANP05542	Cable	Heliac	2/8/2023	2/8/2025

**Measurement Data:**

Reading listed by margin.

Test Lead: RF Port

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB		Dist dB	Table	Corr dB $\mu$ V	Spec dB $\mu$ V	Margin dB	Polar Ant
1	2782.000M	45.4	+5.9	+2.1		+0.0		53.4	101.3 927.6	-47.9	RF Po
2	2708.000M	45.5	+5.9	+2.0		+0.0		53.4	101.3 902.4	-47.9	RF Po
3	1805.000M	45.8	+5.9	+1.7		+0.0		53.4	101.3 902.4	-47.9	RF Po
4	2744.000M	44.7	+5.9	+2.0		+0.0		52.6	101.3 914.8	-48.7	RF Po
5	1830.000M	43.3	+5.9	+1.7		+0.0		50.9	101.3 914.8	-50.4	RF Po
6	1855.000M	40.6	+5.9	+1.8		+0.0		48.3	101.3 927.6	-53.0	RF Po
7	812.500M	37.2	+5.9	+1.1		+0.0		44.2	101.3 927.6	-57.1	RF Po
8	889.000M	37.2	+5.9	+1.1		+0.0		44.2	101.3 927.6	-57.1	RF Po
9	979.000M	36.9	+5.9	+1.2		+0.0		44.0	101.3 902.4	-57.3	RF Po
10	1030.000M	36.6	+5.9	+1.2		+0.0		43.7	101.3 914.8	-57.6	RF Po
11	991.500M	36.2	+5.9	+1.2		+0.0		43.3	101.3 914.8	-58.0	RF Po
12	941.000M	36.2	+5.9	+1.2		+0.0		43.3	101.3 902.4	-58.0	RF Po
13	967.000M	35.0	+5.9	+1.2		+0.0		42.1	101.3 927.6	-59.2	RF Po
14	1042.000M	32.8	+5.9	+1.3		+0.0		40.0	101.3 927.6	-61.3	RF Po

**Band Edge**

**Band Edge Summary**

Limit applied: Max Power/100kHz - 20dB.  
 Operating Mode: Single Channel (Low and High)  
 100kHz measured in dB $\mu$ V = 121.3

Frequency (MHz)	Modulation	Measured (dB $\mu$ V)	Limit (dB $\mu$ V)	Results
902	GFSK-2	69.9	<101.3	Pass
928	GFSK-2	67.3	<101.3	Pass

**Band Edge Summary**



Limit applied: Max Power/100kHz - 20dB.  
 Operating Mode: Hopping  
 100kHz measured in dB $\mu$ V = 121.3

Frequency (MHz)	Modulation	Measured (dB $\mu$ V)	Limit (dB $\mu$ V)	Results
902	GFSK-2	68.9	<101.3	Pass
928	GFSK-2	67.1	<101.3	Pass





## Band Edge Plots

### Single Channel

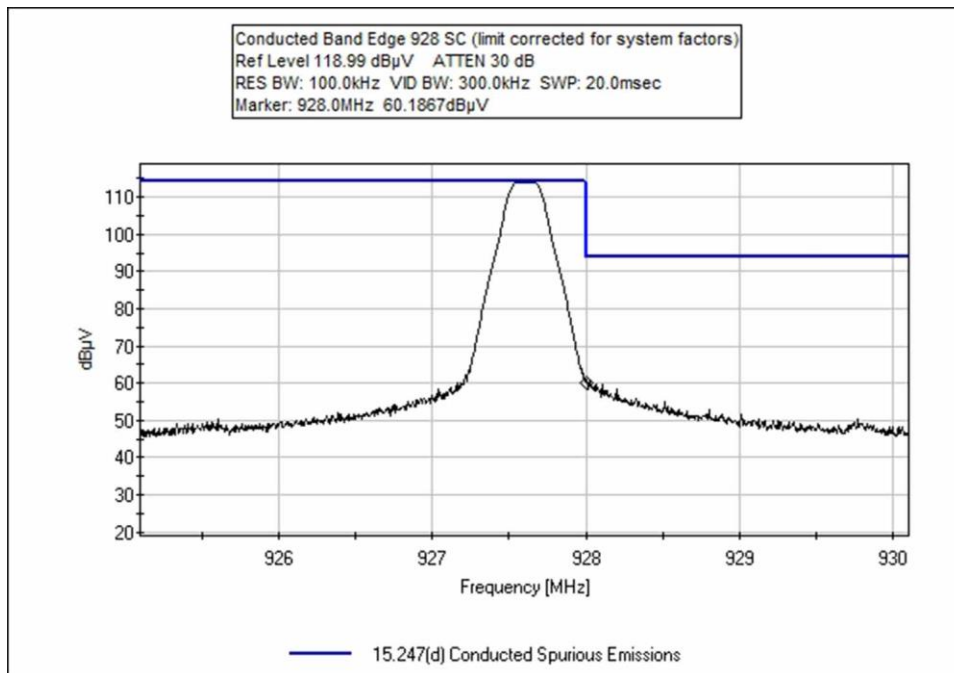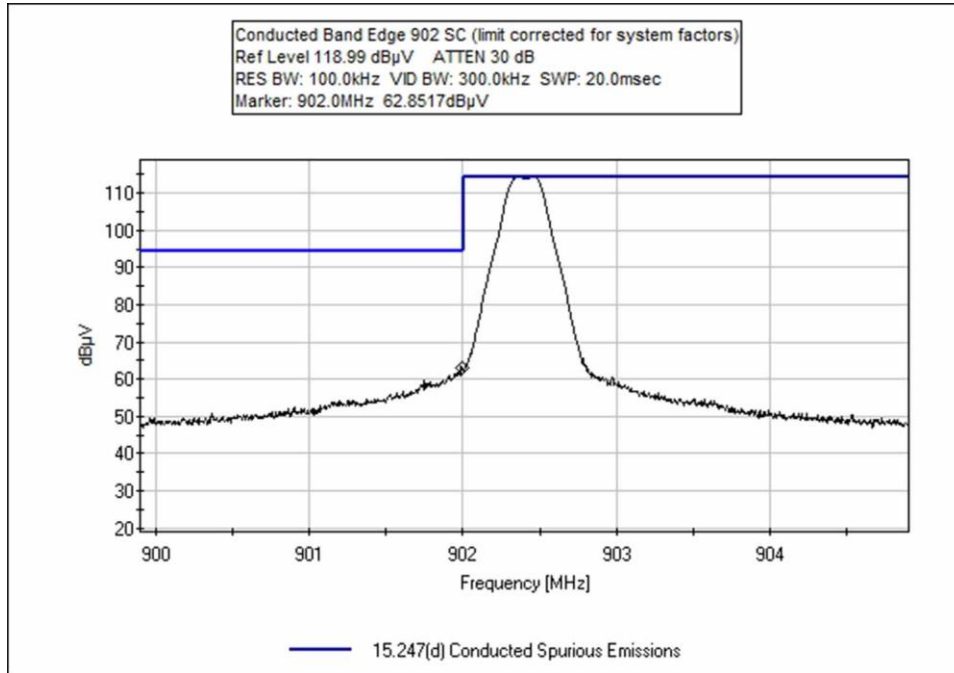

### Hopping

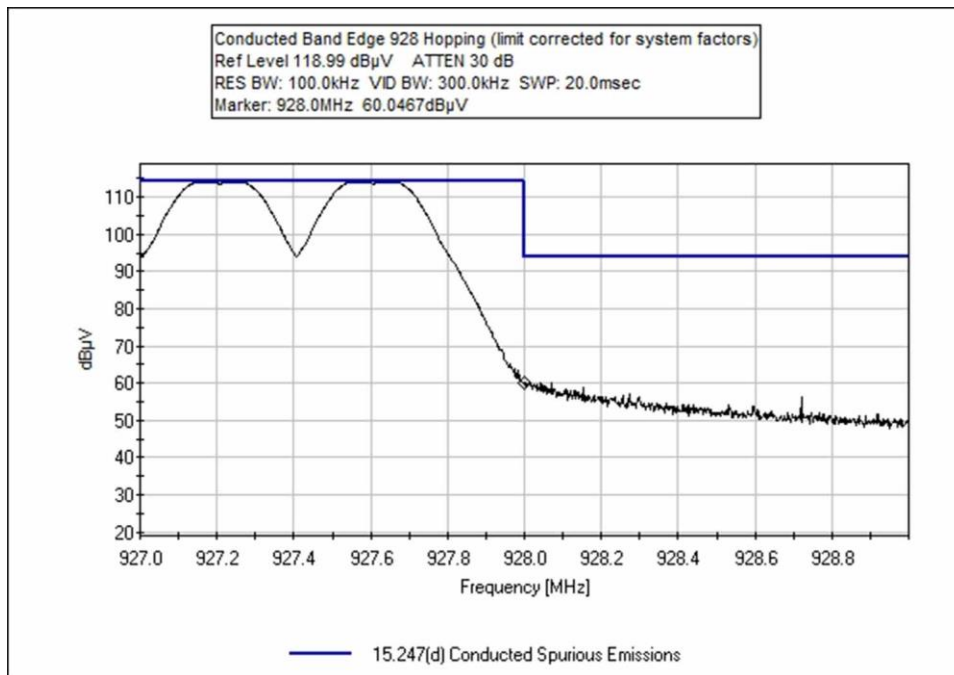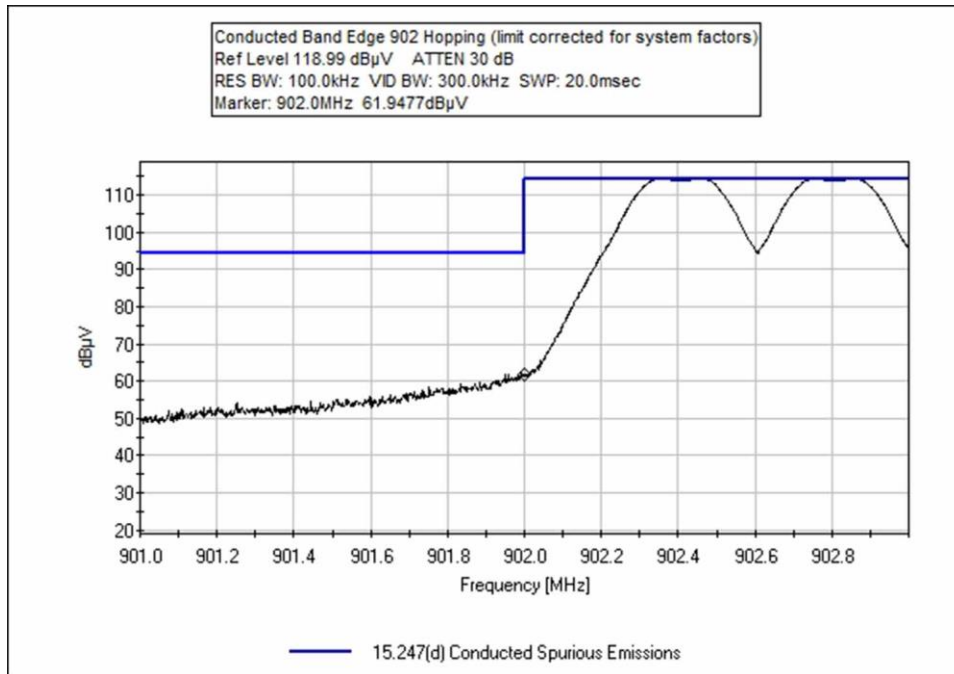

**Test Setup / Conditions / Data**

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)  
 Customer: **Nalloy, LLC**  
 Specification: **15.247(d) Conducted Spurious Emissions**  
 Work Order #: **108788** Date: 10/23/2023  
 Test Type: **Conducted Emissions** Time: 15:24:03  
 Tested By: Michael Atkinson Sequence#: 21  
 Software: EMITest 5.03.20 120V 60Hz

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Test Environment Conditions:  
 Temperature: 22°C  
 Humidity: 55%  
 Pressure: 100.9.6kPa  
  
 Test Method: ANSI C63.10 (2013)  
  
 Frequency Range: Band Edge  
  
 Test Setup:  
 EUT is directly connected to spectrum analyzer with appropriate attenuation and cables. The EUT is continuously transmitting being controlled through support laptop.  
  
 Single Channel and Hopping modes investigated.

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN03803	Spectrum Analyzer	E4440A	2/23/2022	2/23/2024
T2	ANP07226	Attenuator	PE7004-6	8/25/2023	8/25/2025
T3	ANP05542	Cable	Helix	2/8/2023	2/8/2025

**Measurement Data:**

Reading listed by margin.

Test Lead: RF Port

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	Dist dB	Dist Table	Corr dB $\mu$ V	Spec dB $\mu$ V	Margin dB	Polar Ant
1	902.000M	62.9	+0.0	+5.9	+1.1		+0.0	69.9	101.3 SC	-31.4	RF Po
2	902.000M	61.9	+0.0	+5.9	+1.1		+0.0	68.9	101.3 Hopping	-32.4	RF Po
3	928.000M	60.2	+0.0	+5.9	+1.2		+0.0	67.3	101.3 SC	-34.0	RF Po
4	928.000M	60.0	+0.0	+5.9	+1.2		+0.0	67.1	101.3 Hopping	-34.2	RF Po

## 15.247(d) Radiated Emissions & Band Edge

### Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)  
 Customer: **Nalloy, LLC**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **108788** Date: 10/17/2023  
 Test Type: **Maximized Emissions** Time: 09:14:15  
 Tested By: Michael Atkinson Sequence#: 4  
 Software: EMITest 5.03.20

#### Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


#### Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

#### Test Conditions / Notes:

Test Environment Conditions:  
 Temperature: 22°C  
 Humidity: 56%  
 Pressure: 100.9kPa  
  
 Test Method: ANSI C63.10 (2013)  
  
 Frequency Range: 9kHz-30MHz  
  
 Test Setup:  
 Low Channel (0) 902.4 MHz, Mid (31) 914.8MHz, High (63) 927.6MHz  
 GFSK-2  
 100% Duty Cycle  
  
 PWR Level Setting: 140  
  
 3 x orthogonal axes investigated, worst case reported.  
  
 X, Y, Z orientations and tx antenna straight and bent investigated with worst case reported.

Nalloy, LLC WO#: 108788 Sequence#: 4 Date: 10/17/2023  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Various

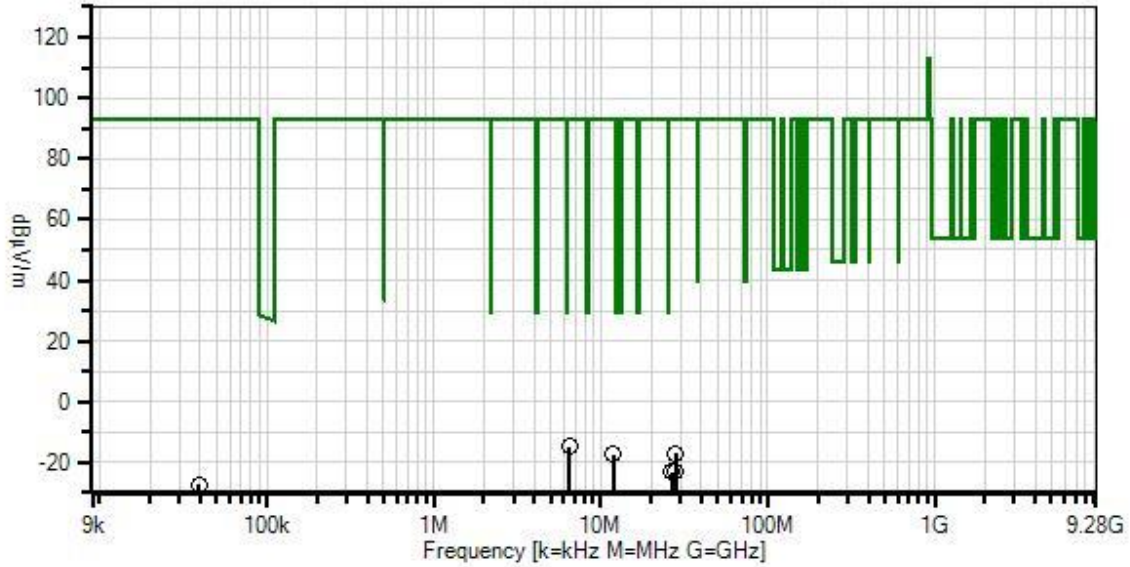

— Readings  
 × QP Readings  
 ▼ Ambient  
 — 1 - 15.247(d) / 15.209 Radiated Spurious Emissions  
 ○ Peak Readings  
 \* Average Readings  
 Software Version: 5.03.20

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	3/2/2023	3/2/2025
T1	ANP05546	Cable	Heliacx	8/1/2023	8/1/2025
T2	ANP06515	Cable	Heliacx	3/1/2023	3/1/2025
T3	AN00052	Loop Antenna	6502	5/11/2022	5/11/2024

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	6.452M	16.3	+0.1	+0.1	+8.9	-40.0	-14.6	93.0	-107.6	Para
2	27.941M	18.1	+0.1	+0.3	+4.5	-40.0	-17.0	93.0	-110.0	Groun
3	11.933M	13.7	+0.1	+0.2	+8.8	-40.0	-17.2	93.0	-110.2	Para
4	27.941M	12.1	+0.1	+0.3	+4.5	-40.0	-23.0	93.0	-116.0	Para
5	26.607M	11.2	+0.1	+0.3	+5.2	-40.0	-23.2	93.0	-116.2	Perp
6	39.394k	42.4	+0.0	+0.0	+10.3	-80.0	-27.3	93.0	-120.3	Groun

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)  
 Customer: **Nalloy, LLC**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **108788** Date: 10/17/2023  
 Test Type: **Maximized Emissions** Time: 08:36:55  
 Tested By: Michael Atkinson Sequence#: 2  
 Software: EMITest 5.03.20

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Test Environment Conditions:  
 Temperature: 22°C  
 Humidity: 56%  
 Pressure: 100.9kPa

Test Method: ANSI C63.10 (2013)

Frequency Range: 30-1000MHz

Test Setup:  
 Low Channel (0) 902.4 MHz, Mid (31) 914.8MHz, High (63) 927.6MHz  
 GFSK-2  
 100% Duty Cycle


PWR Level Setting: 140

Horizontal and Vertical polarities investigated, worst case reported.

X, Y, Z orientations and tx antenna straight and bent investigated with worst case reported.



Nalloy, LLC W/O#: 108788 Sequence#: 2 Date: 10/17/2023  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters H+V

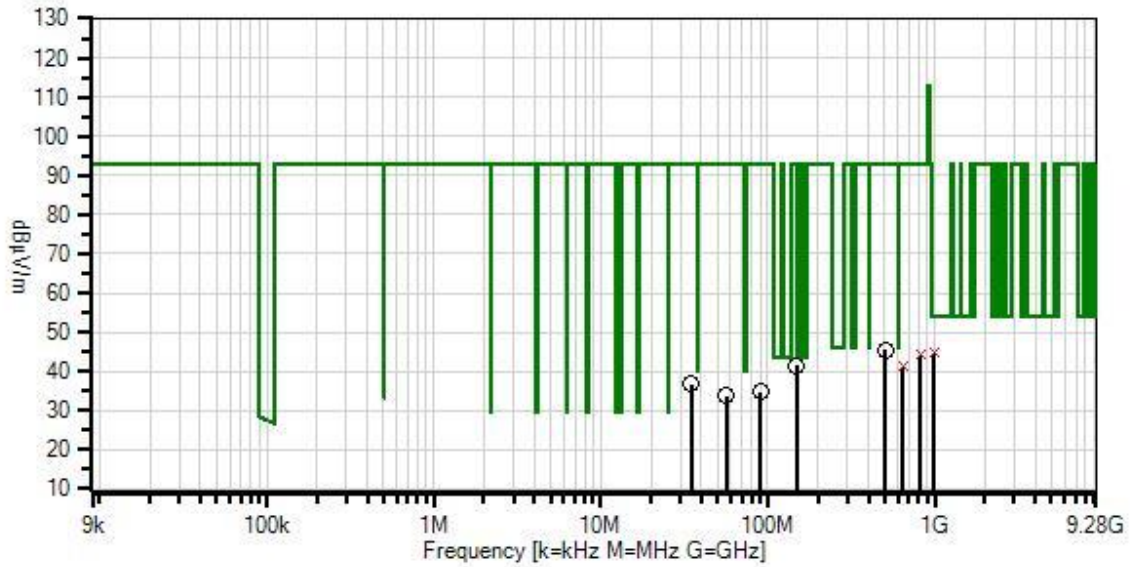

- Readings
  - × QP Readings
  - ▼ Ambient
  - Peak Readings
  - \* Average Readings
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions  
 Software Version: 5.03.20

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	3/2/2023	3/2/2025
T1	ANP05546	Cable	Heliacx	8/1/2023	8/1/2025
T2	ANP05333	Cable	Heliacx	8/8/2023	8/8/2025
T3	ANP05360	Cable	RG214	8/8/2023	8/8/2025
T4	AN03824	Biconilog Antenna	3142E	5/9/2023	5/9/2025

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	986.400M QP	9.4	+0.7	+1.6	+2.6	+30.4	+0.0	44.7	54.0	-9.3	Vert
^	986.400M	16.2	+0.7	+1.6	+2.6	+30.4	+0.0	51.5	54.0	-2.5	Vert
3	507.200M	17.0	+0.5	+1.1	+2.0	+24.8	+0.0	45.4	93.0	-47.6	Vert
4	815.800M QP	9.6	+0.6	+1.4	+2.5	+30.2	+0.0	44.3	93.0	-48.7	Horiz
^	815.800M	16.6	+0.6	+1.4	+2.5	+30.2	+0.0	51.3	93.0	-41.7	Horiz
6	148.660M	24.8	+0.3	+0.6	+0.9	+14.9	+0.0	41.5	93.0	-51.5	Vert
7	644.800M QP	9.3	+0.5	+1.3	+2.4	+27.7	+0.0	41.2	93.0	-51.8	Vert
^	644.800M	15.6	+0.5	+1.3	+2.4	+27.7	+0.0	47.5	93.0	-45.5	Vert
9	34.590M	16.6	+0.1	+0.3	+0.4	+19.3	+0.0	36.7	93.0	-56.3	Vert
10	90.100M	20.9	+0.2	+0.4	+0.6	+12.6	+0.0	34.7	93.0	-58.3	Horiz
11	56.200M	20.7	+0.1	+0.3	+0.5	+12.2	+0.0	33.8	93.0	-59.2	Vert

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)  
 Customer: **Nalloy, LLC**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **108788** Date: 10/17/2023  
 Test Type: **Maximized Emissions** Time: 15:54:10  
 Tested By: Steven Pittsford Sequence#: 5  
 Software: EMITest 5.03.20

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			


***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Test Environment Conditions:  
 Temperature: 22°C  
 Humidity: 56%  
 Pressure: 100.9kPa  
  
 Test Method: ANSI C63.10 (2013)  
  
 Frequency Range: 1-10GHz  
  
 Test Setup:  
 Low Channel (0) 902.4 MHz, Mid (31) 914.8MHz, High (63) 927.6MHz  
 GFSK-2  
 100% Duty Cycle  
  
 PWR Level Setting: 140  
  
 Vertical and Horizontal polarities, X, Y, Z axis, tx antenna straight and bent investigated with worst case reported.

Nalloy, LLC W/O#: 108788 Sequence#: 5 Date: 10/17/2023  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters H+V

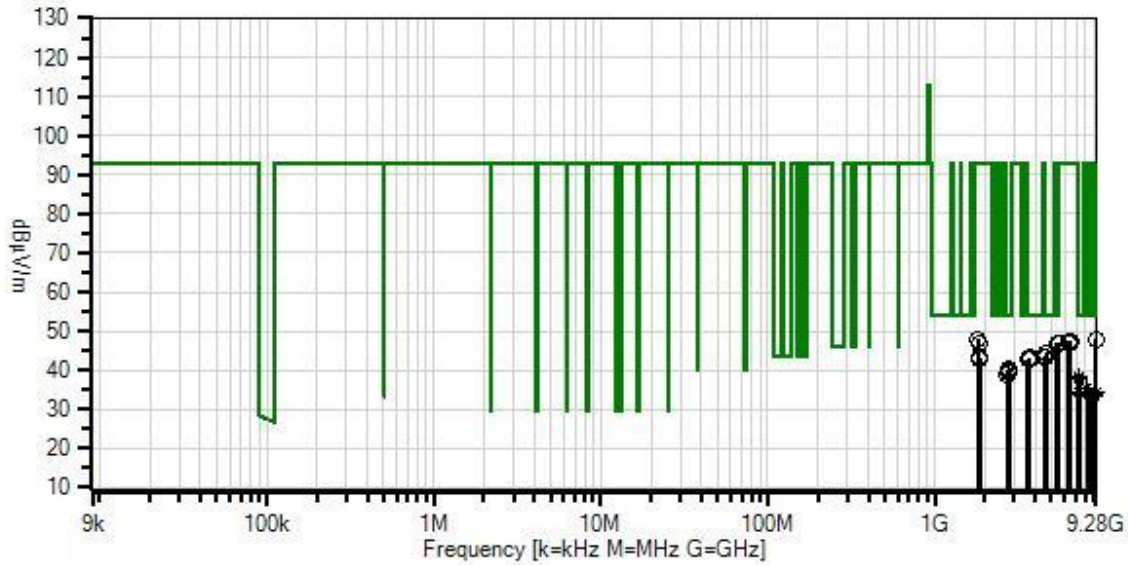

— Readings  
 × QP Readings  
 ▼ Ambient  
 — 1 - 15.247(d) / 15.209 Radiated Spurious Emissions

○ Peak Readings  
 \* Average Readings  
 Software Version: 5.03.20

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02673	Spectrum Analyzer	E4446A	3/2/2023	3/2/2025
T2	ANP05546	Cable	Heliac	8/1/2023	8/1/2025
T3	AN03170	High Pass Filter	HM1155-11SS	9/27/2023	9/27/2025
T4	AN02374ANSI	Horn Antenna	RGA-60	5/26/2023	5/26/2025
T5	ANP06515	Cable	Heliac	3/1/2023	3/1/2025
T6	ANP07504	Cable	CLU40-KMKM-02.00F	1/24/2023	1/24/2025
T7	AN03540	Preamp	83017A	3/24/2023	3/24/2025

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 T5 dB	T2 T6 dB	T3 T7 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	5414.175M	38.4	+0.0 +4.9	+1.7 +1.0	+0.4 -33.8	+34.4	+0.0	47.0	54.0 902.4	-7.0	Horiz 156
2	4638.265M	38.5	+0.0 +4.2	+1.3 +1.4	+0.5 -33.8	+32.4	+0.0	44.5	54.0 927.6	-9.5	Horiz 151
3	4571.810M	38.1	+0.0 +4.2	+1.3 +1.2	+0.4 -33.8	+32.2	+0.0	43.6	54.0 914.8	-10.4	Horiz 146
4	4608.760M	37.8	+0.0 +4.2	+1.3 +1.3	+0.5 -33.8	+32.3	+0.0	43.6	54.0 922.0	-10.4	Horiz 151
5	4510.665M	38.2	+0.0 +4.2	+1.2 +1.1	+0.4 -33.8	+32.1	+0.0	43.4	54.0 902.4	-10.6	Horiz 156
6	3710.080M	39.3	+0.0 +3.6	+1.5 +0.8	+0.3 -33.9	+31.6	+0.0	43.2	54.0 927.6	-10.8	Horiz 151
7	3688.305M	39.3	+0.0 +3.6	+1.5 +0.8	+0.3 -34.0	+31.5	+0.0	43.0	54.0 922.0	-11.0	Horiz 151
8	3658.955M	39.2	+0.0 +3.7	+1.4 +0.9	+0.3 -34.0	+31.4	+0.0	42.9	54.0 914.8	-11.1	Horiz 146
9	3608.180M	39.0	+0.0 +3.7	+1.4 +1.0	+0.4 -34.0	+31.3	+0.0	42.8	54.0 902.4	-11.2	Horiz 156
10	2782.430M	40.8	+0.0 +3.0	+1.2 +0.5	+0.3 -34.5	+29.3	+0.0	40.6	54.0 927.6	-13.4	Horiz 151
11	2766.015M	40.3	+0.0 +3.0	+1.2 +0.5	+0.3 -34.5	+29.3	+0.0	40.1	54.0 922.0	-13.9	Horiz 151
12	2744.805M	39.5	+0.0 +3.0	+1.2 +0.5	+0.3 -34.5	+29.3	+0.0	39.3	54.0 914.8	-14.7	Horiz 146
13	2707.030M	38.9	+0.0 +3.0	+1.2 +0.5	+0.3 -34.5	+29.3	+0.0	38.7	54.0 902.4	-15.3	Horiz 156
14	7318.980M Ave	27.0	+0.0 +5.3	+1.9 +1.4	+0.5 -35.1	+37.2	+0.0	38.2	54.0 914.8	-15.8	Horiz 146
^	7318.980M	38.0	+0.0 +5.3	+1.9 +1.4	+0.5 -35.1	+37.2	+0.0	49.2	54.0 914.8	-4.8	Horiz 146
16	8120.415M Ave	22.3	+0.0 +5.7	+2.6 +0.9	+0.5 -35.4	+38.9	+0.0	35.5	54.0 902.4	-18.5	Horiz 156
^	8120.415M	37.8	+0.0 +5.7	+2.6 +0.9	+0.5 -35.4	+38.9	+0.0	51.0	54.0 902.4	-3.0	Horiz 156
18	7377.835M Ave	22.8	+0.0 +5.5	+2.0 +1.3	+0.5 -35.1	+37.3	+0.0	34.3	54.0 922.0	-19.7	Horiz 151
^	7377.835M	37.2	+0.0 +5.5	+2.0 +1.3	+0.5 -35.1	+37.3	+0.0	48.7	54.0 922.0	-5.3	Horiz 151
20	8232.585M Ave	21.9	+0.0 +5.5	+2.6 +0.7	+0.5 -35.4	+38.4	+0.0	34.2	54.0 914.8	-19.8	Horiz 146
^	8232.585M	37.2	+0.0 +5.5	+2.6 +0.7	+0.5 -35.4	+38.4	+0.0	49.5	54.0 914.8	-4.5	Horiz 146
22	7420.420M Ave	22.5	+0.0 +5.5	+2.0 +1.2	+0.5 -35.1	+37.4	+0.0	34.0	54.0 927.6	-20.0	Horiz 151
^	7420.420M	37.9	+0.0 +5.5	+2.0 +1.2	+0.5 -35.1	+37.4	+0.0	49.4	54.0 927.6	-4.6	Horiz 151

24	9147.375M Ave	20.9	+0.0 +5.9	+2.4 +0.8	+0.9 -34.7	+37.7	+0.0	33.9	54.0 914.8	-20.1	Horiz 146
^	9147.375M	36.3	+0.0 +5.9	+2.4 +0.8	+0.9 -34.7	+37.7	+0.0	49.3	54.0 914.8	-4.7	Horiz 146
26	8299.740M Ave	21.6	+0.0 +5.5	+2.6 +0.6	+0.7 -35.4	+38.3	+0.0	33.9	54.0 922.0	-20.1	Horiz 151
^	8299.740M	36.5	+0.0 +5.5	+2.6 +0.6	+0.7 -35.4	+38.3	+0.0	48.8	54.0 922.0	-5.2	Horiz 151
28	8346.245M Ave	21.4	+0.0 +5.5	+2.6 +0.4	+0.8 -35.3	+38.3	+0.0	33.7	54.0 927.6	-20.3	Horiz 151
^	8346.245M	37.8	+0.0 +5.5	+2.6 +0.4	+0.8 -35.3	+38.3	+0.0	50.1	54.0 927.6	-3.9	Horiz 151
30	9024.430M Ave	19.9	+0.0 +6.0	+2.4 +1.2	+0.7 -34.8	+37.9	+0.0	33.3	54.0 902.4	-20.7	Horiz 156
^	9024.430M	35.1	+0.0 +6.0	+2.4 +1.2	+0.7 -34.8	+37.9	+0.0	48.5	54.0 902.4	-5.5	Horiz 156
32	9221.630M	35.5	+0.0 +5.8	+2.4 +0.5	+0.7 -34.7	+37.8	+0.0	48.0	93.0 922.0	-45.0	Horiz 151
33	1804.925M	51.9	+0.0 +2.2	+0.7 +0.4	+0.5 -35.1	+27.3	+0.0	47.9	93.0 902.4	-45.1	Horiz 156
34	6492.535M	37.3	+0.0 +5.8	+2.1 +1.2	+0.6 -34.3	+34.8	+0.0	47.5	93.0 927.6	-45.5	Horiz 151
35	6454.470M	37.6	+0.0 +5.7	+2.1 +1.1	+0.6 -34.3	+34.7	+0.0	47.5	93.0 922.0	-45.5	Horiz 151
36	5491.170M	37.8	+0.0 +5.1	+1.7 +1.3	+0.5 -33.8	+34.4	+0.0	47.0	93.0 914.8	-46.0	Horiz 146
37	5531.435M	37.5	+0.0 +5.2	+1.7 +1.3	+0.5 -33.8	+34.4	+0.0	46.8	93.0 922.0	-46.2	Horiz 151
38	1829.495M	50.4	+0.0 +2.3	+0.7 +0.4	+0.4 -35.1	+27.6	+0.0	46.7	93.0 914.8	-46.3	Horiz 146
39	6318.950M	37.2	+0.0 +5.4	+2.1 +0.9	+0.5 -34.2	+34.7	+0.0	46.6	93.0 902.4	-46.4	Horiz 156
40	5565.185M	37.3	+0.0 +5.2	+1.8 +1.3	+0.4 -33.8	+34.4	+0.0	46.6	93.0 927.6	-46.4	Horiz 151
41	6403.115M	37.0	+0.0 +5.6	+2.1 +1.0	+0.5 -34.3	+34.7	+0.0	46.6	93.0 914.8	-46.4	Horiz 146
42	1843.825M	46.9	+0.0 +2.3	+0.7 +0.4	+0.4 -35.0	+27.7	+0.0	43.4	93.0 922.0	-49.6	Horiz 151
43	1855.510M	46.3	+0.0 +2.3	+0.7 +0.4	+0.4 -35.0	+27.8	+0.0	42.9	93.0 927.6	-50.1	Horiz 151
44	7216.830M Ave	27.3	+0.0 +5.2	+1.8 +1.4	+0.5 -35.0	+36.8	+0.0	38.0	93.0 902.4	-55.0	Horiz 151
^	7216.830M	38.4	+0.0 +5.2	+1.8 +1.4	+0.5 -35.0	+36.8	+0.0	49.1	93.0 902.4	-43.9	Horiz 156
46	9277.720M Ave	21.7	+0.0 +5.9	+2.4 +0.4	+0.6 -34.6	+37.9	+0.0	34.3	93.0 927.6	-58.7	Horiz 151
^	9277.720M	36.7	+0.0 +5.9	+2.4 +0.4	+0.6 -34.6	+37.9	+0.0	49.3	93.0 927.6	-43.7	Horiz 151

## Band Edge

### Band Edge Summary



Operating Mode: Single Channel (Low and High)					
Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
614	GFSK-2	Swivel Type Dipole	28.9	<46	Pass
902	GFSK-2	Swivel Type Dipole	64.7	<93	Pass
928	GFSK-2	Swivel Type Dipole	62.0	< 93	Pass
960	GFSK-2	Swivel Type Dipole	35.2	<54	Pass

### Band Edge Summary



Operating Mode: Hopping					
Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
614	GFSK-2	Swivel Type Dipole	30.2	<46	Pass
902	GFSK-2	Swivel Type Dipole	61.9	<93	Pass
928	GFSK-2	Swivel Type Dipole	64.3	< 93	Pass
960	GFSK-2	Swivel Type Dipole	36.7	<54	Pass

## Band Edge Plots



### Single Channel

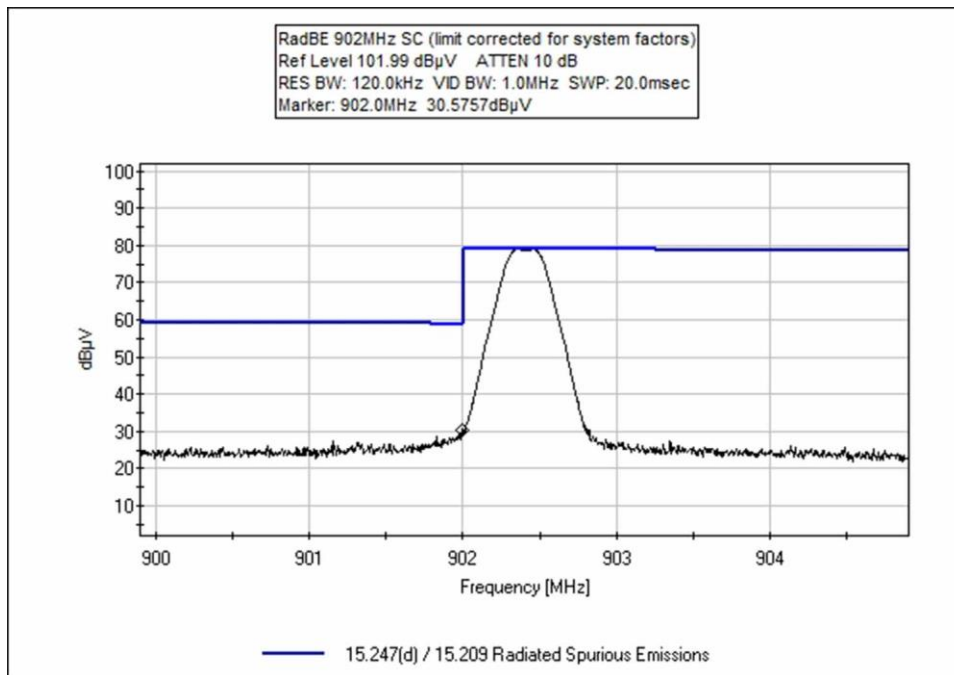
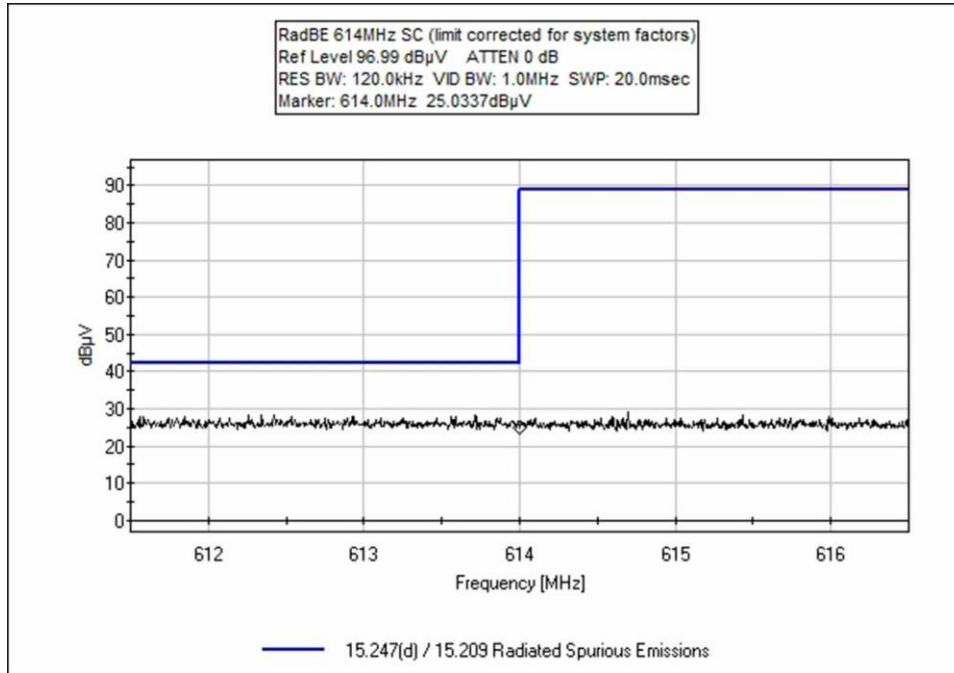




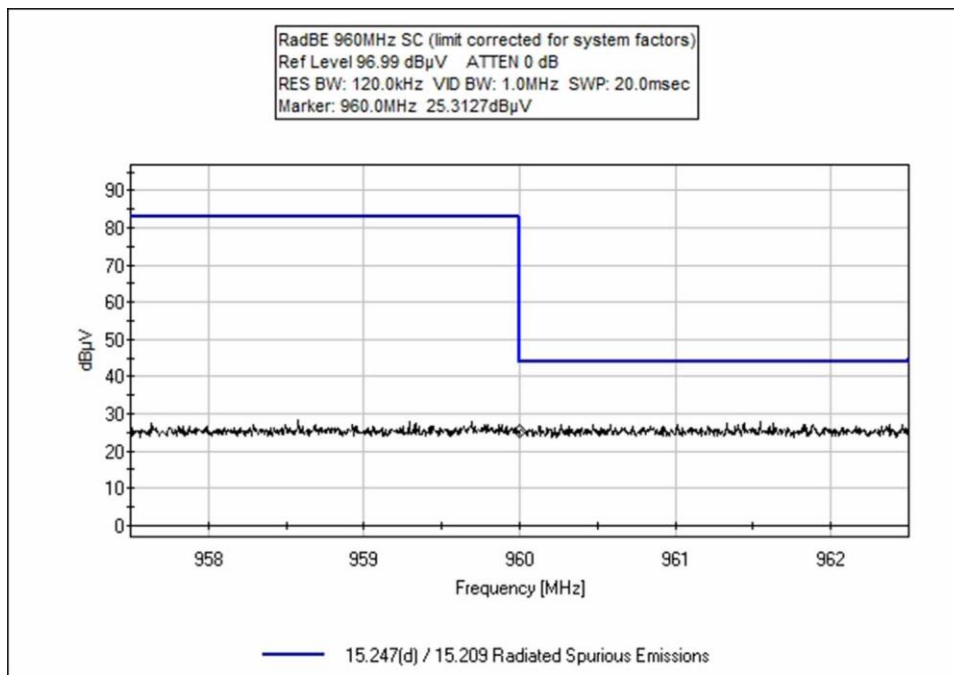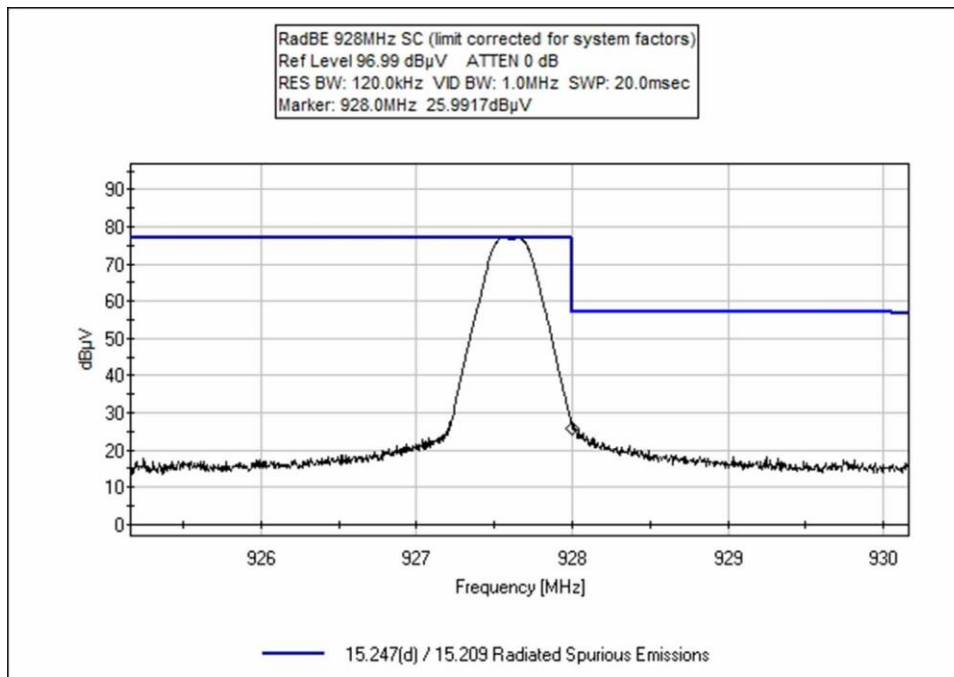

### Hopping

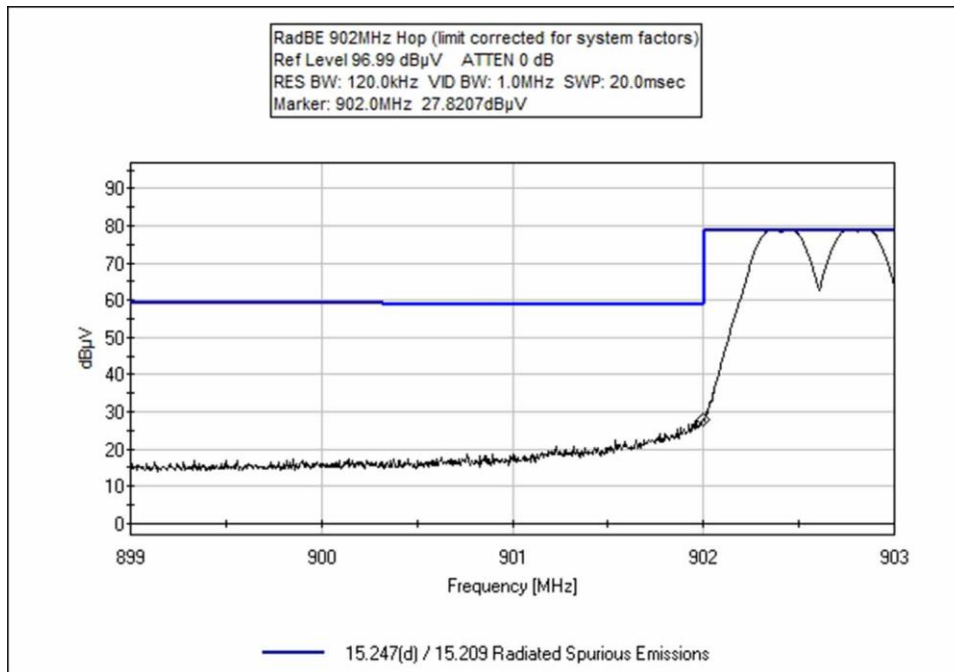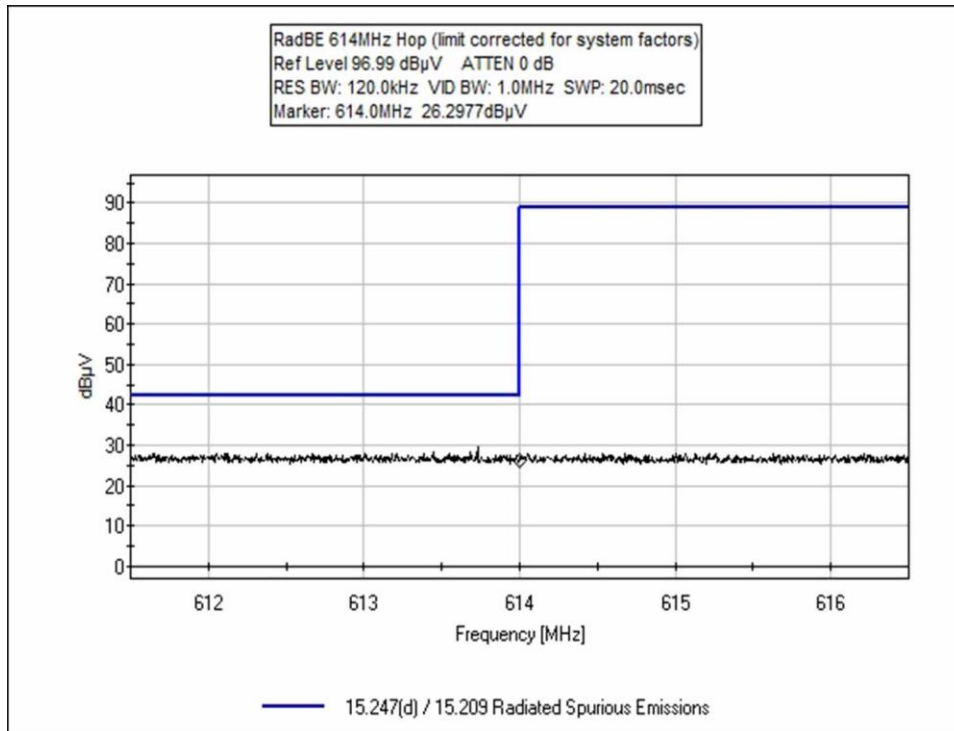

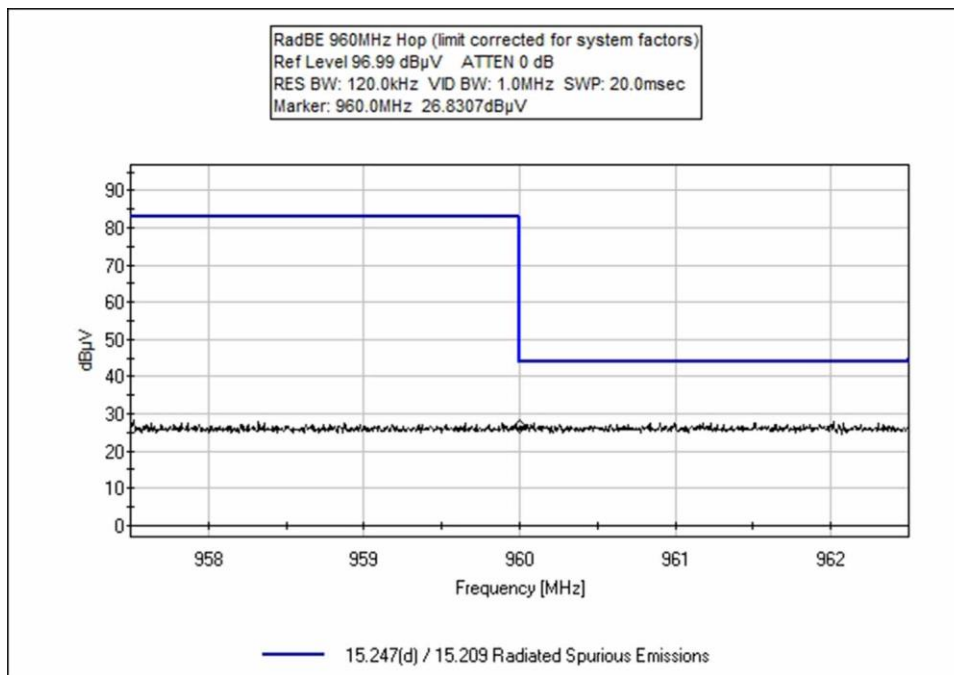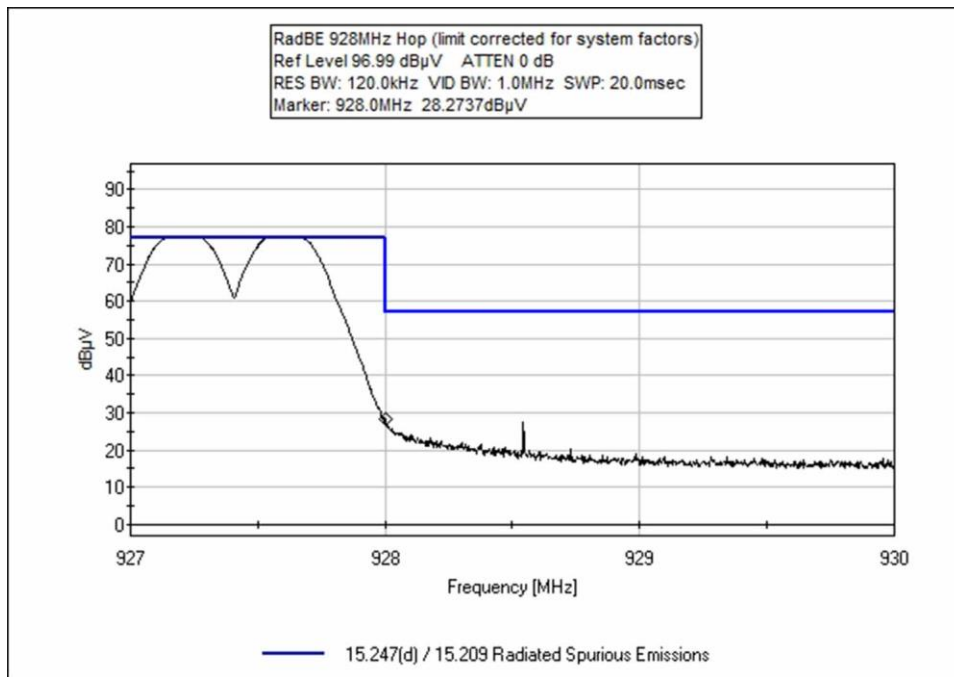

**Test Setup / Conditions / Data**

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)  
 Customer: **Nalloy, LLC**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **108788** Date: 10/16/2023  
 Test Type: **Maximized Emissions** Time: 16:08:28  
 Tested By: Michael Atkinson Sequence#: 1  
 Software: EMITest 5.03.20

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Test Conditions / Notes:**

Test Environment Conditions:  
 Temperature: 22°C  
 Humidity: 56%  
 Pressure: 100.9kPa  
  
 Test Method: ANSI C63.10 (2013)  
  
 Frequency Range: Band Edge  
  
 Test Setup:  
 Halcyon  
 Low Channel (0) 902.4 MHz, High (63) 927.6MHz  
 GFSK-2  
 100% Duty Cycle  
  
 PWR Level Setting: 140  
 PWR Output: 14dBm  
  
**Single channel mode**  
  
 X, Y, Z EUT orientations investigated, each with straight and bent antenna orientations investigated, worst case reported. Horizontal and Vertical antenna polarities investigated, worst case reported.

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	3/2/2023	3/2/2025
T1	ANP05546	Cable	Heliac	8/1/2023	8/1/2025
T2	ANP05333	Cable	Heliac	8/8/2023	8/8/2025
T3	ANP05360	Cable	RG214	8/8/2023	8/8/2025
T4	AN03824	Biconilog Antenna	3142E	5/9/2023	5/9/2025
T5	AN02307	Preamp	8447D	8/9/2023	8/9/2025
T6	ANP08072	Band Reject Filter	BRC50722	10/3/2023	10/3/2025

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB $\mu$ V	T5 dB	T6 dB	dB	dB	Table	dB $\mu$ V/m	dB $\mu$ V/m	dB	Ant
1	614.000M	25.0	+0.5 -27.9	+1.2 +0.4	+2.3	+27.4	+0.0	28.9	46.0	-17.1	Vert
2	960.000M	25.3	+0.7 -26.9	+1.6 +0.8	+2.6	+31.1	+0.0	35.2	54.0	-18.8	Vert
3	902.000M	30.6	+0.6 +0.0	+1.5 +0.0	+2.5	+29.5	+0.0	64.7	93.0	-28.3	Vert
4	928.000M	26.0	+0.7 +0.0	+1.5 +0.0	+2.6	+31.2	+0.0	62.0	93.0	-31.0	Vert

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)  
 Customer: **Nalloy, LLC**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **108788** Date: 10/17/2023  
 Test Type: **Maximized Emissions** Time: 10:25:33  
 Tested By: Michael Atkinson Sequence#: 1  
 Software: EMITest 5.03.20

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Test Environment Conditions:  
 Temperature: 22°C  
 Humidity: 56%  
 Pressure: 100.9kPa

Test Method: ANSI C63.10 (2013)

Frequency Range: Band Edge

Test Setup:  
 Halcyon  
 Low Channel (0) 902.4 MHz, High (63) 927.6MHz  
 GFSK-2  
 100% Duty Cycle

PWR Level Setting: 140  
 PWR Output: 14dBm

**Hopping Mode**

X, Y, Z EUT orientations investigated, each with straight and bent antenna orientations investigated, worst case reported. Horizontal and Vertical antenna polarities investigated, worst case reported.

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	3/2/2023	3/2/2025
T1	ANP05546	Cable	Heliac	8/1/2023	8/1/2025
T2	ANP05333	Cable	Heliac	8/8/2023	8/8/2025
T3	ANP05360	Cable	RG214	8/8/2023	8/8/2025
T4	AN03824	Biconilog Antenna	3142E	5/9/2023	5/9/2025
T5	AN02307	Preamp	8447D	8/9/2023	8/9/2025
T6	ANP08072	Band Reject Filter	BRC50722	10/3/2023	10/3/2025

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB $\mu$ V	T5	T6			Table	dB $\mu$ V/m	dB $\mu$ V/m	dB	Ant
1	614.000M	26.3	+0.5 -27.9	+1.2 +0.4	+2.3	+27.4	+0.0	30.2	46.0	-15.8	Vert
2	960.000M	26.8	+0.7 -26.9	+1.6 +0.8	+2.6	+31.1	+0.0	36.7	54.0	-17.3	Vert
3	928.000M	28.3	+0.7 +0.0	+1.5 +0.0	+2.6	+31.2	+0.0	64.3	93.0	-28.7	Vert
4	902.000M	27.8	+0.6 +0.0	+1.5 +0.0	+2.5	+29.5	+0.0	61.9	93.0	-31.1	Vert

## 15.207 AC Conducted Emissions

### Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)  
 Customer: **Nalloy, LLC**  
 Specification: **15.207 AC Mains - Average**  
 Work Order #: **108788** Date: 10/19/2023  
 Test Type: **Conducted Emissions** Time: 14:54:43  
 Tested By: Michael Atkinson Sequence#: 17  
 Software: EMITest 5.03.20 120V 60Hz

#### Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			

#### Support Equipment:


Device	Manufacturer	Model #	S/N
Configuration 2			

#### Test Conditions / Notes:

Test Environment Conditions:  
 Temperature: 22°C  
 Humidity: 50%  
 Pressure: 101.6kPa  
  
 Test Method: ANSI C63.10 (2013)  
  
 Frequency Range: 0.15-30MHz  
  
 Test Setup:  
 Powered by host device via USB, the host device is powered by a PoE injector connected to AC mains. Tx on low, mid, high channels investigated, worst case reported.



Nalloy, LLC WO#: 108788 Sequence#: 17 Date: 10/19/2023  
 15.207 AC Mains - Average Test Lead: 120V 60Hz Line

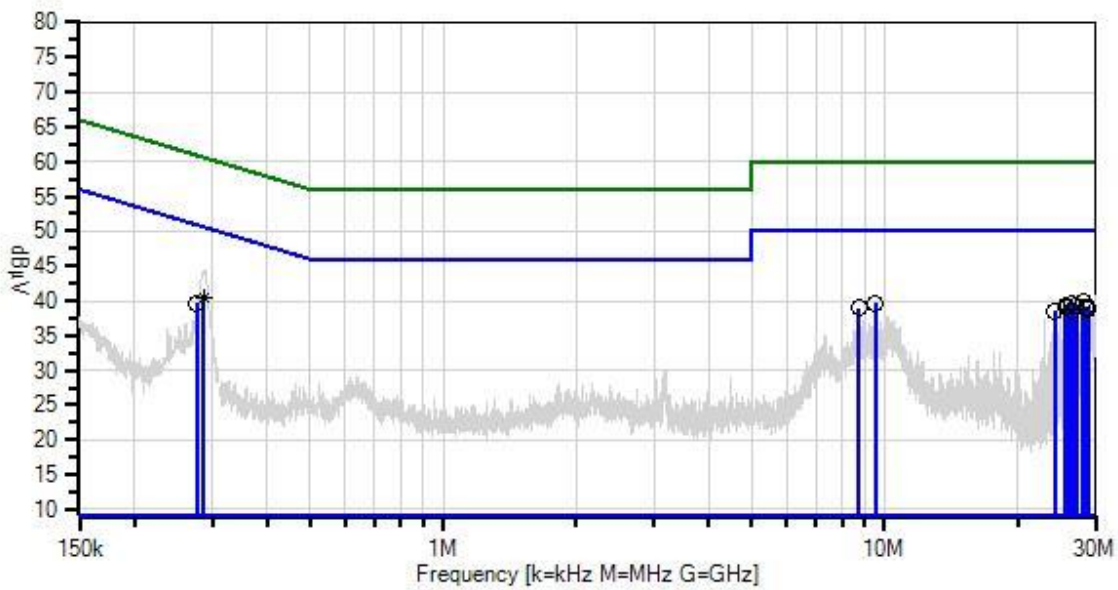

— Sweep Data  
 × QP Readings  
 Software Version: 5.03.20

— Readings  
 \* Average Readings  
 — 1 - 15.207 AC Mains - Average

○ Peak Readings  
 ▼ Ambient  
 — 2 - 15.207 AC Mains - Quasi-peak

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	3/2/2023	3/2/2025
T1	AN02611	High Pass Filter	HE9615-150K-50-720B	1/5/2022	1/5/2024
T2	ANP05546	Cable	Heliacx	8/1/2023	8/1/2025
T3	ANP06515	Cable	Heliacx	3/1/2023	3/1/2025
T4	ANP06219	Attenuator	768-10	3/23/2022	3/23/2024
T5	AN01311	50uH LISN-Line1 (L)	3816/2	2/23/2022	2/23/2024
	AN01311	50uH LISN-Line2 (N)	3816/2	2/23/2022	2/23/2024

**Measurement Data:**

Reading listed by margin.

Test Lead: Line

#	Freq MHz	Rdng dB $\mu$ V	T1 T5 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V	Spec dB $\mu$ V	Margin dB	Polar Ant
1	28.189M	30.3	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	39.9	50.0	-10.1	Line
2	286.989k Ave	31.2	+0.0 +0.1	+0.0	+0.0	+9.1	+0.0	40.4	50.6	-10.2	Line
^	289.509k	35.2	+0.0 +0.1	+0.0	+0.0	+9.1	+0.0	44.4	50.5	-6.1	Line
4	26.607M	30.1	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	39.7	50.0	-10.3	Line
5	9.533M	30.1	+0.0 +0.2	+0.1	+0.1	+9.1	+0.0	39.6	50.0	-10.4	Line
6	26.490M	29.9	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	39.5	50.0	-10.5	Line
7	27.160M	29.7	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	39.3	50.0	-10.7	Line
8	25.697M	29.6	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	39.2	50.0	-10.8	Line
9	28.535M	29.5	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	39.1	50.0	-10.9	Line
10	25.877M	29.5	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	39.1	50.0	-10.9	Line
11	28.738M	29.3	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	38.9	50.0	-11.1	Line
12	8.755M	29.4	+0.0 +0.2	+0.1	+0.1	+9.1	+0.0	38.9	50.0	-11.1	Line
13	28.944M	29.2	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	38.8	50.0	-11.2	Line
14	277.404k	30.5	+0.0 +0.1	+0.0	+0.0	+9.1	+0.0	39.7	50.9	-11.2	Line
15	24.346M	29.0	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	38.6	50.0	-11.4	Line
16	26.544M	28.9	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	38.5	50.0	-11.5	Line

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)  
 Customer: **Nalloy, LLC**  
 Specification: **15.207 AC Mains - Average**  
 Work Order #: **108788** Date: 10/19/2023  
 Test Type: **Conducted Emissions** Time: 14:57:30  
 Tested By: Michael Atkinson Sequence#: 18  
 Software: EMITest 5.03.20 120V 60Hz

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 2			


***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 2			

***Test Conditions / Notes:***

Test Environment Conditions:  
 Temperature: 22°C  
 Humidity: 50%  
 Pressure: 101.6kPa  
  
 Test Method: ANSI C63.10 (2013)  
  
 Frequency Range: 0.15-30MHz  
  
 Test Setup:  
 Powered by host device via USB, the host device is powered by a PoE injector connected to AC mains. Tx on low, mid, high channels investigated, worst case reported.

Nalloy, LLC WO#: 108788 Sequence#: 18 Date: 10/19/2023  
 15.207 AC Mains - Average Test Lead: 120V 60Hz Neutral

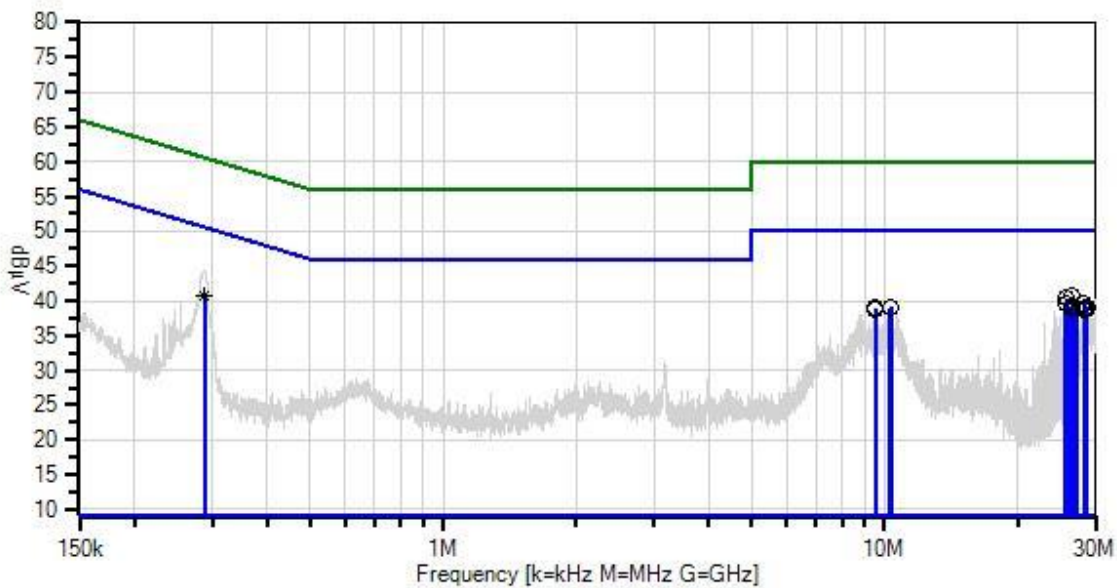

— Sweep Data  
 × QP Readings  
 Software Version: 5.03.20

— Readings  
 \* Average Readings  
 — 1 - 15.207 AC Mains - Average

○ Peak Readings  
 ▼ Ambient  
 — 2 - 15.207 AC Mains - Quasi-peak

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	3/2/2023	3/2/2025
T1	AN02611	High Pass Filter	HE9615-150K-50-720B	1/5/2022	1/5/2024
T2	ANP05546	Cable	Heliacx	8/1/2023	8/1/2025
T3	ANP06515	Cable	Heliacx	3/1/2023	3/1/2025
T4	ANP06219	Attenuator	768-10	3/23/2022	3/23/2024
	AN01311	50uH LISN-Line1 (L)	3816/2	2/23/2022	2/23/2024
T5	AN01311	50uH LISN-Line2 (N)	3816/2	2/23/2022	2/23/2024

**Measurement Data:** Reading listed by margin. Test Lead: Neutral

#	Freq MHz	Rdng dB $\mu$ V	T1 T5 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V	Spec dB $\mu$ V	Margin dB	Polar Ant
1	26.607M	31.0	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	40.6	50.0	-9.4	Neutr
2	25.877M	30.8	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	40.4	50.0	-9.6	Neutr
3	288.500k Ave	31.5	+0.0 +0.1	+0.0	+0.0	+9.1	+0.0	40.7	50.6	-9.9	Neutr
^	288.619k	35.4	+0.0 +0.1	+0.0	+0.0	+9.1	+0.0	44.6	50.6	-6.0	Neutr
5	28.325M	30.1	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	39.7	50.0	-10.3	Neutr
6	25.688M	30.0	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	39.6	50.0	-10.4	Neutr
7	27.156M	29.5	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	39.1	50.0	-10.9	Neutr
8	28.628M	29.5	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	39.1	50.0	-10.9	Neutr
9	10.329M	29.7	+0.0 +0.1	+0.1	+0.1	+9.1	+0.0	39.1	50.0	-10.9	Neutr
10	26.490M	29.5	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	39.1	50.0	-10.9	Neutr
11	9.529M	29.6	+0.0 +0.1	+0.1	+0.1	+9.1	+0.0	39.0	50.0	-11.0	Neutr
12	10.273M	29.6	+0.0 +0.1	+0.1	+0.1	+9.1	+0.0	39.0	50.0	-11.0	Neutr
13	28.681M	29.3	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	38.9	50.0	-11.1	Neutr
14	28.408M	29.2	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	38.8	50.0	-11.2	Neutr
15	28.229M	29.2	+0.1 +0.0	+0.1	+0.3	+9.1	+0.0	38.8	50.0	-11.2	Neutr
16	9.550M	29.3	+0.0 +0.1	+0.1	+0.1	+9.1	+0.0	38.7	50.0	-11.3	Neutr

# SUPPLEMENTAL INFORMATION

## Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Uncertainties reported are worst case for all CKC Laboratories’ sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

## Emissions Test Details

**TESTING PARAMETERS**

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

**CORRECTION FACTORS**

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dBµV/m, the spectrum analyzer reading in dBµV was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS		
	Meter reading	(dBµV)
+	Antenna Factor	(dB/m)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	(dBµV/m)

**TEST INSTRUMENTATION AND ANALYZER SETTINGS**

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

**SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS**

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

**Peak**

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

**Quasi-Peak**

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

**Average**

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.