



In order to improve the GPS reception  
Two ferrite bead capacitor filters has been added to the  
output off he CPU clock and MOSI line.  
In order to improve the spurious emission a via has been  
moved a litte farer from the TX line-

Date of modification: 2020-04-24

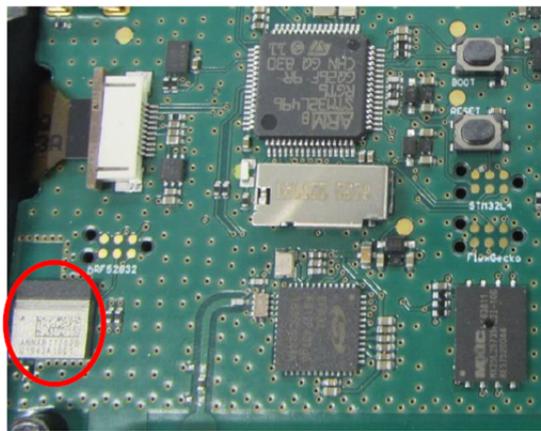

The bluetooth reference design has been adapted to the  
newest release.

Date of modification: 2020-04-24

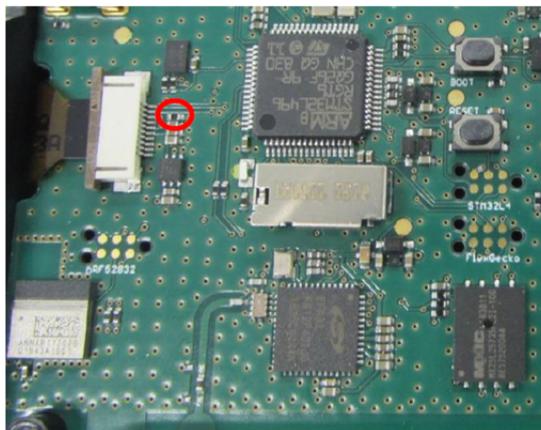

Pull Up resistor for LCD Display added. Connected  
Display\_Enable with MCU.

Date of modification: 2020-04-24