


Prüfbericht-Nr.: Test report no.:	CN224AD0 003	Auftrags-Nr.: Order no.:	168367617	Seite 1 von 21 Page 1 of 21	
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2022-04-20		
Auftraggeber: Client:	Vestel Elektronik Sanayi ve Ticaret A.S. Organize Sanayi Bolgesi, 45030 Manisa TURKEY				
Prüfgegenstand: Test item:	17WFM26 WI-FI + BT combo module				
Bezeichnung / Typ-Nr.: Identification / Type no.:	V1.0				
Auftrags-Inhalt: Order content:	Test Report				
Prüfgrundlage: Test specification:	CFR47 FCC Part15: Subpart E Section 15.407 RSS-247 Issue 2 February 2017				
Wareneingangsdatum: Date of sample receipt:	2022-04-20	Please refer to Photo Document			
Prüfmuster-Nr.: Test sample no:	A003240432-001~008 A003234567-001				
Prüfzeitraum: Testing period:	2022-04-21 - 2022-05-24				
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüfergebnis*: Test result*:	Pass				
geprüft von: tested by:			genehmigt von: authorized by:		
Datum: Date:	2022-07-04 Signed by: Bell Hu		Ausstellungsdatum: Issue date:	2022-07-04 Signed by: Lin Lin	
Stellung / Position:	Project Manager		Stellung / Position:	Reviewer	
Sonstiges / Other:	FCC ID: 2AVQS-17WFM26, IC: 25888-17WFM26, HVIN: V1.0, PMN: 17WFM26 WI-FI + BT combo module This report is for 5GHz Wi-Fi.				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged				
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend 3 = satisfactory	4 = ausreichend 4 = sufficient	5 = mangelhaft 5 = poor
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory 3 = satisfactory	4 = sufficient N/A = not applicable	5 = poor N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.					

V05

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 FREQUENCY STABILITY

RESULT: N/A

5.1.5 26dB BANDWIDTH AND 99% BANDWIDTH

RESULT: Pass

5.1.6 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.7 DYNAMIC FREQUENCY SELECTION (DFS)

RESULT: Pass

5.1.8 AC CONDUCTED EMISSION

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	8
3.5	SUBMITTED DOCUMENTS.....	8
4	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION	9
4.2	TEST OPERATION AND TEST SOFTWARE.....	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	<i>13</i>
5.1.2	<i>Maximum Conducted Output Power</i>	<i>14</i>
5.1.3	<i>Conducted Power Spectral Density</i>	<i>15</i>
5.1.4	<i>Frequency Stability.....</i>	<i>16</i>
5.1.5	<i>26dB Bandwidth and 99% Bandwidth</i>	<i>17</i>
5.1.6	<i>Radiated Spurious Emission</i>	<i>18</i>
5.1.7	<i>Dynamic Frequency Selection (DFS)</i>	<i>19</i>
5.1.8	<i>AC Conducted Emission</i>	<i>20</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	21
7	LIST OF TABLES.....	21

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of 5GHz Wi-Fi

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Accreditation Designation No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Signal Analyzer	R&S	FSV 40	101441	09.08.2022
OSP	R&S	OSP 150	101017	02.12.2022
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	02.12.2022
Wideband Power Sensor	R&S	NRP-Z81	105677	09.08.2022
Shielding Room 8#	Albatross	SR8	APC17151-SR8	22.06.2024
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	10.08.2022
Signal Analyzer	R&S	FSV 40	101439	09.08.2022
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	09.08.2022
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	09.08.2022
Amplifier	R&S	SCU-18F	180070	09.08.2022
Amplifier	R&S	SCU40A	100475	09.08.2022
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	08.08.2022
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	08.08.2022
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	08.08.2022
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	13.09.2022
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	22.06.2024

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. File for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The Product is WI-FI + BT combo module, which supports Bluetooth, 2.4GHz Wi-Fi 802.11 b/g/n and 5GHz Wi-Fi 802.11a/b/g/n/ac wireless technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	17WFM26 WI-FI + BT combo module
Type Designation:	V1.0
FCC ID:	2AVQS-17WFM26
IC:	25888-17WFM26
Operating Voltage:	DC 5V
Antenna Type:	Integral Antennas
Antenna Gain:	Wi-Fi Antenna 1#: Max gain 3.4dBi for 2.4GHz Wi-Fi Max gain 3.69dBi for 5GHz Wi-Fi Wi-Fi Antenna 2#: Max gain 2.14dBi for 2.4GHz Wi-Fi Max gain 3.68dBi for 5GHz Wi-Fi BT Antenna 3#: Max gain 0.29dBi for Bluetooth As for MIMO mode for Antenna 1# and Antenna 2#, Cyclic Delay Diversity mode Employed.
Technical Specification of Bluetooth	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number:	79 channels, BDR & EDR 40 channels, BLE
Channel Separation:	1MHz (for EDR & BDR), 2MHz (for BLE)
Technical Specification of Wi-Fi 802.11 b/g/n	
Operating Frequency:	2412 - 2462 MHz for 802.11b/g/n(HT20) 2422 - 2452 MHz for 802.11n(HT40)
Type of Modulation:	DSSS(DBPSK/DQPSK/CCK) OFDM(BPSK/QPSK/16QAM/64QAM)
Data Rate:	1/2/5.5/11 Mbps for 802.11b 6/9/12/18/24/36/48/54 Mbps for 802.11g MCS0 ~ MCS7 for 802.11n
Channel Number:	11 channels for 802.11b/g/n(HT20) 7 channels for 802.11n(HT40)

Channel Separation:	5 MHz
MIMO and SISO mode:	SISO for 802.11b/g, MIMO and SISO for 802.11n.
Technical Specification of Wi-Fi 802.11 a/n/ac	
Operating Frequency:	5180-5320MHz, 5500-5700MHz
Type of Modulation:	OFDM(BPSK/QPSK/16QAM/64QAM/256QAM)
Channels:	5180-5320MHz, 802.11 a/n20/n40/ac20/ac40/ac80 5500-5700MHz, 802.11 a/n20/n40/ac20/ac40/ac80
Channel Separation	5 MHz
MIMO and SISO mode:	SISO for 802.11a, MIMO and SISO for 802.11n/ac.
DFS:	Client device without DFS detection

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi 802.11 a/n/ac wireless transmitting mode
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. On, Wi-Fi 802.11 a/n/ac connecting mode
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- User Manual
- Block Diagram
- Operation Description

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model 17WFM26 in this report.

Table 3: Test environments

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	24.6°C	5.0Vdc	Ambient

Table 4: Test channel and frequency

Mode	Test Channels
802.11 a/n-HT20/ac20	L: 5180MHz; 5260MHz; 5500MHz M: MHz; 5200MHz;5280MHz; 5580MHz H: 5240MHz;5320MHz; 5700MHz
802.11 n-HT40/ac40	L/M: 5190MHz; 5270MHz; 5510MHz; 5550MHz H: 5230MHz; 5310MHz; 5670MHz
802.11 ac80	L/M/H: 5210MHz; 5290MHz; 5530MHz; 5610MHz

Note: The band **5600-5650MHz** not for IC.

4.3 Special Accessories and Auxiliary Equipment

Table 5: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A
Test jig	Vestel Elektronik Sanayi ve Ticaret A.S.	17WFM26	N/A	DC 5V

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

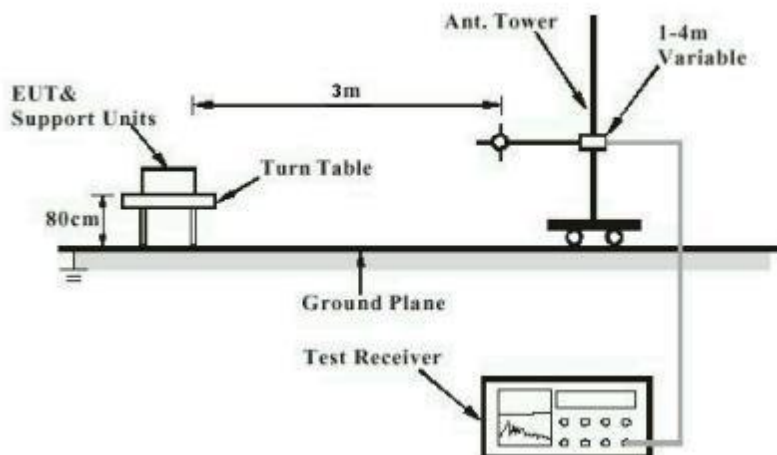


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

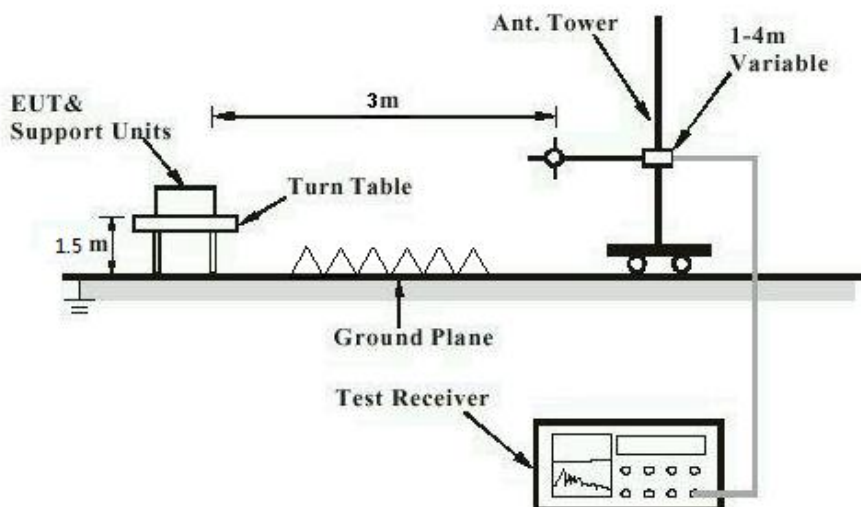


Diagram of Measurement Configuration for Conducted Transmitter Measurement


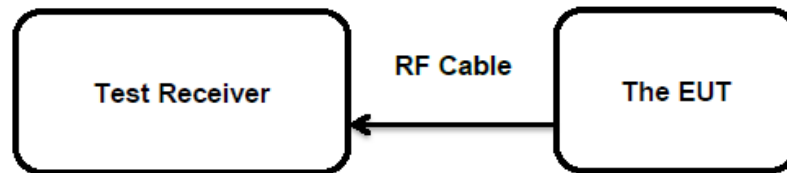


Diagram of Measurement Configuration for Dynamic Frequency Selection (DFS)

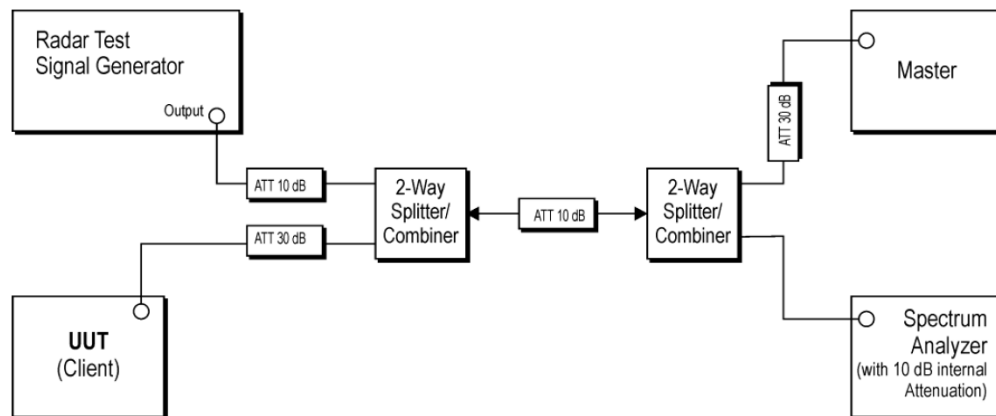

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has integral antennas with a unique connector, which is designed with permanent attachment and no consideration of replacement. The maximum antenna gain is 3.69 dBi.

Therefore, the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Conducted Output Power

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.407(a)(1)&(2)&(4) RSS-247 clause 6.2
Basic standard	: ANSI C63.10: 2013
Limits	: FCC: Conducted output power 250mW (24dBm) (5150-5250MHz) Conducted output power 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz, where is lesser.(5250-5350MHz, 5470-5725MHz) IC: *e.i.r.p.200 mW (23dBm) or 10 dBm + 10 logB, where B is the 99% emission bandwidth in MHz, where is lesser. (5150-5250MHz) * Conducted output power 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz, where is lesser. The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log10B, dBm, whichever is less. (5250-5350MHz, 5470-5600MHz and 5650-5725MHz)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-04-27 ~ 2022-04-28
Input voltage	: DC 5.0V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.6 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: **CN224AD0 003**
Test Report No.:Seite 15 von 21
Page 15 of 21

5.1.3 Conducted Power Spectral Density

RESULT:**Pass****Test Specification**

Test standard	: FCC part 15.407(a) RSS-247 clause 6.2
Basic standard	: ANSI C63.10: 2013 KDB 789033 D02 v01r03
Limits	: FCC: The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.(5150-5250MHz,5250-5350MHz, 5470-5725MHz) IC: The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band. (5150-5250MHz) The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. (5250-5350MHz, 5470-5600MHz and 5650-5725MHz)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-04-27 ~ 2022-04-28
Input voltage	: DC 5.0V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.6 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN224AD0 003
Test Report No.:

Seite 16 von 21
Page 16 of 21

5.1.4 Frequency Stability

RESULT:

N/A

Test Specification

Test standard	: FCC Part 15.407(g) RSS-Gen Clause 6.11
Basic standard	: ANSI C63.10: 2013
Limits	: Within assigned bands
Kind of test site	: Shielded Room

As declared, the device will be maintained within assigned bands under all conditions of normal operation as specified

Prüfbericht - Nr.: CN224AD0 003
Test Report No.:Seite 17 von 21
Page 17 of 21**5.1.5 26dB Bandwidth and 99% Bandwidth****RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.407(e)
	:	RSS-Gen Clause 6.6
Basic standard	:	ANSI C63.10: 2013
Limits	:	N/A
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2022-04-27
Input voltage	:	DC 5.0V
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.6 °C
Relative humidity	:	55 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

5.1.6 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.407(b) & FCC Part 15.205 & FCC Part 15.209 RSS-247 clause 6.2 & RSS-GEN clause 8.9 and 8.10
Basic standard	: ANSI C63.10: 2013 KDB 789033 D02 v01r03
Limits	: • For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. • For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. • For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. • For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Restricted Bands meet the requirement of 15.209 limit and RSS-GEN
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2022-04-25 ~ 2022-04-30
Input voltage	: DC 5.0V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.
As for Co-location with Bluetooth, it verified that there was no additional emission found and no need to report it.

For the measurement records, refer to the appendix B.

5.1.7 Dynamic Frequency Selection (DFS)

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.407(h) RSS-247 clause 6.3
Basic standard	: ANSI C63.10: 2013
Limits	: 5250-5350MHz, 5470-5725MHz Channel Move Time: Within 10 seconds. Channel Closing Transmission Time: 200ms+aggregate of 60ms over remaining 10s period; Non-Occupancy Period: at least 30 minutes.
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-05-23
Input voltage	: DC 5.0V
Operation mode	: B
Test channel	: CH 58, CH 106
Ambient temperature	: 24.6 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

5.1.8 AC Conducted Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a) RSS-GEN clause 8.8
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-05-21
Input voltage	: 120V AC/60Hz Via PC
Operation mode	: B
Earthing	: Not connected
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT	7
Table 3: Test environments	9
Table 4: Test channel and frequency.....	9
Table 5: List of Accessories and Auxiliary Equipment.....	10

Table of Contents

1.	26dB BANDWIDTH AND 99% BANDWIDTH	2
1.1	TEST DATAS	2
1.2	TEST GRAPHS (26dB BANDWIDTH)	4
1.3	TEST GRAPHS (OCCUPIED CHANNEL BANDWIDTH)	21
2.	MAXIMUM OUTPUT POWER	36
2.1	TEST DATA	36
3.	POWER SPECTRAL DENSITY	38
3.1	TEST DATAS	38
4.	TRANSMITTER SPURIOUS EMISSIONS	41
4.1	TRANSMITTER SPURIOUS EMISSIONS, BELOW 1GHz	41
4.2	TRANSMITTER SPURIOUS EMISSIONS, ABOVE 1GHz	47
5.	BANEDGE	95
5.1	U-NII-1:	95
5.2	U-NII-2A:	101
5.3	U-NII-2C:	109
6.	DYNAMIC FREQUENCY SELECTION (DFS)	123
7.	TEST RESULTS OF AC CONDUCTED EMISSIONS	143

1. 26dB Bandwidth and 99% Bandwidth

1.1 Test Datas

Channel (mode)	Channel Frequency (MHz)	Emission Bandwidth	
		26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	5180	20.080	16.900
	5200	19.960	16.753
	5240	19.960	16.768
	5260	20.320	16.987
	5280	19.840	16.746
	5320	19.520	16.596
	5500	19.760	16.710
	5580	20.160	16.756
	5700	19.920	16.713

Channel (mode)	Channel Frequency (MHz)	Emission Bandwidth	
		26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11n-HT20	5180	20.240	17.726
	5200	20.160	17.765
	5240	20.000	17.737
	5260	20.240	17.788
	5280	20.040	17.778
	5320	19.880	17.678
	5500	20.040	17.699
	5580	19.800	17.734
	5700	19.640	17.656

Channel (mode)	Channel Frequency (MHz)	Emission Bandwidth	
		26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11ac20	5180	20.000	17.674
	5200	20.120	17.770
	5240	20.160	17.782
	5260	20.080	17.760
	5280	19.680	17.720
	5320	19.760	17.683
	5500	19.960	17.756
	5580	20.160	17.779
	5700	20.120	17.725

Channel (mode)	Channel Frequency (MHz)	Emission Bandwidth	
		26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11n-HT40	5190	39.920	35.953
	5230	41.040	36.221
	5270	40.160	36.274
	5310	40.080	36.164
	5510	39.520	36.011
	5550	39.120	36.109
	5670	40.080	36.291

Channel (mode)	Channel Frequency (MHz)	Emission Bandwidth	
		26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11ac40	5190	39.200	36.029
	5230	39.360	36.207
	5270	40.160	36.241
	5310	39.680	36.198
	5510	39.120	36.029
	5550	39.920	36.270
	5670	40.000	36.305

Channel (mode)	Channel Frequency (MHz)	Emission Bandwidth	
		26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11ac80	5210	79.840	75.223
	5290	79.520	75.316
	5530	79.520	75.310
	5610	79.520	75.498

Note: The two RF ports have the identical characteristics on bandwidth, both of them were tested, only the worst-case reported.

Appendix B CN224AD0 003



Prüfbericht - Produkte
Test Report - Products

Page 4 of 144

1.2 Test Graphs (26dB Bandwidth)

11A-CDD Ant1 5180



11A-CDD Ant1 5200



11A-CDD Ant1 5240




Appendix B CN224AD0 003



Prüfbericht - Produkte
Test Report - Products

Page 5 of 144

11A-CDD Ant1 5260

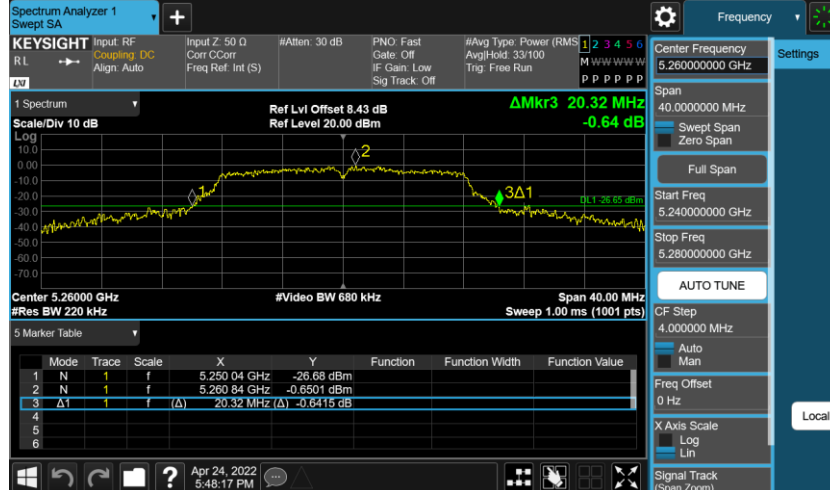

11A-CDD Ant1 5280



11A-CDD Ant1 5320



Appendix B CN224AD0 003

Prüfbericht - Produkte
Test Report - Products

Page 6 of 144

11A-CDD Ant1 5500



11A-CDD Ant1 5580



11A-CDD Ant1 5700



Appendix B CN224AD0 003



Prüfbericht - Produkte
Test Report - Products

Page 7 of 144

11N20MIMO Ant1 5180



11N20MIMO Ant1 5200



11N20MIMO Ant1 5240



Appendix B CN224AD0 003



Prüfbericht - Produkte
Test Report - Products

Page 8 of 144

11N20MIMO Ant1 5260



11N20MIMO Ant1 5280



11N20MIMO Ant1 5320



Appendix B CN224AD0 003



Prüfbericht - Produkte
Test Report - Products

Page 9 of 144

11N20MIMO Ant1 5500



11N20MIMO Ant1 5580



11N20MIMO Ant1 5700




Appendix B CN224AD0 003



Prüfbericht - Produkte
Test Report - Products

Page 10 of 144

11N40MIMO Ant1 5190

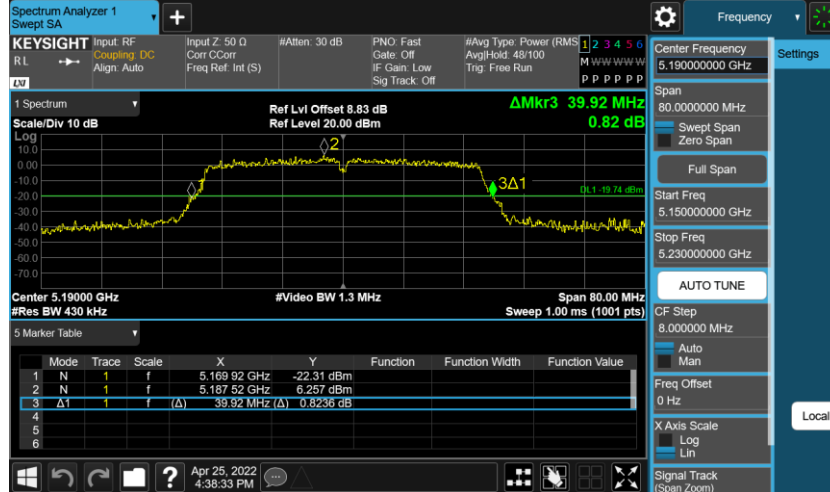

11N40MIMO Ant1 5230



11N40MIMO Ant1 5270



Appendix B CN224AD0 003



Prüfbericht - Produkte
Test Report - Products

Page 11 of 144

11N40MIMO Ant1 5310



11N40MIMO Ant1 5510



11N40MIMO Ant1 5550




Appendix B CN224AD0 003




Prüfbericht - Produkte
Test Report - Products

Page 12 of 144

11N40MIMO_Ant1_5670

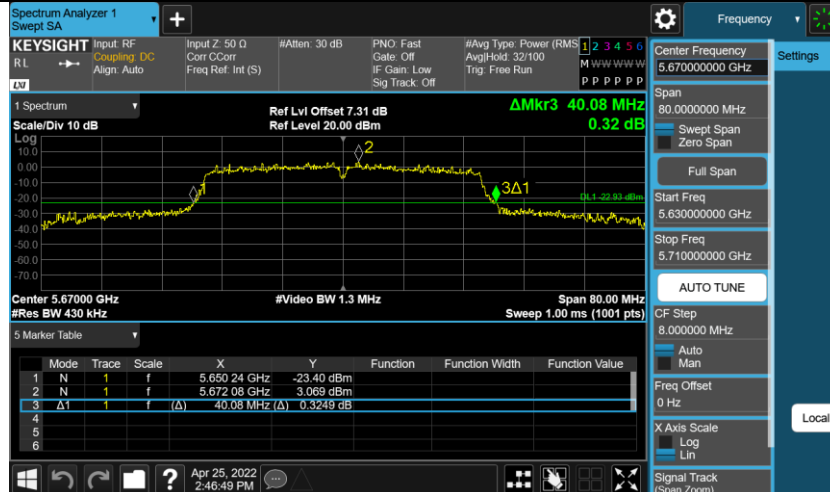

11AC20MIMO_Ant1_5180

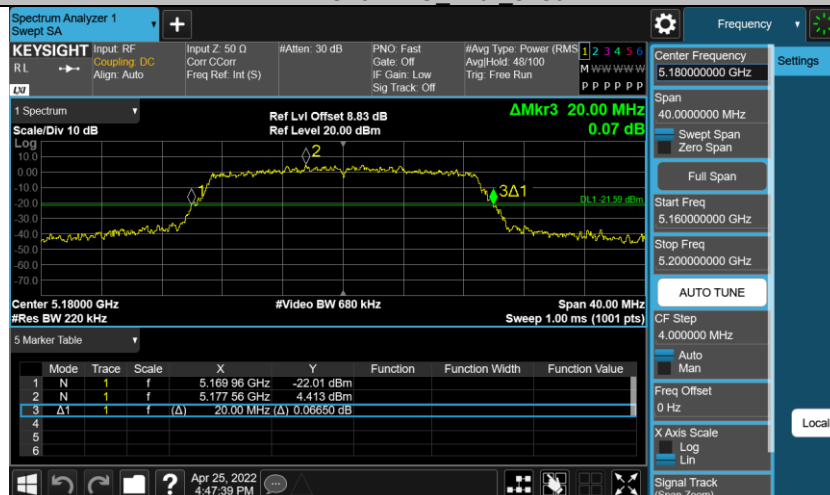

11AC20MIMO_Ant1_5200



Appendix B CN224AD0 003



Prüfbericht - Produkte
Test Report - Products

Page 13 of 144

11AC20MIMO_Ant1_5240



11AC20MIMO_Ant1_5260



11AC20MIMO_Ant1_5280



Appendix B CN224AD0 003



Prüfbericht - Produkte
Test Report - Products

Page 14 of 144

11AC20MIMO_Ant1_5320



11AC20MIMO_Ant1_5500



11AC20MIMO_Ant1_5580

