



TEST REPORT

No. AR19-0045638-03

performed in accordance with

FCC Rules: Code of Federal Regulations (CFR) no. 47
Part 15 Subpart C Section 15.249

PRODUCT	Control unit for electronic position indicator system
MODEL(s) TESTED	UC-RF ETHERNET/IP
FCC ID	2AVRQ-UC-RF
TRADE MARK(s)	

APPLICANT	ELESA S.p.A. - Via Pompei, 29 – 20900 Monza (MB)
-----------	--

Tested by	Alessandro Macri <i>[Laboratory technician]</i>	
Approved by	Roberto Colombo <i>[Laboratory manager]</i>	

Revision Sheet

Release No.	Date	Revision Description
Rev. 0	2022-07-07	First edition Digital signed – AR19-0045638-03_TR_FCC 15.249_Elesa_UC-RF

The results of tests and checks reported in this Test Report refer exclusively to the samples tested and described in the Report itself.

This Report shall not be reproduced partially the written approval of IMQ S.p.A..

The authenticity of this Test Report and its contents can be verified by contacting IMQ S.p.A., responsible for this Test Report.

1. GENERAL DATA

SAMPLE				
Samples received on	2020-01-22 2020-07-10	(Item(s) sampled and sent by applicant)		
IMQ reference samples	BEM 98546 100208			
Samples tested No.	3 (BEM 98546) 1 (BEM 100208)			
Object under analysis recognition	Not carried out	Except where stated, characteristics of products were taken from client description and were not verified by the laboratory		
Date of acceptance of test item	2020-01-22 2020-07-10			
TEST LOCATION				
Testing dates	2020-01-22 ÷ 2020-02-12, 2020-07-10			
Testing laboratory.	IMQ S.p.A. - Via Quintiliano, 43 – I-20138 Milano			
Testing site	Via Quintiliano, 43 – I-20138 Milano			
ENVIRONMENTAL CONDITIONING				
Parameter	Measured			
Ambient Temperature	21.5 ÷ 25.3 °C			
Relative Humidity	43 ÷ 49 %			
Atmospheric Pressure	991 ÷ 1002 mbar			
The laboratory is monitored by a continuous environmental conditions measurements system. Temperature, humidity and pressure data are recorded on a weekly basis and stored in local archive.				
REMARKS				
Throughout this report a point is used as the decimal separator. The ability or reliability of this product to perform its intended function in a particular application has not been investigated. IMQ declines any responsibility derived from missing or wrong information provided aside by the applicant				
The 4 samples tested differ only in the frequency used (low, middle and high channel, specially prepared for testing)				

2. REFERENCE DOCUMENT

DOCUMENT		DATE	TITLE
<input checked="" type="checkbox"/>	47 CFR Part 15	2015	Radio Frequency Device
<input checked="" type="checkbox"/>	ANSI C63.4	2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
<input checked="" type="checkbox"/>	ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3. UNIT UNDER TEST (EUT) DETAILS

GENERAL DATA

MODEL (basic)	Description
UC-RF ETHERNET/IP(*)	Control unit for electronic position indicator system
VARIANTS (derived)	Description
UC-RF MODBUS TCP	As UC-RF ETHERNET/IP with different communication port
UC-RF PROFINET IO	As UC-RF ETHERNET/IP with different communication port

Note	(*)The devices presented the same radio module and electronics, only the transmission in the communication port varies. After a preliminary analysis, only the product with the worst results was reported in the report
------	---

FCC ID	2AVRQ-UC-RF
--------	-------------


Manufacturer	ELESA S.p.A. - Via Pompei, 29 – 20900 Monza (MB)
--------------	--

Equipment classification	According to the definition 15.3 (o) EUT is a Intentional Radiator operating within the bands 2400 ÷ 2483.5 MHz so it shall fulfill provisions of 47CFR Part 15 Subpart C – Intentional radiators – and Section 15.249
--------------------------	---

Type of equipment	Control unit with 2.4 GHz module integrated
Operating frequency:	2400 ÷ 2483.5 MHz
Maximum RF radiated power:	92.53 dBuV/m
Modulation:	MSK modulation
Channel Spacing:	200 kHz
Antenna:	ANT-2.4-WRT-RPS

4. TEST CONFIGURATION OF UNIT UNDER TEST

EUT PORTS

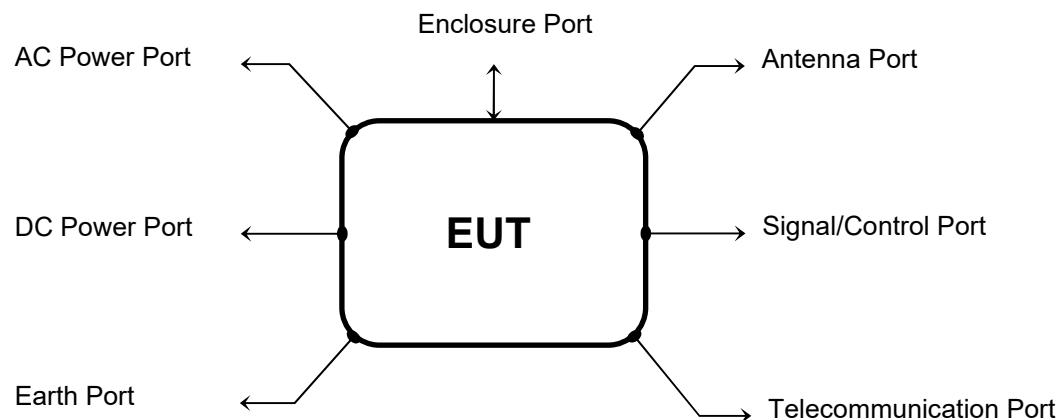

Port	Description	Max length
Enclosure	Plastic	/
AC power	/	/
DC power	24 V DC	/
Earth	Yes	/
Telecommunication	Ethernet	/
Signal	/	/
Control	/	/
Antenna	External	/

STATE OF THE EUT DURING TESTS

Ref.	Mode	Description
#1	Operating	Continuous transmission (single channel transmission) 24V DC battery supply The EUT is in continuously transmitting at the highest power with 100% approximately duty cycle.

SUPPORT EQUIPMENT

Defined as equipment needed for correct operation or loading of the EUT, but not considered as tested:

Equipment	Manufacturer	Model
/	/	/

ELECTROMAGNETICALLY RELEVANT COMPONENTS

Component	No.	Manufacturer	Model
Main board	1	ELESA	T300 v1.3
Radio module	1	TEXAS INSTRUMENTS	CC2500

RFI SUPPRESSION DEVICES

Component	No.	Manufacturer	Model
/	/	/	/

EMI PROTECTION DEVICES

Component	No.	Manufacturer	Model
/	/	/	/

EUT TECHNICAL DOCUMENTATION

Document	Reference
/	/

5. METHODS OF MEASUREMENT

All compliance measurements have been carried out using the procedures described in the standard ANSI C63.4-2014 (excluding sub-par. 4.1.5.2, 5.7 9 and 14) and Section 15.31 of CFR47 Part 15 – Subpart A (General).

Additional test requirements have been adopted according to the reference Section indicated in the Test Table.

FREQUENCY RANGE INVESTIGATED

Radiated emission tests: from 9 kHz to tenth harmonic of fundamental.

6. SUMMARY OF TEST RESULTS

POSSIBLE TEST CASE VERDICTS:	
Test object meets the requirement	PASS
Test object does not meet the requirement	FAIL
Test case does not apply to the test object	N.A.
Test not performed	N.P.

CFR47 Part 15	TITLE	RESULT
§ 15.203	Antenna Requirements	PASS
§ 15.205 (a)	Restricted band of operation	PASS
§ 15.205 (b) § 15.215 (b) § 15.249 (d)	Radiated Emission 9kHz to 30MHz 30MHz to 10GHz	PASS
§ 15.207 (a)	Conducted emission	PASS
§ 15.215 (c)	Bandwidth of emission (20dB Bandwidth)	PASS
§ 15.249(a)	Field strength of fundamental	PASS
§ 15.249 (a)	Radiated emission measurement of harmonics	PASS
§ 1.1307(b)(1)	RF exposure evaluation	PASS

7. TEST RESULTS

7.1 ANTENNA REQUIREMENTS

TEST REQUIREMENT

According to CFR 47 Part 15, section 15.203 / 15.204.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Testing dates	2020-07-10
Sample tested	BEM 100208

Antenna specifications

N° of authorized antenna types	1
Antenna type	RP-SMA
Maximum total gain	+3.5 dBi (rated)
External power amplifiers	Not present

TEST RESULT


The EUT meets the requirements of sections 15.203 and 15.204.

7.2 RESTRICTED BAND OF OPERATION


TEST REQUIREMENT	
Test setup	ANSI C63.4
Test facility	Semi-anechoic chamber
Test distance	3 m
Frequency range	2400 ÷ 2483.5 MHz
RBW bandwidth	1 MHz
VBW bandwidth	3 MHz
Detector	Peak
EUT operating condition	#1
Testing dates	2020-07-10
Sample(s) tested	BEM 100208

LIMITS		
Band of operations	Peak (dB μ V/m)	Average Limit (dB μ V/m)
Restricted bands (§ 15.205)	74	54


TEST PROCEDURE	
1) The EUT was placed on turntable which is 0.8 m above the ground plane	
2) The turntable shall rotate from 0° to 360° degrees to determine the position of maximum emission level.	
3) The EUT is positioned 3 m away from the receiving antenna which varied from 1 to 4 m to find the highest emission.	
4) The measurements were made with EUT set to operate at 100% of duty cycle and maximum power with normal modulation	
5) The receiving antenna was positioned in both horizontal and vertical polarization.	

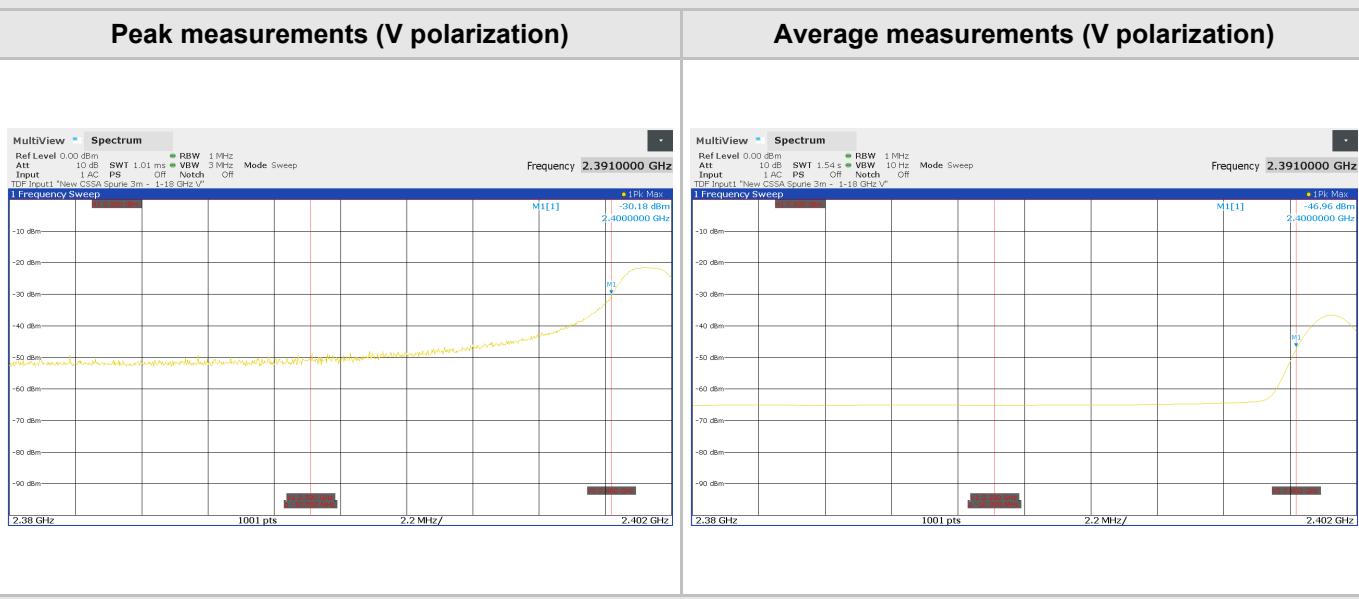MEASUREMENTS RESULTS AT LOWEST AND HIGHEST FREQUENCY TRANSMISSION
 FIRST CHANNEL


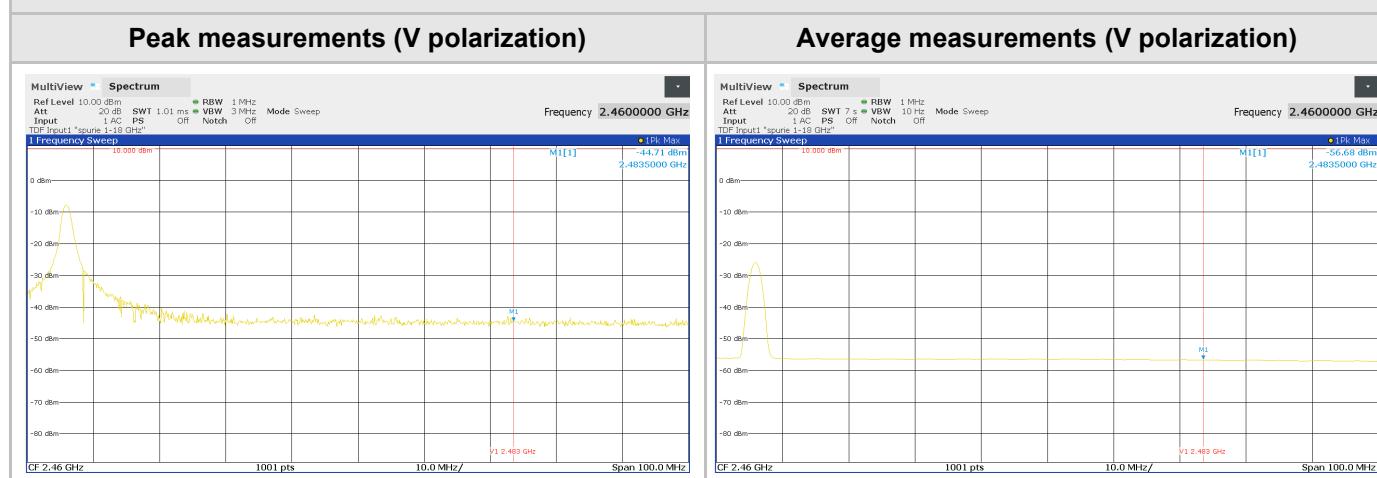
SECOND CHANNEL

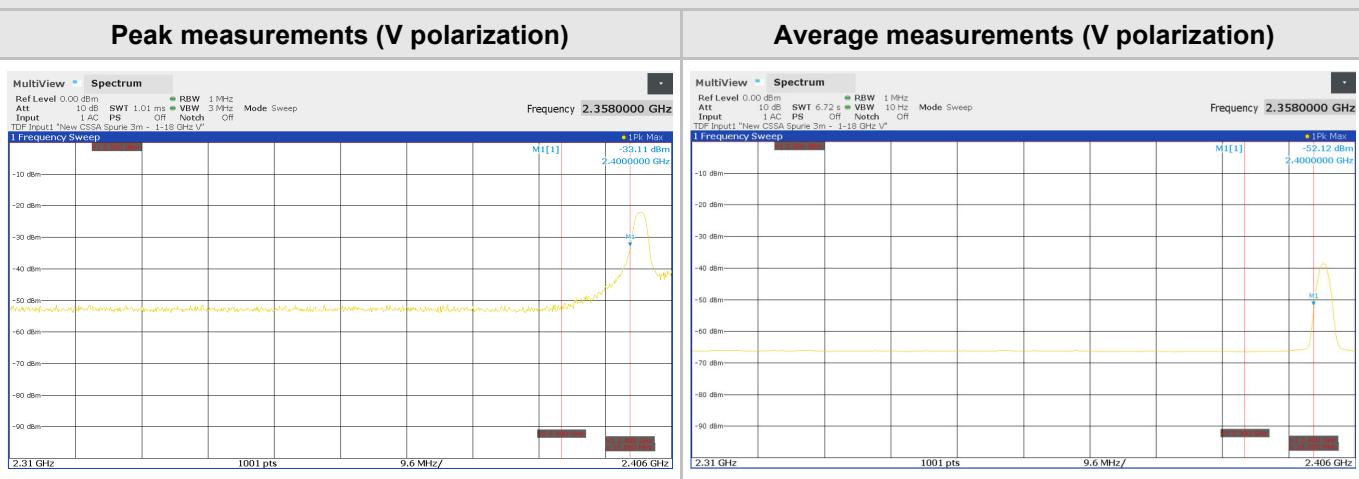

THIRD CHANNEL

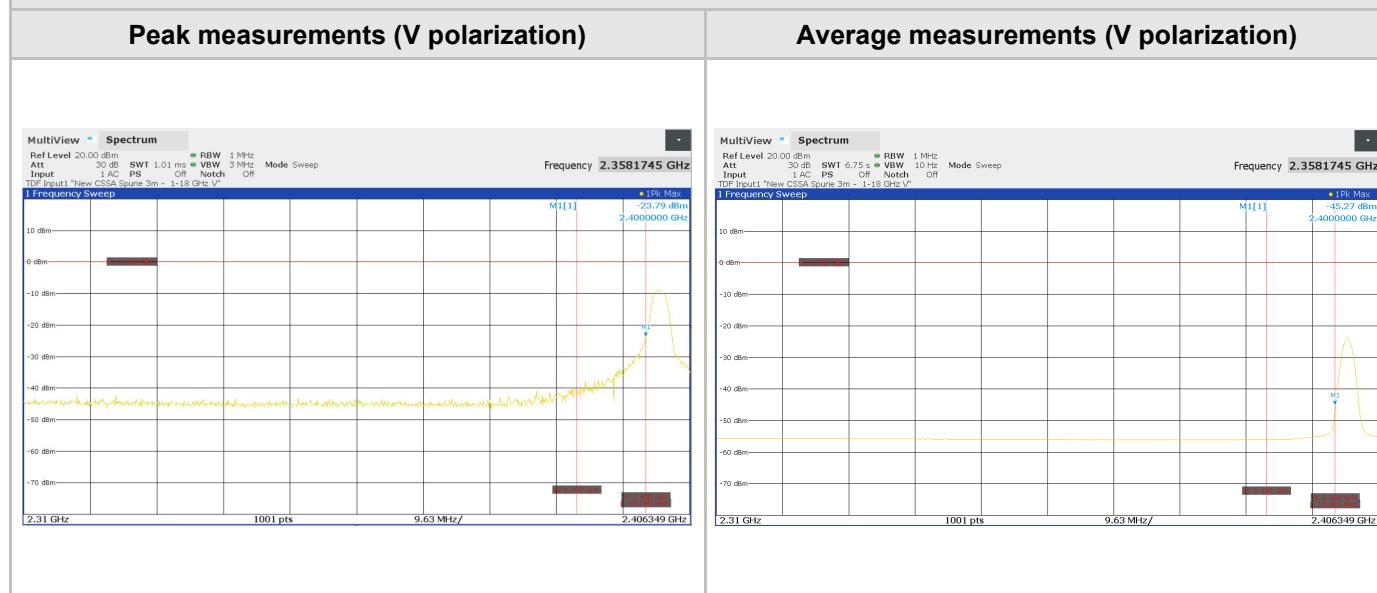

LAST CHANNEL



Spurious Emission in restricted band near 2400-2483.5 MHz

Detector	Channel	Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit	Margin
	/	(GHz)	(dB μ V)	(dB@3m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
PEAK	1	2.4000	67.54	27.3	5.18	-37.57	65.05	74	8.95
	2	2.4000	56.96	27.3	5.18	-37.57	62.12	74	11.88
	3	2.4000	67.84	27.3	5.18	-37.57	72.93	74	1.07
	last	2.4835	45.53	27.4	5.18	-37.57	50.52	74	23.48
AVERAGE	1	2.4000	43.18	27.3	5.18	-37.57	48.27	54	5.73
	2	2.4000	37.57	27.3	5.18	-37.57	44.66	54	7.34
	3	2.4000	44.87	27.3	5.18	-37.57	49.96	54	4.04
	last	2.4835	33.56	27.4	5.18	-37.57	38.55	54	15.45

TEST RESULT

The EUT meets the requirements of sections 15.205 (a)

7.3 RADIATED EMISSIONS

TEST REQUIREMENT

Test setup	ANSI C63.4 § 5.5
Test facility	Semi-anechoic chamber below 1 GHz; for measurement above 1 GHz are used 2.4 m by 2.4 m RF absorbing material covering the ground plane between the antenna and the EUT
Test distance	3 meters
Frequency range	9 kHz to tenth harmonic of fundamental
IF bandwidth (below 30 MHz)	9 kHz
IF bandwidth (below 1,000 MHz)	120 kHz
IF bandwidth (above 1,000 MHz)	1 MHz
Deviation to test procedure	None
EUT operating condition	#1
Remark	(*) In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is: Extrapolation (dB) = 40log (300meter / 3meter) = +80dB Extrapolation (dB) = 40log (30meter / 3meter) = +40dB
Testing dates	2020-02-11 ÷ 2020-02-12
Sample(s) tested	BEM 98546


LIMITS		
Band of operations	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)
Restricted bands (§ 15.205)	74	54
Other bands	According to § 15.209 or fundamental – 50dB (whichever is the lesser attenuation)	According to § 15.209 or fundamental – 50dB (whichever is the lesser attenuation)


TEST PROCEDURE


- 1) The EUT was placed on turntable which is 0.8 m above the ground plane
- 2) The turntable shall rotate from 0° to 360° degrees to determine the position of maximum emission level.
- 3) The EUT is positioned 3 m away from the receiving antenna which varied from 1 to 4 m to find the highest emission.
- 4) The measurements were made with the detector set to **PEAK** amplitude within a bandwidth of 120 kHz below 1000 MHz and 1 MHz above 1000 MHz.
- 5) The receiving antenna was positioned in both horizontal and vertical polarization.
- 6) The measurements with Quasi-Peak detector, below 1000 MHz are performed only for frequencies for which the Peak values are \geq Q.P. limit – 6 dB (♦ mark symbol).


NOTE


The product falls into class A. In any case, class B limits are included in the report, which are more restrictive than class A.

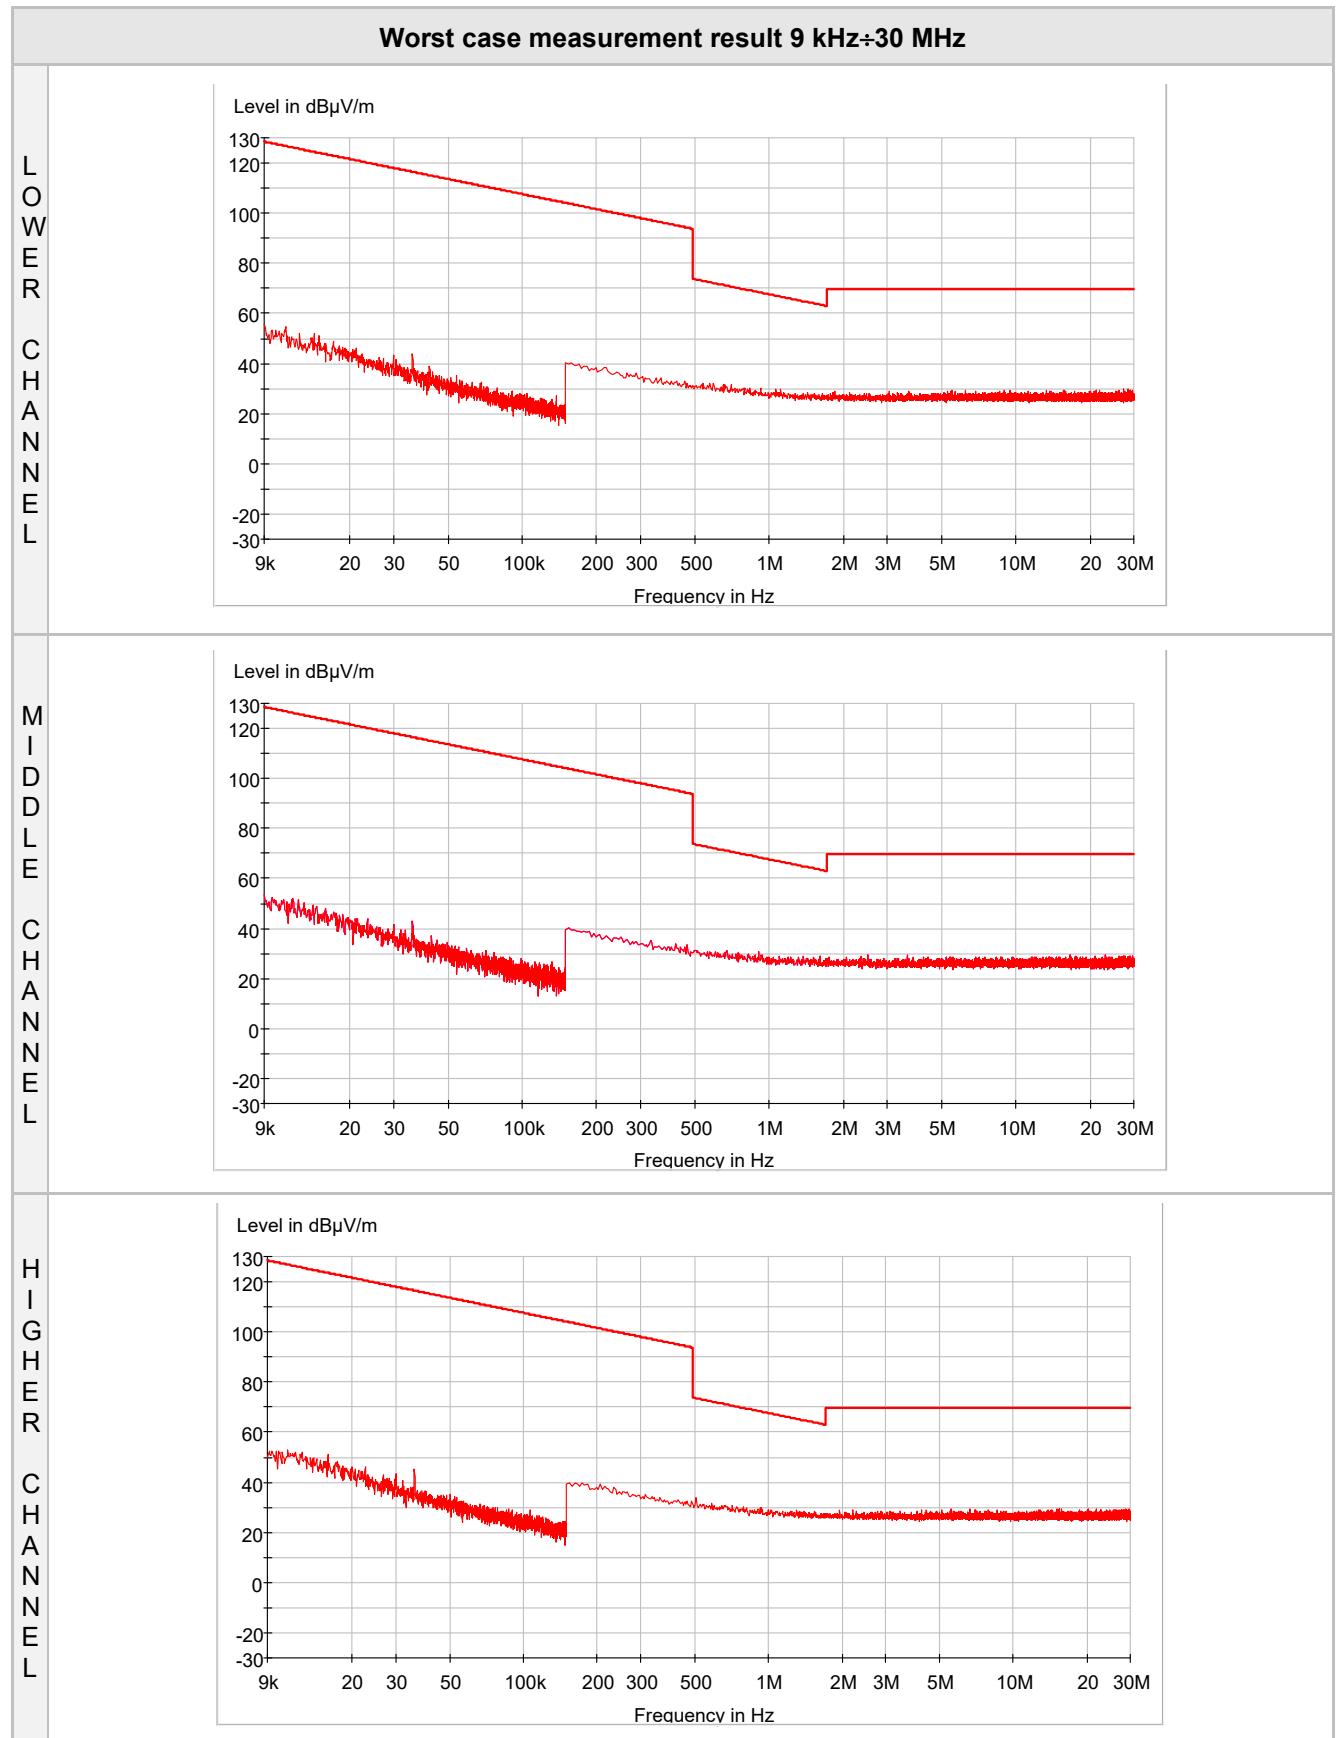

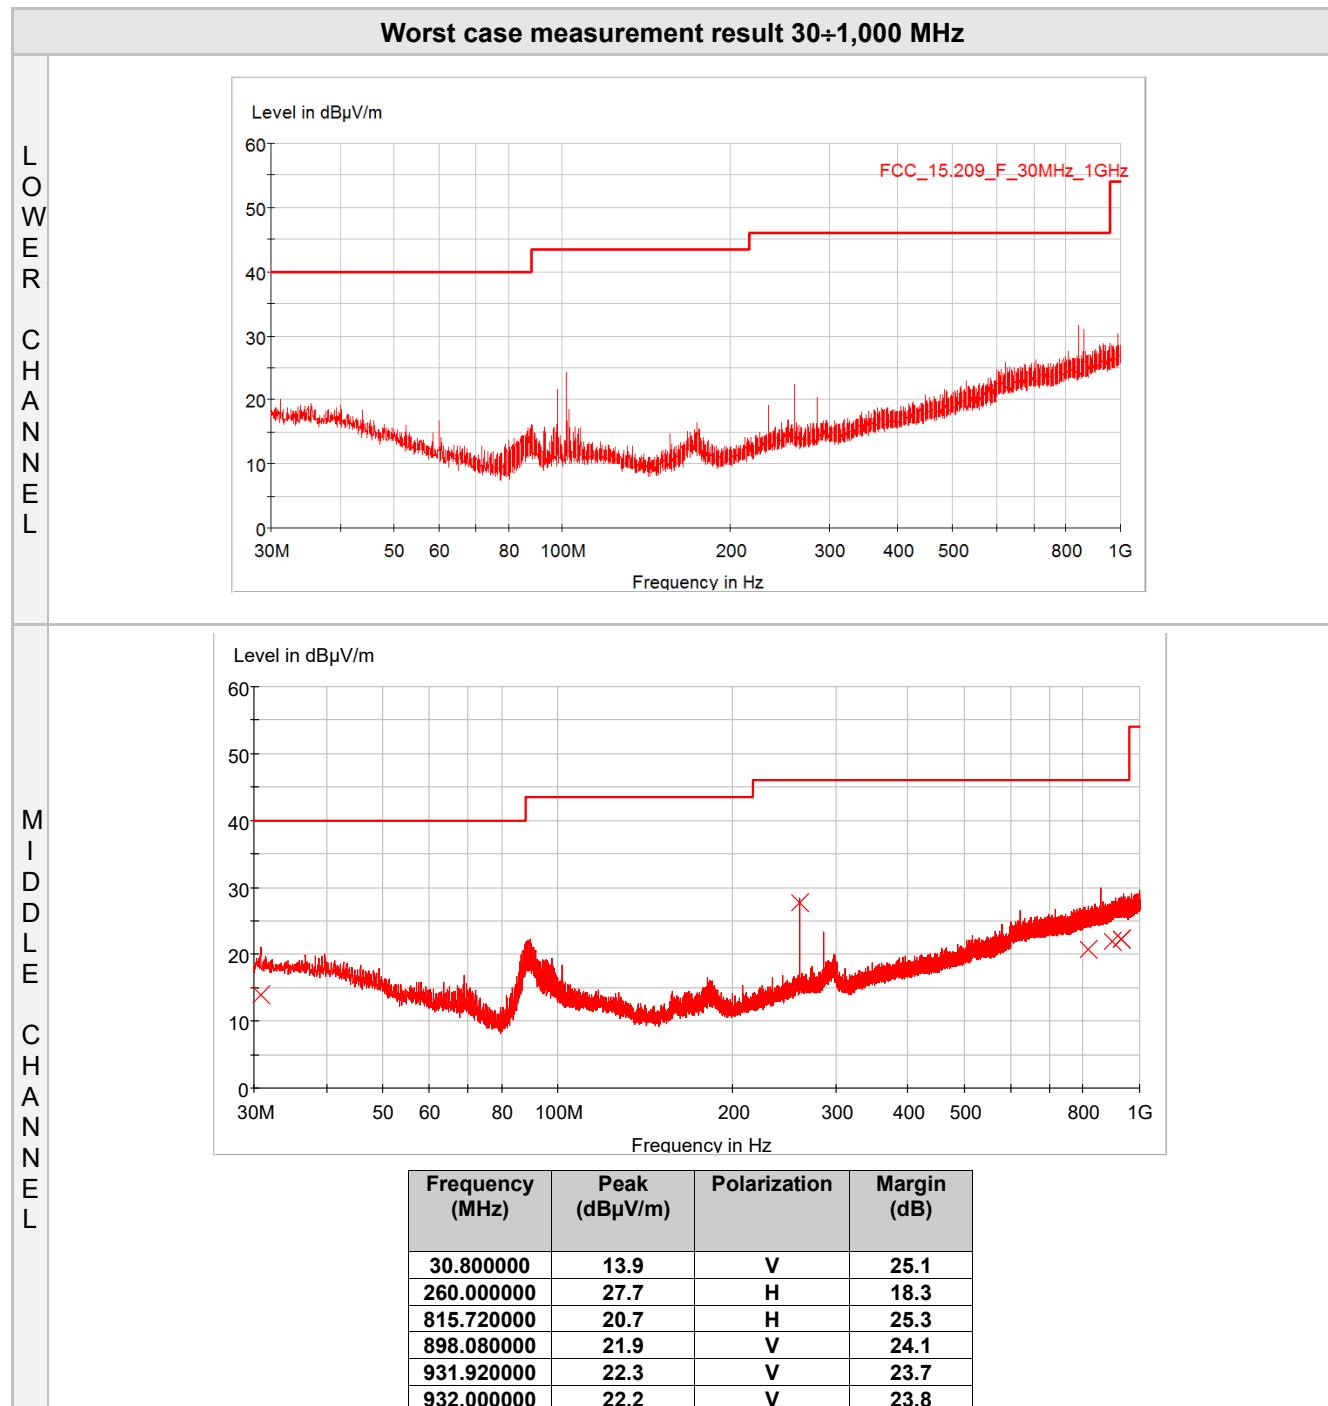


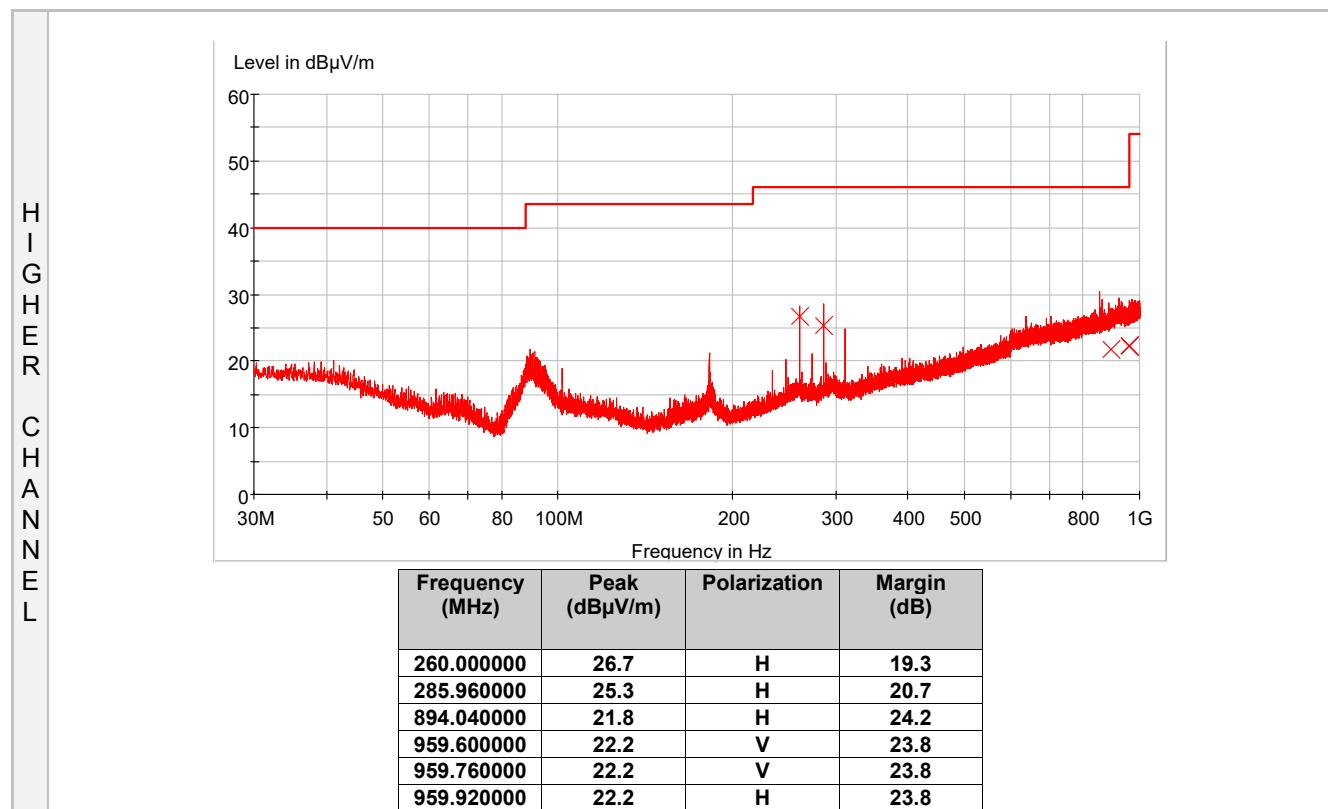


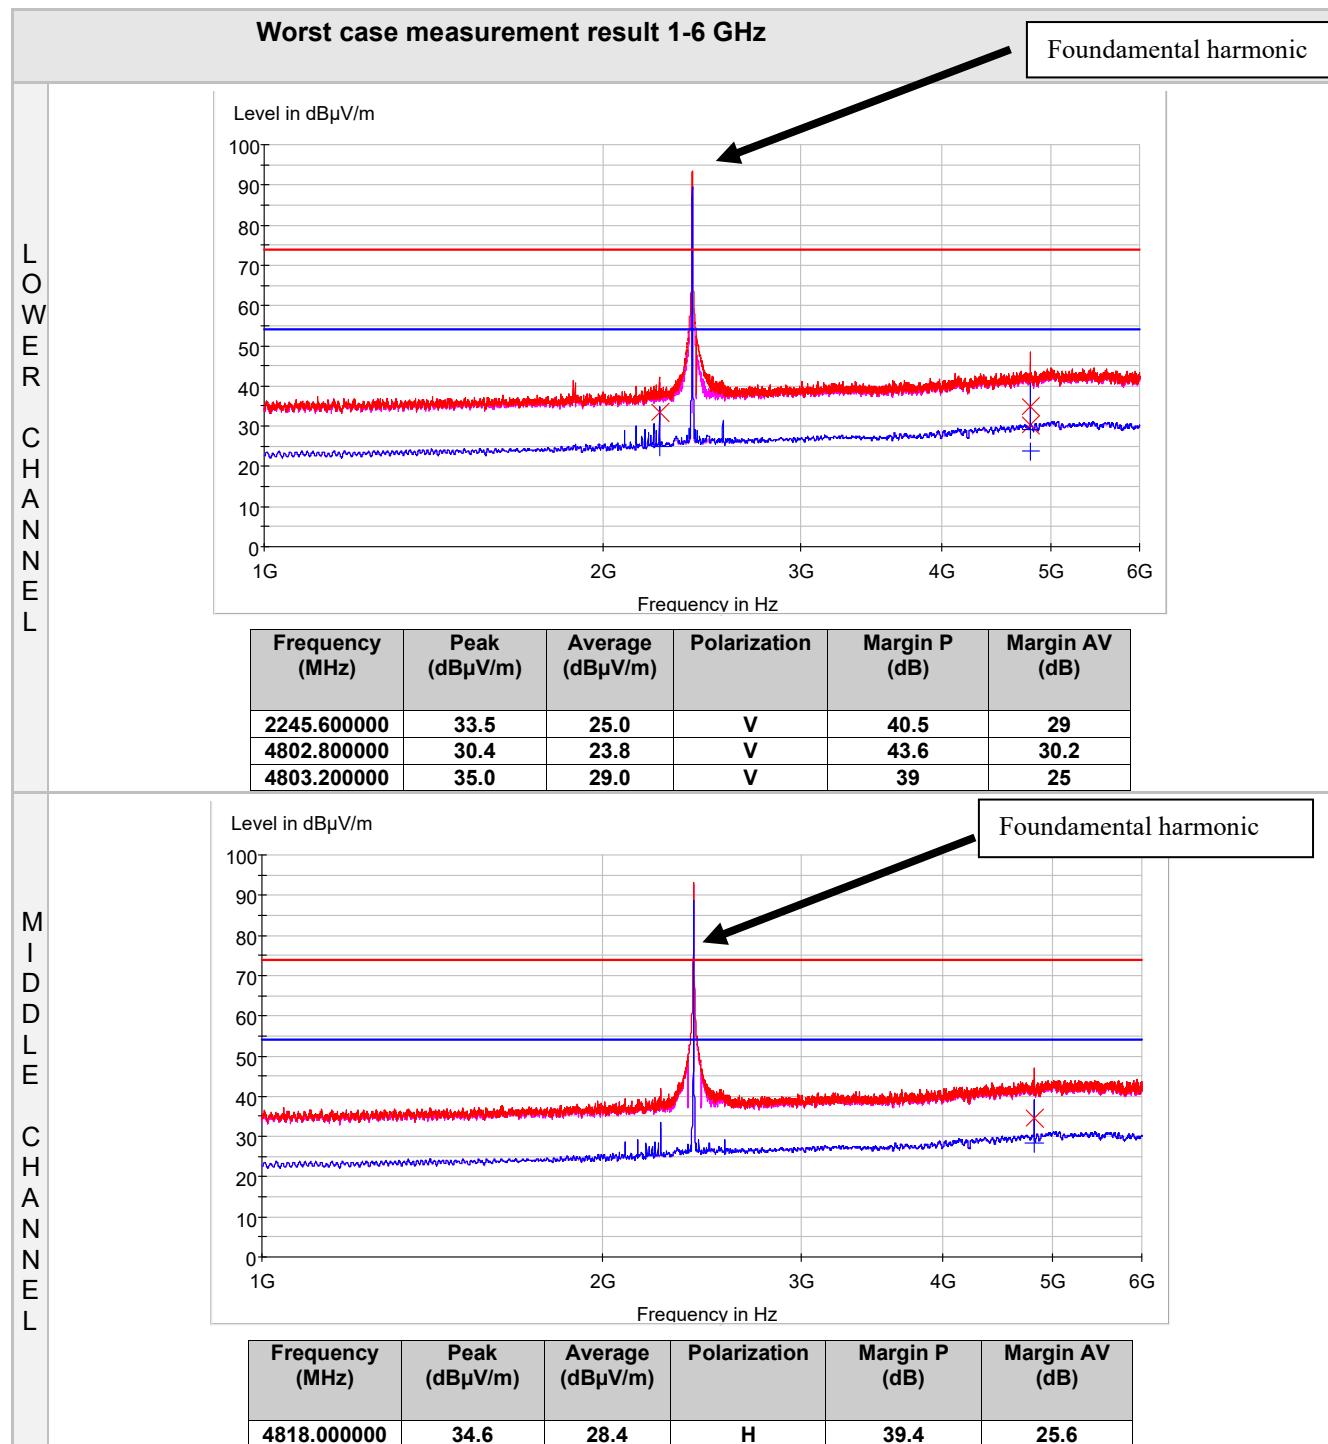


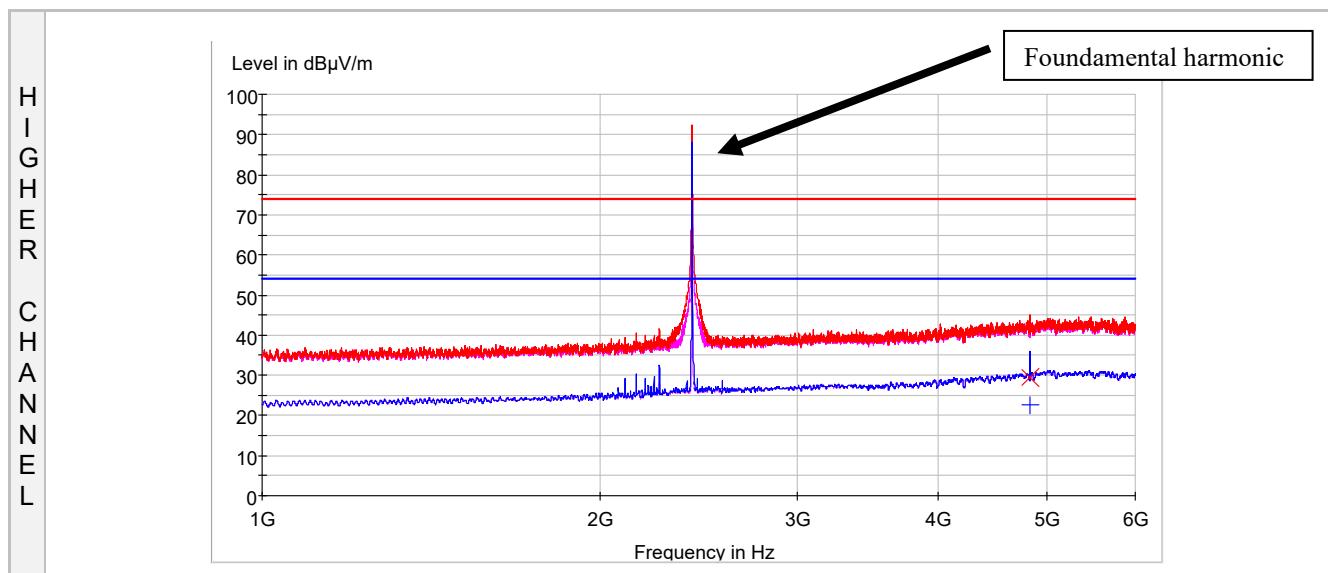



Frequency (MHz)	Peak (dB μ V/m)	Average (dB μ V/m)	Polarization	Margin P (dB)	Margin AV (dB)
4833.200000	29.5	22.8	V	44.5	31.2

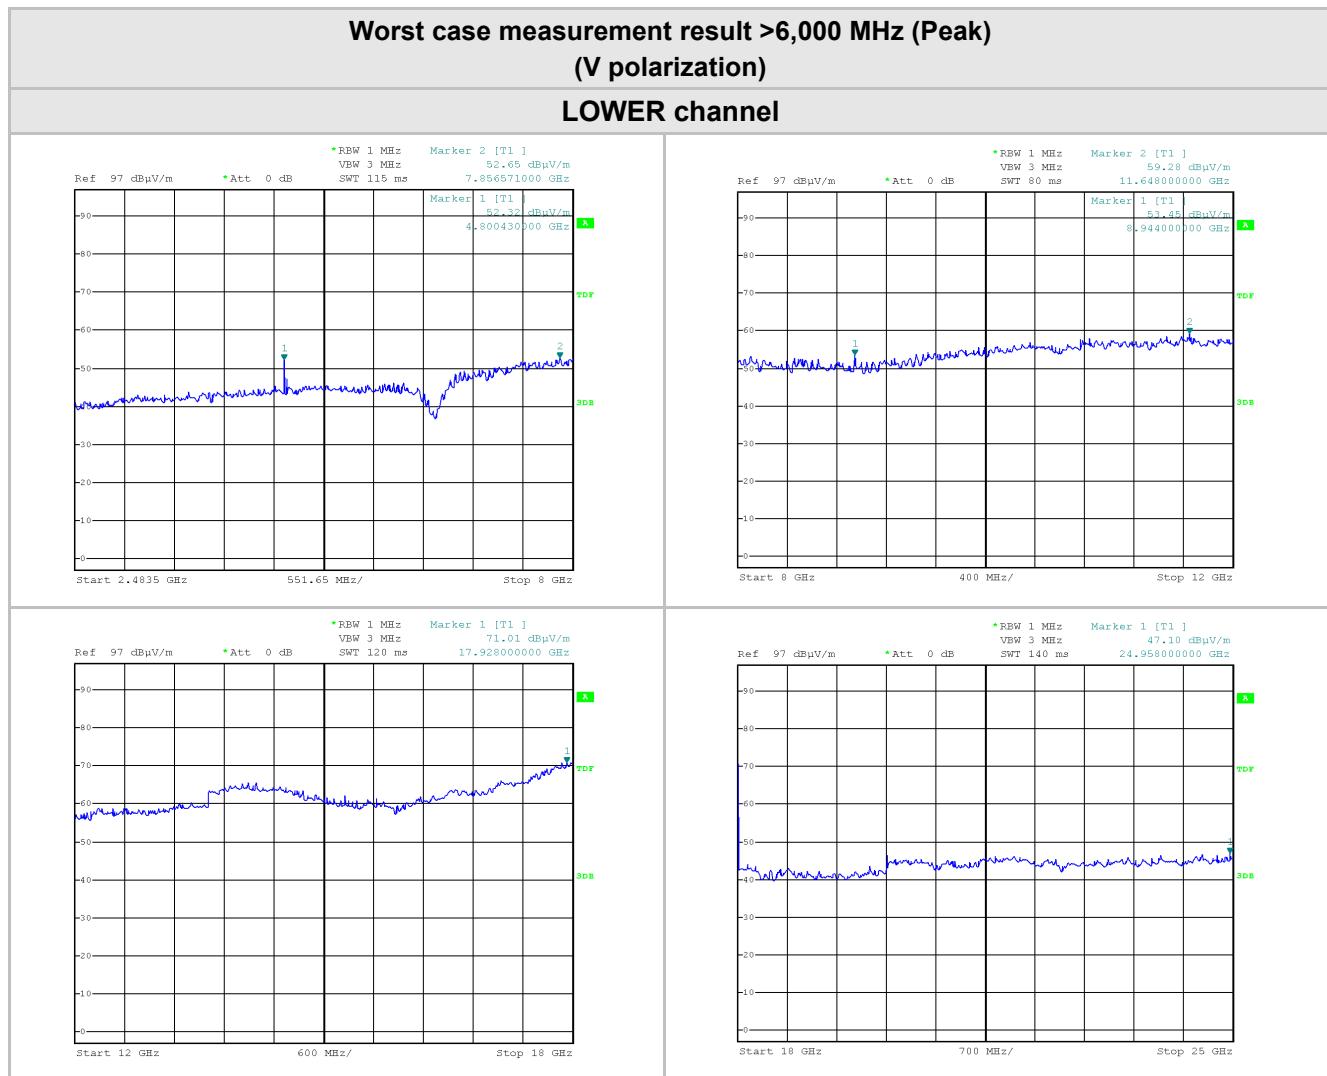


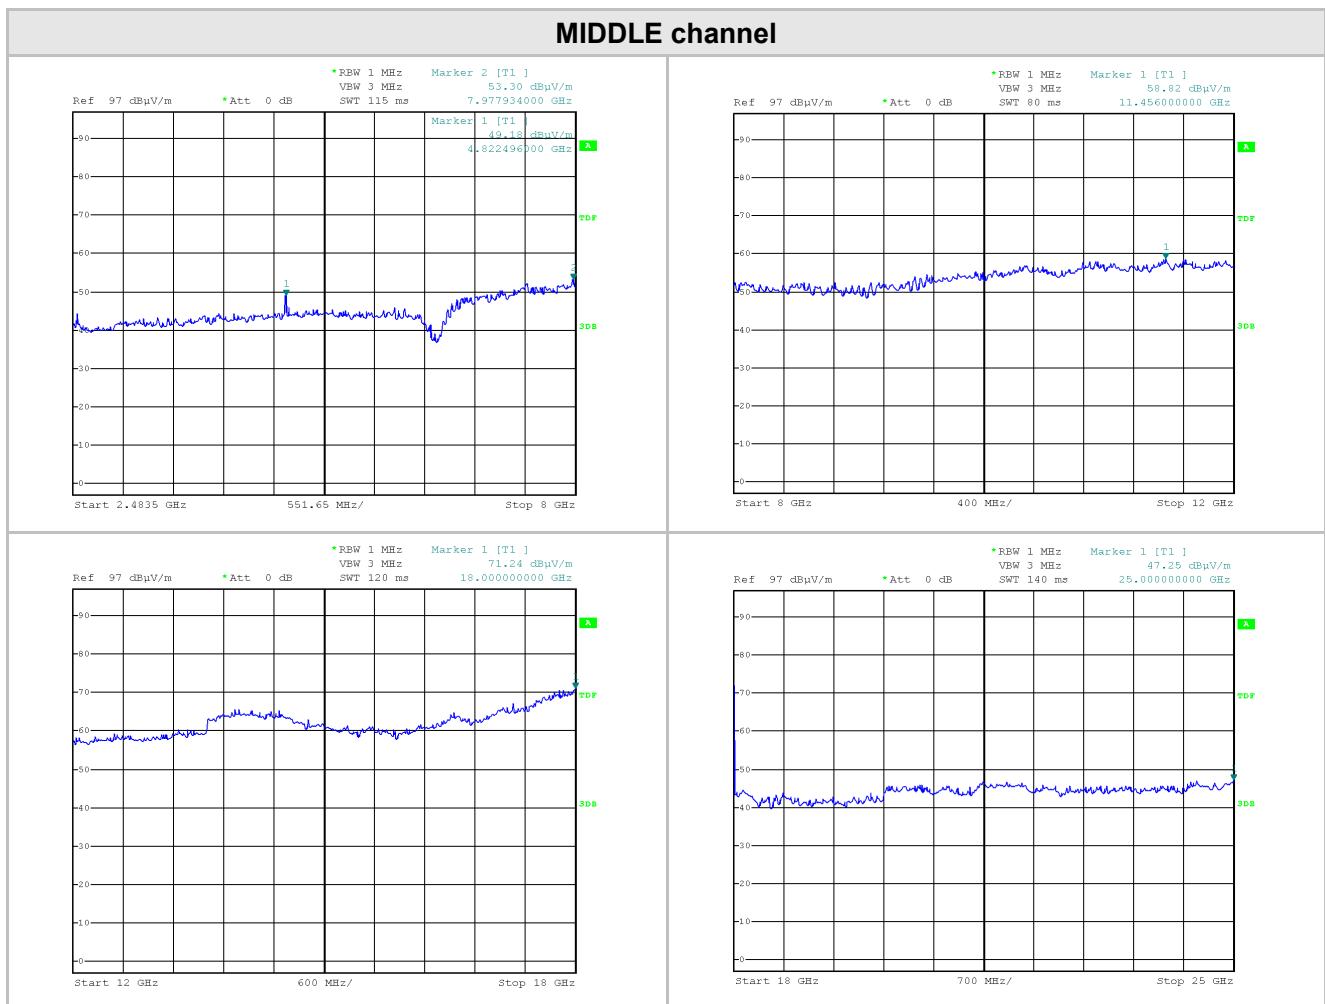

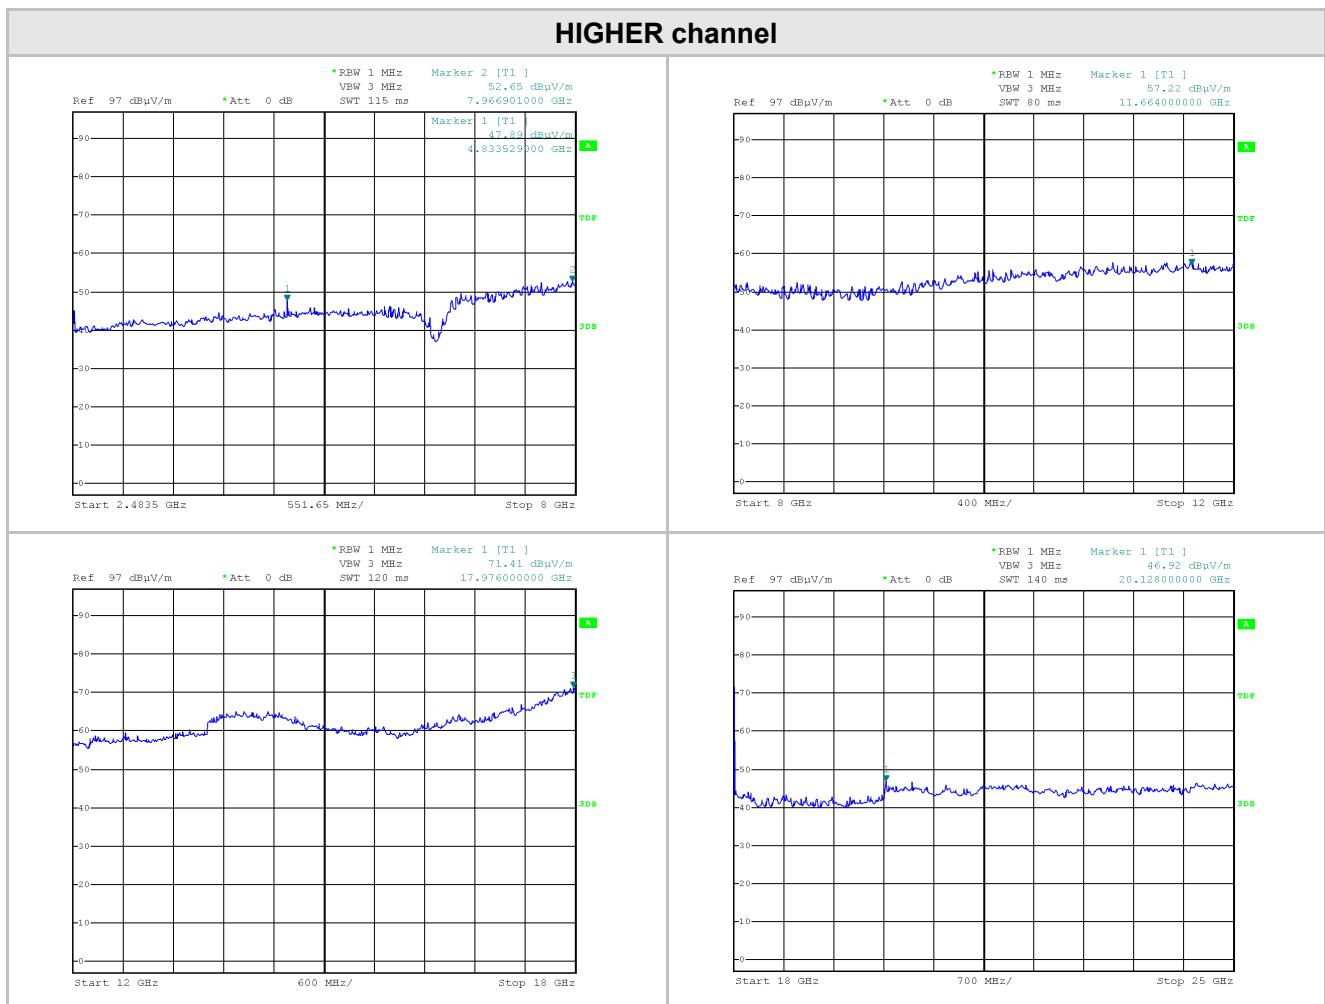

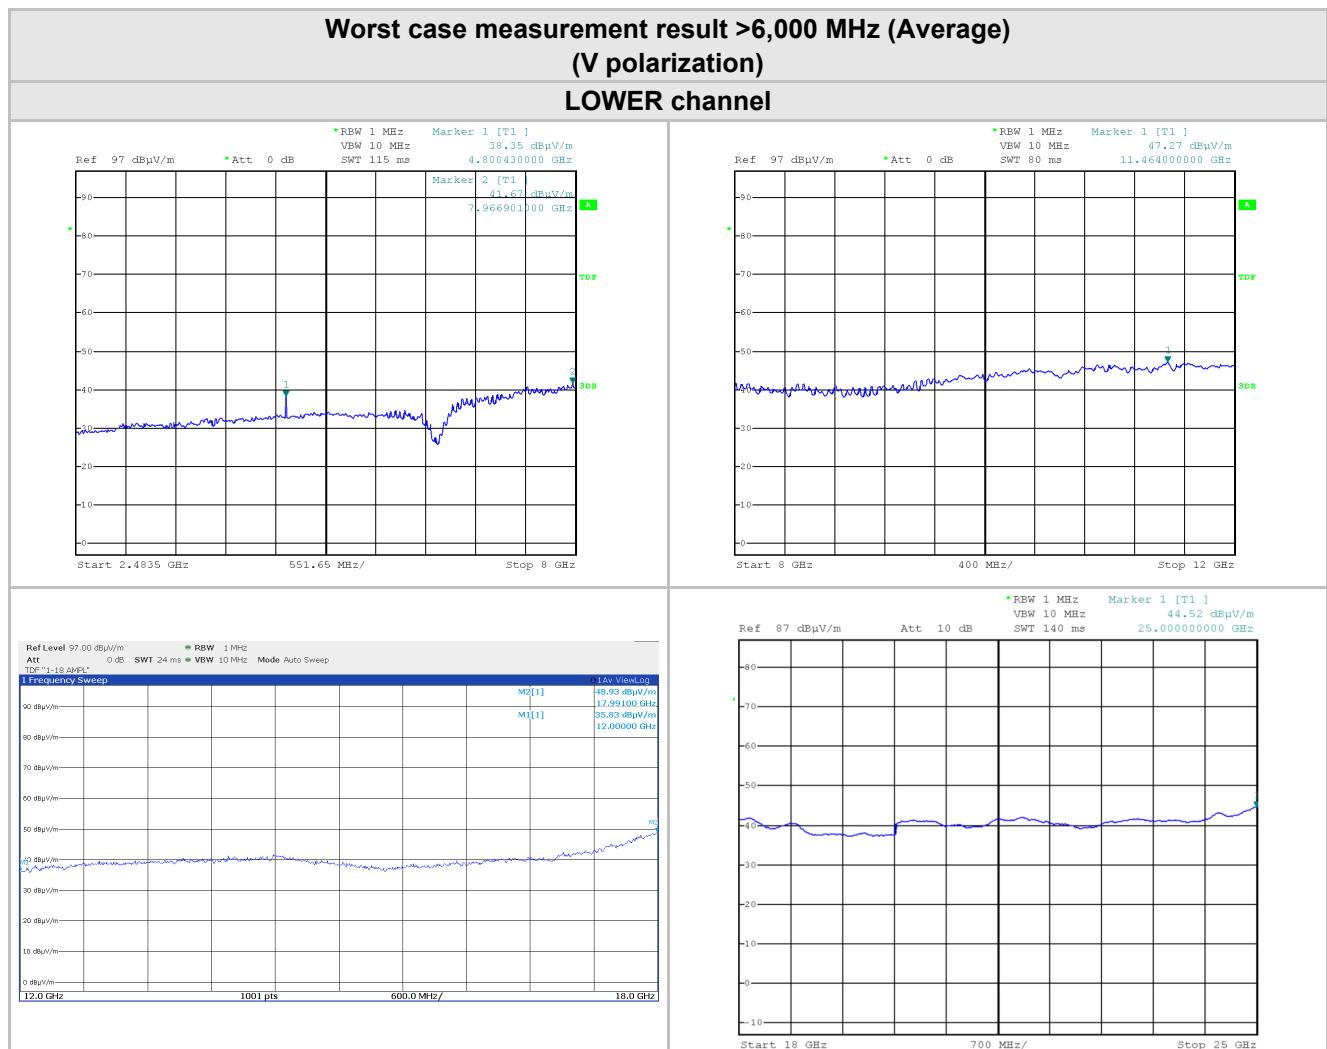

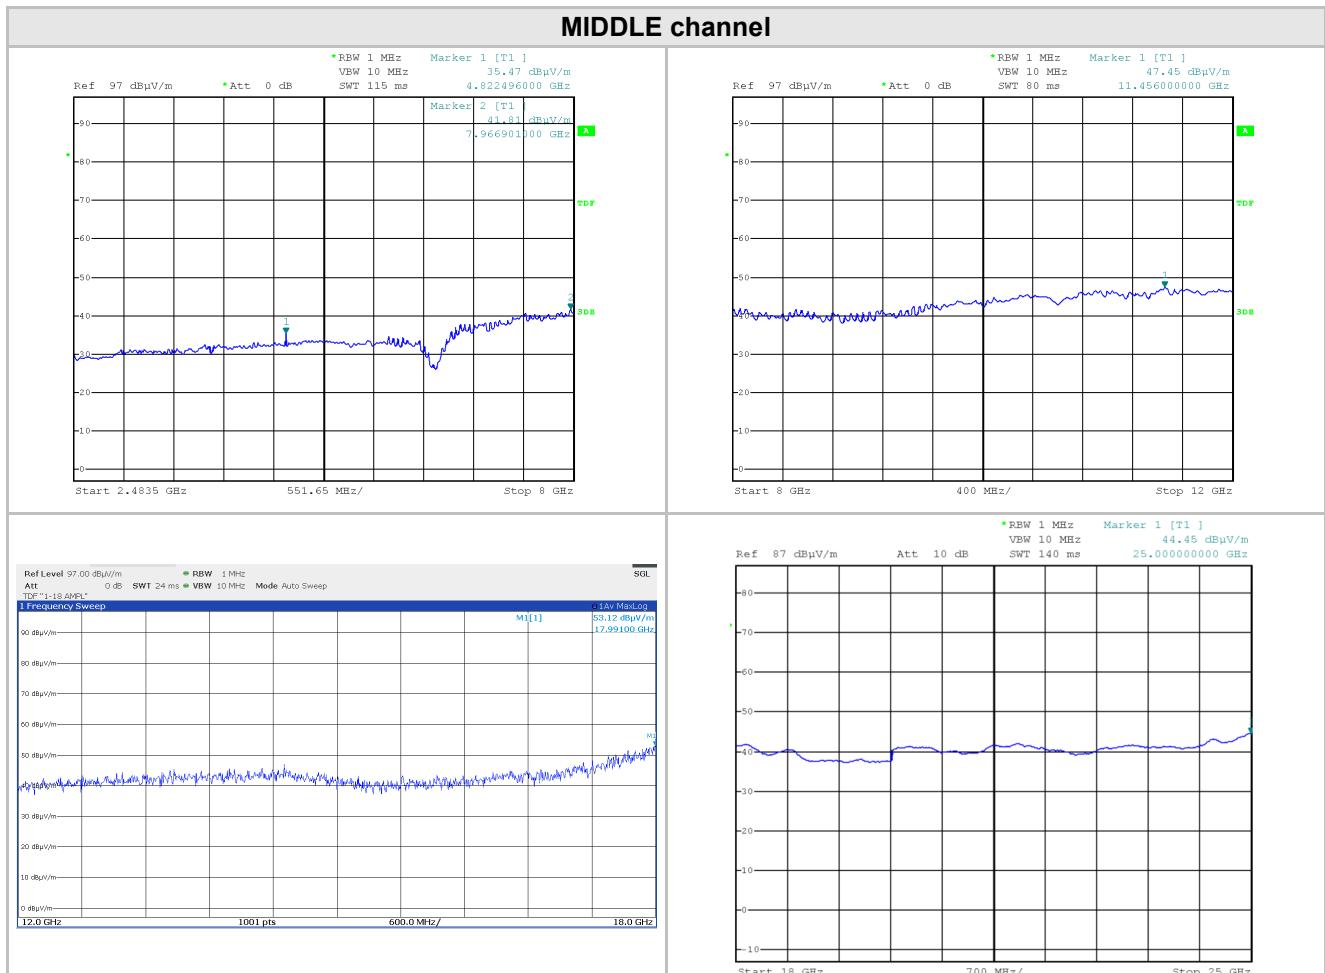

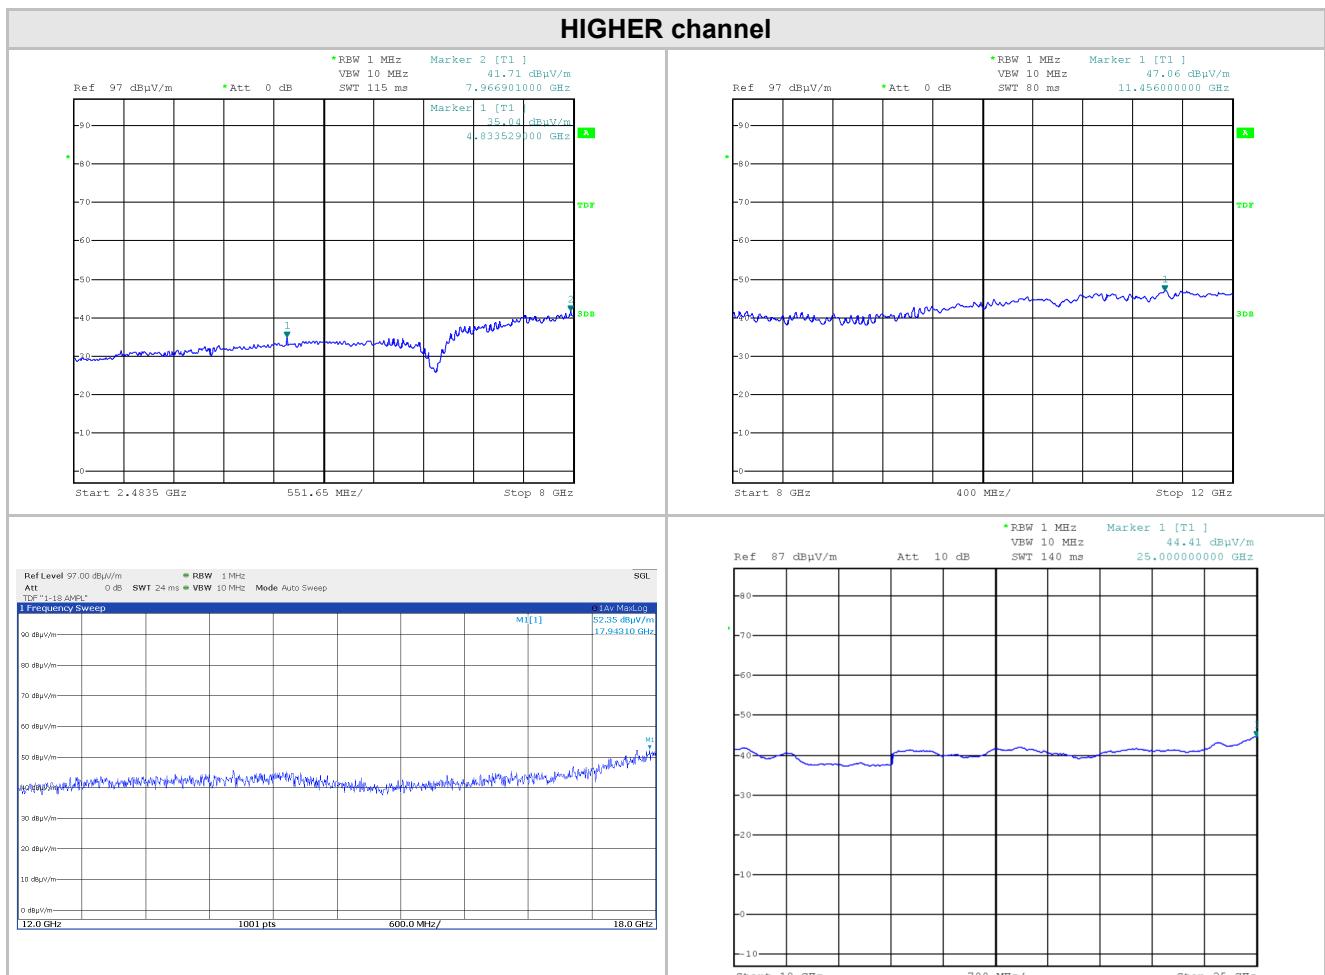

Worst case measurement result >6,000 MHz (PK & AV)

PEAK RESULT (RBW=1MHz; VBW=3MHz)								
Frequency (MHz)	Reading value (dB μ V)	Antenna Factor (dB@3m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Correct reading (dB μ V/m)	PK Limit (AV + 20dB)		Margin (dB)
7856 (lower channel)	60.74	36	9.09	-37	52.65	5000	74	21.35
f>7856	No significant values were found					5000	74	/
7977 (middle channel)	61.60	36.15	9.15	-37	53.30	5000	74	20.70
f>7977	No significant values were found					5000	74	/
7966 (higher channel)	61.57	36.4	9.42	-36.9	52.65	5000	74	21.35
f>7966	No significant values were found					5000	74	/

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency (MHz)	Reading Value (dB μ V)	Antenna Factor (dB@3m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Correct reading (dB μ V/m)	AV Limit		Margin (dB)
7966 (lower channel)	50.06	36	9.09	-37	41.97	500	54	12.03
f>7966	No significant values were found (see also above plots)					500	54	/
7966 (middle channel)	50.11	36.15	9.15	-37	41.81	500	54	12.19
f>7966	No significant values were found (see also above plots)					500	54	/
7966 (higher channel)	50.63	36.4	9.42	-36.9	41.71	500	54	7.44
f>7966	No significant values were found (see also above plots)					500	54	/

See above the measurements plots.

TEST RESULT

The EUT has been tested in 3 orthogonal axes at the frequencies lowest, middle and highest for each modulation with H and V polarization antenna.

The results reported are worst case.

The worst Average measures are reported. The whole radio spectrum was analyzed on Average without finding relevant spurious beyond the limits.

No significant values were found in receiver mode through careful preliminary scans.

The EUT meets the requirements.

7.4 CONDUCTED EMISSION

TEST REQUIREMENT	
Test setup	ANSI C63.4
Test facility	Shielded chamber
Frequency range	150 kHz – 30 MHz
IF bandwidth	9 kHz
EMC class	B
EUT operating condition	#1
Testing dates	2020-02-12
Sample(s) tested	BEM 98546


LIMITS		
Band of operations	Quasi-Peak (dB μ V)	Average Limit (dB μ V)
0.15 ÷ 0.5	66 ÷ 56	56 ÷ 46
0.5 ÷ 5	56	46
5 ÷ 30	60	50

TEST RESULT
The EUT meets the requirements of sections 15.207 (a).


TEST PROCEDURE
<ol style="list-style-type: none"> 1) The EUT was placed on a wooden table of size, 80 cm by 80 cm, raised 80 cm in which is located 40 cm away from the vertical wall the shielded room. 2) Each EUT power cord input cord was individually connected through a 50Ω/50μH LISN to the input power source. 3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement. 4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz. 5) The measurements were made with the detector set to PEAK and AVERAGE amplitude within a bandwidth of 9 kHz during the measurements. 6) The measurements with Quasi-Peak detector are performed only for frequencies for which the Peak values are \geq (Q.P. limit - 6 dB).

NOTE

The product falls into class A. In any case, class B limits are included in the report, which are more restrictive than class A.

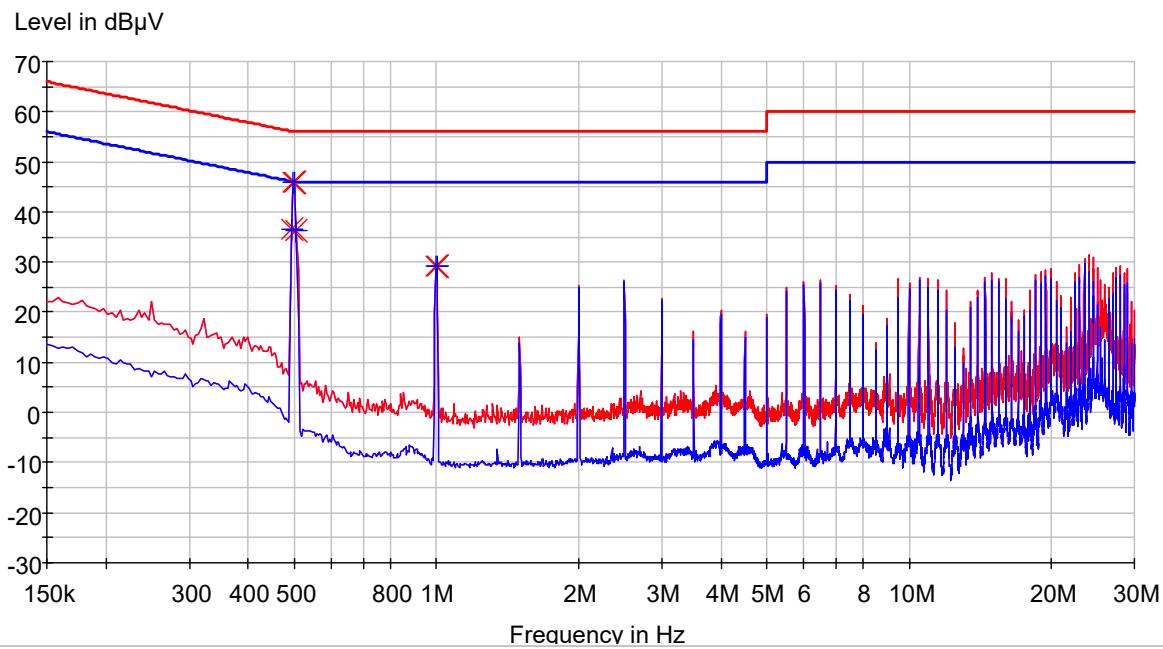MEASUREMENTS RESULTS**150 kHz÷30 MHz – PHASE LINE**

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Line	Margin QP (dB)	Margin AV (dB)
0.494000	36.6	36.6	L1	19.4	9.4
0.498000	45.9	45.9	L1	10.1	0.1
0.502000	45.8	45.9	L1	10.1	0.1
0.506000	36.3	36.3	L1	19.7	9.7
0.998000	29.2	29.2	L1	26.8	16.8
1.002000	29.1	29.1	L1	26.9	16.9

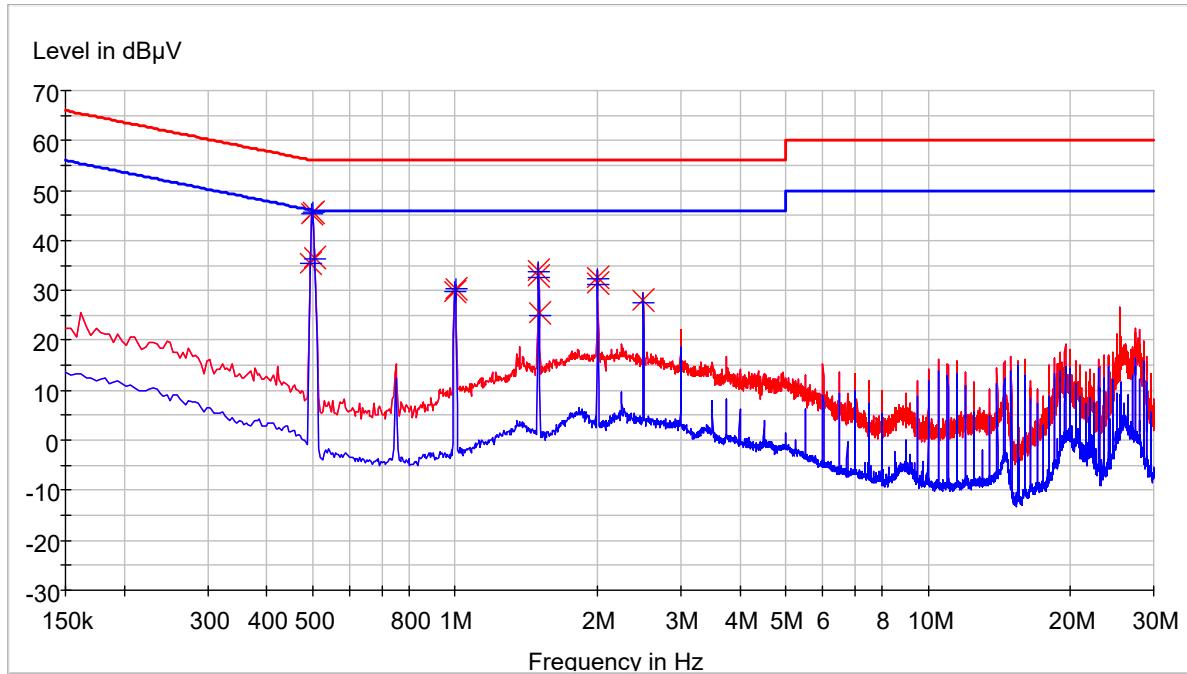
150 kHz÷30 MHz – NEUTRAL LINE

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Line	Margin QP (dB)	Margin AV (dB)
0.494000	35.5	35.5	N	20.5	10.5
0.498000	45.3	45.3	N	10.7	0.7
0.502000	45.6	45.7	N	10.3	0.3
0.506000	36.4	36.4	N	19.6	9.6
0.998000	29.7	29.7	N	26.3	13.3
1.002000	30.3	30.2	N	25.7	15.8
1.498000	33.0	32.7	N	23.0	13.3
1.502000	34.0	33.7	N	22.0	12.3
1.506000	25.6	25.0	N	30.4	21.0
1.998000	31.3	31.1	N	24.7	14.9
2.002000	32.6	32.4	N	23.4	12.6
2.502000	28.1	27.6	N	27.9	18.6

7.5 BANDWIDTH OF EMISSIONS (20 dB BANDWIDTH)

TEST REQUIREMENT	
Spectrum analyzer settings	
Span	Wide enough to capture the peak level of the emission operating on the channel
Resolution bandwidth (RBW)	100 kHz
Video bandwidth (VBW)	300 kHz
Sweep time (SWT)	Auto
Detector function	Peak
Trace	Max hold
Attenuator	/
Deviation to test procedure	None
EUT operating condition	#1
Remark	None
Testing dates	2020-07-10
Sample(s) tested	BEM 100208

Channel (No.)	Frequency (GHz)	Channel Bandwidth (MHz)	Plot (No.)
Low	2.401	1.044	1
Middle	2.407	1.084	2
High	2.416	1.360	3

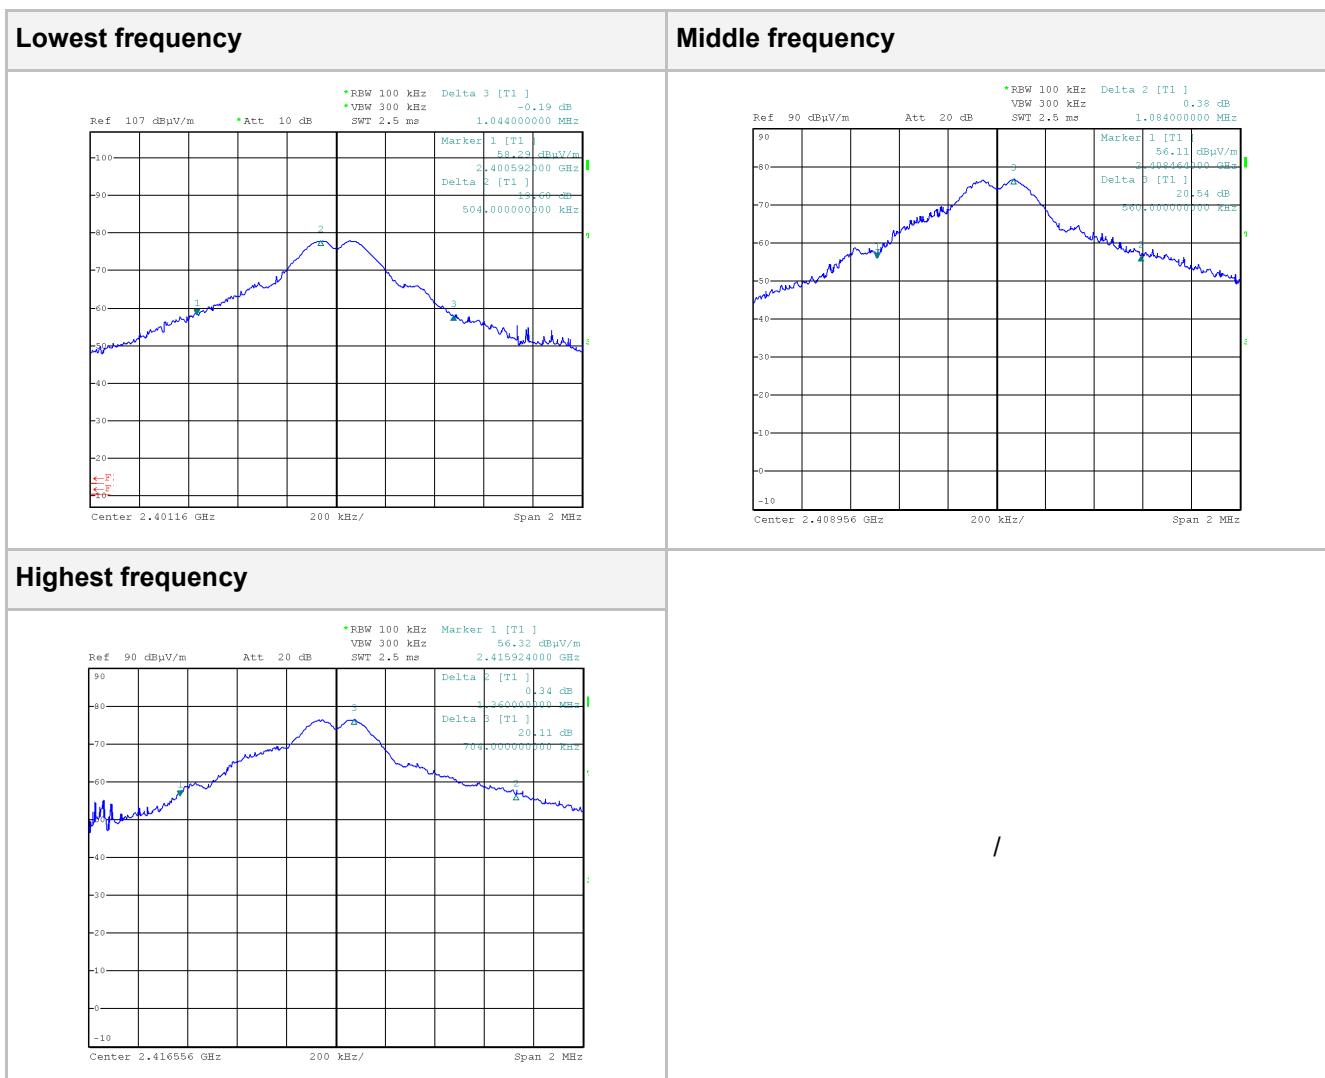

7.6 FIELD STRENGTH OF FUNDAMENTAL

TEST REQUIREMENT	
Spectrum analyzer settings	
Span	Wide enough to capture the peak level of the emission
Resolution bandwidth (RBW)	1 MHz
Video bandwidth (VBW)	Auto
Sweep time (SWT)	Auto
Detector function	Peak
Trace	Max hold
Attenuator	/
Deviation to test procedure	None
EUT operating condition	#1
Remark	None
Testing dates	2020-07-10
Sample(s) tested	BEM 100208


TEST PROCEDURE	
1)	The EUT was placed on turntable which is 0.8 m above the ground plan

LIMITS	
94 dB μ V/m	

TEST RESULT	
The EUT meets the requirements of sections 15.249 (a).	

MEASUREMENTS RESULTS – WORST CASE VERTICAL POLARIZATION

Channel (No.)	Frequency (GHz)	Field strength (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Low - 1	2.4011	70.80	94.00	23.20
2	2.4013	70.90	94.00	23.10
3	2.4015	82.50	94.00	11.50
Middle	2.408	92.01	94.00	1.99
High	2.416	92.53	94.00	1.47

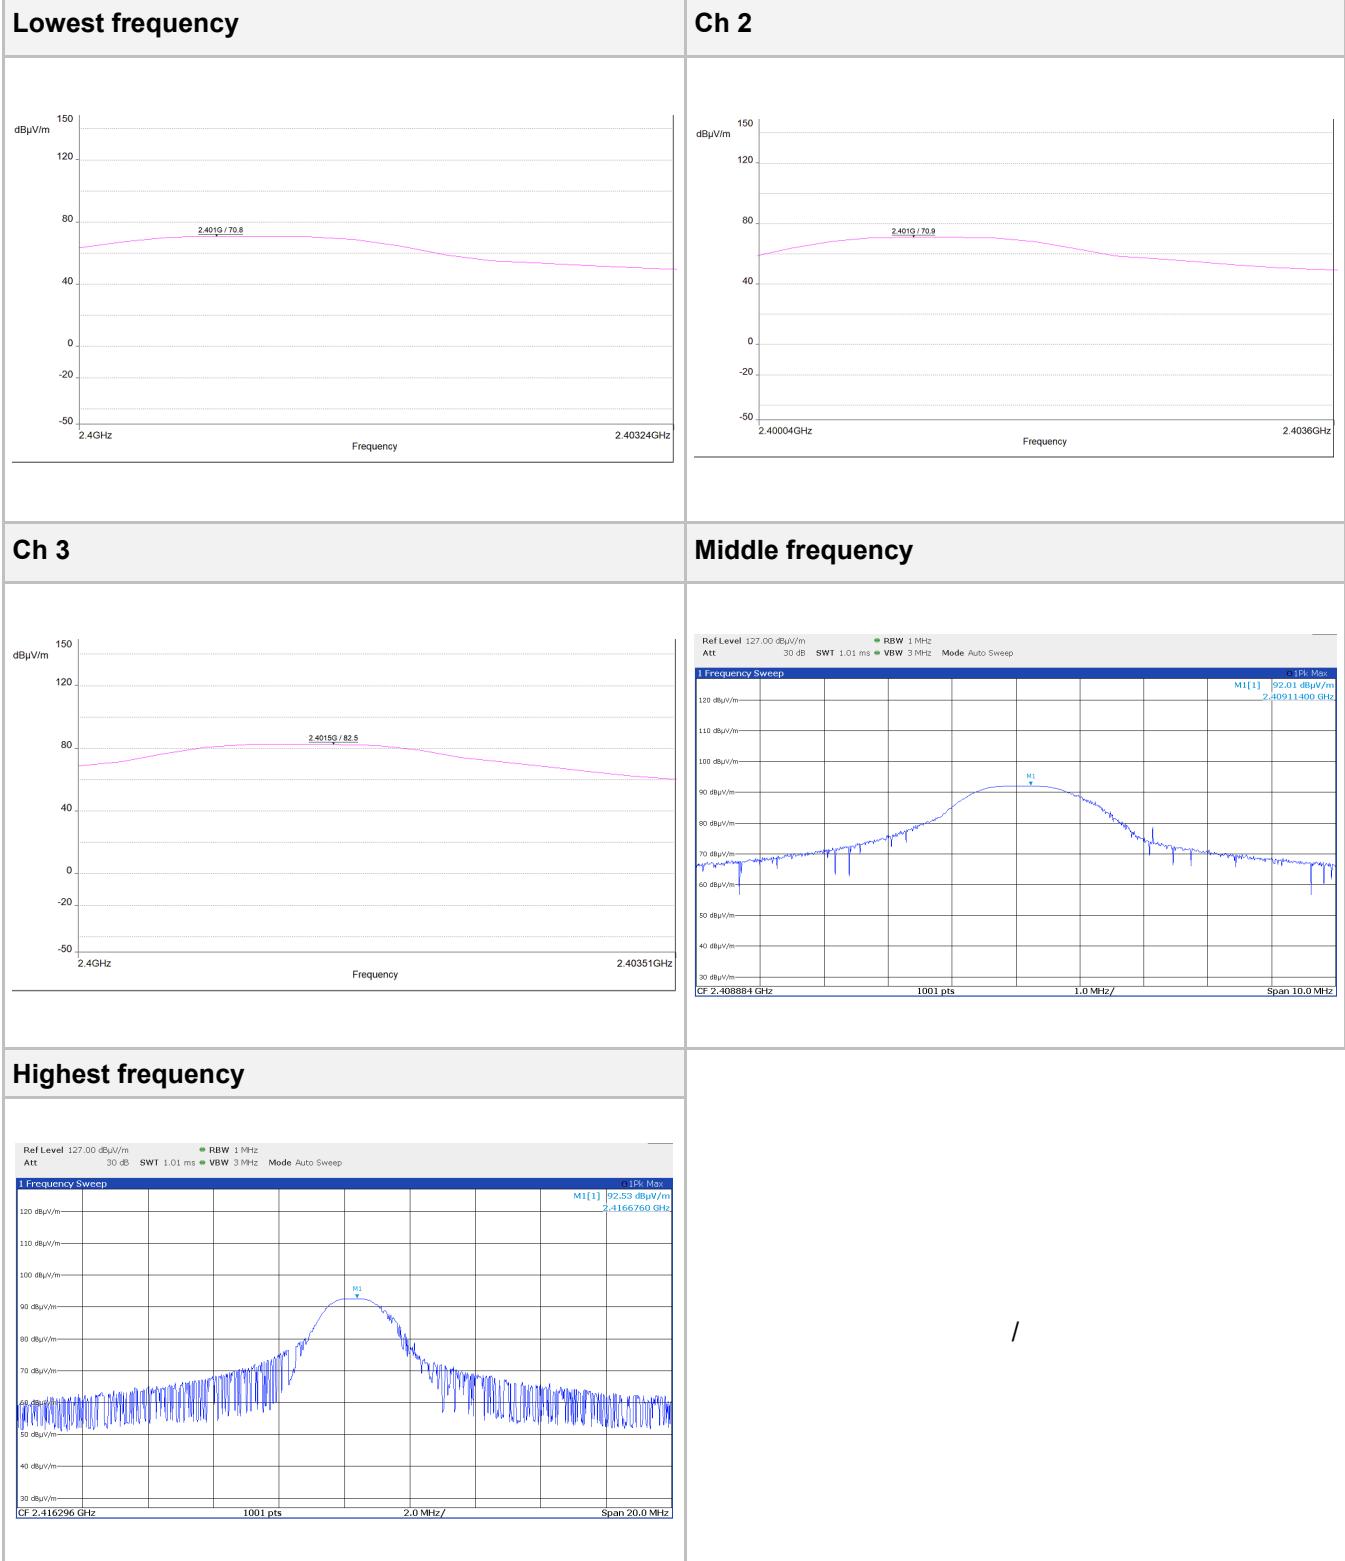

7.7 FIELD STRENGTH OF HARMONICS

TEST REQUIREMENT	
Spectrum analyzer settings	
Resolution bandwidth (RBW)	1 MHz
Detector function	Peak
Trace	Max hold
Attenuator	/
Deviation to test procedure	None
EUT operating condition	#1
Remark	None
Testing dates	2020-02-11 ÷ 2020-02-12
Sample(s) tested	BEM 98546
TEST PROCEDURE	
<ol style="list-style-type: none">1) The EUT was placed on turntable which is 0.8 m above the ground plan2) The turntable shall rotate from 0° to 360° degrees to determine the position of maximum emission level and EUT positioned in 3 orthogonal axes (with 3 orthogonal axes for EUT's antenna).3) The EUT is positioned 3 m away from the receiving antenna which varied from 1 to 4 m to find the highest emission.4) The measurements were made with the detector set to PEAK amplitude within a bandwidth of 1 MHz.5) The receiving antenna was positioned in both horizontal and vertical polarization.	

MEASUREMENTS RESULTS AT LOWEST FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
4800	V	Peak	53.95	1.63	52.32	74	21.68
7857	V	Peak	60.90	8.25	52.65	74	21.35

MEASUREMENTS RESULTS AT MIDDLE FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
4822	V	Peak	50.88	1.70	49.18	74	24.82
7977	V	Peak	61.61	8.31	53.30	74	20.70

MEASUREMENTS RESULTS AT HIGHEST FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
4833	V	Peak	49.61	1.72	47.89	74	26.11
7967	V	Peak	60.95	8.30	52.65	74	21.35



MEASUREMENTS RESULTS AT LOWEST FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
4800	V	Average	39.98	1.63	38.35	54	15.65
7967	V	Average	49.97	8.30	41.67	54	12.33

MEASUREMENTS RESULTS AT MIDDLE FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
4822	V	Average	37.17	1.70	35.47	54	18.35
7967	V	Average	50.11	8.30	41.81	54	12.19

MEASUREMENTS RESULTS AT HIGHEST FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
4833	V	Average	36.76	1.72	35.04	54	18.96
7967	V	Average	50.01	8.30	41.71	54	12.29

TEST RESULT

All out of band spurious emissions are more 20 dB below the in band power of the fundamental.
The EUT meets the requirements of sections 15.249 (a).

8. TESTS UNCERTAINTY

Unless otherwise stated the uncertainties for the tests and measurements are evaluated in according to IMQ Operational Instruction IO-LAB-001 and IO-LAB-004.

The expanded uncertainty was calculated for all measurements and tests listed in this test report according to CISPR 16-4-2 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainty in EMC Measurements", with UKAS document LAB 34 and is documented in the quality system accordance to ISO/IEC 17025.

Internal Procedure PG-037 ensures that the requirements for traceability of calibrations, of all test equipment requiring calibration, and calibration intervals are met.

Methods/Standard	Parameter	Expanded Uncertainty	Unit	Confidence level
Radiated disturbance	QP detector (30 MHz - 100 MHz) H polarization	4.0	dB	95%
	QP detector (30 MHz - 100 MHz) V polarization	3.9	dB	95%
	QP detector (100 MHz - 200 MHz) H polarization	2.9	dB	95%
	QP detector (100 MHz - 200 MHz) V polarization	4.0	dB	95%
	QP detector (200 MHz - 1000 MHz) H polarization	3.5	dB	95%
	QP detector (200 MHz - 1000 MHz) V polarization	3.4	dB	95%
	P detector 1-6 GHz	4.3	dB	95%
	P detector 6 – 18 GHz	4.8	dB	95%
	P detector 18-26 GHz	4.9	dB	95%

8. LIST OF MEASURING EQUIPMENT AND CALIBRATION INFORMATION

Instrument	Manufacturer	Model	IMQ Ref.	Cal. Date	Cal. Due
Shielded semi-anechoic chamber	SIDT	/	P01709	2019-10-21	2020-10-31
Turntable controller unit	FRANKONIA	FCTAM01	P02486	/	/
Mast antenna	FRANKONIA	FAM4	P02488	/	/
Log antenna	ARA	LPB-2513	S02385	2017-06-06	2020-06-30(*)
Log antenna	ARA	LPB-2520/1	S03511	2019-11-15	2020-11-30
Horn Antenna	SCHWARZBECK	BBHA 9120D	S03463	2017-07-21	2020-07-31
Loop Antenna	ROHDE & SCHWARZ	HFH2-Z2	S02508	2019-08-06	2020-08-31
Spectrum Analyzer	Rohde & Schwarz	FSP40	S03629	2019-11-06	2020-11-30
Preamplifier	Hewlett Packard	HP 8449B	S03542	2019-03-27 2020-04-05	2020-03-31 2021-04-30
Software	ROHDE & SCHWARZ	EMC32 Ver. 6.30	W-00199/E	/	/
PC	/	/	H-00165	/	/
Artificial Mains V-network	ROHDE & SCHWARZ	ESH2-Z5	S00554	2019-11-18	2020-11-30
Pulse limiter	ROHDE & SCHWARZ	ESH3-Z2	S02153	2019-11-18	2020-11-30
EMI receiver	ROHDE & SCHWARZ	ESU8	S05562	2019-07-09	2020-07-31

NOTE

(*)Used before due date

END OF TEST REPORT