



Report No.: FCC 2001009
File reference No.: 2020-06-09

Applicant: INNOVATION&PERFECT ENTERPRISES LIMITED

Product: Video door bell

Model No.: PAC009

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: June 09, 2020

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC2001009 Page 2 of 94

Date: 2020-06-09



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 94

Report No.: FCC2001009

Date: 2020-06-09



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT.	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
5.1	Test Method and Test Procedure.	13
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	14
7.0	6dB Bandwidth Measurement	23
8.0	Maximum Output Power	43
9.0	Power Spectral Density Measurement.	46
10.0	Out of Band Measurement.	64
11.0	Antenna Requirement.	82
12.0	FCC ID Label.	83
13.0	Photo of Test Setup and EUT View.	84

Report No.: FCC2001009 Page 4 of 94

Date: 2020-06-09



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: INNOVATION&PERFECT ENTERPRISES LIMITED

Address: Rm 804, Sino Centre, 582-592 Nathan Rd., Kn, HongKong

Telephone: 852-23840332 Fax: 852-27717211

1.3 Description of EUT

Product: Video door bell

Manufacturer: DongGuan JuYang Interprises Co., Ltd

Address: No. 168, San Jiang Industrial Park, HengLi Town, DONGGUAN CITY

Guangdong Province 523460

Brand Name: N/A

Model Number: PAC009

Additional Model Number: N/A

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20/40): OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz, IEEE 802.11n (HT40): 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n (HT20/HT40)

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/HT40: mcs0-mcs9

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels. IEEE 802.11n (HT40): 7 Channels

Antenna: Integral antenna used. The gain of the antennas is 2.0dBi.

Rating: AC16V, 160mA or Built-in DC3.7V, 600mAh Li-ion battery

1.4 Submitted Sample: 1 Samples

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC2001009 Page 5 of 94

Date: 2020-06-09



1.5 Test Duration 2020-06-02 to 2020-06-09

Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty = 6.0dB Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

Terry Tang The sample tested by

Print Name: Terry Tang

Page 6 of 94

Report No.: FCC2001009

Date: 2020-06-09



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2019-06-21	2020-06-20
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2020-06-20	2020-06-20
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2020-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2019-08-22	2020-08-21
Power sensor	Anritsu	MA2491A	32263	2019-08-22	2020-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2019-06-21	2020-06-20
EMI Test Receiver	RS	ESH3	860904/006	2019-06-21	2020-06-20
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2019-06-21	2020-06-20
Spectrum	HP/Agilent	E4407B	MY50441392	2019-06-21	2020-06-20
Spectrum	RS	FSP	1164.4391.38	2020-01-18	2021-01-17
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2019-06-21	2020-06-20
RF Cable	Zhengdi	7m		2019-06-21	2020-06-20
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2019-06-21	2020-06-20
LISN	SCHAFFNER	NNB42	00012	2020-01-07	2021-01-06

Report No.: FCC2001009 Page 7 of 94

Date: 2020-06-09



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: msc0 data rate (worst case) were chosen for full testing

Note: During the test, duty cycle>98%

Page 8 of 94

Report No.: FCC2001009

Date: 2020-06-09



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
CCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: FCC2001009

Date: 2020-06-09



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

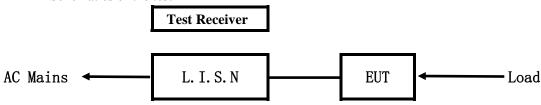


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

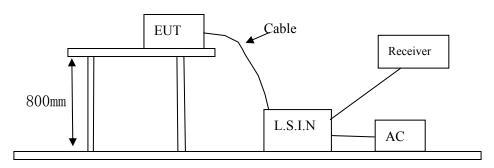

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Video door bell	DongGuan JuYang Interprises Co., Ltd	PAC009	2AVS6-PAC009

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Cable
AC/DC Regulated	RJE	QJ3005	
Power Supply			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC2001009 Page 10 of 94

Date: 2020-06-09



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB μ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5 00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2020-06-09



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity:75%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

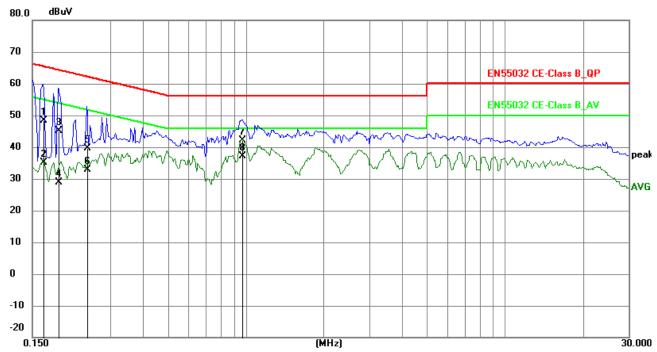

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1655	38.67	9.77	48.44	65.18	-16.74	QP	Р
2	0.1655	25.29	9.77	35.06	55.18	-20.12	AVG	Р
3	0.1890	35.31	9.76	45.07	64.08	-19.01	QP	Р
4	0.1890	19.08	9.76	28.84	54.08	-25.24	AVG	Р
5	0.2436	29.91	9.75	39.66	61.97	-22.31	QP	Р
6	0.2436	23.21	9.75	32.96	51.97	-19.01	AVG	Р
7	0.9651	32.36	9.79	42.15	56.00	-13.85	QP	Р
8	0.9651	27.27	9.79	37.06	46.00	-8.94	AVG	Р

Report No.: FCC2001009 Page 12 of 94

Date: 2020-06-09



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity:75%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

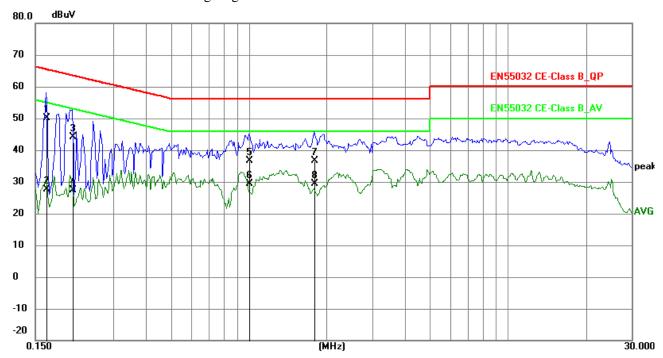

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1655	40.45	9.77	50.22	65.18	-14.96	QP	Р
2	0.1655	17.83	9.77	27.60	55.18	-27.58	AVG	Р
3	0.2085	34.48	9.75	44.23	63.26	-19.03	QP	Р
4	0.2085	17.53	9.75	27.28	53.26	-25.98	AVG	Р
5	1.0002	26.77	9.79	36.56	56.00	-19.44	QP	Р
6	1.0002	19.51	9.79	29.30	46.00	-16.70	AVG	Р
7	1.7841	26.88	9.80	36.68	56.00	-19.32	QP	Р
8	1.7841	19.57	9.80	29.37	46.00	-16.63	AVG	Р

Report No.: FCC2001009 Page 13 of 94

Date: 2020-06-09



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre – Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC2001009 Page 14 of 94

Date: 2020-06-09



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Worse case were recorded in the test report. 802.11g was the worst case.

Page 15 of 94

Report No.: FCC2001009

Date: 2020-06-09




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass



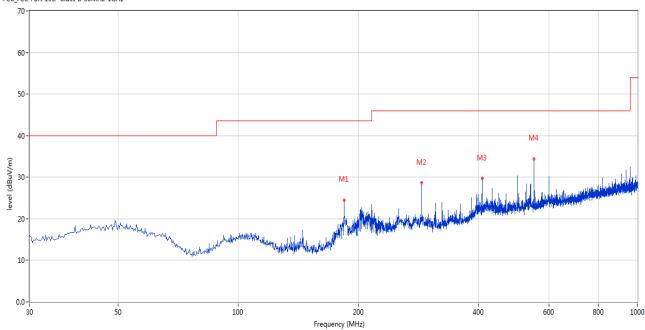

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	183.949	24.56	-14.97	43.5	-18.94	Peak	27.00	200	Н	Pass
2	287.956	28.68	-11.27	46.0	-17.32	Peak	29.00	100	Н	Pass
3	407.963	29.76	-8.47	46.0	-16.24	Peak	174.00	100	Н	Pass
4	550.032	34.44	-6.36	46.0	-11.56	Peak	24.00	200	Н	Pass

Page 16 of 94 Report No.: FCC2001009

Date: 2020-06-09




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

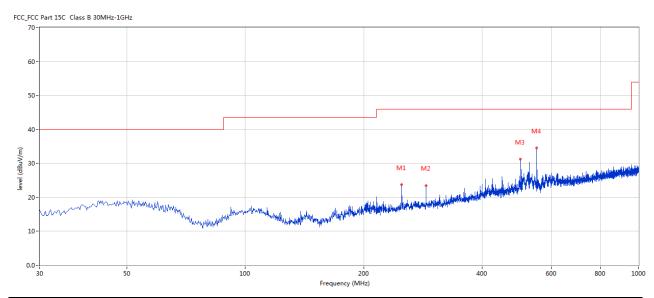

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	249.893	23.71	-12.08	46.0	-22.29	Peak	360.00	200	٧	Pass
2	287.956	23.49	-11.27	46.0	-22.51	Peak	164.00	200	٧	Pass
3	500.090	31.19	-6.91	46.0	-14.81	Peak	267.00	100	٧	Pass
4	550.032	34.49	-6.36	46.0	-11.51	Peak	142.00	100	V	Pass


Report No.: FCC2001009 Page 17 of 94

Date: 2020-06-09



Please refer to the following test plots for details:

CH01 for 11g at 6Mbps: Horizontal

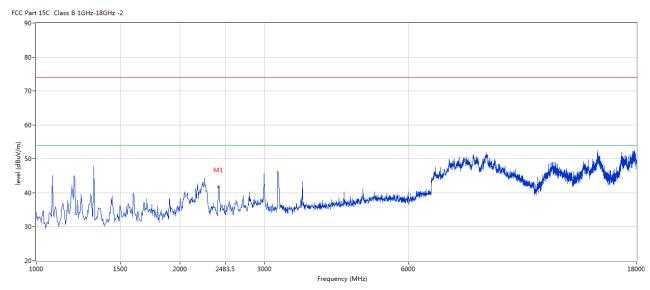

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2406.398	41.80	-3.57	54.0	-12.20	Peak	79.00	100	Н	Pass


Report No.: FCC2001009 Page 18 of 94

Date: 2020-06-09



CH01 for 11g at 6Mbps: Vertical



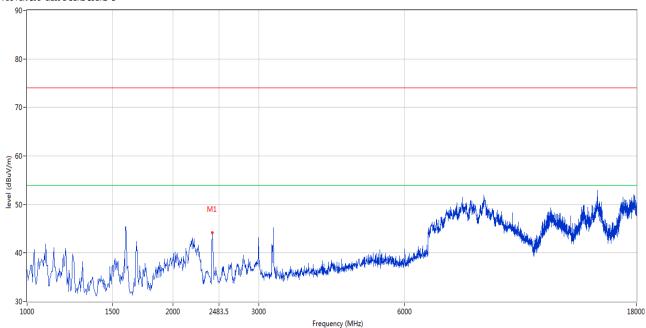


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	2406.398	44.12	-3.57	54.0	-9.88	Peak	83.00	100	V	Pass

Report No.: FCC2001009 Page 19 of 94

Date: 2020-06-09



CH06 for 11g at 6Mbps: Vertical

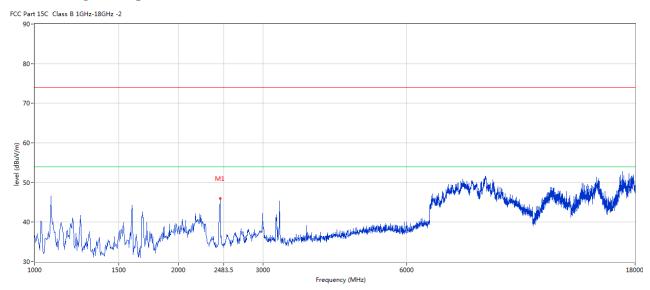


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2444.639	46.01	-3.57	54.0	-7.99	Peak	78.00	100	٧	Pass

Report No.: FCC2001009 Page 20 of 94

Date: 2020-06-09



CH06 for 11g at 6Mbps: Horizontal

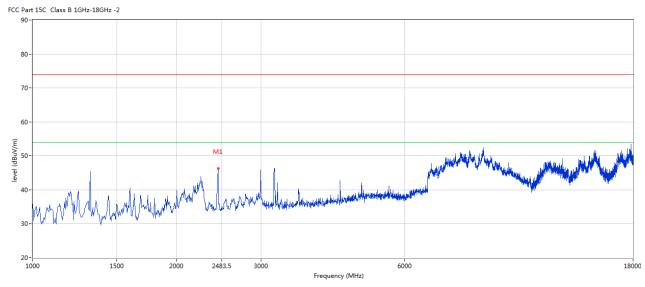


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	2440.390	46.29	-3.57	54.0	-7.71	Peak	91.00	100	Н	Pass

Report No.: FCC2001009 Page 21 of 94

Date: 2020-06-09



CH11 for 11g at 6Mbps: Vertical

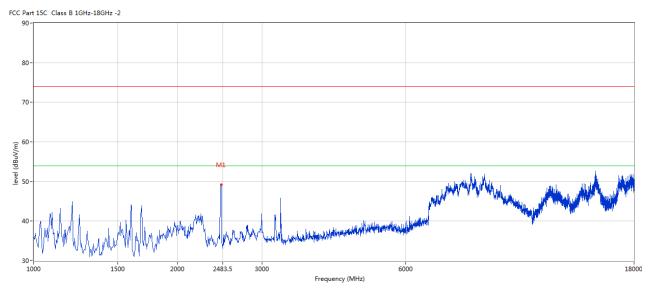


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2465.884	49.21	-3.57	54.0	-4.79	Peak	96.00	100	V	Pass

Report No.: FCC2001009 Page 22 of 94

Date: 2020-06-09



CH11 for 11g at 6Mbps: Horizontal

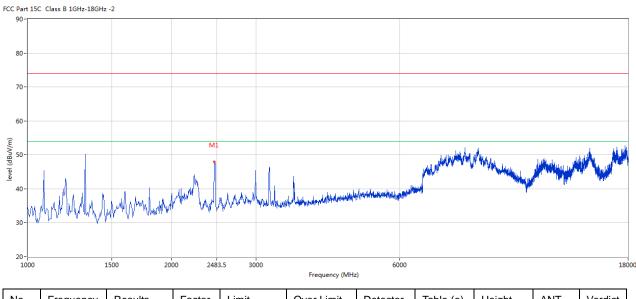

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2453.137	47.97	-3.57	54.0	-6.03	Peak	98.00	100	Н	Pass

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise.
- 5. The Peak measurement level less than the AV limit, no necessary to record the AV measurement.
- 6. During the test, a 2.4GHz Band-pass filter used.


Report No.: FCC2001009 Page 23 of 94

Date: 2020-06-09



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 24 of 94 Report No.: FCC2001009

Date: 2020-06-09



6dB Occupied Bandwidth


EUT		Vide	o door bell		Model		PAG	C009
Mode		8	302.11b		Input Vol	tage	DC	3.7V
Temperat	ure	24 deg. C,			Humidity	,	56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
1		2412		10.16		0.5		Pass
6		2437	1	10	.04		0.5	Pass
11		2462	1	10	.04		0.5	Pass
1		2412	11	8.	42		0.5	Pass
6		2437 11		8.42		42 0.5		Pass
11	2462		11	8.72		0.5		Pass

Page 25 of 94 Report No.: FCC2001009

Date: 2020-06-09



1. 802.11b at 1Mbps of CH01

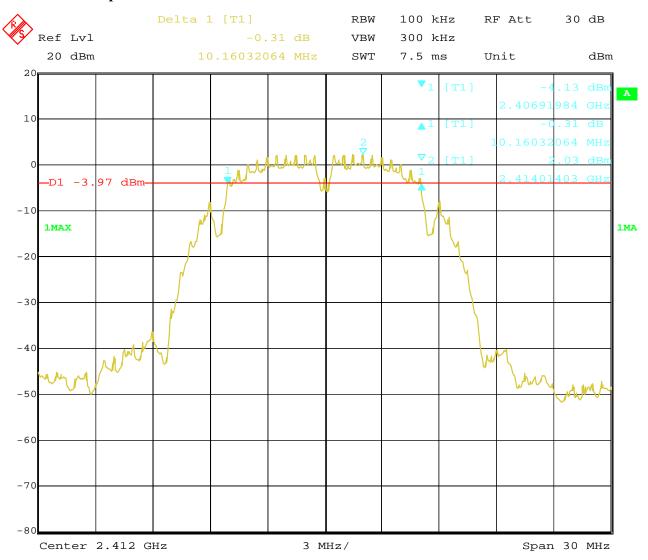


Page 26 of 94 Report No.: FCC2001009

Date: 2020-06-09



2. 802.11b at 1Mbps of CH06

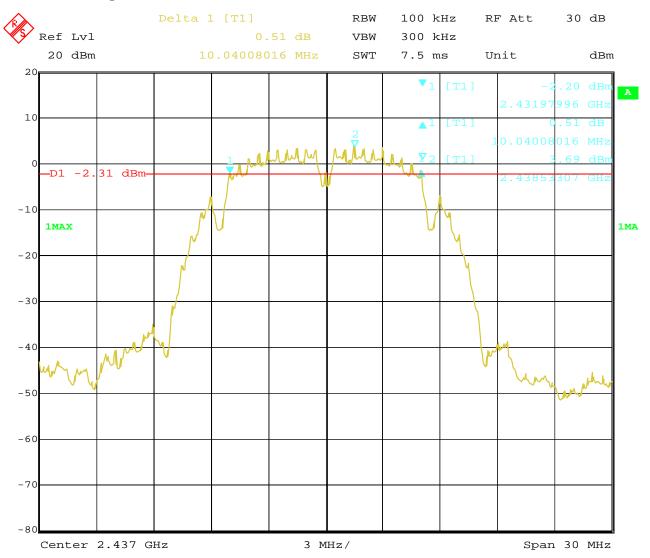


Page 27 of 94 Report No.: FCC2001009

Date: 2020-06-09



3. 802.11b at 1Mbps of CH11

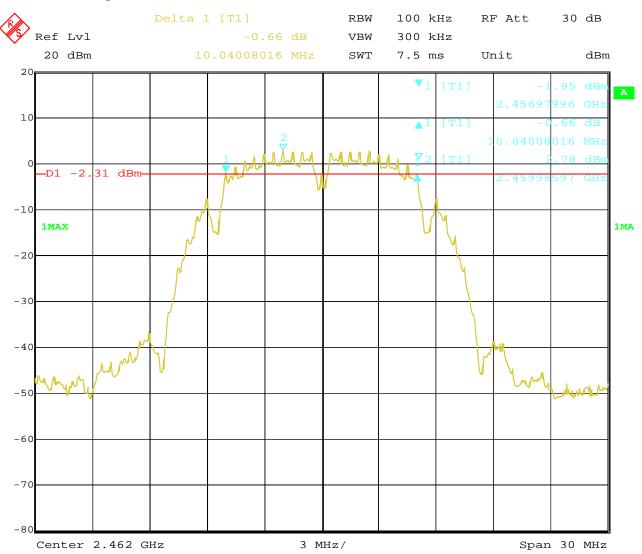


Page 28 of 94 Report No.: FCC2001009

Date: 2020-06-09



4. 802.11b at 11Mbps of CH01

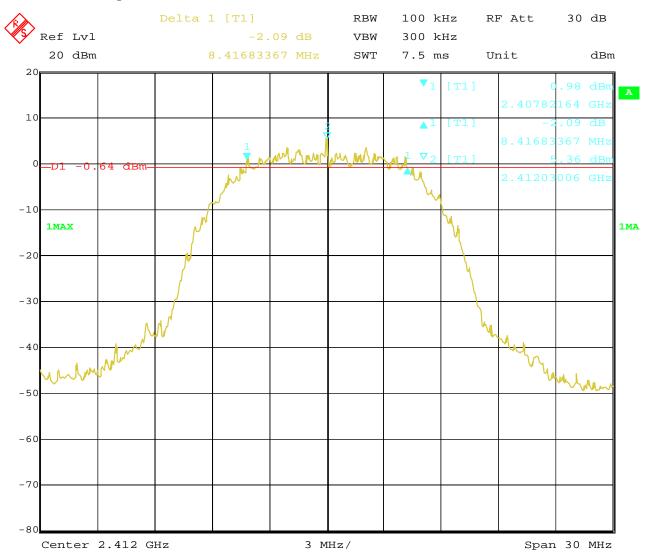


Report No.: FCC2001009 Page 29 of 94

Date: 2020-06-09



5. 802.11b at 11Mbps of CH06

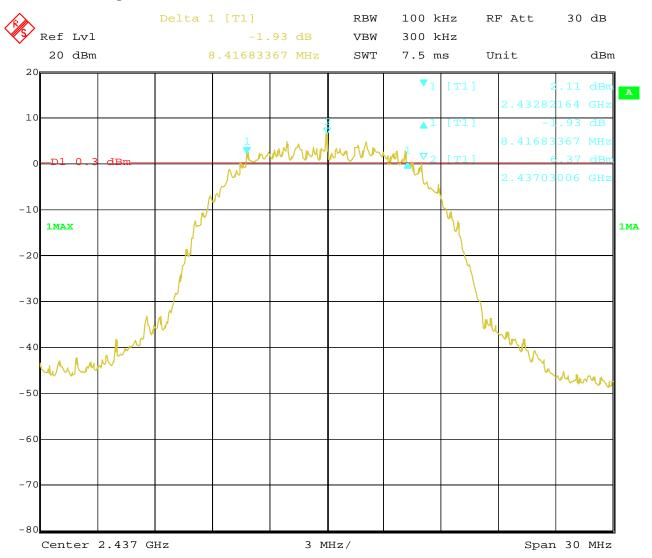


Report No.: FCC2001009 Page 30 of 94

Date: 2020-06-09



6. 802.11b at 11Mbps of CH11

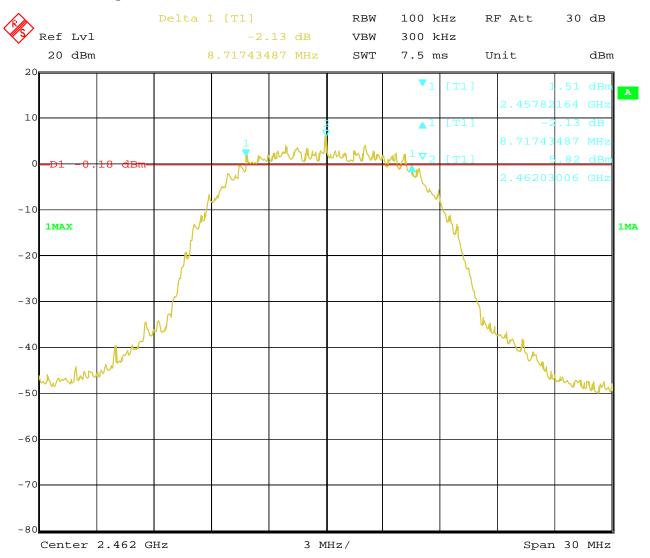

Page 31 of 94 Report No.: FCC2001009

Date: 2020-06-09



6dB Occupied Bandwidth

EUT		Vide	o door bell		Model		P	PAC009
Mode		8	302.11g		Input Vol	tage	Γ	DC3.7V
Temperat	ure	24	4 deg. C,		Humidity	r	5	6% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)	l F		Pass/ Fail
1		2412	6	16	5.41		0.5	Pass
6		2437	6	16	.41		0.5	Pass
11	11 2462		6	16.41		0.5		Pass


Report No.: FCC2001009 Page 32 of 94

Date: 2020-06-09



Test Plots:

1. 802.11g at 6Mbps of CH01

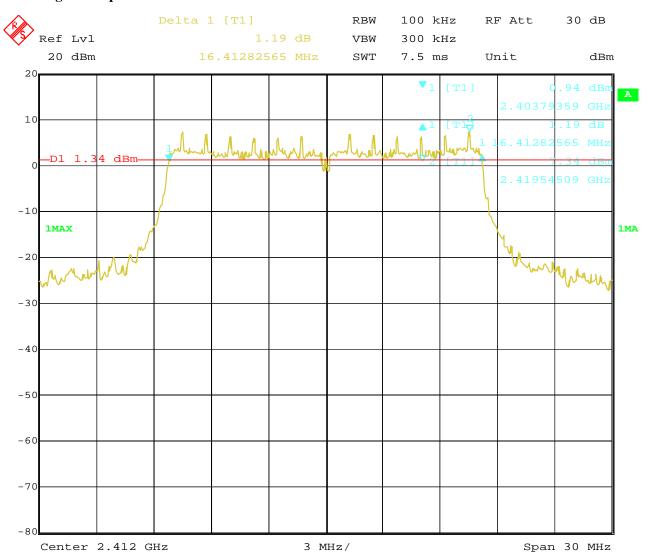


Page 33 of 94 Report No.: FCC2001009

Date: 2020-06-09



2. 802.11g at 6Mbps of CH06

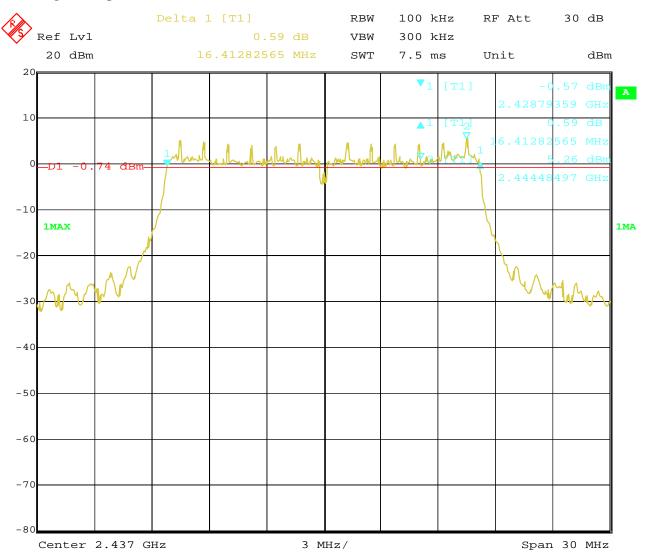


Report No.: FCC2001009 Page 34 of 94

Date: 2020-06-09



3. 802.11g at 6Mbps of CH11

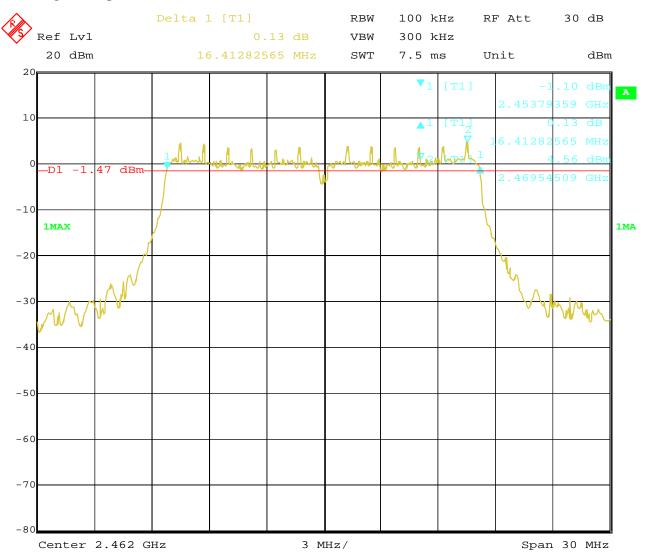

Page 35 of 94 Report No.: FCC2001009

Date: 2020-06-09



6dB Occupied Bandwidth

EUT		Vide	o door bell		Model		PAG	C009
Mode		802	.11n HT20		Input Vol	tage	DC	3.7V
Temperat	ure	24	4 deg. C,		Humidity		56%	% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		num Limit MHz)	Pass/ Fail
1		2412	mcs0	17	.68		0.5	Pass
6		2437	mcs0	17.68			0.5	Pass
11	2462		mcs0	17	.68		0.5	Pass


Report No.: FCC2001009 Page 36 of 94

Date: 2020-06-09



Test Plots:


1. 802.11n at HT20 of CH01

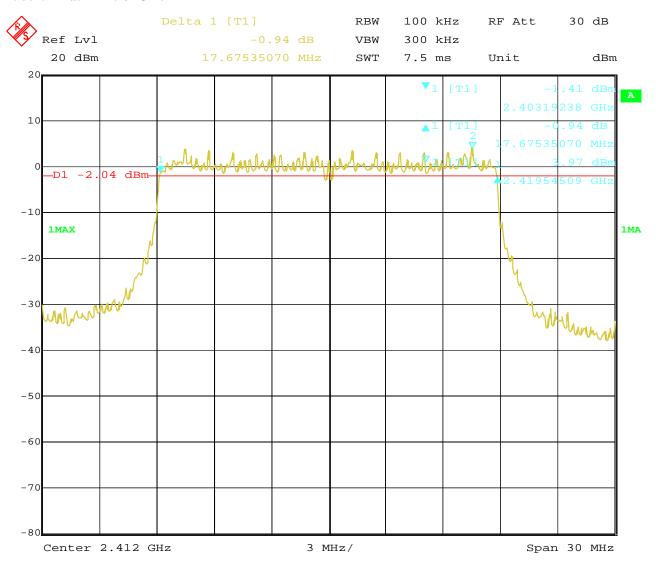

Page 37 of 94 Report No.: FCC2001009

Date: 2020-06-09




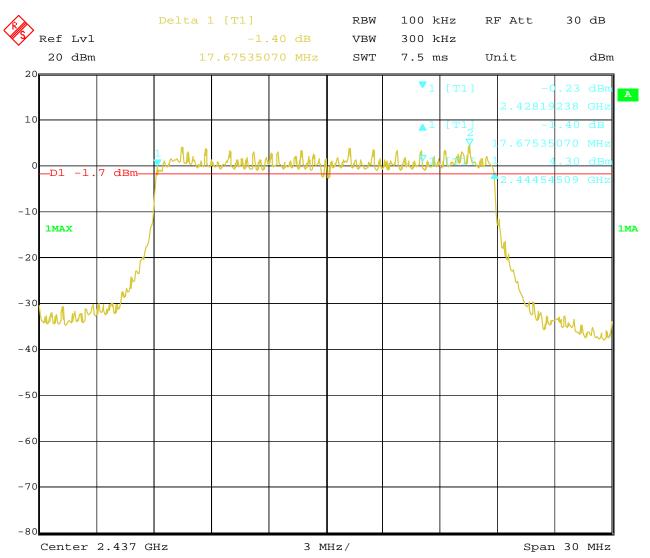

Report No.: FCC2001009 Page 38 of 94

Date: 2020-06-09



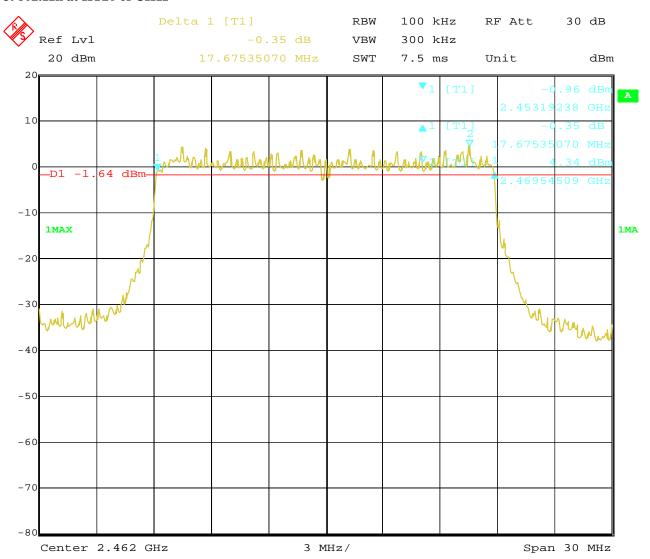

Page 39 of 94 Report No.: FCC2001009

Date: 2020-06-09



6dB Occupied Bandwidth


EUT		Vide	o door bell		Model		PAC009	
Mode		802	.11n HT40		Input Voltage		age DC3.7V	
Temperat	ure	24	4 deg. C,		Humidity		56%	% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		mum Limit MHz)	Pass/ Fail
3		2422	mcs0	36	.35		0.5	Pass
6		2437	mcs0	36	39		0.5 Pa	
9		2452	mcs0	36	.32		0.5	Pass

Report No.: FCC2001009 Page 40 of 94

Date: 2020-06-09




Test Plots:

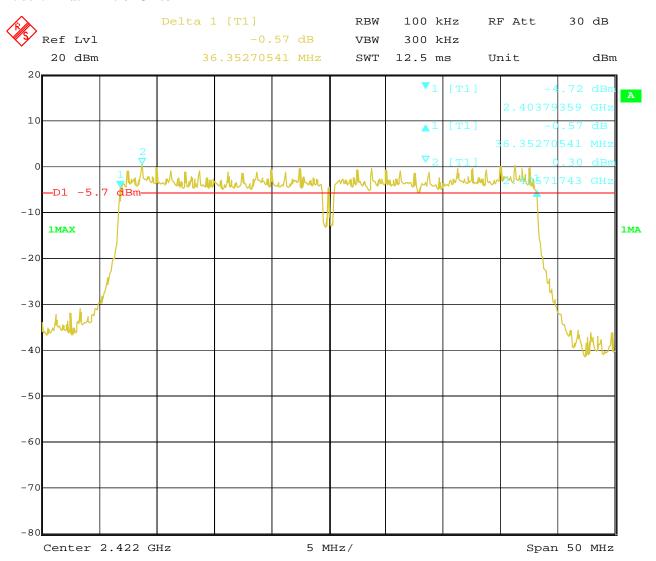

Report No.: FCC2001009 Page 41 of 94

Date: 2020-06-09




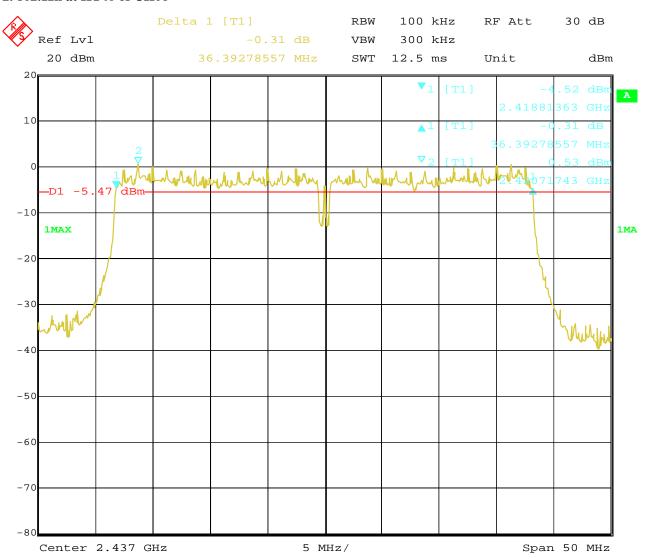

Report No.: FCC2001009 Page 42 of 94

Date: 2020-06-09



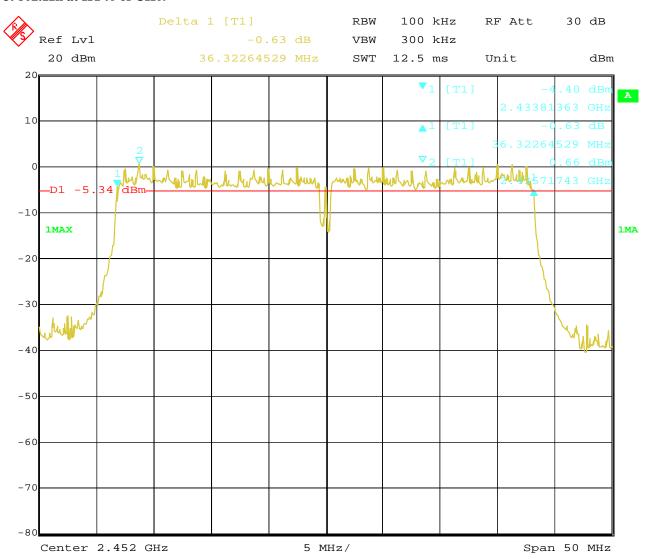

Report No.: FCC2001009


Date: 2020-06-09



Page 43 of 94

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The Peak power was measured

Report No.: FCC2001009 Page 44 of 94

Date: 2020-06-09



8.4Test Results

EUT	Γ Video door		or bell	Model		PAC009		
Mode		802.1	802.11b Input Voltage		Voltage		DC3.7V	
Temperat	ure	24 deg	g. C,	Hur	nidity		56% RH	
Channel	Cha	annel Frequency (MHz)	Max. Power Output (dBm)		Power Limit (dBm)		Pass/ Fail	
1	2412		20.84		30		Pass	
6		2437	21.06		30		Pass	
11		2462	21.29	•	30)	Pass	

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	EUT Video door bell Model		odel	PAC009											
Mode		802.1	lg Input Voltage		802.11g Input		802.11g		Input Voltage		Input Voltage		Input Voltage		DC3.7V
Temperat	ure	24 deg	g. C,	Humidity			56% RH								
Channel	Cha	annel Frequency (MHz)	Max. Power Output (dBm)		Power Limit (dBm)		Pass/ Fail								
1		2412	25.64		30		Pass								
6		2437	25.85		30		Pass								
11		2462	26.07		30)	Pass								

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Report No.: FCC2001009 Page 45 of 94

Date: 2020-06-09



EUT	EUT Video do		oor bell Mo		odel		PAC009	
Mode		802.11n ((HT20)	T20) Input Voltage			DC3.7V	
Temperati	ure	24 deg	g. C,	Humidity		56% RH		
Channel	Cha	annel Frequency (MHz)	Max. Power Output (dBm)		Power Limit (dBm)		Pass/ Fail	
1		2412	23.37		30		Pass	
6		2437	23.48		30		Pass	
11		2462	23.74	30)	Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

The result basic equation calculation as follow:
 Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	T Video doo		oor bell Model		odel		PAC009	
Mode		802.11n ((HT40)	Γ40) Input Voltage			DC3.7V	
Temperat	ure	24 deg	g. C,	Hur	Humidity		56% RH	
Channel	Cha	annel Frequency (MHz)	Max. Power (dBm)	(dBm) Power I (dBr			Pass/ Fail	
3		2422	22.22		30		Pass	
6		2437	22.42		30		Pass	
9		2452	22.52	30)	Pass	

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

2. The result basic equation calculation as follow:Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded


Report No.: FCC2001009 Page 46 of 94

Date: 2020-06-09



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Page 47 of 94 Report No.: FCC2001009

Date: 2020-06-09



9.4Test Result

EUT	Video door bell		or bell	Model		PAC009	
Mode	Mode 802.11b 11Mbps Input Voltag		Voltage		DC3.7V		
Temperat	ure	24 deg	g. C,	Humidity			56% RH
Channel	Cha	annel Frequency (MHz)	PSD (dBr	m) Maximur (dB			Pass/ Fail
			11Mbps	S			
1		2412	-0.23		8		Pass
6		2437	0.29		8		Pass
11		2462	0.23	8		Pass	

EUT	Video do		oor bell Mo		odel		PAC009
Mode	Mode 802.11b 1Mbps Input Voltage		Voltage	DC3.7V			
Temperat	ure	24 deg	g. C,	Humidity			56% RH
Channel	Ch	annel Frequency (MHz)	PSD (dBr	m) Maximum (dBr			
			1Mbps	3			
1		2412	-2.57	•	8		Pass
6		2437	-2.34		8		Pass
11		2462	-2.46		8		Pass

Page 48 of 94 Report No.: FCC2001009

Date: 2020-06-09



EUT	UT Video do		oor bell Mo		odel		PAC009
Mode	Mode 802.11g 6Mbps Input Vol		Voltage		DC3.7V		
Temperat	ure	24 deg	g. C,	Humidity			56% RH
Channel	Cha	annel Frequency (MHz)	PSD (dBm)		Maximum Limit (dBm)		Pass/ Fail
			6Mbps				
1		2412	-1.48		8		Pass
6		2437	-1.32		8		Pass
11		2462	-1.02	8			Pass

EUT	EUT Video do		oor bell Mo		odel		PAC009	
Mode	Mode 802.11n HT20 mcs0 Input Vol		Voltage		DC3.7V			
Temperat	ure	24 deg	g. C,	Humidity			56% RH	
Channel	Cha	annel Frequency (MHz)	PSD (dBm)		Maximum Limit (dBm)		Pass/ Fail	
			HT20					
1		2412	-2.00		8		Pass	
6		2437	-1.88		8		Pass	
11		2462	-1.82	8			Pass	

EUT		Video do	oor bell Mod		odel		PAC009
Mode	Mode 802.11n HT40 msc0 Input Vo		Voltage		DC3.7V		
Temperat	ure	24 deg	g. C,	Humidity			56% RH
Channel	Cha	annel Frequency (MHz)	PSD (dBm)		Maximum Limit (dBm)		Pass/ Fail
			HT40				
1		2422	-6.75		8		Pass
4		2437	-7.14		8		Pass
7		2452	-7.03	•	8		Pass


Report No.: FCC2001009 Page 49 of 94

Date: 2020-06-09



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

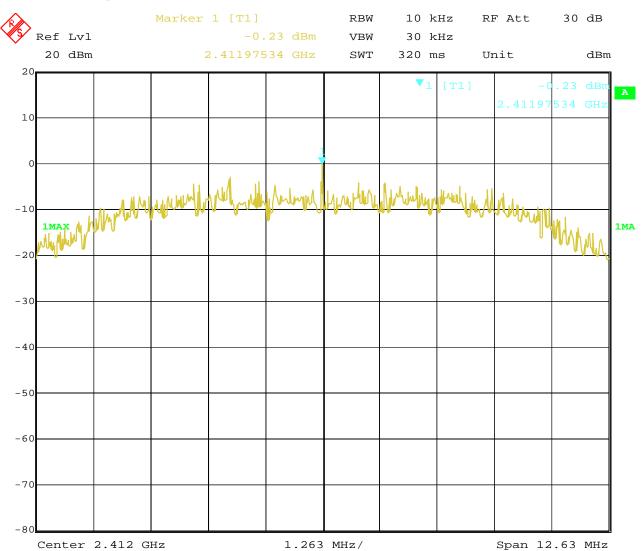


Report No.: FCC2001009 Page 50 of 94

Date: 2020-06-09



2. 802.11b at 11Mbps at CH06

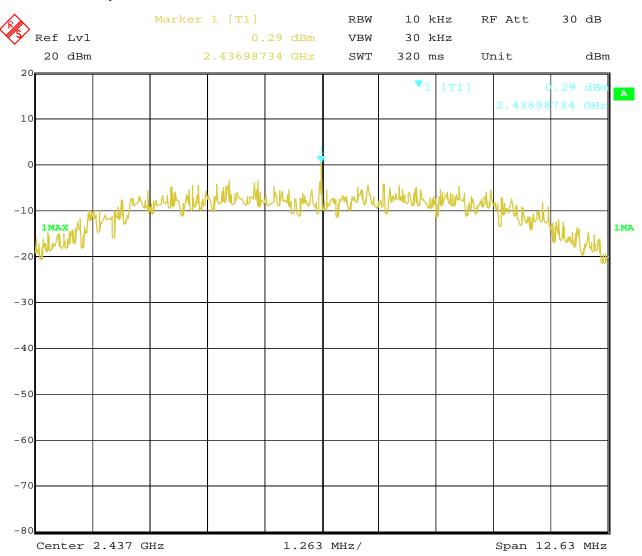


Report No.: FCC2001009 Page 51 of 94

Date: 2020-06-09



3. 802.11b at 11Mbps of CH11

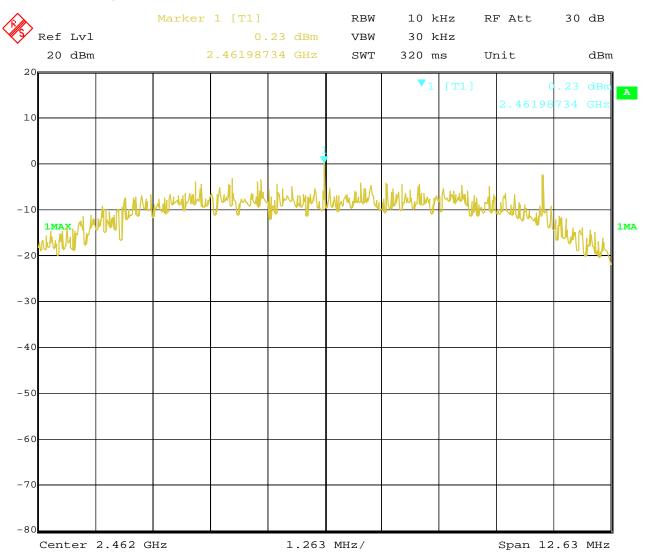


Page 52 of 94 Report No.: FCC2001009

Date: 2020-06-09



4. 802.11b at 1Mbps of CH1

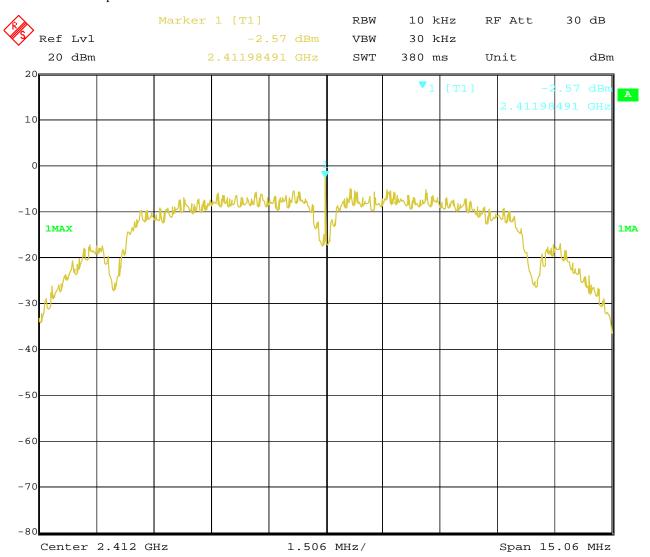


Page 53 of 94 Report No.: FCC2001009

Date: 2020-06-09



5. 802.11b at 1Mbps of CH6

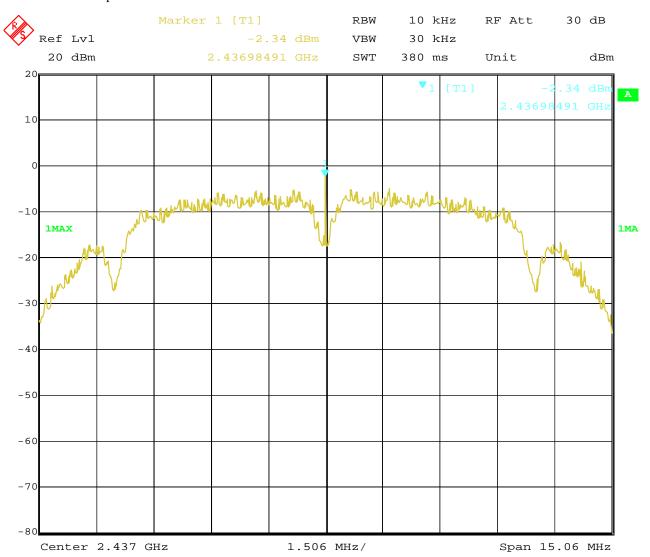


Report No.: FCC2001009 Page 54 of 94

Date: 2020-06-09



6. 802.11b at 1Mbps of CH11

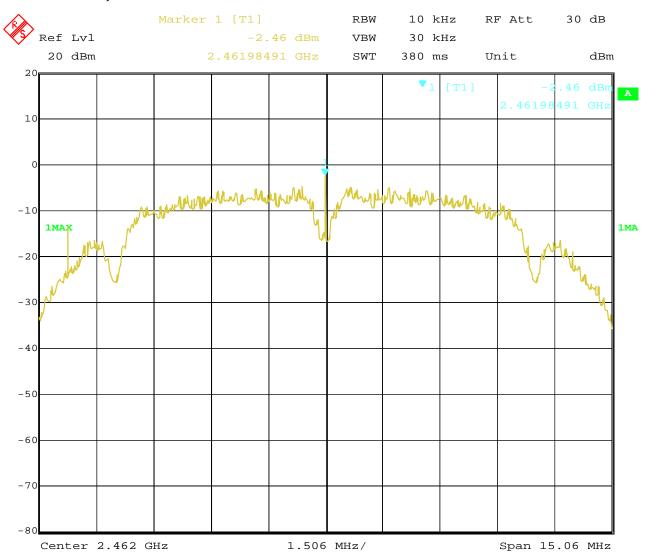


Report No.: FCC2001009 Page 55 of 94

Date: 2020-06-09



7. 802.11g at 6Mbps of CH1

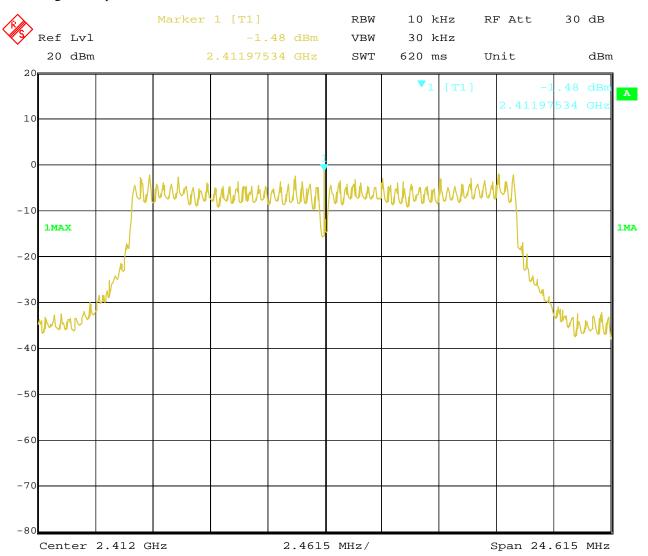


Report No.: FCC2001009 Page 56 of 94

Date: 2020-06-09



8. 802.11g at 6Mbps of CH6

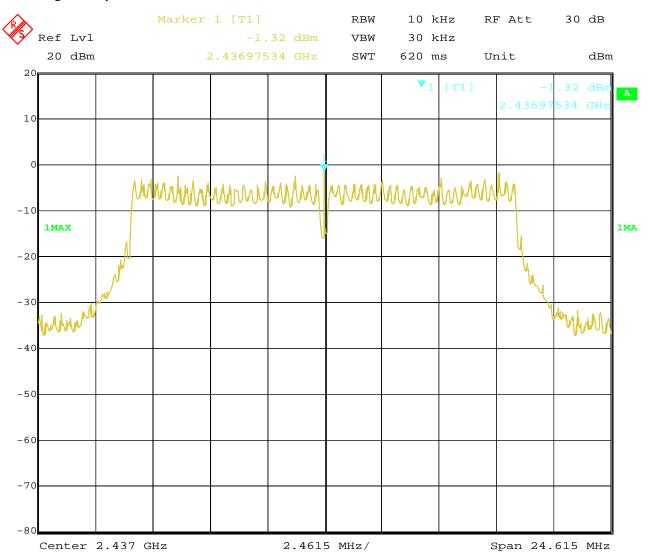


Report No.: FCC2001009 Page 57 of 94

Date: 2020-06-09




9. 802.11g at 6Mbps of CH11

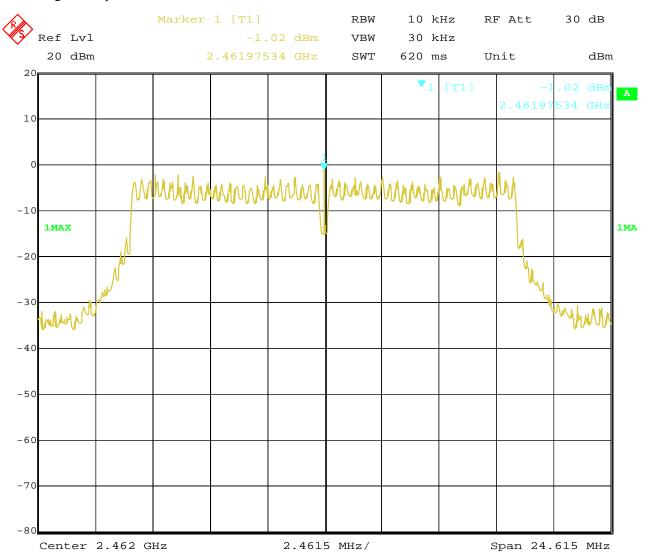

Report No.: FCC2001009 Page 58 of 94

Date: 2020-06-09




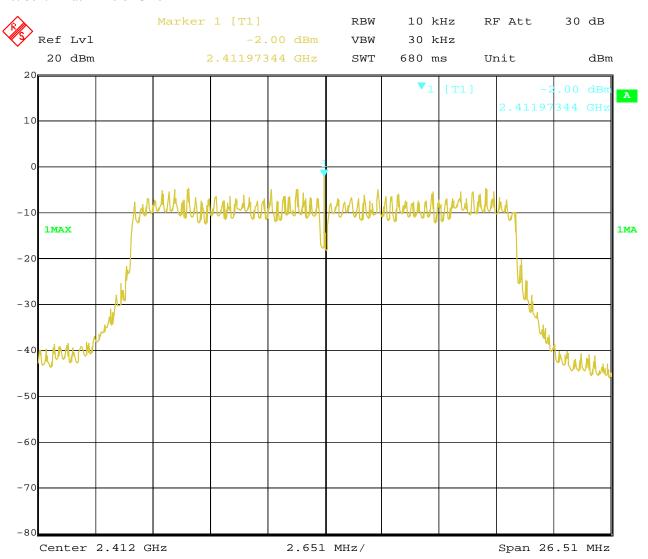

Report No.: FCC2001009 Page 59 of 94

Date: 2020-06-09




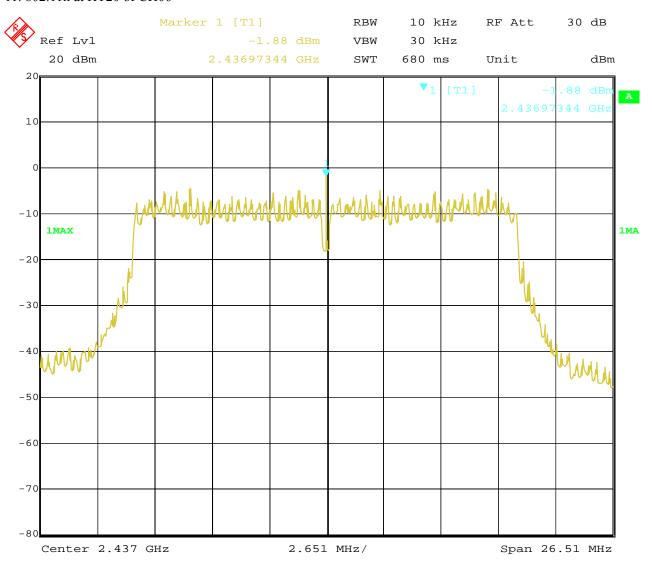

Report No.: FCC2001009 Page 60 of 94

Date: 2020-06-09




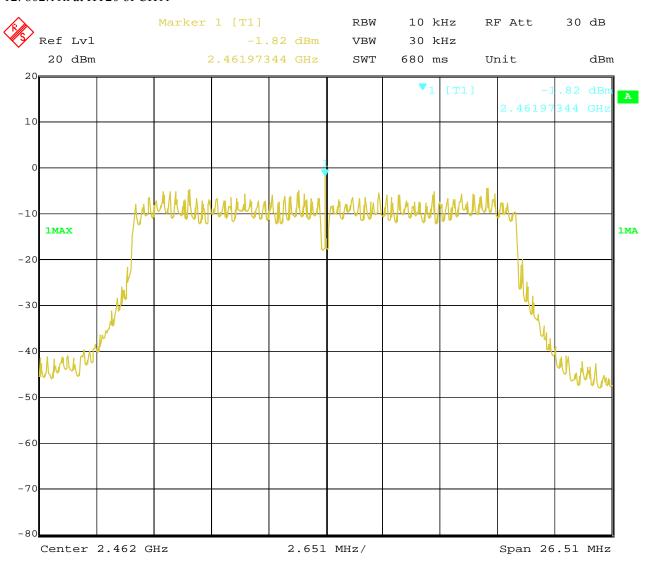

Report No.: FCC2001009 Page 61 of 94

Date: 2020-06-09




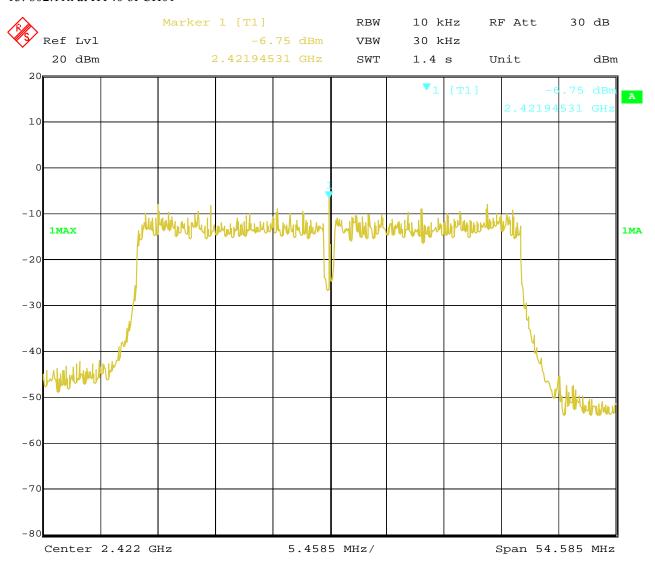

Report No.: FCC2001009 Page 62 of 94

Date: 2020-06-09




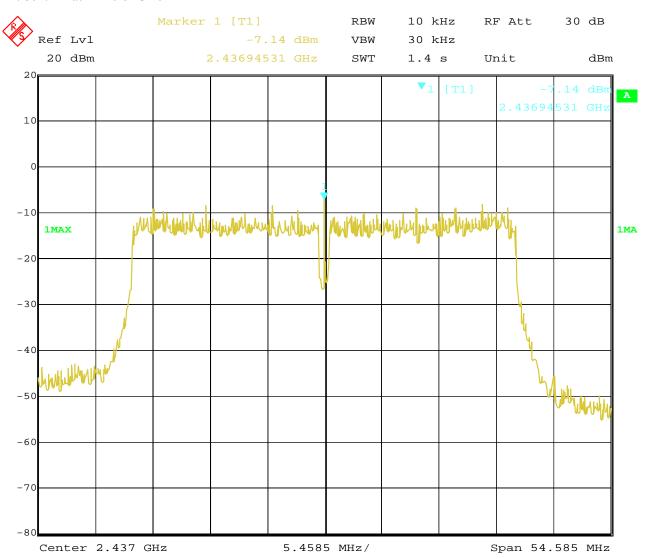

Report No.: FCC2001009 Page 63 of 94

Date: 2020-06-09



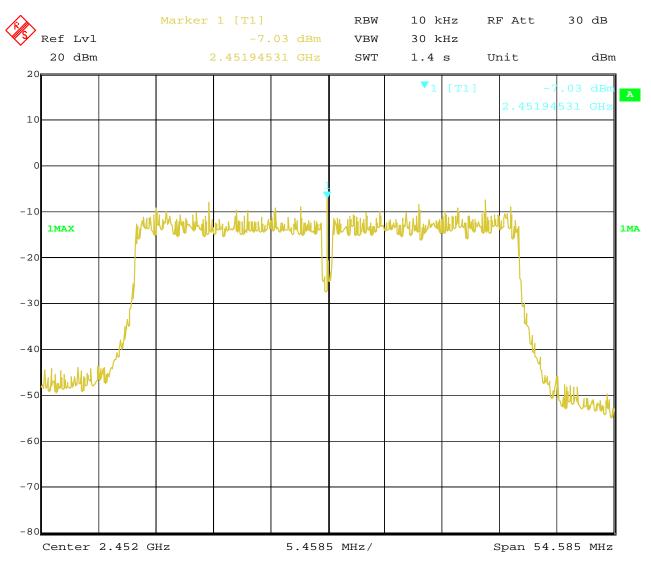


Report No.: FCC2001009

Date: 2020-06-09



Page 64 of 94

10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 65 of 94

Report No.: FCC2001009

Date: 2020-06-09




For 802.11b mode

CH01 at 1Mbps

Band-edge Measurement 10.4

EUT	Video door bell	Model	PAC009
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	Temperature 24 deg. C,		56% RH
Test Result:	Pass	Detector	PK

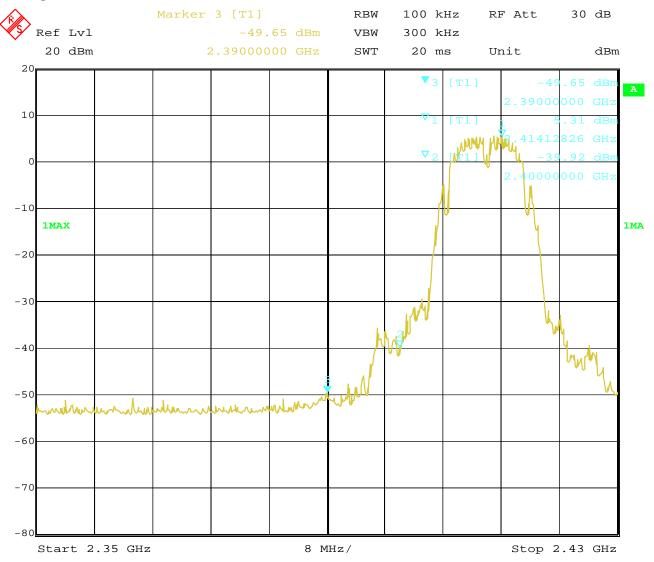

Page 66 of 94

Report No.: FCC2001009


Date: 2020-06-09



CH11 at 1Mbps

10.4 Band-edge Measurement

EUT	Video door bell	Model	PAC009
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

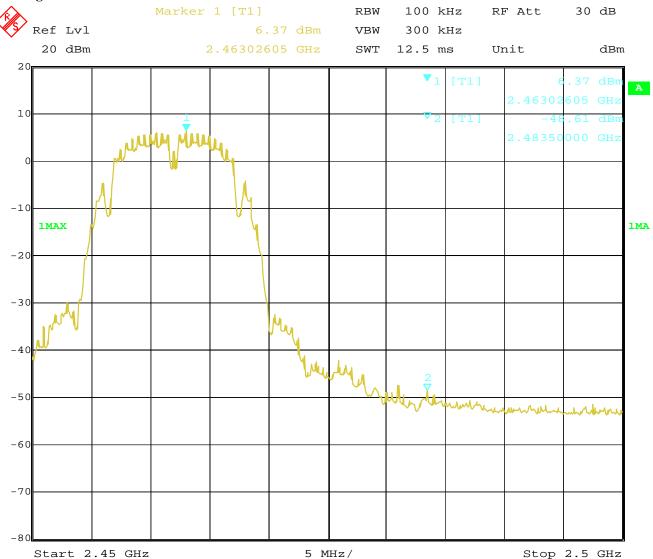

Page 67 of 94

Report No.: FCC2001009

Date: 2020-06-09




For 802.11b mode

CH01 at 11Mbps

Band-edge Measurement 10.4

EUT	Video door bell	Model	PAC009
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

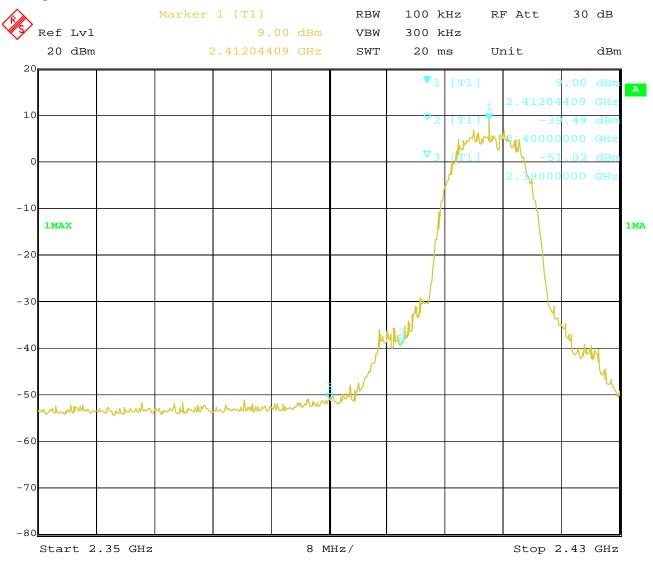

Page 68 of 94

Report No.: FCC2001009


Date: 2020-06-09



CH11 at 11Mbps

10.4 Band-edge Measurement

EUT	Video door bell	Model	PAC009
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

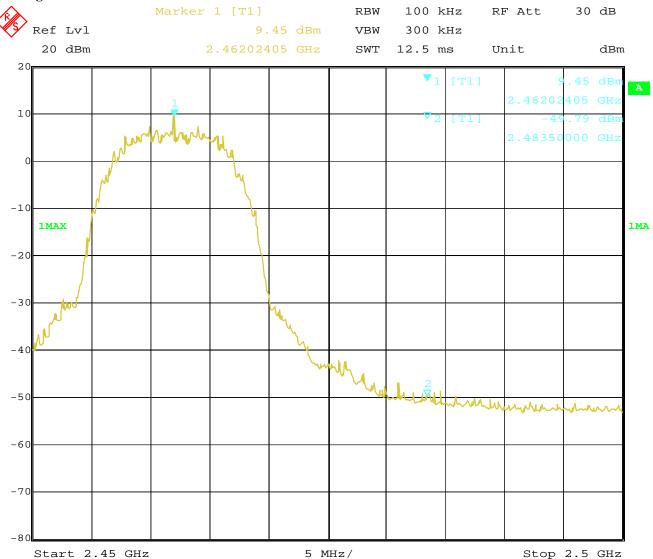

Page 69 of 94

Report No.: FCC2001009

Date: 2020-06-09




For 802.11g mode

CH01 at 6Mbps

10.4 Band-edge Measurement

EUT	Video door bell	Model	PAC009
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

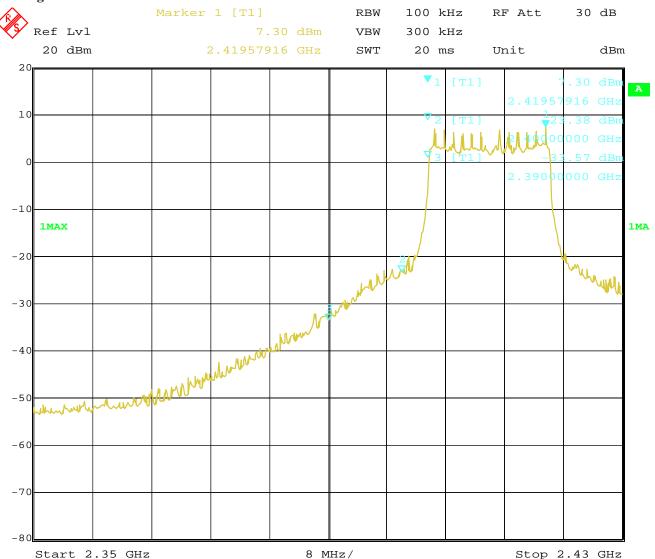

Page 70 of 94

Report No.: FCC2001009


Date: 2020-06-09



CH11 at 6Mbps

10.4 Band-edge Measurement

EUT	Video door bell	Model	PAC009
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

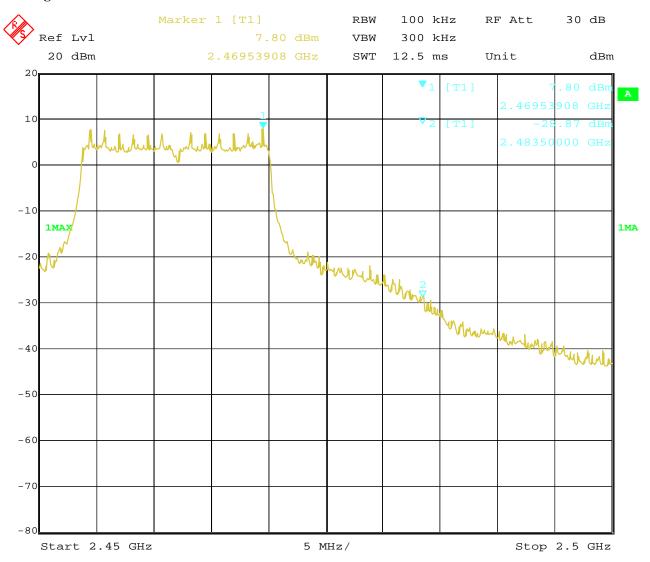

Page 71 of 94

Report No.: FCC2001009

Date: 2020-06-09




For 802.11n (HT20) mode

CH01 at mcs0

Band-edge Measurement 10.4

EUT	Video door bell	Model	PAC009
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

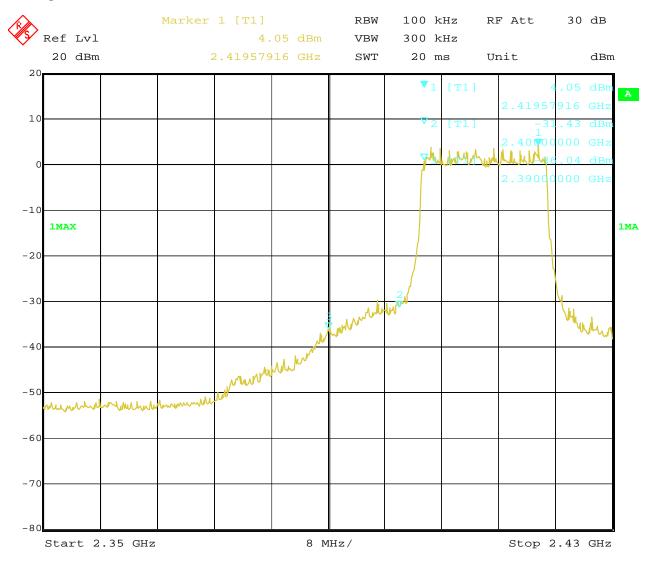

Page 72 of 94

Report No.: FCC2001009


Date: 2020-06-09



CH11 at mcs0

10.4 Band-edge Measurement

EUT	Video door bell	Model	PAC009
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

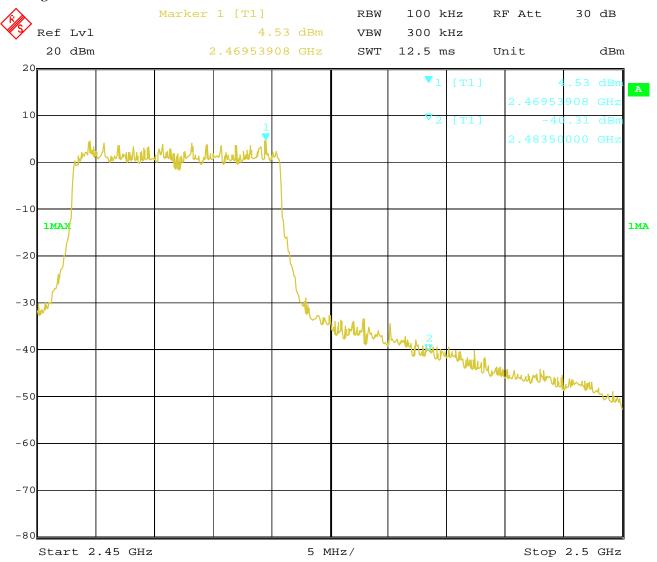

Page 73 of 94

Report No.: FCC2001009

Date: 2020-06-09




For 802.11n (HT40) mode

CH03 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	Video door bell	Model	PAC009
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

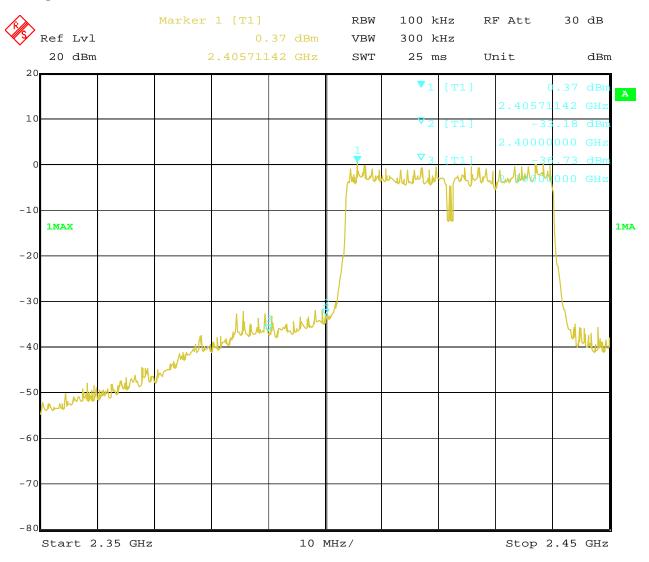

Report No.: FCC2001009 Page 74 of 94

Date: 2020-06-09




CH09 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	Video door bell	Model	PAC009
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

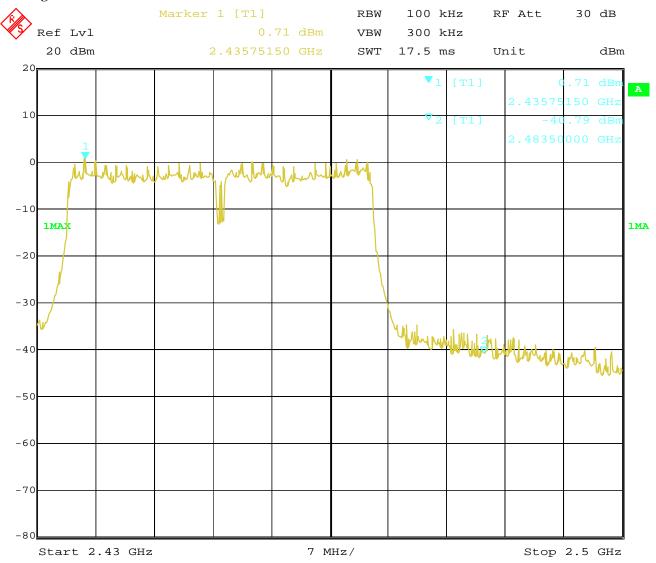

Page 75 of 94 Report No.: FCC2001009

Date: 2020-06-09



10.5 Restricted band Measurement

EUT	Vide	o door bell	Model	PAC009					
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
802.11b mode, Low Channel, Horizontal									
2390	PK (dBµV/m)	55.40	T ::4	$74(dB\mu V/m)$					
	AV (dBμV/m)	34.68	Limit	54(dBμV/m)					
802.11b mode, Low Channel, Vertical									
2390	PK (dBµV/m)	56.87	Limit	74(dBμV/m)					
	AV (dBμV/m)	35.50	Limit	54(dBµV/m)					

10.5 Restricted band intensationient									
EUT	Vide	o door bell	Model	PAC009					
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
802.11b mode, High Channel, Horizontal									
2483.5	PK (dBµV/m)	57.36	T ::4	$74(dB\mu V/m)$					
	AV (dBμV/m)	36.25	Limit	$54(dB\mu V/m)$					
802.11b mode, High Channel, Vertical									
2483.5	PK (dBµV/m)	58.76	T ::4	74(dBμV/m)					
	AV (dBμV/m)	36.51	Limit	$54(dB\mu V/m)$					

Page 76 of 94 Report No.: FCC2001009

Date: 2020-06-09



10.5 Restricted band Measurement

EUT	Vide	o door bell	Model	PAC009					
Mode	Keeping	Transmitting	Input Voltage	DC3.7V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
	802.11g, Low Channel, Horizontal								
2390	PK (dBµV/m)	60.27	T ::4	$74(dB\mu V/m)$					
	AV (dBμV/m)	38.12	Limit	54(dBμV/m)					
	802.11g mode, Low Channel, Vertical								
2390	PK (dBµV/m)	60.82	Limit	$74(dB\mu V/m)$					
	AV (dBμV/m)	38.54	Limit	$54(dB\mu V/m)$					

EUT	Vide	o door bell	Model	PAC009					
Mode	Keeping	Transmitting	Input Voltage	DC3.7V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
	802.11g mode, High Channel, Horizontal								
2483.5	PK (dBμV/m)	62.48	T ::4	$74(dB\mu V/m)$					
	AV $(dB\mu V/m)$	40.08	Limit	$54(dB\mu V/m)$					
		802.11g, High Ch	annel, Vertical						
2483.5	PK (dBμV/m)	61.71	Limit	$74(dB\mu V/m)$					
	AV (dBμV/m)	39.35	Limit	$54(dB\mu V/m)$					

Page 77 of 94 Report No.: FCC2001009

Date: 2020-06-09



10.5 Restricted band Measurement

EUT	Vide	o door bell	Model	PAC009					
Mode	Keeping	Transmitting	Input Voltage	DC3.7V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
802.11n HT20 mode, Low Channel, Horizontal									
2390	PK (dBµV/m)	63.54	T ::4	$74(dB\mu V/m)$					
	AV (dBμV/m)	40.21	Limit	54(dBµV/m)					
	802.11n HT20 mode, Low Channel, Vertical								
2390	PK (dBµV/m)	63.79	Limit	74(dBμV/m)					
	AV (dBμV/m)	40.55	Limit	54(dBµV/m)					

EUT	Vide	o door bell	Model	PAC009					
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
	802.11n HT20 mode, High Channel, Horizontal								
2483.5	PK (dBμV/m)	64.26	T ::4	74(dBμV/m)					
	AV $(dB\mu V/m)$	41.43	Limit	$54(dB\mu V/m)$					
	8	02.11n HT20 mode, H	igh Channel, Verti	cal					
2483.5	PK (dBμV/m)	63.51	Limit	74(dBμV/m)					
	AV (dBμV/m)	40.12	LIIIII	$54(dB\mu V/m)$					

Page 78 of 94

Report No.: FCC2001009


Date: 2020-06-09



10.5 Restricted band Measurement

EUT	Vide	o door bell	Model	PAC009					
Mode	Keeping	Transmitting	Input Voltage	DC3.7V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
	802.11n HT40 mode, Low Channel, Horizontal								
2390	PK (dBµV/m)	65.30	T ::4	$74(dB\mu V/m)$					
	AV (dBμV/m)	46.54	Limit	54(dBµV/m)					
	802.11n HT40 mode, Low Channel, Vertical								
2390	PK (dBμV/m)	65.77	Limit	74(dBµV/m)					
	AV (dBμV/m)	47.97	Limit	54(dBµV/m)					

Test Plots

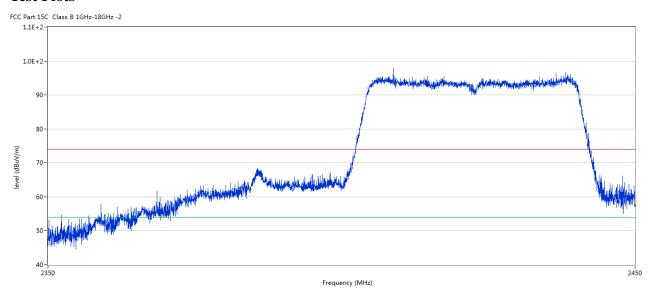

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1**	2390.515	47.97	-3.54	54.0	-6.03	AV	0.00	100	V	Pass
1	2390.515	65.77	-3.54	74.0	-8.23	Peak	0.00	100	V	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC2001009 Page 79 of 94

Date: 2020-06-09



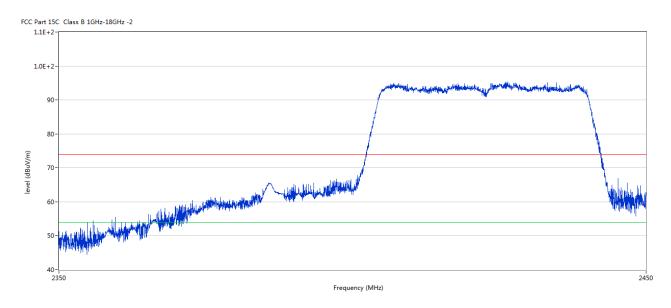


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1**	2389.540	46.54	-3.53	54.0	-7.46	AV	360.00	100	Н	Pass
1	2389.540	65.30	-3.53	74.0	-8.70	Peak	360.00	100	Н	Pass

Report No.: FCC2001009 Page 80 of 94

Date: 2020-06-09



EUT	Vide	o door bell	Model	PAC009				
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
802.11n HT40 mode, High Channel, Horizontal								
2483.5	PK (dBµV/m)	65.37	T ::4	$74(dB\mu V/m)$				
	AV (dBμV/m)	40.25	Limit	$54(dB\mu V/m)$				
802.11n HT40 mode, High Channel, Vertical								
2483.5	PK (dBμV/m)	64.17	Limit	74(dBμV/m)				
	AV (dBμV/m)	41.11	Limit	$54(dB\mu V/m)$				

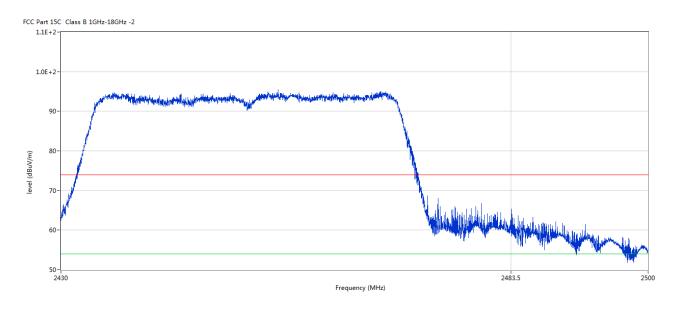


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1**	2483.519	40.25	-3.57	54.0	-13.75	AV	360.00	100	Н	Pass
1	2483.519	65.37	-3.57	74.0	-8.63	Peak	360.00	100	Н	Pass

Page 81 of 94

Report No.: FCC2001009

Date: 2020-06-09



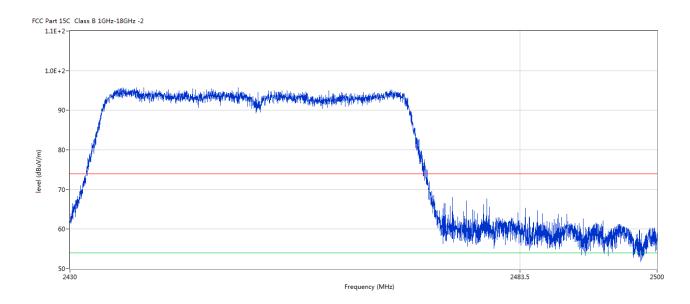

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1**	2483.239	41.11	-3.57	54.0	-12.89	AV	204.00	100	V	Pass
1	2483.239	64.17	-3.57	74.0	-9.83	Peak	204.00	100	V	Pass

Report No.: FCC2001009

Date: 2020-06-09



Page 82 of 94

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The gain of the antennas is 2.0dBi.

Report No.: FCC2001009 Page 83 of 94

Date: 2020-06-09




12.0 FCC ID Label

FCC ID: 2AVS6-PAC009

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

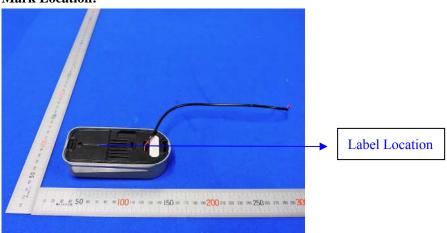

Report No.: FCC2001009 Page 84 of 94

Date: 2020-06-09



13.0 Photo of testing

Conducted Emission Test Setup:




Page 85 of 94

Report No.: FCC2001009

Date: 2020-06-09



Radiated Emission Test Setup:

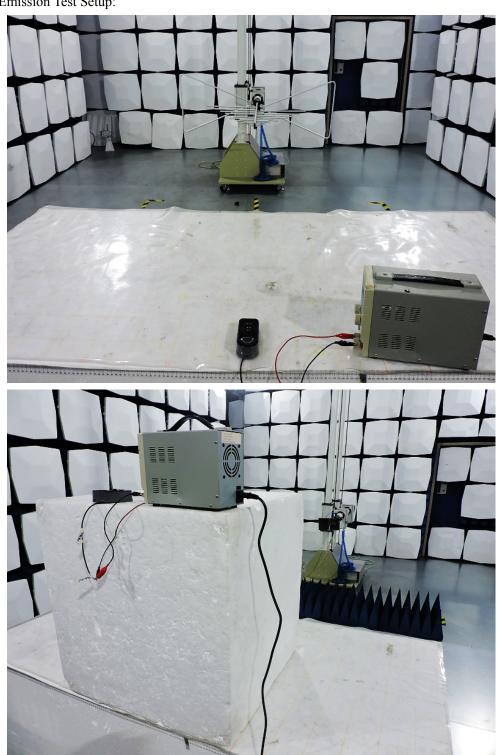

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Report No.: FCC2001009

Date: 2020-06-09



Photographs - EUT

Outside view

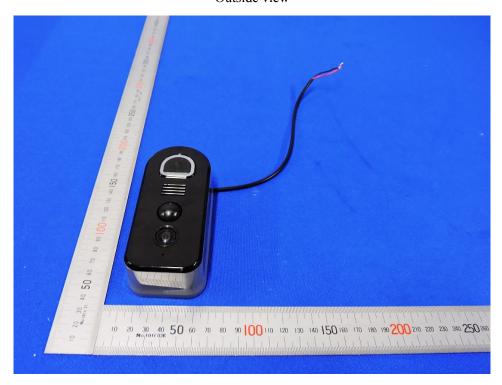



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 87 of 94

Report No.: FCC2001009

Date: 2020-06-09



Outside view

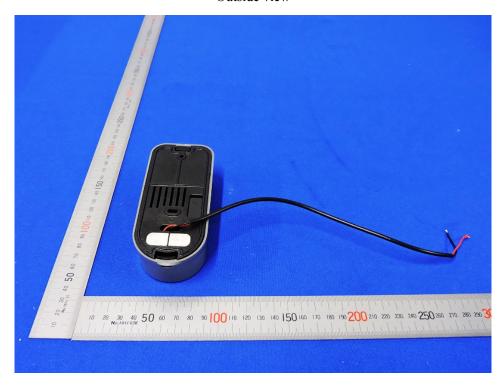



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 88 of 94

Report No.: FCC2001009

Date: 2020-06-09



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 89 of 94


Report No.: FCC2001009

Date: 2020-06-09



Inside view

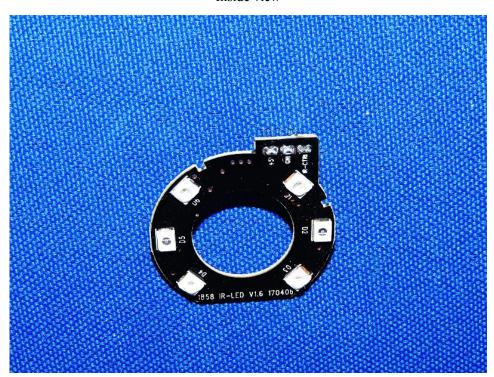

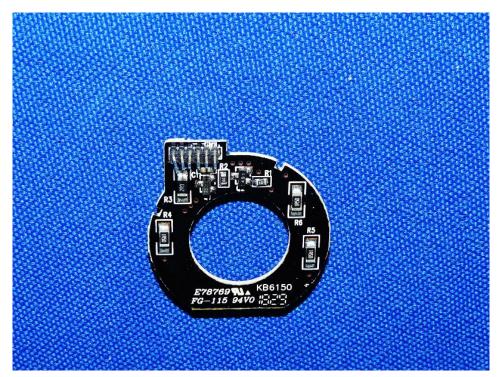

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 90 of 94


Report No.: FCC2001009

Date: 2020-06-09



Inside view

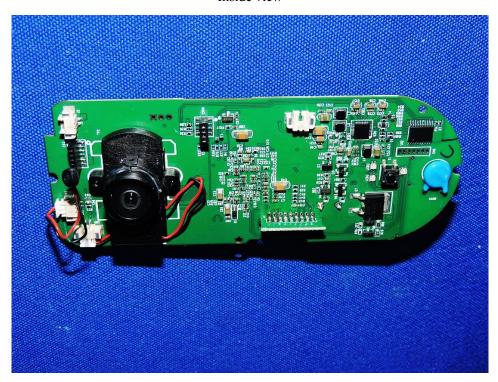

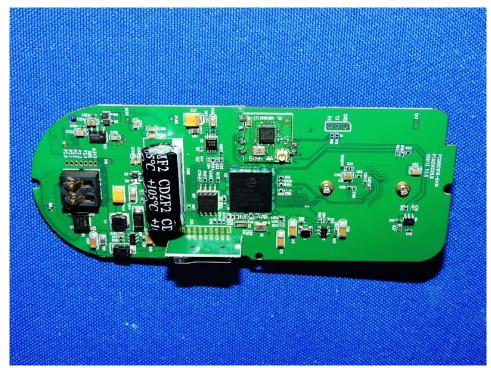

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 91 of 94


Report No.: FCC2001009

Date: 2020-06-09



Inside view

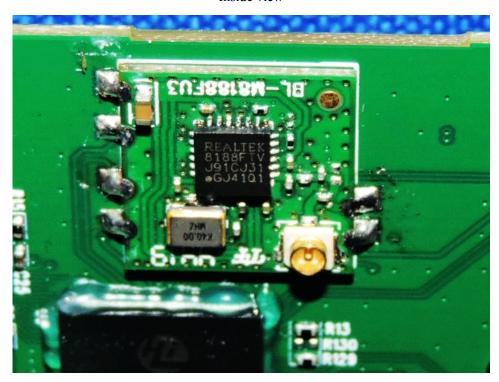

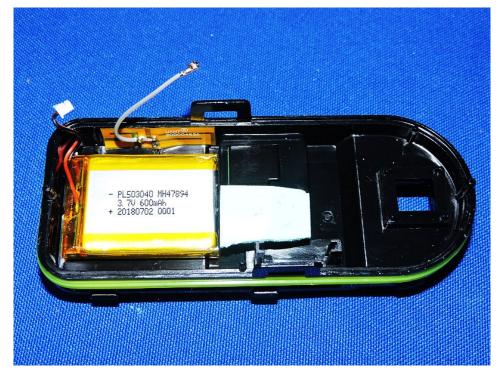

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 92 of 94


Report No.: FCC2001009

Date: 2020-06-09



Inside view

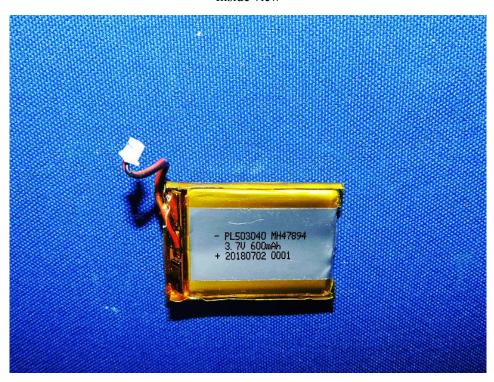

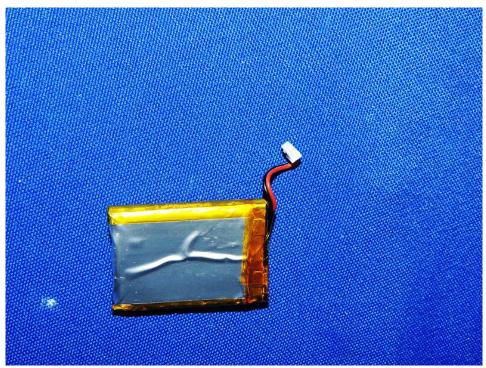

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 93 of 94

Report No.: FCC2001009

Date: 2020-06-09



Inside view

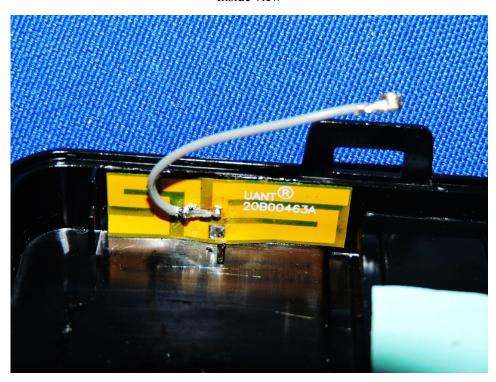



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC2001009 Page 94 of 94

Date: 2020-06-09



Inside view



End of the report