

TEST REPORT

ACCORDING TO:

FCC 47CFR part 15 subpart C §15.247 (DTS) and subpart B, Class B

FOR:

Hoopo Systems Ltd.

FPX3 Gateway

Model: 501A001-1A

FCC ID: 2AVS8-G01

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Test configuration	5
6.3	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Minimum 6 dB bandwidth	7
7.2	Field strength of spurious emissions	10
7.3	Peak output power	24
7.4	Spurious emissions at RF antenna connector	30
7.5	Band edge emissions at RF antenna connector	40
7.6	Peak spectral power density	43
7.7	Conducted emissions	47
7.8	Antenna requirements	51
8	Emission tests according to 47CFR part 15 subpart B requirements	52
8.1	Conducted emissions	52
8.2	Radiated emission measurements	55
9	APPENDIX A Test equipment and ancillaries used for tests	59
10	APPENDIX B Test equipment correction factors	60
11	APPENDIX C Test laboratory description	66
12	APPENDIX D Measurement uncertainties	67
13	APPENDIX E Specification references	68
14	APPENDIX F Abbreviations and acronyms	69

1 Applicant information

Client name: Hoopo Systems Ltd.
Address: 5 Ayalon St., Ramat Hasharon, 4700225 Israel
Telephone: 052-5192244
E-mail: menachem@hoopo.tech
Contact name: Mr. Menachem Tipris

2 Equipment under test attributes

Product name: FPX3 Gateway
Product type: LoRa Gateway
Model(s): 501A001-1A
Serial number: 122U, 123U
Hardware version: 0.0
Software release: 1.5
Receipt date: 28-Nov-19

3 Manufacturer information

Manufacturer name: Hoopo Systems Ltd.
Address: 5 Ayalon St., Ramat Hasharon, 4700225 Israel
Telephone: 052-5192244
E-Mail: menachem@hoopo.tech
Contact name: Mr. Menachem Tipris

4 Test details

Project ID: 35117
Location: Primary: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Satellite: Hermon Laboratories Ltd. Hefetz-Haim 10, Tel Aviv 6744124, Israel
Test started: 26-Dec-19
Test completed: 08-Jan-20
Test specification(s): FCC 47CFR part 15 subpart C §15.247 (DTS) and subpart B, Class B

5 Tests summary

Test	Status
Transmitter characteristics	
FCC section 15.247(a)2 , 6 dB bandwidth	Pass
FCC section 15.247(b)3 , Peak output power	Pass
FCC section 15.247(i) , RF exposure	Pass, the exhibit to the application of certification is provided
FCC section 15.247(d) , Radiated spurious emissions	Pass
FCC section 15.247(d) , Emissions at band edges	Pass
FCC section 15.247) , Peak power density	Pass
FCC section 15.203 , Antenna requirement	Pass
FCC section 15.207(a) , Conducted emission	Pass
Unintentional emissions	
FCC section 15.107 Conducted emission at AC power port	Pass
FCC section 15.109 Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. A. Morozov, test engineer, EMC & Radio Mrs. E Pitt, test engineer, EMC & Radio	26-Dec-19 – 08-Jan-20	 
Reviewed by:	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	03-May-20	
Approved by:	Mr. S. Samokha, technical manager, EMC & Radio	14-June-20	


6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

The EUT, a FPX3 Gateway, bridges the data received from hoopsense sensors via LoRa transmissions to a cloud application for further processing. The EUT communicates with a cloud application via a cellular modem or via wired ethernet. The EUT is powered by external approved POE connection.

6.2 Test configuration

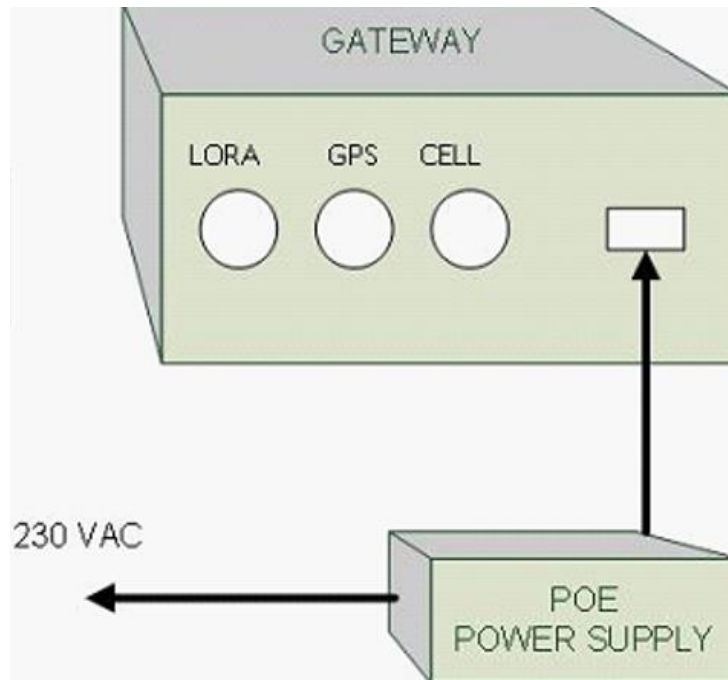

6.3 Transmitter characteristics

Type of equipment						
X	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Intended use		Condition of use				
	fixed	Always at a distance more than 2 m from all people				
X	mobile	Always at a distance more than 20 cm from all people				
	portable	May operate at a distance closer than 20 cm to human body				
Assigned frequency range		902 - 928 MHz				
Operating frequency range		902.5 – 927.5 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector		NA		
		Peak output power		8.75 dBm		
Is transmitter output power variable?		X	No			
		Yes	continuous variable			
			stepped variable with stepsize			
			1 dB			
			dBm			
		dBm				
Antenna connection						
unique coupling	X	standard connector	integral	X with temporary RF connector without temporary RF connector		
Antenna/s technical characteristics						
Type	Manufacturer		Model number		Gain	
External	TAOGLAS		OMB.915.B03F21		-2dBi average, 3.5dBi peak	
Type of modulation		LoRa				
Modulating test signal (baseband)		PRBS				
Transmitter power source						
	Battery	Nominal rated voltage		Battery type		
	DC	Nominal rated voltage	VDC			
X	AC mains	Nominal rated voltage	110 VAC	Frequency	50 Hz	



Test specification: Section 15.247(a)(2), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Minimum 6 dB bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.


7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 6 dB bandwidth test setup





HERMON LABORATORIES

Test specification: Section 15.247(a)(2), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Table 7.1.2 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902-928 MHz
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION: LoRa
BIT RATE: 3.9 kbps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
902.50	601.86	500	101.86	Pass
915.00	604.81	500	104.81	Pass
927.50	604.16	500	104.16	Pass

BIT RATE: 21.9 kbps


Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
902.50	591.74	500	91.74	Pass
915.00	593.36	500	93.36	Pass
927.5	596.05	500	96.047	Pass

Reference numbers of test equipment used


HL 2909	HL 5621	HL 3384					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.1.1 6 dB bandwidth test result at low frequency

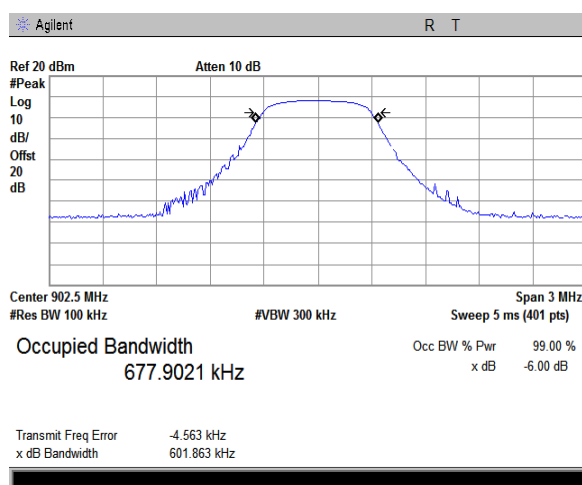

3.9 kbps

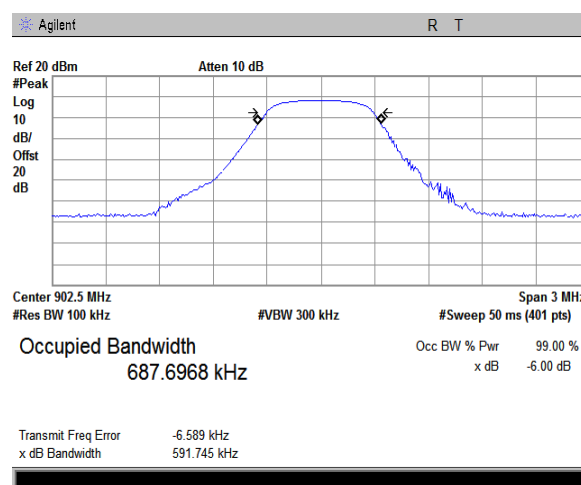


21.9 kbps




HERMON LABORATORIES

Test specification: Section 15.247(a)(2), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.1.2 6 dB bandwidth test result at mid frequency

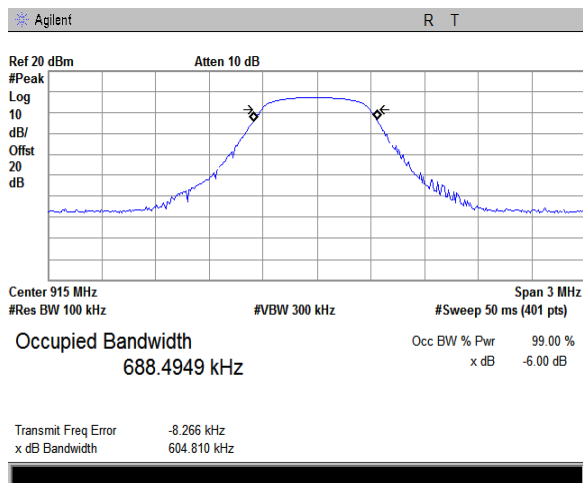


3.9 kbps

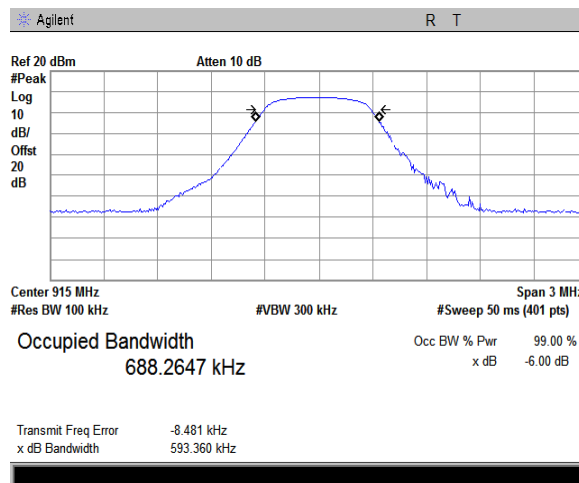


21.9 kbps

Plot 7.1.3 6 dB bandwidth test result at high frequency

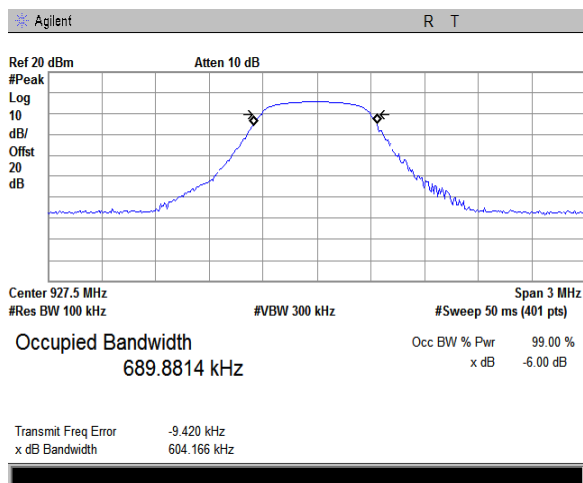

3.9 kbps

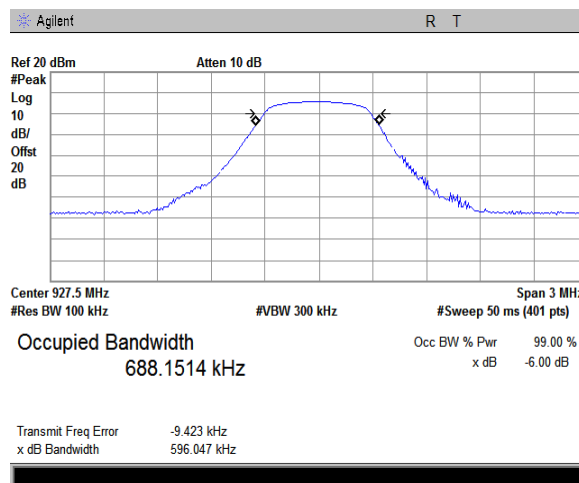

21.9 kbps



Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

7.2 Field strength of spurious emissions

7.2.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, Figure 7.2.3, energized and the performance check was conducted.

7.2.3.2 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz


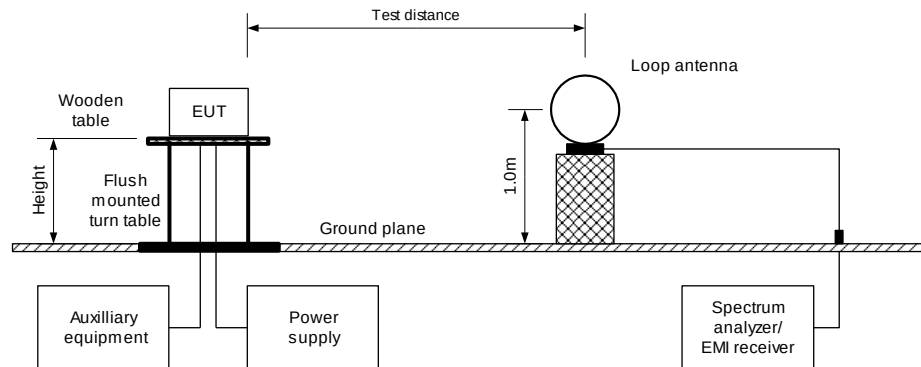


Figure 7.2.2 Setup for spurious emission field strength measurements in 30 – 1000 MHz



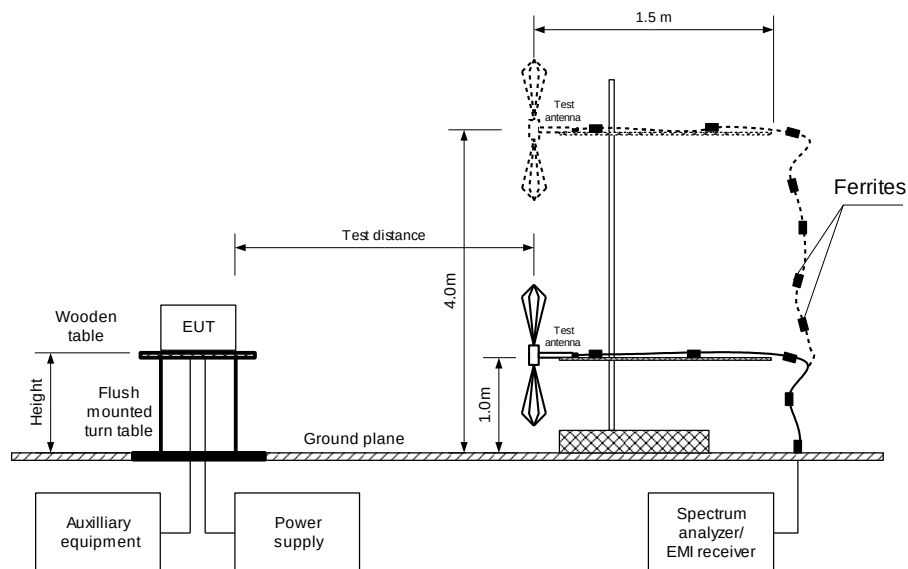

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Table 7.2.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 9500 MHz
 TEST DISTANCE: 3 m
 MODULATION: LoRa
 MODULATING SIGNAL: PRBS
 BIT RATE: 3.9 kbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency 902.5 MHz									
1805.23	36.99	Vertical	2.05	132	107.35	70.36	20.0	50.36	Pass
Mid carrier frequency 915.0 MHz									
1829.88	41.14	Vertical	1.79	51	106.78	65.64	20.0	45.64	Pass
High carrier frequency 927.5 MHz									
1855.10	42.20	Vertical	2.06	327	105.19	62.99	20.0	42.99	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.



Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Table 7.2.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 9500 MHz
 TEST DISTANCE: 3 m
 MODULATION: LoRa
 MODULATING SIGNAL: PRBS
 BIT RATE: 3.9 kbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide

Antenna			Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)				Verdict
Frequency, MHz	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency 902.5 MHz											
All emissions are more than 20 dB below the limit											Pass
Mid carrier frequency 915.0 MHz											
All emissions are more than 20 dB below the limit											Pass
High carrier frequency 927.5 MHz											
All emissions are more than 20 dB below the limit											Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
NA	NA	NA	NA	NA	NA

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Table 7.2.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY:	902.0 – 928.0 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	LoRa
MODULATING SIGNAL:	PRBS
BIT RATE:	3.9 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Bicomlog (50 MHz – 1000 MHz)								
Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
Low, mid, high carrier frequencies (were measured worst cases from all EUT positions and carrier frequencies)								
73.14	29.47	24.34	40.00	-15.66	Vertical	1.32	360	Pass
109.99	33.46	31.16	43.50	-12.34	Vertical	1.01	71	
130.00	37.89	35.78	43.50	-7.72	Vertical	1.00	250	
150.00	44.31	40.85	43.50	-2.65	Vertical	1.04	10	
159.26	44.43	38.52	43.50	-4.98	Vertical	1.02	0	
162.85	45.95	41.73	43.50	-1.77	Vertical	1.02	186	
170.03	46.47	42.45	43.50	-1.05	Vertical	1.00	0	
250.02	40.07	37.17	46.00	-8.83	Horizontal	1.04	325	
330.00	37.92	35.10	46.00	-10.90	Horizontal	1.01	177	
360.00	39.34	36.54	46.00	-9.46	Horizontal	1.02	205	
610.00	39.75	34.46	46.00	-11.54	Horizontal	1.03	329	

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Table 7.2.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used

HL 0446	HL 3903	HL 4360	HL 4933	HL 5288	HL 5372	HL 5665	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.



HERMON LABORATORIES


Report ID: HOORAD_FCC.35117_DTS_Gateway

Date of Issue: 14-Jun-20

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Verdict: PASS	
Date(s):			
29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			


Plot 7.2.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

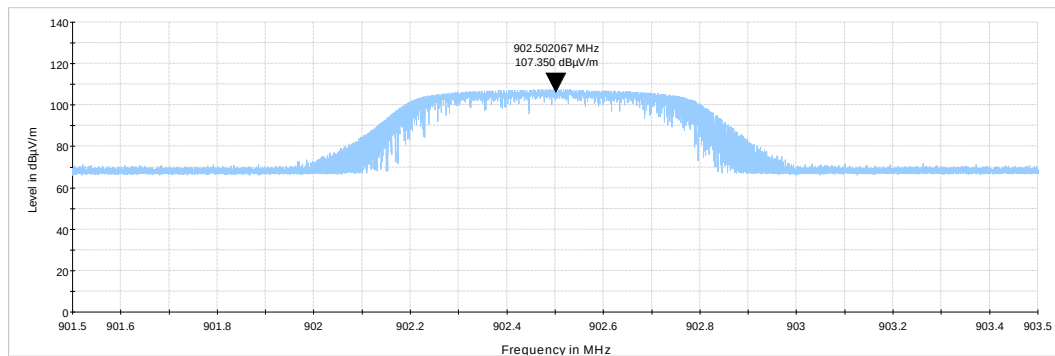

Plot 7.2.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

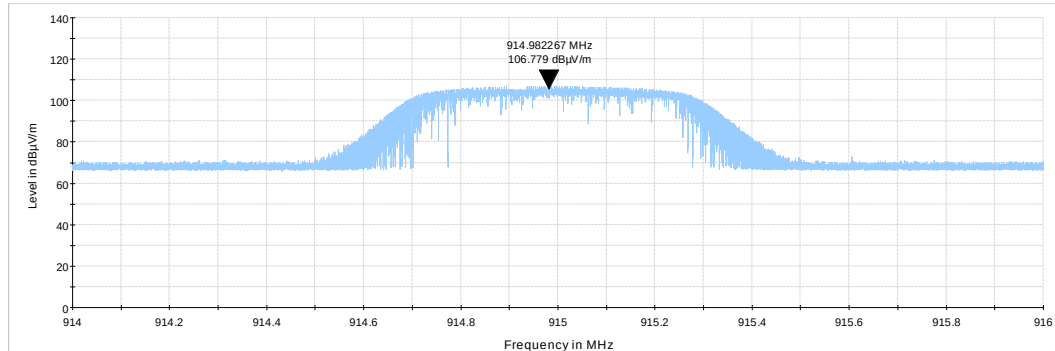



HERMON LABORATORIES

Report ID: HOORAD_FCC.35117_DTS_Gateway

Date of Issue: 14-Jun-20


Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.2.3 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and horizontal

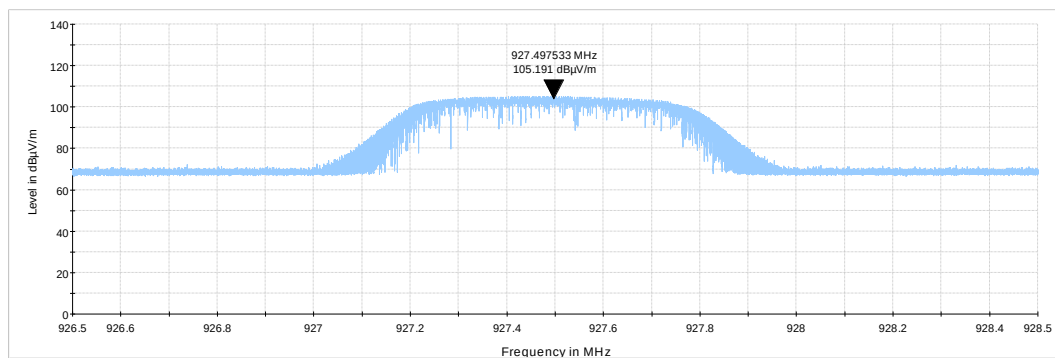





Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.2.4 Radiated emission measurements from 9 kHz to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

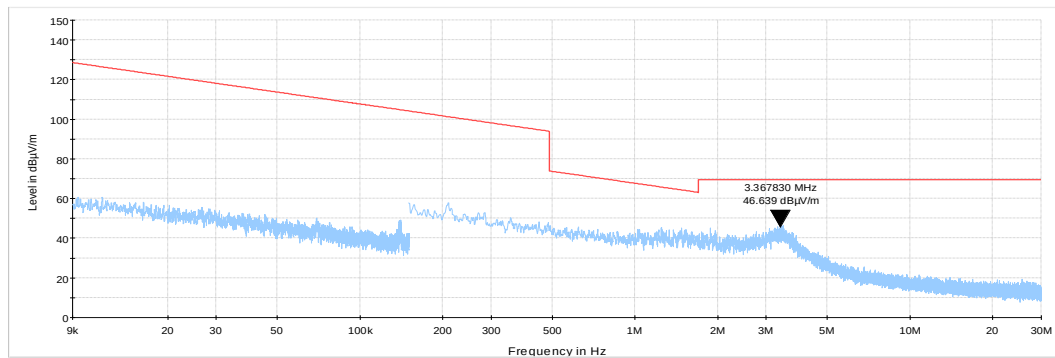**Plot 7.2.5 Radiated emission measurements from 9 kHz to 30 MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

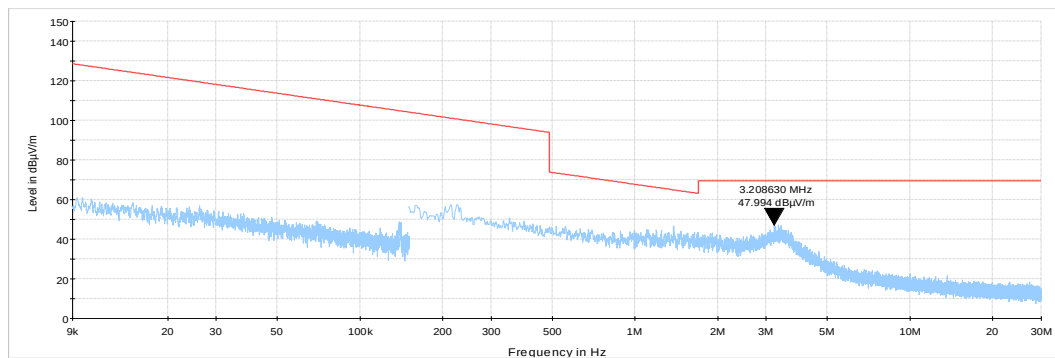




HERMON LABORATORIES

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Verdict: PASS	
Date(s):			
29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.2.6 Radiated emission measurements from 9 kHz to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

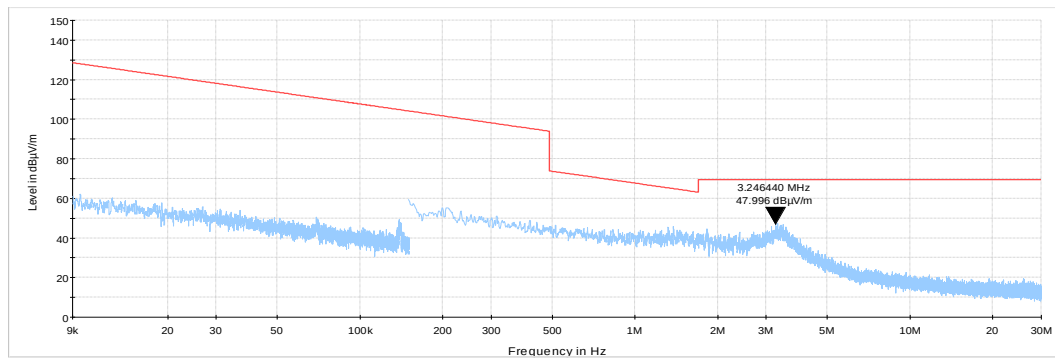



HERMON LABORATORIES


Report ID: HOORAD_FCC.35117_DTS_Gateway

Date of Issue: 14-Jun-20

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Verdict: PASS	
Date(s):			
29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			


Plot 7.2.7 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

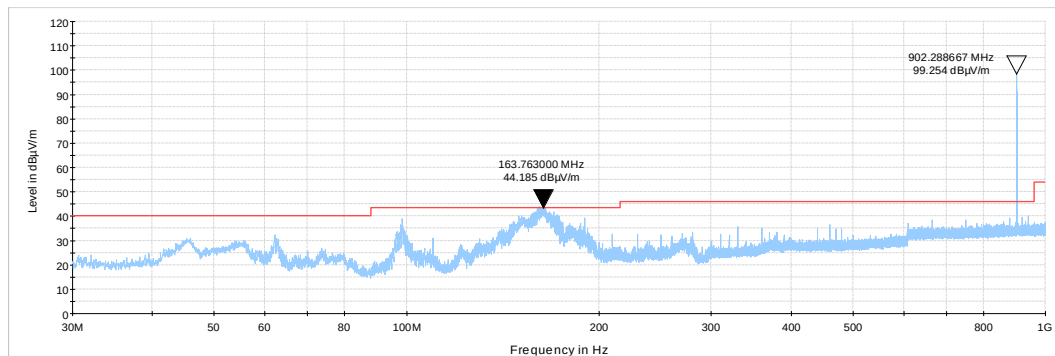

Plot 7.2.8 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

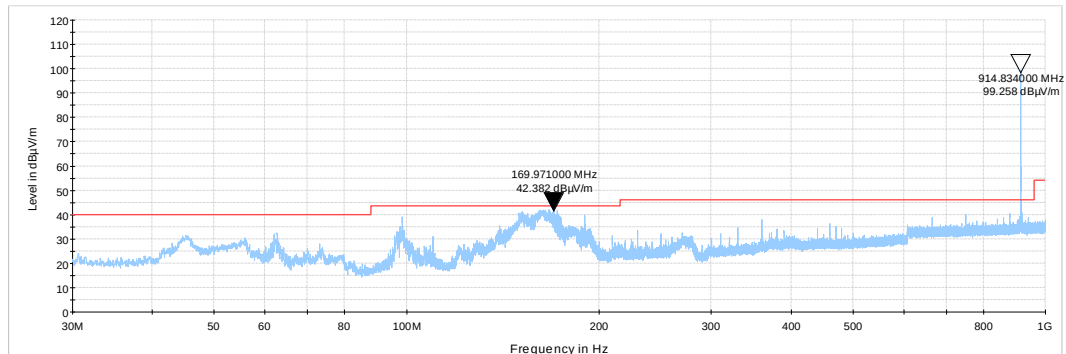



HERMON LABORATORIES

Report ID: HOORAD_FCC.35117_DTS_Gateway

Date of Issue: 14-Jun-20


Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.2.9 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and Horizontal

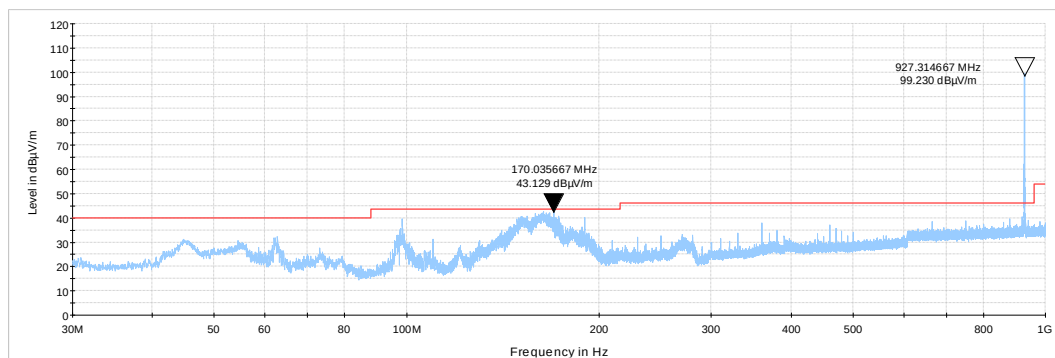





Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.2.10 Radiated emission measurements from 1000 to 9500 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

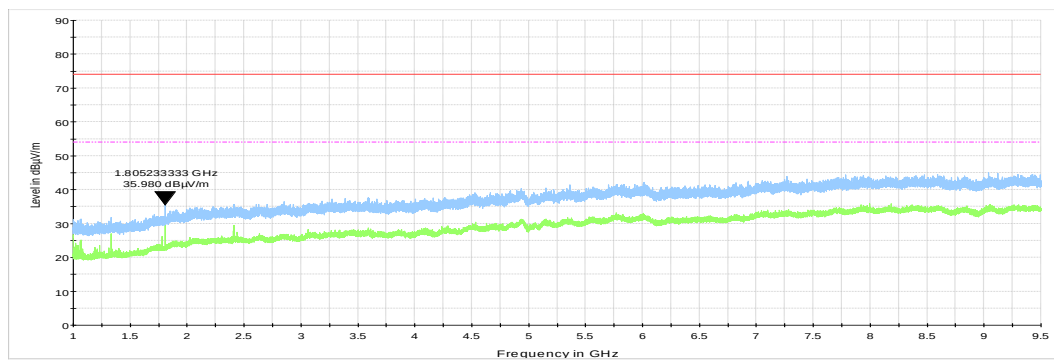**Plot 7.2.11 Radiated emission measurements from 1000 to 9500 MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

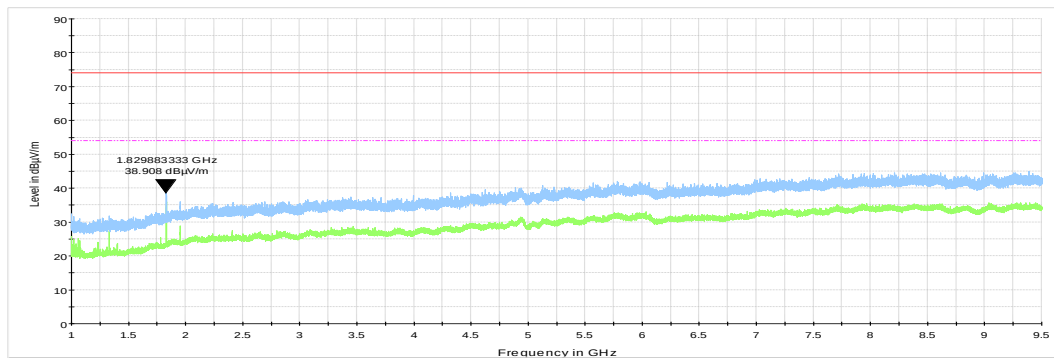



HERMON LABORATORIES

Report ID: HOORAD_FCC.35117_DTS_Gateway

Date of Issue: 14-Jun-20


Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.2.12 Radiated emission measurements from 1000 to 9500 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and Horizontal

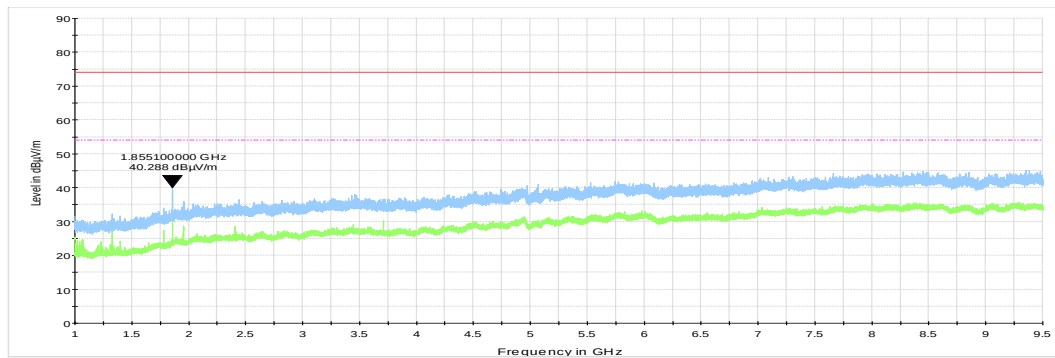



Test specification: Section 15.247(b)(3), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

7.3 Peak output power

7.3.1 General

This test was performed to measure the maximum peak output power at the transmitter RF antenna connector. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*	
		W	dBm
902.0 – 928.0	6.0	1.0	30.0
2400.0 – 2483.5			
5725.0 – 5850.0			

*- If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

7.3.2 Test procedure


7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.3.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the maximum peak output power was measured as provided in Table 7.3.2 and associated plots.

7.3.2.4 The 1 MHz resolution bandwidth of spectrum analyzer was set, video averaging with max hold and sum across the band were used. Since the transmitter pulse duration (T) is about A msec (refer to plot 1.1.XX), a VBW of $1/T = 1/A = B$ kHz was used for averaging and the maximum peak output power was measured as provided in Table 7.3.2 and associated plots.

Figure 7.3.1 Peak output power test setup





HERMON LABORATORIES

Test specification: Section 15.247(b)(3), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Table 7.3.2 Peak output power test results

ASSIGNED FREQUENCY: 902-928 MHz
 MODULATION: LoRa
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 EUT 6 dB BANDWIDTH: 604.16 kHz
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz

BIT RATE: 3.9 kbps

Carrier frequency, MHz	Spectrum analyzer reading, dBm	External attenuation, dB	Cable loss, dB	Peak output power,** dBm	Limit, dBm	Margin*, dB	Verdict
902.5	8.754	including	including	8.754	30	-21.246	Pass
915.0	7.634	including	including	7.634	30	-22.366	Pass
927.5	6.167	including	including	6.167	30	-23.833	Pass

BIT RATE: 21.9 kbps

Carrier frequency, MHz	Spectrum analyzer reading, dBm	External attenuation, dB	Cable loss, dB	Peak output power,** dBm	Limit, dBm	Margin*, dB	Verdict
902.5	8.754	including	including	8.754	30	-21.246	Pass
915.0	7.815	including	including	7.815	30	-22.185	Pass
927.5	6.344	including	including	6.344	30	-23.656	Pass

* - Margin = Peak output power – specification limit.


Note: Maximum peak output power was obtained at Unom (115%Unom, 85%Unom) input power voltage.

Reference numbers of test equipment used


HL 2909	HL 5621	HL 3384	HL 495	HL 3310			
---------	---------	---------	--------	---------	--	--	--

Full description is given in Appendix A.

Plot 7.3.1 Peak output power at low frequency and Unom

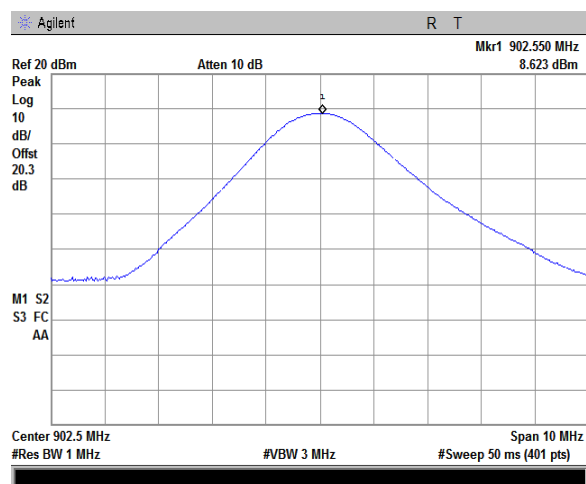

3.9 kbps

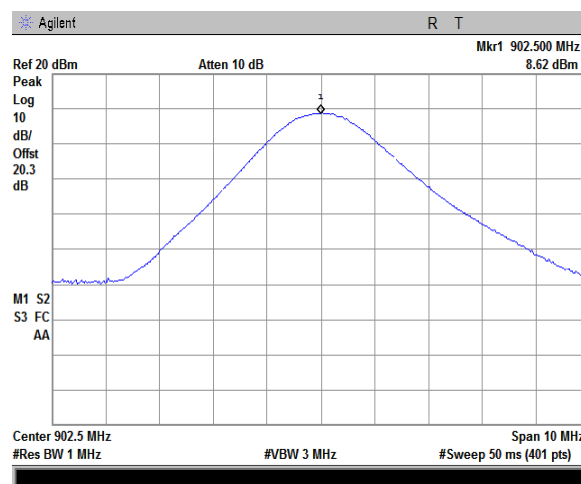


21.9 kbps




HERMON LABORATORIES

Test specification:		Section 15.247(b)(3), Peak output power	
Test procedure:		ANSI C63.10 section 11.9.1.1	
Test mode:		Verdict: PASS	
Date(s):			
26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.3.2 Peak output power at mid frequency and Unom

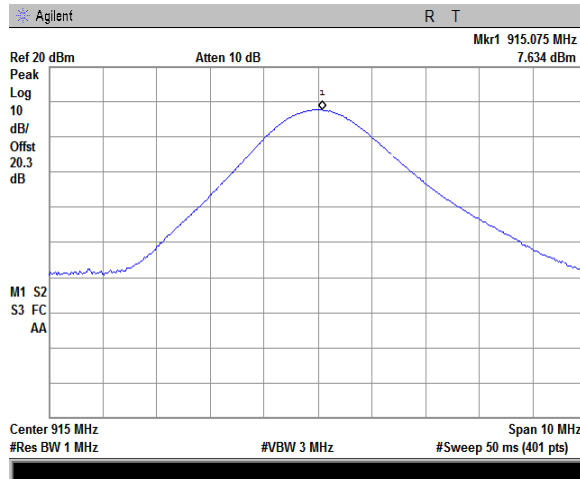


3.9 kbps

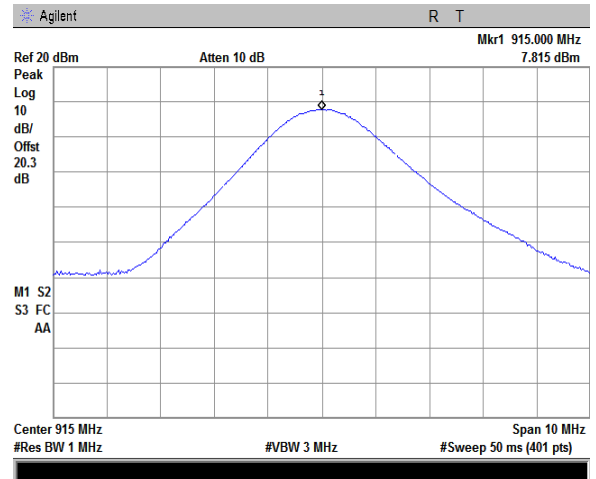


21.9 kbps

Plot 7.3.3 Peak output power at high frequency and Unom

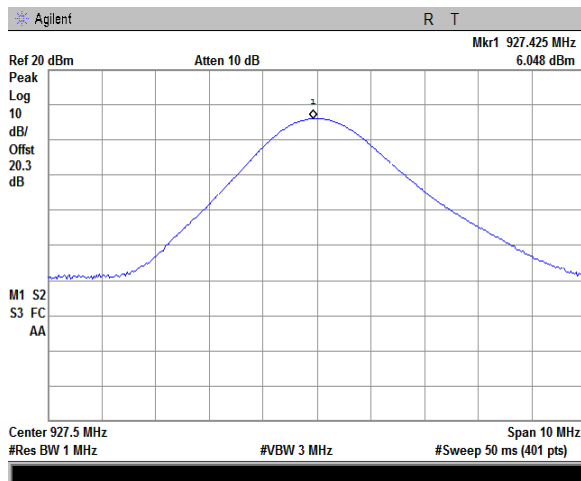

3.9 kbps

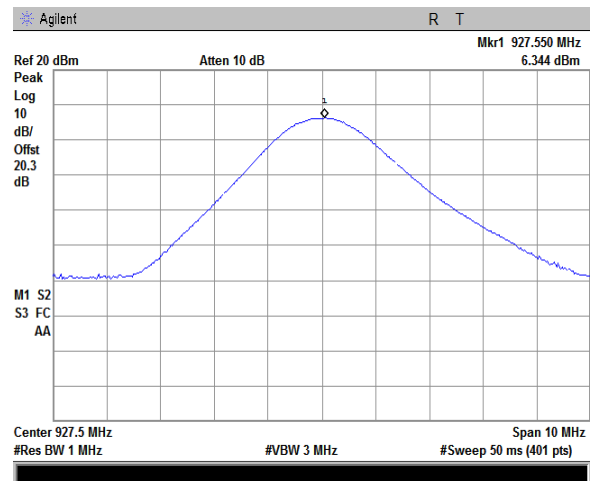

21.9 kbps




HERMON LABORATORIES

Report ID: HOORAD_FCC.35117_DTS_Gateway


Date of Issue: 14-Jun-20

Test specification:		Section 15.247(b)(3), Peak output power	
Test procedure:		ANSI C63.10 section 11.9.1.1	
Test mode:		Verdict: PASS	
Date(s):			
26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.3.4 Peak output power at low frequency and 115%Unom

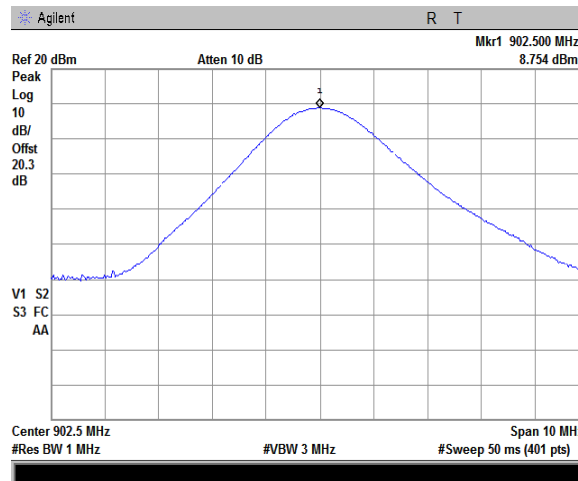

Plot 7.3.5 Peak output power at mid frequency and 115%Unom

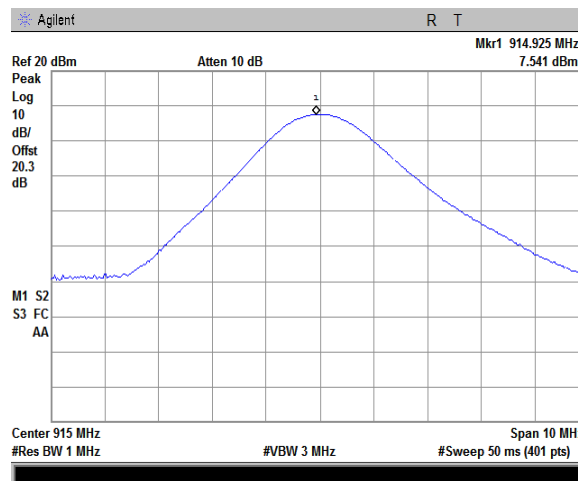





HERMON LABORATORIES

Test specification:		Section 15.247(b)(3), Peak output power	
Test procedure:		ANSI C63.10 section 11.9.1.1	
Test mode:		Verdict: PASS	
Date(s):			
26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.3.6 Peak output power at high frequency and 115%Unom

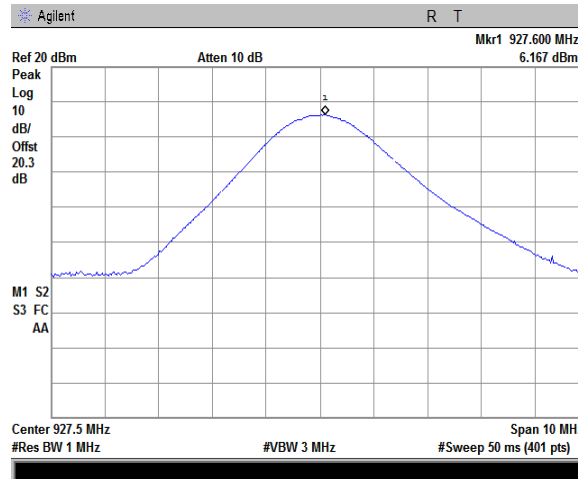

Plot 7.3.7 Peak output power at low frequency and 85%Unom

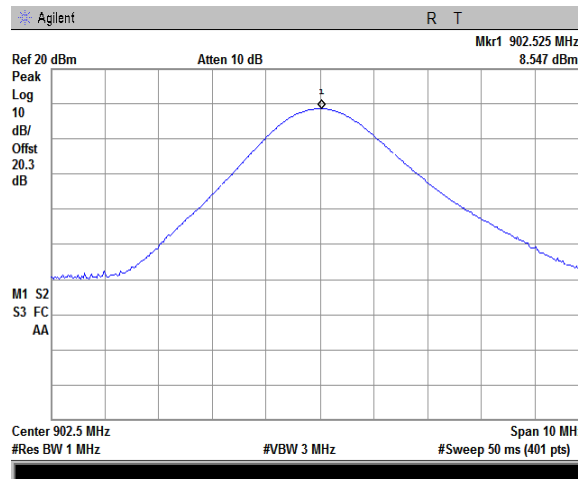





HERMON LABORATORIES

Test specification:		Section 15.247(b)(3), Peak output power	
Test procedure:		ANSI C63.10 section 11.9.1.1	
Test mode:		Verdict: PASS	
Date(s):			
26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.3.8 Peak output power at mid frequency and 85%Unom

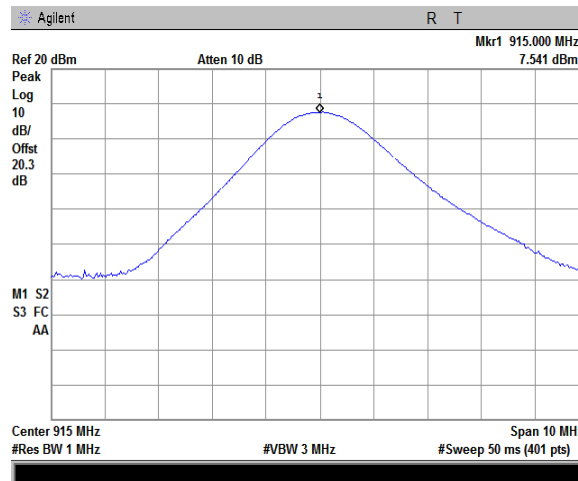

Plot 7.3.9 Peak output power at high frequency and 85%Unom

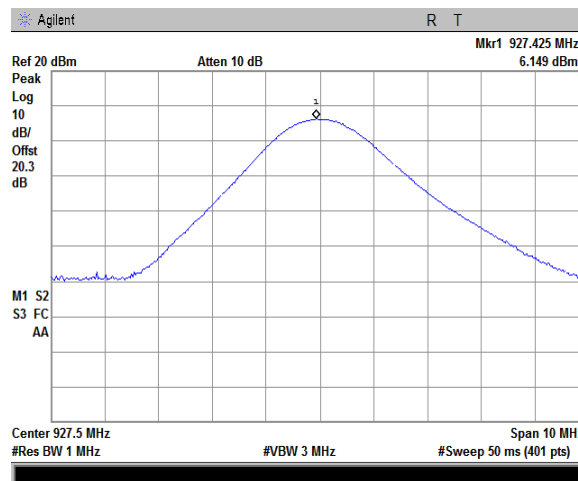



Test specification: Section 15.247(d), Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

7.4 Spurious emissions at RF antenna connector

7.4.1 General

This test was performed to measure spurious emissions at RF antenna connector. Specification test limits are given in Table 7.4.1. The test results are provided in Table 7.4.2 and associated plots.

Table 7.4.1 Spurious emission limits

Frequency*, MHz	Attenuation below carrier*, dBc
0.009 – 10 th harmonic	20.0 (30.0)

* - The above limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

** - Spurious emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.4.2 Test procedure


7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.4.2.3 The highest emission level within the authorized band was measured.

7.4.2.4 The spurious emission was measured with spectrum analyzer as provided in Table 7.4.2 and associated plots and referenced to the highest emission level measured within the authorized band.

Figure 7.4.1 Spurious emission test setup





Test specification: Section 15.247(d), Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Table 7.4.2 Spurious emission test results

ASSIGNED FREQUENCY RANGE: 902-928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 -9300 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATION: LoRa
 BIT RATE: 3.9 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Spurious emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
All signals at least 20 dB below limit						Pass

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 2909	HL 5621	HL 3384	HL	HL	HL	HL	HL
---------	---------	---------	----	----	----	----	----


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d), Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.4.1 The highest emission level within the assigned band at low carrier frequency

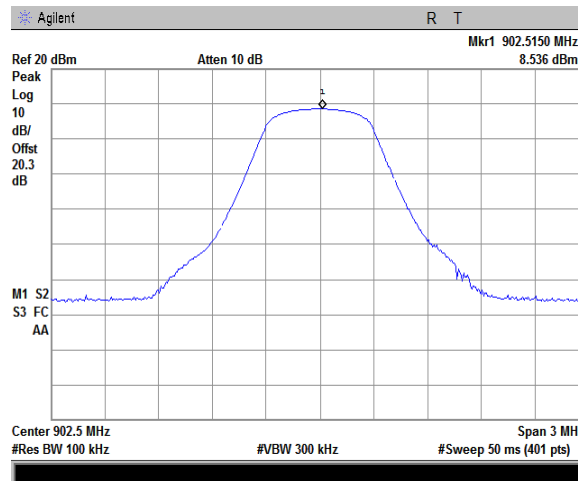

Plot 7.4.2 The highest emission level within the assigned band at mid carrier frequency

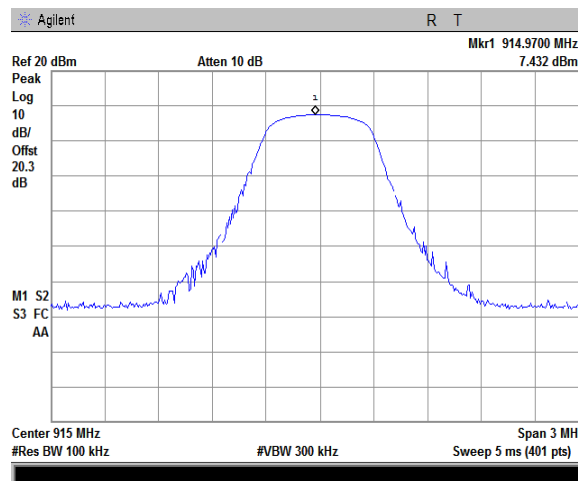





HERMON LABORATORIES

Test specification:		Section 15.247(d), Conducted spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.2.1	
Test mode:		Verdict: PASS	
Date(s):			
26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.4.3 The highest emission level within the assigned band at high carrier frequency

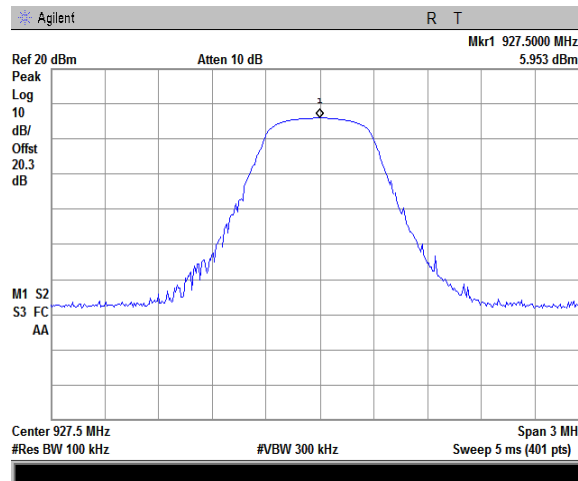

Plot 7.4.4 Spurious emission measurements in 9 - 150 kHz range at low carrier frequency

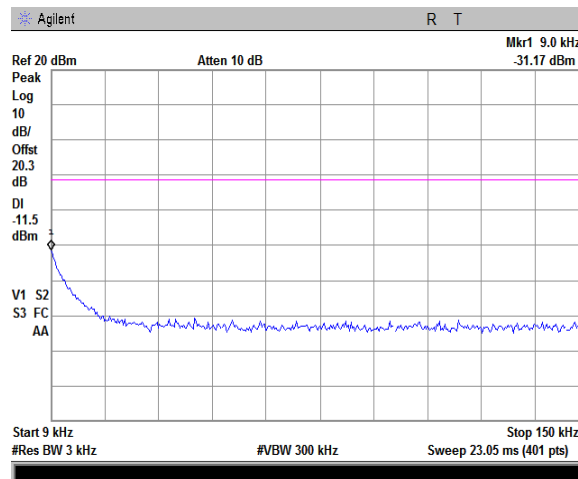





HERMON LABORATORIES

Test specification:		Section 15.247(d), Conducted spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.2.1	
Test mode:		Verdict: PASS	
Date(s):			
26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.4.5 Spurious emission measurements in 9 - 150 kHz range at mid carrier frequency

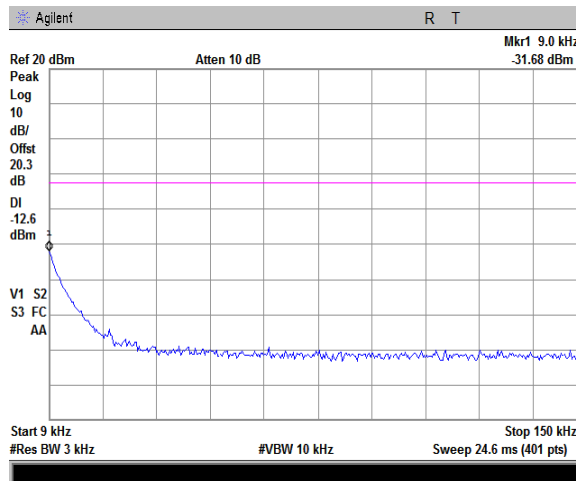


Plot 7.4.6 Spurious emission measurements in 9 - 150 kHz range at high carrier frequency

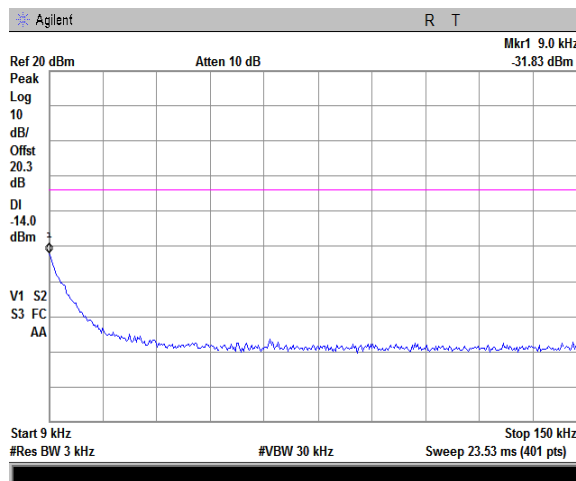




Test specification:		Section 15.247(d), Conducted spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.2.1	
Test mode:		Verdict: PASS	
Date(s):			
26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.4.7 Spurious emission measurements in 0.15 - 30 MHz range at low carrier frequency

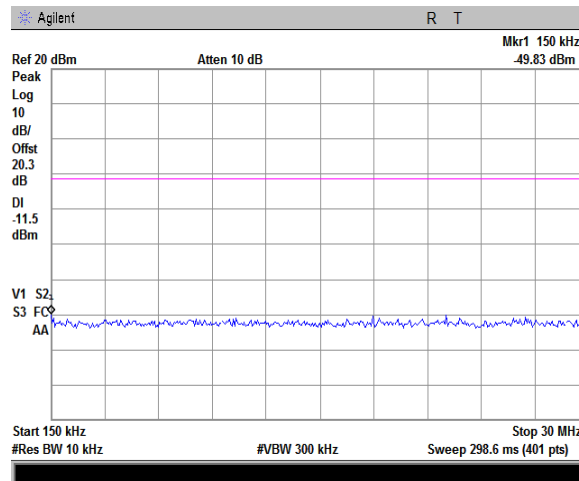


Plot 7.4.8 Spurious emission measurements in 0.15 - 30 MHz range at mid carrier frequency

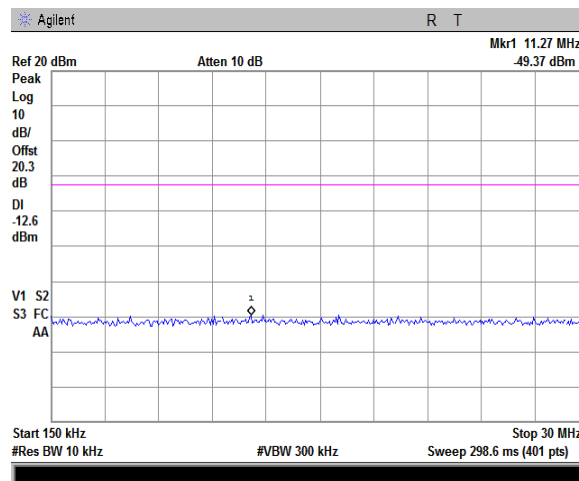




Test specification:		Section 15.247(d), Conducted spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.2.1	
Test mode:		Verdict: PASS	
Date(s):			
26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.4.9 Spurious emission measurements in 0.15 - 30 MHz range at high carrier frequency

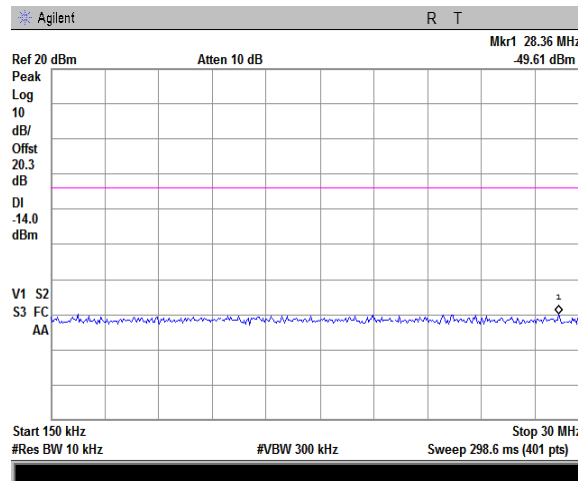

Plot 7.4.10 Spurious emission measurements in 30 - 1000 MHz range at low carrier frequency

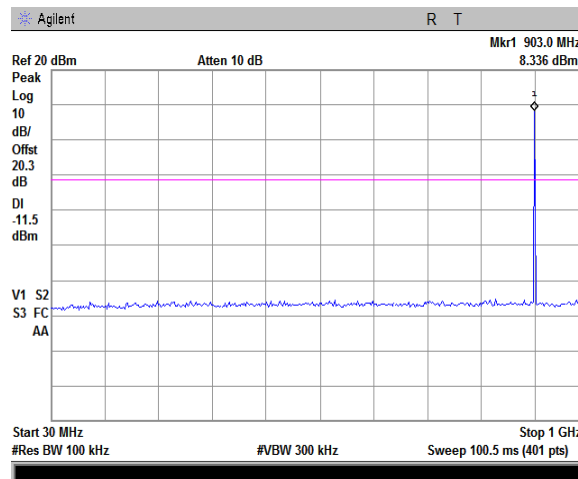





HERMON LABORATORIES

Test specification:		Section 15.247(d), Conducted spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.2.1	
Test mode:		Verdict: PASS	
Date(s):			
26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.4.11 Spurious emission measurements in 30 - 1000 MHz range at mid carrier frequency

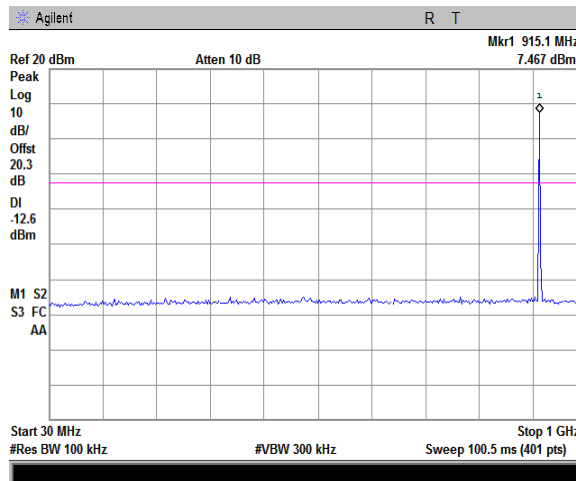


Plot 7.4.12 Spurious emission measurements in 30 - 1000 MHz range at high carrier frequency

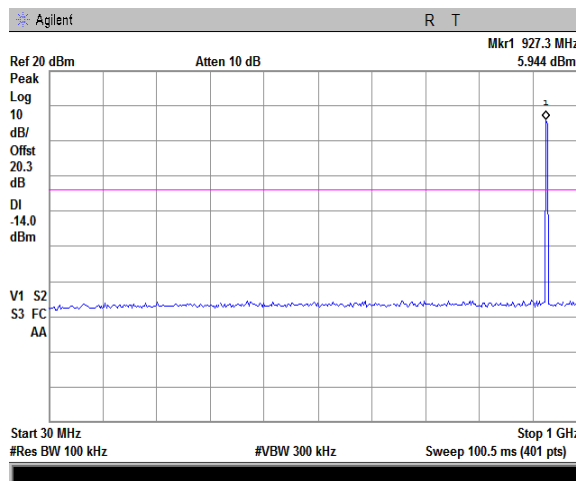




Test specification:		Section 15.247(d), Conducted spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.2.1	
Test mode:		Verdict: PASS	
Date(s):			
26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.4.13 Spurious emission measurements in 1000 - 9300 MHz range at low carrier frequency

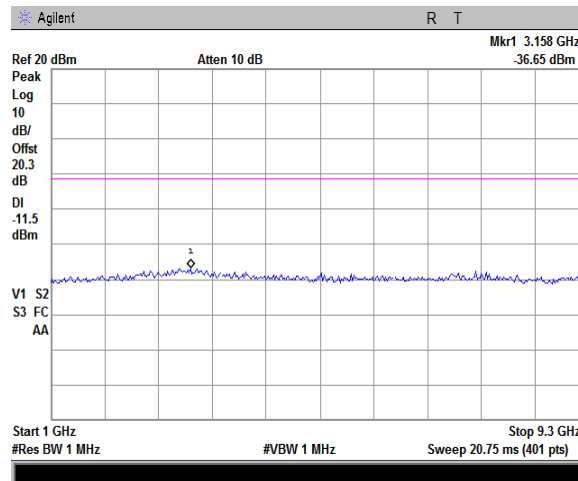

Plot 7.4.14 Spurious emission measurements in 1000 - 9300 MHz range at mid carrier frequency

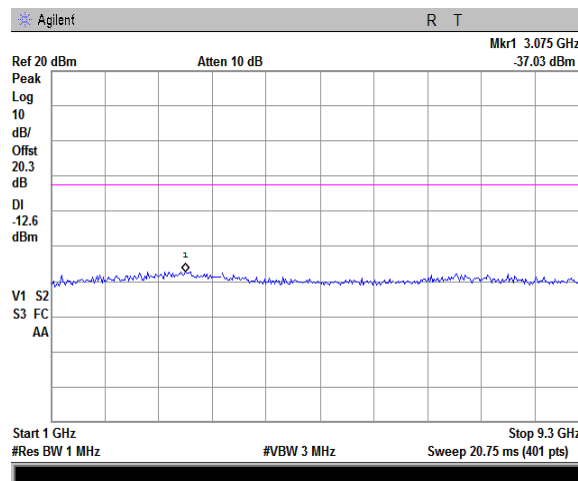




HERMON LABORATORIES

Report ID: HOORAD_FCC.35117_DTS_Gateway

Date of Issue: 14-Jun-20

Test specification:		Section 15.247(d), Conducted spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.2.1	
Test mode:		Verdict: PASS	
Date(s):			
26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.4.15 Spurious emission measurements in 1000 - 9300 MHz range at high carrier frequency

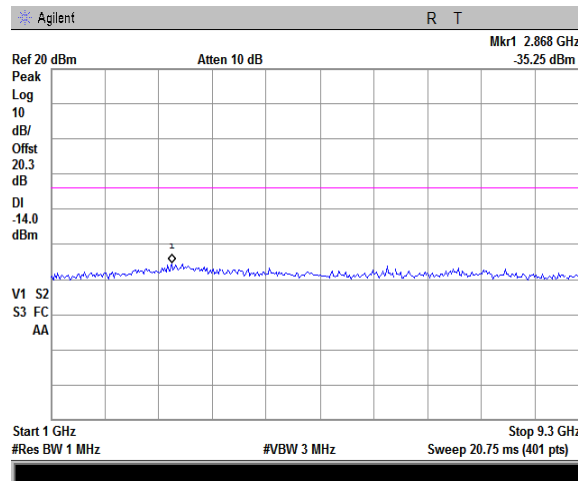



Test specification: Section 15.247(d), Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.2.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

7.5 Band edge emissions at RF antenna connector

7.5.1 General

This test was performed to measure band edge emissions at RF antenna connector. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Band edge emission limits

Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc
Peak	902.0 – 928.0	20.0
	2400.0 – 2483.5	
	5725.0 – 5850.0	
Averaged over a time interval	902.0 – 928.0	30.0
	2400.0 – 2483.5	
	5725.0 – 5850.0	

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.5.2 Test procedure

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.5.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.5.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.5.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.5.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.5.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.

Figure 7.5.1 Band edge emission test setup





Test specification: Section 15.247(d), Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.2.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Table 7.5.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 902-928 MHz
 DETECTOR USED: Peak
 MODULATION: LoRa
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: $\geq$ RBW

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Bit rate: 3.9 kbps						
902	-20.19	8.555	28.745	20.0	8.745	Pass
928	-23.66	5.885	29.545		9.545	
Bit rate: 21.9 kbps						
902	-20.28	8.489	28.769	20.0	8.769	Pass
928	-23.37	5.899	29.269		9.269	

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 2909	HL 5621	HL 3384	HL	HL	HL	HL	HL
---------	---------	---------	----	----	----	----	----


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d), Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.2.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.5.1 The band edge emission at low carrier frequency

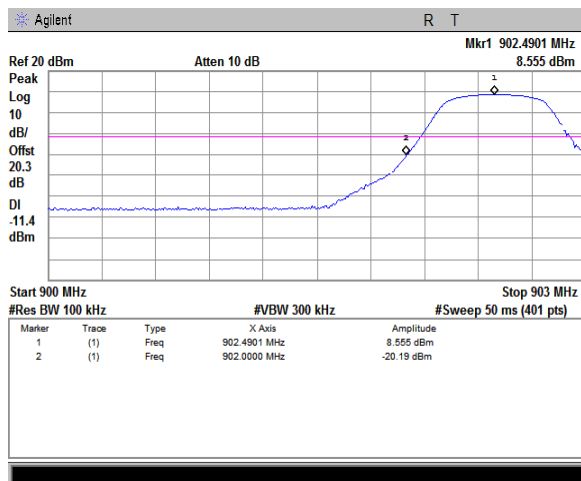


3.9 kbps

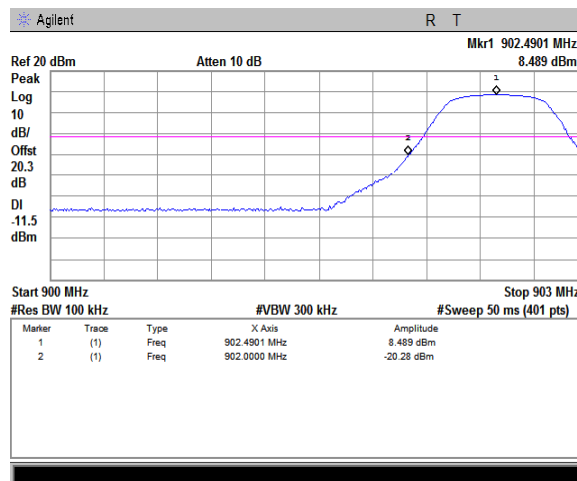


21.9 kbps

Plot 7.5.2 The band edge emission at high carrier frequency

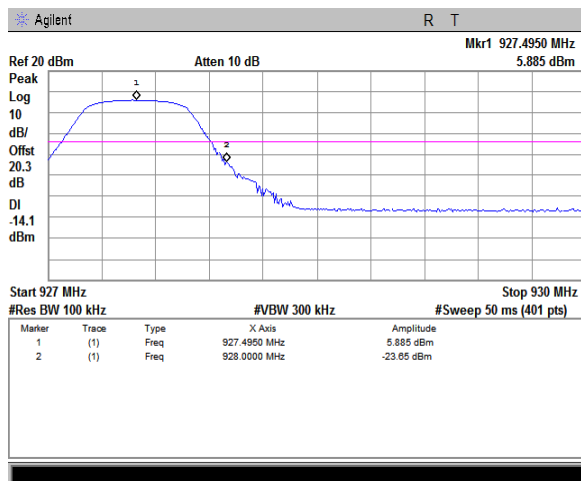

3.9 kbps

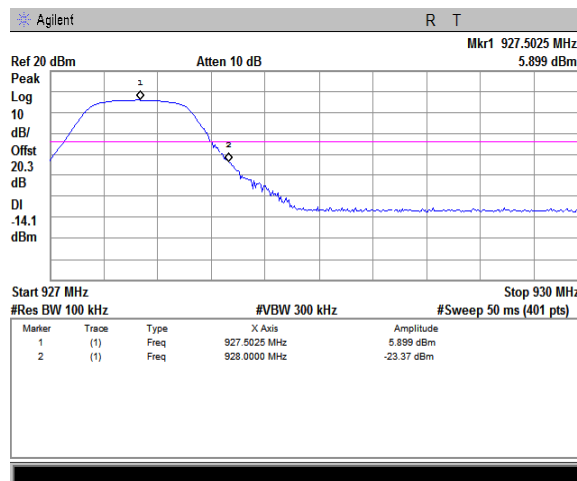

21.9 kbps



Test specification: Section 15.247(d), Peak power density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

7.6 Peak spectral power density

7.6.1 General

This test was performed to measure the peak spectral power density at the transmitter RF antenna connector. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm
902-928	3.0	8.0

7.6.2 Test procedure


7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and its proper operation was checked.

7.6.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.6.2.3 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.

7.6.2.4 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.6.2 and associated plots.

Figure 7.6.1 Peak spectral power density test setup





HERMON LABORATORIES

Test specification: Section 15.247(d), Peak power density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Table 7.6.2 Peak spectral power density test results

ASSIGNED FREQUENCY: 902-928 MHz
 MODULATION: LoRa
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 3 kHz
 VIDEO BANDWIDTH: 10 kHz

BIT RATE: 3.9 kbps

Carrier frequency, MHz	Spectrum analyzer reading, dBm	External attenuation, dB	Cable loss, dB	Peak power density, dB(mW/3 kHz)	Limit, dBm	Margin*, dB	Verdict
902.5	1.487	including	including	1.487	8	-6.513	Pass
915.0	-1.021	including	including	-1.021	8	-9.021	Pass
927.5	-2.457	including	including	-2.457	8	-10.457	Pass

BIT RATE: 21.9 kbps

Carrier frequency, MHz	Spectrum analyzer reading, dBm	External attenuation, dB	Cable loss, dB	Peak power density, dB(mW/3 kHz)	Limit, dBm	Margin*, dB	Verdict
902.5	-3.370	including	including	-3.370	8	-11.370	Pass
915.0	-4.925	including	including	-4.925	8	-12.925	Pass
927.5	-6.081	including	including	-6.081	8	-14.081	Pass

* - Margin = Peak power density – specification limit.

Reference numbers of test equipment used

HL 2909	HL 5621	HL 3384					
---------	---------	---------	--	--	--	--	--



Full description is given in Appendix A.





HERMON LABORATORIES

Test specification:		Section 15.247(d), Peak power density	
Test procedure:		ANSI C63.10 section 11.10.2	
Test mode:		Verdict: PASS	
Date(s):			
26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.6.1 Peak spectral power density at low frequency

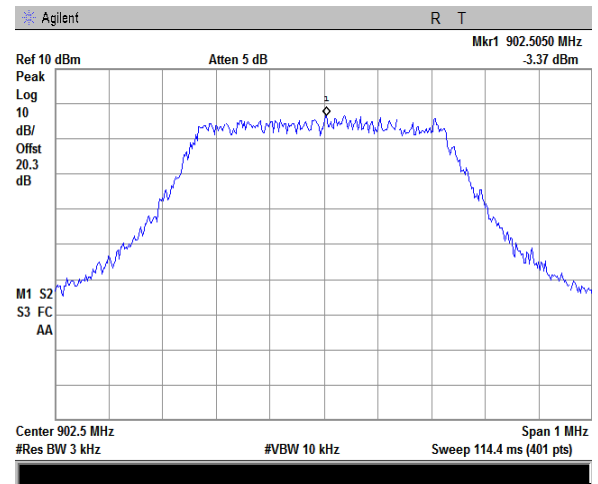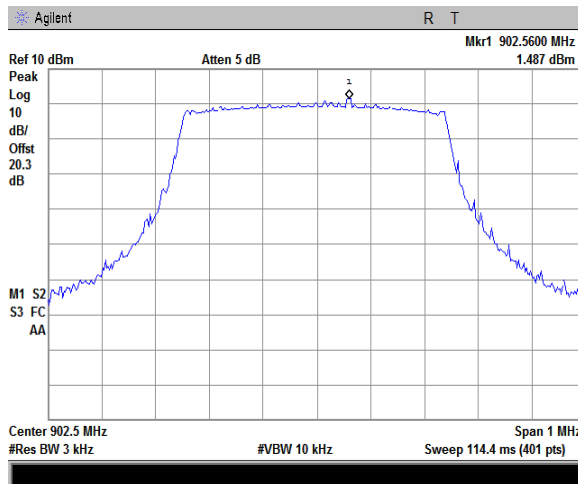

Plot 7.6.2 Peak spectral power density at mid frequency

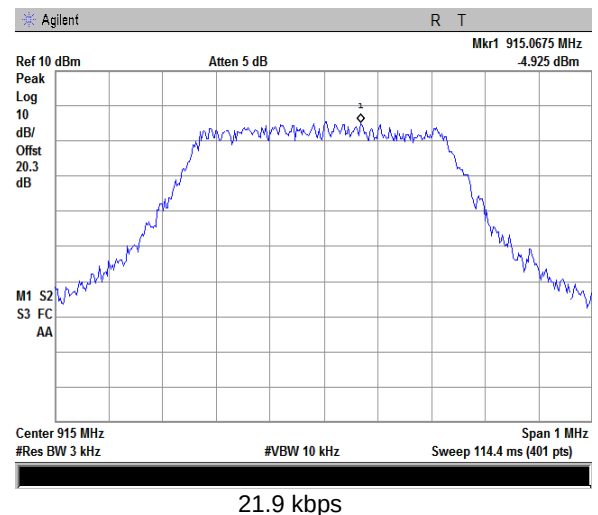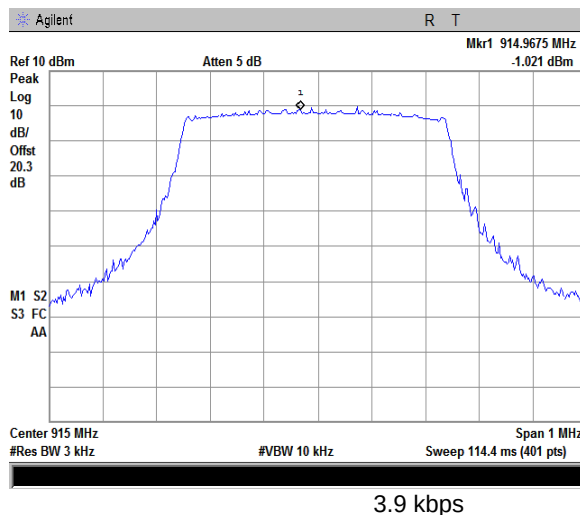





HERMON LABORATORIES

Report ID: HOORAD_FCC.35117_DTS_Gateway

Date of Issue: 14-Jun-20

Test specification: Section 15.247(d), Peak power density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Dec-19			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1008 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.6.3 Peak spectral power density at high frequency

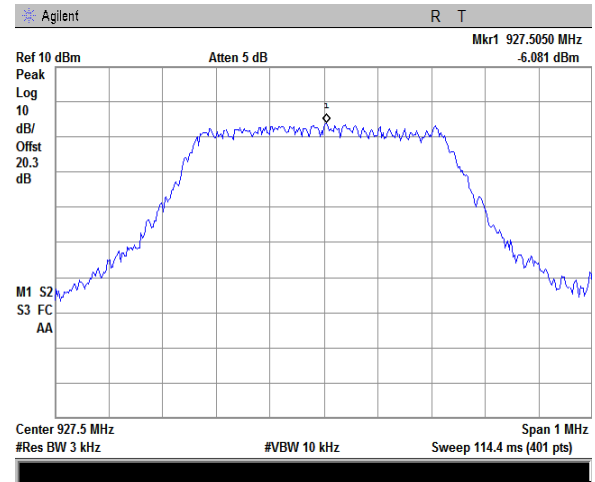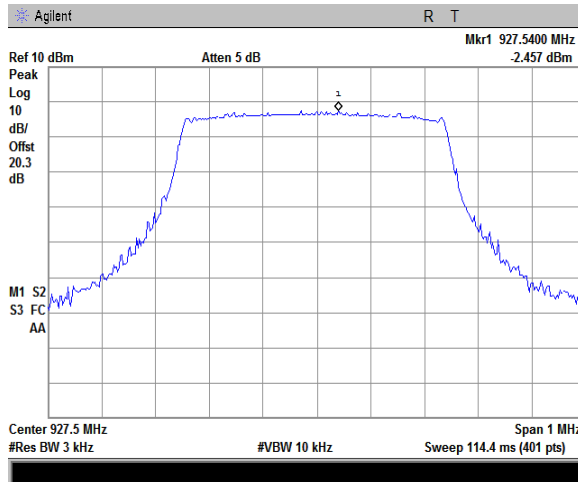



Test specification: Section 15.207(a), Conducted emission			
Test procedure: ANSI C63.10, Section 12.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Jan-20			
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 110 VAC, 50 Hz
Remarks:			

7.7 Conducted emissions

7.7.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.7.1. The worst test results (the lowest margins) were recorded in Table 7.7.2 and shown in the associated plots.

Table 7.7.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μV)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* The limit decreases linearly with the logarithm of frequency.


7.7.2 Test procedure

- 7.7.2.1** The EUT was set up as shown in Figure 7.7.1 and associated photographs, energized and the performance check was conducted.
- 7.7.2.2** The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.7.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.
- 7.7.2.3** The position of the device cables was varied to determine maximum emission level.



Test specification: Section 15.207(a), Conducted emission			
Test procedure: ANSI C63.10, Section 12.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Jan-20			
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Figure 7.7.1 Setup for conducted emission measurements, table-top equipment

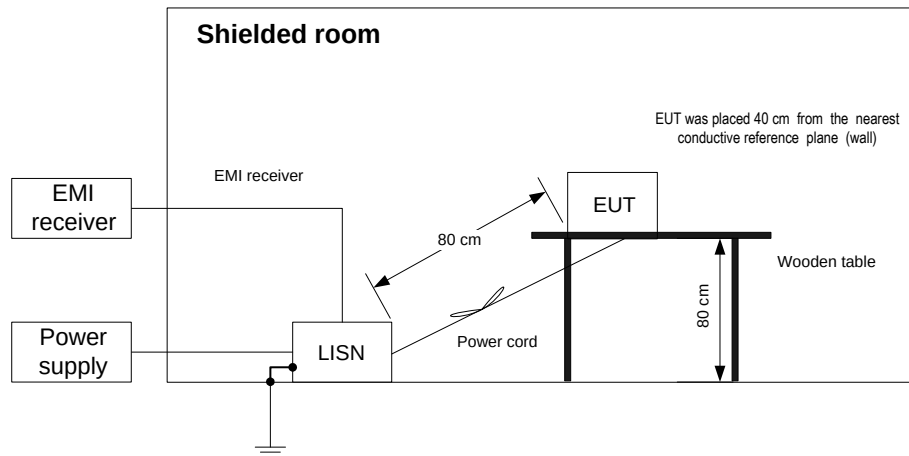



HERMON LABORATORIES

Test specification: Section 15.207(a), Conducted emission			
Test procedure: ANSI C63.10, Section 12.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Jan-20			
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Table 7.7.2 Conducted emission test results

LINE: AC mains
 LIMIT: Class B
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz

35117_CE_FCC_AC_L1_002_000 01/01/2020 10:44:46
 Rel. SW 2.37 (June 2019)
 Rel. FW 1.93 01/10/19
 Margin: 20 dB

	Frequency [MHz]	QPeak [dBµV]	Limit 55022bqp [dBµV]	Delta [dB]	Avg [dBµV]	Limit 55022bav [dBµV]	Delta [dB]	Factor DC Limite.. [dB]	Factor LISN HL 2.. [dB]	Factor Cable HL .. [dB]
1	0.57536	45.58	56.00	-10.42	40.56	46.00	-5.44	10.00	0.10	0.05
2	0.720555	40.53	56.00	-15.47	29.07	46.00	-16.93	10.00	0.09	0.06
3	0.810535	44.98	56.00	-11.02	31.87	46.00	-14.13	10.00	0.11	0.06
4	1.50788	38.51	56.00	-17.49	27.43	46.00	-18.57	10.00	0.13	0.06
5	1.94142	44.59	56.00	-11.41	33.08	46.00	-12.92	10.00	0.14	0.06
6	2.381095	46.30	56.00	-9.70	33.14	46.00	-12.86	10.00	0.15	0.07
7	3.06208	39.55	56.00	-16.45	29.52	46.00	-16.48	10.00	0.16	0.07
8	3.939385	42.61	56.00	-13.39	32.03	46.00	-13.97	10.00	0.20	0.08
9	12.749245	40.64	60.00	-19.36	37.03	50.00	-12.97	10.00	0.60	0.14
10	13.481355	44.14	60.00	-15.86	40.72	50.00	-9.28	10.00	0.63	0.15
11	14.15416	44.48	60.00	-15.52	41.21	50.00	-8.79	10.00	0.67	0.15
12	15.25437	39.69	60.00	---	35.73	50.00	-14.27	10.00	0.72	0.16
13	16.229835	38.35	60.00	---	34.71	50.00	-15.29	10.00	0.77	0.17
14	20.442535	34.66	60.00	---	33.41	50.00	-16.59	10.00	0.96	0.20

35117_CE_FCC_AC_L2_002_000 01/01/2020 10:51:53
 Rel. SW 2.37 (June 2019)
 Rel. FW 1.93 01/10/19
 Margin: 20 dB

	Frequency [MHz]	QPeak [dBµV]	Limit 55022bqp [dBµV]	Delta [dB]	Avg [dBµV]	Limit 55022bav [dBµV]	Delta [dB]	Factor DC Limite.. [dB]	Factor LISN HL 2.. [dB]	Factor Cable HL .. [dB]
1	0.577405	46.40	56.00	-9.60	41.13	46.00	-4.87	10.00	0.10	0.05
2	0.745095	43.07	56.00	-12.93	31.89	46.00	-14.11	10.00	0.10	0.06
3	0.80031	43.80	56.00	-12.20	31.18	46.00	-14.82	10.00	0.11	0.06
4	1.50379	39.33	56.00	-16.67	28.08	46.00	-17.92	10.00	0.13	0.06
5	1.939375	44.84	56.00	-11.16	33.54	46.00	-12.46	10.00	0.14	0.06
6	2.37496	47.64	56.00	-8.36	33.83	46.00	-12.17	10.00	0.15	0.07
7	3.121385	39.80	56.00	-16.20	31.02	46.00	-14.98	10.00	0.16	0.07
8	3.943475	43.14	56.00	-12.86	32.75	46.00	-13.25	10.00	0.20	0.08
9	12.810595	40.78	60.00	-19.22	37.04	50.00	-12.96	10.00	0.60	0.14
10	13.42205	44.51	60.00	-15.49	41.09	50.00	-8.91	10.00	0.63	0.15
11	14.213465	44.33	60.00	-15.67	41.03	50.00	-8.97	10.00	0.67	0.15
12	15.252325	39.35	60.00	---	35.52	50.00	-14.48	10.00	0.72	0.16
13	20.4364	32.62	60.00	---	31.58	50.00	-18.42	10.00	0.96	0.20
14	21.17669	35.14	60.00	---	34.04	50.00	-15.96	10.00	1.00	0.20

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 5707	HL 787	HL 4280	HL 2888				
---------	--------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Report ID: HOORAD_FCC.35117_DTS_Gateway

Date of Issue: 14-Jun-20

Test specification:		Section 15.207(a), Conducted emission	
Test procedure:		ANSI C63.10, Section 12.2.4	
Test mode:		Verdict: PASS	
Date(s):			
01-Jan-20			
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 110 VAC, 50 Hz
Remarks:			


Plot 7.7.1 Conducted emission measurements

LINE: L1
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: QUASI-PEAK, AVERAGE

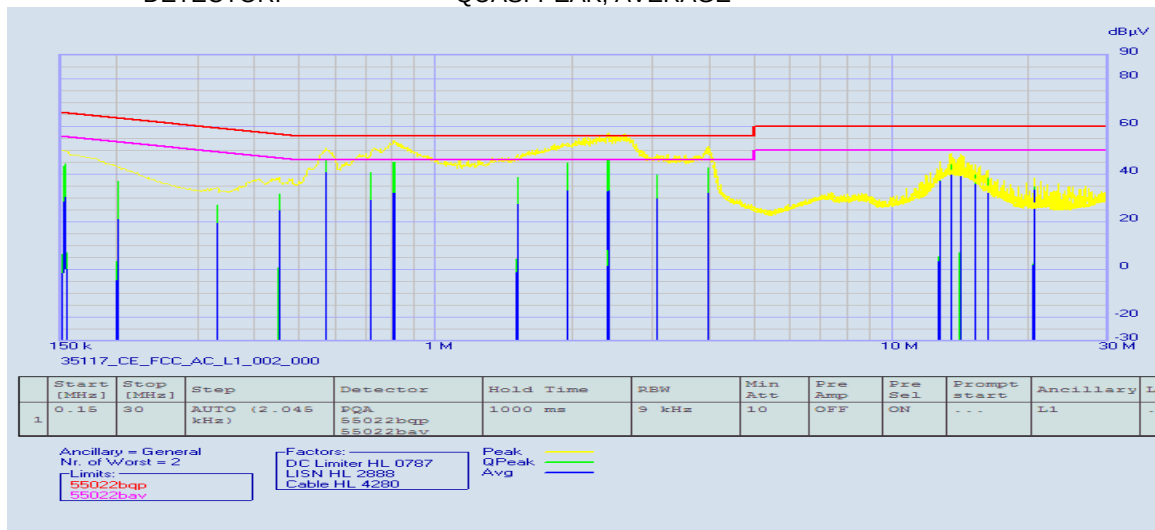

Plot 7.7.2 Conducted emission measurements

LINE: L1
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: QUASI-PEAK, AVERAGE

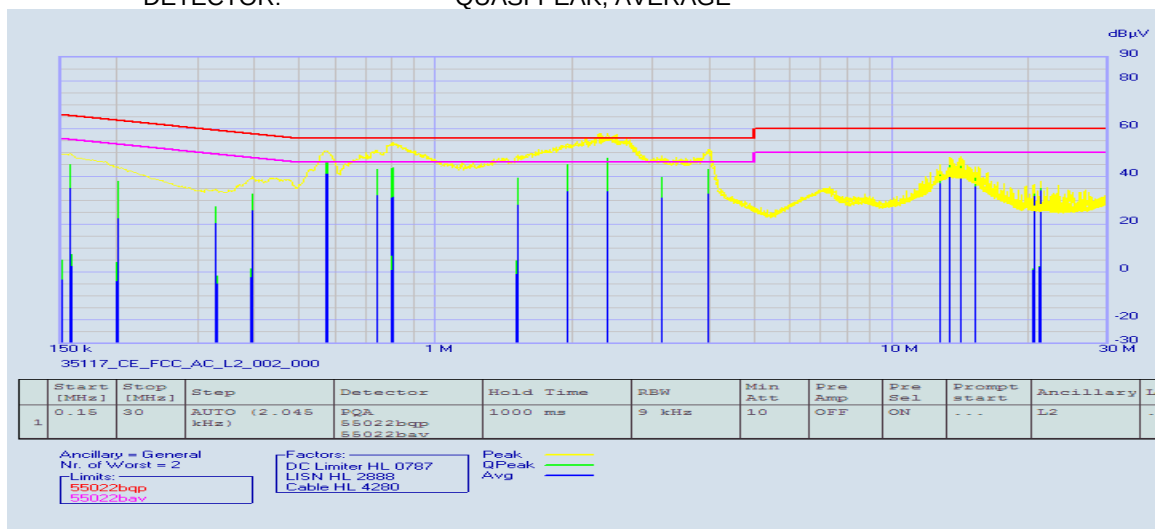



Test specification: Section 15.203, Antenna requirement			
Test procedure: Visual inspection			
Test mode: Compliance		Verdict: PASS	
Date(s): 08-Jan-20			
Temperature: 25 °C	Relative Humidity: 32 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

7.8 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.8.1.

Table 7.8.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	NA	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	Supplier declaration	



Test specification:		Section 15.107, Conducted emission at AC power port	
Test procedure:		ANSI C63.4, Sections 7.2 and 12.2.4	
Test mode:		Verdict: PASS	
Date(s):			
01-Jan-20			
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 110 VAC, 50 Hz
Remarks:			

8 Emission tests according to 47CFR part 15 subpart B requirements

8.1 Conducted emissions

8.1.1 General

This test was performed to measure common mode conducted emissions at the mains power port. Specification test limits are given in Table 8.1.1. The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.

Table 8.1.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μ V)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* The limit decreases linearly with the logarithm of frequency.


8.1.2 Test procedure

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photographs, energized and the performance check was conducted.

8.1.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 8.1.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.

8.1.2.3 The position of the device cables was varied to determine maximum emission level.

Figure 8.1.1 Setup for conducted emission measurements, table-top equipment

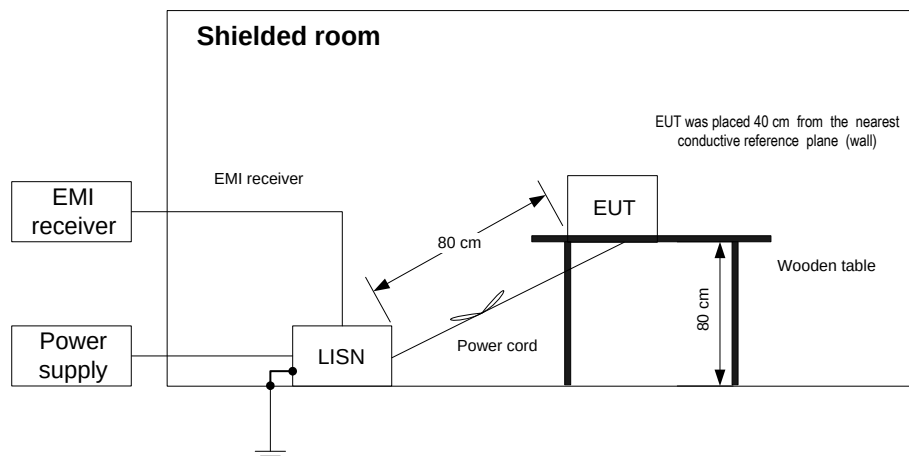



HERMON LABORATORIES

Test specification: Section 15.107, Conducted emission at AC power port			
Test procedure: ANSI C63.4, Sections 7.2 and 12.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Jan-20			
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Table 8.1.2 Conducted emission test results

LINE: AC mains
 LIMIT: Class B
 EUT OPERATING MODE: Receive / Stand-by
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz

35117_CE_FCC_AC_L1_001_000 01/01/2020 10:34:29
 Rel. SW 2.37 (June 2019)
 Rel. FW 1.93 01/10/19
 Margin: 20 dB

	Frequency [MHz]	QPeak [dBµV]	Limit 55022bqp [dBµV]	Delta [dB]	Avg [dBµV]	Limit 55022bav [dBµV]	Delta [dB]	Factor DC Limite.. [dB]	Factor LISN HL 2.. [dB]	Factor Cable HL .. [dB]
1	0.573315	45.62	56.00	-10.38	40.70	46.00	-5.30	10.00	0.10	0.05
2	0.687835	42.03	56.00	-13.97	30.75	46.00	-15.25	10.00	0.09	0.05
3	0.8044	42.81	56.00	-13.19	30.05	46.00	-15.95	10.00	0.11	0.06
4	1.632625	40.45	56.00	-15.55	29.70	46.00	-16.30	10.00	0.13	0.06
5	1.92915	44.65	56.00	-11.35	32.63	46.00	-13.37	10.00	0.14	0.06
6	2.303385	46.60	56.00	-9.40	33.85	46.00	-12.15	10.00	0.15	0.07
7	3.117295	39.08	56.00	-16.92	29.88	46.00	-16.12	10.00	0.16	0.07
8	3.93734	42.48	56.00	-13.52	31.77	46.00	-14.23	10.00	0.20	0.08
9	12.7472	40.33	60.00	-19.67	36.64	50.00	-13.36	10.00	0.60	0.14
10	13.42205	44.64	60.00	-15.36	41.35	50.00	-8.65	10.00	0.63	0.15
11	14.213465	44.45	60.00	-15.55	41.24	50.00	-8.76	10.00	0.67	0.15
12	15.00897	38.79	60.00	---	34.71	50.00	-15.29	10.00	0.71	0.16
13	16.23188	38.16	60.00	---	34.64	50.00	-15.36	10.00	0.77	0.17
14	20.454805	35.24	60.00	---	33.55	50.00	-16.45	10.00	0.96	0.20

35117_CE_FCC_AC_L2_001_000 01/01/2020 10:24:48
 Rel. SW 2.37 (June 2019)
 Rel. FW 1.93 01/10/19
 Margin: 20 dB

	Frequency [MHz]	QPeak [dBµV]	Limit 55022bqp [dBµV]	Delta [dB]	Avg [dBµV]	Limit 55022bav [dBµV]	Delta [dB]	Factor DC Limite.. [dB]	Factor LISN HL 2.. [dB]	Factor Cable HL .. [dB]
1	0.156135	45.77	65.67	-19.90	35.20	55.67	---	10.00	0.08	0.05
2	0.57536	46.52	56.00	-9.48	41.48	46.00	-4.52	10.00	0.10	0.05
3	0.67352	40.80	56.00	-15.20	30.95	46.00	-15.05	10.00	0.09	0.05
4	0.785995	41.86	56.00	-14.14	30.75	46.00	-15.25	10.00	0.11	0.06
5	1.65921	39.95	56.00	-16.05	30.78	46.00	-15.22	10.00	0.13	0.06
6	1.972095	44.25	56.00	-11.75	33.37	46.00	-12.63	10.00	0.14	0.06
7	2.28907	47.46	56.00	-8.54	34.69	46.00	-11.31	10.00	0.15	0.07
8	3.019135	38.59	56.00	-17.41	29.27	46.00	-16.73	10.00	0.16	0.07
9	3.955745	43.26	56.00	-12.74	32.36	46.00	-13.64	10.00	0.20	0.08
10	12.80855	40.46	60.00	-19.54	36.76	50.00	-13.24	10.00	0.60	0.14
11	13.42205	44.40	60.00	-15.60	41.03	50.00	-8.97	10.00	0.63	0.15
12	14.213465	44.20	60.00	-15.80	41.00	50.00	-9.00	10.00	0.67	0.15
13	15.25437	40.06	60.00	-19.94	35.62	50.00	-14.18	10.00	0.72	0.16
14	16.23188	38.06	60.00	---	34.49	50.00	-15.51	10.00	0.77	0.17
15	21.20941	34.21	60.00	---	33.71	50.00	-16.29	10.00	1.00	0.20

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 5707	HL 787	HL 4280	HL 2888				
---------	--------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Report ID: HOORAD_FCC.35117_DTS_Gateway

Date of Issue: 14-Jun-20

Test specification:		Section 15.107, Conducted emission at AC power port	
Test procedure:		ANSI C63.4, Sections 7.2 and 12.2.4	
Test mode:		Verdict: PASS	
Date(s):			
01-Jan-20			
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 110 VAC, 50 Hz
Remarks:			


Plot 8.1.1 Conducted emission measurements

LINE: L1
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: QUASI-PEAK, AVERAGE

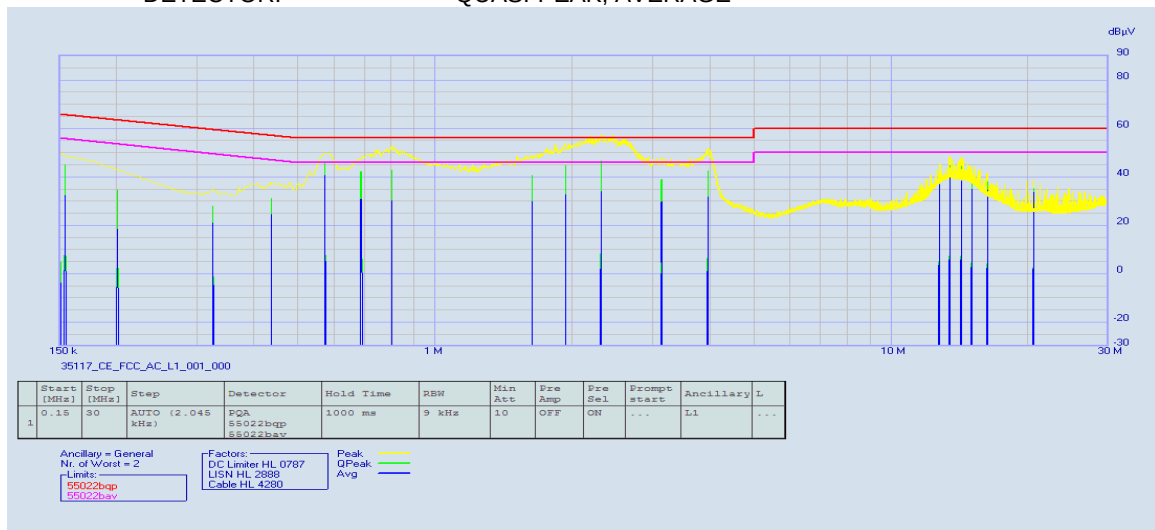

Plot 8.1.2 Conducted emission measurements

LINE: L2
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: QUASI-PEAK, AVERAGE

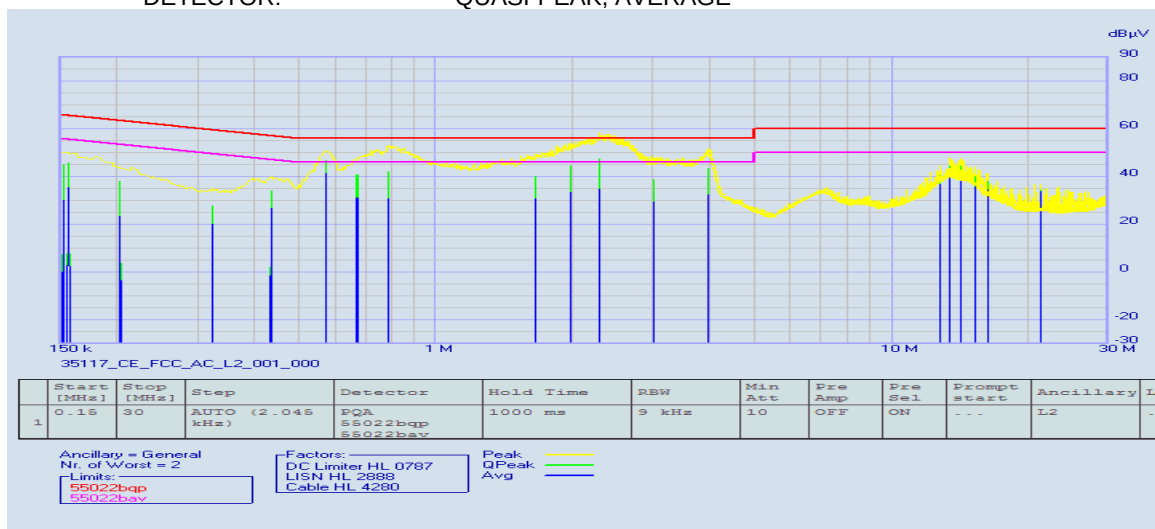



Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

8.2 Radiated emission measurements

8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.2.1.

Table 8.2.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)	
	10 m distance	3 m distance
30 - 88	29.5*	40.0
88 - 216	33.0*	43.5
216 - 960	35.5*	46.0
Above 960	43.5*	54.0

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log (S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.


8.2.2 Test procedure for measurements in semi-anechoic chamber

8.2.2.1 The EUT was set up as shown in Figure 8.2.1 and associated photograph/s, energized and the performance check was conducted.

8.2.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.2.2.3 The worst test results (the lowest margins) were recorded in Table 8.2.2 and shown in the associated plots.

Figure 8.2.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

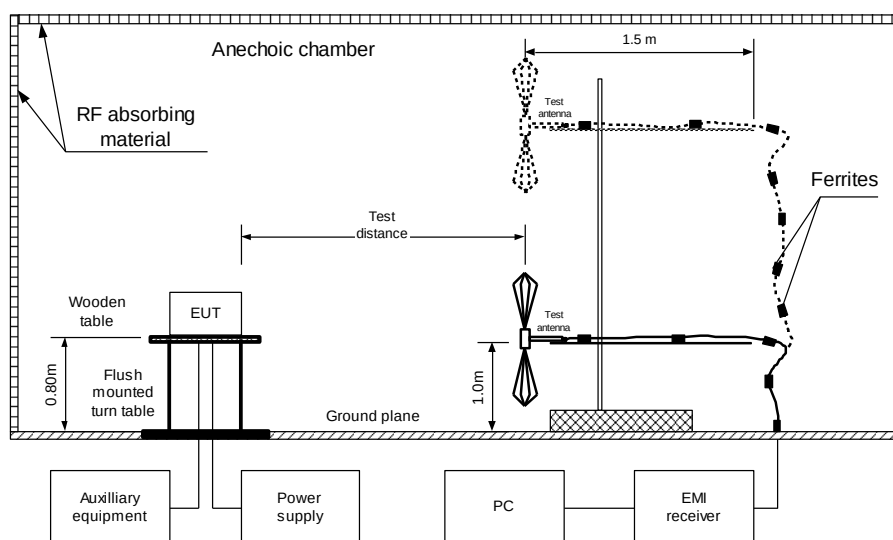



HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Table 8.2.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
38.973	32.81	27.35	40.0	-12.65	Vertical	1.02	312	Pass
44.442	30.96	25.91	40.0	-14.09	Vertical	1.02	125	
56.441	35.06	30.51	40.0	-9.49	Vertical	1.02	63	
66.287	34.41	30.81	40.0	-9.19	Vertical	1.02	260	
74.580	36.31	31.28	40.0	-8.72	Vertical	1.77	201	
138.996	40.13	32.97	43.5	-10.53	Vertical	1.04	299	
150.017	44.14	40.25	43.5	-3.25	Vertical	1.02	10	
159.413	43.11	37.95	43.5	-5.55	Vertical	1.02	0	
190.008	42.59	39.24	43.5	-4.26	Horizontal	1.02	0	
229.994	40.93	38.46	46.0	-7.54	Horizontal	1.41	325	
750.005	43.62	41.86	46.0	-4.14	Horizontal	1.00	226	

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 5000 MHz
RESOLUTION BANDWIDTH: 1000 kHz

RECESSION BANDWIDTH:				1000 KHz			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
Frequency, MHz	Peak			Average						
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
All emissions are more than 20 dB below the limit										Pass

*- Margin = Measured emission – specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 3903	HL 4360	HL 4933	HL 5288	HL 5372	HL 5665		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			


Plot 8.2.1 Radiated emission measurements in 30 – 1000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive
EUT POSITION: X

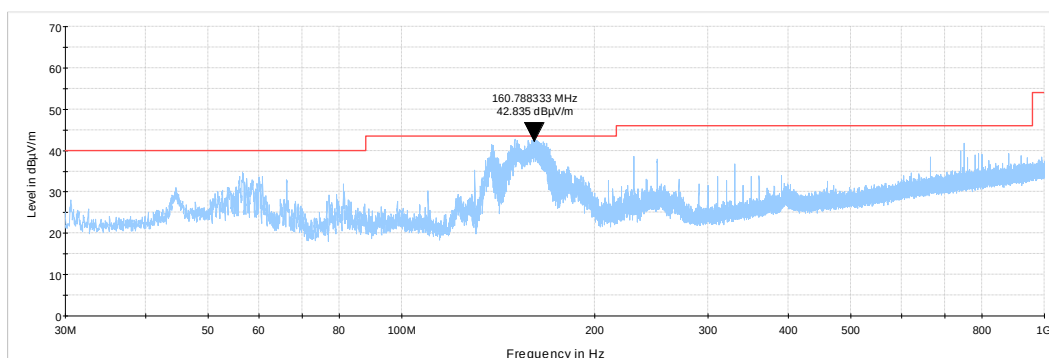

Plot 8.2.2 Radiated emission measurements in 30 – 1000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive
EUT POSITION: Y

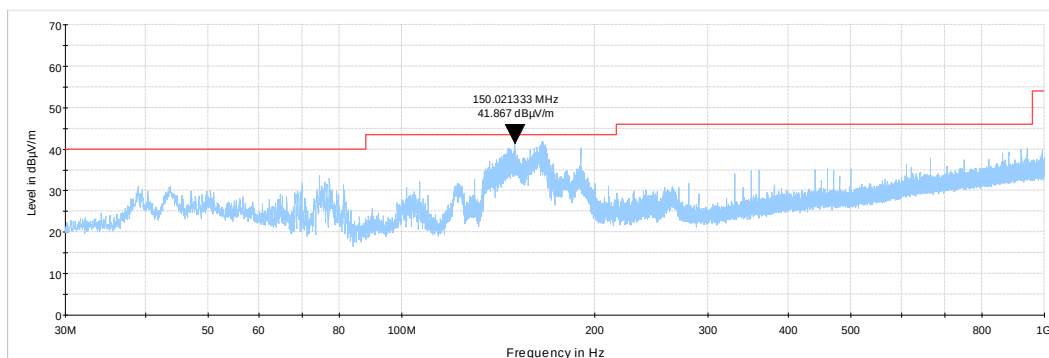




Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 8.3 and 12.2.5	
Test mode:		Verdict: PASS	
Date(s):			
29-Dec-19			
Temperature: 22 °C	Relative Humidity: 48 %	Air Pressure: 1015 hPa	Power: 110 VAC, 50 Hz
Remarks:			


Plot 8.2.3 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive
EUT POSITION: X

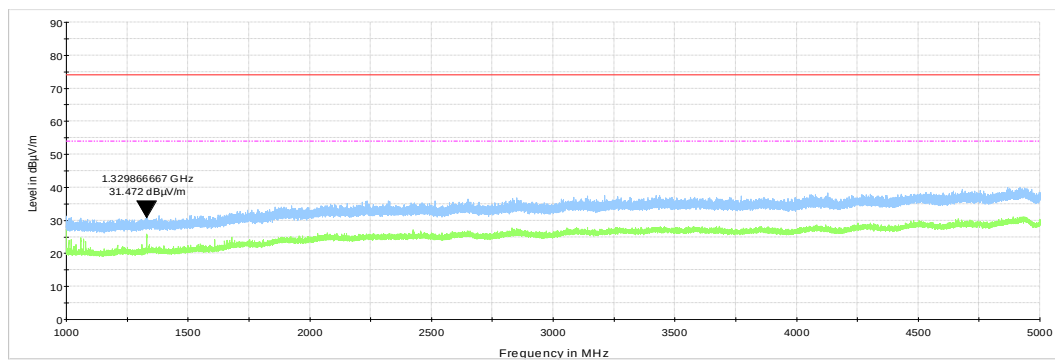

Plot 8.2.4 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive
EUT POSITION: Y

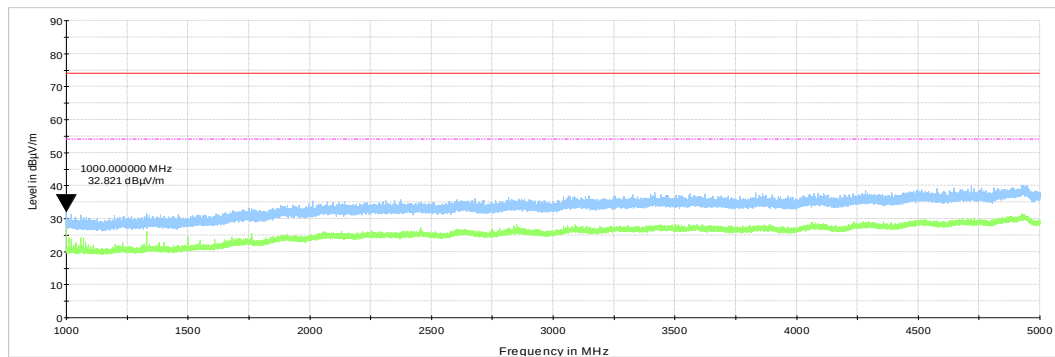

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	24-Feb-19	24-Feb-20
495	Autotransformer 0-255V, 10A	Variac	EMPL01	495	07-May-19	07-May-20
787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A01877	08-Oct-19	08-Oct-20
2888	LISN Two-line V-Network 50 Ohm / 50 uH + 5 Ohm, 16A, MIL STD 461E, CISPR 16-1	Rolf Heine	NNB-2/16Z	02/10018	19-Mar-19	19-Mar-20
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY41444762	04-Apr-19	04-Apr-20
3310	Multimeter	Fluke	115C	94321810	21-Jul-19	21-Jul-20
3384	Microwave Cable Assembly, 26.5 GHz, 1.0 m, N type/N type	Suhner Sucoflex	104EA	3384	31-Jan-19	31-Jan-20
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	07-Apr-19	07-Apr-20
4280	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0763A	01-Aug-19	01-Aug-20
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	31-Dec-18	31-Dec-19
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	06-Jan-20	06-Jan-21
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	08-Feb-19	08-Feb-22
5372	MXE EMI receiver, 3 Hz to 44 GHz	Keysight Technologies	N9038A	MY57290155	18-Jun-19	18-Jun-20
5621	Precision Fixed Attenuator, 50 Ohm, 5 W, 20 dB, DC to 18 GHz	Mini Circuits	BW-N20W5+	NA	06-Oct-19	06-Oct-20
5665	Cable SF118/11N(x2)/6M, 18 GHz, 11N/11N	Huber-Suhner	SF118	501644/118	23-Oct-19	23-Oct-20
5707	EMI receiver	PMM / Narda	PMM 9010F	060WW91101	22-Nov-19	22-Nov-21

10 APPENDIX B Test equipment correction factors

HL 2888 LISN Two-line V-Network 50 Ohm / 50 uH + 5 Ohm, 16A
Rolf Heine, model: NNB-2/16Z, s/n 02/10018, HL 2888

Frequency,	L1, dB	L2, dB	Uncertainty, dB
150	0.09	0.07	±0.09
170	0.08	0.07	±0.09
200	0.08	0.06	±0.09
250	0.09	0.06	±0.09
300	0.09	0.06	±0.09
350	0.09	0.07	±0.09
400	0.09	0.07	±0.09
500	0.09	0.07	±0.09
600	0.09	0.07	±0.09
700	0.10	0.08	±0.09
800	0.10	0.08	±0.09
900	0.11	0.08	±0.09
1000	0.11	0.08	±0.09
1200	0.11	0.09	±0.16
1500	0.12	0.10	±0.16
2000	0.14	0.12	±0.16
2500	0.15	0.12	±0.16
3000	0.16	0.14	±0.16
4000	0.19	0.16	±0.16
5000	0.23	0.19	±0.16
7000	0.30	0.25	±0.16
10000	0.46	0.40	±0.16
15000	0.71	0.62	±0.16
20000	0.94	0.85	±0.16
30000	1.41	1.33	±0.32

HL 0446: Active Loop Antenna
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ A/m.

10.1.1 HL 4933 Active Horn Antenna, 1 GHz to 18 GHz
COM-POWER CORPORATION AHA-118 , s/n 701046

Frequency, MHz	Measured antenna factor, dB/m
1000	-16.1
1050	-16.0
1100	-15.1
1150	-16.4
1200	-16.0
1250	-15.6
1300	-15.1
1350	-14.8
1400	-15.1
1450	-15.1
1500	-15.5
1550	-15.2
1600	-14.7
1650	-14.4
1700	-14.4
1750	-14.0
1800	-13.6
1850	-12.7
1900	-11.9
1950	-11.9
2000	-11.8
2050	-11.3
2100	-11.3
2150	-11.7
2200	-12.3
2250	-12.3
2300	-12.4
2350	-12.2
2400	-11.7
2450	-11.5
2500	-11.5
2550	-11.5
2600	-11.5
2650	-11.3
2700	-11.3
2750	-11.1
2800	-11.1
2850	-11.3
2900	-11.1
2950	-11.0
3000	-11.1
3050	-10.9
3100	-10.7
3150	-10.6

Frequency, MHz	Measured antenna factor, dB/m
3200	-11.2
3250	-10.8
3300	-10.8
3350	-10.7
3400	-10.3
3450	-10.2
3500	-10.1
3550	-10.4
3600	-10.5
3650	-10.4
3700	-10.4
3750	-10.3
3800	-10.1
3850	-10.0
3900	-9.9
3950	-9.8
4000	-9.7
4050	-9.3
4100	-8.6
4150	-8.2
4200	-8.3
4250	-8.5
4300	-8.5
4350	-8.3
4400	-8.0
4450	-7.7
4500	-7.6
4550	-7.4
4600	-7.5
4650	-7.8
4700	-7.6
4750	-6.8
4800	-6.1
4850	-5.7
4900	-5.8
4950	-5.8
5000	-6.0
5050	-5.7
5100	-5.4
5150	-5.1
5200	-4.6
5250	-4.6
5300	-4.8
5350	-5.1

Frequency, MHz	Measured antenna factor, dB/m	Frequency, MHz	Measured antenna factor, dB/m
5400	-5.1	8200	1.1
5450	-4.6	8250	1.0
5500	-4.0	8300	0.8
5550	-3.5	8350	0.5
5600	-3.1	8400	0.3
5650	-3.3	8450	0.5
5700	-3.8	8500	0.8
5750	-4.3	8550	0.9
5800	-4.3	8600	0.9
5850	-4.0	8650	0.6
5900	-3.5	8700	0.0
5950	-3.2	8750	-0.3
6000	-3.2	8800	0.0
6050	-3.2	8850	0.5
6100	-3.3	8900	0.6
6150	-3.3	8950	0.4
6200	-3.1	9000	-0.3
6250	-2.9	9050	-1.0
6300	-2.8	9100	-1.2
6350	-3.0	9150	-0.6
6400	-3.2	9200	-0.1
6450	-3.4	9250	0.0
6500	-3.7	9300	-0.1
6550	-3.6	9350	-0.5
6600	-3.4	9400	-0.7
6650	-2.9	9450	-0.4
6700	-2.6	9500	0.2
6750	-2.5	9550	0.5
6800	-2.6	9600	0.5
6850	-2.8	9650	0.3
6900	-2.7	9700	0.0
6950	-2.3	9750	0.0
7000	-2.0	9800	0.6
7050	-1.9	9850	1.4
7100	-1.8	9900	1.8
7150	-1.8	9950	1.7
7200	-1.7	10000	1.4
7250	-1.7	10100	0.8
7300	-1.6	10200	1.2
7350	-1.5	10300	1.5
7400	-1.5	10400	1.1
7450	-1.3	10500	1.6
7500	-1.4	10600	3.0
7550	-1.3	10700	2.9
7600	-1.0	10800	1.3
7650	-0.7	10900	1.0
7700	-0.3	11000	1.1
7750	0.1	11100	0.7
7800	0.3	11200	1.1
7850	0.4	11300	1.5
7900	0.2	11400	1.4
7950	0.1	11500	0.6
8000	0.2	11600	1.0
8050	0.3	11700	1.4
8100	0.8	11800	0.7
8150	1.1	11900	0.9



Frequency, MHz	Measured antenna factor, dB/m
12400	2.1
12500	1.2
12600	1.3
12700	2.4
12800	1.8
12900	0.6
13000	0.9
13100	1.1
13200	0.7
13300	0.9
13400	1.8
13500	2.1
13600	1.2
13700	0.8
13800	1.2
13900	1.5
14000	1.7
14100	2.2
14200	2.8
14300	3.0
14400	3.0
14500	3.3
14600	4.0
14700	5.4
14800	5.4
14900	4.7
15000	3.1
15100	2.0
15200	1.5
15300	1.4
15400	1.7

Frequency, MHz	Measured antenna factor, dB/m
15500	1.9
15600	1.2
15700	0.2
15800	0.6
15900	1.2
16000	0.6
16100	0.6
16200	1.9
16300	2.2
16400	0.9
16500	0.7
16600	1.7
16700	1.3
16800	1.0
16900	2.0
17000	2.4
17100	1.8
17200	1.8
17300	2.5
17400	2.7
17500	3.1
17600	3.7
17700	4.3
17800	4.8
17900	5.7
18000	5.1

HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-1082 for anechoic chamber, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC and radio group manager

12 APPENDIX D Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

13 APPENDIX E

Specification references

FCC 47CFR part 15: 2019

ANSI C63.10: 2013

ANSI C63.4: 2014

Radio Frequency Devices

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT