



LCIE

Bluetooth Low Energy Template: Release October 11th, 2019

TEST REPORT

N°: 164556-745366-A

Version : 01

Subject

Radio spectrum matters
tests according to standards:
47 CFR Part 15.247 & RSS-247 Issue 2 & RSS-Gen Issue 5 [P](#)

Issued to

URGOTECH
15 avenue d'Iena
75116 - PARIS
FRANCE

Apparatus under test

Product	Neurofeedback headband
Trade mark	URGONIGHT
Manufacturer	URGOTECH
Model under test	URGOnight V1.0
Serial number	Sn
FCC ID	2AVTE-UNIGHT1
IC	25919-UNIGHT1

Conclusion

See Test Program chapter

Test date

December 19, 2019 to December 20, 2019

Test location

Fontenay Aux Roses & Ecuelles

Test Site

6230B-1

Sample receipt date

December 19, 2019

Composition of document


47 pages

Document issued on

April 22, 2020

Written by :
Julien Palard
Tests operator

Approved by :



This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified or rule defined by the test method, the decision of conformity doesn't take into account the uncertainty of measures. This document doesn't anticipate any certification decision.

LCIE

Laboratoire Central des Industries Electriques
Une société de Bureau Veritas

33, Av du Général Leclerc
92266 Fontenay Aux Roses
FRANCE

Tél : +33 1 40 95 60 60
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Version	Date	Author	Modification
01	April 22, 2020	Julien Palard	Creation of the document

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.



SUMMARY

1.	TEST PROGRAM	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)	5
3.	OCCUPIED BANDWIDTH.....	9
4.	6DB EMISSION BANDWIDTH	12
5.	DUTY CYCLE	15
6.	MAXIMUM CONDUCTED OUTPUT POWER	18
7.	POWER SPECTRAL DENSITY	21
8.	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS AT THE BAND EDGE	24
9.	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS.....	27
10.	AC POWER LINE CONDUCTED EMISSIONS.....	30
11.	UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS	38
12.	UNCERTAINTIES CHART	47

1. TEST PROGRAM

References

- 47 CFR Part 15.247
- RSS 247 Issue 2
- RSS Gen Issue 5
- KDB 558074 D01 DTS Meas Guidance v05r02
- ANSI C63.10-2013

Radio requirement:

Clause (47CFR Part 15.247 & RSS-247 Issue 2 & RSS-Gen Issue 5) Test Description	Test result - Comments
Occupied Bandwidth P	☒ PASS ☐ FAIL ☐ NA ☐ NP(1)
6dB Bandwidth P	☒ PASS ☐ FAIL ☐ NA() ☐ NP(1)
Duty Cycle P	☒ PASS ☐ FAIL ☐ NA ☐ NP(1)
Maximum Conducted Output Power P	☒ PASS ☐ FAIL ☐ NA ☐ NP(1)
Power Spectral Density P	☒ PASS ☐ FAIL ☐ NA ☐ NP(1)
Conducted Spurious Emission at the Band Edge P	☒ PASS ☐ FAIL ☐ NA() ☐ NP(1)
Unwanted Emissions into Non-Restricted Frequency Bands P	☒ PASS ☐ FAIL ☐ NA() ☐ NP(1)
AC Power Line Conducted Emission P	☒ PASS ☐ FAIL ☐ NA(2) ☐ NP(1)
Unwanted Emissions into Restricted Frequency Bands P	☒ PASS ☐ FAIL ☐ NA ☐ NP(1)
Receiver Radiated emissions P	☒ PASS ☐ FAIL ☐ NA ☐ NP(1)
This table is a summary of test report, see conclusion of each clause of this test report for detail.	

(1): Limited program

(2): EUT not directly or indirectly connected to the AC Power Public Network

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):
URGONIGHT URGOnight V1.0

Serial Number: Sn



Equipment Under Test

Power supply:

During all the tests, EUT is supplied by V_{nom} : 3,7VDC

For measurement with different voltage, it will be presented in test method.

Name	Type	Rating	Reference / Sn	Comments
Supply1	☐ AC ☒ DC ☐ Battery	-	-	-

Voltage table used (for Power Line Conducted Emissions):

Type	Measurement performed:	
☒ AC	☒ 120VAC/60Hz	☒ 240VAC/50Hz
☐ DC	☐ + VDC	☐ -....VDC
☐ Battery	☐ + VDC	☐ -....VDC
☐ USB (Laptop auxiliary)	☐ 120VAC/60Hz (Laptop auxiliary)	☐ 240VAC/50Hz(Laptop auxiliary)

Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
1	USB-C Cable	-	☒	☐	☒	-

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
Laptop	-	-	Use to set EUT

Equipment information:

Bluetooth LE Type:	☐ BLE	☐ v4.0	☐ v4.1	☒ v4.2
Frequency band:	[2400 – 2483.5] MHz			
Number of Channel:	40			
Spacing channel:	2MHz			
Channel bandwidth:	1MHz			
Antenna Type:	☒ Integral	☐ External	☐ Dedicated	
Antenna connector:	☐ Yes	☐ No	☒ Temporary for test	
Transmit chains:	1			
	Single antenna			
Receiver chains	1			
Type of equipment:	☒ Stand-alone	☐ Plug-in	☐ Combined	
Ad-Hoc mode:	☐ Yes		☒ No	
Duty cycle:	☒ Continuous duty	☐ Intermittent duty	☐ 100% duty	
Equipment type:	☒ Production model		☐ Pre-production model	
Operating temperature range:	Tmin:	☒ -20°C	☐ 0°C	☐ X°C
	Tnom:	20°C		
	Tmax:	☐ 35°C	☐ 55°C	☒ 30°C
Type of power source:	☐ AC power supply	☐ DC power supply	☒ Battery	
Operating voltage range:	Vnom:	☐ 120V/60Hz	☒ 3,7 Vdc	
		☐ 240V/50Hz	☐ X Vdc	

Antenna Characteristic			
Antenna assembly	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)
1	1,5	2400MHz – 2483,5 MHz	50

Hardware information		
Firmware (if applicable):	V. :	nRFv267 STMv267
Software (if applicable):	V. :	N.A

CHANNEL PLAN			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
Cmin: 0	2402	Cmid: 20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	Cmax: 39	2480

DATA RATE		
Data Rate (Mbps)	Modulation Type	Worst Case Modulation
1	GFSK	☒
2	GFSK	☐

2.2. RUNNING MODE

Test mode	Description of test mode
Test mode 1	Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
Test	Running mode
Occupied Bandwidth	☒ Test mode 1 (1) ☐ Alternative test mode()
6dB Bandwidth	☒ Test mode 1 (1) ☐ Alternative test mode()
Duty Cycle	☒ Test mode 1 (1) ☐ Alternative test mode()
Maximum Conducted Output Power	☒ Test mode 1 (1) ☐ Alternative test mode()
Power Spectral Density	☒ Test mode 1 (1) ☐ Alternative test mode()
Conducted Spurious Emission at the Band Edge	☒ Test mode 1 (1) ☐ Alternative test mode()
Unwanted Emissions into Non-Restricted Frequency Bands	☒ Test mode 1 (1) ☐ Alternative test mode()
AC Power Line Conducted Emission	☒ Test mode 1 (1) ☐ Alternative test mode()
Unwanted Emissions into Restricted Frequency Bands	☒ Test mode 1 (1) ☐ Alternative test mode()

2.3. EQUIPMENT LABELLING

No labelling

2.4. EQUIPMENT MODIFICATION

☒ None ☐ Modification:

3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Test performed by : Julien Palard
Date of test : December 19, 2019
Ambient temperature : 24 °C
Relative humidity : 38 %

3.2. TEST SETUP

- The Equipment under Test is installed:

- ☒ On a table
☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
☐ Radiated Method

- Test Procedure:


- ☐ RSS-Gen Issue 5 § 6.7
☒ ANSI C63.10 § 6.9.2

Measurement Procedure:

- RBW shall be in the range of 1% to 5% of the anticipated occupied bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- SPAN = Capture all products of the modulation process
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- OBW 99% function of spectrum analyzer used

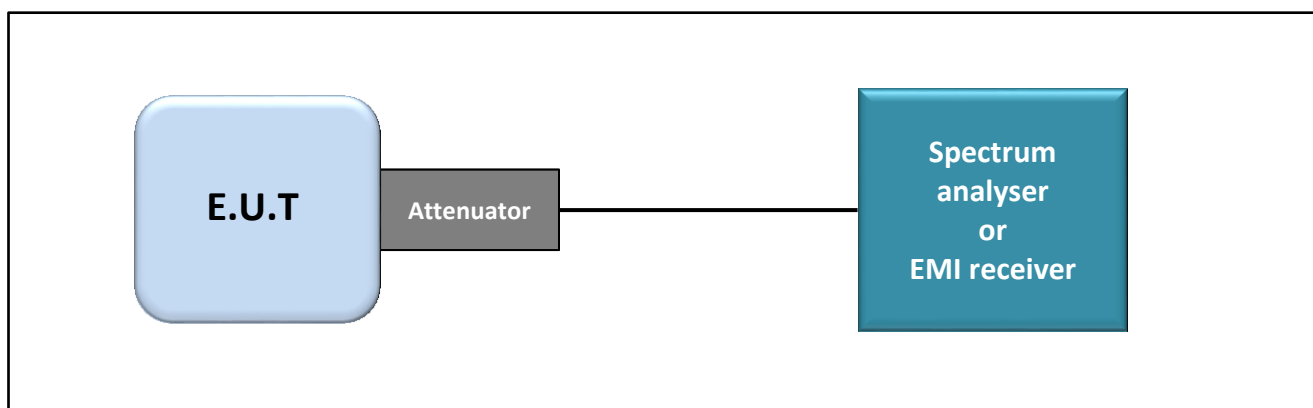

Test set up of Occupied Bandwidth

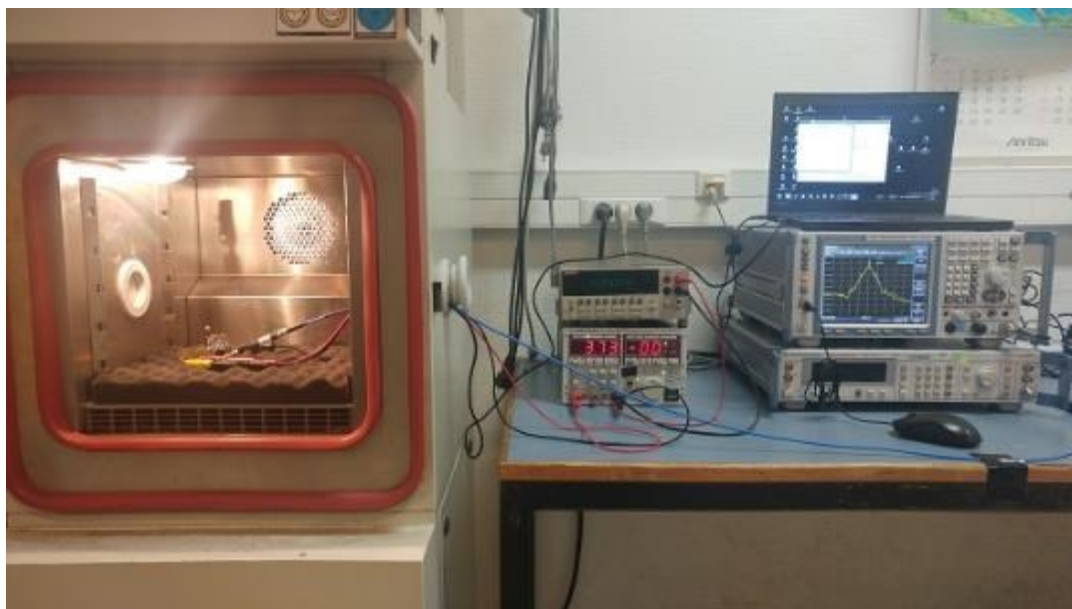

Photograph for Occupied bandwidth

3.3. LIMIT


None

3.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Programmable DC power supply	ROHDE & SCHWARZ	NGSM32/10	A7040074	Calibrate with multimeter	Calibrate with multimeter
Multimeter	KEITHLEY	2000	A1242090	2019/05	2021/05
Cable + Attenuateur 20dB	PASTERNAK	PE350-150CM	A5329866	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642026	2019/07	2021/07

Note: In our quality system, the test equipment calibration due is more & less 2 months

3.5. RESULTS

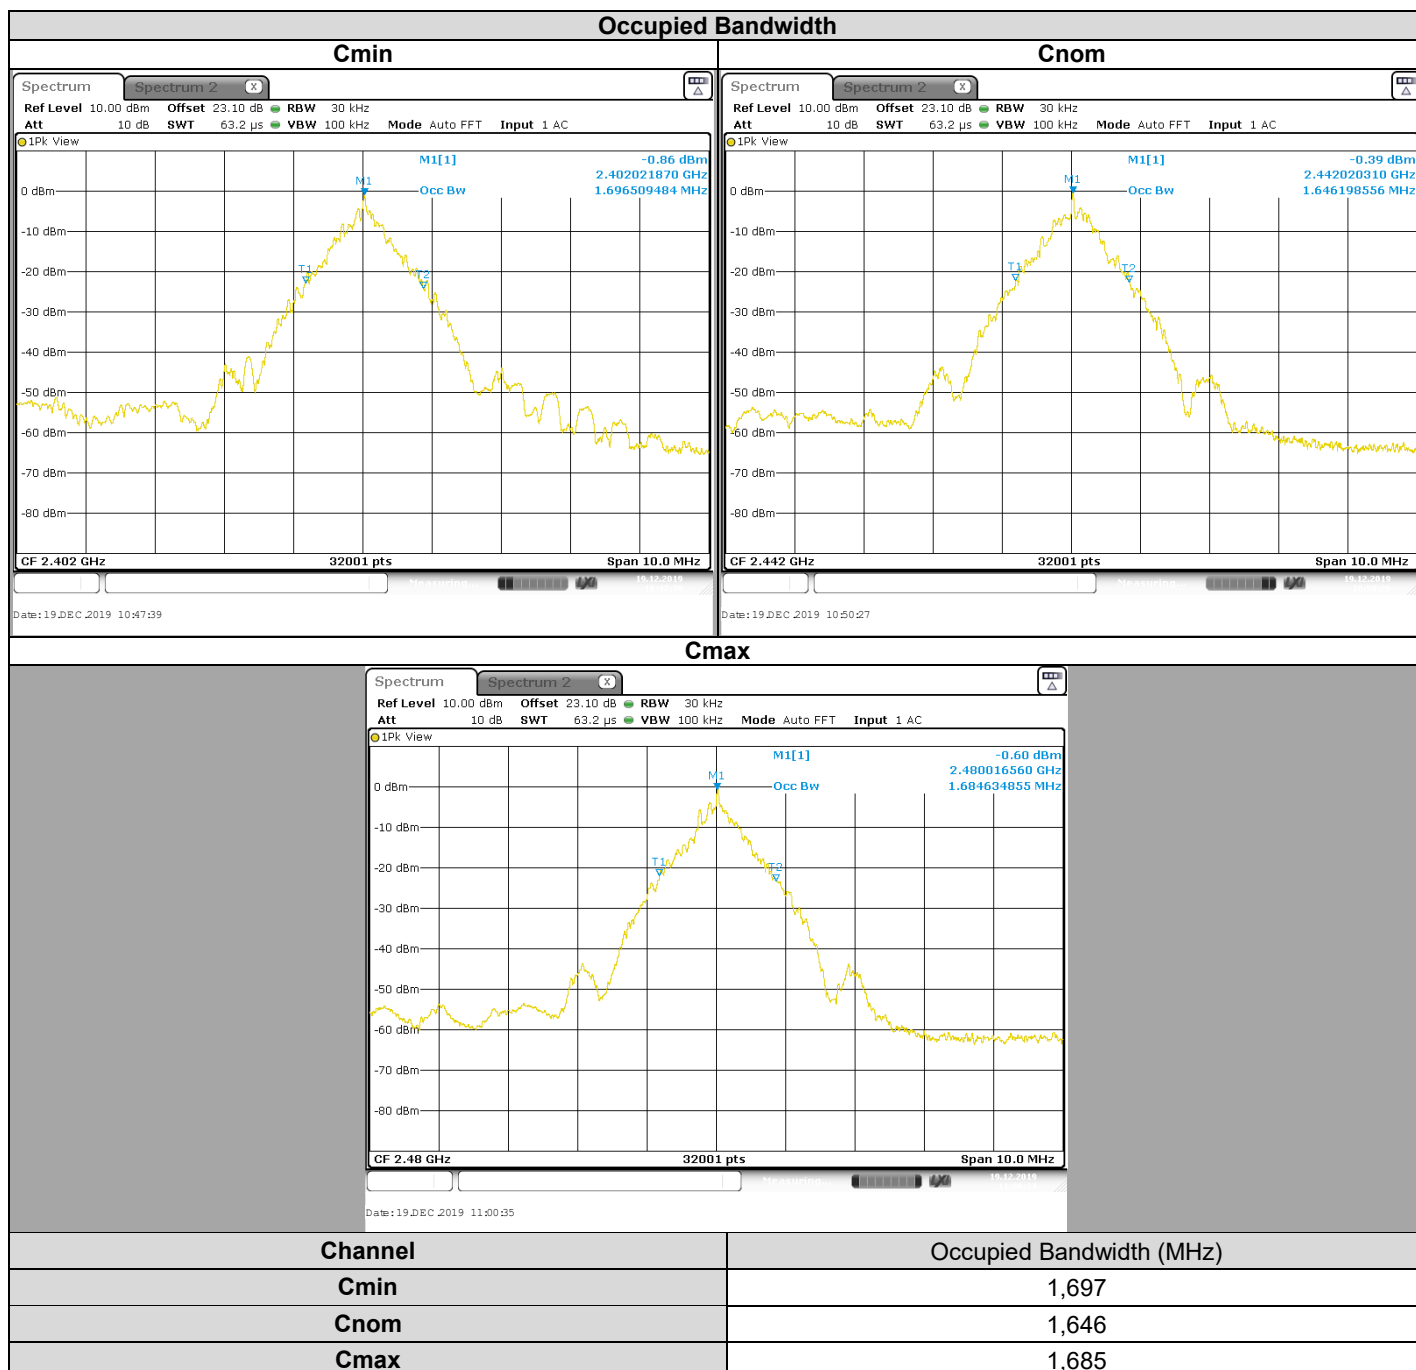

3.6. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **URGONIGHT URGONight V1.0**, SN: **Sn**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS-GEN ISSUE 5** limits.

4. 6dB EMISSION BANDWIDTH

4.1. TEST CONDITIONS

Test performed by : Julien Palard
Date of test : December 19, 2019
Ambient temperature : 24 °C
Relative humidity : 38 %

4.2. TEST SETUP

- The Equipment under Test is installed:

- ☒ On a table
☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
☐ Radiated Method

- Test Procedure:


- ☒ ANSI C63.10 § 11.8.1
☐ ANSI C63.10 § 11.8.2

Measurement Procedure:

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.

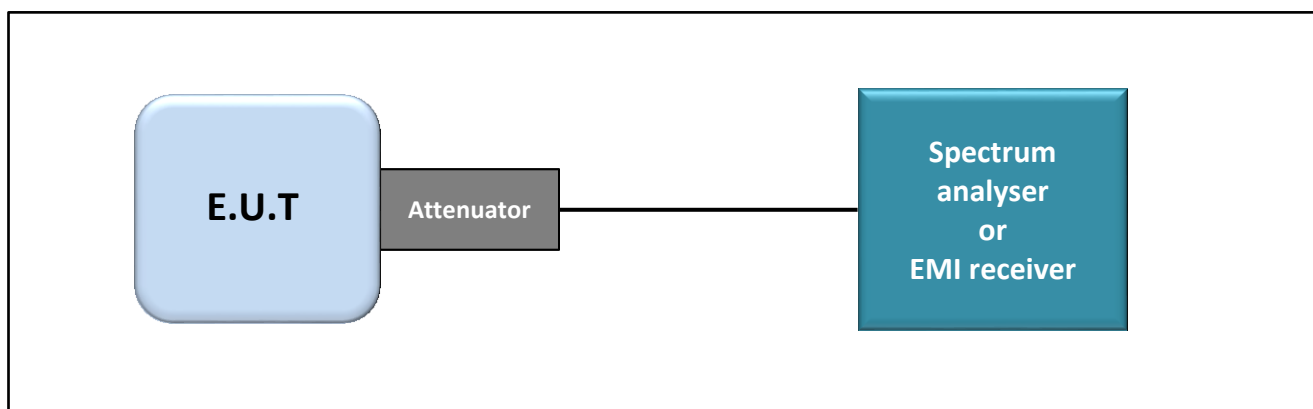

Test set up of 6dB Emission Bandwidth

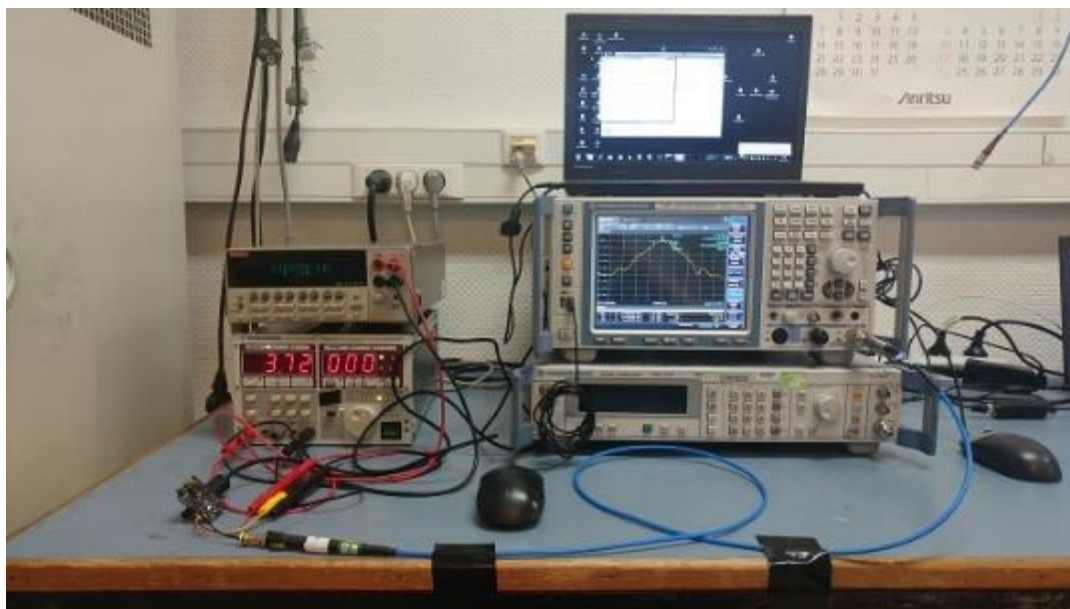

Photograph for 6dB emission bandwidth

4.3. LIMIT


Frequency range	The 6dB bandwidth Limit
2400MHz to 2483.5MHz	$\geq 500\text{kHz}$

4.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Programmable DC power supply	ROHDE & SCHWARZ	NGSM32/10	A7040074	Calibrate with multimeter	Calibrate with multimeter
Multimeter	KEITHLEY	2000	A1242090	2019/05	2021/05
Cable + Attenuateur 20dB	PASTERNAK	PE350-150CM	A5329866	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642026	2019/07	2021/07

Note: In our quality system, the test equipment calibration due is more & less 2 months

4.5. RESULTS

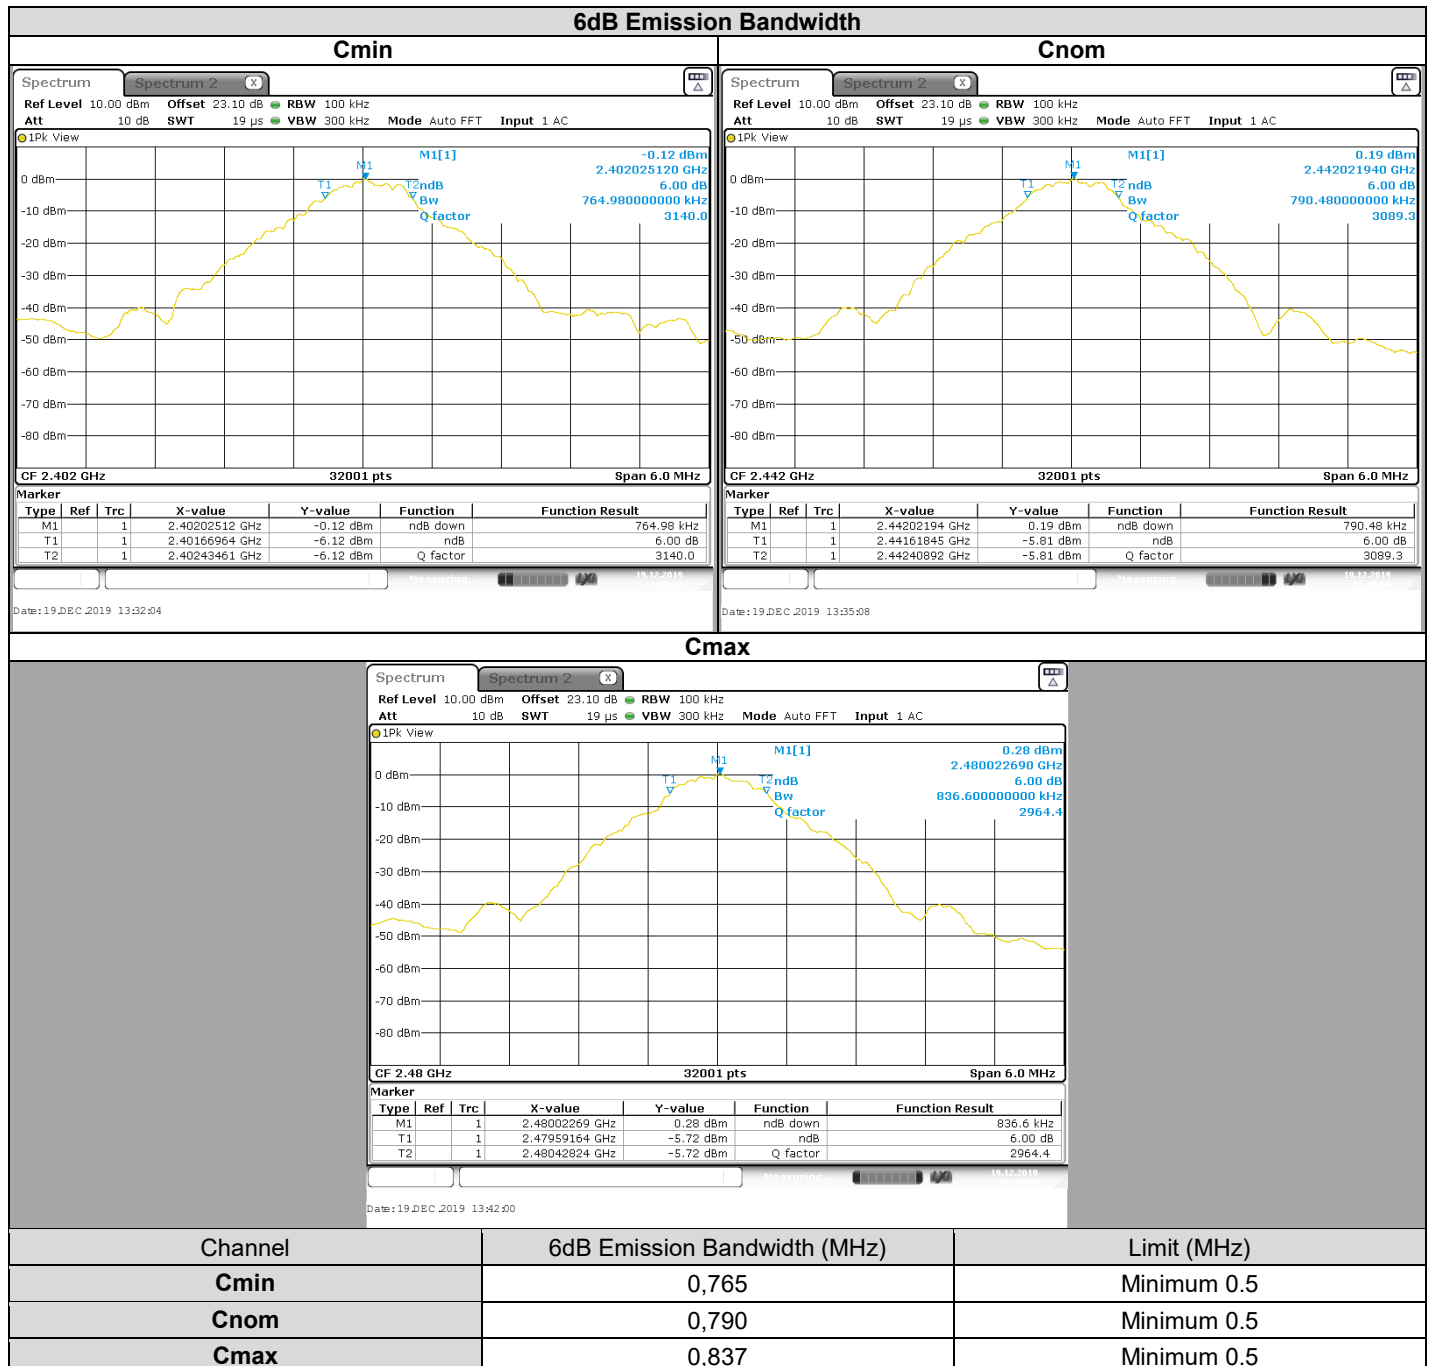

4.6. CONCLUSION

6dB Emission Bandwidth measurement performed on the sample of the product **URGONIGHT URGOnight V1.0**, SN: **Sn**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

5. DUTY CYCLE

5.1. TEST CONDITIONS

Test performed by : Julien Palard
Date of test : December 19, 2019
Ambient temperature : 24 °C
Relative humidity : 38 %

5.2. TEST SETUP

- The Equipment under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ ANSI C63.10 § 11.6

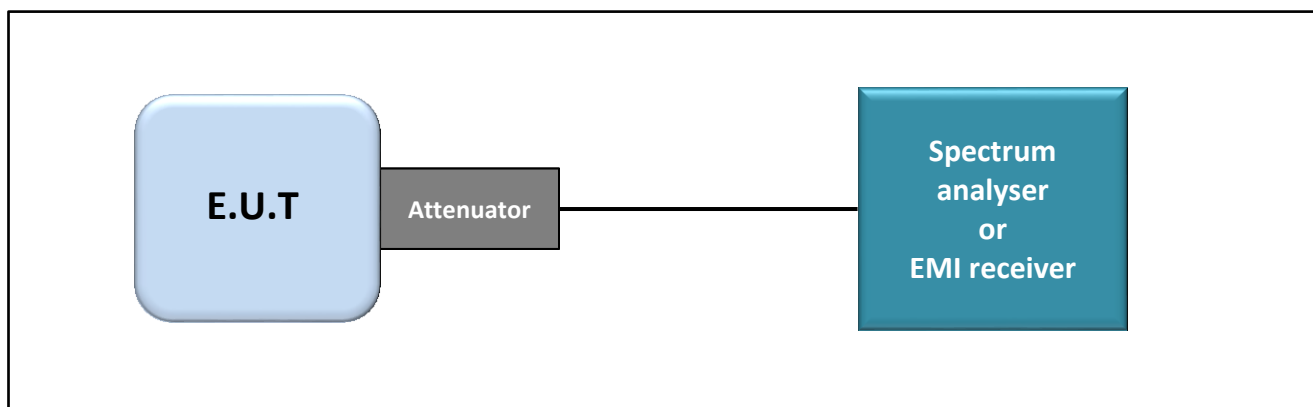

Test set up of Duty Cycle

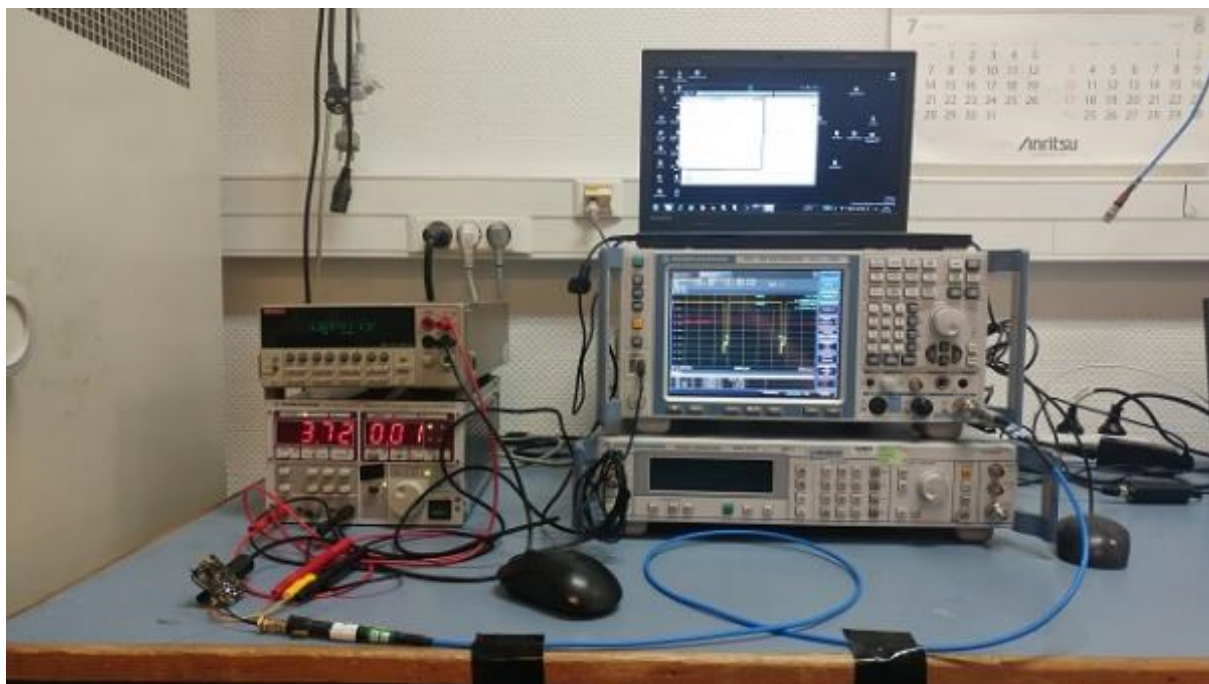

Photograph for Duty Cycle

5.3. LIMIT


None

5.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Programmable DC power supply	ROHDE & SCHWARZ	NGSM32/10	A7040074	Calibrate with multimeter	Calibrate with multimeter
Multimeter	KEITHLEY	2000	A1242090	2019/05	2021/05
Cable + Attenuateur 20dB	PASTERNAK	PE350-150CM	A5329866	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642026	2019/07	2021/07

Note: In our quality system, the test equipment calibration due is more & less 2 months

5.5. RESULTS

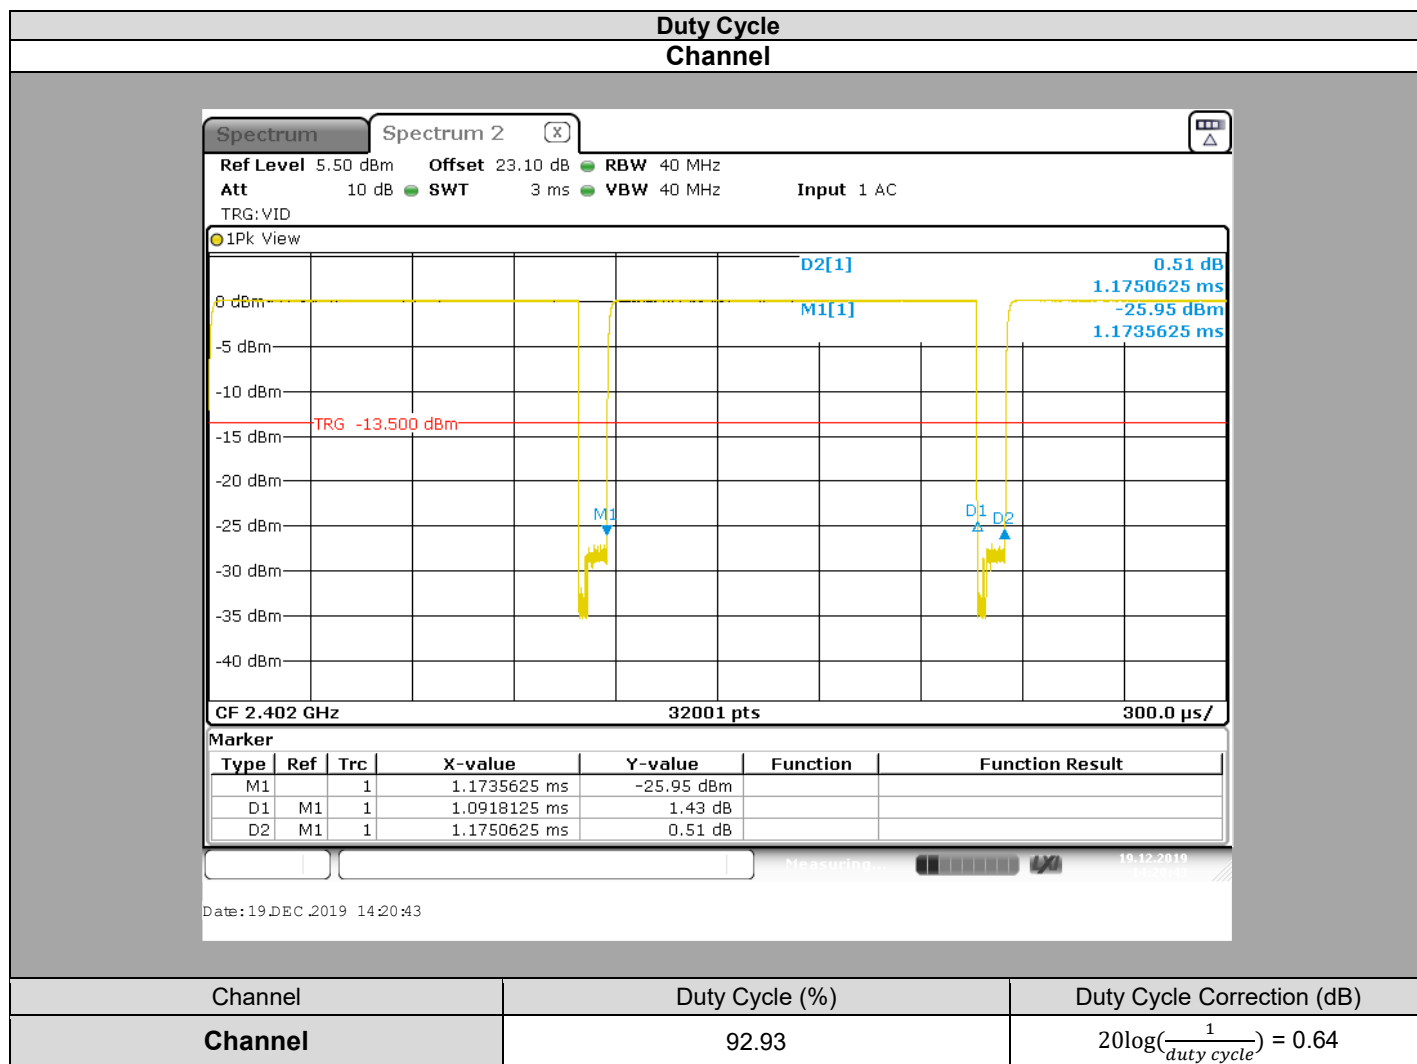

5.6. CONCLUSION

Duty Cycle measurement performed on the sample of the product **URGONIGHT URGOnight V1.0**, SN: **Sn**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1. TEST CONDITIONS

Test performed by : Julien Palard
Date of test : December 19, 2019
Ambient temperature : 24 °C
Relative humidity : 38 %

6.2. TEST SETUP

- The Equipment under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ ANSI C63.10 § 11.9.1.1
- ☐ ANSI C63.10 § 11.9.1.2
- ☐ ANSI C63.10 § 11.9.2.2.2 (Method AVGSA-1)
- ☐ ANSI C63.10 § 11.9.2.2.4 (Method AVGSA-2)

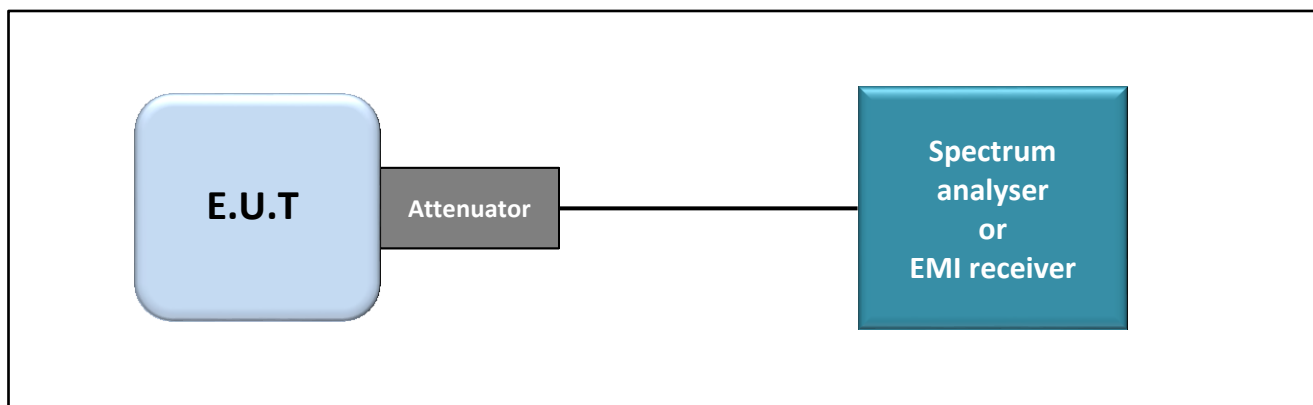

Test set up of Maximum Conducted Output Power

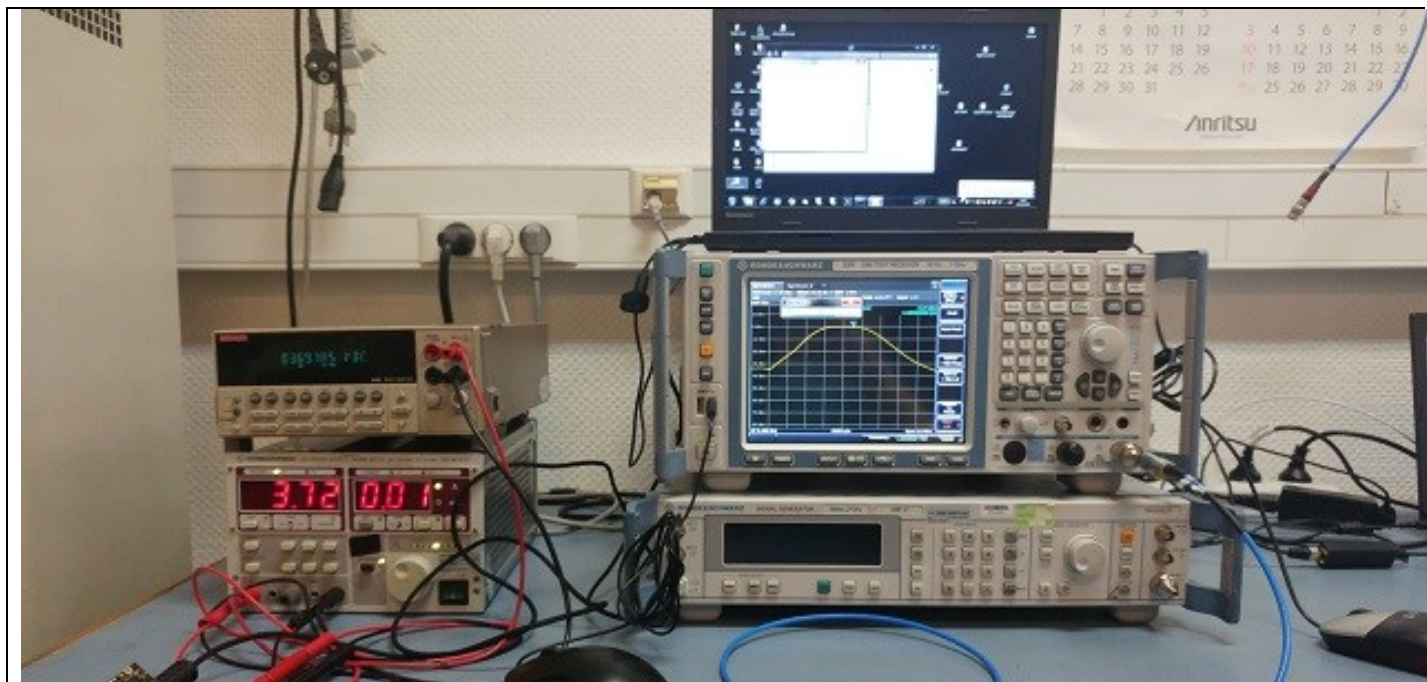

Photograph for Maximum Conducted Output Power

6.3. LIMIT

Frequency range	Maximum Conducted Output Power
2400MHz to 2483.5MHz	≤30dBm*


*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi

6.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Programmable DC power supply	ROHDE & SCHWARZ	NGSM32/10	A7040074	Calibrate with multimeter	Calibrate with multimeter
Multimeter	KEITHLEY	2000	A1242090	2019/05	2021/05
Cable + Attenuateur 20dB	PASTERNAK	PE350-150CM	A5329866	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642026	2019/07	2021/07

Note: In our quality system, the test equipment calibration due is more & less 2 months

6.5. RESULTS

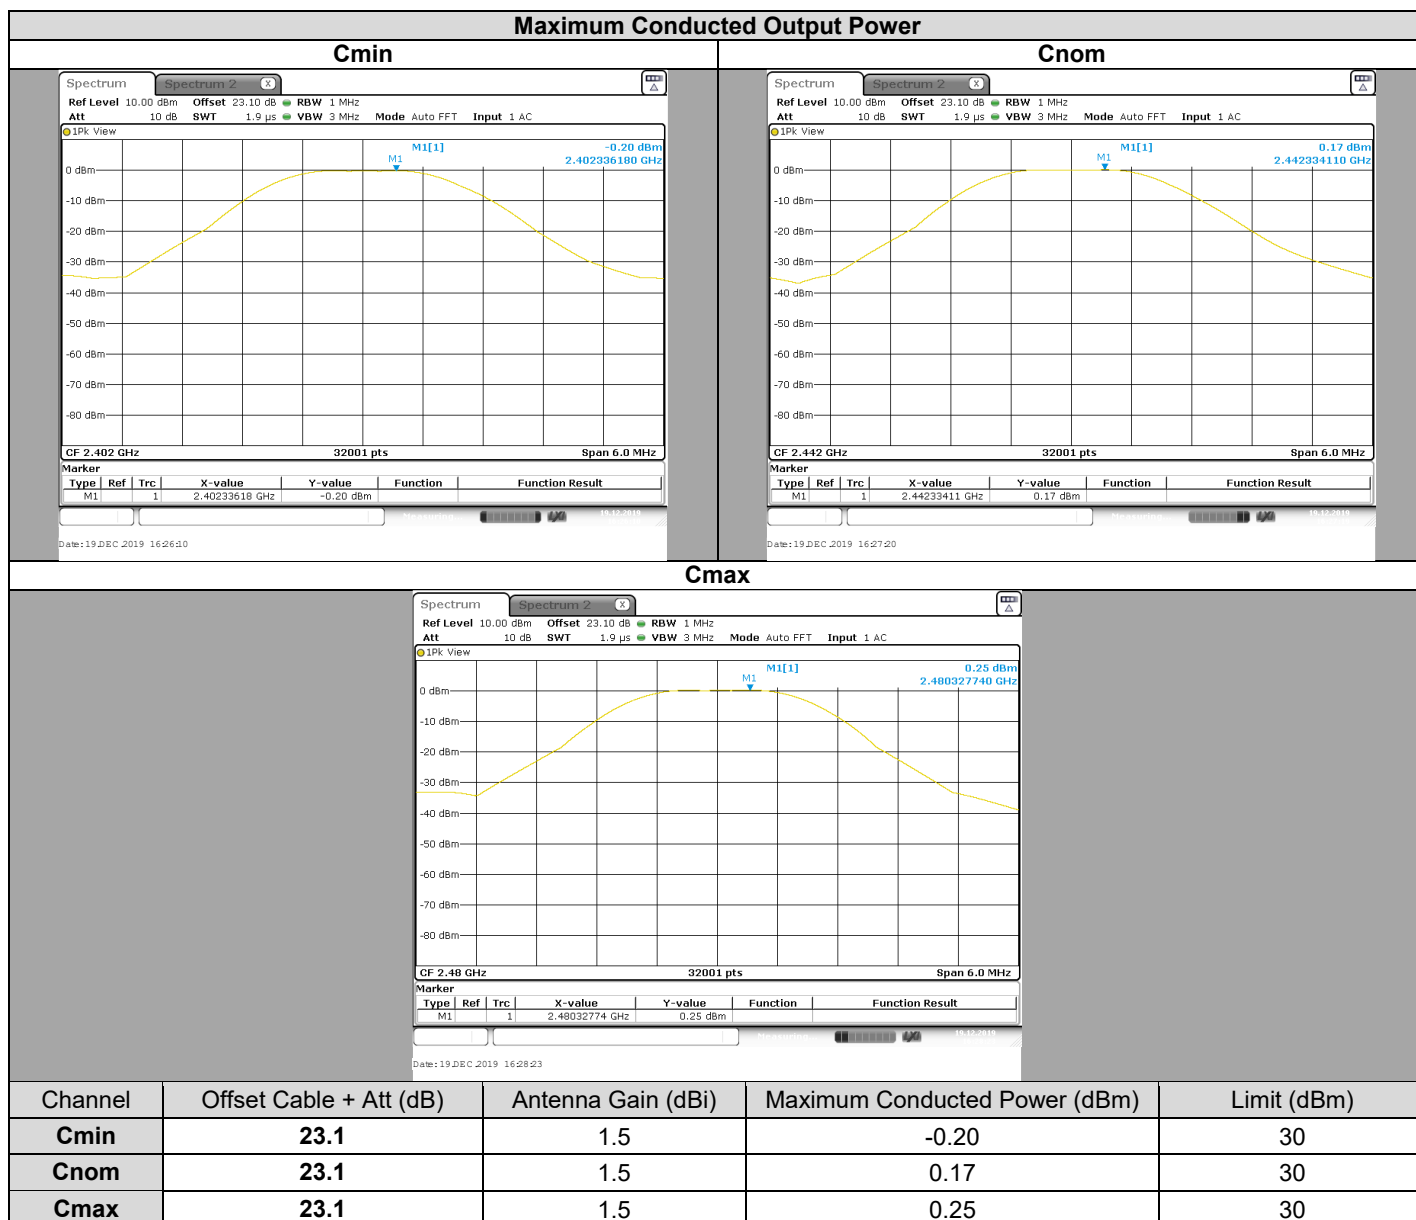

6.6. CONCLUSION

Maximum Conducted Output Power measurement performed on the sample of the product **URGONIGHT URGOnight V1.0**, SN: **Sn**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

7. POWER SPECTRAL DENSITY

7.1. TEST CONDITIONS

Test performed by : Julien Palard
Date of test : December 19, 2019
Ambient temperature : 24 °C
Relative humidity : 38 %

7.2. TEST SETUP

- The Equipment Under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ ANSI C63.10 § 11.10.2 (Method PKPSD)
- ☐ ANSI C63.10 § 11.10.3 (Method AVGPS-1)

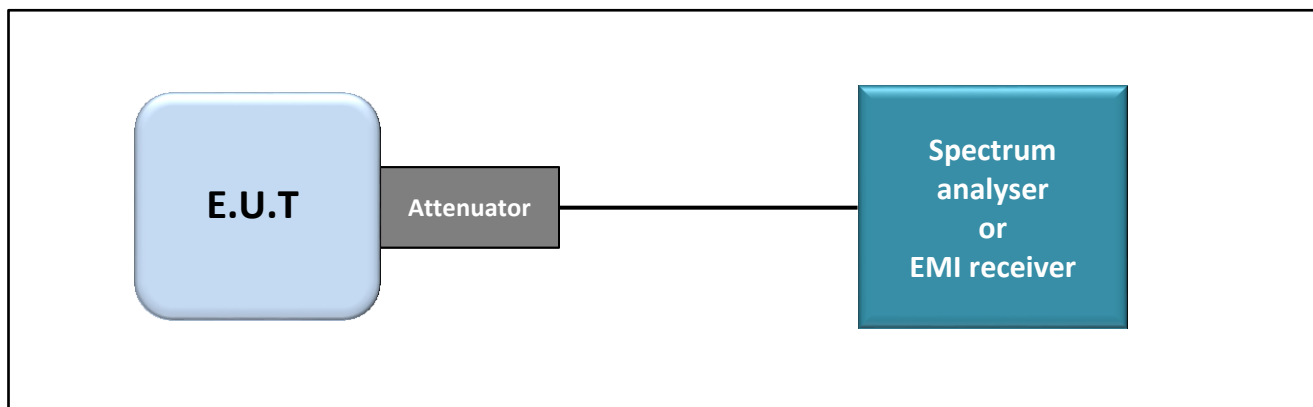

Test set up of Power Spectral Density

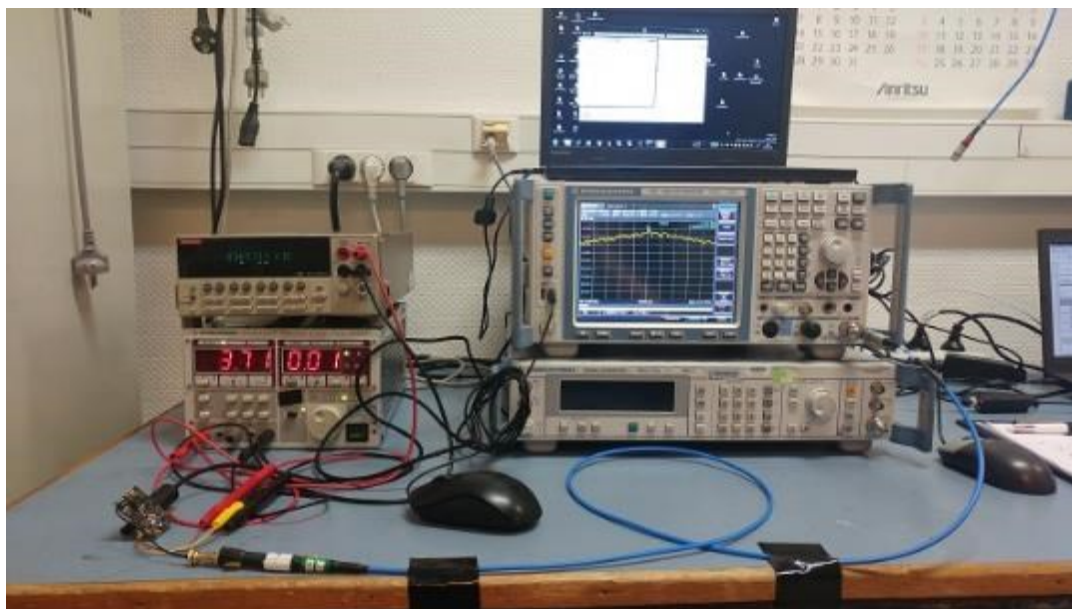

Photograph for Power Spectral Density

7.3. LIMIT

Frequency range	Power Spectral Density
2400MHz to 2483.5MHz	$\leq 8\text{dBm}/3\text{kHz}^*$


*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi

7.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Programmable DC power supply	ROHDE & SCHWARZ	NGSM32/10	A7040074	Calibrate with multimeter	Calibrate with multimeter
Multimeter	KEITHLEY	2000	A1242090	2019/05	2021/05
Cable + Attenuateur 20dB	PASTERNAK	PE350-150CM	A5329866	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642026	2019/07	2021/07

Note: In our quality system, the test equipment calibration due is more & less 2 months

7.5. RESULTS

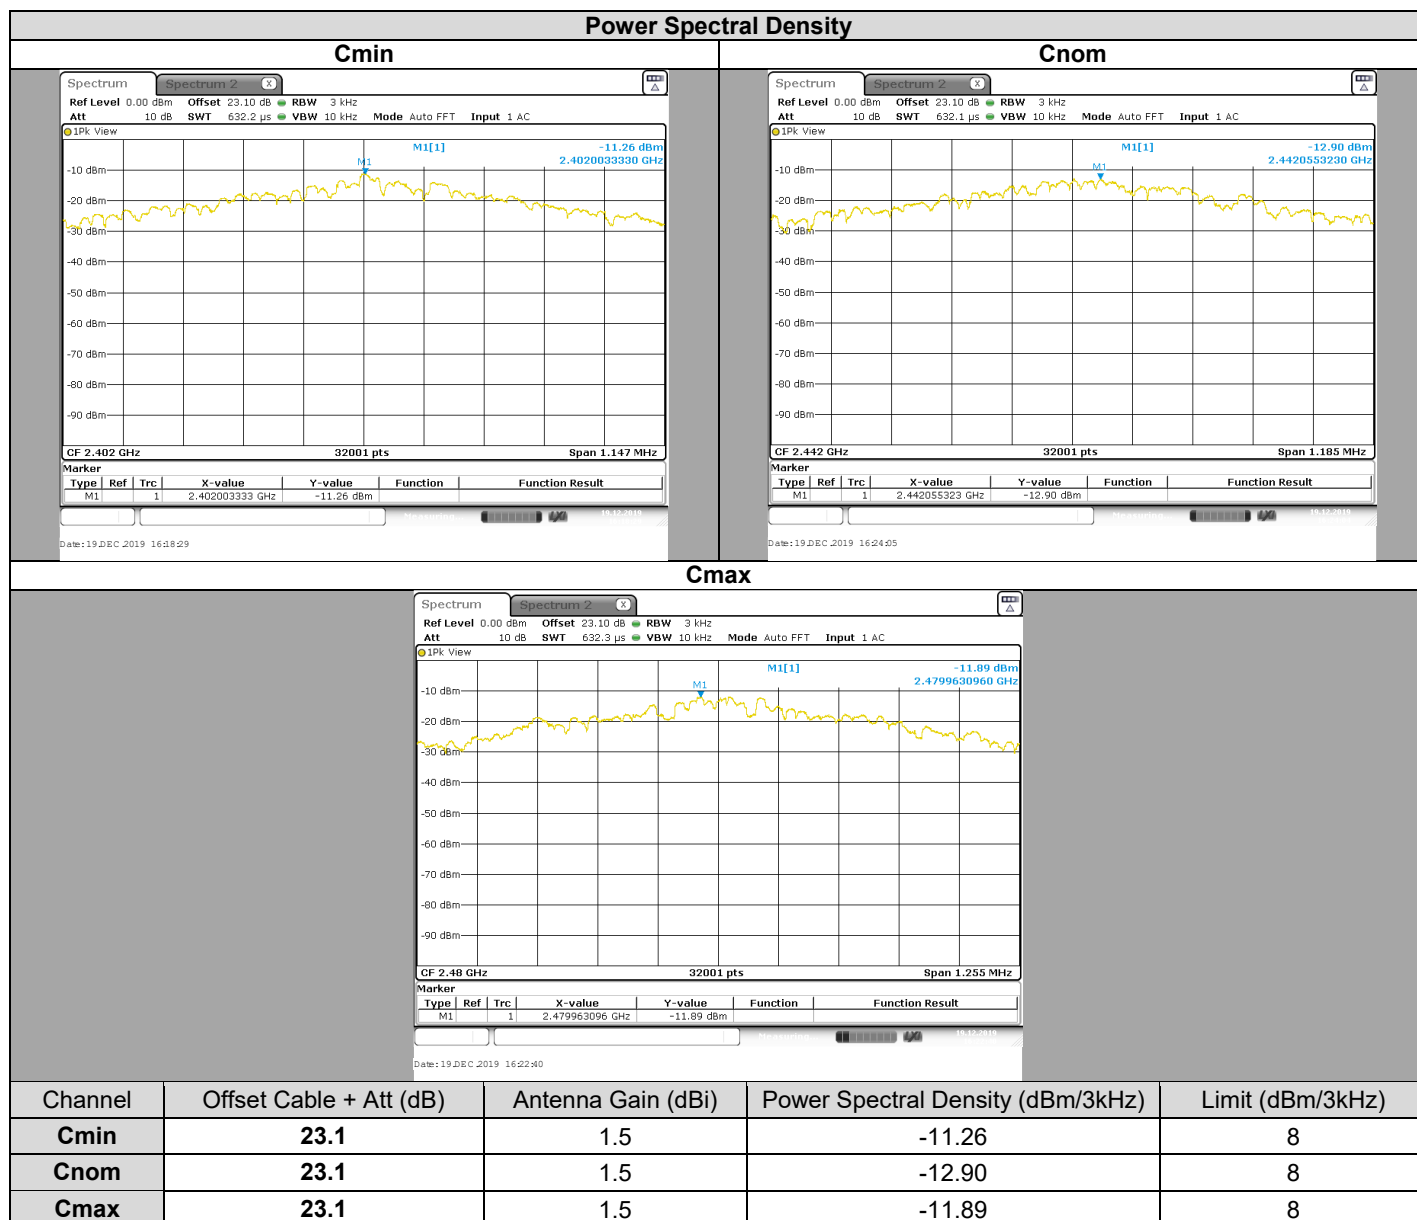

7.6. CONCLUSION

Power Spectral Density measurement performed on the sample of the product **URGONIGHT URGOnight V1.0**, SN: **Sn**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

8. UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS AT THE BAND EDGE

8.1. TEST CONDITIONS

Test performed by : Julien Palard
Date of test : December 19, 2019
Ambient temperature : 24 °C
Relative humidity : 38 %

8.2. TEST SETUP

- The Equipment Under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ ANSI C63.10 § 11.11

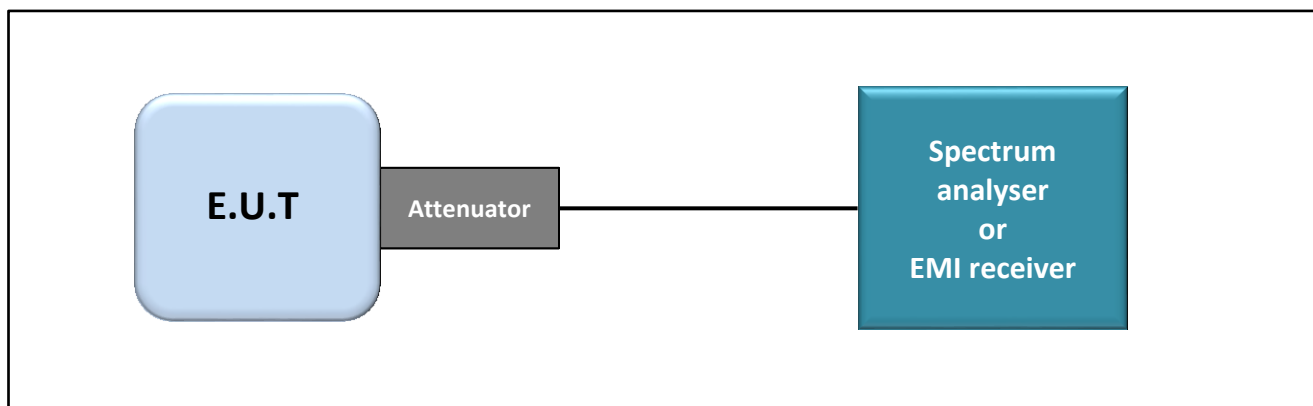

Test set up of Unwanted Emissions into Non-Restricted Frequency Bands at the Band Edge

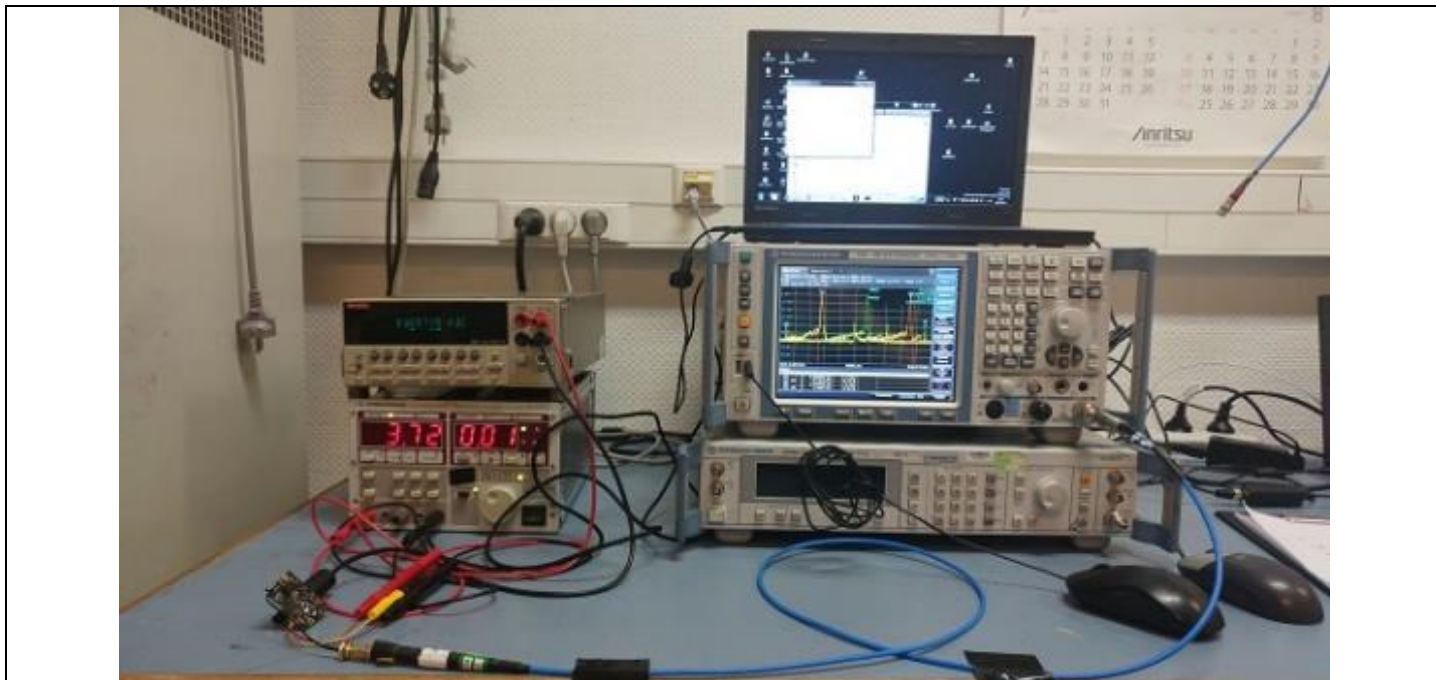

Photograph for Unwanted Emission into non-restricted frequency bands at the band edge

8.3. LIMIT

All Spurious Emissions must be at least 20dB (Maximum Conducted Power) below the Fundamental Radiator Level at the Band Edge "2400MHz & 2483,5MHz"

8.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Programmable DC power supply	ROHDE & SCHWARZ	NGSM32/10	A7040074	Calibrate with multimeter	Calibrate with multimeter
Multimeter	KEITHLEY	2000	A1242090	2019/05	2021/05
Cable + Attenuateur 20dB	PASTERNAK	PE350-150CM	A5329866	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642026	2019/07	2021/07

Note: In our quality system, the test equipment calibration due is more & less 2 months

8.5. RESULTS



8.6. CONCLUSION

Unwanted Emission into non-restricted frequency bands at the band edge measurement performed on the sample of the product **URGONIGHT URGONight V1.0**, SN: **Sn**, in configuration and description presented in this test report, show levels **Select Result** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

9. UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS

9.1. TEST CONDITIONS

Test performed by : Julien Palard
Date of test : December 20, 2019
Ambient temperature : 25 °C
Relative humidity : 40 %

9.2. TEST SETUP

- The Equipment under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ ANSI C63.10 § 11.11

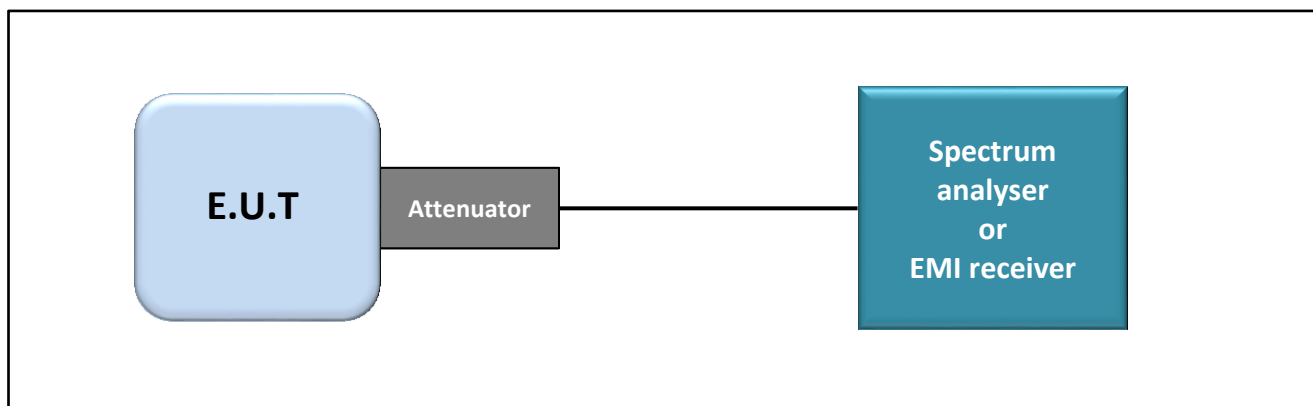

Test set up of Unwanted Emissions into Non-Restricted Frequency Bands

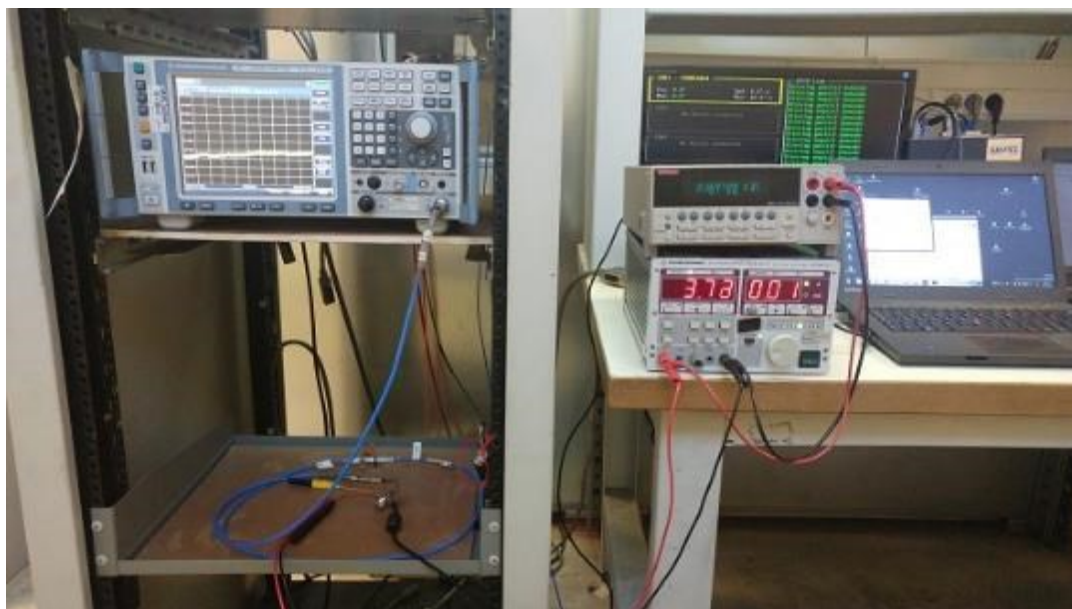

Photograph for Unwanted Emission into non-restricted frequency bands

9.3. LIMIT


All Spurious Emissions must be at least 20dB (Maximum Conducted Power) below the Fundamental Radiator Level

9.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Cable Conducted S36 chamber	TELEDYNE	084-0555-2MTR	A5329758	2019/02	2020/02
Attenuator 3dB Cable Spurious Conducted	-	WA54-3-12	A7122223	2019/02	2020/02
EMI receiver	ROHDE & SCHWARZ	FSV40GHz	A4060061	2019/05	2021/05
Programmable DC power supply	ROHDE & SCHWARZ	NGSM32/10	A7040074	Calibrate with multimeter	Calibrate with multimeter
Multimeter	KEITHLEY	2000	A1242090	2019/05	2021/05

Note: In our quality system, the test equipment calibration due is more & less 2 months

9.5. RESULTS

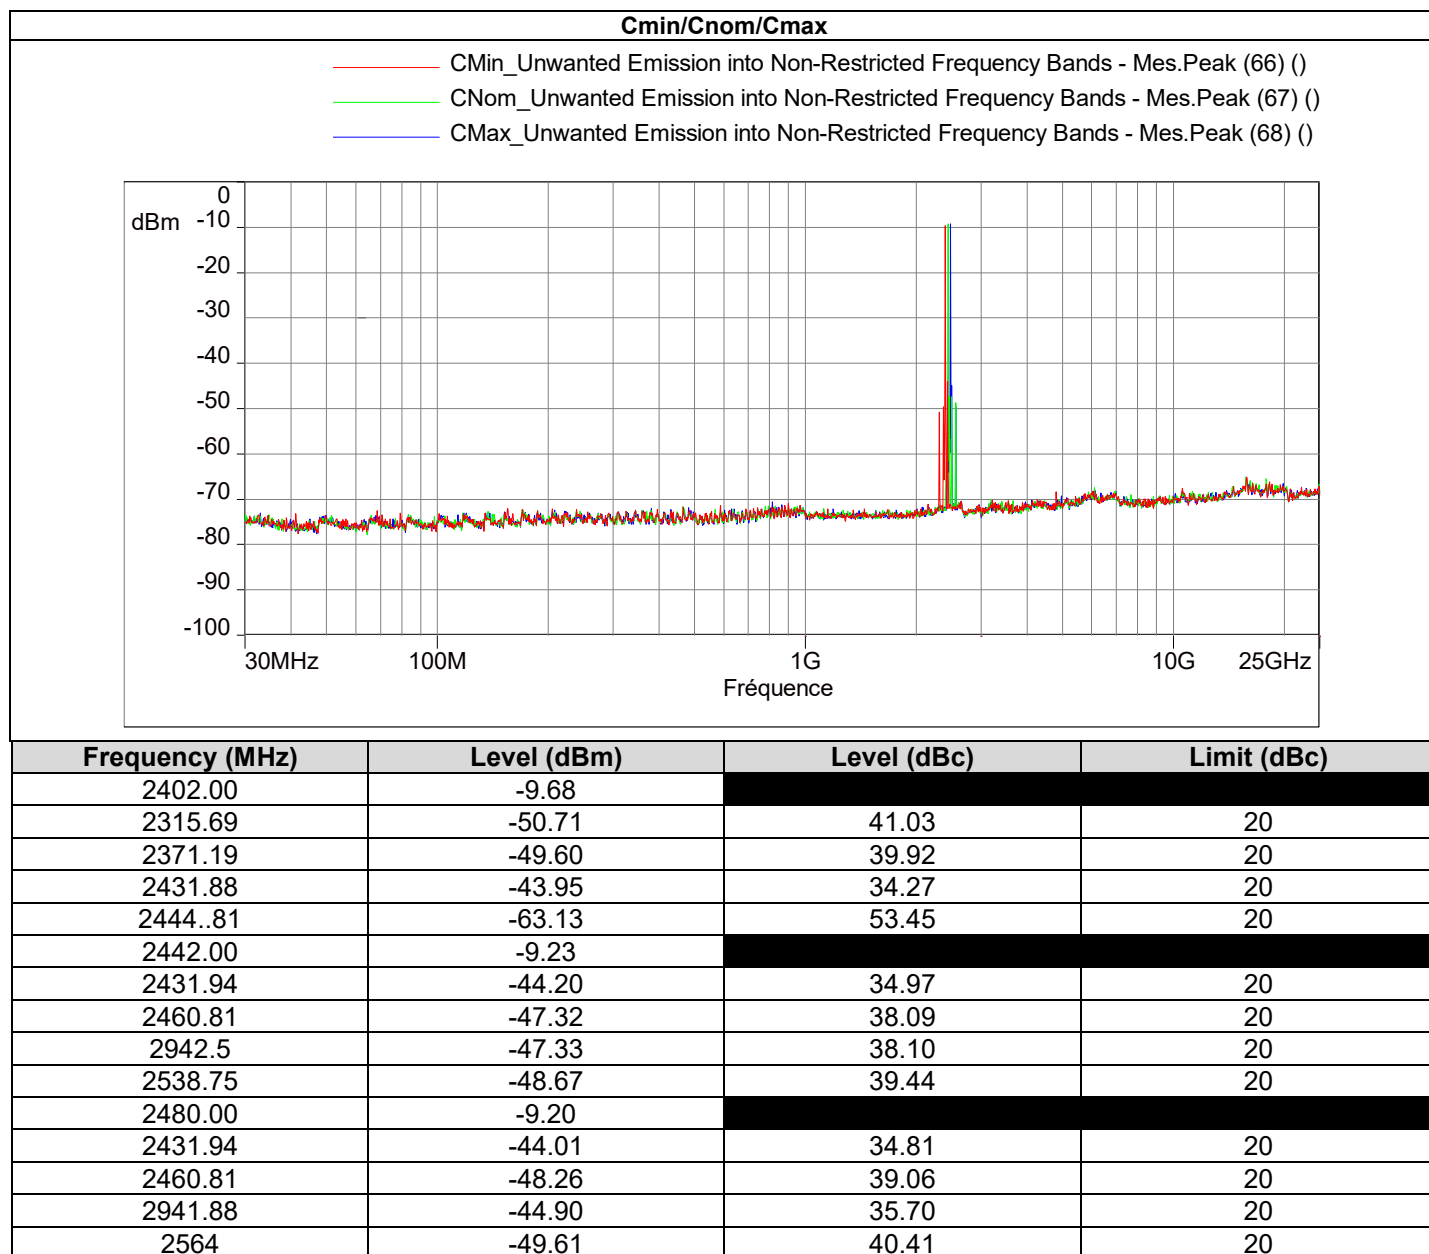

9.6. CONCLUSION

Unwanted Emission into non-restricted frequency bands measurement performed on the sample of the product **URGONIGHT URGOnight V1.0**, SN: **Sn**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.


10. AC POWER LINE CONDUCTED EMISSIONS

10.1. TEST CONDITIONS

Test performed by : Laurent DENEUX
 Date of test : December 20, 2019
 Ambient temperature : 22 °C
 Relative humidity : 53 %

10.2. TEST SETUP

The product has been tested according to ANSI C63.10 (2013) method. The EUT is placed on the ground reference plane, at 80cm from the LISN. The distance between the EUT and the vertical ground plane is 40cm. Auxiliaries are powered by another LISN. The cable has been shorted to 1meter length. The EUT is powered through the LISN. Measurement is made with a receiver in peak mode. This was followed by a Quasi-Peak, i.e. CISPR measurement for any strong signal. If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary. The LISN (measure) is $50\Omega / 50\mu\text{H}$. Interconnecting cables and equipment's were moved to position that maximized emission.

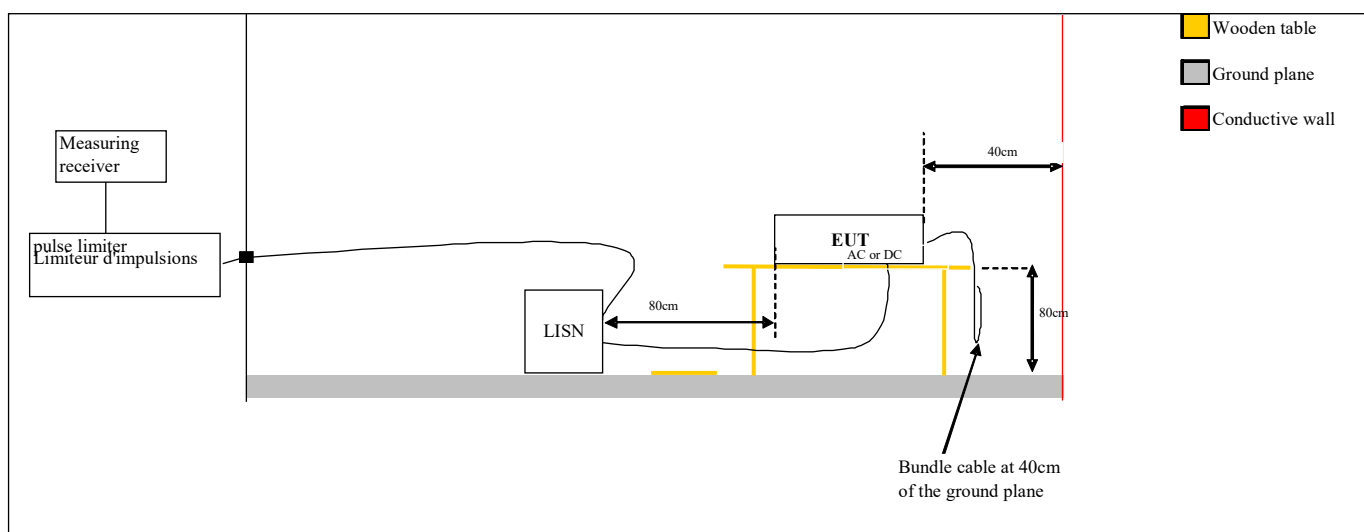



Photograph for AC Power Line Conducted Emissions (Front view)



Photograph for AC Power Line Conducted Emissions (Rear view)

10.3. LIMIT

Frequency range	Level	Detector
0,15kHz to 0,5MHz	66dB μ V to 56 μ V*	QPeak
	56dB μ V to 46 μ V*	Average
0,5MHz to 5MHz	56dB μ V	QPeak
	46dB μ V	Average
5MHz to 30MHz	60B μ V	QPeak
	50dB μ V	Average

*Decreases with the logarithm of the frequency



10.4. TEST EQUIPMENT LIST


Test equipment used					
Description	Manufacturer	Model	Identifier	Last Calibration date	Calibration due date
EMI Test Receiver	ROHDE & SCHWARZ	ESIB26	A2642021	10/2018	10/2020
V ISLN	ROHDE & SCHWARZ	ESH2-Z5	C2322001	10/2019	10/2020
Limiter	ROHDE & SCHWARZ	ESH3-Z2	A2649008	03/2019	03/2020
Cable	-	-	A5329417	12/2019	12/2020
Cable	-	-	A5329589	10/2019	10/2020
Ground plane	LCIE	-	-	-	-

Note: In our quality system, the test equipment calibration due is more & less 2 months

10.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

☒ None ☐ Divergence:

10.6. RESULTS

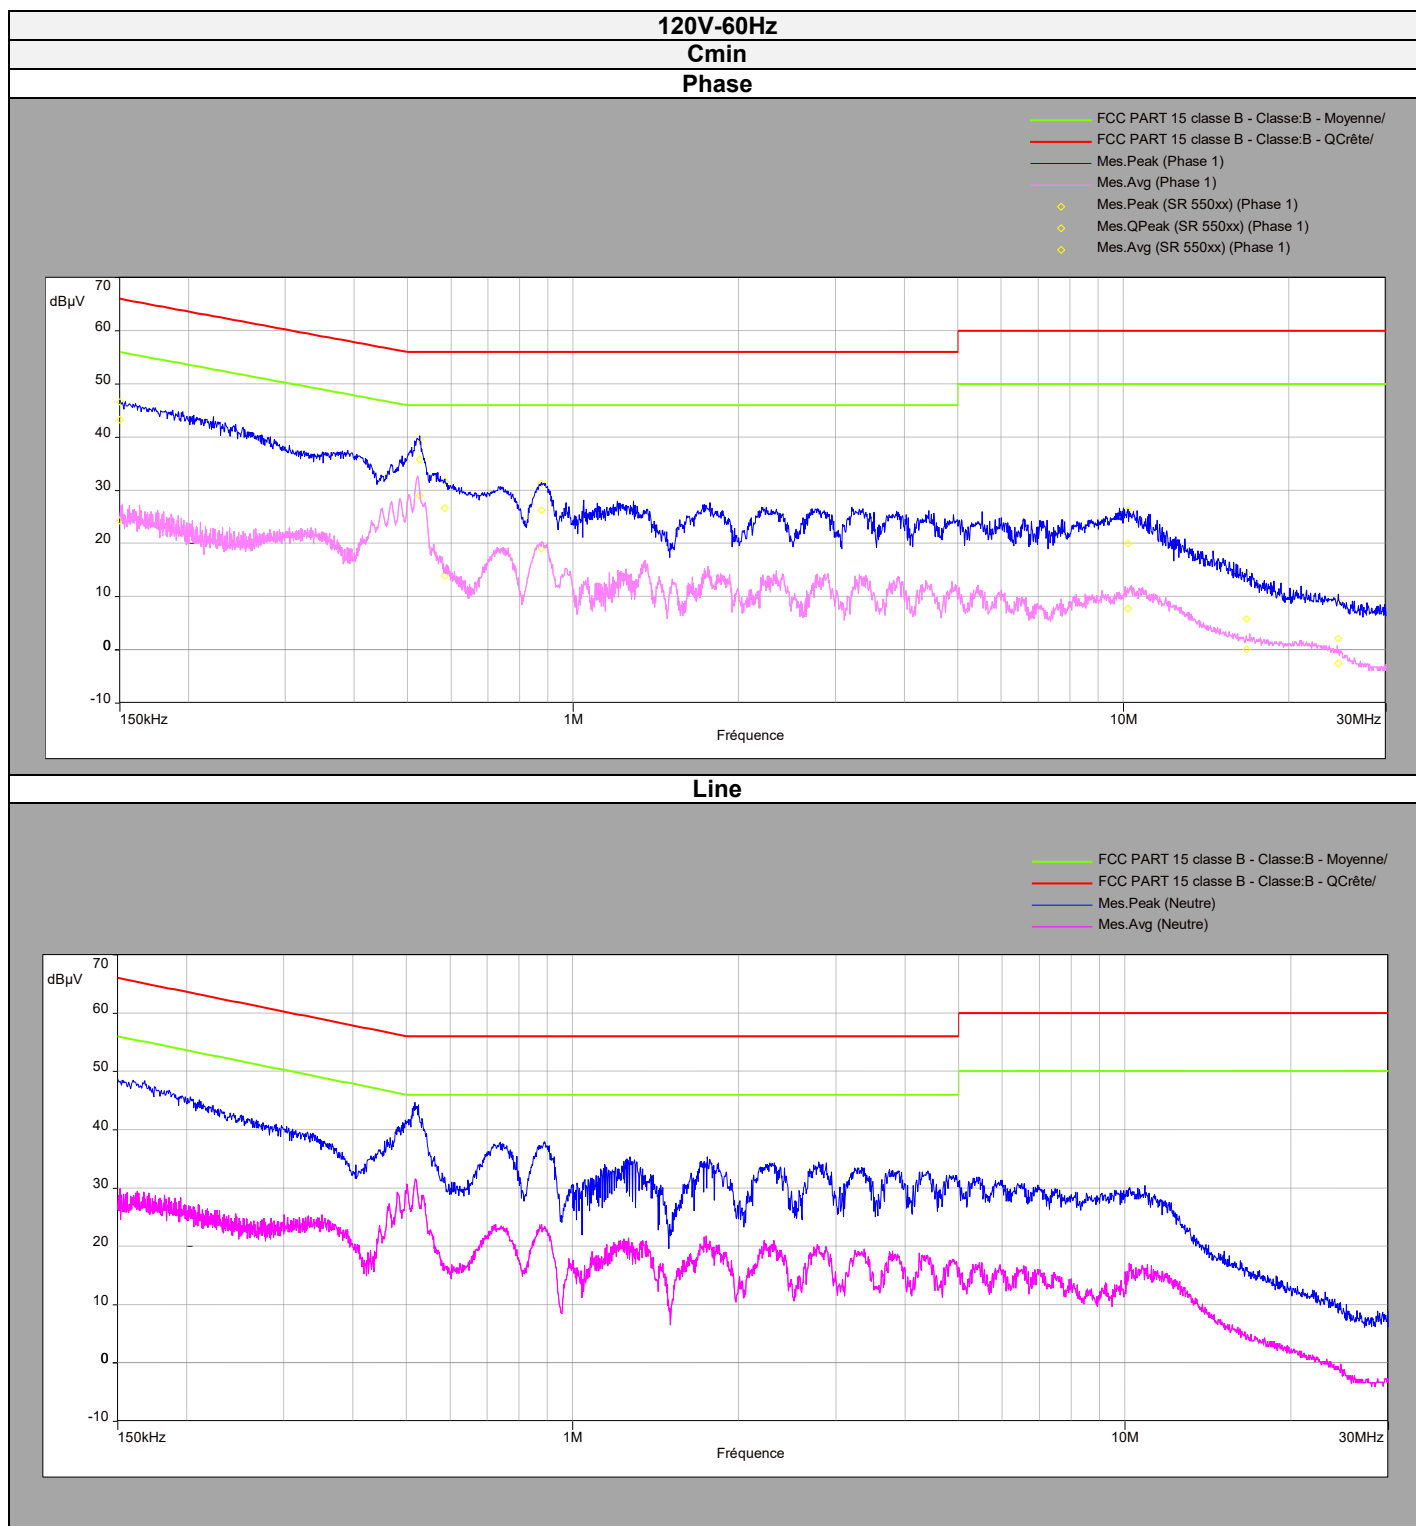


Phase Line							
Frequency (MHz)	Peak Level (dBμV)	Quasi-Peak Level (dBμV)	Quasi-Peak Limit (dBμV)	Margin Quasi-Peak (dBμV)	Average Level (dBμV)	Average Limit (dBμV)	Margin Average (dBμV)
0,15	47	-	66	19	25	56	31
0,521	39,5	-	56	16,5	32,7	46	13,3
0,877	30,8	-	56	25,2	20,3	46	25,7
1,75	26,6	-	56	29,4	15,6	46	30,4
3,31	26,5	-	56	29,5	15	46	31

Neutral Line							
Frequency (MHz)	Peak Level (dBμV)	Quasi-Peak Level (dBμV)	Quasi-Peak Limit (dBμV)	Margin Quasi-Peak (dBμV)	Average Level (dBμV)	Average Limit (dBμV)	Margin Average (dBμV)
0,15	48,7	-	66	17,3	30	56	26
0,518	44,7	-	56	11,3	31,5	46	14,5
0,888	37,6	-	56	18,4	23,6	46	22,4
1,75	35,3	-	56	20,7	21,7	46	24,3
11	28,7	-	60	31,3	16	50	34


240V-50Hz

Cmin

Phase

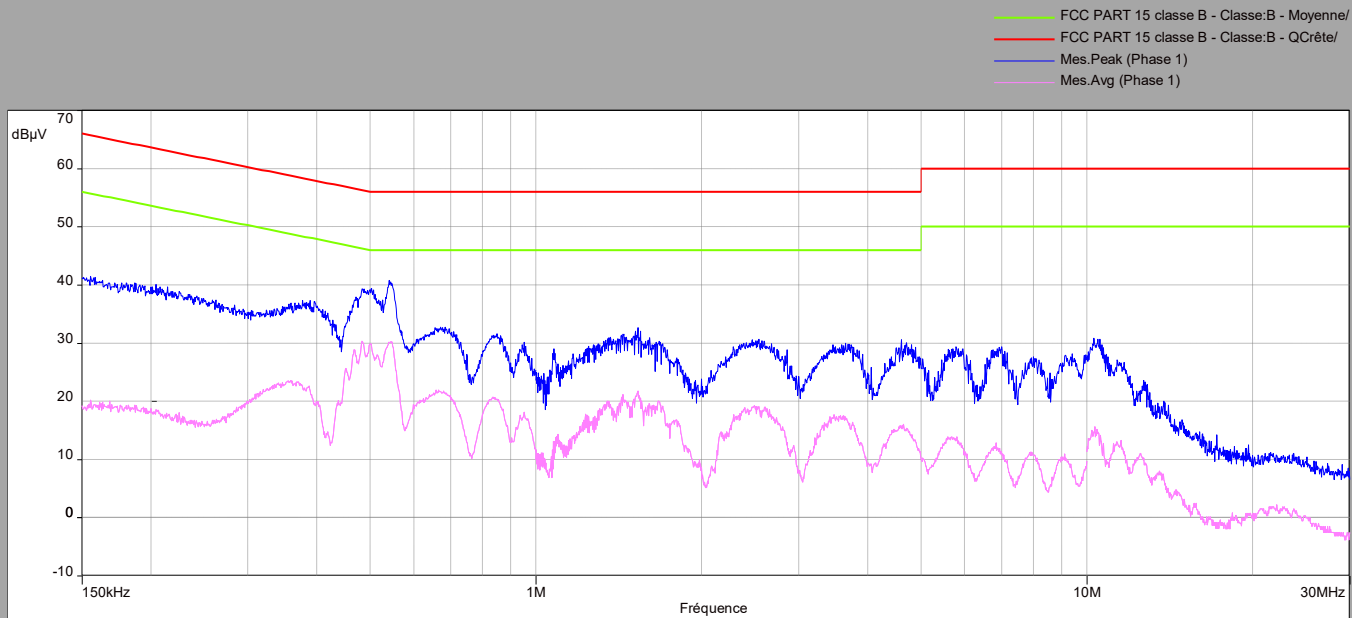

Line

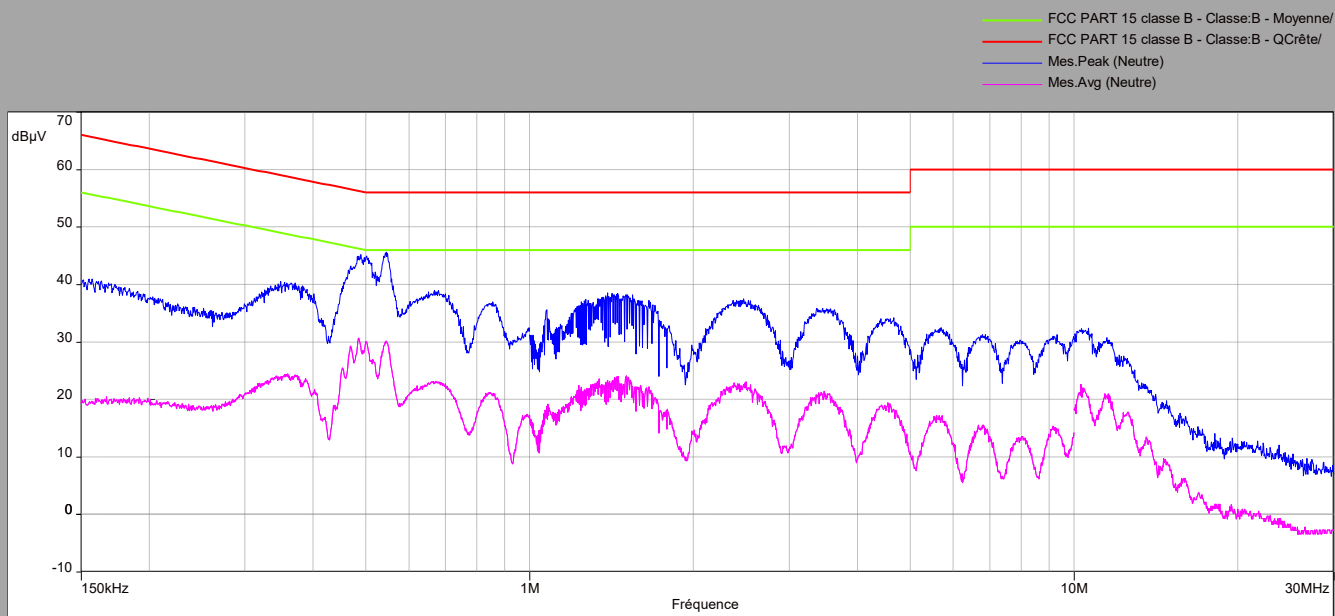

Phase Line							
Frequency (MHz)	Peak Level (dBμV)	Quasi-Peak Level (dBμV)	Quasi-Peak Limit (dBμV)	Margin Quasi-Peak (dBμV)	Average Level (dBμV)	Average Limit (dBμV)	Margin Average (dBμV)
0,15	41,2	-	66	24,8	19,2	56	36,8
0,542	40,7	-	56	15,3	30	46	16
1,53	32,6	-	56	23,4	21,7	46	24,3
2,53	30	-	56	26	19	46	27
10,48	30,6	-	60	29,4	14,4	50	35,6

Neutral Line							
Frequency (MHz)	Peak Level (dBμV)	Quasi-Peak Level (dBμV)	Quasi-Peak Limit (dBμV)	Margin Quasi-Peak (dBμV)	Average Level (dBμV)	Average Limit (dBμV)	Margin Average (dBμV)
0,15	40	-	66	26	19,4	56	36,6
0,486	45	-	56	11	30,4	46	15,6
1,51	37,6	-	56	18,4	23,8	46	22,2
2,45	37,2	-	56	18,8	21,6	46	24,4
10,63	32,4	-	60	27,6	20,6	50	29,4

10.7. CONCLUSION

Ac Power Line Conducted Emission measurement performed on the sample of the product **URGONIGHT URGOnight V1.0**, SN: **Sn**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.247 & RSS 247 ISSUE 2 limits.

11. UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS

11.1. TEST CONDITIONS


Test performed by : Laurent DENEUX
 Date of test : December 20, 2019
 Ambient temperature : 19 °C
 Relative humidity : 48 %

11.2. TEST SETUP

The product has been tested according to ANSI C63.10 (2013) and FCC part15 subpart C.

Test is performed in parallel, perpendicular and ground parallel axis with a loop antenna below 30MHz. Measurement bandwidth was 200Hz below 150kHz and 9kHz between 150kHz & 30MHz. The level has been maximised by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height was 1m. The EUT is placed **on an open area test site**. Distance between measuring antenna and the EUT is **3m**.

Test is performed in horizontal (H) and vertical (V) polarization with **bilog** between 30MHz & 1GHz and with a horn antenna above 1GHz. Measurement bandwidth was 120kHz below 1GHz and 1MHz above 1GHz. The level has been maximised by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height search was performed from 1 to 4m. The EUT is place at 1.5m high above 1GHz and at 0.8m high under 1GHz. The EUT is placed **on an open area test site** above 1GHz and **on an open area test site** from 30MHz to 1GHz. Distance between measuring antenna and the EUT is **10m**.

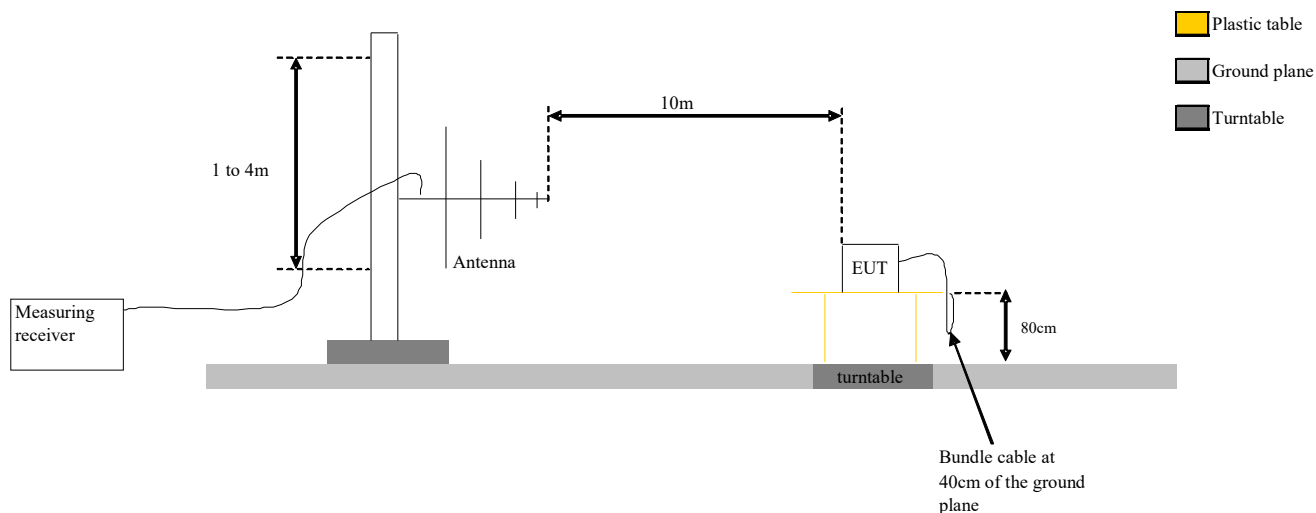

Test Set up for radiated measurement in open area test site



Photograph for Unwanted Emission in restricted frequency bands



Photograph for Unwanted Emission in restricted frequency bands

11.3. LIMIT

Measure at 300m		
Frequency range	Level	Detector
9kHz-490kHz	67.6dB μ V/m /F(kHz)	QPeak
Measure at 30m		
Frequency range	Level	Detector
490kHz-1.705MHz	87.6dB μ V/m /F(kHz)	QPeak
1.705MHz-30MHz	29.5dB μ V/m	QPeak
Measure at 10m		
Frequency range	Level	Detector
30MHz to 88MHz	29.5dB μ V/m	QPeak
88MHz to 216MHz	33dB μ V/m	QPeak
216MHz to 960MHz	35.5dB μ V/m	QPeak
960MHz to 1000MHz	43.5dB μ V/m	QPeak
Above 1000MHz	63.5dB μ V/m	Peak
	43.5dB μ V/m	Average

Measure at 3m		
Frequency range	Level	Detector
30MHz to 88MHz	40dB μ V/m	QPeak
88MHz to 216MHz	43.5dB μ V/m	QPeak
216MHz to 960MHz	46B μ V/m	QPeak
960MHz to 1000MHz	54dB μ V/m	QPeak
Above 1000MHz	74dB μ V/m	Peak
	54dB μ V/m	Average

11.4. TEST EQUIPMENT LIST


Test equipment used					
Description	Manufacturer	Model	Identifier	Last Calibration date	Calibration due date
Open test site	LCIE	-	F2000400	2019-06	2020-06
EMI Test Receiver	ROHDE & SCHWARZ	ESIB26	A2642021	2018-10	2020-10
Cable	-	-	A5329444	2019-12	2020-12
Bilog antenna	CHASE	CBL 6112A	C2040040	2019-04	2020-04
Cable	-	-	A5329442	2019-129	2020-12
Cable	-	-	A5329876	2019-12	2020-12
Cable	-	-	A5329542	2019-08	2020-08
Preamplifier	HEWLETT PACKARD	8449B	A4069002	2018-04	2020-04
Horn	EMCO	3115	C2042016	2019-06	2020-06
loop antenna	RHODE & SCHWARZ	HFH2-Z2	C2040007	2018-11	2020-11
Cable	-	-	A5329416	2018-12	2019-12

Note: In our quality system, the test equipment calibration due is more & less 2 months

11.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

☒ None ☐ Divergence:

11.6. RESULTS

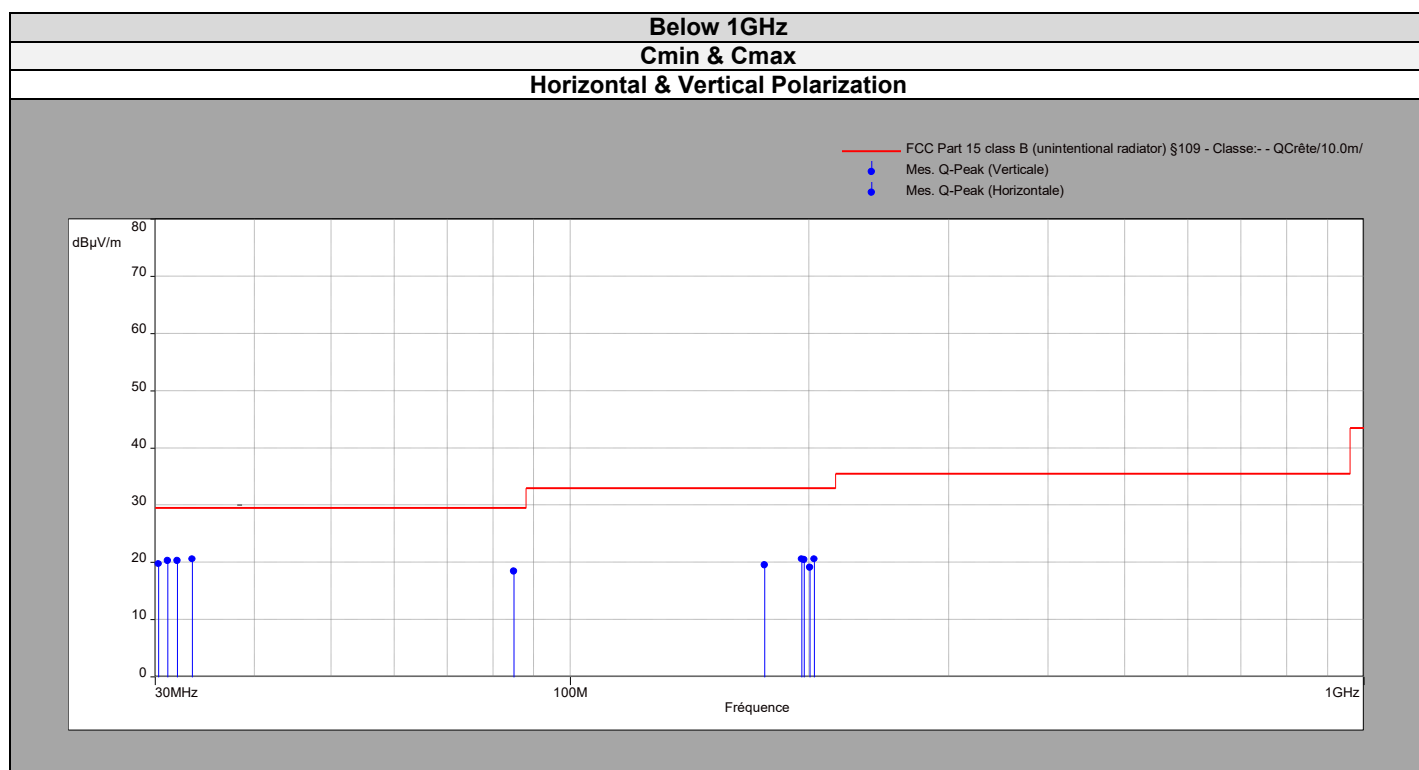


Above 1GHz Zoom 2310MHz-2500MHz

Cmin


Vertical Polarization

- Part 15 rectricded bands (intentional radiator) WIFI §209 - Classe:- - Moyenne/10.0m/
- Part 15 rectricded bands (intentional radiator) WIFI §209 - Classe:- - Crête/10.0m/
- Mes.Peak (Verticale)
- Mes.Avg (Verticale)

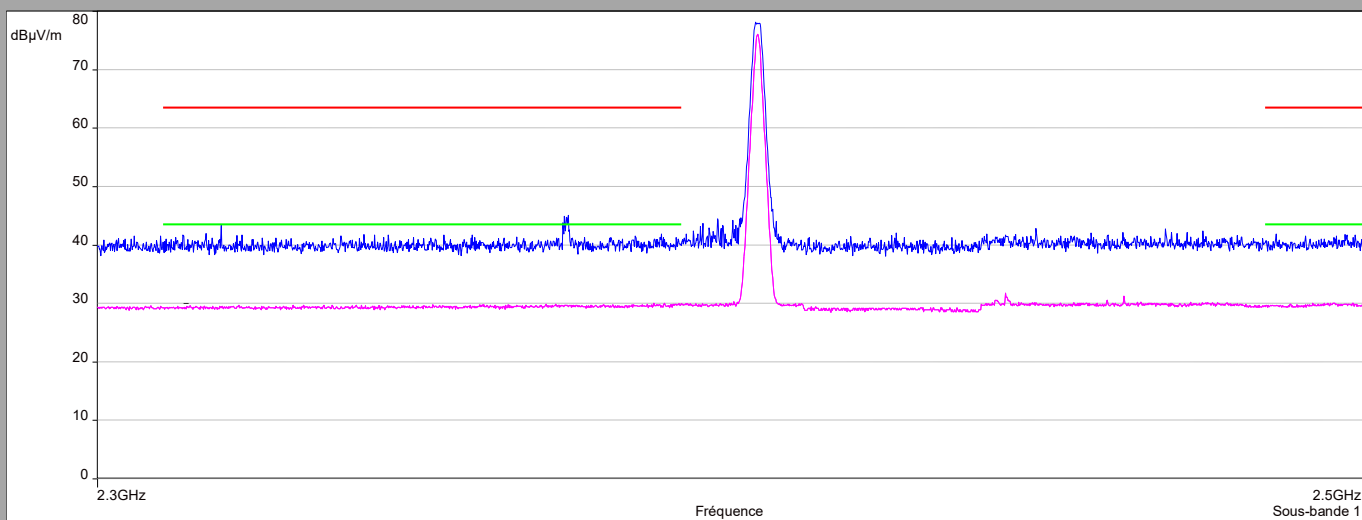

Horizontal polarization


- Part 15 rectricded bands (intentional radiator) WIFI §209 - Classe:- - Moyenne/10.0m/
- Part 15 rectricded bands (intentional radiator) WIFI §209 - Classe:- - Crête/10.0m/
- Mes.Peak (Horizontale)
- Mes.Avg (Horizontale)

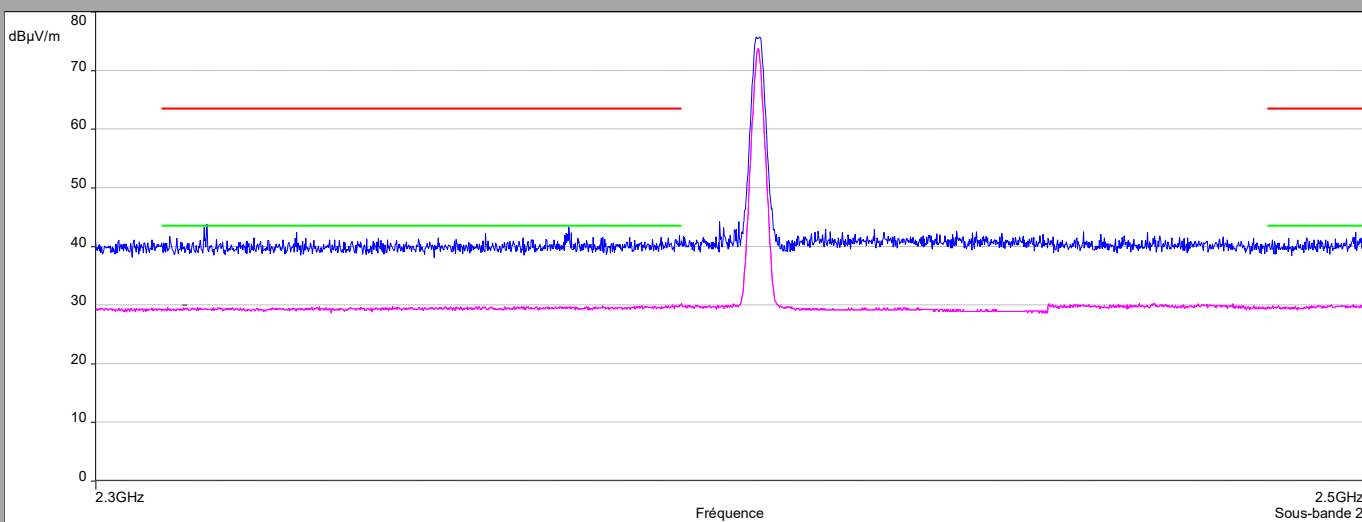


Above 1GHz Zoom 2310MHz-2500MHz

Cmin

Vertical Polarization

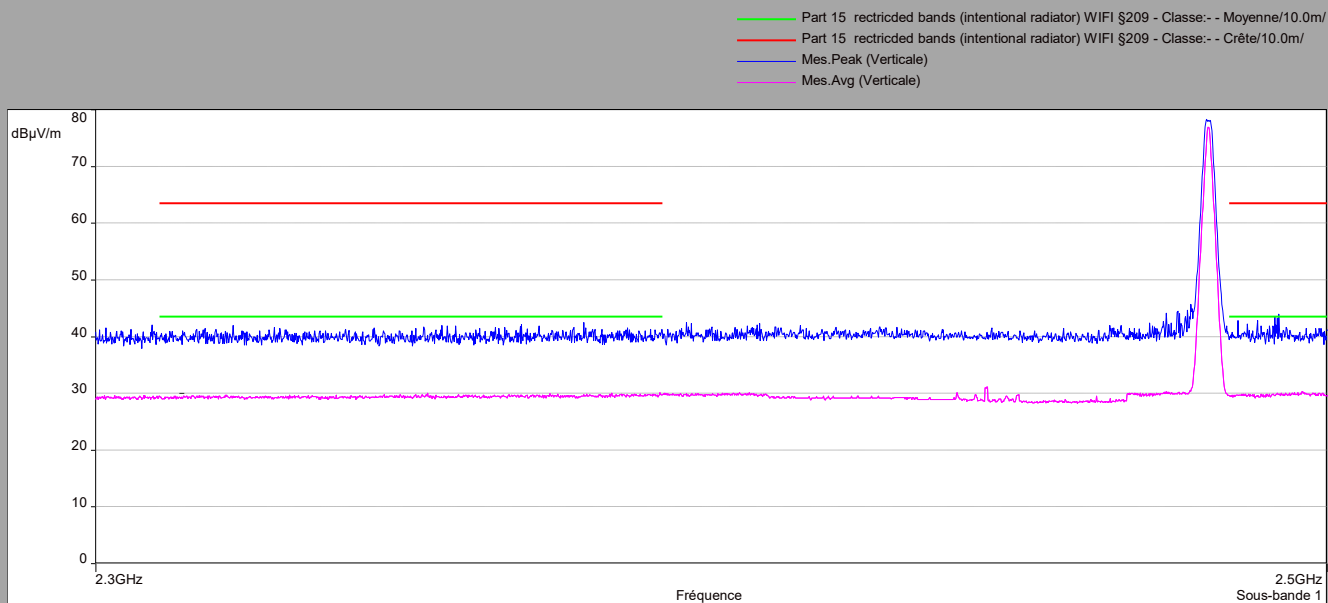

Horizontal polarization

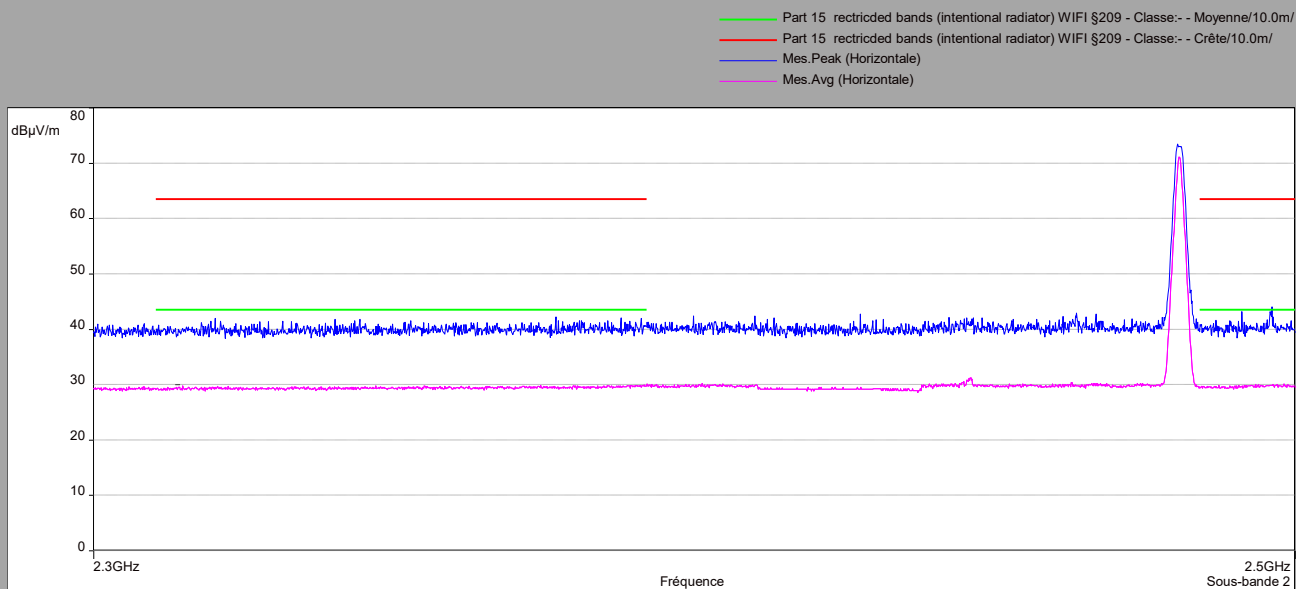

Cmin & Cmax

9kHz to 30MHz				
Polarization	Frequency (MHz)	Peak Level (dBµV/m)	QPeak Level (dBµV/m)	Limit (dBµV/m)
all emissions were greater than 20 dB below the limit				

Cmin & Cmax

Below 1GHz					
Polarization	Frequency (MHz)	Peak Level (dBµV/m)	QPeak Level (dBµV/m)	Limit (dBµV/m)	Margin (dBµV/m)
Vertical	30.3	-	19.77	29.5	9.73
Vertical	31.1	-	20.27	29.5	9.23
Vertical	32	-	20.24	29.5	9.26
Vertical	33.4	-	20.6	29.5	8.9
Vertical	84.9	-	18.41	29.5	11.09
Vertical	175.8	-	19.48	33	13.52
Horizontal	195.7	-	20.63	33	12.37
Vertical	197.2	-	20.48	33	12.52
Horizontal	200.5	-	19.06	33	13.94
Vertical	202.9	-	20.62	33	12.38

Above 1GHz								
Cmin								
Polarization	Frequency (MHz)	Average Level (dBµV/m)	Average Level + Duty Cycle Factor (dBµV/m)	Average Limit (dBµV/m)	Average Margin Level (dBµV/m)	Peak Level (dBµV/m)	Peak Limit (dBµV/m)	Peak Margin Level (dBµV/m)
Horizontal	2390	30.3	30,94	44	13,06	41.8	64	22.2
Vertical	2390	29.8	30,44	44	13,56	41.2	64	22.8
Horizontal	2483.5	29.5	30,14	44	13,86	41	64	23
Vertical	2483.5	29.7	30,34	44	13,66	40.5	64	23.5

Above 1GHz								
Cmax								
Polarization	Frequency (MHz)	Average Level (dBµV/m)	Average Level + Duty Cycle Factor (dBµV/m)	Average Limit (dBµV/m)	Average Margin Level (dBµV/m)	Peak Level (dBµV/m)	Peak Limit (dBµV/m)	Peak Margin Level (dBµV/m)
Horizontal	2390	30.2	30,84	44	13,16	41.9	64	22.1
Vertical	2390	30.3	30,94	44	13,06	40.6	64	23.4
Horizontal	2483.5	29.7	30,34	44	13,66	40.8	64	23.2
Vertical	2483.5	29.9	30,54	44	13,46	42.8	64	22.2



11.7. CONCLUSION

Unwanted Emission in restricted frequency bands measurement performed on the sample of the product **URGONIGHT URGOnight V1.0**, SN: **Sn**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.247 & RSS 247 ISSUE 2 limits.

12. UNCERTAINTIES CHART

47 CFR Part 15.209 & 15.207 Kind of test	Wide uncertainty laboratory (k=2) $\pm x(\text{dB}) / (\text{Hz}) / \text{ms}$	Uncertainty limit
Measurement of conducted disturbances in voltage on the AC power port (9 kHz – 150 kHz)	2,67	3.8
Measurement of conducted disturbances in voltage on the AC power port (150 kHz – 30 MHz)	2,67	3.4
Measurement of conducted disturbances in voltage on the telecommunication port. (AAN)	3,67	5.0
Measurement of conducted disturbances in current (current clamp)	2,73	2.9
Measurement of disturbance power	2,67	4.5
Measurement of radiated magnetic field from 10kHz to 30MHz in SAC V01	4,48	/
Measurement of radiated magnetic field from 10kHz to 30MHz in SAC C01	4,48	/
Measurement of radiated electric field from 30 to 1000MHz in horizontal position on the OATS (Ecuelles)	4,88	6.3
Measurement of radiated electric field from 1 to 18GHz on the Ecuelles site	5.16	/
Measurement of radiated electric field from 30 to 1000MHz in vertical position on the OATS (Ecuelles)	4,99	6.3
Measurement of radiated electric field from 30 to 1000MHz in horizontal position in SAC C01	5,08	6.3
Measurement of radiated electric field from 30 to 1000MHz in vertical position in SAC C01	5,16	6.3
Measurement of radiated electric field from 30 to 1000MHz in horizontal position in SAC V01	5,08	6.3
Measurement of radiated electric field from 30 to 1000MHz in vertical position in SAC V01	5,15	6.3
Measurement of radiated electric field from 1 to 6 GHz C01	5,1	5.2
Measurement of radiated electric field from 1 to 6 GHz V01	4,85	5.2
Measurement of radiated magnetic field from 10kHz to 30MHz on the OATS (Ecuelles)	4,48	/

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the CISPR. The conformity of the sample is directly established by the applicable limits values. This table includes all uncertainties maximum feasible for testing in the laboratory, whether or not made in this report