



Appendix B

Detailed Test Results

1. GSM
GSM850 for Body
GSM1900 for Body
2. WCDMA
WCDMA Band II for Body
WCDMA Band V for Body
3. LTE
LTE Band 2 for Body
LTE Band 4 for Body
LTE Band 5 for Body
LTE Band 7 for Body
LTE Band 12 for Body
LTE Band 17 for Body
LTE Band 66 for Body
LTE Band 71 for Body
4. WIFI
WIFI 2.4GHz for Body
WIFI 5.2GHz for Body
WIFI 5.8GHz for Body



Test Laboratory: LCS-SAR Lab

GSM850 GPRS 4TS 190CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, GPRS (0); Communication System Band: GSM 850; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 837$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 40.776$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.497 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.58 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.768 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.506 W/kg

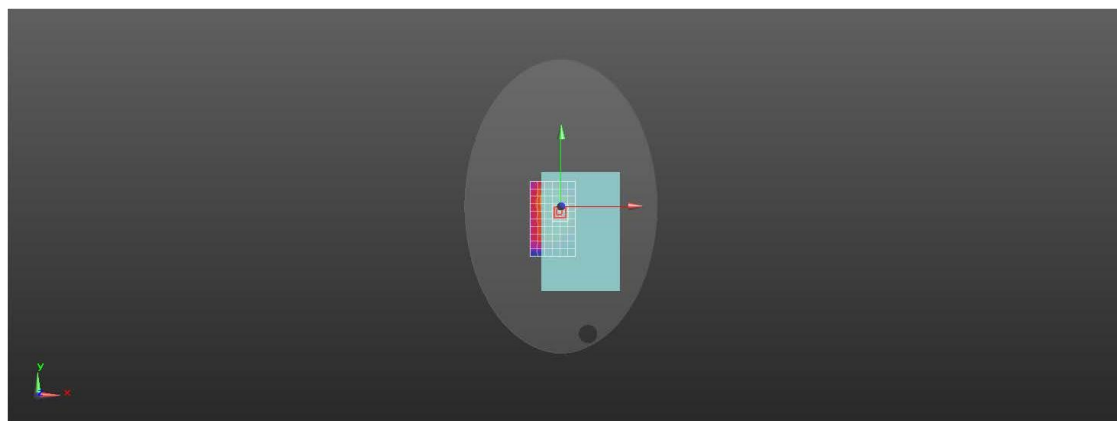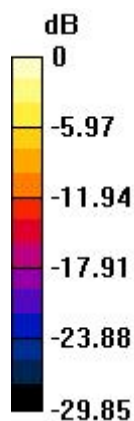

0 dB = 0.497 W/kg = -3.03 dBW/kg



Test Laboratory: LCS-SAR Lab

GSM1900 GPRS 4TS 661CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, GPRS (0); Communication System Band: GSM 1900; Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.347$ S/m; $\epsilon_r = 40.032$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 4.0, 31.0$
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.518 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.857 V/m; Power Drift = 0.02dB

Peak SAR (extrapolated) = 0.935 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.606 W/kg

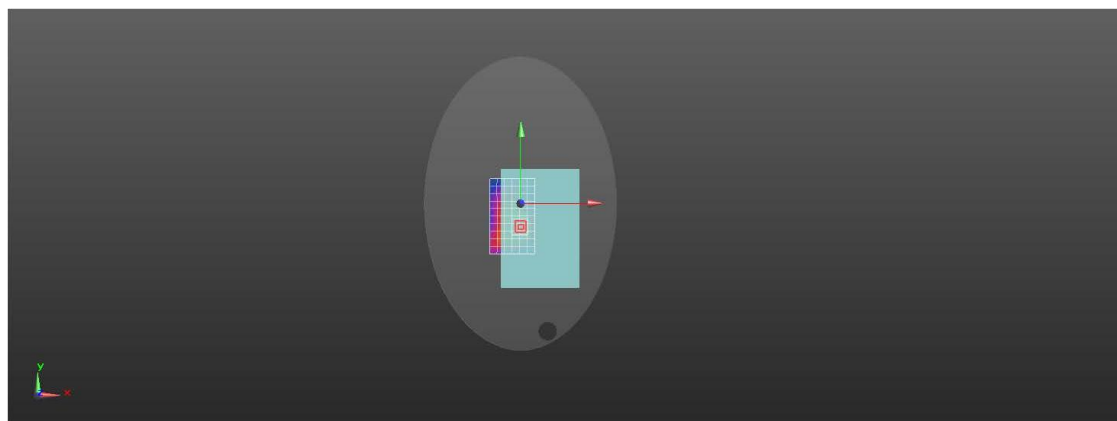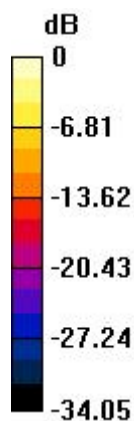

0 dB = 0.518 W/kg = -2.85 dBW/kg



Test Laboratory: LCS-SAR Lab

WCDMA Band II RMC 9400CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, WCDMA (0); Communication System Band: WCDMA Band II; Frequency: 1880 MHz; Communication System PAR: 3.4 dB; PMF: 1.01976

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.347$ S/m; $\epsilon_r = 40.032$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 4.0, 31.0$
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.505 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.238 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.743 W/kg

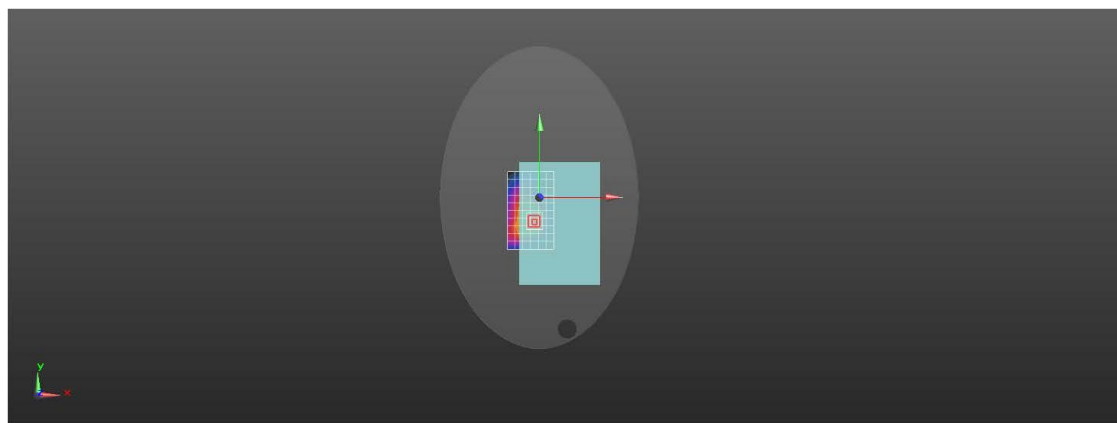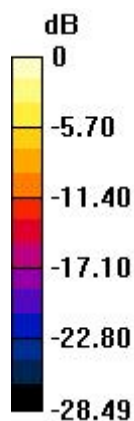

0 dB = 0.505 W/kg = -2.97 dBW/kg



Test Laboratory: LCS-SAR Lab

WCDMA Band V RMC 4132CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, WCDMA (0); Communication System Band: WCDMA Band V; Frequency: 826.4 MHz; Communication System PAR: 3.4 dB; PMF: 1.01976

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 41.065$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.757 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.21 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 0.777 W/kg

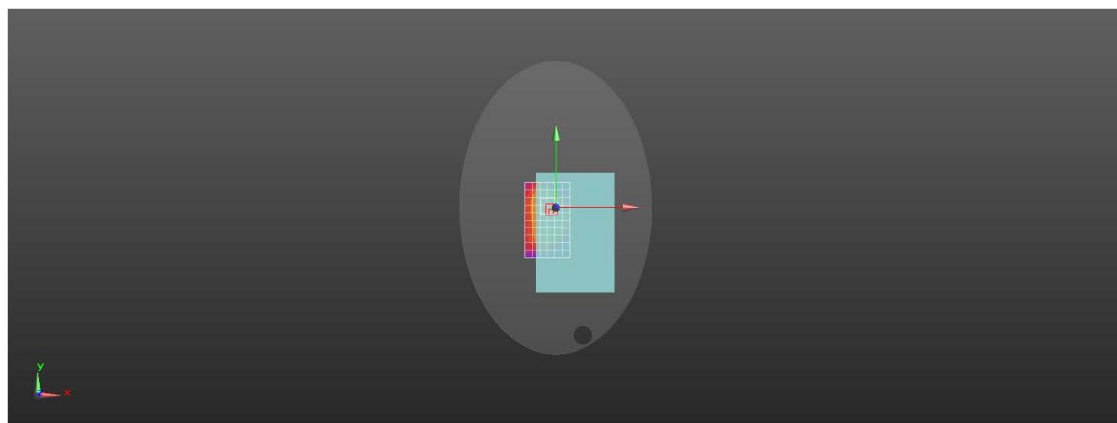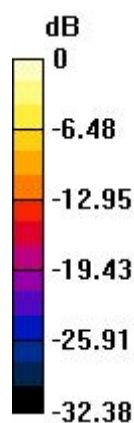

0 dB = 0.757 W/kg = -1.21 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 2 20M QPSK 1RB49 19100CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 2 20MHz; Frequency: 1900 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.909$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 4.0, 31.0$
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.440 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.781 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.491 W/kg

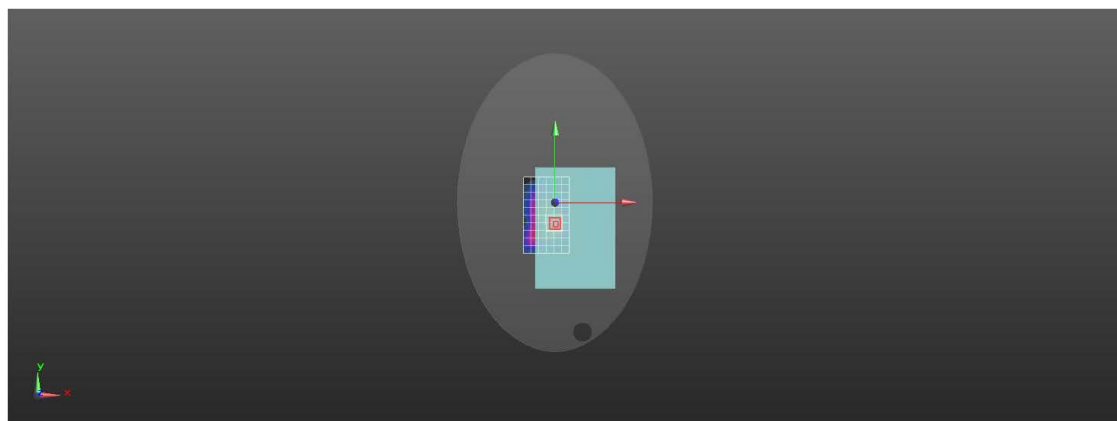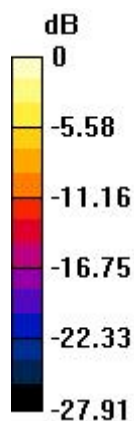

0 dB = 0.440 W/kg = -3.57 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 4 20M QPSK 1RB0 20050CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 4 20MHz; Frequency: 1720 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.287$ S/m; $\epsilon_r = 40.361$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.35, 8.35, 8.35); Calibrated: 2023/6/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.04 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.705 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

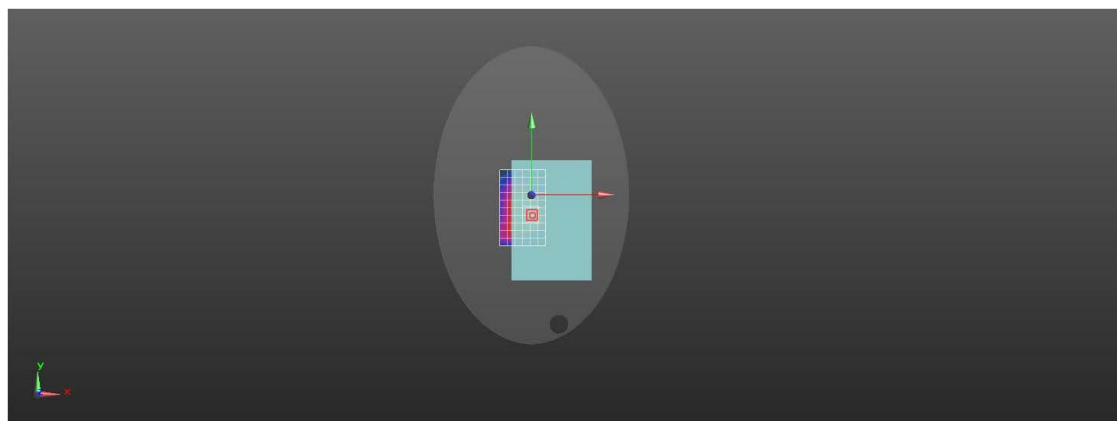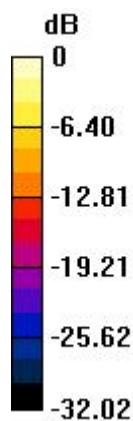

0 dB = 1.04 W/kg = 0.16 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 5 10M QPSK 1RB49 20525CH Rear side 0mm

DUT: Tablet; Type: 10LA2; Serial: A09183245-1

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 5 10MHz; Frequency: 836.5 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 40.75$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.706 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.47 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.719 W/kg

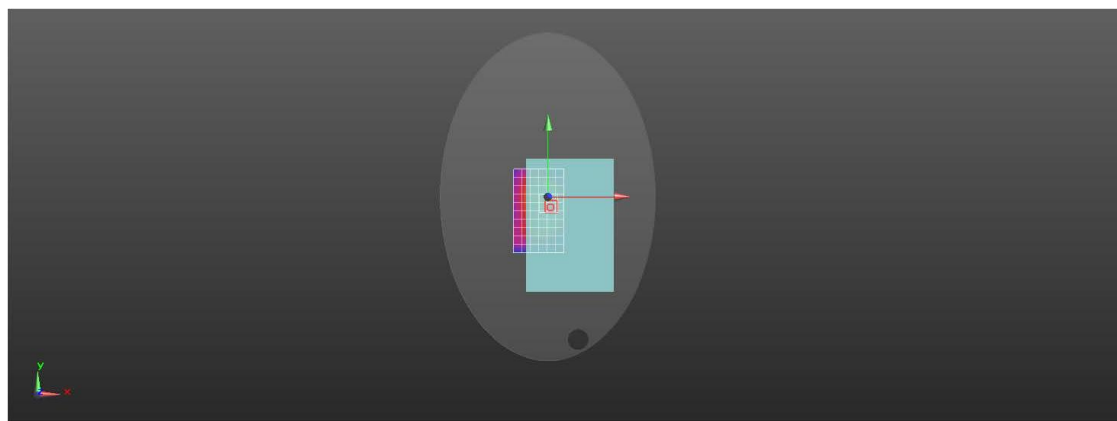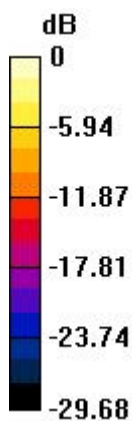

0 dB = 0.706 W/kg = -1.51 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 7 20M QPSK 1RB99 21100CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 7 20MHz; Frequency: 2535 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 39.958$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.35, 7.35, 7.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 4.0, 31.0$
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.345 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.581 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.903 W/kg

SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.533 W/kg

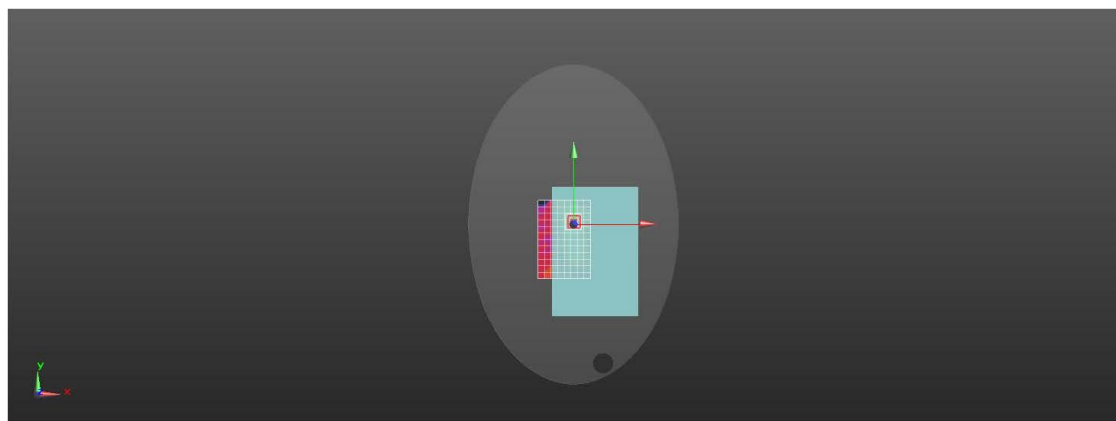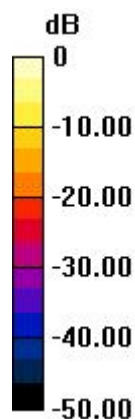

0 dB = 0.345 W/kg = -4.63 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 12 10M QPSK 1RB0 23095CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 12 10MHz; Frequency: 707.5 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 42.568$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(10.02, 10.02, 10.02); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 4.0, 31.0$
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.745 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.71 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.853 W/kg

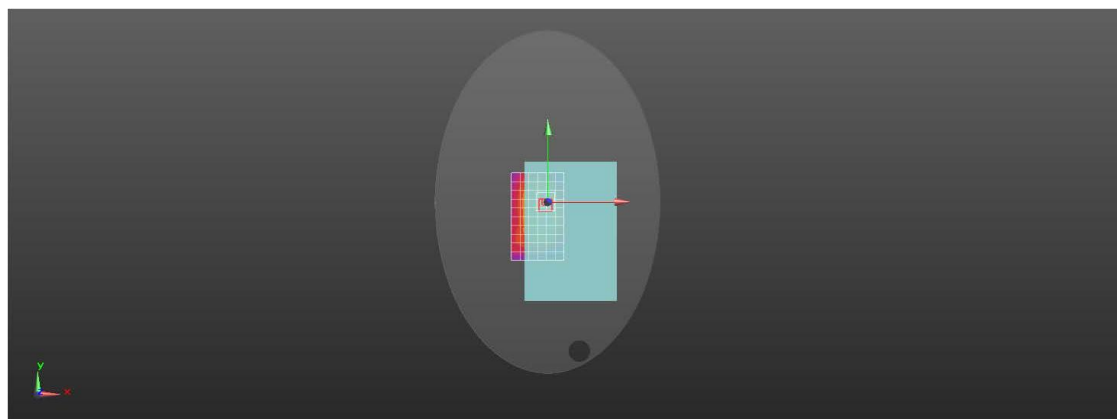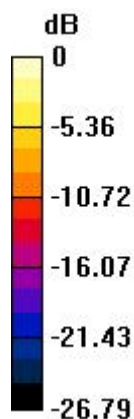

0 dB = 0.745 W/kg = -1.28 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 17 10M QPSK 1RB0 23790CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 17 10MHz; Frequency: 710 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 710$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 42.632$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(10.02, 10.02, 10.02); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 4.0, 31.0$
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.695 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.95 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 0.740 W/kg

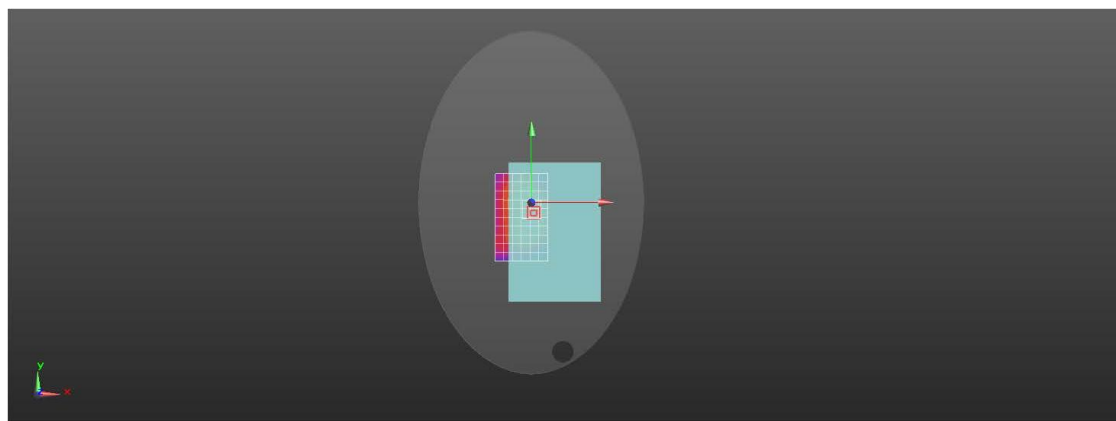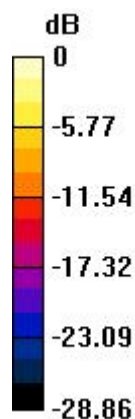

0 dB = 0.695 W/kg = -1.58 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 66 20M QPSK 1RB0 132072CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 66 20MHz; Frequency: 1720 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.287$ S/m; $\epsilon_r = 40.361$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.35, 8.35, 8.35); Calibrated: 2023/6/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.974 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.529 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.640 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

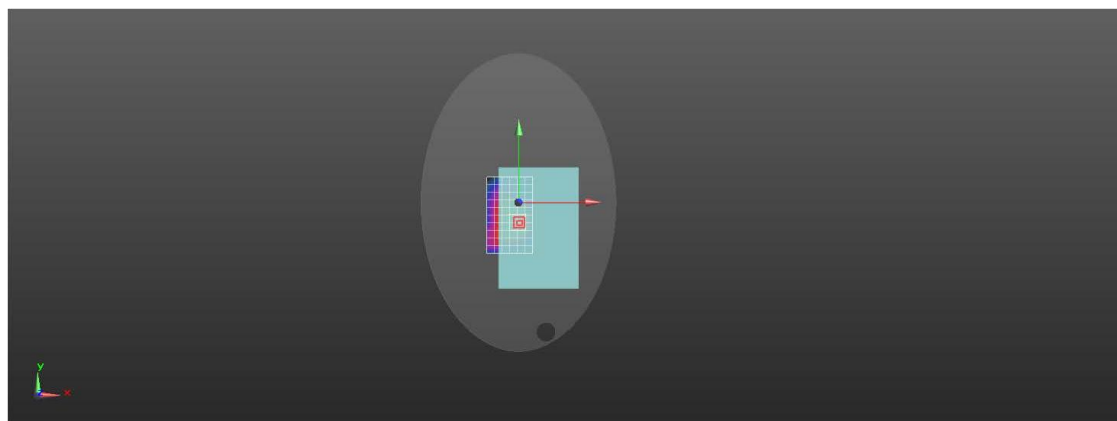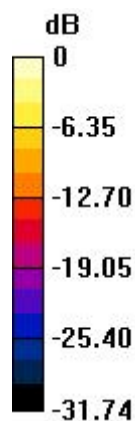

0 dB = 0.974 W/kg = -0.11 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 71 20M QPSK 1RB49 133372CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 71 20MHz; Frequency: 688 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 688$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.684$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(10.02, 10.02, 10.02); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 4.0, 31.0$
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.02 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.28 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

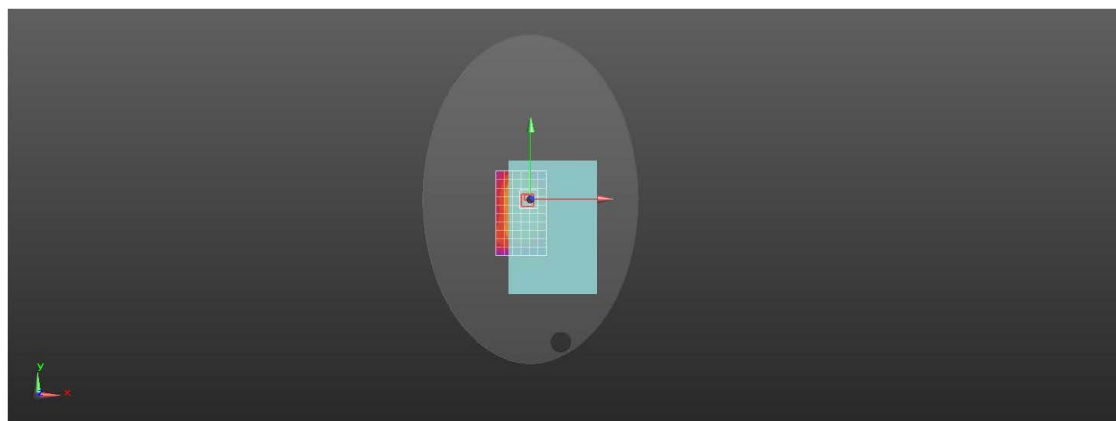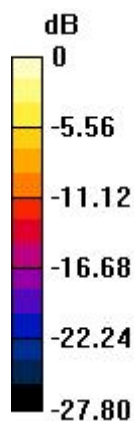

0 dB = 1.02 W/kg = 0.11 dBW/kg



Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 6CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, WIFI 2.4GHz (0); Communication System Band: WIFI 2.4GHz; Frequency: 2437 MHz; Communication System PAR: 1.87 dB; PMF: 1.04833

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.812$ S/m; $\epsilon_r = 40.181$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.50, 7.50, 7.50); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 4.0, 31.0$
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.688 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.47 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.981 W/kg

SAR(1 g) = 0.523 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.744 W/kg

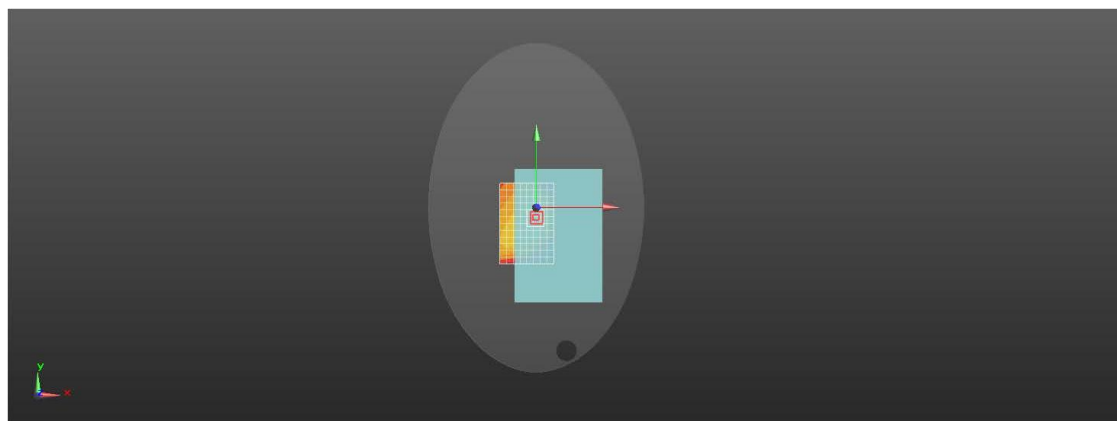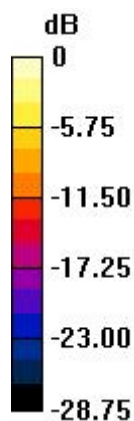

0 dB = 0.688 W/kg = -1.62 dBW/kg



Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 36CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, WIFI 5GHz (0); Communication System Band: WIFI 5.2GHz; Frequency: 5180 MHz; Communication System PAR: 9.1 dB; PMF: 1.1298

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.609$ S/m; $\epsilon_r = 36.732$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.45, 5.45, 5.45); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 4.0, 29.0$
Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)
-

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.491 W/kg



Configuration/Body/Zoom Scan (9x9x21)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 6.200 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.654 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 0.558 W/kg

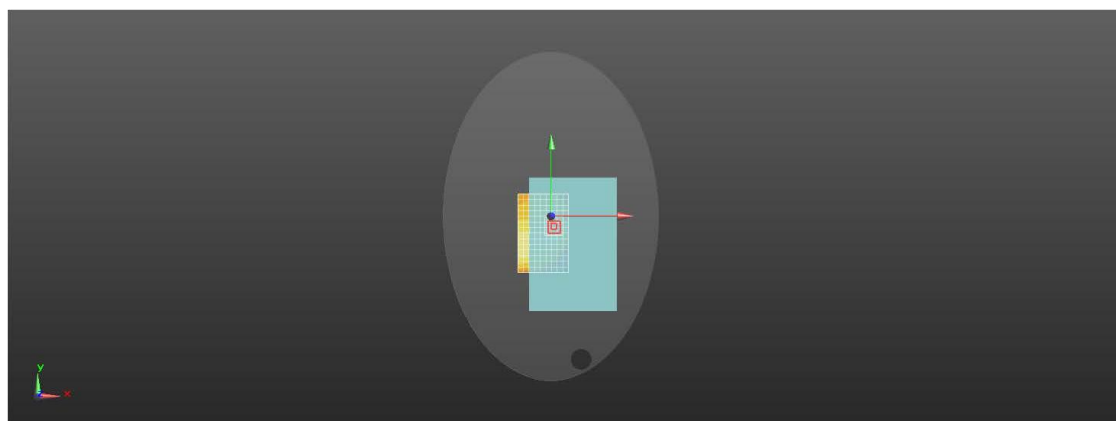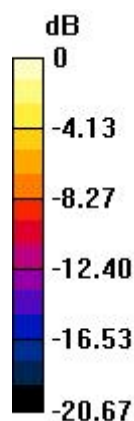

0 dB = 0.491 W/kg = -3.09 dBW/kg



Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 157CH Rear side 0mm**DUT: Tablet; Type: 10LA2; Serial: A09183245-1**

Communication System: UID 0, WIFI 5GHz (0); Communication System Band: WIFI 5.8GHz; Frequency: 5745 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.254$ S/m; $\epsilon_r = 34.814$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.96, 4.96, 4.96); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 11.0, 23.4$
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.289 W/kg



Configuration/Body/Zoom Scan (7x7x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.020 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.942 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.302 W/kg

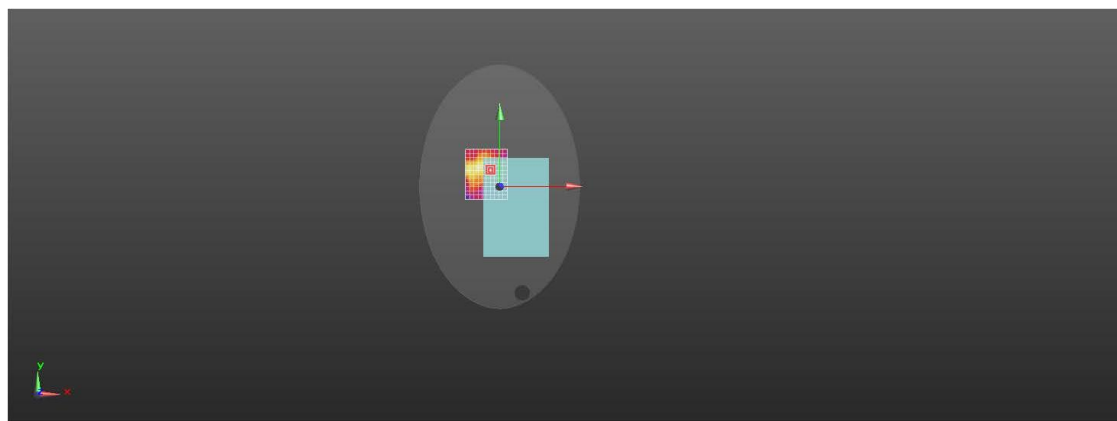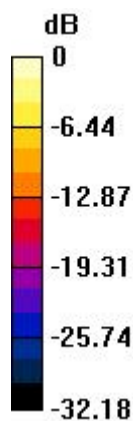

0 dB = 0.289 W/kg = -5.39 dBW/kg

