Internal Photos

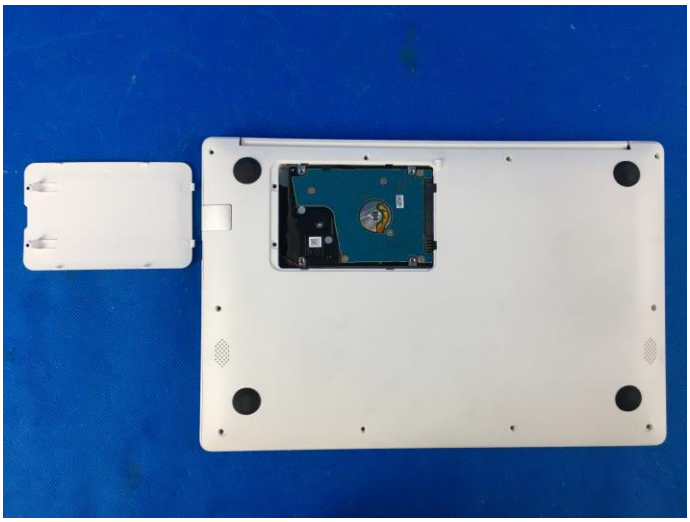

Rechargeable Li-polymer Battery
Model Name: NV-3285128-2S
NOM 7.6V 5000mAh 38Wh
Max Voltage : 8.7V
Carried Standard:GB 31241-2014
Store between 0°C-60°C 32°F-140°F
Please refer user manual or follow local ordinance and/or regulations for disposal
CAUTION:
1.Do not disassemble or repair this battery.
2.Do not squeeze, thrust, short-circuit the battery, nor put into water or fire.
3.Do not expose the battery in an ambient temperature of greater than 60 degree.
4.Use the specifically configured charger of NV-3285128-2S charging

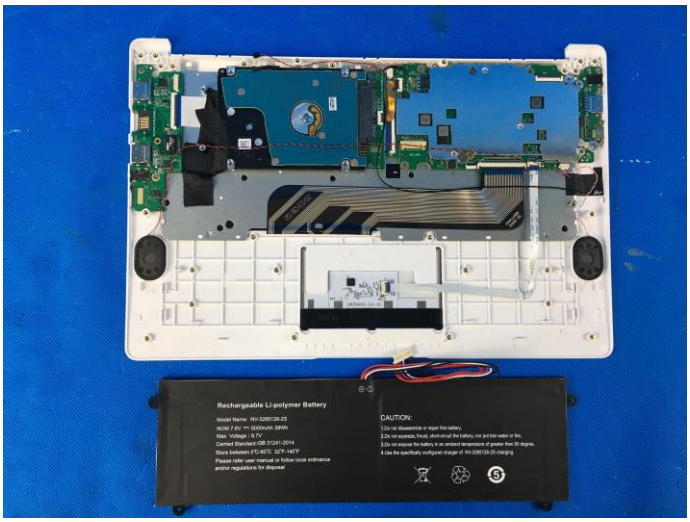
Rechargeable Li-polymer Battery
Model Name: NV-3285128-2S
NOM 7.6V ⎓ 5000mAh 38Wh
Max Voltage : 8.7V
Carried Standard:GB 31241-2014
Store between 0℃-60℃ 32℉-140℉
Please refer user manual or follow local ordinance and/or regulations for disposal
CAUTION:
1.Do not disassemble or repair this battery.
2.Do not squeeze, thrust, short-circuit the battery, nor put into water or fire.
3.Do not expose the battery in an ambient temperature of greater than 60 degree.
4.Use the specifically configured charger of NV-3285128-2S charging.

Rechargeable Li-polymer Battery
Model Name: NV-3285128-2S
NOM 7.6V ⎓ 5000mAh 38Wh
Max Voltage : 8.7V
Carried Standard:GB 31241-2014
Store between 0℃-60℃ 32℉-140℉
Please refer user manual or follow local ordinance and/or regulations for disposal
CAUTION:
1.Do not disassemble or repair this battery.
2.Do not squeeze, thrust, short-circuit the battery, nor put into water or fire.
3.Do not expose the battery in an ambient temperature of greater than 60 degree.
4.Use the specifically configured charger of NV-3285128-2S charging.

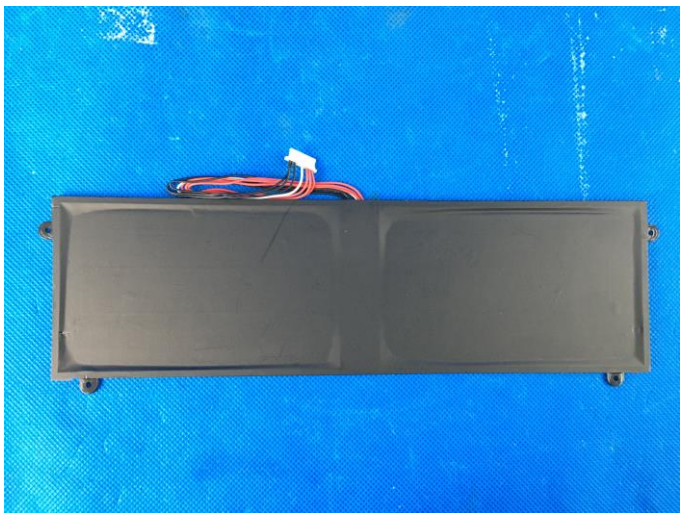

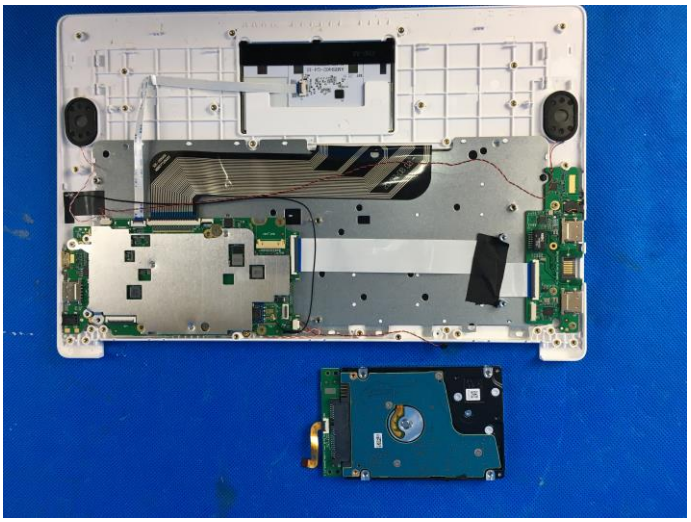

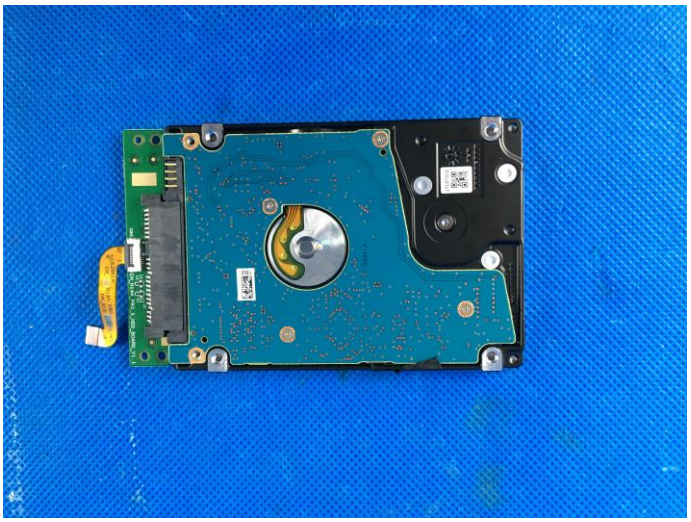

TOSHIBA
MQ04ABF100
DRIVE REV AZA A0J1J0002U
5V DC 1.0A DATE:GMF4R20C
SN X2QCC5SSTFDC
1TB LBA 1,953,525,168Sectors

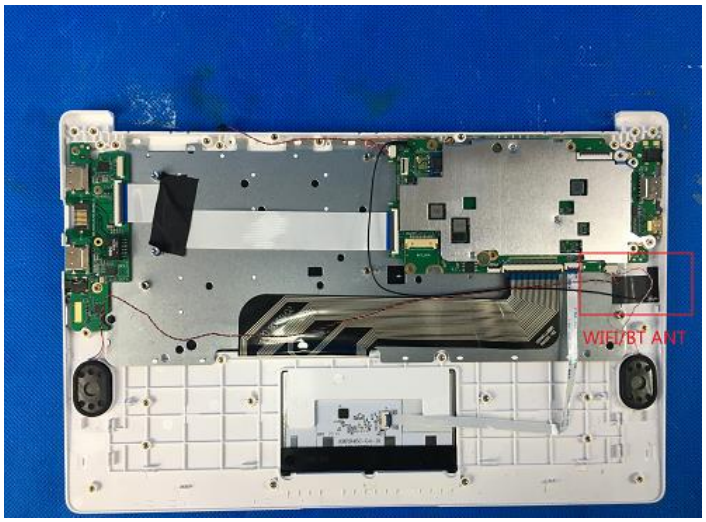
WIFI/BT ANT

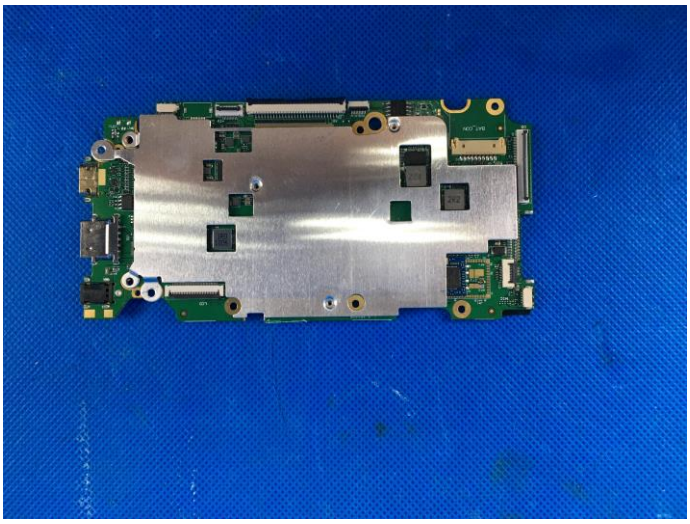

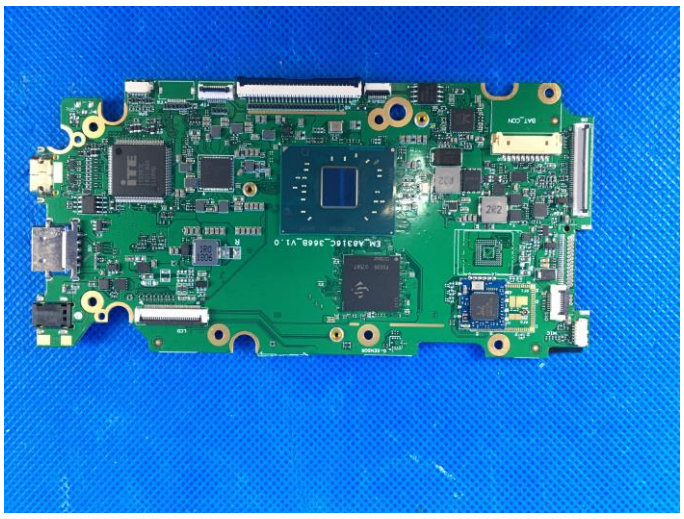

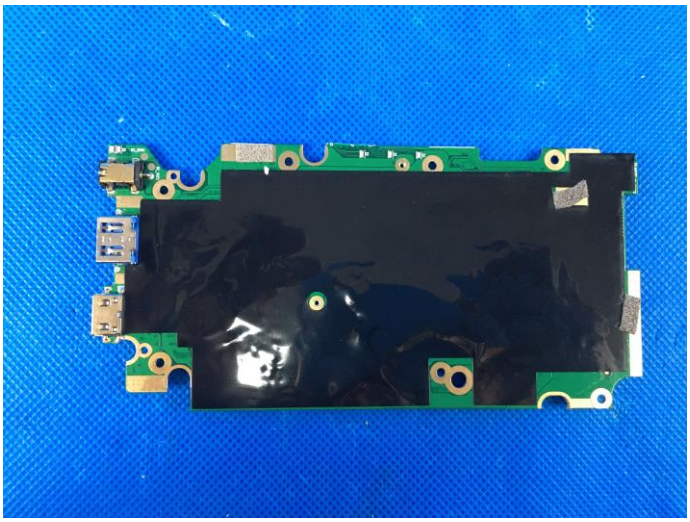

EM_A8316C_366B_V1.0

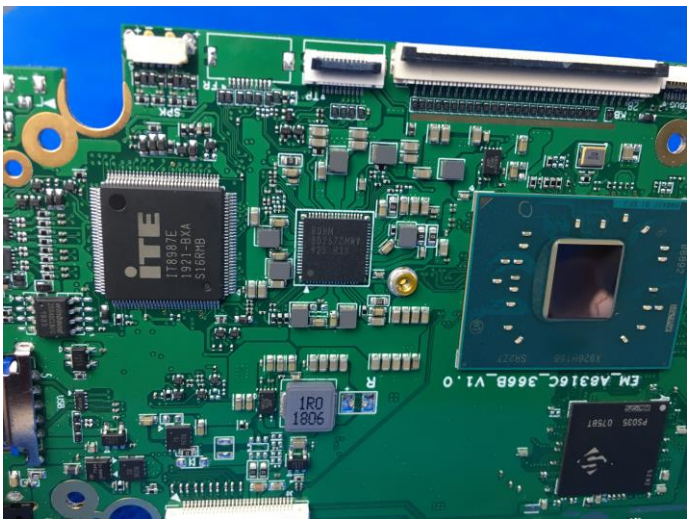
iTE
IT8987E
1921-BXA
S16RHB
1R0
1805
EM_A8316C_366B_V1.0

EM_A8316C_366B_V1.0
2R2

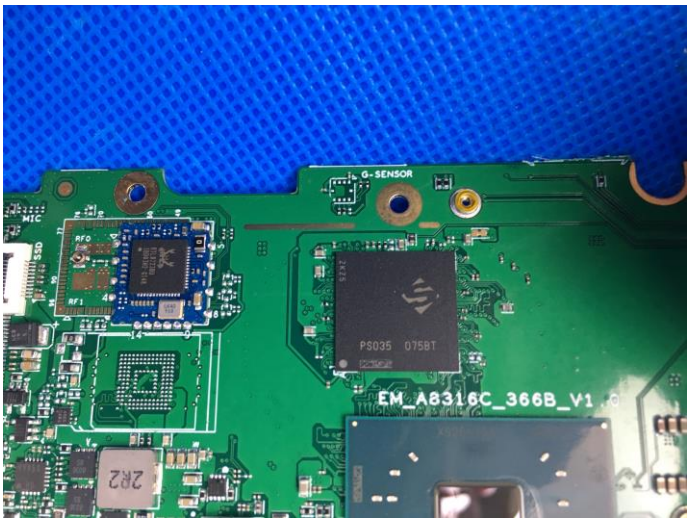
G-SENSOR
MIC
RF0
RF1
PS035 0758T
EM_A8316C_366B_V1
2R2

EM_N14A_RJ45_BOARD_V1.1
MS-ME198407
LN539ZC04154A

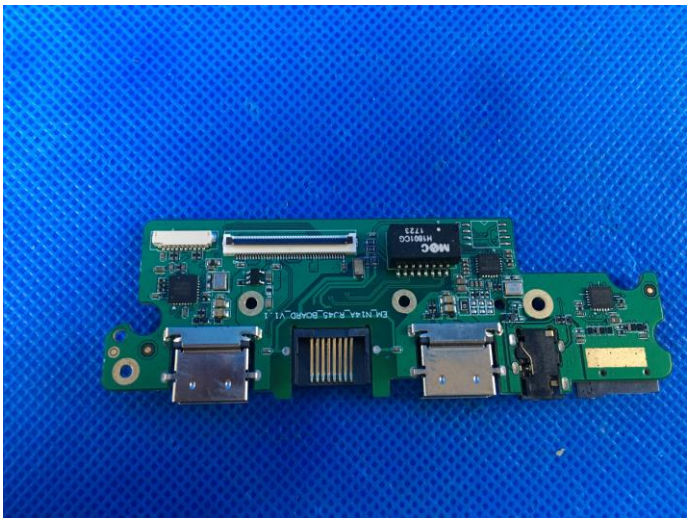
MOC
H9815CG
1723
EM_N14A_RJ45_BOARD_V1.1