



Appendix E

RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: Hyundai Mini PC

Test Model: HMB10M01

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



E.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	15.044	>=0.5	Pass
NVNT	a	5785	Ant1	13.784	>=0.5	Pass
NVNT	a	5825	Ant1	15.673	>=0.5	Pass
NVNT	n20	5745	Ant1	15.131	>=0.5	Pass
NVNT	n20	5785	Ant1	16.285	>=0.5	Pass
NVNT	n20	5825	Ant1	14.229	>=0.5	Pass
NVNT	n40	5755	Ant1	35.112	>=0.5	Pass
NVNT	n40	5795	Ant1	35.095	>=0.5	Pass
NVNT	ac20	5745	Ant1	15.298	>=0.5	Pass
NVNT	ac20	5785	Ant1	15.319	>=0.5	Pass
NVNT	ac20	5825	Ant1	15.656	>=0.5	Pass
NVNT	ac40	5755	Ant1	35.088	>=0.5	Pass
NVNT	ac40	5795	Ant1	35.058	>=0.5	Pass
NVNT	ac80	5775	Ant1	75.094	>=0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1

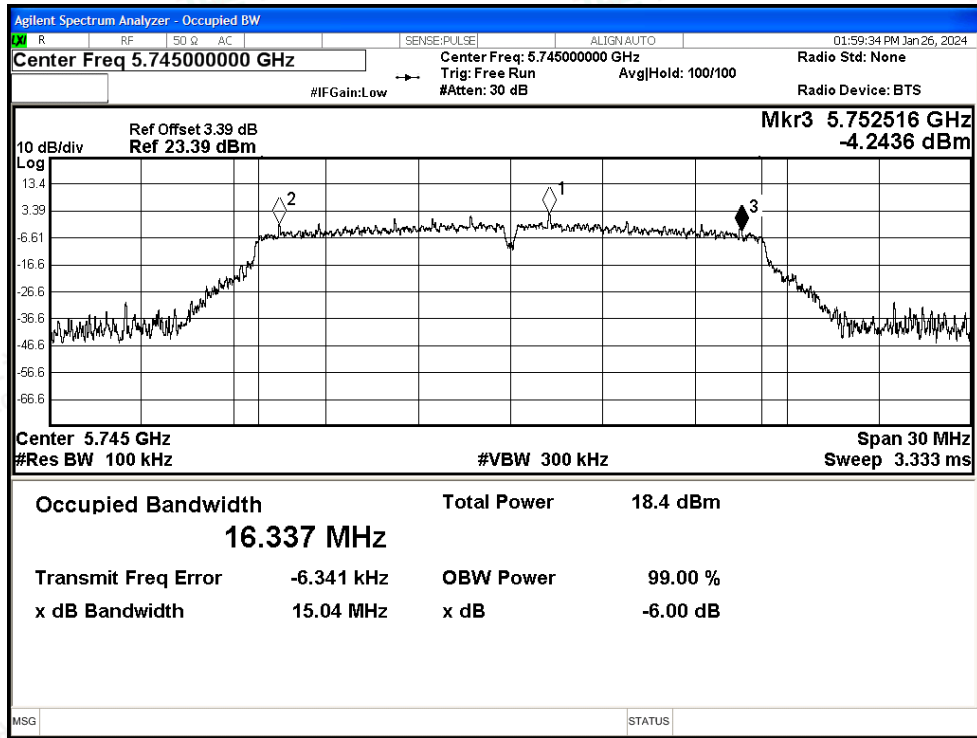


-6dB Bandwidth NVNT a 5785MHz Ant1

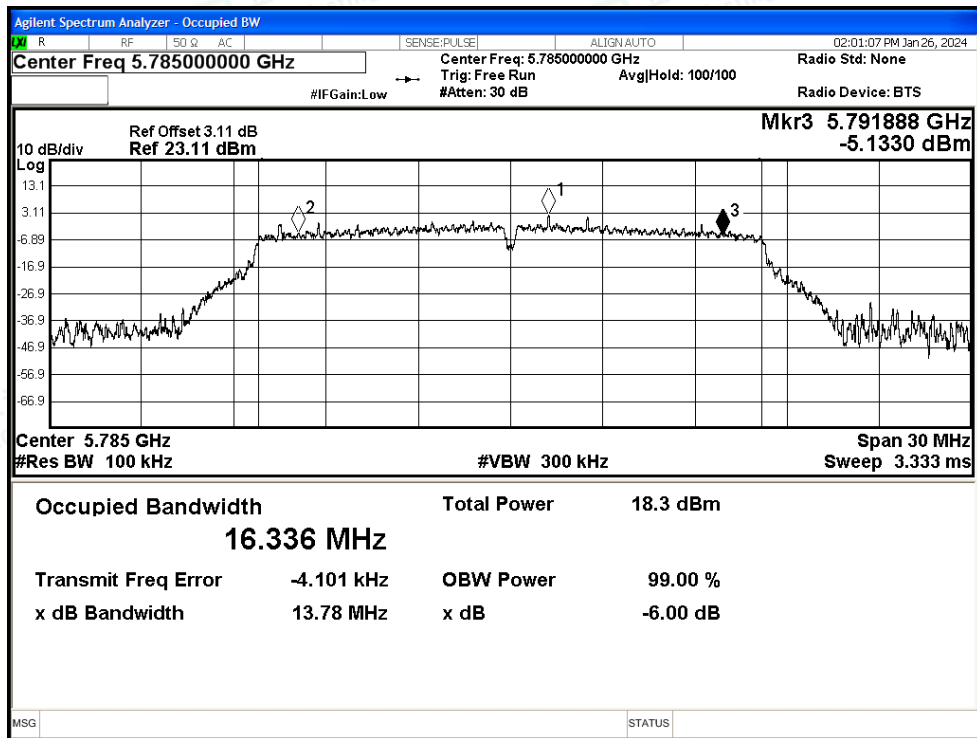




-6dB Bandwidth NVNT a 5825MHz Ant1

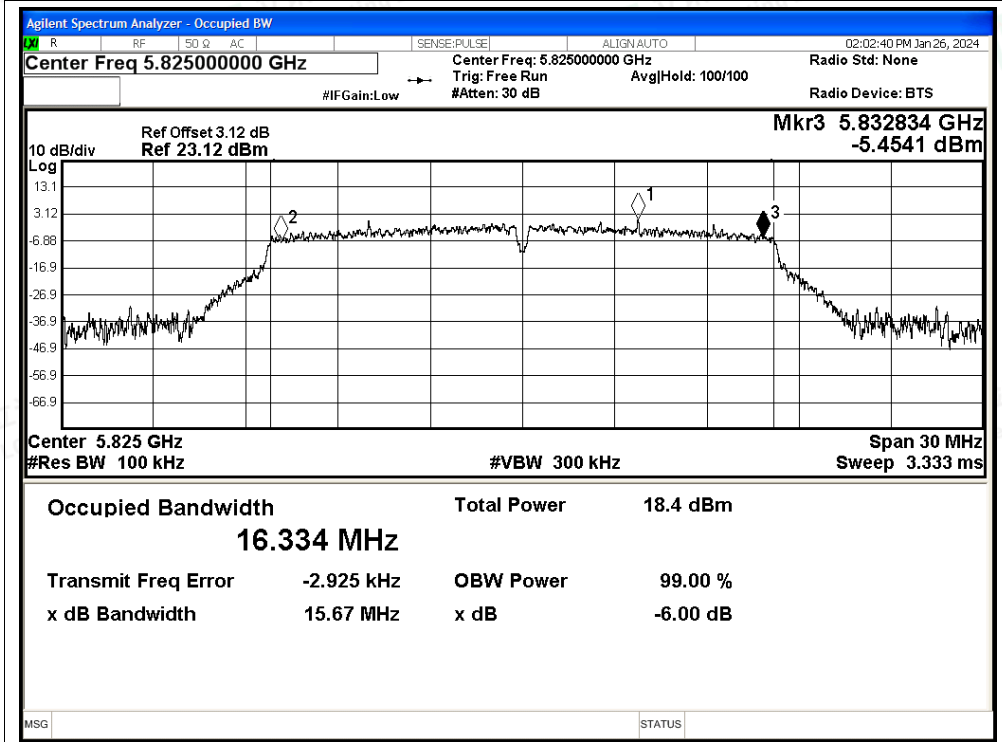


-6dB Bandwidth NVNT n20 5745MHz Ant1

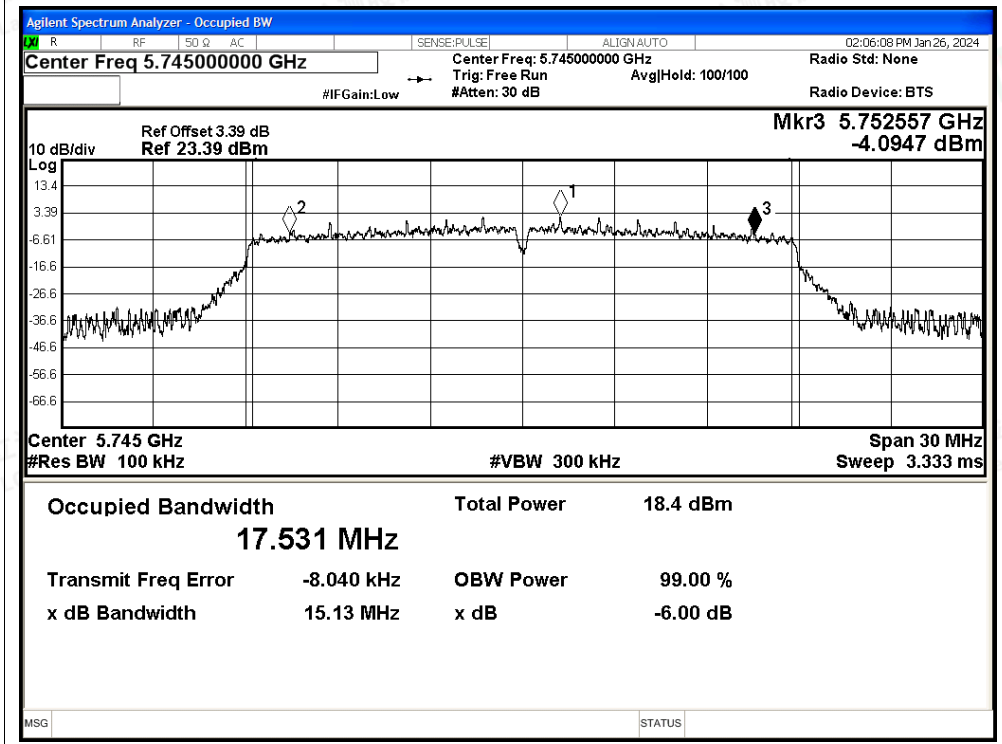




-6dB Bandwidth NVNT n20 5785MHz Ant1

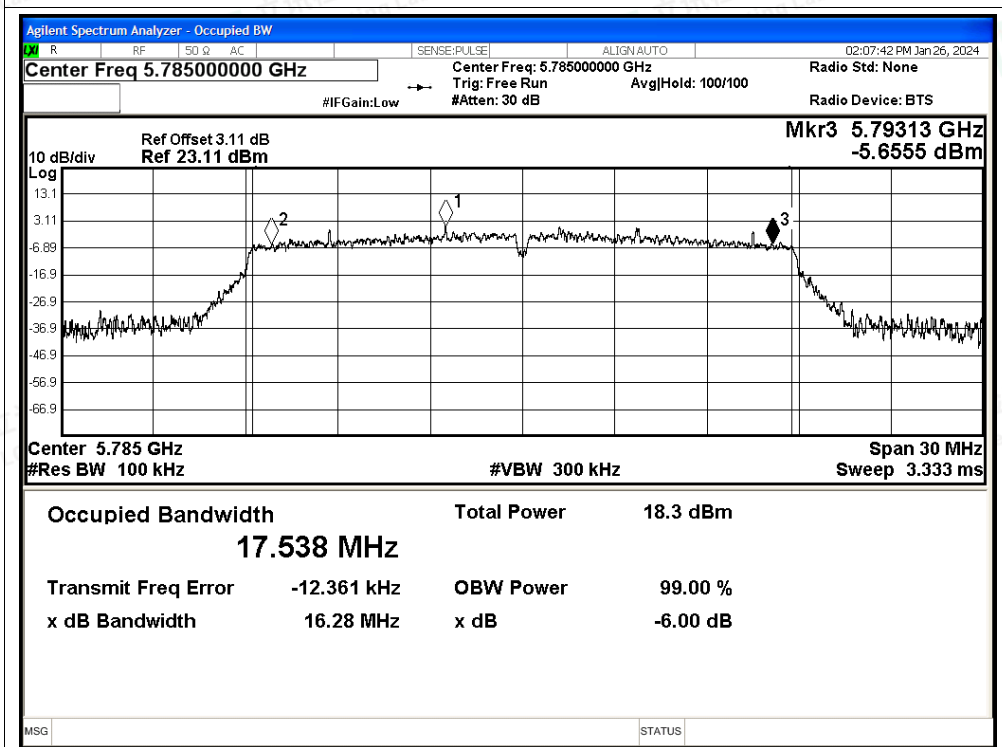


-6dB Bandwidth NVNT n20 5825MHz Ant1

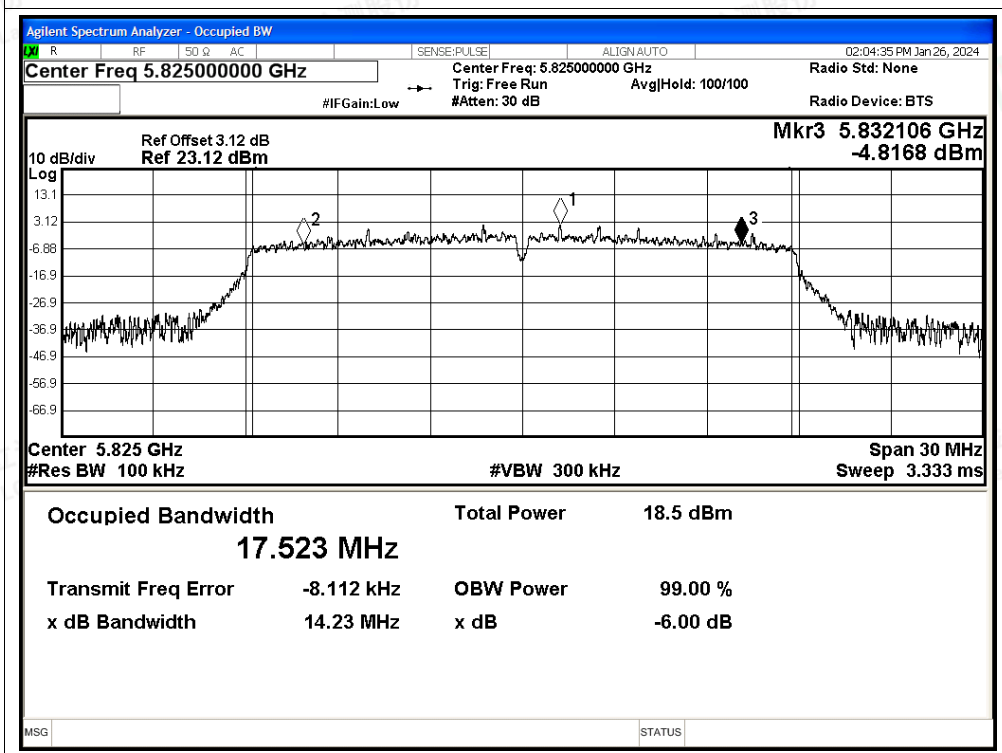




-6dB Bandwidth NVNT n40 5755MHz Ant1

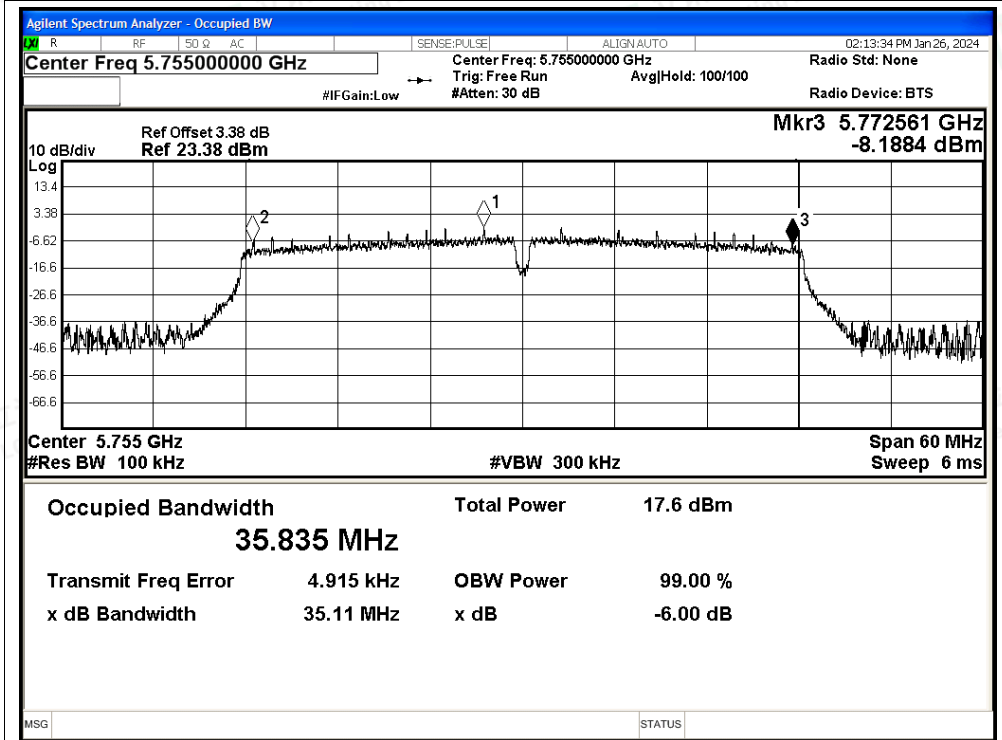


-6dB Bandwidth NVNT n40 5795MHz Ant1

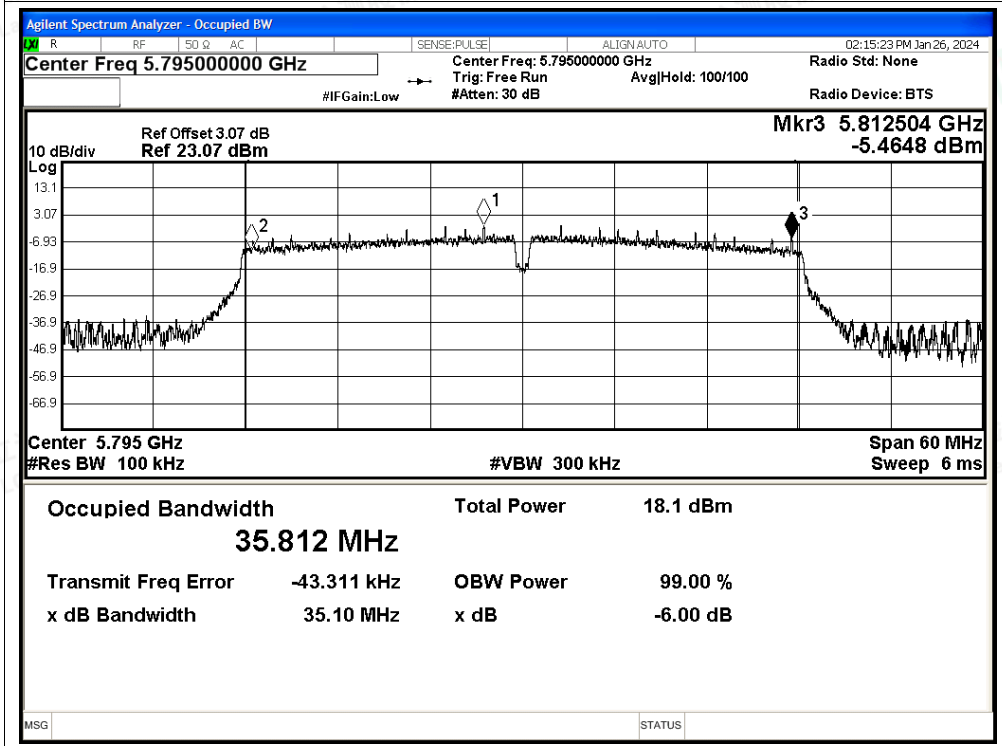




-6dB Bandwidth NVNT ac20 5745MHz Ant1

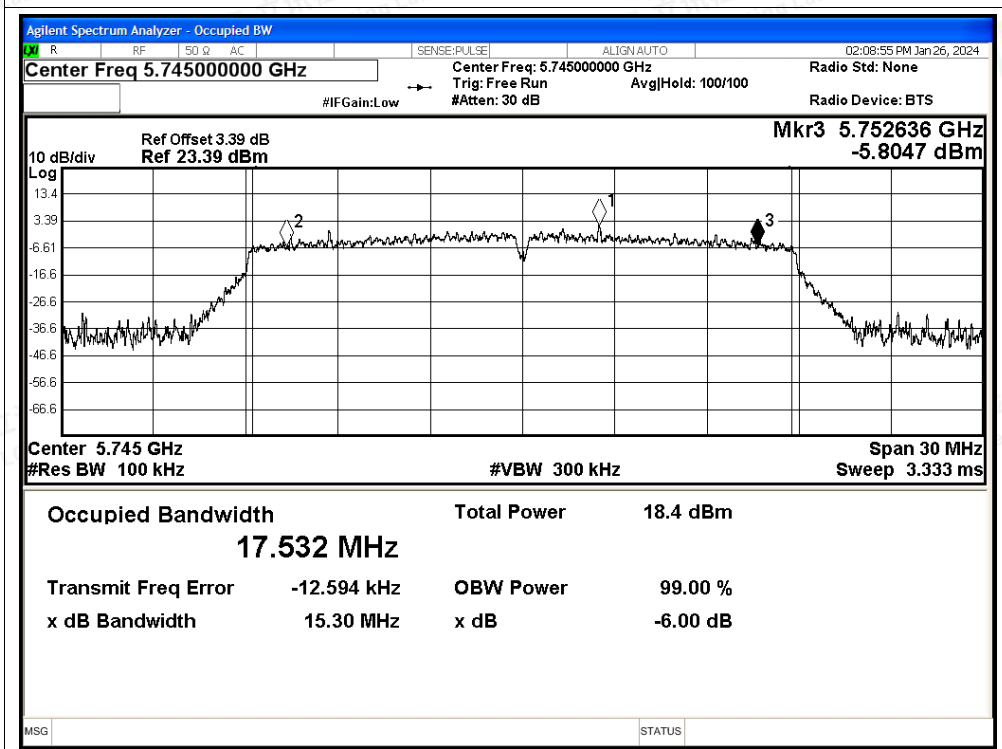


-6dB Bandwidth NVNT ac20 5785MHz Ant1

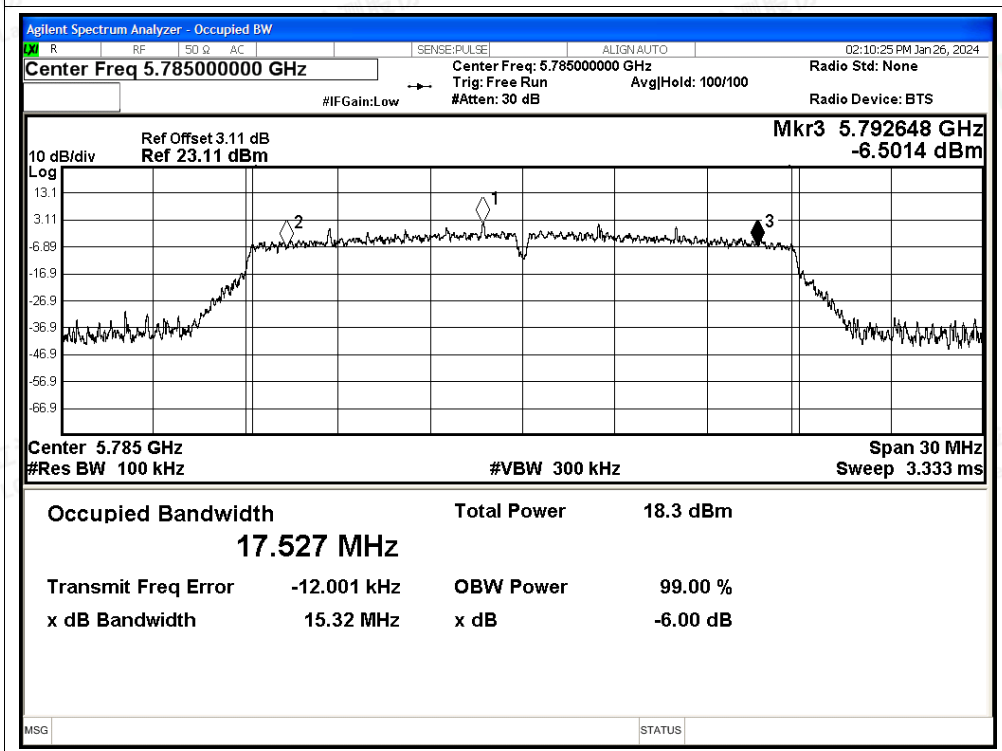




-6dB Bandwidth NVNT ac20 5825MHz Ant1

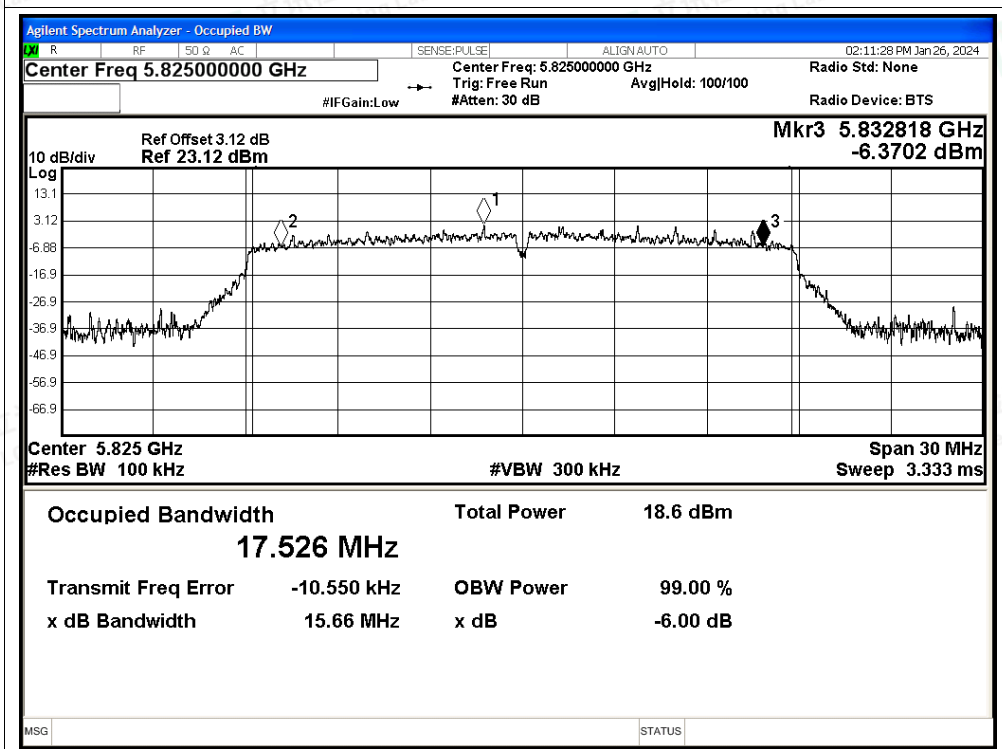


-6dB Bandwidth NVNT ac40 5755MHz Ant1

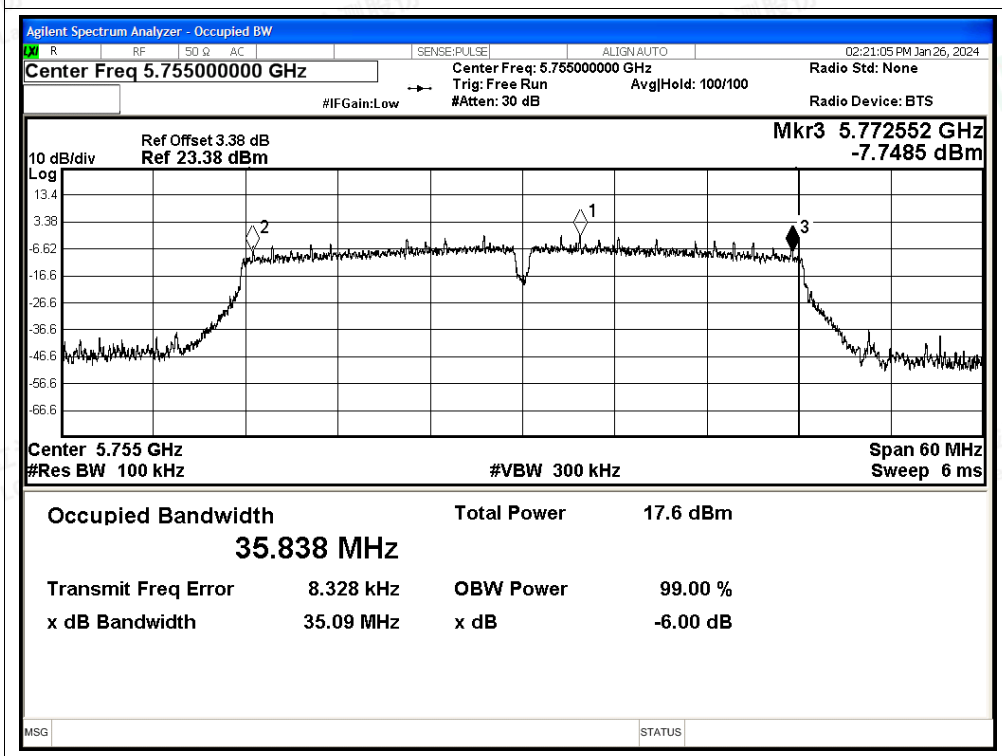




-6dB Bandwidth NVNT ac40 5795MHz Ant1

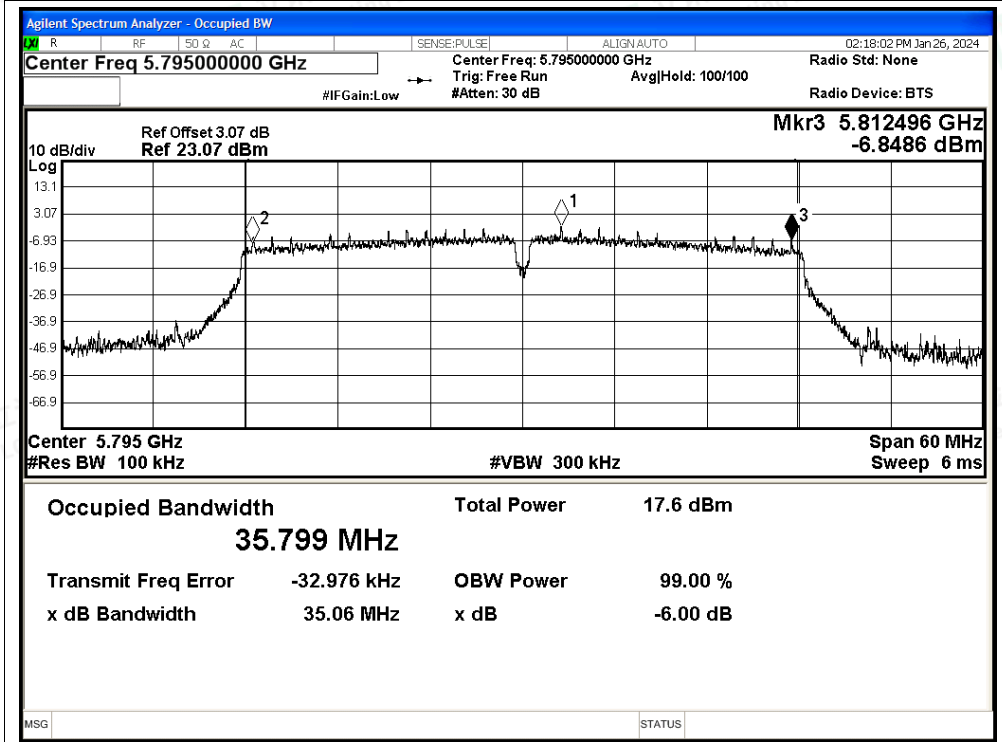

-6dB Bandwidth NVNT ac80 5775MHz Ant1

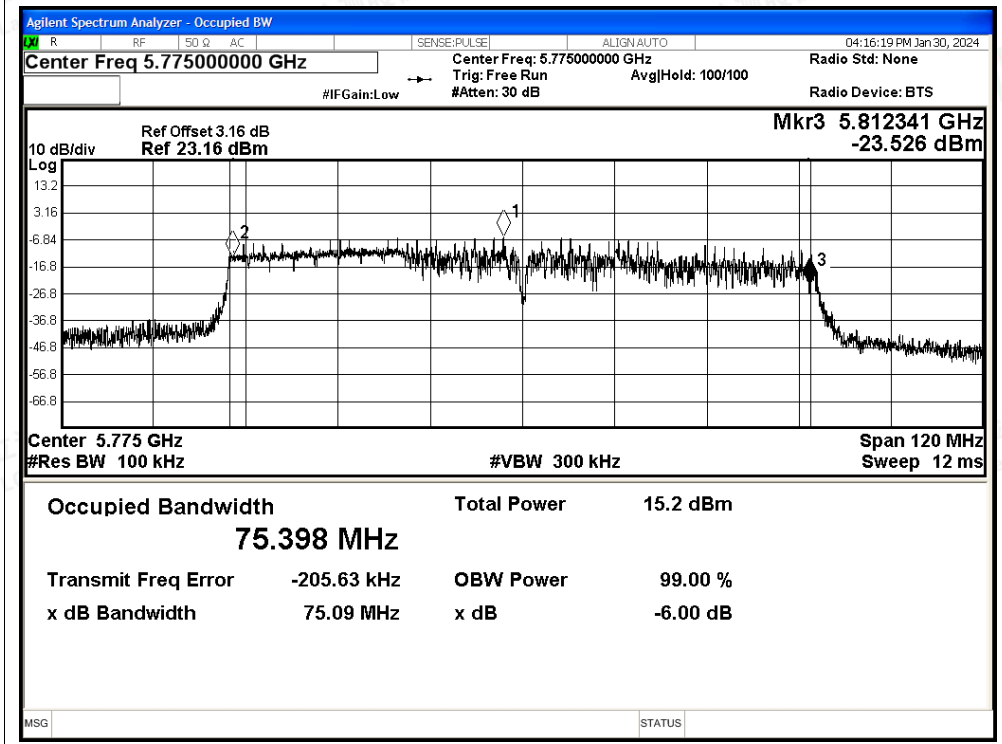




Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant2	13.534	≥ 0.5	Pass
NVNT	a	5785	Ant2	14.831	≥ 0.5	Pass
NVNT	a	5825	Ant2	15.037	≥ 0.5	Pass
NVNT	n20	5745	Ant2	16.644	≥ 0.5	Pass
NVNT	n20	5785	Ant2	15.449	≥ 0.5	Pass
NVNT	n20	5825	Ant2	11.325	≥ 0.5	Pass
NVNT	n40	5755	Ant2	35.081	≥ 0.5	Pass
NVNT	n40	5795	Ant2	33.82	≥ 0.5	Pass
NVNT	ac20	5745	Ant2	15.421	≥ 0.5	Pass
NVNT	ac20	5785	Ant2	13.209	≥ 0.5	Pass
NVNT	ac20	5825	Ant2	14.706	≥ 0.5	Pass
NVNT	ac40	5755	Ant2	35.002	≥ 0.5	Pass
NVNT	ac40	5795	Ant2	35.1	≥ 0.5	Pass
NVNT	ac80	5775	Ant2	75.114	≥ 0.5	Pass






Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant2

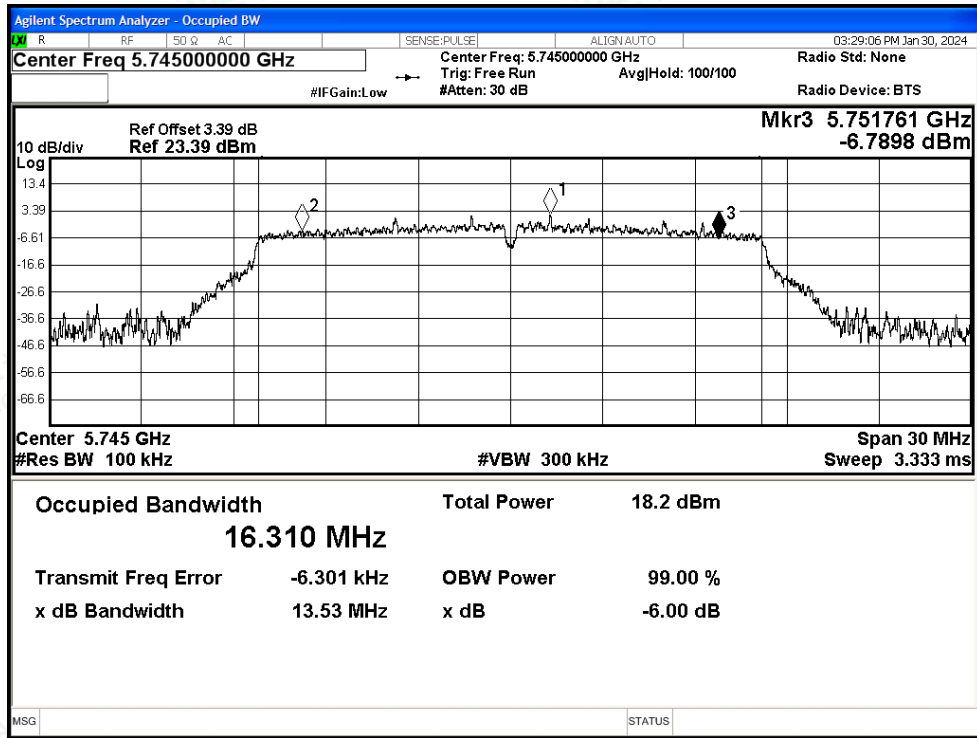


-6dB Bandwidth NVNT a 5785MHz Ant2

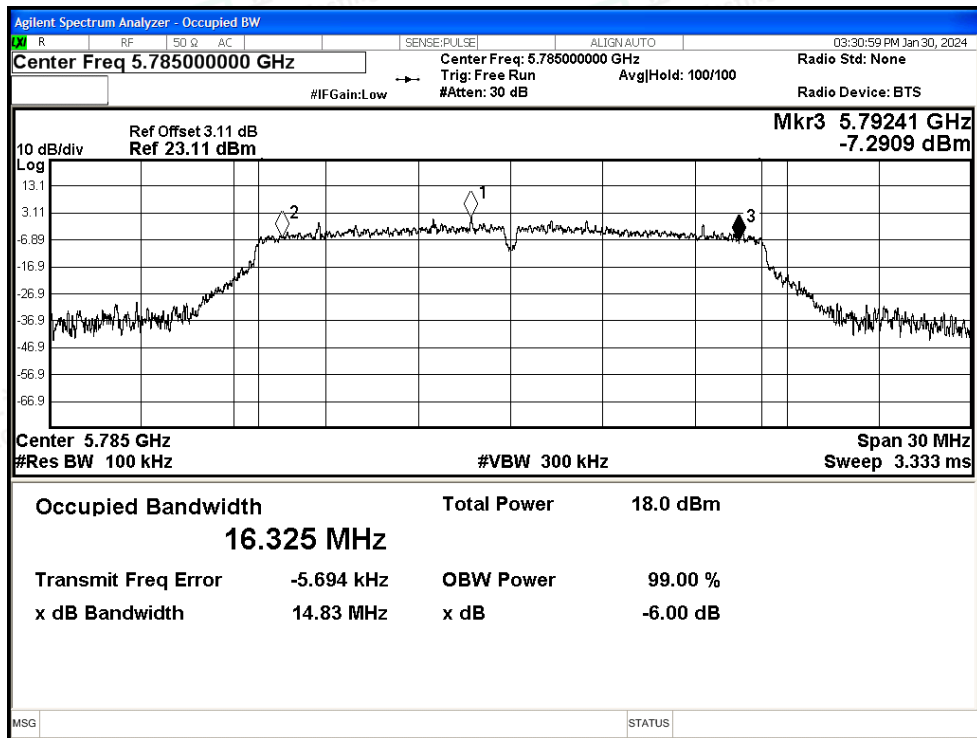




-6dB Bandwidth NVNT a 5825MHz Ant2

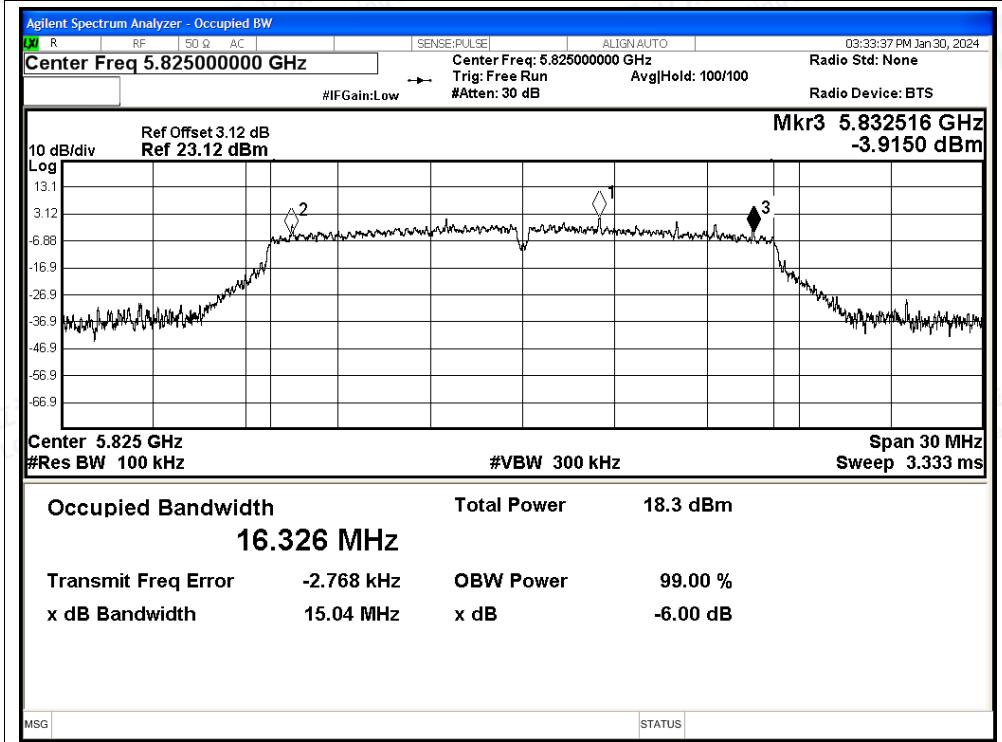


-6dB Bandwidth NVNT n20 5745MHz Ant2

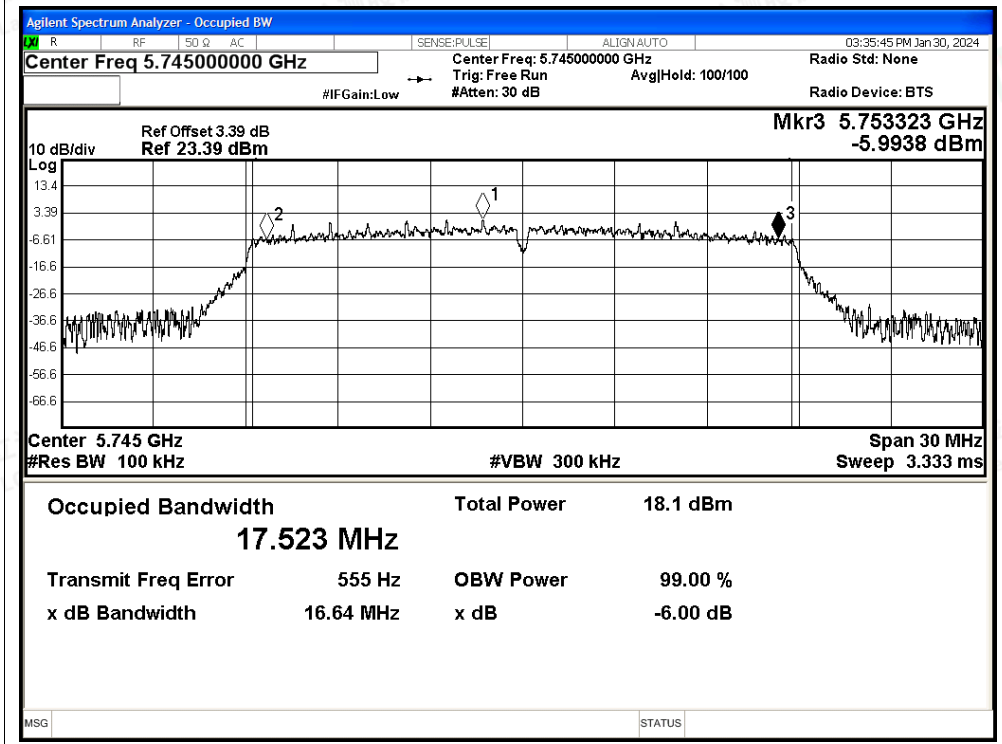




-6dB Bandwidth NVNT n20 5785MHz Ant2

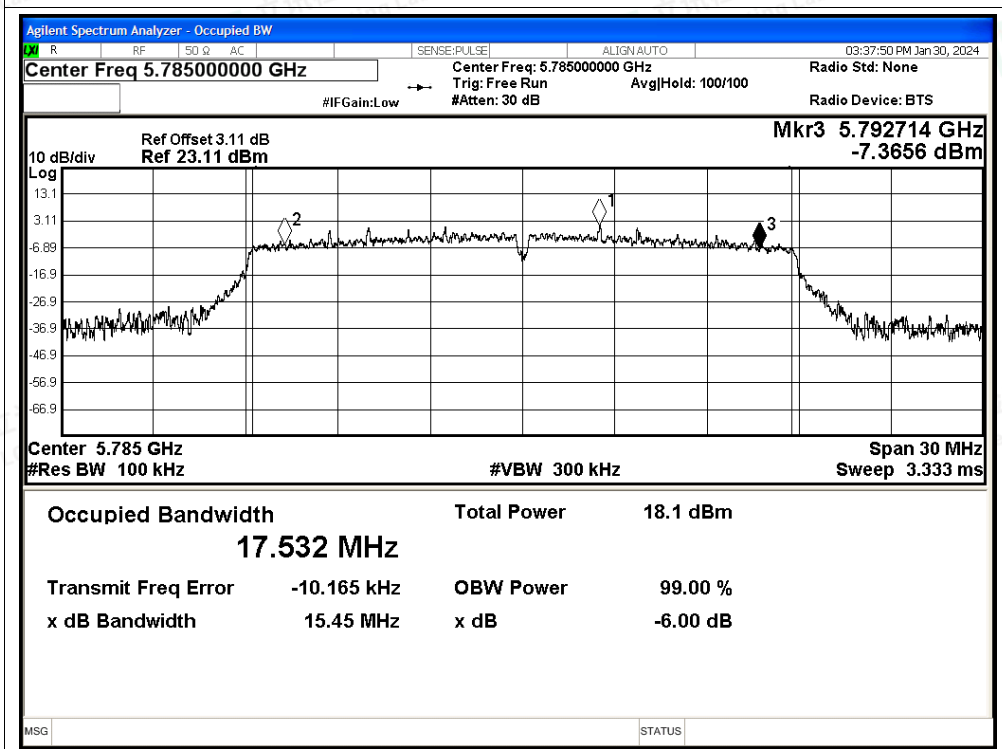


-6dB Bandwidth NVNT n20 5825MHz Ant2

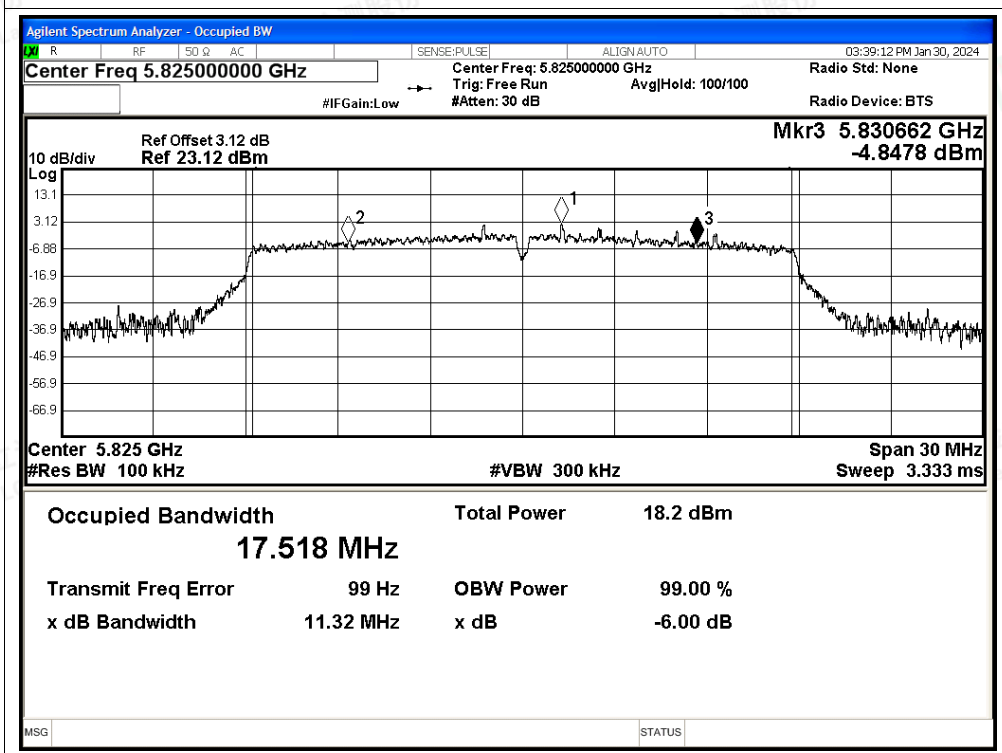




-6dB Bandwidth NVNT n40 5755MHz Ant2

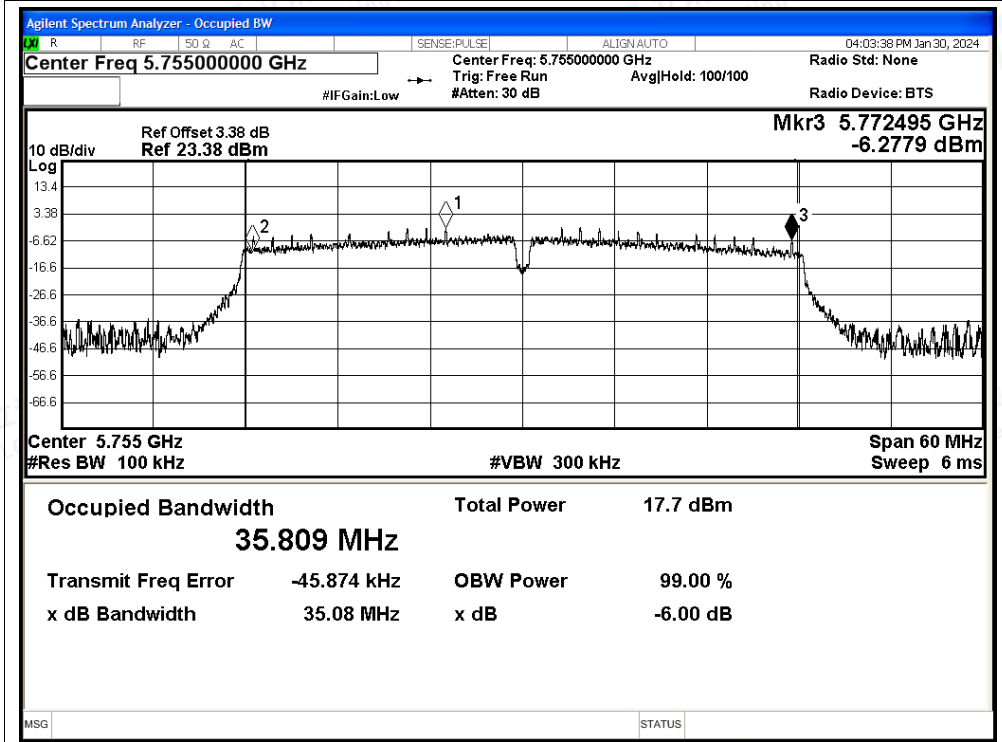


-6dB Bandwidth NVNT n40 5795MHz Ant2

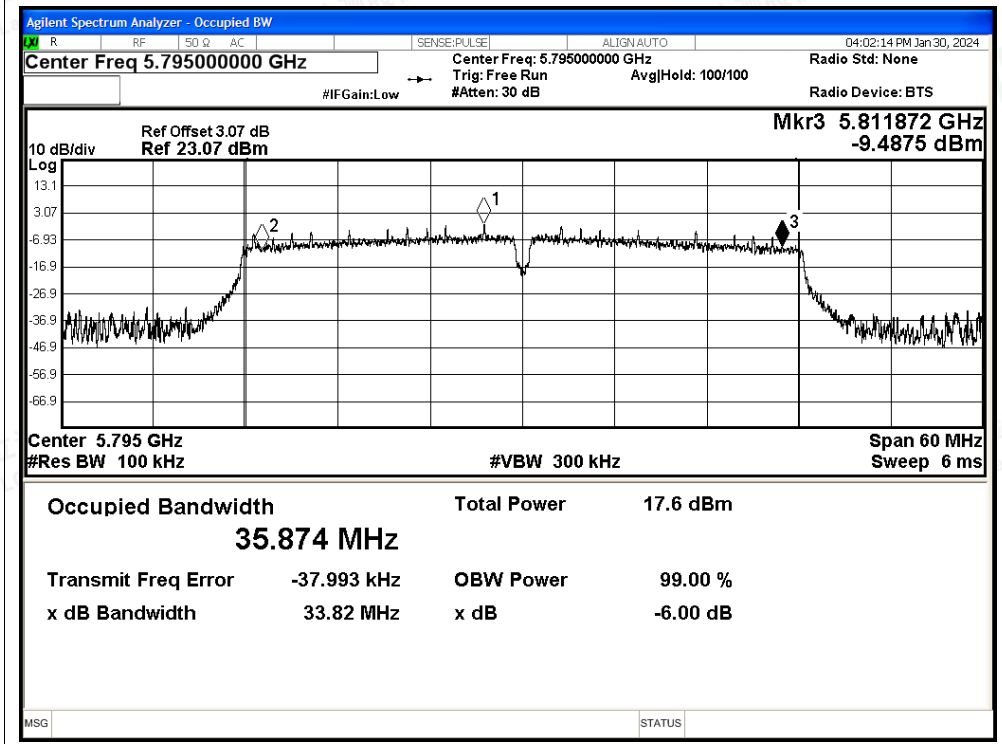




-6dB Bandwidth NVNT ac20 5745MHz Ant2

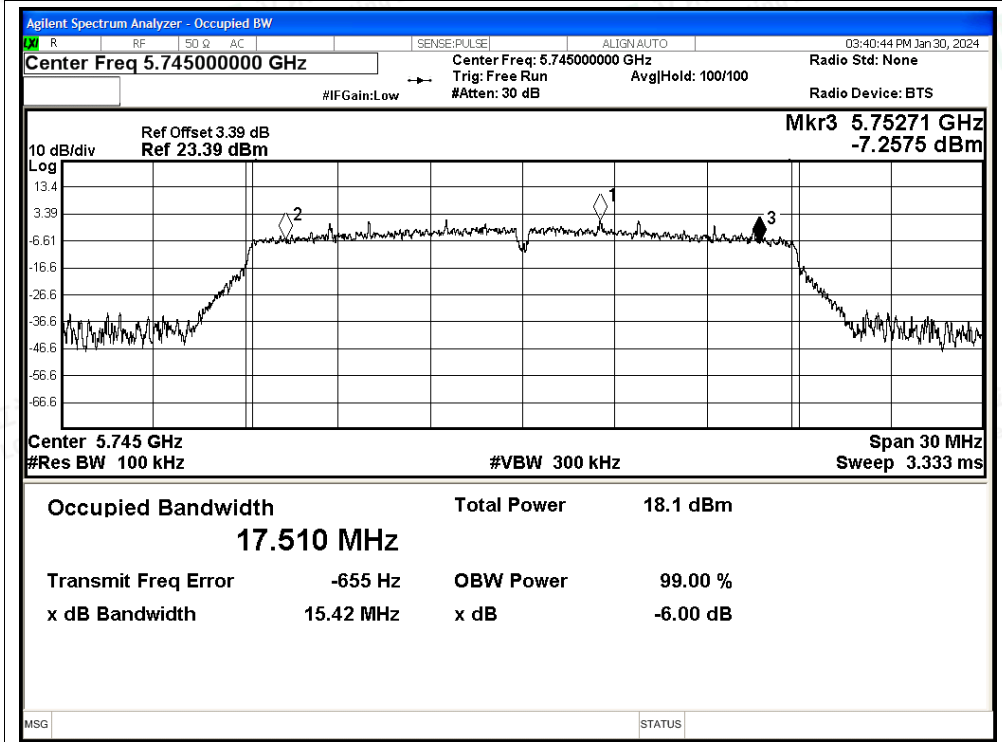


-6dB Bandwidth NVNT ac20 5785MHz Ant2

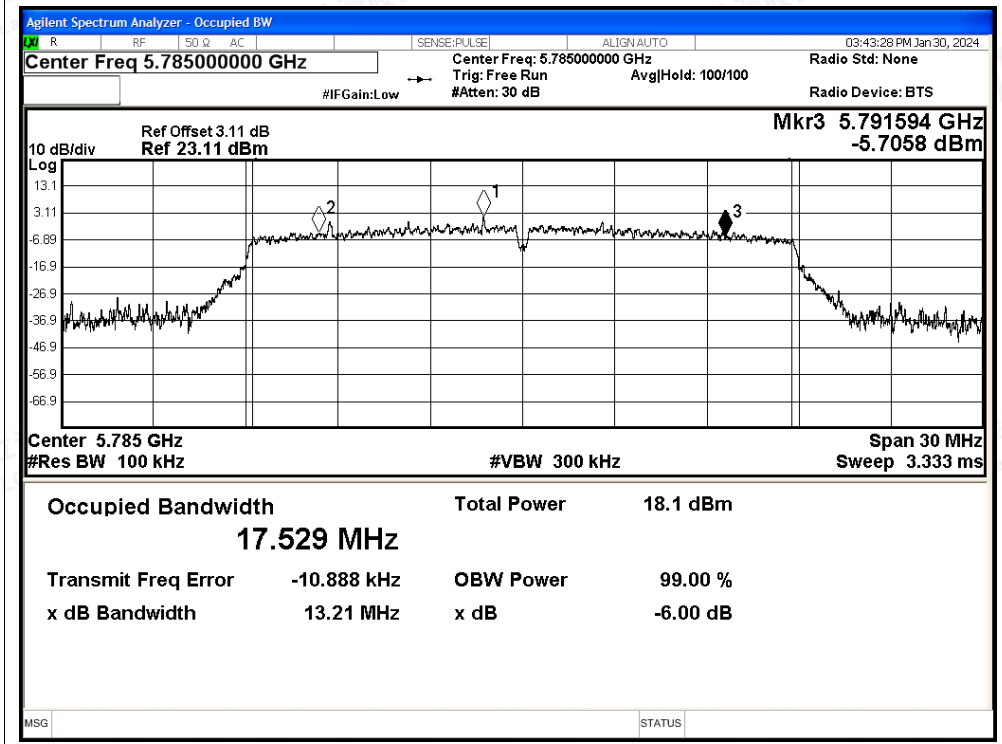




-6dB Bandwidth NVNT ac20 5825MHz Ant2

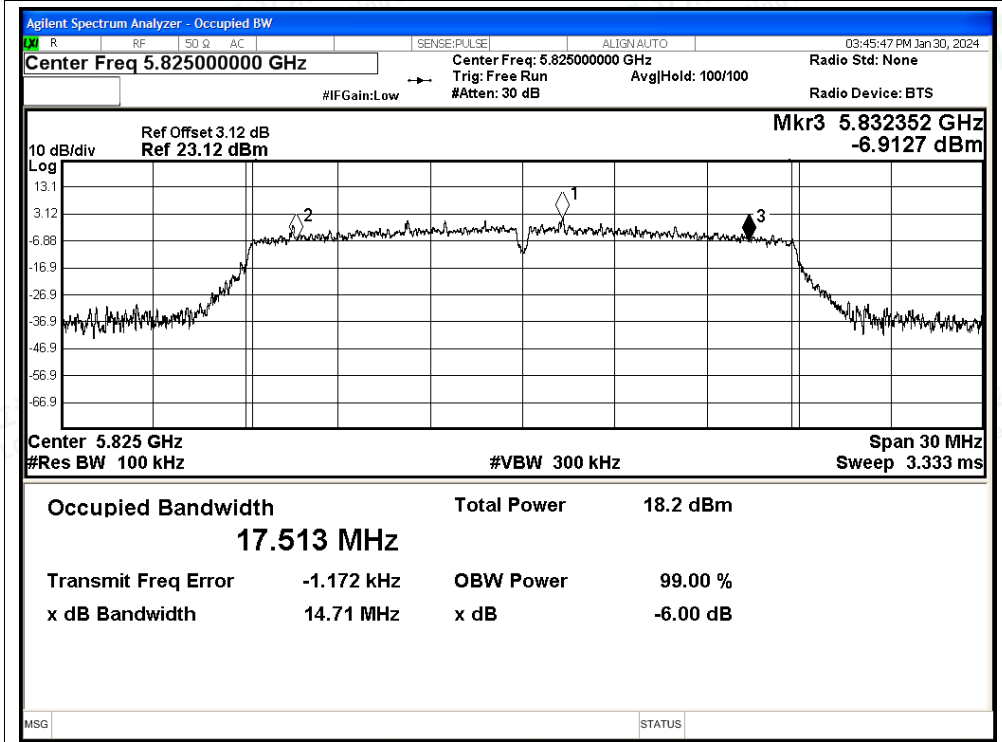


-6dB Bandwidth NVNT ac40 5755MHz Ant2

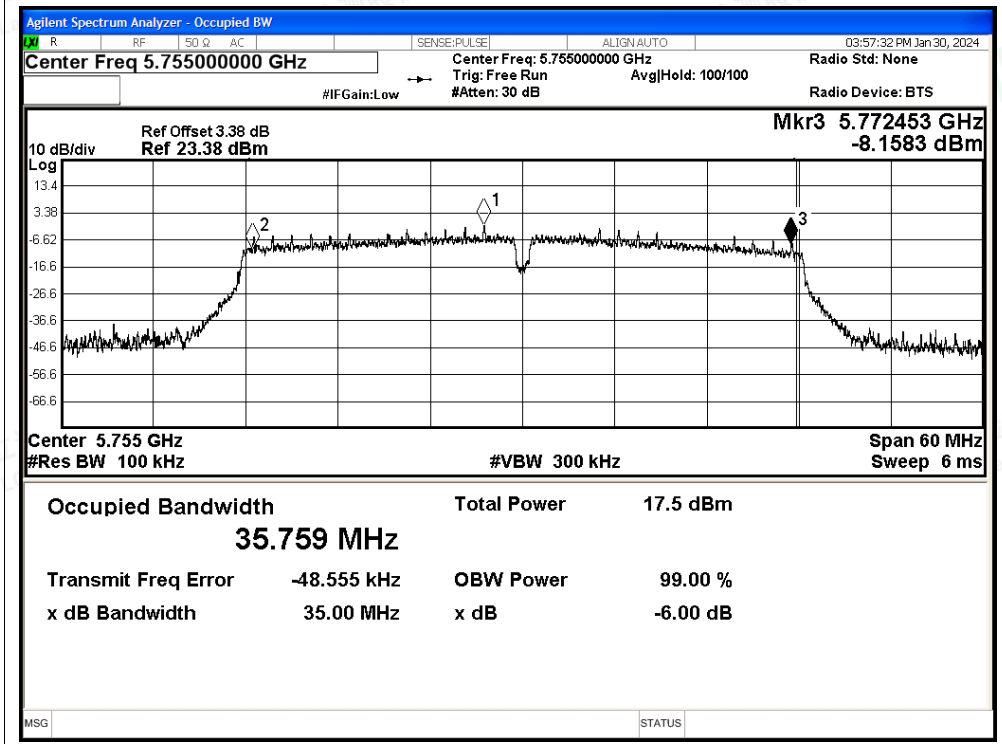




-6dB Bandwidth NVNT ac40 5795MHz Ant2

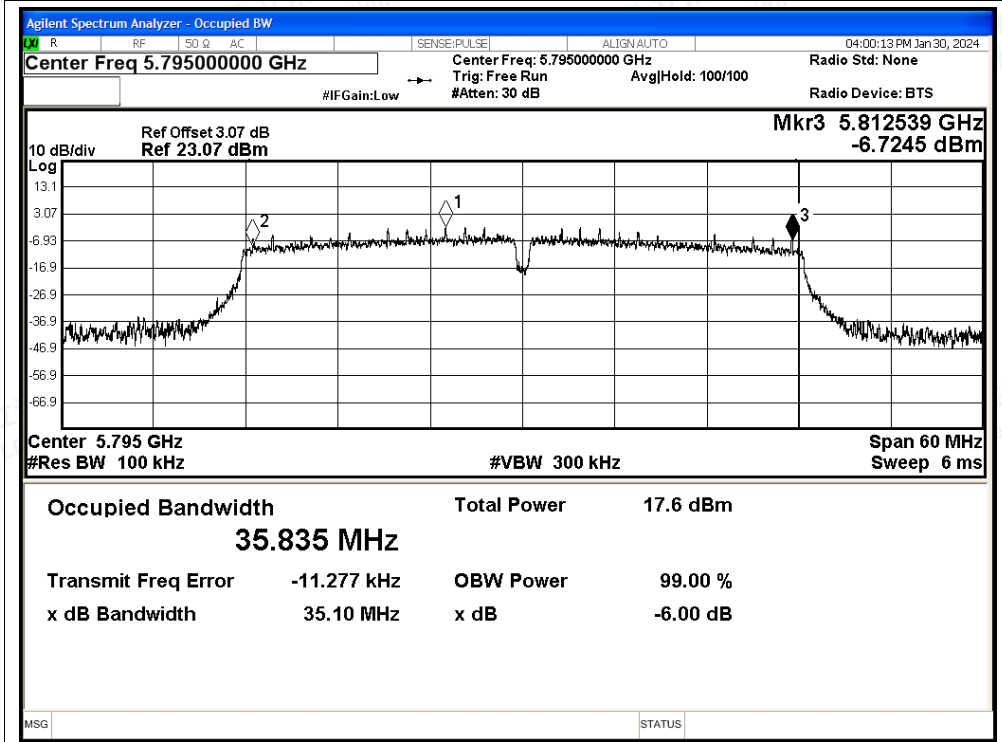

-6dB Bandwidth NVNT ac80 5775MHz Ant2

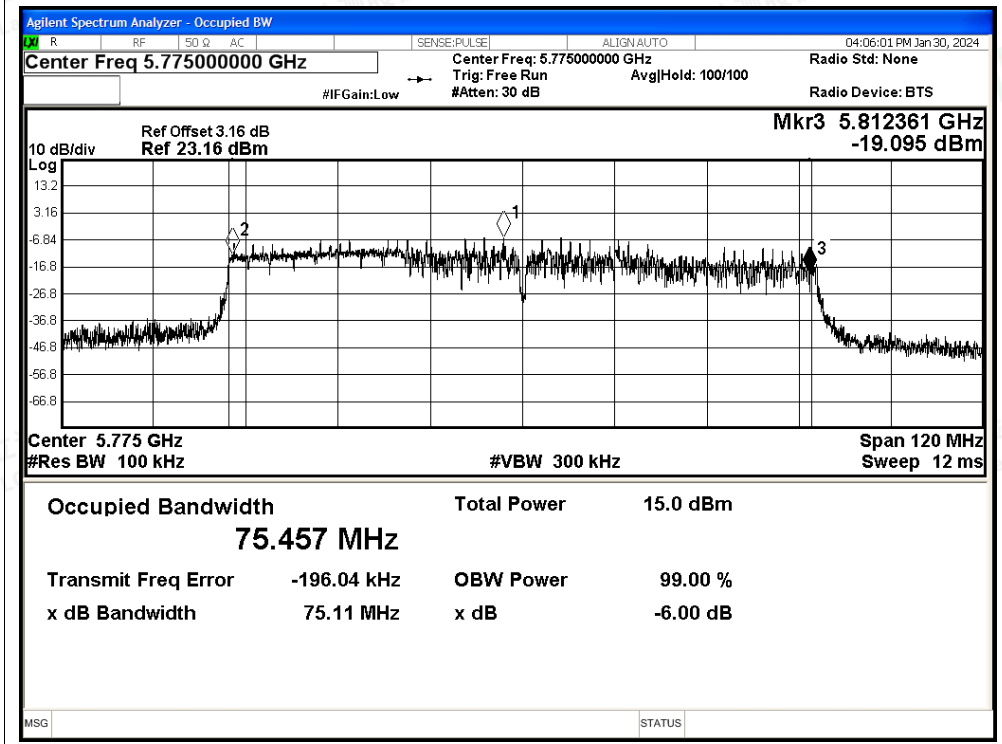



E.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	12.43	0.13	12.56	30	Pass
NVNT	a	5785	Ant1	12.48	0.13	12.61	30	Pass
NVNT	a	5825	Ant1	12.63	0.13	12.76	30	Pass
NVNT	n20	5745	Ant1	12.53	0.15	12.68	30	Pass
NVNT	n20	5785	Ant1	12.42	0.15	12.57	30	Pass
NVNT	n20	5825	Ant1	12.45	0.15	12.6	30	Pass
NVNT	n40	5755	Ant1	11.34	0.28	11.62	30	Pass
NVNT	n40	5795	Ant1	11.68	0.29	11.97	30	Pass
NVNT	ac20	5745	Ant1	12.48	0.14	12.62	30	Pass
NVNT	ac20	5785	Ant1	12.4	0.14	12.54	30	Pass
NVNT	ac20	5825	Ant1	12.53	0.15	12.68	30	Pass
NVNT	ac40	5755	Ant1	11.17	0.28	11.45	30	Pass
NVNT	ac40	5795	Ant1	11.23	0.28	11.51	30	Pass
NVNT	ac80	5775	Ant1	10.19	0.11	10.3	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant2	12.23	0.13	12.36	30	Pass
NVNT	a	5785	Ant2	12.1	0.13	12.23	30	Pass
NVNT	a	5825	Ant2	12.36	0.13	12.49	30	Pass
NVNT	n20	5745	Ant2	12.24	0.15	12.39	30	Pass
NVNT	n20	5785	Ant2	12.19	0.15	12.34	30	Pass
NVNT	n20	5825	Ant2	12.09	0.15	12.24	30	Pass
NVNT	n40	5755	Ant2	11.25	0.28	11.53	30	Pass
NVNT	n40	5795	Ant2	11.2	0.28	11.48	30	Pass
NVNT	ac20	5745	Ant2	12.18	0.15	12.33	30	Pass
NVNT	ac20	5785	Ant2	12.06	0.14	12.2	30	Pass
NVNT	ac20	5825	Ant2	12.29	0.15	12.44	30	Pass
NVNT	ac40	5755	Ant2	11.11	0.28	11.39	30	Pass
NVNT	ac40	5795	Ant2	11.16	0.28	11.44	30	Pass
NVNT	ac80	5775	Ant2	10.14	0.12	10.26	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5745	12.68	12.39	15.55	30	Pass
NVNT	n20	5785	12.57	12.34	15.47	30	Pass
NVNT	n20	5825	12.6	12.24	15.43	30	Pass
NVNT	n40	5755	11.62	11.53	14.59	30	Pass
NVNT	n40	5795	11.97	11.48	14.74	30	Pass
NVNT	ac20	5745	12.62	12.33	15.49	30	Pass
NVNT	ac20	5785	12.54	12.2	15.38	30	Pass
NVNT	ac20	5825	12.68	12.44	15.57	30	Pass
NVNT	ac40	5755	11.45	11.39	14.43	30	Pass
NVNT	ac40	5795	11.51	11.44	14.49	30	Pass
NVNT	ac80	5775	10.3	10.26	13.29	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



E.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant1	-0.01	0.13	0.12	30	Pass
NVNT	a	5785	Ant1	-0.16	0.13	-0.03	30	Pass
NVNT	a	5825	Ant1	0.02	0.13	0.15	30	Pass
NVNT	n20	5745	Ant1	-0.28	0.15	-0.13	30	Pass
NVNT	n20	5785	Ant1	-0.47	0.15	-0.32	30	Pass
NVNT	n20	5825	Ant1	-0.1	0.15	0.05	30	Pass
NVNT	n40	5755	Ant1	-4.69	0.28	-4.41	30	Pass
NVNT	n40	5795	Ant1	-3.58	0.29	-3.29	30	Pass
NVNT	ac20	5745	Ant1	-0.41	0.14	-0.27	30	Pass
NVNT	ac20	5785	Ant1	-0.06	0.14	0.08	30	Pass
NVNT	ac20	5825	Ant1	-0.13	0.15	0.02	30	Pass
NVNT	ac40	5755	Ant1	-4.41	0.28	-4.13	30	Pass
NVNT	ac40	5795	Ant1	-4.58	0.28	-4.3	30	Pass
NVNT	ac80	5775	Ant1	-7.42	0.11	-7.31	30	Pass


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant2	0.05	0.13	0.18	30	Pass
NVNT	a	5785	Ant2	-0.41	0.13	-0.28	30	Pass
NVNT	a	5825	Ant2	-0.11	0.13	0.02	30	Pass
NVNT	n20	5745	Ant2	-0.64	0.15	-0.49	30	Pass
NVNT	n20	5785	Ant2	-0.6	0.15	-0.45	30	Pass
NVNT	n20	5825	Ant2	-0.09	0.15	0.06	30	Pass
NVNT	n40	5755	Ant2	-3.98	0.28	-3.7	30	Pass
NVNT	n40	5795	Ant2	-4.38	0.28	-4.1	30	Pass
NVNT	ac20	5745	Ant2	-0.58	0.15	-0.43	30	Pass
NVNT	ac20	5785	Ant2	-0.59	0.14	-0.45	30	Pass
NVNT	ac20	5825	Ant2	-0.54	0.15	-0.39	30	Pass
NVNT	ac40	5755	Ant2	-4.38	0.28	-4.1	30	Pass
NVNT	ac40	5795	Ant2	-4.67	0.28	-4.39	30	Pass
NVNT	ac80	5775	Ant2	-7.09	0.12	-6.97	30	Pass






MIMO


Condition	Mode	Frequency (MHz)	Total PSD (dBm/500KHz)			Limit (dBm/500KHz)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5745	-0.13	-0.49	2.70	30	Pass
NVNT	n20	5785	-0.32	-0.45	2.63	30	Pass
NVNT	n20	5825	0.05	0.06	3.07	30	Pass
NVNT	n40	5755	-4.41	-3.7	-1.03	30	Pass
NVNT	n40	5795	-3.29	-4.1	-0.67	30	Pass
NVNT	ac20	5745	-0.27	-0.43	2.66	30	Pass
NVNT	ac20	5785	0.08	-0.45	2.83	30	Pass
NVNT	ac20	5825	0.02	-0.39	2.83	30	Pass
NVNT	ac40	5755	-4.13	-4.1	-1.10	30	Pass
NVNT	ac40	5795	-4.3	-4.39	-1.33	30	Pass
NVNT	ac80	5775	-7.31	-6.97	-4.13	30	Pass

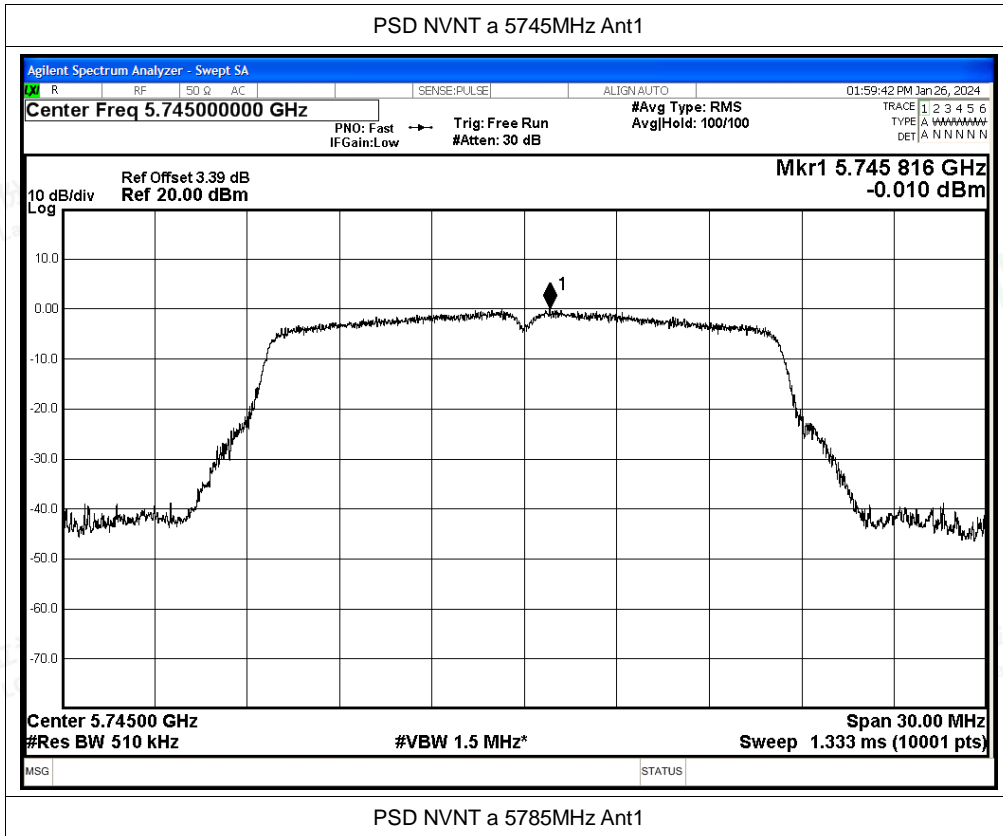

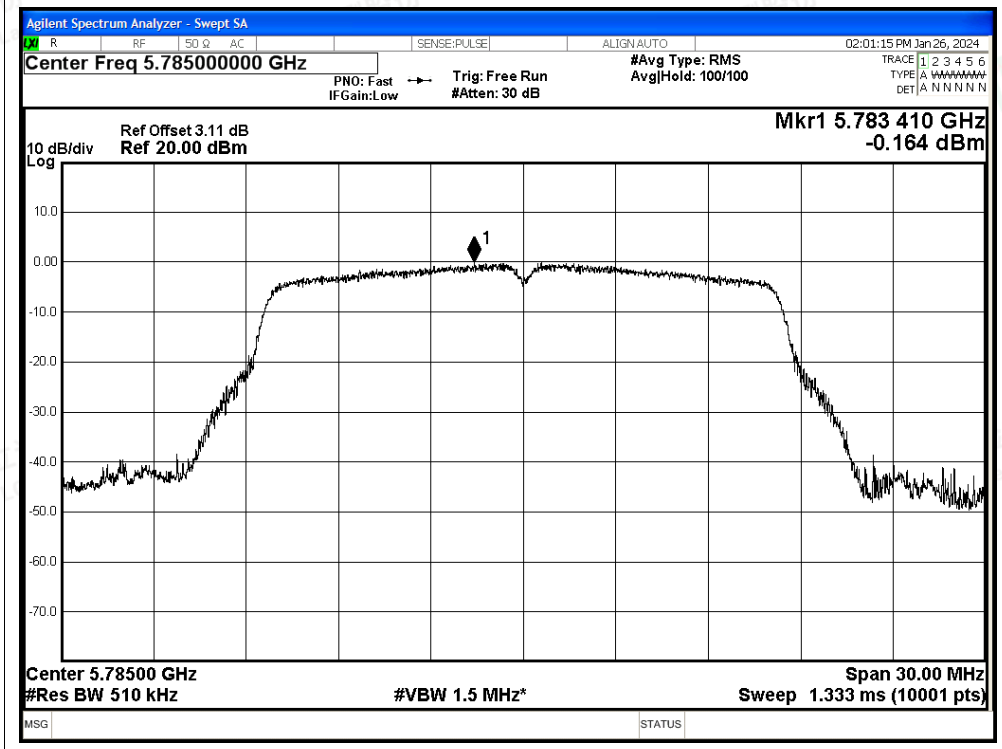








PSD NVNT a 5825MHz Ant1


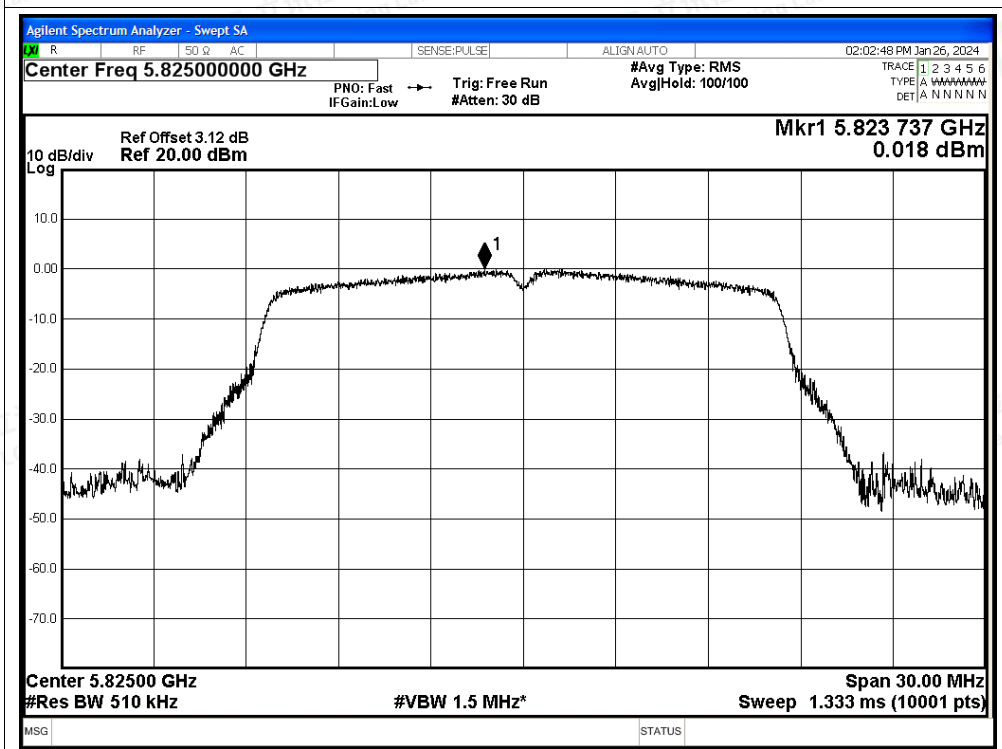


PSD NVNT n20 5745MHz Ant1

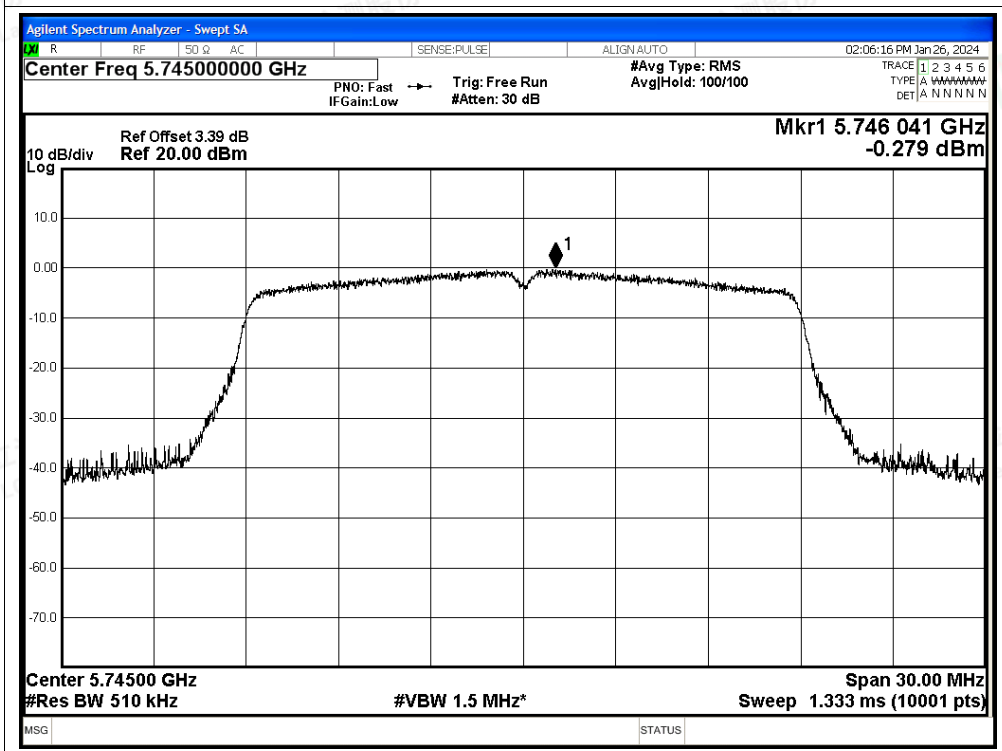

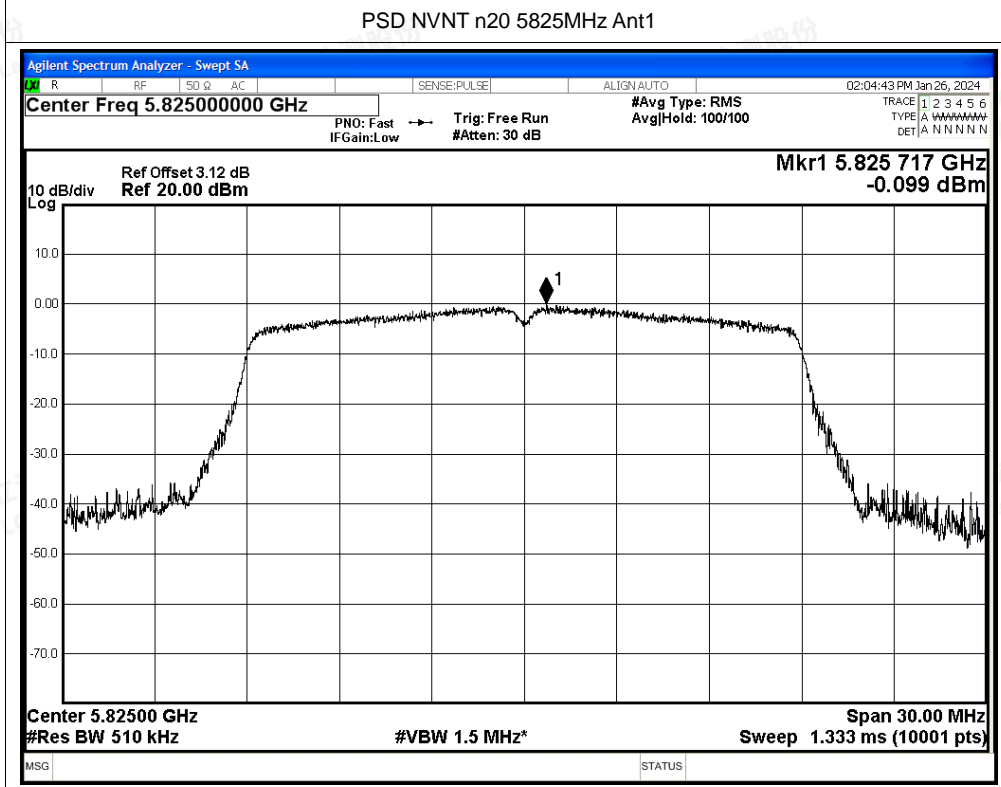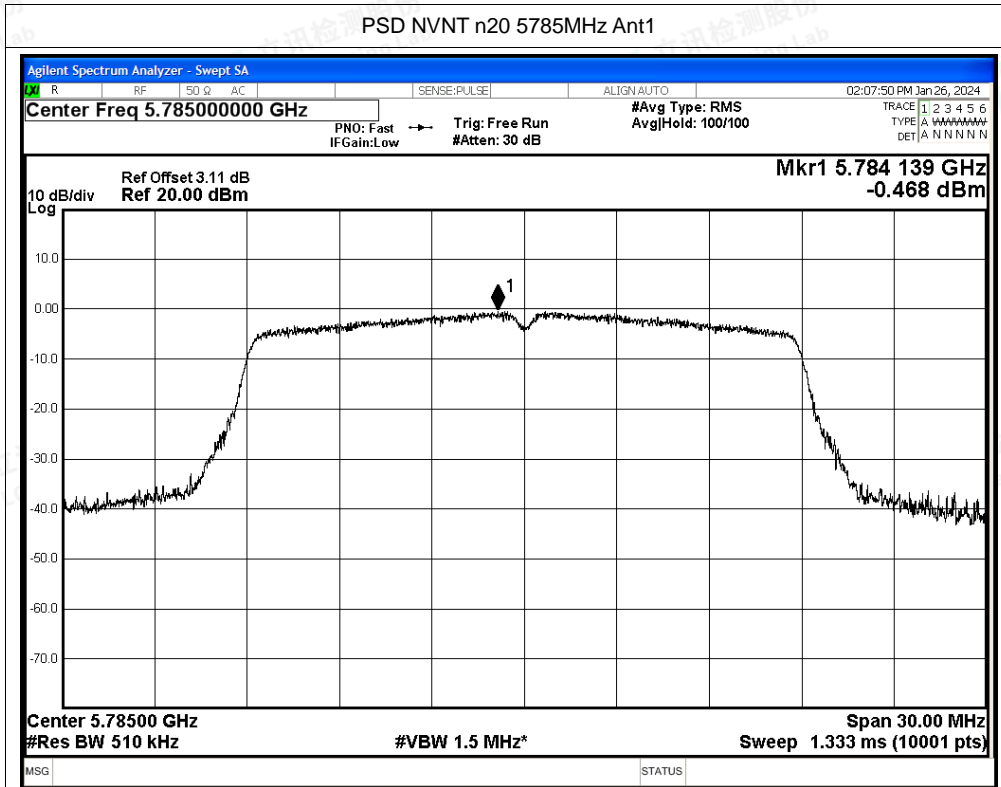


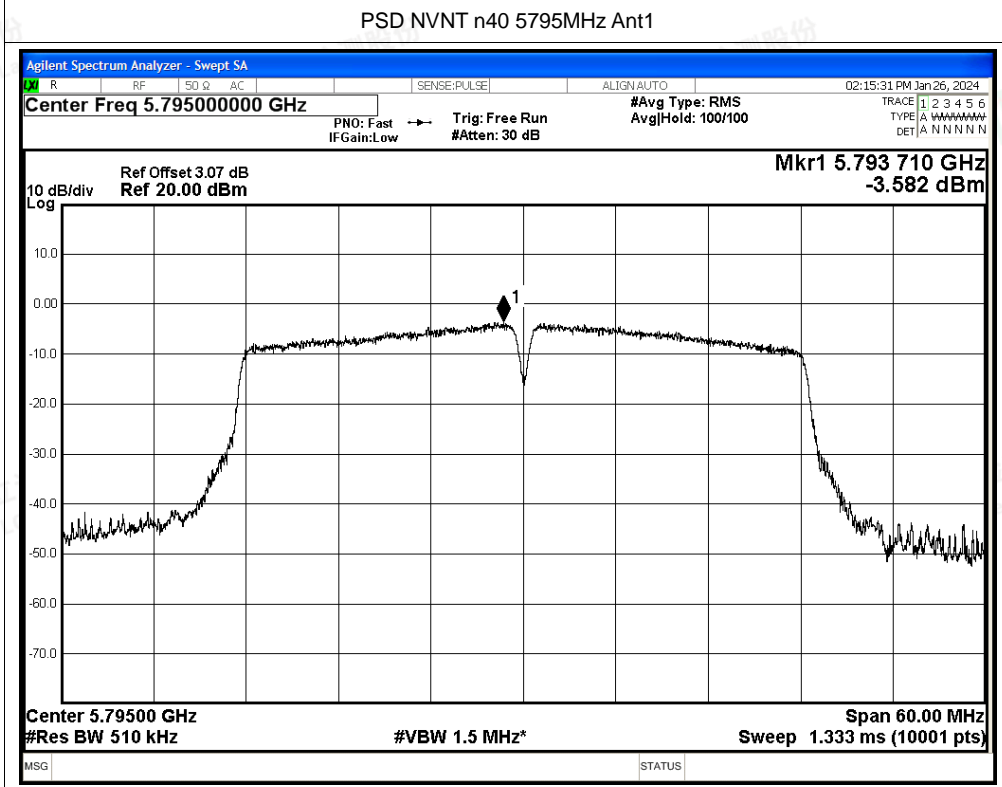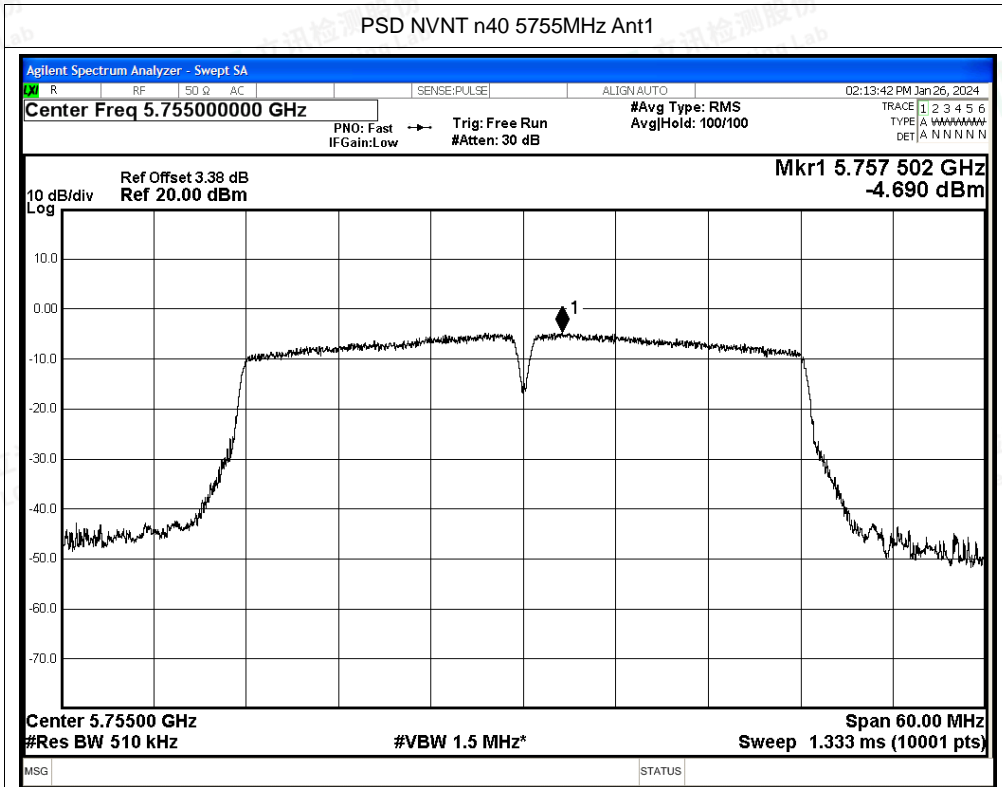

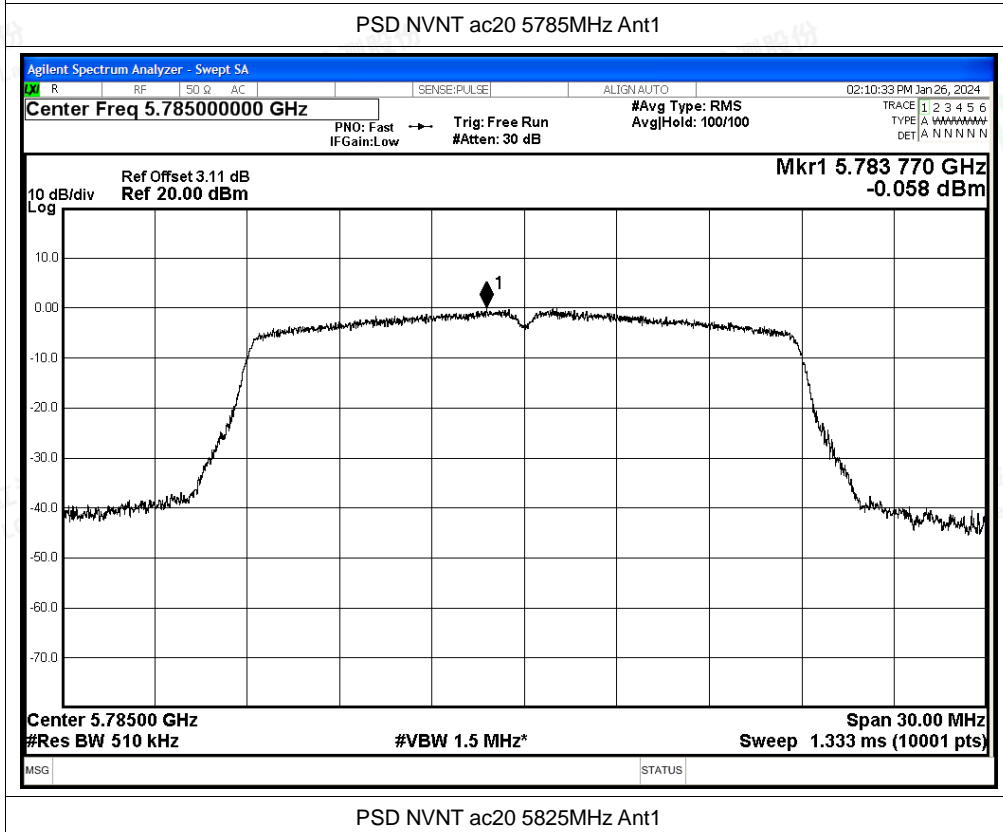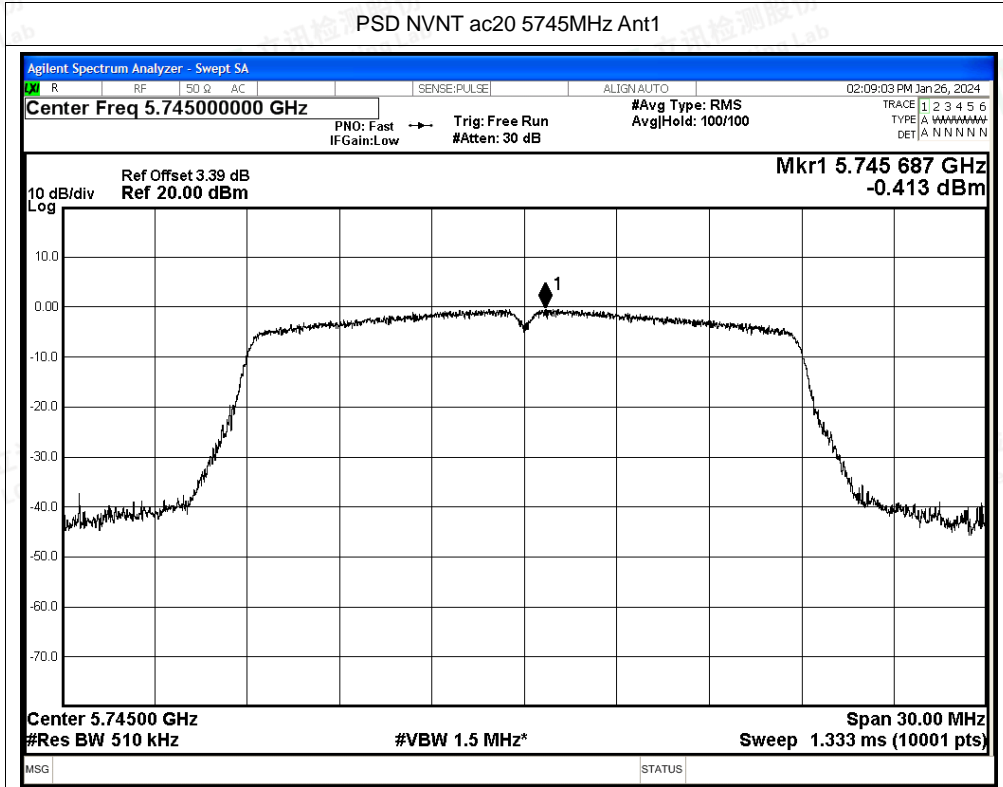


PSD NVNT ac20 5825MHz Ant1



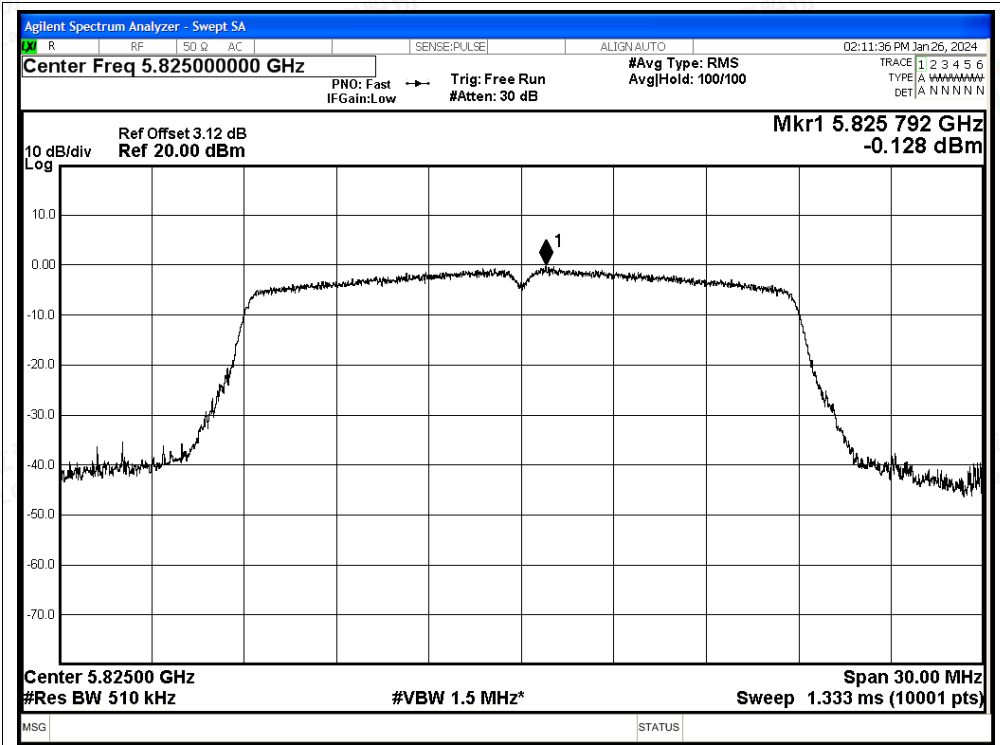


PSD NVNT ac40 5755MHz Ant1

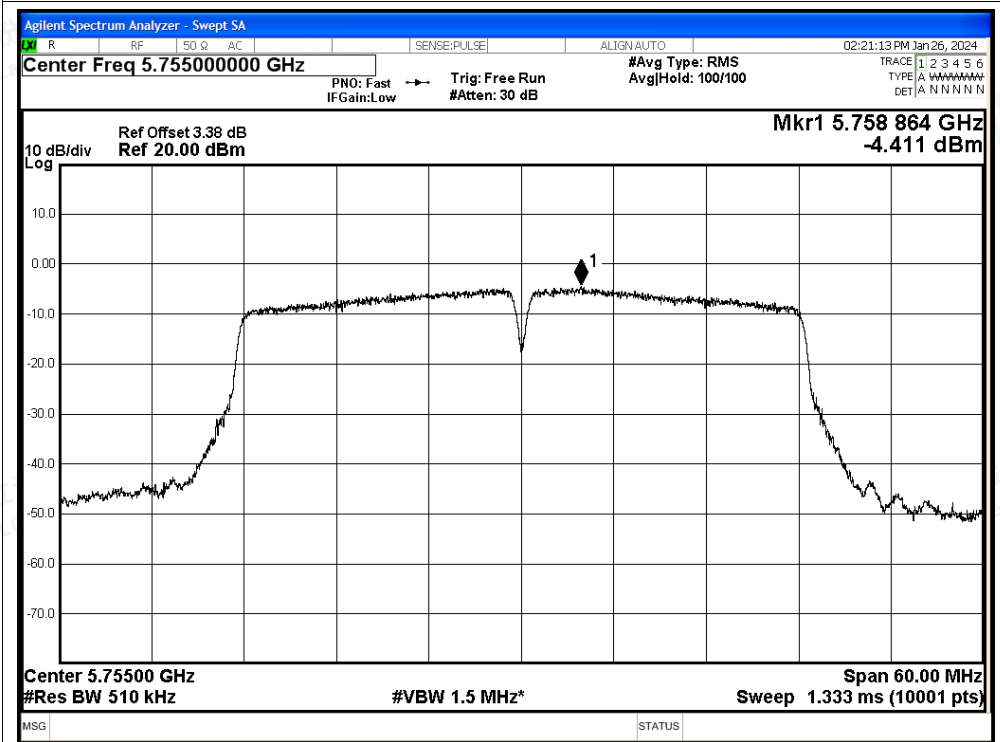


PSD NVNT ac40 5795MHz Ant1



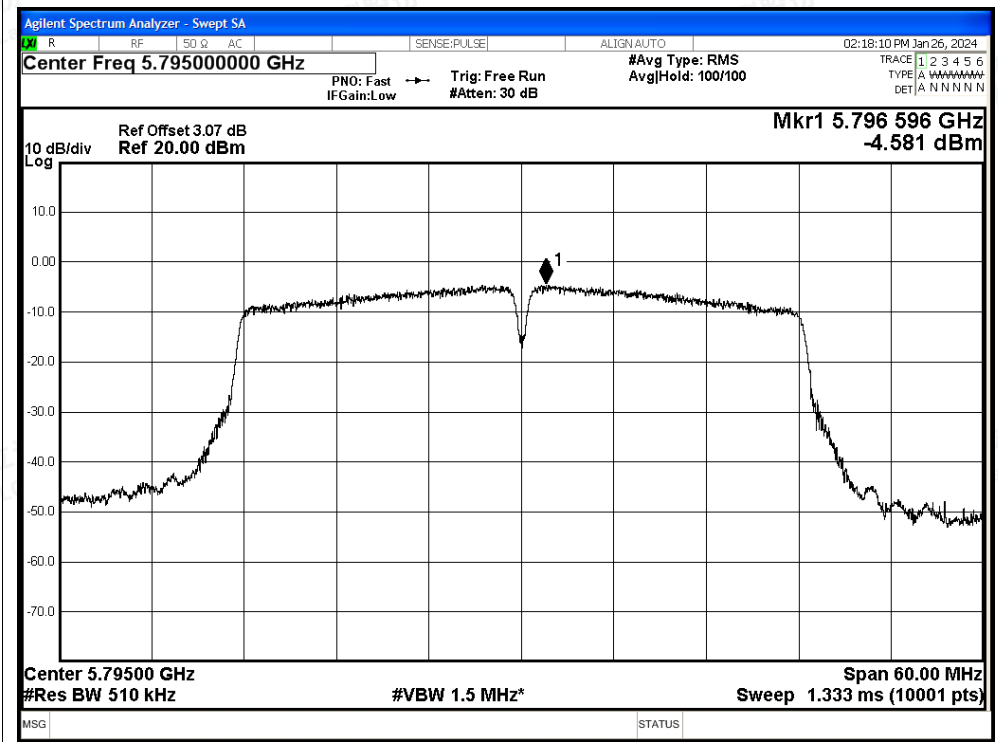


PSD NVNT ac80 5775MHz Ant1

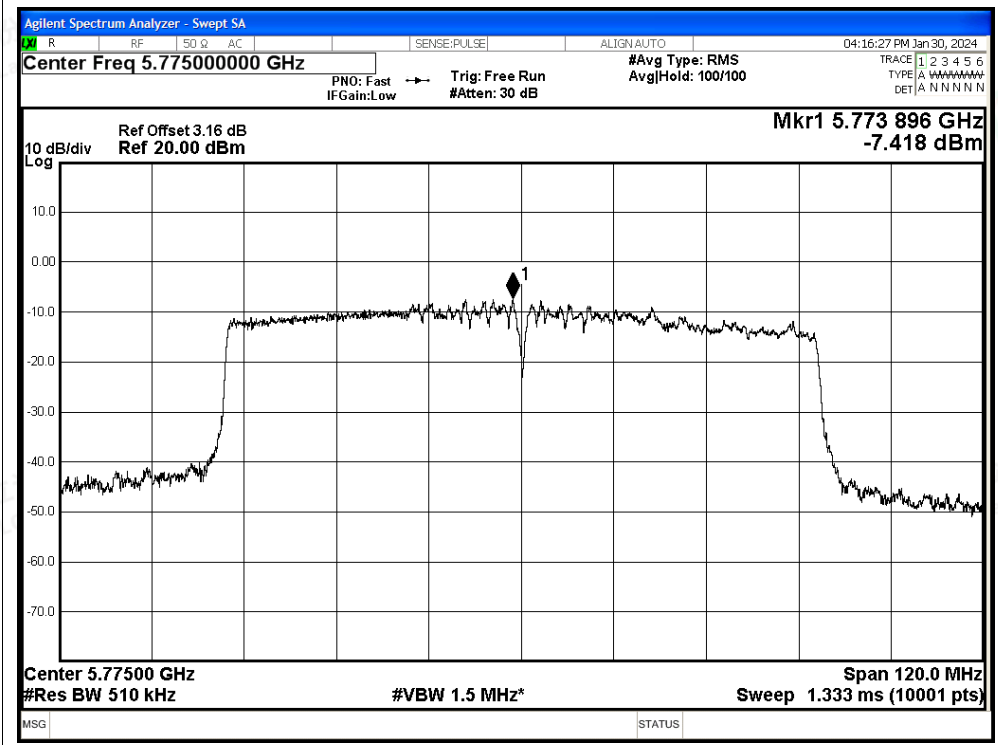




Test Graphs

PSD NVNT a 5745MHz Ant2

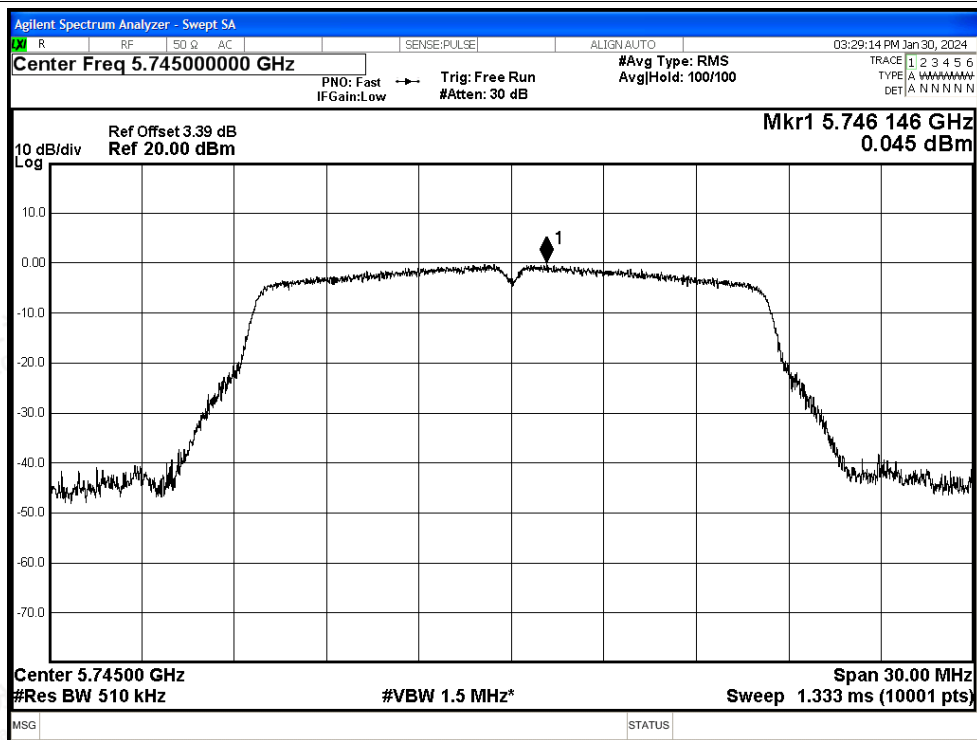


PSD NVNT a 5785MHz Ant2

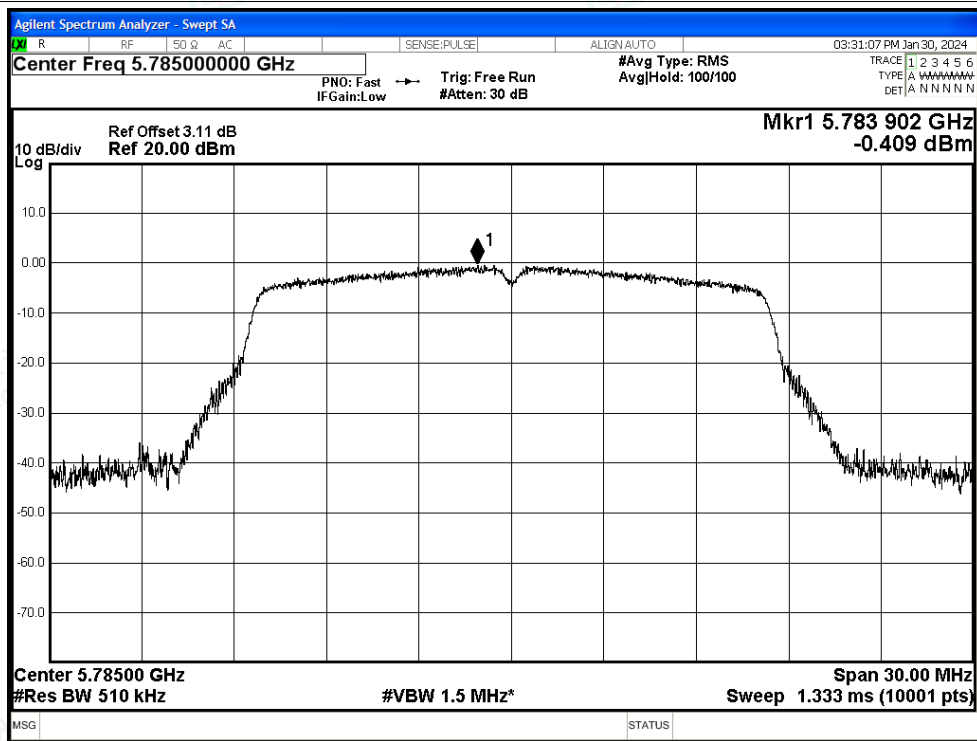




PSD NVNT a 5825MHz Ant2

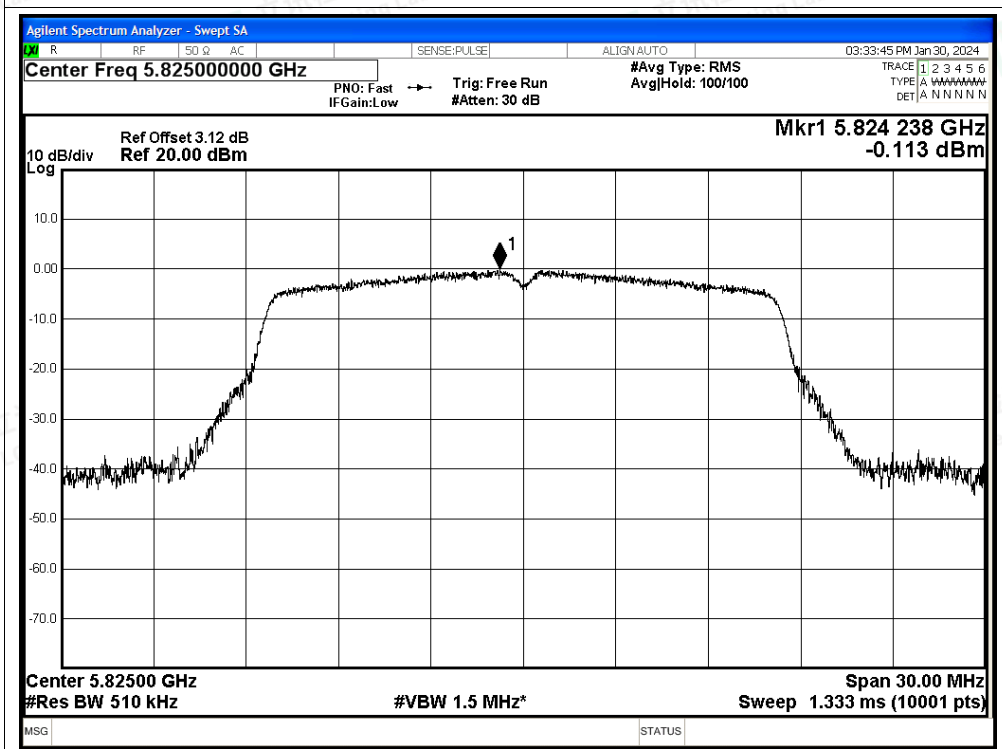


PSD NVNT n20 5745MHz Ant2

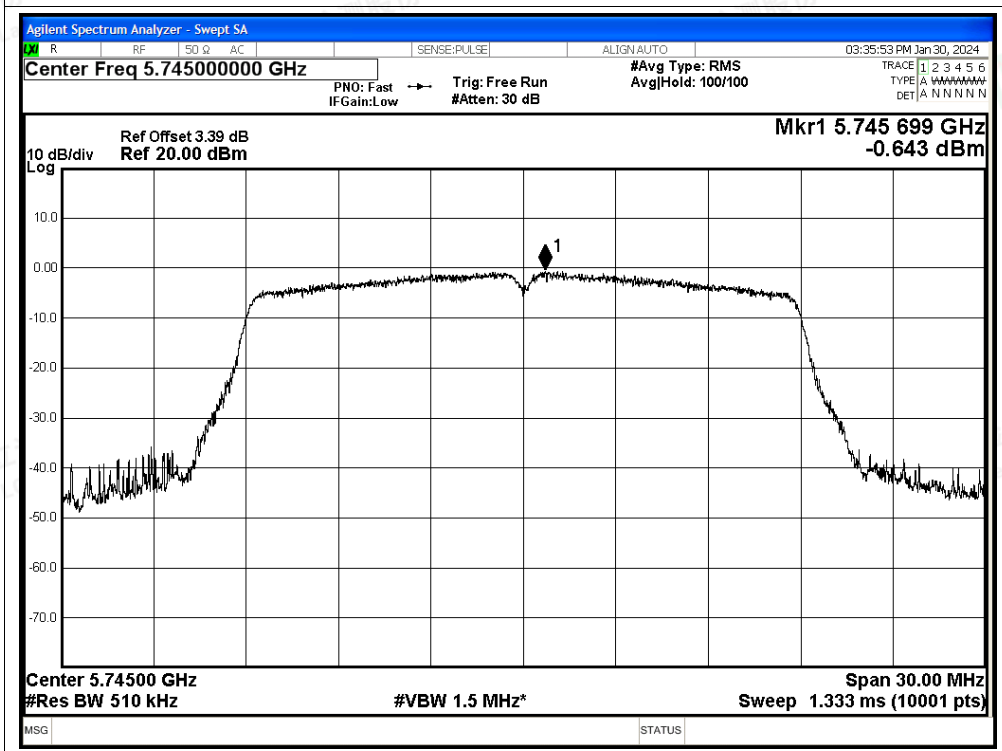








PSD NVNT n20 5785MHz Ant2


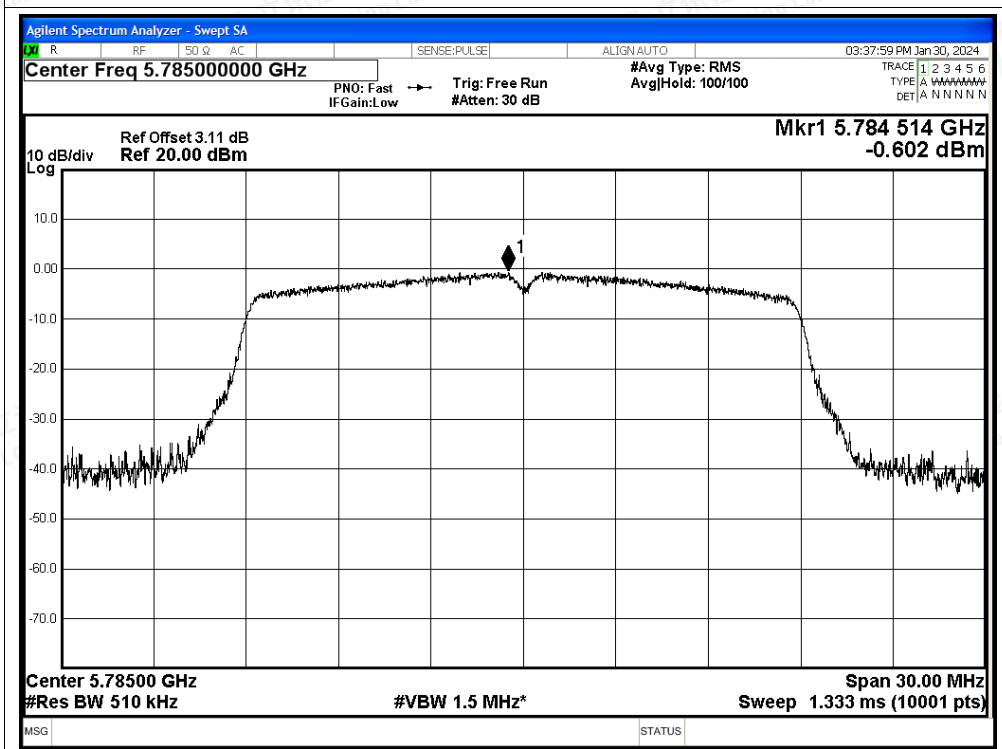




PSD NVNT n20 5825MHz Ant2

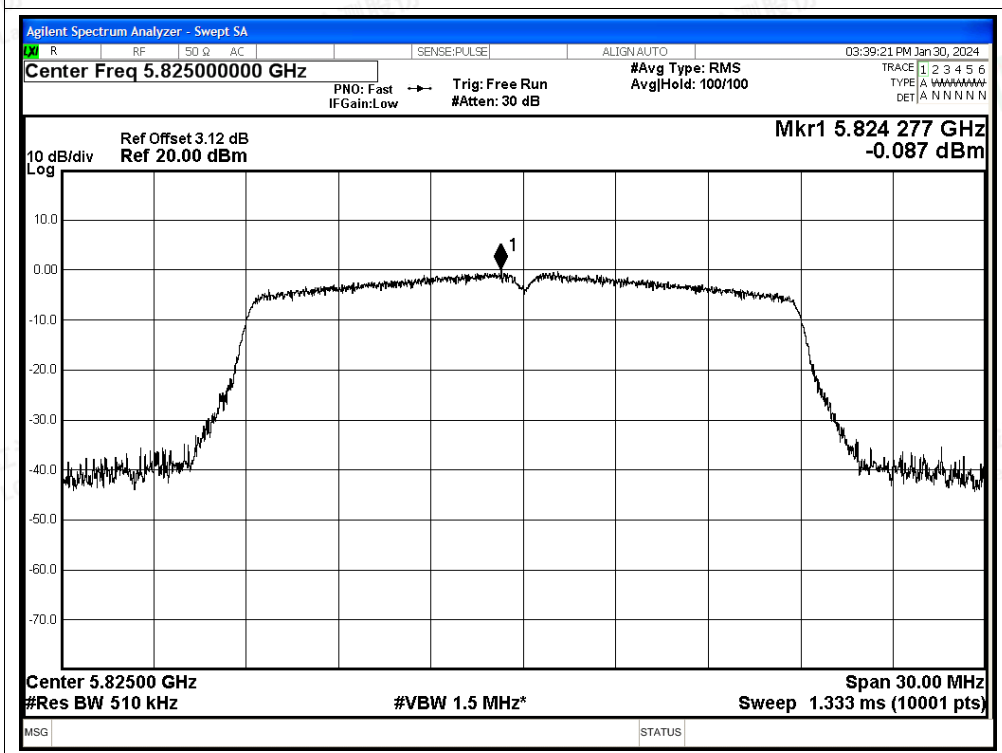

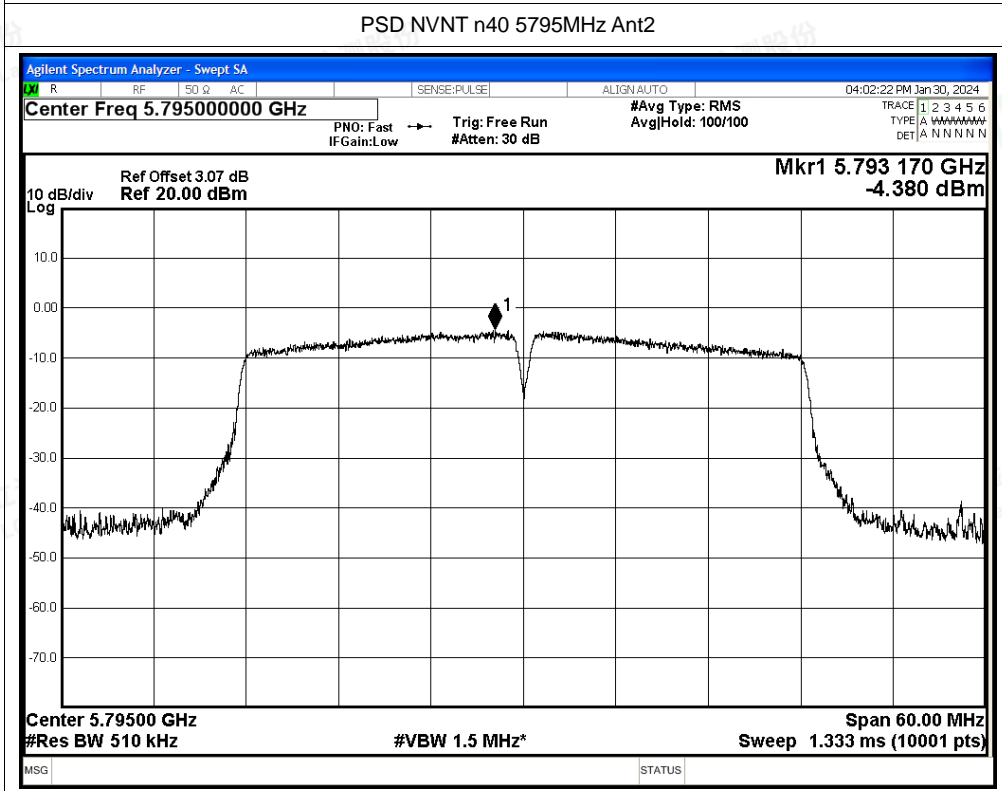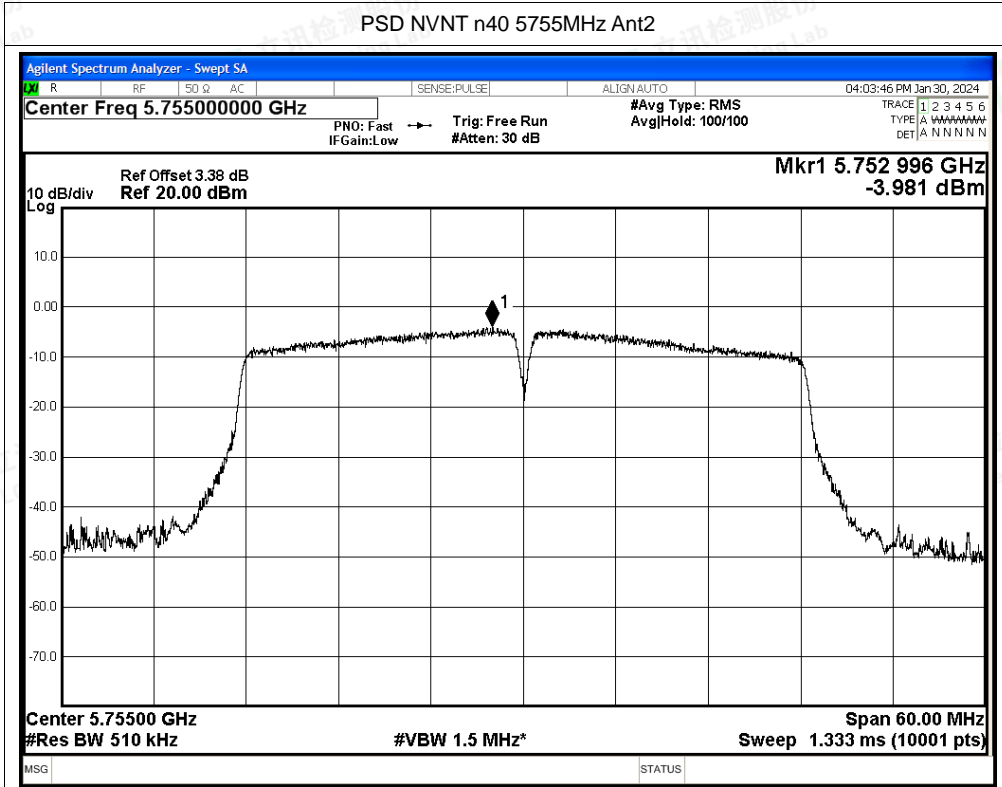

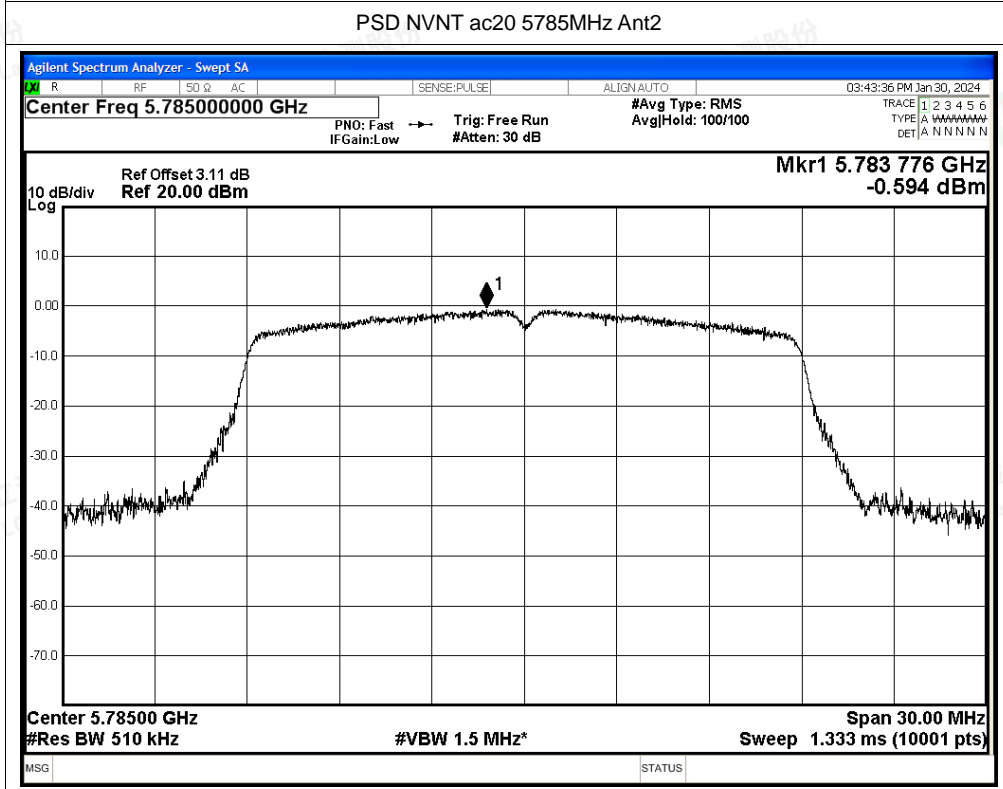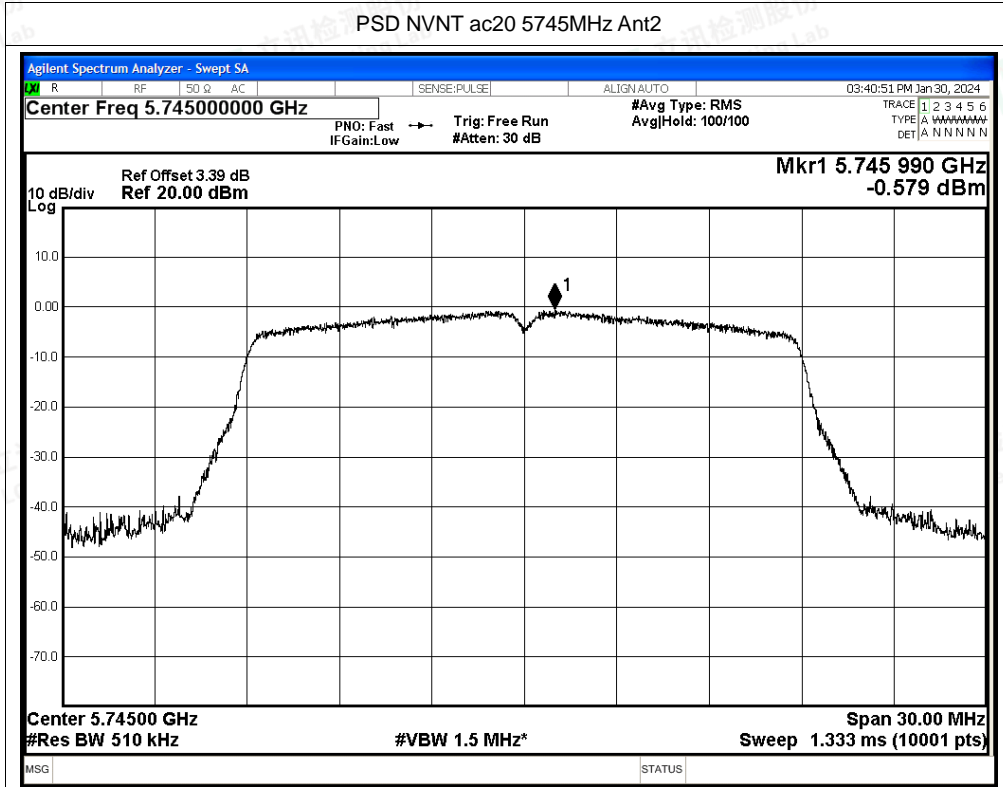

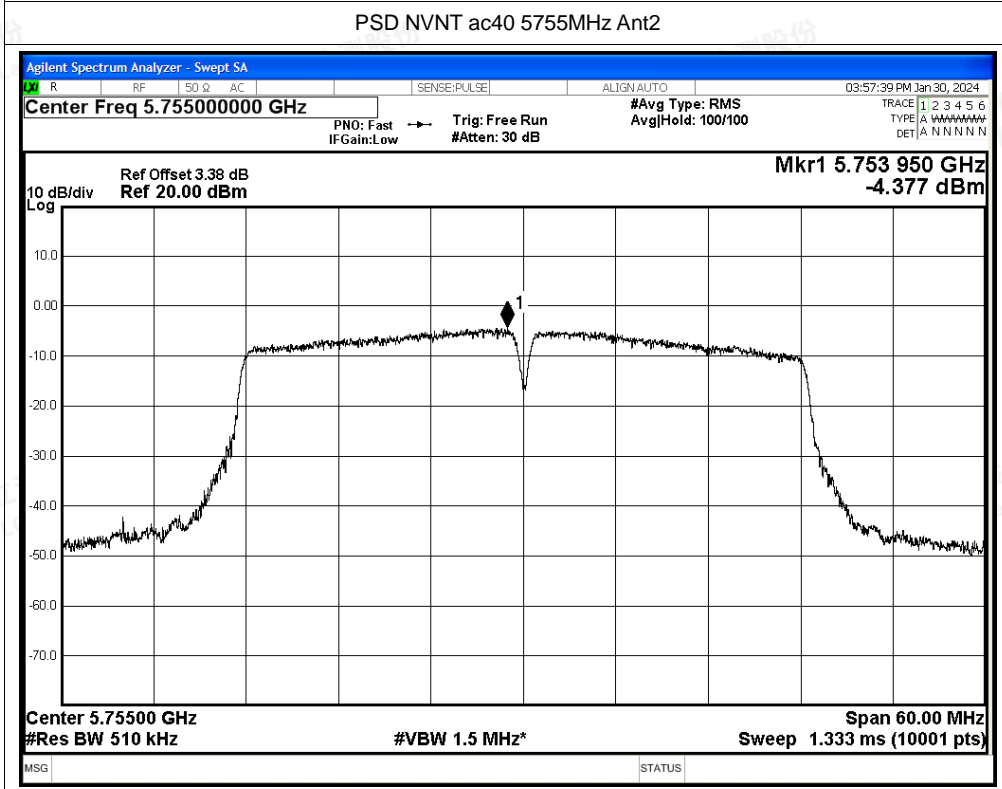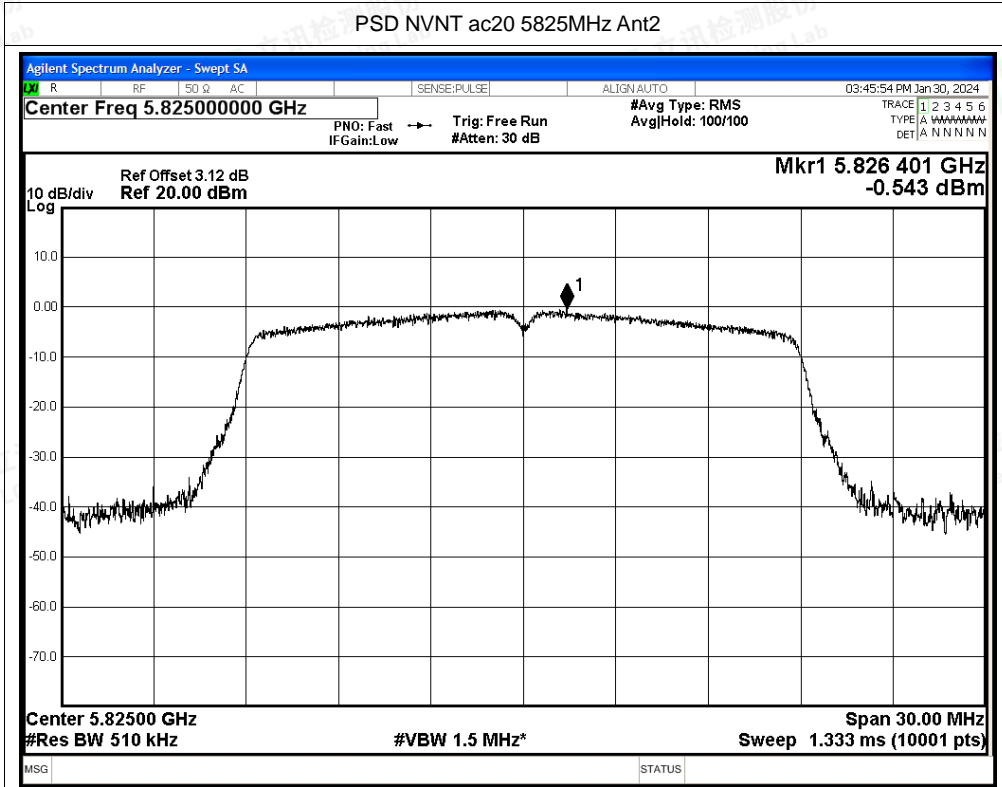

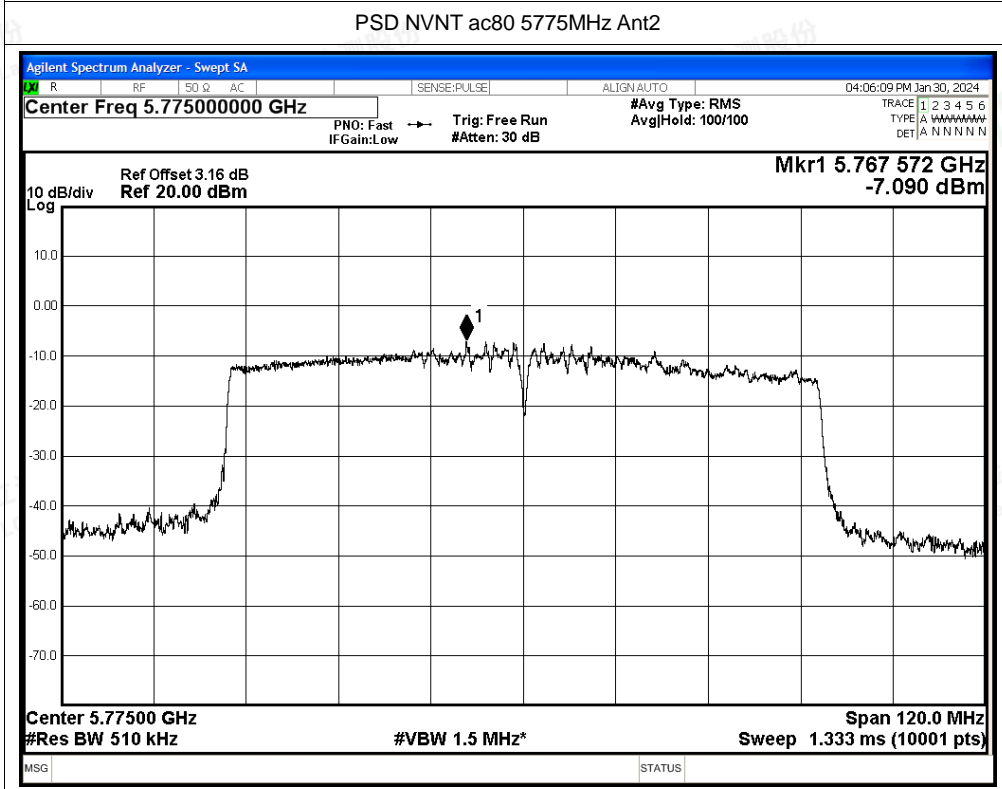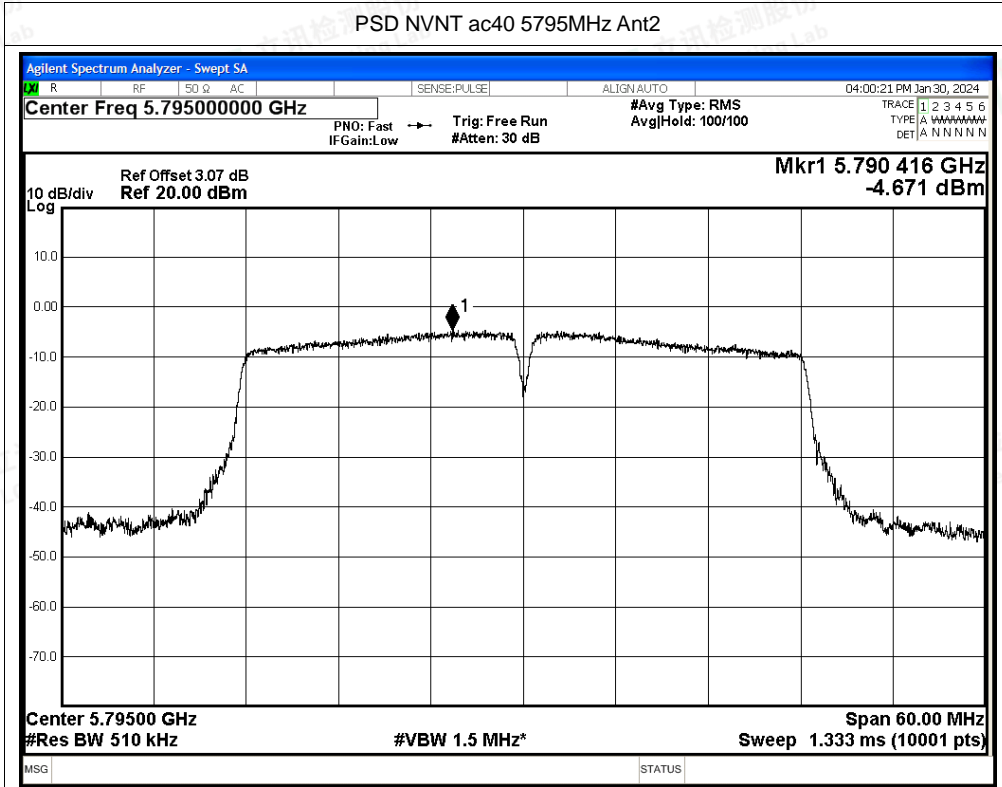



E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5745	Ant1	5650	-48	2	-	-46	Peak	-27	Pass
NVNT	a	5745	Ant1	5650	-56	2	0.13	-53.87	Average	-27	Pass
NVNT	a	5745	Ant1	5700	-46.31	2	-	-44.31	Peak	10	Pass
NVNT	a	5745	Ant1	5700	-54.87	2	0.13	-52.74	Average	10	Pass
NVNT	a	5745	Ant1	5720	-36.03	2	-	-34.03	Peak	15.6	Pass
NVNT	a	5745	Ant1	5720	-48	2	0.13	-45.87	Average	15.6	Pass
NVNT	a	5745	Ant1	5725	-27.96	2	-	-25.96	Peak	27	Pass
NVNT	a	5745	Ant1	5725	-44.24	2	0.13	-42.11	Average	27	Pass
NVNT	a	5825	Ant1	5850	-31.28	2	-	-29.28	Peak	27	Pass
NVNT	a	5825	Ant1	5850	-49.61	2	0.13	-47.48	Average	27	Pass
NVNT	a	5825	Ant1	5855	-41.68	2	-	-39.68	Peak	15.6	Pass
NVNT	a	5825	Ant1	5855	-52.05	2	0.13	-49.92	Average	15.6	Pass
NVNT	a	5825	Ant1	5875	-47.04	2	-	-45.04	Peak	10	Pass
NVNT	a	5825	Ant1	5875	-54.46	2	0.13	-52.33	Average	10	Pass
NVNT	a	5825	Ant1	5925	-47.53	2	-	-45.53	Peak	-27	Pass
NVNT	a	5825	Ant1	5925	-55.94	2	0.13	-53.81	Average	-27	Pass
NVNT	n20	5745	Ant1	5650	-48.69	2	-	-46.69	Peak	-27	Pass
NVNT	n20	5745	Ant1	5650	-56.05	2	0.15	-53.9	Average	-27	Pass
NVNT	n20	5745	Ant1	5700	-45.8	2	-	-43.8	Peak	10	Pass
NVNT	n20	5745	Ant1	5700	-53.92	2	0.15	-51.77	Average	10	Pass
NVNT	n20	5745	Ant1	5720	-31.42	2	-	-29.42	Peak	15.6	Pass
NVNT	n20	5745	Ant1	5720	-45.89	2	0.15	-43.74	Average	15.6	Pass
NVNT	n20	5745	Ant1	5725	-25.67	2	-	-23.67	Peak	27	Pass
NVNT	n20	5745	Ant1	5725	-42.77	2	0.15	-40.62	Average	27	Pass
NVNT	n20	5825	Ant1	5850	-34.09	2	-	-32.09	Peak	27	Pass
NVNT	n20	5825	Ant1	5850	-48.86	2	0.15	-46.71	Average	27	Pass
NVNT	n20	5825	Ant1	5855	-37.97	2	-	-35.97	Peak	15.6	Pass
NVNT	n20	5825	Ant1	5855	-51.27	2	0.15	-49.12	Average	15.6	Pass
NVNT	n20	5825	Ant1	5875	-46.83	2	-	-44.83	Peak	10	Pass
NVNT	n20	5825	Ant1	5875	-54.99	2	0.15	-52.84	Average	10	Pass
NVNT	n20	5825	Ant1	5925	-46.94	2	-	-44.94	Peak	-27	Pass
NVNT	n20	5825	Ant1	5925	-55.94	2	0.15	-53.79	Average	-27	Pass
NVNT	n40	5755	Ant1	5650	-47.76	2	-	-45.76	Peak	-27	Pass
NVNT	n40	5755	Ant1	5650	-56.39	2	0.28	-54.11	Average	-27	Pass
NVNT	n40	5755	Ant1	5700	-43.84	2	-	-41.84	Peak	10	Pass
NVNT	n40	5755	Ant1	5700	-54.05	2	0.28	-51.77	Average	10	Pass





NVNT	n40	5755	Ant1	5720	-23.22	2	-	-21.22	Peak	15.6	Pass
NVNT	n40	5755	Ant1	5720	-45.13	2	0.28	-42.85	Average	15.6	Pass
NVNT	n40	5755	Ant1	5725	-32.98	2	-	-30.98	Peak	27	Pass
NVNT	n40	5755	Ant1	5725	-44.05	2	0.28	-41.77	Average	27	Pass
NVNT	n40	5795	Ant1	5850	-41.19	2	-	-39.19	Peak	27	Pass
NVNT	n40	5795	Ant1	5850	-53.99	2	0.29	-51.7	Average	27	Pass
NVNT	n40	5795	Ant1	5855	-42.76	2	-	-40.76	Peak	15.6	Pass
NVNT	n40	5795	Ant1	5855	-54.18	2	0.29	-51.89	Average	15.6	Pass
NVNT	n40	5795	Ant1	5875	-41.68	2	-	-39.68	Peak	10	Pass
NVNT	n40	5795	Ant1	5875	-55.46	2	0.29	-53.17	Average	10	Pass
NVNT	n40	5795	Ant1	5925	-47.51	2	-	-45.51	Peak	-27	Pass
NVNT	n40	5795	Ant1	5925	-56.89	2	0.29	-54.6	Average	-27	Pass
NVNT	ac20	5745	Ant1	5650	-48.98	2	-	-46.98	Peak	-27	Pass
NVNT	ac20	5745	Ant1	5650	-55.74	2	0.14	-53.6	Average	-27	Pass
NVNT	ac20	5745	Ant1	5700	-44.94	2	-	-42.94	Peak	10	Pass
NVNT	ac20	5745	Ant1	5700	-55.08	2	0.14	-52.94	Average	10	Pass
NVNT	ac20	5745	Ant1	5720	-30.84	2	-	-28.84	Peak	15.6	Pass
NVNT	ac20	5745	Ant1	5720	-45.62	2	0.14	-43.48	Average	15.6	Pass
NVNT	ac20	5745	Ant1	5725	-28.61	2	-	-26.61	Peak	27	Pass
NVNT	ac20	5745	Ant1	5725	-43.73	2	0.14	-41.59	Average	27	Pass
NVNT	ac20	5825	Ant1	5850	-29.88	2	-	-27.88	Peak	27	Pass
NVNT	ac20	5825	Ant1	5850	-45.09	2	0.15	-42.94	Average	27	Pass
NVNT	ac20	5825	Ant1	5855	-35.06	2	-	-33.06	Peak	15.6	Pass
NVNT	ac20	5825	Ant1	5855	-50.52	2	0.15	-48.37	Average	15.6	Pass
NVNT	ac20	5825	Ant1	5875	-46.81	2	-	-44.81	Peak	10	Pass
NVNT	ac20	5825	Ant1	5875	-54.59	2	0.15	-52.44	Average	10	Pass
NVNT	ac20	5825	Ant1	5925	-49.82	2	-	-47.82	Peak	-27	Pass
NVNT	ac20	5825	Ant1	5925	-55.99	2	0.15	-53.84	Average	-27	Pass
NVNT	ac40	5755	Ant1	5650	-47.89	2	-	-45.89	Peak	-27	Pass
NVNT	ac40	5755	Ant1	5650	-56.26	2	0.28	-53.98	Average	-27	Pass
NVNT	ac40	5755	Ant1	5700	-44.42	2	-	-42.42	Peak	10	Pass
NVNT	ac40	5755	Ant1	5700	-53.44	2	0.28	-51.16	Average	10	Pass
NVNT	ac40	5755	Ant1	5720	-36.24	2	-	-34.24	Peak	15.6	Pass
NVNT	ac40	5755	Ant1	5720	-46.53	2	0.28	-44.25	Average	15.6	Pass
NVNT	ac40	5755	Ant1	5725	-35.25	2	-	-33.25	Peak	27	Pass
NVNT	ac40	5755	Ant1	5725	-43.88	2	0.28	-41.6	Average	27	Pass
NVNT	ac40	5795	Ant1	5850	-39.58	2	-	-37.58	Peak	27	Pass
NVNT	ac40	5795	Ant1	5850	-53.52	2	0.28	-51.24	Average	27	Pass
NVNT	ac40	5795	Ant1	5855	-41.79	2	-	-39.79	Peak	15.6	Pass
NVNT	ac40	5795	Ant1	5855	-55.08	2	0.28	-52.8	Average	15.6	Pass
NVNT	ac40	5795	Ant1	5875	-46.86	2	-	-44.86	Peak	10	Pass





NVNT	ac40	5795	Ant1	5875	-55.77	2	0.28	-53.49	Average	10	Pass
NVNT	ac40	5795	Ant1	5925	-49.05	2	-	-47.05	Peak	-27	Pass
NVNT	ac40	5795	Ant1	5925	-56.63	2	0.28	-54.35	Average	-27	Pass
NVNT	ac80	5775	Ant1	5650	-43.01	2	-	-41.01	Peak	-27	Pass
NVNT	ac80	5775	Ant1	5650	-53.88	2	0.11	-51.77	Average	-27	Pass
NVNT	ac80	5775	Ant1	5700	-35.07	2	-	-33.07	Peak	10	Pass
NVNT	ac80	5775	Ant1	5700	-45.5	2	0.11	-43.39	Average	10	Pass
NVNT	ac80	5775	Ant1	5720	-21.27	2	-	-19.27	Peak	15.6	Pass
NVNT	ac80	5775	Ant1	5720	-40.12	2	0.11	-38.01	Average	15.6	Pass
NVNT	ac80	5775	Ant1	5725	-30.21	2	-	-28.21	Peak	27	Pass
NVNT	ac80	5775	Ant1	5725	-41.2	2	0.11	-39.09	Average	27	Pass
NVNT	ac80	5775	Ant1	5850	-39.92	2	-	-37.92	Peak	27	Pass
NVNT	ac80	5775	Ant1	5850	-49	2	0.11	-46.89	Average	27	Pass
NVNT	ac80	5775	Ant1	5855	-40.35	2	-	-38.35	Peak	15.6	Pass
NVNT	ac80	5775	Ant1	5855	-50.93	2	0.11	-48.82	Average	15.6	Pass
NVNT	ac80	5775	Ant1	5875	-47.28	2	-	-45.28	Peak	10	Pass
NVNT	ac80	5775	Ant1	5875	-53.43	2	0.11	-51.32	Average	10	Pass
NVNT	ac80	5775	Ant1	5925	-48.53	2	-	-46.53	Peak	-27	Pass
NVNT	ac80	5775	Ant1	5925	-56.54	2	0.11	-54.43	Average	-27	Pass

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	EIRP Power (dBm)	Detector	Limit (dBm)	Verdict
NVNT	a	5745	Ant2	5650	-47.11	2	-	-45.11	Peak	-27	Pass
NVNT	a	5745	Ant2	5650	-55.17	2	0.13	-53.04	Average	-27	Pass
NVNT	a	5745	Ant2	5700	-44.36	2	-	-42.36	Peak	10	Pass
NVNT	a	5745	Ant2	5700	-53.27	2	0.13	-51.14	Average	10	Pass
NVNT	a	5745	Ant2	5720	-35.7	2	-	-33.7	Peak	15.6	Pass
NVNT	a	5745	Ant2	5720	-48.26	2	0.13	-46.13	Average	15.6	Pass
NVNT	a	5745	Ant2	5725	-33.47	2	-	-31.47	Peak	27	Pass
NVNT	a	5745	Ant2	5725	-45.3	2	0.13	-43.17	Average	27	Pass
NVNT	a	5825	Ant2	5850	-30.01	2	-	-28.01	Peak	27	Pass
NVNT	a	5825	Ant2	5850	-45.86	2	0.13	-43.73	Average	27	Pass
NVNT	a	5825	Ant2	5855	-36.25	2	-	-34.25	Peak	15.6	Pass
NVNT	a	5825	Ant2	5855	-48.08	2	0.13	-45.95	Average	15.6	Pass
NVNT	a	5825	Ant2	5875	-46.5	2	-	-44.5	Peak	10	Pass
NVNT	a	5825	Ant2	5875	-54.96	2	0.13	-52.83	Average	10	Pass
NVNT	a	5825	Ant2	5925	-48.83	2	-	-46.83	Peak	-27	Pass
NVNT	a	5825	Ant2	5925	-56.56	2	0.13	-54.43	Average	-27	Pass
NVNT	n20	5745	Ant2	5650	-47.16	2	-	-45.16	Peak	-27	Pass
NVNT	n20	5745	Ant2	5650	-55.59	2	0.15	-53.44	Average	-27	Pass





NVNT	n20	5745	Ant2	5700	-41.63	2	-	-39.63	Peak	10	Pass
NVNT	n20	5745	Ant2	5700	-53.32	2	0.15	-51.17	Average	10	Pass
NVNT	n20	5745	Ant2	5720	-35.43	2	-	-33.43	Peak	15.6	Pass
NVNT	n20	5745	Ant2	5720	-48.07	2	0.15	-45.92	Average	15.6	Pass
NVNT	n20	5745	Ant2	5725	-27.73	2	-	-25.73	Peak	27	Pass
NVNT	n20	5745	Ant2	5725	-45.92	2	0.15	-43.77	Average	27	Pass
NVNT	n20	5825	Ant2	5850	-27.54	2	-	-25.54	Peak	27	Pass
NVNT	n20	5825	Ant2	5850	-45.5	2	0.15	-43.35	Average	27	Pass
NVNT	n20	5825	Ant2	5855	-30.27	2	-	-28.27	Peak	15.6	Pass
NVNT	n20	5825	Ant2	5855	-49.04	2	0.15	-46.89	Average	15.6	Pass
NVNT	n20	5825	Ant2	5875	-44.16	2	-	-42.16	Peak	10	Pass
NVNT	n20	5825	Ant2	5875	-55.2	2	0.15	-53.05	Average	10	Pass
NVNT	n20	5825	Ant2	5925	-46.84	2	-	-44.84	Peak	-27	Pass
NVNT	n20	5825	Ant2	5925	-56.46	2	0.15	-54.31	Average	-27	Pass
NVNT	n40	5755	Ant2	5650	-48.16	2	-	-46.16	Peak	-27	Pass
NVNT	n40	5755	Ant2	5650	-55.1	2	0.28	-52.82	Average	-27	Pass
NVNT	n40	5755	Ant2	5700	-42.5	2	-	-40.5	Peak	10	Pass
NVNT	n40	5755	Ant2	5700	-51.47	2	0.28	-49.19	Average	10	Pass
NVNT	n40	5755	Ant2	5720	-36.84	2	-	-34.84	Peak	15.6	Pass
NVNT	n40	5755	Ant2	5720	-45.06	2	0.28	-42.78	Average	15.6	Pass
NVNT	n40	5755	Ant2	5725	-34.39	2	-	-32.39	Peak	27	Pass
NVNT	n40	5755	Ant2	5725	-44.74	2	0.28	-42.46	Average	27	Pass
NVNT	n40	5795	Ant2	5850	-37.85	2	-	-35.85	Peak	27	Pass
NVNT	n40	5795	Ant2	5850	-49.82	2	0.28	-47.54	Average	27	Pass
NVNT	n40	5795	Ant2	5855	-40.31	2	-	-38.31	Peak	15.6	Pass
NVNT	n40	5795	Ant2	5855	-51.82	2	0.28	-49.54	Average	15.6	Pass
NVNT	n40	5795	Ant2	5875	-47.61	2	-	-45.61	Peak	10	Pass
NVNT	n40	5795	Ant2	5875	-55.84	2	0.28	-53.56	Average	10	Pass
NVNT	n40	5795	Ant2	5925	-48.1	2	-	-46.1	Peak	-27	Pass
NVNT	n40	5795	Ant2	5925	-56.37	2	0.28	-54.09	Average	-27	Pass
NVNT	ac20	5745	Ant2	5650	-47.69	2	-	-45.69	Peak	-27	Pass
NVNT	ac20	5745	Ant2	5650	-55.55	2	0.15	-53.4	Average	-27	Pass
NVNT	ac20	5745	Ant2	5700	-44.25	2	-	-42.25	Peak	10	Pass
NVNT	ac20	5745	Ant2	5700	-53.34	2	0.15	-51.19	Average	10	Pass
NVNT	ac20	5745	Ant2	5720	-35.64	2	-	-33.64	Peak	15.6	Pass
NVNT	ac20	5745	Ant2	5720	-48.71	2	0.15	-46.56	Average	15.6	Pass
NVNT	ac20	5745	Ant2	5725	-30.91	2	-	-28.91	Peak	27	Pass
NVNT	ac20	5745	Ant2	5725	-45.87	2	0.15	-43.72	Average	27	Pass
NVNT	ac20	5825	Ant2	5850	-32.66	2	-	-30.66	Peak	27	Pass
NVNT	ac20	5825	Ant2	5850	-45.87	2	0.15	-43.72	Average	27	Pass
NVNT	ac20	5825	Ant2	5855	-36.26	2	-	-34.26	Peak	15.6	Pass





NVNT	ac20	5825	Ant2	5855	-48.4	2	0.15	-46.25	Average	15.6	Pass
NVNT	ac20	5825	Ant2	5875	-45.96	2	-	-43.96	Peak	10	Pass
NVNT	ac20	5825	Ant2	5875	-55.42	2	0.15	-53.27	Average	10	Pass
NVNT	ac20	5825	Ant2	5925	-48.85	2	-	-46.85	Peak	-27	Pass
NVNT	ac20	5825	Ant2	5925	-56.58	2	0.15	-54.43	Average	-27	Pass
NVNT	ac40	5755	Ant2	5650	-46.16	2	-	-44.16	Peak	-27	Pass
NVNT	ac40	5755	Ant2	5650	-55.18	2	0.28	-52.9	Average	-27	Pass
NVNT	ac40	5755	Ant2	5700	-38.88	2	-	-36.88	Peak	10	Pass
NVNT	ac40	5755	Ant2	5700	-51.36	2	0.28	-49.08	Average	10	Pass
NVNT	ac40	5755	Ant2	5720	-33.67	2	-	-31.67	Peak	15.6	Pass
NVNT	ac40	5755	Ant2	5720	-46.44	2	0.28	-44.16	Average	15.6	Pass
NVNT	ac40	5755	Ant2	5725	-27.68	2	-	-25.68	Peak	27	Pass
NVNT	ac40	5755	Ant2	5725	-44.78	2	0.28	-42.5	Average	27	Pass
NVNT	ac40	5795	Ant2	5850	-38.69	2	-	-36.69	Peak	27	Pass
NVNT	ac40	5795	Ant2	5850	-50.89	2	0.28	-48.61	Average	27	Pass
NVNT	ac40	5795	Ant2	5855	-41.66	2	-	-39.66	Peak	15.6	Pass
NVNT	ac40	5795	Ant2	5855	-51.92	2	0.28	-49.64	Average	15.6	Pass
NVNT	ac40	5795	Ant2	5875	-42.56	2	-	-40.56	Peak	10	Pass
NVNT	ac40	5795	Ant2	5875	-55.01	2	0.28	-52.73	Average	10	Pass
NVNT	ac40	5795	Ant2	5925	-48.84	2	-	-46.84	Peak	-27	Pass
NVNT	ac40	5795	Ant2	5925	-56.66	2	0.28	-54.38	Average	-27	Pass
NVNT	ac80	5775	Ant2	5650	-41.91	2	-	-39.91	Peak	-27	Pass
NVNT	ac80	5775	Ant2	5650	-53.71	2	0.12	-51.59	Average	-27	Pass
NVNT	ac80	5775	Ant2	5700	-33.61	2	-	-31.61	Peak	10	Pass
NVNT	ac80	5775	Ant2	5700	-45.1	2	0.12	-42.98	Average	10	Pass
NVNT	ac80	5775	Ant2	5720	-27.14	2	-	-25.14	Peak	15.6	Pass
NVNT	ac80	5775	Ant2	5720	-39.46	2	0.12	-37.34	Average	15.6	Pass
NVNT	ac80	5775	Ant2	5725	-26.38	2	-	-24.38	Peak	27	Pass
NVNT	ac80	5775	Ant2	5725	-39.89	2	0.12	-37.77	Average	27	Pass
NVNT	ac80	5775	Ant2	5850	-38.72	2	-	-36.72	Peak	27	Pass
NVNT	ac80	5775	Ant2	5850	-49.54	2	0.12	-47.42	Average	27	Pass
NVNT	ac80	5775	Ant2	5855	-38.83	2	-	-36.83	Peak	15.6	Pass
NVNT	ac80	5775	Ant2	5855	-48.26	2	0.12	-46.14	Average	15.6	Pass
NVNT	ac80	5775	Ant2	5875	-45.14	2	-	-43.14	Peak	10	Pass
NVNT	ac80	5775	Ant2	5875	-52.91	2	0.12	-50.79	Average	10	Pass
NVNT	ac80	5775	Ant2	5925	-49.6	2	-	-47.6	Peak	-27	Pass
NVNT	ac80	5775	Ant2	5925	-56.74	2	0.12	-54.62	Average	-27	Pass





MIMO

Condition	Mode	Frequency (MHz)	ANT1 Power (dBm)	ANT2 Power (dBm)	Gain (dBi)	EIRP Power (dBm)	Detector	Limit (dBm)	Verdict
NVNT	n20	5745	-48.69	-47.16	4.86	-39.99	Peak	-27	Pass
NVNT	n20	5745	-56.05	-55.59	4.86	-47.94	Average	-27	Pass
NVNT	n20	5745	-45.8	-41.63	4.86	-35.36	Peak	10	Pass
NVNT	n20	5745	-53.92	-53.32	4.86	-45.74	Average	10	Pass
NVNT	n20	5745	-31.42	-35.43	4.86	-25.11	Peak	15.6	Pass
NVNT	n20	5745	-45.89	-48.07	4.86	-38.97	Average	15.6	Pass
NVNT	n20	5745	-25.67	-27.73	4.86	-18.71	Peak	27	Pass
NVNT	n20	5745	-42.77	-45.92	4.86	-36.2	Average	27	Pass
NVNT	n20	5825	-34.09	-27.54	4.86	-21.81	Peak	27	Pass
NVNT	n20	5825	-48.86	-45.5	4.86	-38.99	Average	27	Pass
NVNT	n20	5825	-37.97	-30.27	4.86	-24.73	Peak	15.6	Pass
NVNT	n20	5825	-51.27	-49.04	4.86	-42.14	Average	15.6	Pass
NVNT	n20	5825	-46.83	-44.16	4.86	-37.42	Peak	10	Pass
NVNT	n20	5825	-54.99	-55.2	4.86	-47.22	Average	10	Pass
NVNT	n20	5825	-46.94	-46.84	4.86	-39.02	Peak	-27	Pass
NVNT	n20	5825	-55.94	-56.46	4.86	-48.32	Average	-27	Pass
NVNT	n40	5755	-47.76	-48.16	4.86	-40.09	Peak	-27	Pass
NVNT	n40	5755	-56.39	-55.1	4.86	-47.83	Average	-27	Pass
NVNT	n40	5755	-43.84	-42.5	4.86	-35.25	Peak	10	Pass
NVNT	n40	5755	-54.05	-51.47	4.86	-44.7	Average	10	Pass
NVNT	n40	5755	-23.22	-36.84	4.86	-18.18	Peak	15.6	Pass
NVNT	n40	5755	-45.13	-45.06	4.86	-37.22	Average	15.6	Pass
NVNT	n40	5755	-32.98	-34.39	4.86	-25.76	Peak	27	Pass
NVNT	n40	5755	-44.05	-44.74	4.86	-36.51	Average	27	Pass
NVNT	n40	5795	-41.19	-37.85	4.86	-31.34	Peak	27	Pass
NVNT	n40	5795	-53.99	-49.82	4.86	-43.55	Average	27	Pass
NVNT	n40	5795	-42.76	-40.31	4.86	-33.49	Peak	15.6	Pass
NVNT	n40	5795	-54.18	-51.82	4.86	-44.97	Average	15.6	Pass
NVNT	n40	5795	-41.68	-47.61	4.86	-35.83	Peak	10	Pass
NVNT	n40	5795	-55.46	-55.84	4.86	-47.78	Average	10	Pass
NVNT	n40	5795	-47.51	-48.1	4.86	-39.92	Peak	-27	Pass
NVNT	n40	5795	-56.89	-56.37	4.86	-48.75	Average	-27	Pass
NVNT	ac20	5745	-48.98	-47.69	4.86	-40.42	Peak	-27	Pass
NVNT	ac20	5745	-55.74	-55.55	4.86	-47.77	Average	-27	Pass
NVNT	ac20	5745	-44.94	-44.25	4.86	-36.71	Peak	10	Pass
NVNT	ac20	5745	-55.08	-53.34	4.86	-46.25	Average	10	Pass
NVNT	ac20	5745	-30.84	-35.64	4.86	-24.74	Peak	15.6	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity





NVNT	ac20	5745	-45.62	-48.71	4.86	-39.03	Average	15.6	Pass
NVNT	ac20	5745	-28.61	-30.91	4.86	-21.74	Peak	27	Pass
NVNT	ac20	5745	-43.73	-45.87	4.86	-36.8	Average	27	Pass
NVNT	ac20	5825	-29.88	-32.66	4.86	-23.18	Peak	27	Pass
NVNT	ac20	5825	-45.09	-45.87	4.86	-37.59	Average	27	Pass
NVNT	ac20	5825	-35.06	-36.26	4.86	-27.75	Peak	15.6	Pass
NVNT	ac20	5825	-50.52	-48.4	4.86	-41.46	Average	15.6	Pass
NVNT	ac20	5825	-46.81	-45.96	4.86	-38.49	Peak	10	Pass
NVNT	ac20	5825	-54.59	-55.42	4.86	-47.11	Average	10	Pass
NVNT	ac20	5825	-49.82	-48.85	4.86	-41.44	Peak	-27	Pass
NVNT	ac20	5825	-55.99	-56.58	4.86	-48.4	Average	-27	Pass
NVNT	ac40	5755	-47.89	-46.16	4.86	-39.07	Peak	-27	Pass
NVNT	ac40	5755	-56.26	-55.18	4.86	-47.82	Average	-27	Pass
NVNT	ac40	5755	-44.42	-38.88	4.86	-32.95	Peak	10	Pass
NVNT	ac40	5755	-53.44	-51.36	4.86	-44.41	Average	10	Pass
NVNT	ac40	5755	-36.24	-33.67	4.86	-26.9	Peak	15.6	Pass
NVNT	ac40	5755	-46.53	-46.44	4.86	-38.61	Average	15.6	Pass
NVNT	ac40	5755	-35.25	-27.68	4.86	-22.12	Peak	27	Pass
NVNT	ac40	5755	-43.88	-44.78	4.86	-36.44	Average	27	Pass
NVNT	ac40	5795	-39.58	-38.69	4.86	-31.24	Peak	27	Pass
NVNT	ac40	5795	-53.52	-50.89	4.86	-44.14	Average	27	Pass
NVNT	ac40	5795	-41.79	-41.66	4.86	-33.85	Peak	15.6	Pass
NVNT	ac40	5795	-55.08	-51.92	4.86	-45.35	Average	15.6	Pass
NVNT	ac40	5795	-46.86	-42.56	4.86	-36.33	Peak	10	Pass
NVNT	ac40	5795	-55.77	-55.01	4.86	-47.5	Average	10	Pass
NVNT	ac40	5795	-49.05	-48.84	4.86	-41.07	Peak	-27	Pass
NVNT	ac40	5795	-56.63	-56.66	4.86	-48.77	Average	-27	Pass
NVNT	ac80	5775	-43.01	-41.91	4.86	-34.55	Peak	-27	Pass
NVNT	ac80	5775	-53.88	-53.71	4.86	-45.92	Average	-27	Pass
NVNT	ac80	5775	-35.07	-33.61	4.86	-26.41	Peak	10	Pass
NVNT	ac80	5775	-45.5	-45.1	4.86	-37.43	Average	10	Pass
NVNT	ac80	5775	-21.27	-27.14	4.86	-15.41	Peak	15.6	Pass
NVNT	ac80	5775	-40.12	-39.46	4.86	-31.91	Average	15.6	Pass
NVNT	ac80	5775	-30.21	-26.38	4.86	-20.02	Peak	27	Pass
NVNT	ac80	5775	-41.2	-39.89	4.86	-32.63	Average	27	Pass
NVNT	ac80	5775	-39.92	-38.72	4.86	-31.41	Peak	27	Pass
NVNT	ac80	5775	-49	-49.54	4.86	-41.39	Average	27	Pass
NVNT	ac80	5775	-40.35	-38.83	4.86	-31.65	Peak	15.6	Pass
NVNT	ac80	5775	-50.93	-48.26	4.86	-41.52	Average	15.6	Pass
NVNT	ac80	5775	-47.28	-45.14	4.86	-38.21	Peak	10	Pass
NVNT	ac80	5775	-53.43	-52.91	4.86	-45.29	Average	10	Pass






NVNT	ac80	5775	-48.53	-49.6	4.86	-41.16	Peak	-27	Pass
NVNT	ac80	5775	-56.54	-56.74	4.86	-48.77	Average	-27	Pass

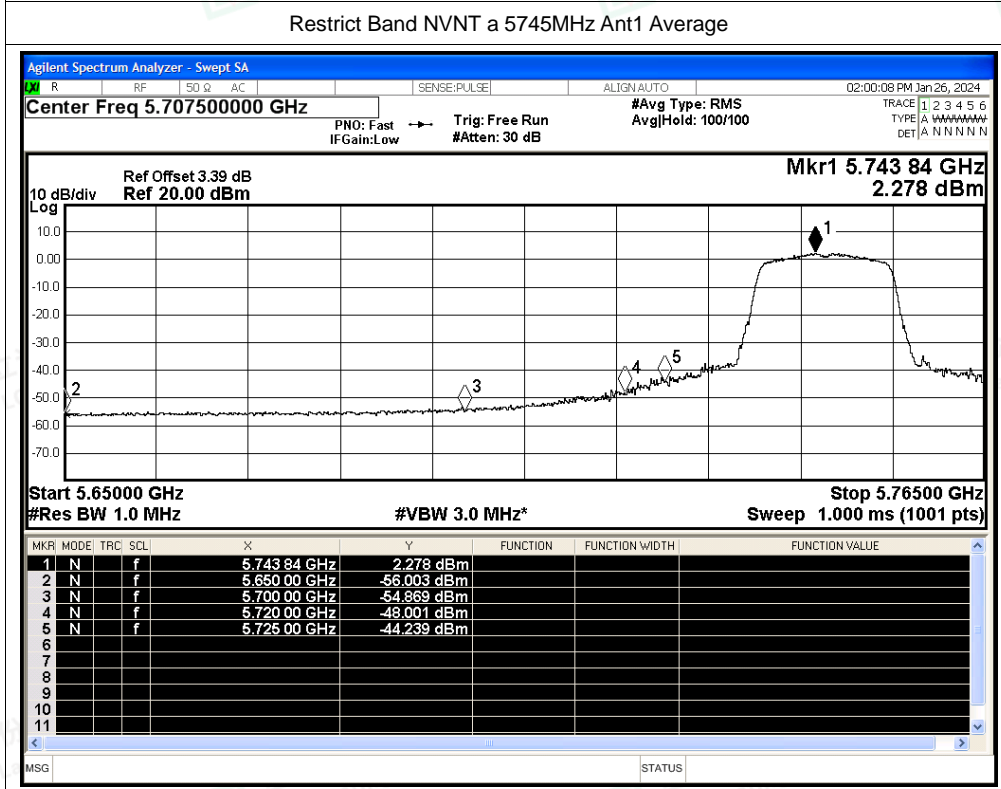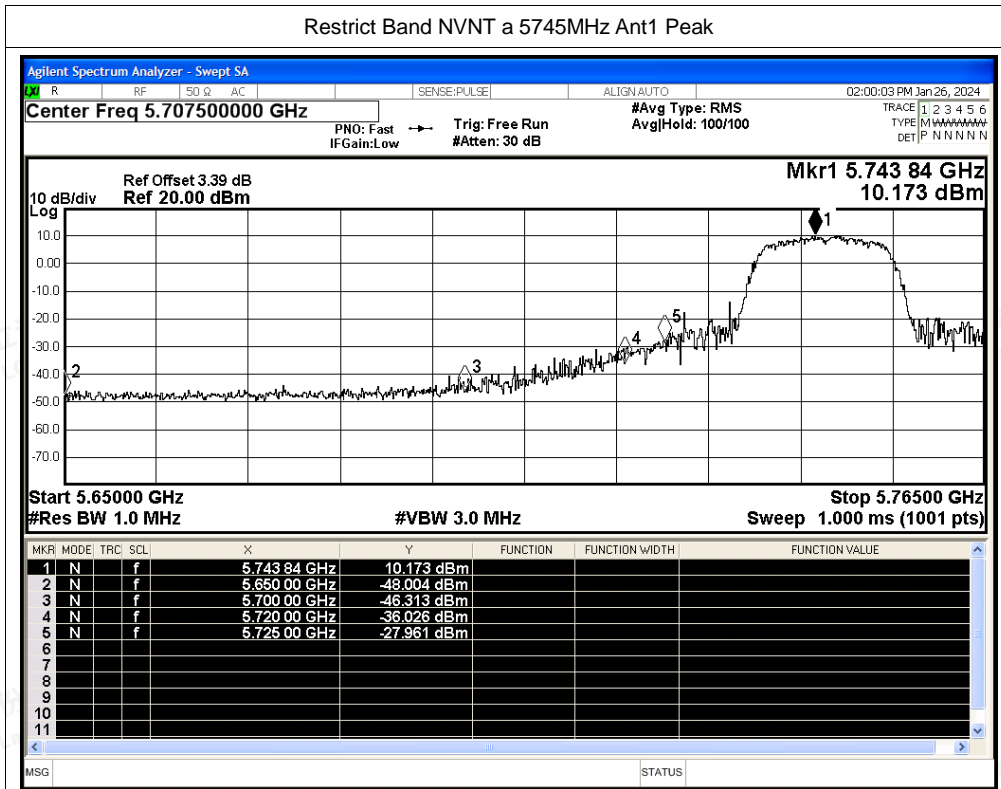






Restrict Band NVNT a 5825MHz Ant1 Peak

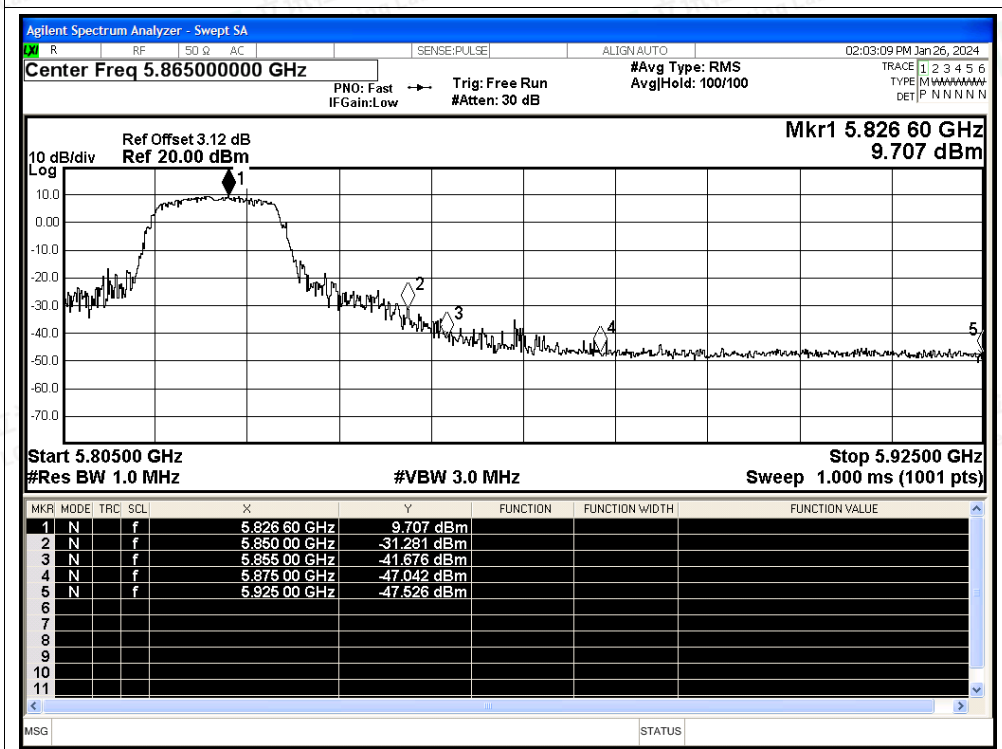


Restrict Band NVNT a 5825MHz Ant1 Average

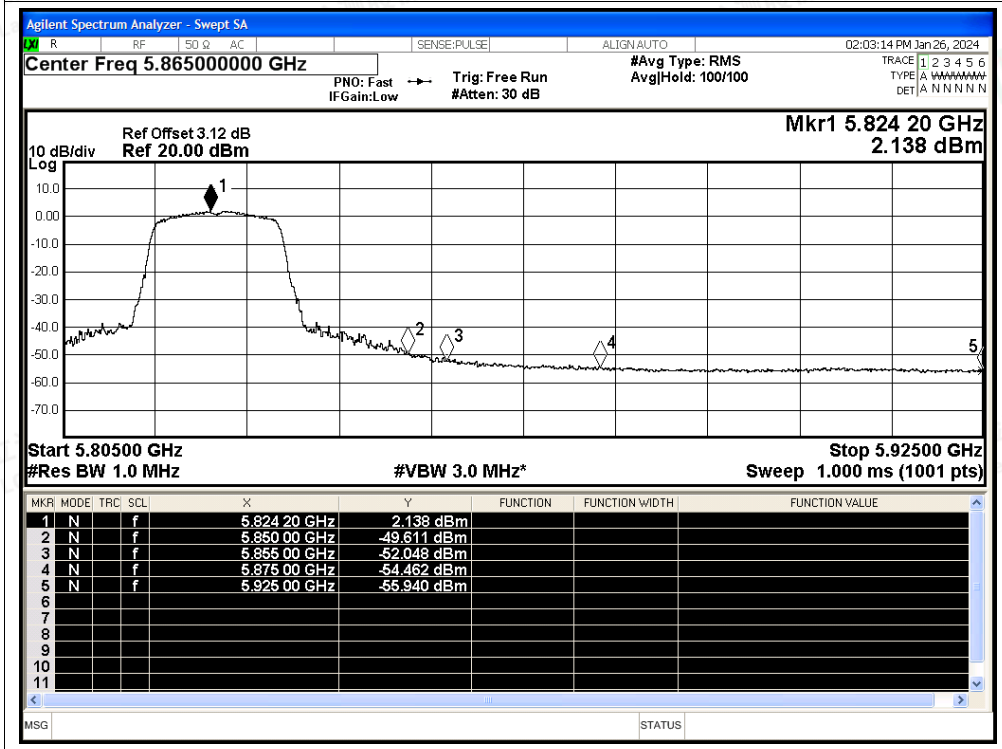

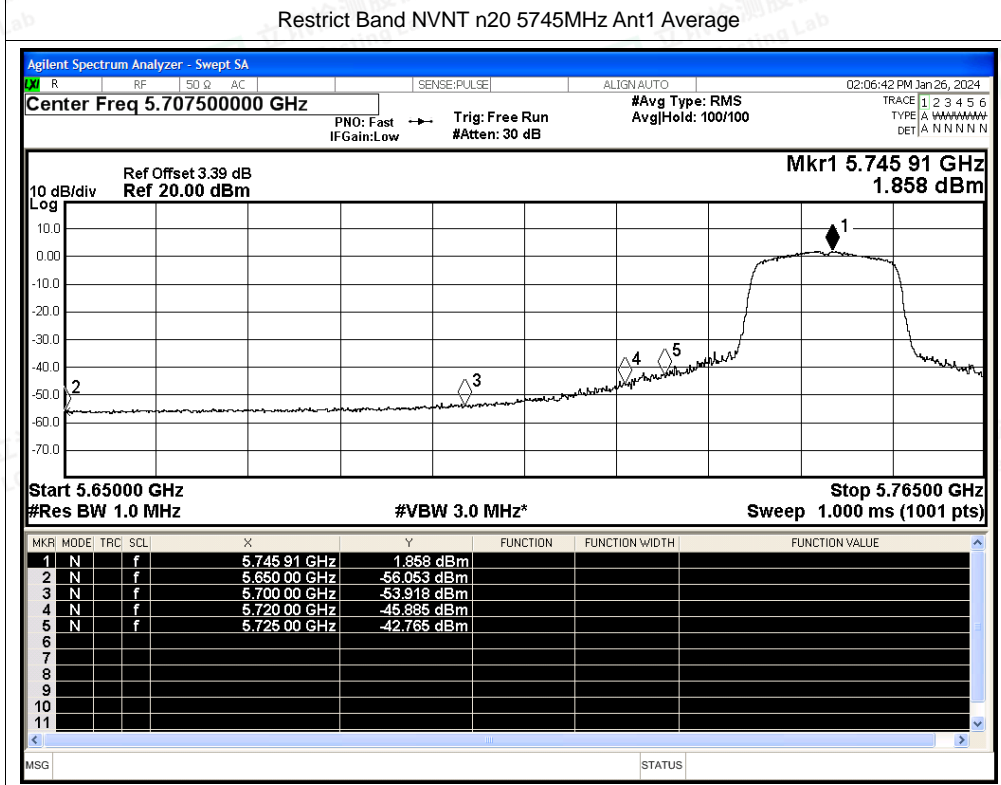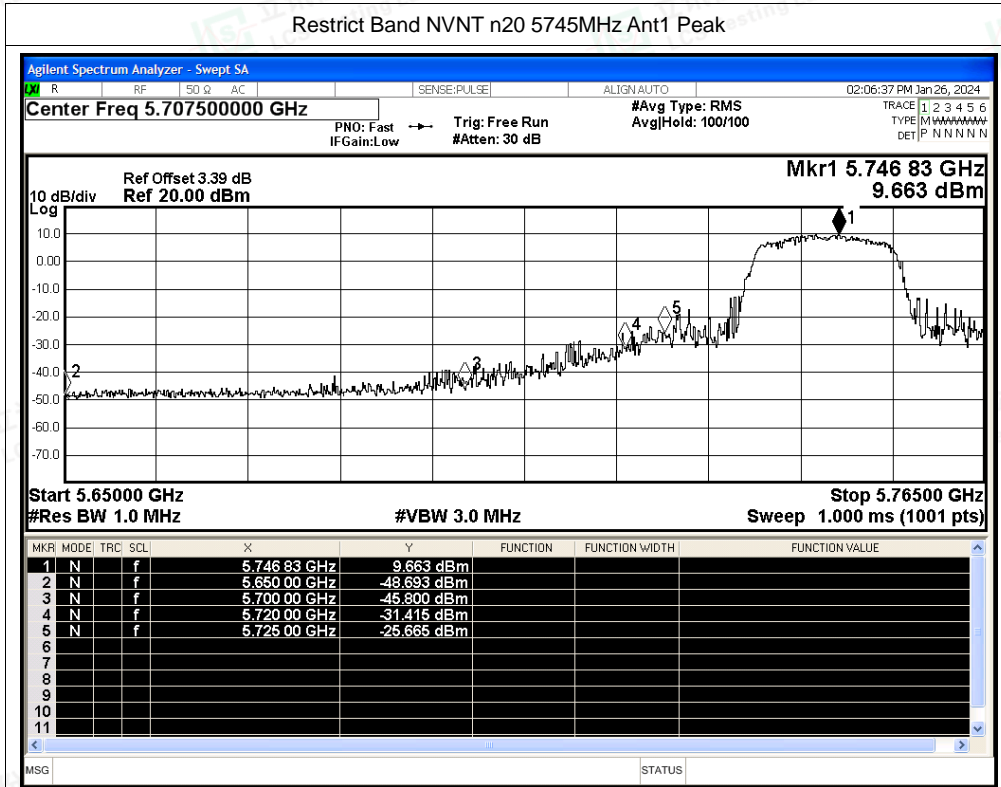






Restrict Band NVNT n20 5825MHz Ant1 Peak

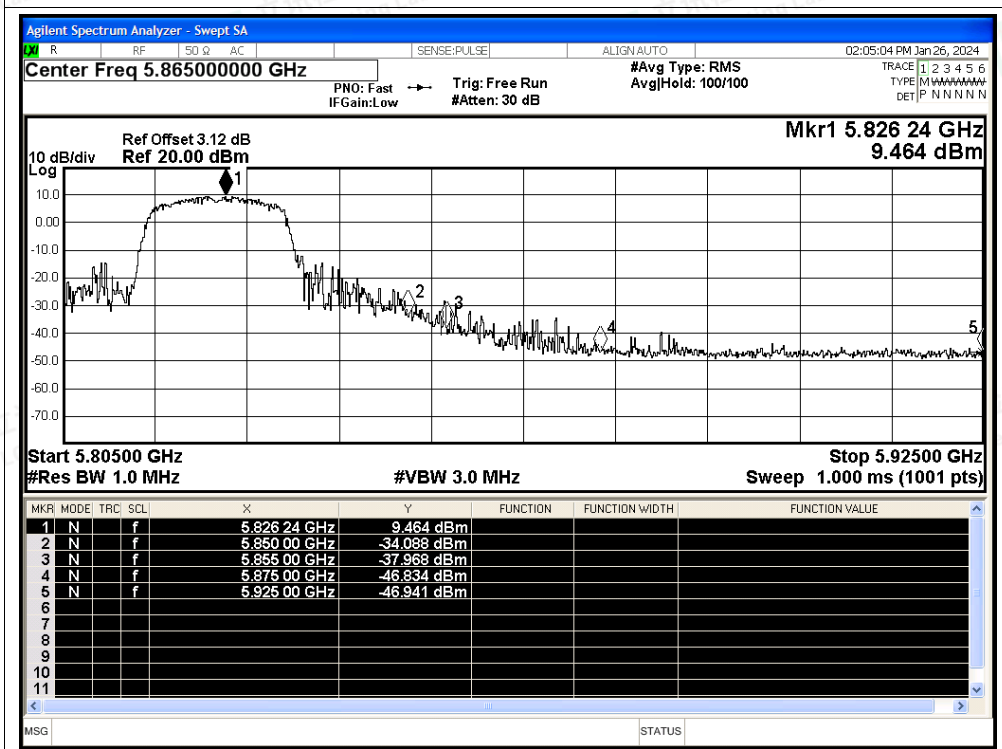


Restrict Band NVNT n20 5825MHz Ant1 Average

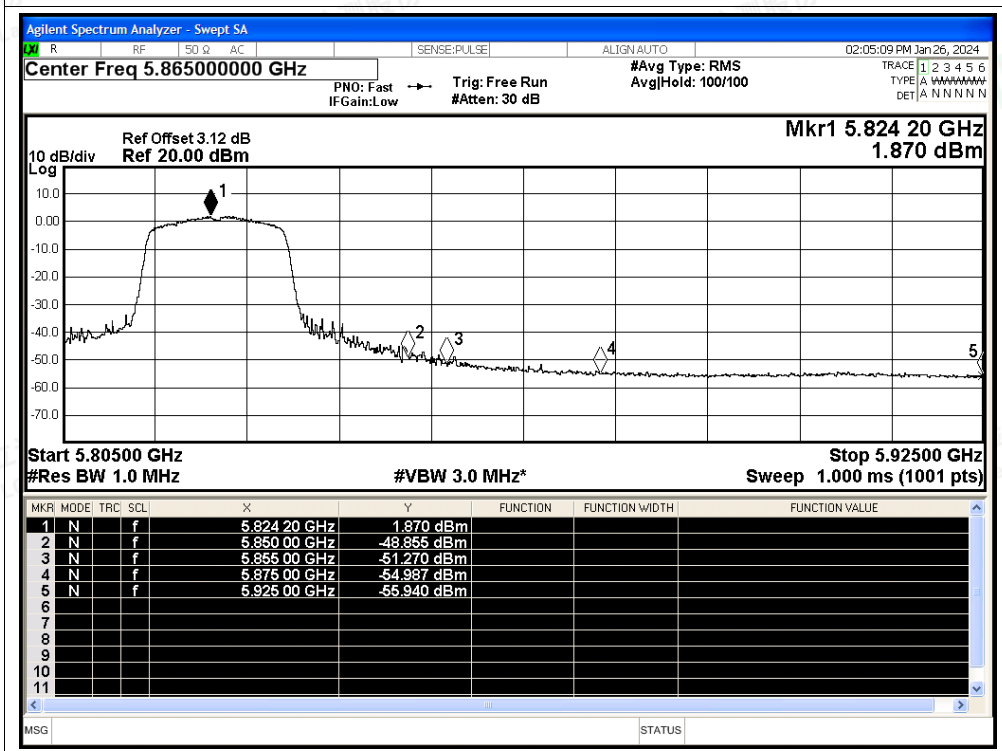

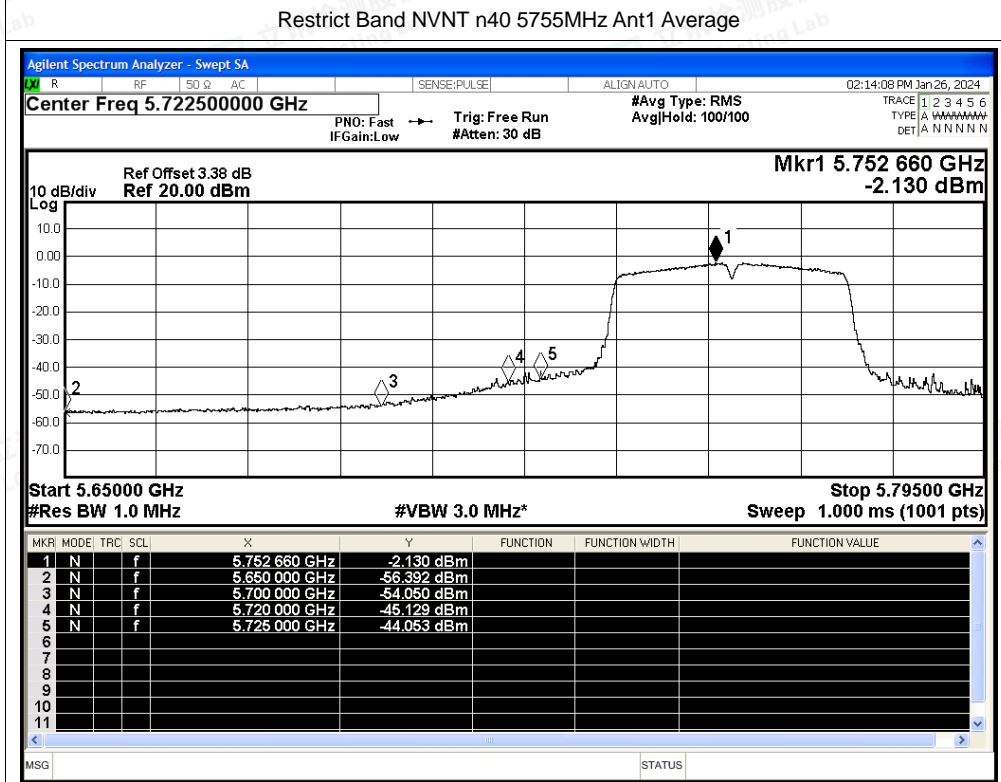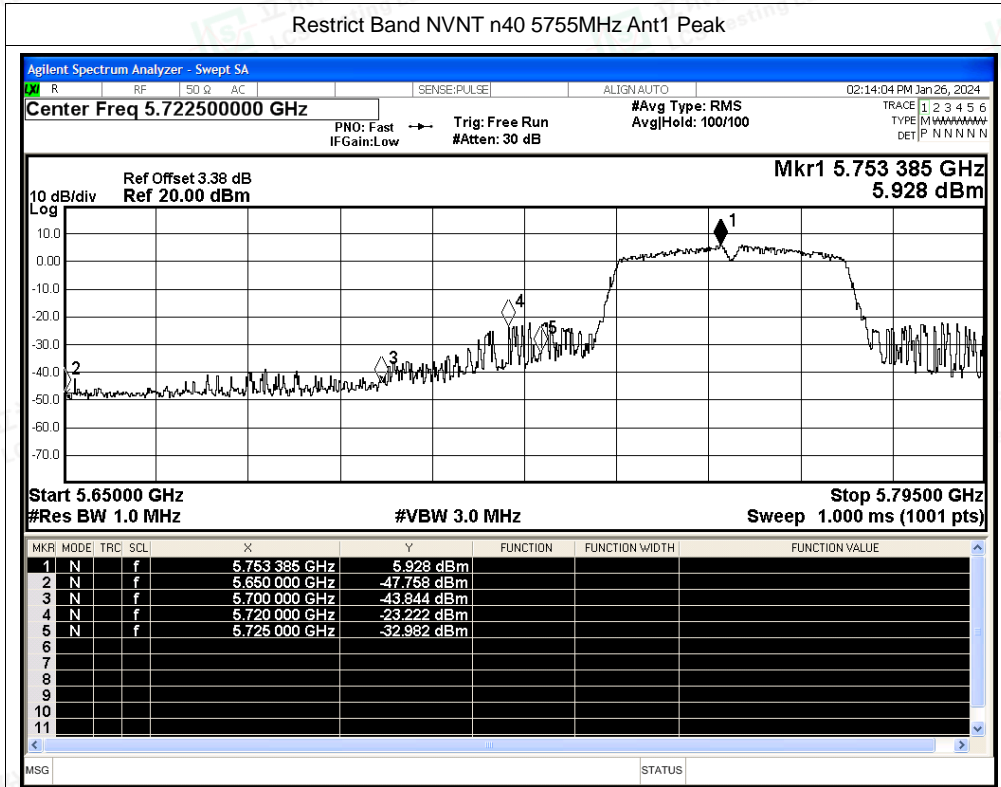




Restrict Band NVNT n40 5795MHz Ant1 Peak

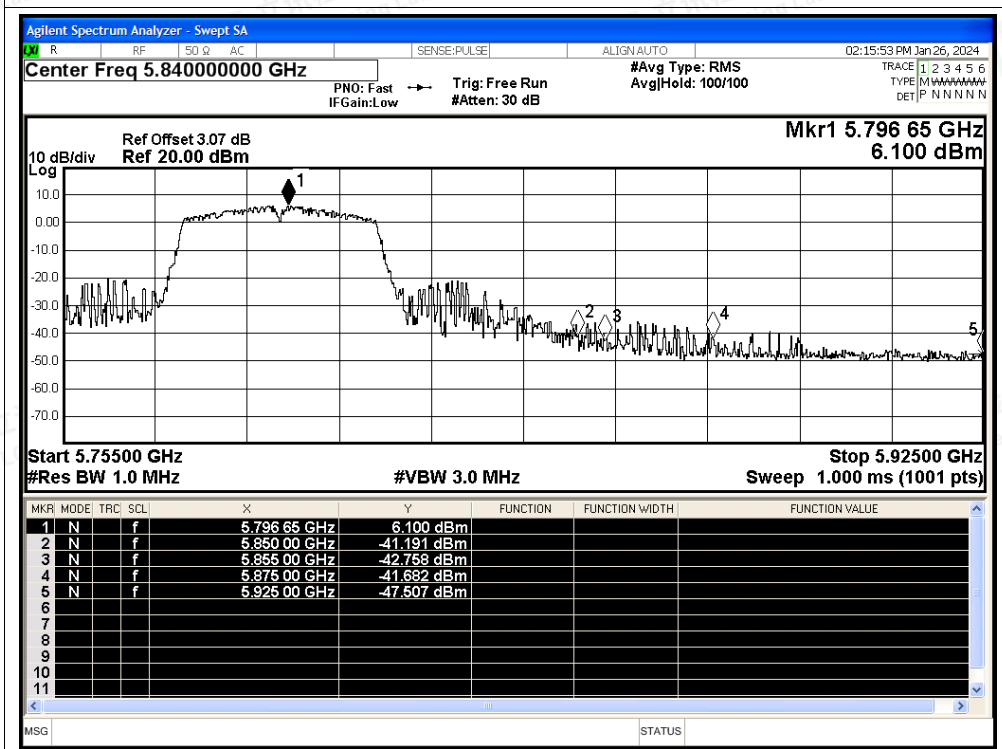


Restrict Band NVNT n40 5795MHz Ant1 Average

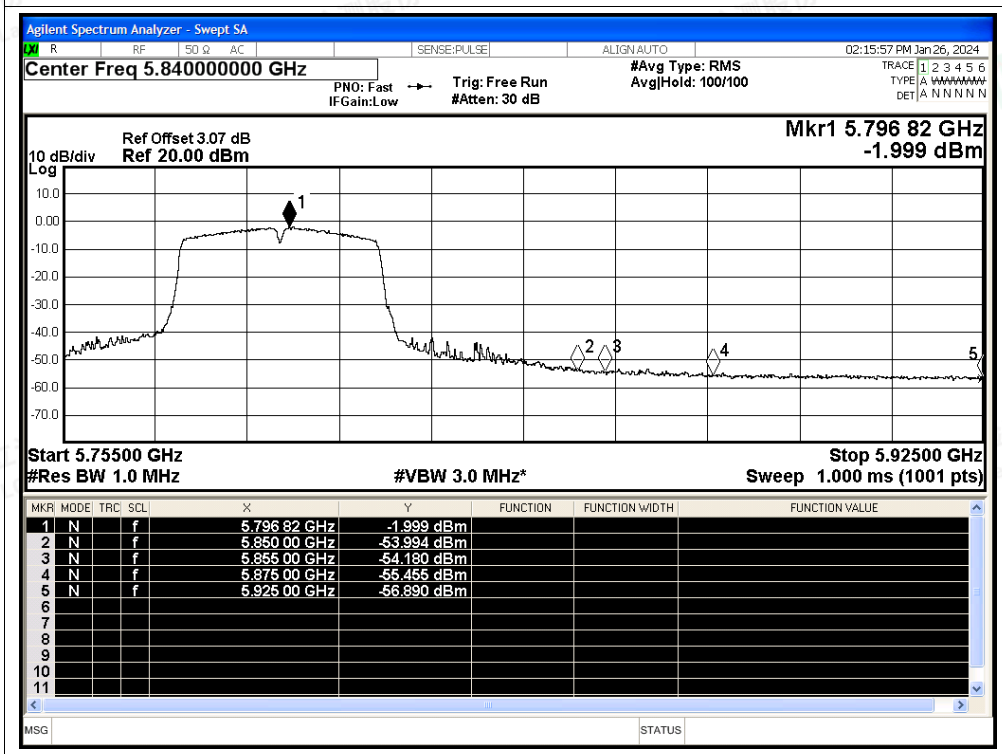




Restrict Band NVNT ac20 5745MHz Ant1 Peak

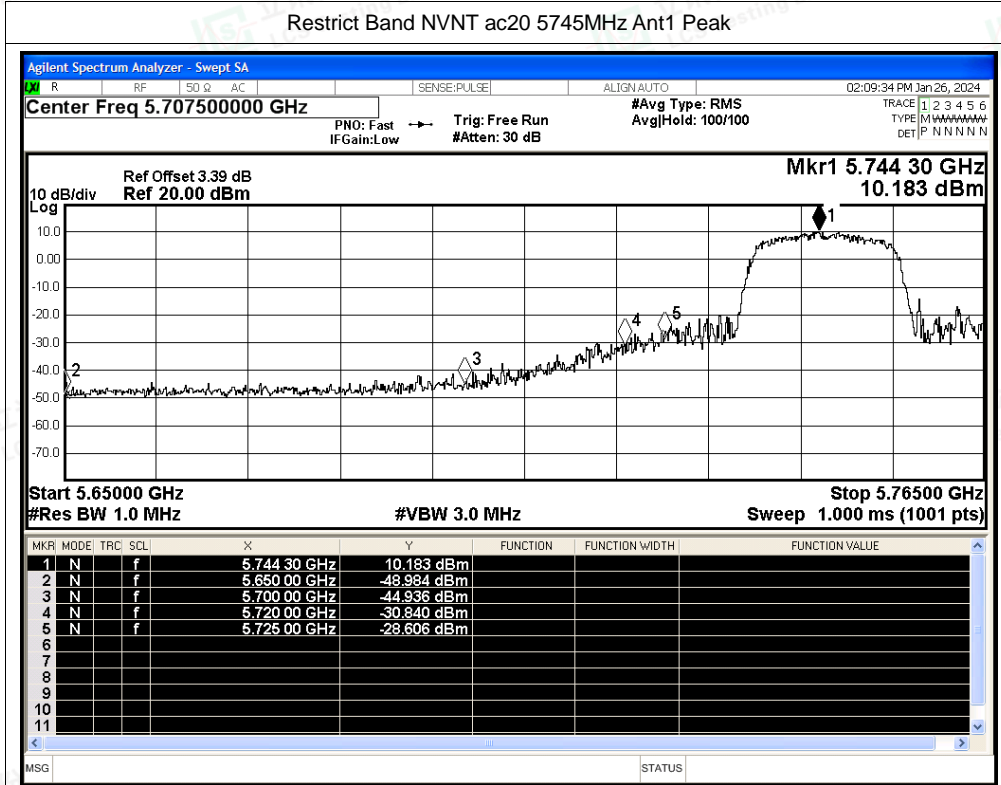


Restrict Band NVNT ac20 5745MHz Ant1 Average

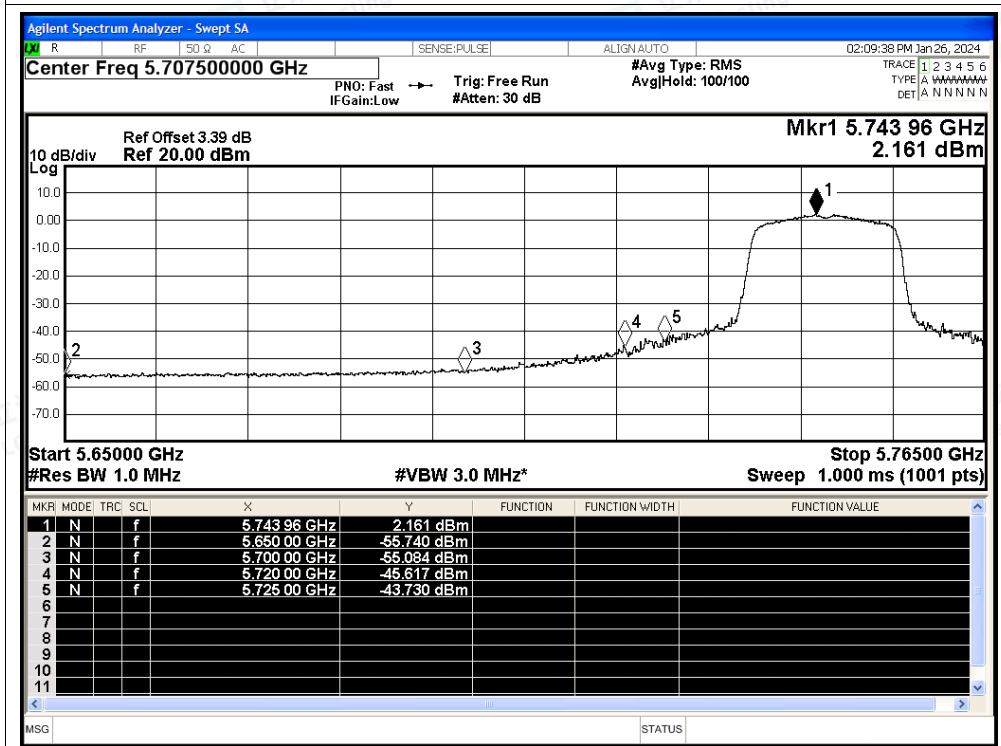



Restrict Band NVNT ac20 5825MHz Ant1 Peak

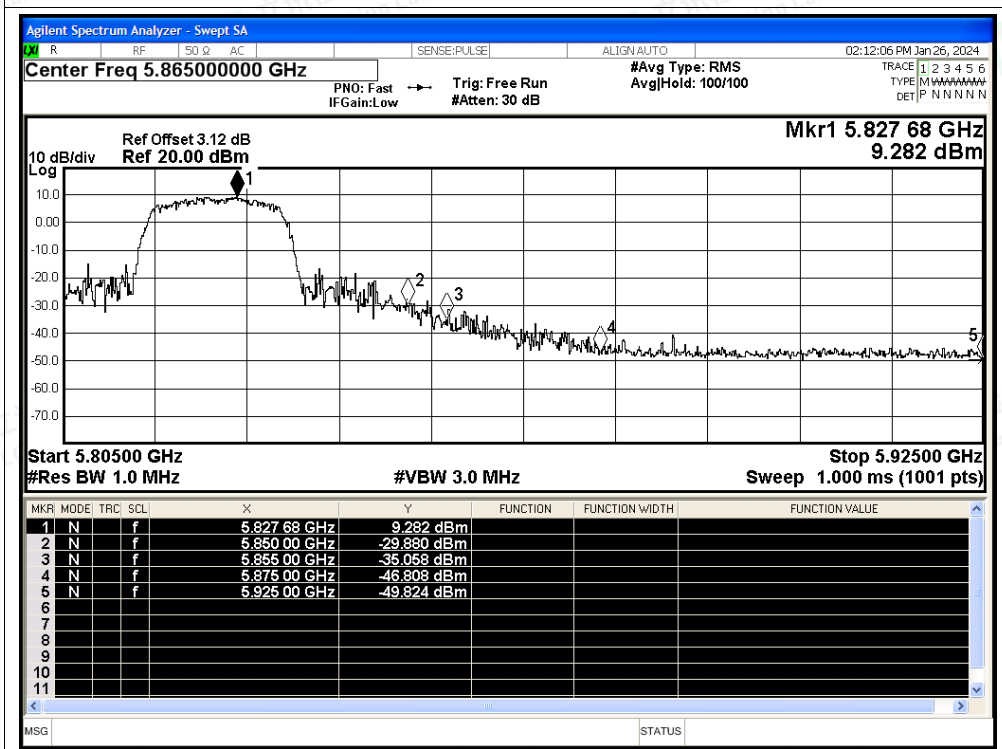

Restrict Band NVNT ac20 5825MHz Ant1 Average

