

FCC RF Test Report

Test Report Number GLS-21072044-LC-FCC-RF Rev02

FCC ID 2AVTI-INPX400

Applicant Inpixon
Applicant Address 2479 E Bayshore Rd, Ste 195, Palo Alto, CA 94303
Product Name Inpixon UWB Module
Model (s) INPX-400
Date of Receipt 07/23/2021
Date of Test 07/27/2021-08/02/2021
Report Issue Date 08/30/2021
Test Standards 47 CFR Part 15 Subpart F
Test Result PASS



Issued by:

Vista Compliance Laboratories
 1261 Puerta Del Sol, San Clemente, CA 92673 USA
www.vista-compliance.com



Devin Tai (Test Engineer)



David Zhang (Technical Manager)

This report is for the exclusive use of the applicant. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Note that the results contained in this report pertain only to the test samples identified herein, and the results relate only to the items tested and the results that were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested and the results thereof based upon the information provided to us. The applicant has 60 days from date of issuance of this report to notify us of any material error or omission. Failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by any government agencies. This report is not to be reproduced by any means except in full and in any case not without the written approval of Vista Laboratories.

REVISION HISTORY

Report Number	Version	Description	Issued Date
GLS-21072044-LC-FCC-RF	01	Initial report	08/12/2021
GLS-21072044-LC-FCC-RF Rev02	02	Add Channel 2 Test result	08/30/2021

TABLE OF CONTENTS

1	TEST SUMMARY	4
2	GENERAL INFORMATION.....	5
2.1	Applicant.....	5
2.2	Product information.....	5
2.3	Test standard and method	5
3	TEST SITE INFORMATION.....	6
4	MODIFICATION OF EUT / DEVIATIONS FROM STANDARDS.....	6
5	TEST CONFIGURATION AND OPERATION.....	6
5.1	EUT Test Configuration.....	6
5.2	Supporting Equipment	7
6	UNCERTAINTY OF MEASUREMENT	7
7	TEST RESULTS.....	8
7.1	Radiated Emission below 960MHz.....	8
7.2	Radiated Spurious Emissions above 960 MHz	11
7.3	Peak Emissions in a 50 MHz Bandwidth	26
8	EUT AND TEST SETUP PHOTOS.....	31
9	TEST INSTRUMENT LIST	32

1 Test Summary

Test Item	Test Requirement	Test Method	Result
Antenna Requirement	47 CFR Part 15.203	ANSI C63.10: 2013	Pass*
UWB Bandwidth	47 CFR Part 15.503 (a), (d), 15.519 (b)	ANSI C63.10: 2013	Pass*
Radiated Emission below 960MHz	47 CFR Part 15.519 (c), 15.209	ANSI C63.10: 2013	Pass
Radiated Emission above 960MHz	47 CFR Part 15.519 (c), 15.521 (d)	ANSI C63.10: 2013	Pass
Radiated Emission in GPS Bands	47 CFR Part 15.519 (d)	ANSI C63.10: 2013	Pass*
Peak Emission in a 50MHz Bandwidth	47 CFR Part 15.519 (e), 15.521 (g)	ANSI C63.10: 2013	Pass
Conducted Emission	47 CFR Part 15.207	ANSI C63.10: 2013	Pass*
Transmission Deactivation	47 CFR Part 15.519 (a)	ANSI C63.10: 2013	Pass*
RF Exposure	47 CFR Part 1.1310	OET Bulletin 65 FCC 447498 D01	Pass

Note: Pass*:

The purpose of this report is to provide partial testing and result to support the Class II permissive change due to crystal substitution and other non-radio related minor circuitry modification. For the detail, refers to the C2PC request letter. The radiated emission and peak emission in a 50MHz bandwidth are verified and result is presented in this report. For the rest of test items please refer to original report filed under FCC ID: 2AVTI-INPX400.

2 General Information

2.1 Applicant

Applicant	Inpixon
Applicant address	2479 E Bayshore Rd, Ste 195, Palo Alto, CA 94303
Manufacturer	Inpixon
Manufacturer Address	2479 E Bayshore Rd, Ste 195, Palo Alto, CA 94303

2.2 Product information

Product Name	Inpixon
Product Description	Inpixon UWB Module
Model Number	INPX-400
Family Models	N/A
Serial Number	N/A
Frequency Band	UWB: 3240-4830MHz, 6215-7000MHz
Type of modulation	Pulse Modulation
Equipment Class	UWB
Antenna Information	Ultra-Wideband (UWB) Flex Antenna, P/N: FXUWB20
Clock Frequencies	N/A
Input Power	5VDC
Power Adapter	N/A
Manufacturer/Model	(Note: powered by USB interface)
Power Adapter SN	N/A
Hardware version	N/A
Software version	N/A
Simultaneous Transmission	N/A
Additional Info	EMC Emission Class B

2.3 Test standard and method

Test standard	47 CFR Part 15 Subpart F
Test method	ANSI C63.10: 2013

3 Test Site Information

Lab performing tests	Vista Laboratories, Inc.
Lab Address	1261 Puerta Del Sol, San Clemente, CA 92673 USA
Phone Number	+1 (949) 393-1123
Website	www.vista-compliance.com

Test Condition	Temperature	Humidity	Atmospheric Pressure
RF Testing	23.5°C	58.2%	996 mbar
Radiated Emission Testing	23.5°C	58.2%	996 mbar

4 Modification of EUT / Deviations from Standards

N/A

5 Test Configuration and Operation

5.1 EUT Test Configuration

EUT is powered by external 5VDC power source. Python.exe is used to enable EUT to transmit at set channel continuously for testing purpose.

The following software was used for testing and to monitor EUT performance

Software	Description
EMISoft Vasona	EMC/RF Spurious emission test software used during testing
Python.exe	To set EUT into continuous TX mode under different channel, etc.

5.2 Supporting Equipment

Description	Manufacturer	Model #	Serial #
Laptop	Dell	XPS	34917771602
AC/DC adapter	Dell	3RG0T	CN-03RG0T-72438-386-16CF-A03

6 Uncertainty of Measurement

Test item	Measurement Uncertainty (dB)
RF Output Power (Conducted)	±1.2 dB
Power Spectral Density	±0.9 dB
Unwanted Emission (conducted)	±2.6 dB
Occupied Channel Bandwidth	±5 %
Radiated Emission (9KHz-30MHz)	±3.5 dB
Radiated Emission (30MHz-1GHz)	±4.6 dB
Radiated Emission (1-18GHz)	±4.9 dB
Radiated Emission (18-40GHz)	±3.5 dB

7 Test Results

7.1 Radiated Emission below 960MHz

7.1.1 Requirement

Per § 15.209


- (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency Range (MHZ)	Field Strength ($\mu\text{V/m}$)
0.009~0.490	2400/F(KHz)
0.490~1.705	24000/F(KHz)
1.705~30.0	30
30 – 88	100
88 – 216	150
216 – 960	200

Per § 15.519

- (b) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209.

7.1.2 Test setup

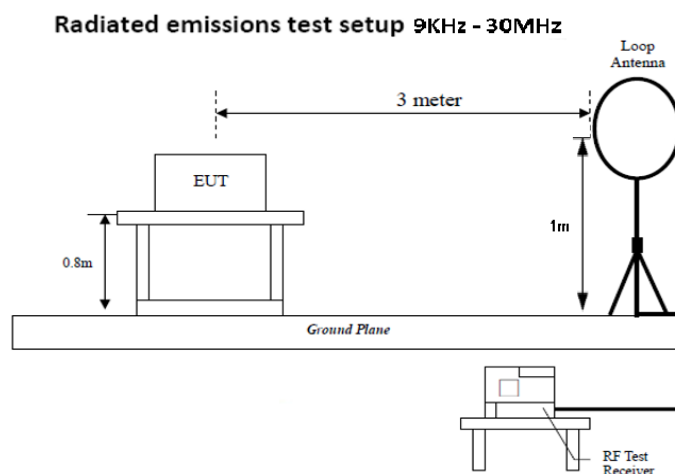

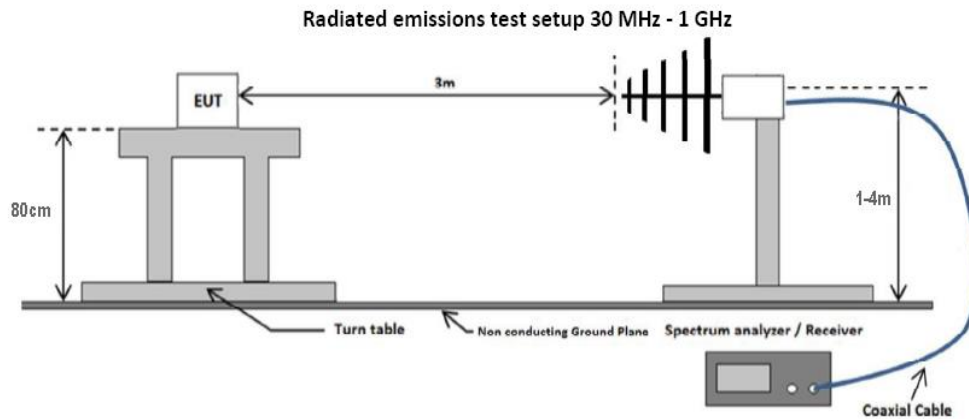

7.1.3 Test Procedure

According to section 10.2 and section 6.5 in Radiated spurious emission measurements procedure below 960 MHz in ANSI C63.10-2013. Boresight antenna mast was used during the scanning to point to EUT to maximize the emission. The process will be repeated in 3 EUT orientations.

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 300 Hz for frequency below 150KHz.
4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for frequency between 150KHz – 30MHz.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-Peak detection at frequency between 30MHz - 1GHz.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak and average measurement at frequency above 1GHz.
7. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.


7.1.4 Test Result

Radiated Emission between 9KHz – 30MHz test result

Note: no substantial emission is found other than the noise floor. Different modes have been verified.

RADIATED EMISSIONS BELOW 960 MHZ

Test Standard:	§ 15.209	Mode:	High CH – CH7
Frequency Range:	30 MHz – 960MHz	Test Date:	07/29/2021
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

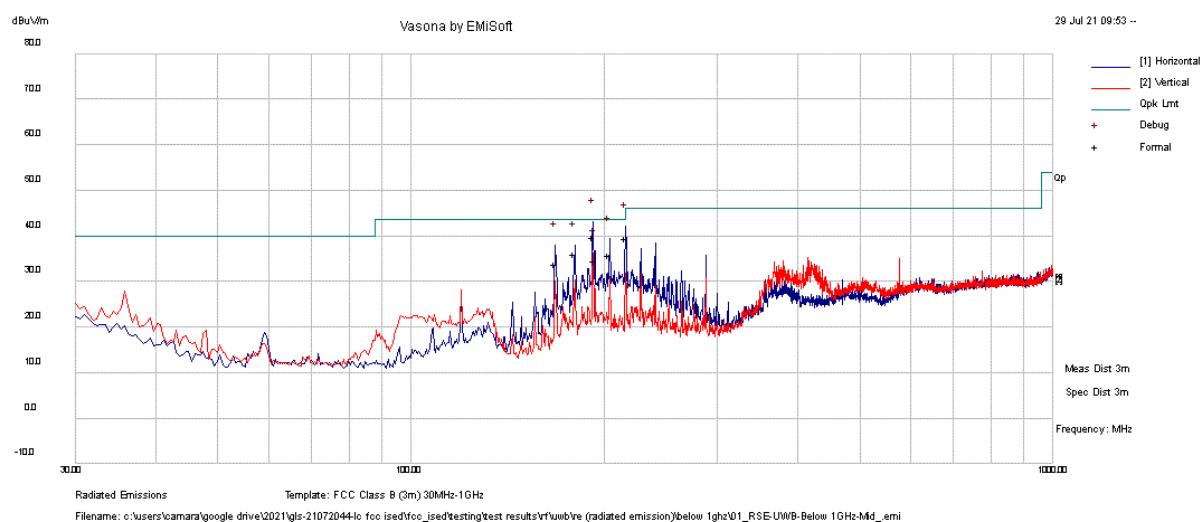

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
191.994	52.4	4.7	-17.1	39.9	Quasi Max	H	100	190	43.5	-3.6	Pass
215.992	50.9	4.9	-16.2	39.6	Quasi Max	H	100	336	43.5	-3.9	Pass
203.864	47.9	4.8	-16.8	35.8	Quasi Max	H	154	0	43.5	-7.7	Pass
179.999	48.9	4.6	-17.3	36.1	Quasi Max	H	121	205	43.5	-7.4	Pass
167.951	47	4.4	-17.5	34	Quasi Max	H	241	354	43.5	-9.5	Pass
193.507	47	4.7	-17.1	34.6	Quasi Max	H	100	360	43.5	-8.9	Pass

7.2 Radiated Spurious Emissions above 960 MHz


7.2.1 Requirement

§ 15.209, 15.519 (c), 15.521 (d)

The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency Range (MHZ)	EIRP in dBm	EIRP at 3 meter (dBuV/m)
960-1610	-75.3	19.9
1610-1990	-63.3	31.9
1990-3100	-61.3	33.9
3100-10600	-41.3	53.9
Above 10600	-61.3	33.9

7.2.2 Test Setup

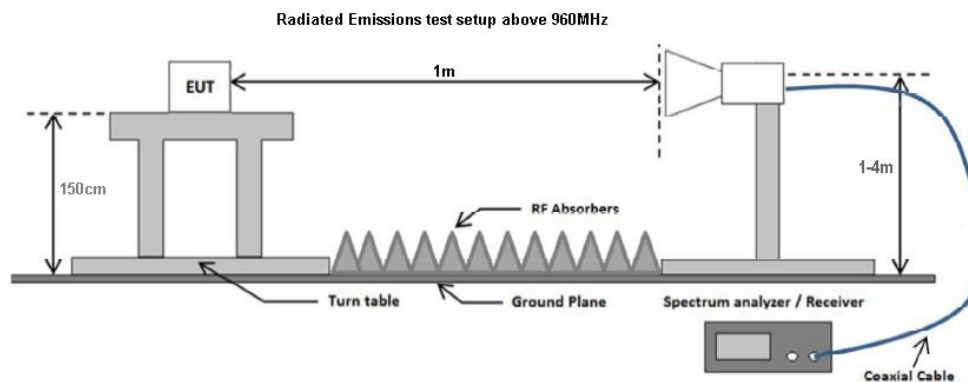

7.2.3 Test Procedure

Setting:

Frequency Range: 960MHz to 40GHz

Measurement distance: 1m distance

Spectrum analyzer RBW: 1MHz

Spectrum analyser VBW: 10MHz

Detector Function: Peak for peak emission and RMS for average emission


1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission. All X, Y and Z axis are evaluated.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10MHz with Peak detection for Peak and average measurement at frequency above 1GHz.
4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

Note: Actual measurement distance is 1-meter distance and the result is corrected to 3m distance to compare to the 3m distance EIRP limit.

7.2.4 Test Result

RADIATED EMISSIONS ABOVE 960 MHZ

Test Standard:	FCC Part 15F	Mode:	CH1 - Horizontal
Frequency Range:	960MHz-18GHz	Test Date:	07/29/2021-08/02/2021
Antenna Type/Polarity:	Horn & Horizontal	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

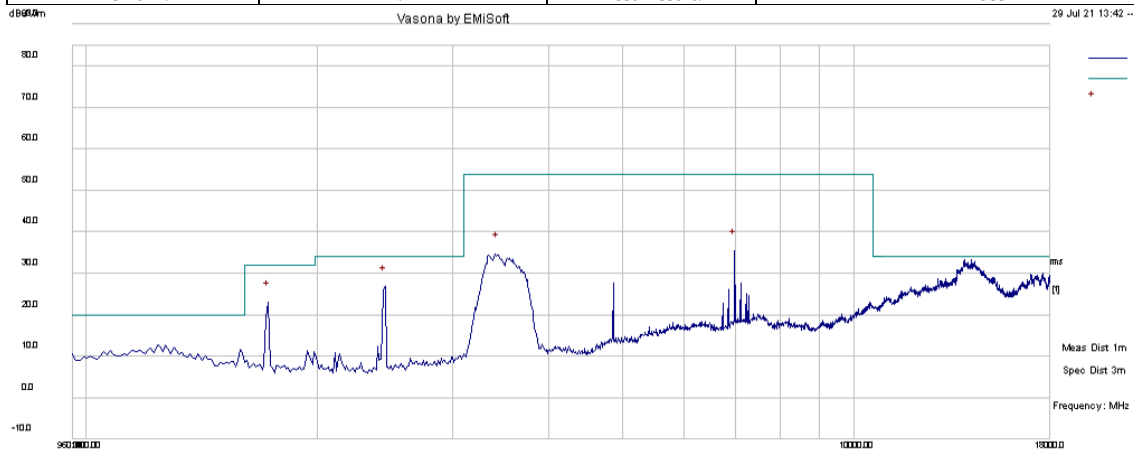


Radiated Emissions Template: FCC 15.117 (3m) 1GHz-18GHz
Filename: c:\users\camara\google drive\2021\glc-21072044-lc-fcc-ised\test\test results\rf\ueb\ve (radiated emission)\above 1ghz\1.emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Limit dBuV/m	Margin dB	Pass/Fail
3440.831	41.67	5.83	-15.15	32.35	RMS	H	53.9	-21.55	Pass
2451.218	38.93	4.87	-18.89	24.91	RMS	H	33.9	-8.99	Pass
1726.979	36.46	4.45	-19.06	21.85	RMS	H	31.9	-10.05	Pass
6987.853	34.51	8.72	-8.75	34.48	RMS	H	53.9	-19.42	Pass

RADIATED EMISSIONS ABOVE 960 MHZ


Test Standard:	FCC Part 15F	Mode:	CH1 - Vertical
Frequency Range:	960MHz-18GHz	Test Date:	07/29/2021-08/02/2021
Antenna Type/Polarity:	Horn & Ver	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

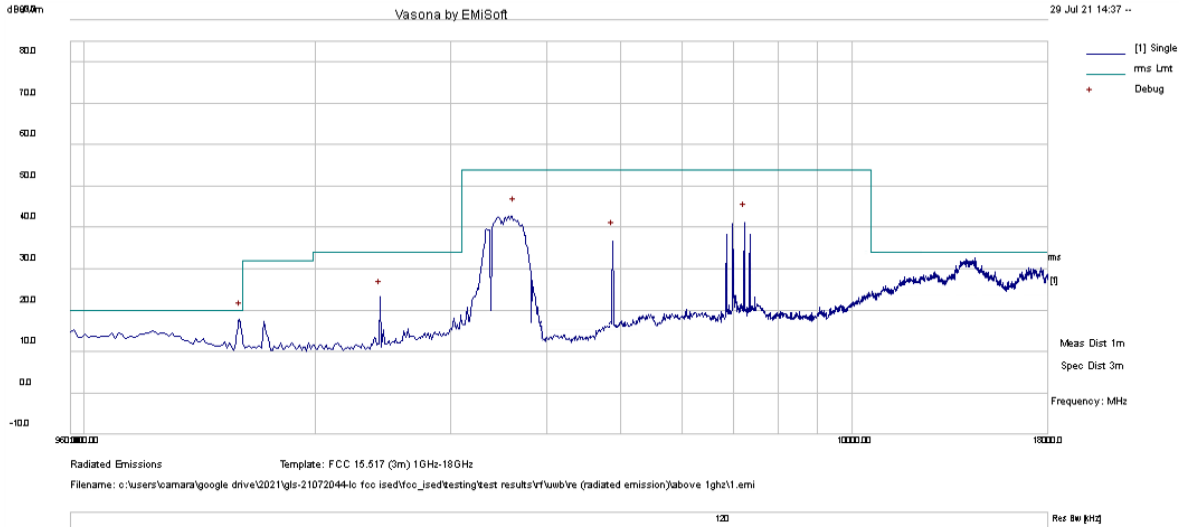

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Limit dBuV/m	Margin dB	Pass/Fail
3632.568	49.32	6.04	-14.45	40.91	RMS	V	53.9	-12.99	Pass
1599.176	30.14	4.45	-18.55	16.04	RMS	V	19.9	-3.86	Pass
7243.771	38.06	9.26	-8.33	38.99	RMS	V	53.9	-14.91	Pass
4877.727	39.85	6.89	-11.7	35.04	RMS	V	53.9	-18.86	Pass
2430.684	34.67	4.86	-18.92	20.61	RMS	V	33.9	-13.29	Pass

RADIATED EMISSIONS ABOVE 960 MHZ

Test Standard:	FCC Part 15F	Mode:	CH2 - Horizontal
Frequency Range:	960MHz-18GHz	Test Date:	07/29/2021-08/02/2021
Antenna Type/Polarity:	Horn & Horizontal	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

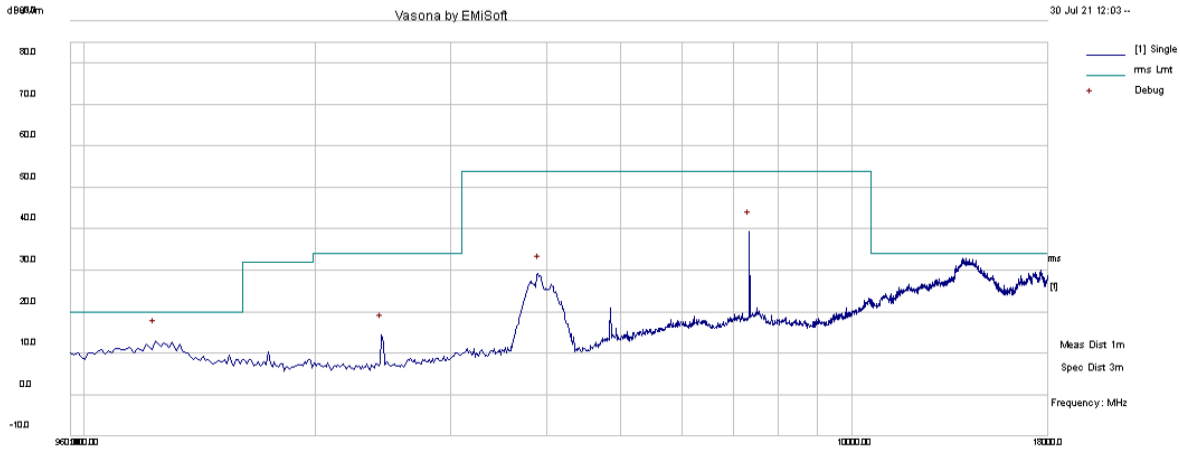


Radiated Emissions
Template: FCC 15.517 (3m) 1GHz-18GHz
Filename: c:\users\camara\google drive\2021\gls-21072044-lc-fcc-issd\test\test results\rf\ueb\ve (radiated emission)\above 1ghz\1.emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Limit dBuV/m	Margin dB	Pass/Fail
3915.125	34.1	6.33	-13.17	27.26	RMS	H	53.9	-26.64	Pass
7350.072	36.78	9.48	-8.35	37.91	RMS	H	53.9	-15.99	Pass
1237.484	23.23	4.02	-15.14	12.11	RMS	H	19.9	-7.79	Pass
2441.156	27.42	4.87	-18.91	13.38	RMS	H	33.9	-20.52	Pass

RADIATED EMISSIONS ABOVE 960 MHZ

Test Standard:	FCC Part 15F	Mode:	CH2 - Vertical
Frequency Range:	960MHz-18GHz	Test Date:	07/29/2021-08/02/2021
Antenna Type/Polarity:	Horn & Ver	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

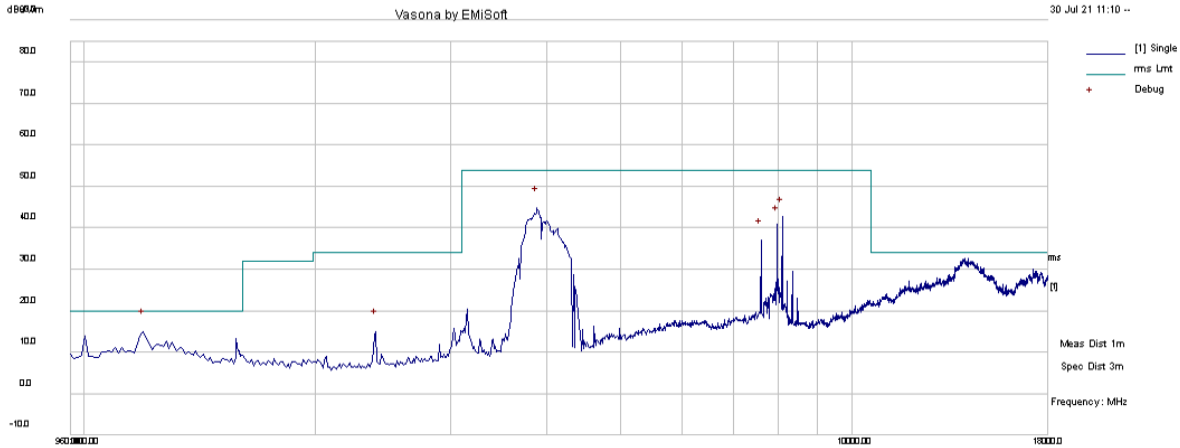


Radiated Emissions Template: FCC 15.117 (3m) 1GHz-18GHz
Filename: c:\users\camara\google drive\2021\gl-21072044-lc-fcc-ised\fcc_ised\testing\test results\rf\lumb\re (radiated emission)\above 1ghz\1.emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Limit dBuV/m	Margin dB	Pass/Fail
3894.294	49.83	6.31	-13.17	42.97	RMS	V	53.9	-10.93	Pass
7989.624	38.27	9.78	-9.28	38.77	RMS	V	53.9	-15.13	Pass
8117.173	40.08	9.8	-9.19	40.69	RMS	V	53.9	-13.21	Pass
1194.519	24.42	3.94	-14.76	13.6	RMS	V	19.9	-6.3	Pass
7616.347	34.21	9.79	-9.05	34.95	RMS	V	53.9	-18.95	Pass
2397.966	28.9	4.83	-18.97	14.76	RMS	V	33.9	-19.14	Pass

RADIATED EMISSIONS ABOVE 960 MHZ

Test Standard:	FCC Part 15F	Mode:	CH3 - Horizontal
Frequency Range:	960MHz-18GHz	Test Date:	07/29/2021-08/02/2021
Antenna Type/Polarity:	Horn & Horizontal	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

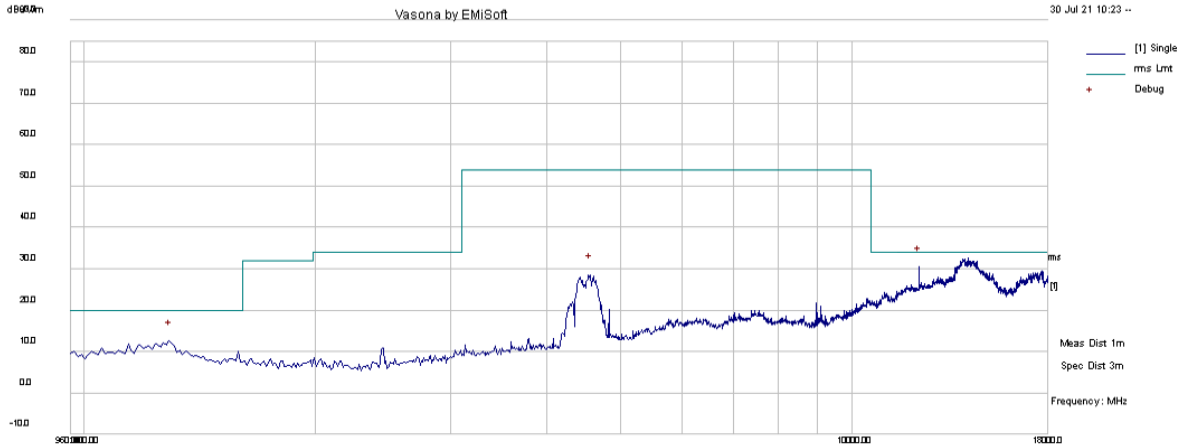


Radiated Emissions Template: FCC 15.17 (3m) 1GHz-18GHz
Filename: c:\users\camara\google drive\2021\glis-21072044-lc fcc ised\fcc_ised\testing\test results\rf\unib've (radiated emission)\above 1ghz\1.eml

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Limit dBuV/m	Margin dB	Pass/Fail
1294.546	22.14	4.12	-15.63	10.63	RMS	H	19.9	-9.27	Pass
4571.56	33.55	6.81	-12.67	27.69	RMS	H	53.9	-26.21	Pass
12228.81	21.57	13.38	-5.67	29.28	RMS	H	33.9	-4.62	Pass

RADIATED EMISSIONS ABOVE 960 MHZ

Test Standard:	FCC Part 15F	Mode:	CH3 - Vertical
Frequency Range:	960MHz-18GHz	Test Date:	07/29/2021-08/02/2021
Antenna Type/Polarity:	Horn & Ver	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

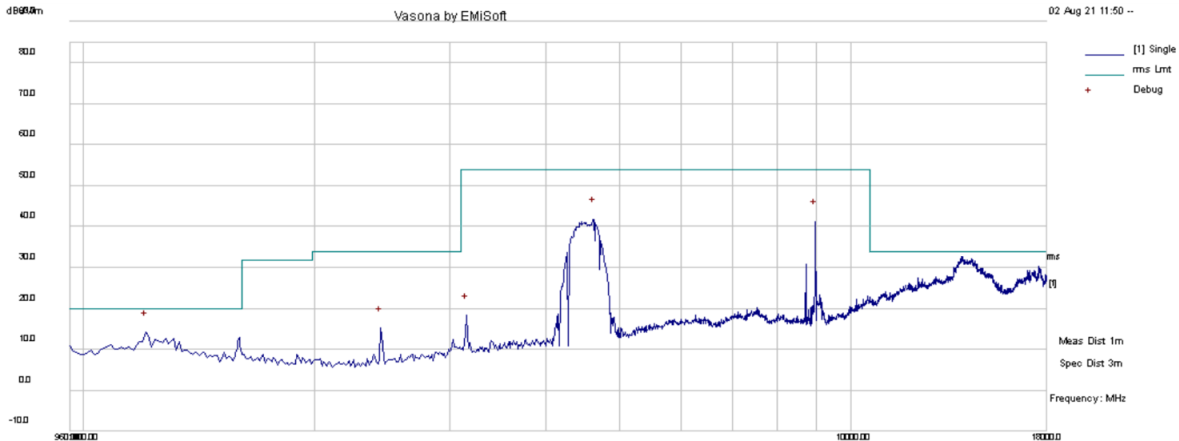


Radiated Emissions
Template: FCC 15.117 (3m) 1GHz-18GHz
Filename: c:\users\camara\google drive\2021\glis-21072044-lc-fcc-ised\foe_testing\test results\rf\unb\ve (radiated emission)\above 1ghz\1.emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Limit dBuV/m	Margin dB	Pass/Fail
1205.22	23.53	3.96	-14.83	12.66	RMS	V	19.9	-7.24	Pass
2441.054	28.32	4.87	-18.91	14.28	RMS	V	33.9	-19.62	Pass
3154.395	27.5	5.54	-16.08	16.96	RMS	V	53.9	-36.94	Pass
4623.498	45.89	6.83	-12.43	40.29	RMS	V	53.9	-13.61	Pass
8990.017	38.93	9.95	-9.2	39.68	RMS	V	53.9	-14.22	Pass

RADIATED EMISSIONS ABOVE 960 MHZ

Test Standard:	FCC Part 15F	Mode:	CH4 - Horizontal
Frequency Range:	960MHz-18GHz	Test Date:	07/29/2021-08/02/2021
Antenna Type/Polarity:	Horn & Horizontal	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

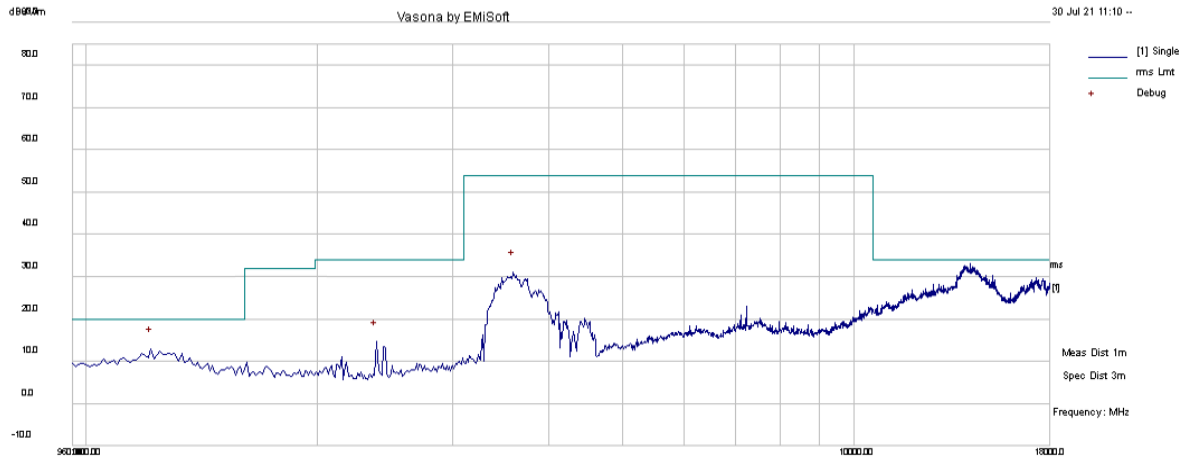

Radiated Emissions Template: FCC 15.117 (3m) 1GHz-18GHz
Filename: c:\users\camara\google drive\2021\glc-21072044-lc-fcc-issd\foe_isd\testing\test results\rf\ueb\re (radiated emission)\above 1ghz\1.emi


120

Res BW 1Hz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Limit dBuV/m	Margin dB	Pass/Fail
3603.268	38.24	6.01	-14.48	29.77	RMS	H	53.9	-24.13	Pass
2387.842	27.18	4.82	-18.99	13.01	RMS	H	33.9	-20.89	Pass
1216.015	22.23	3.98	-14.93	11.28	RMS	H	19.9	-8.62	Pass

RADIATED EMISSIONS ABOVE 960 MHZ

Test Standard:	FCC Part 15F	Mode:	CH4 - Vertical
Frequency Range:	960MHz-18GHz	Test Date:	07/29/2021-08/02/2021
Antenna Type/Polarity:	Horn & Ver	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

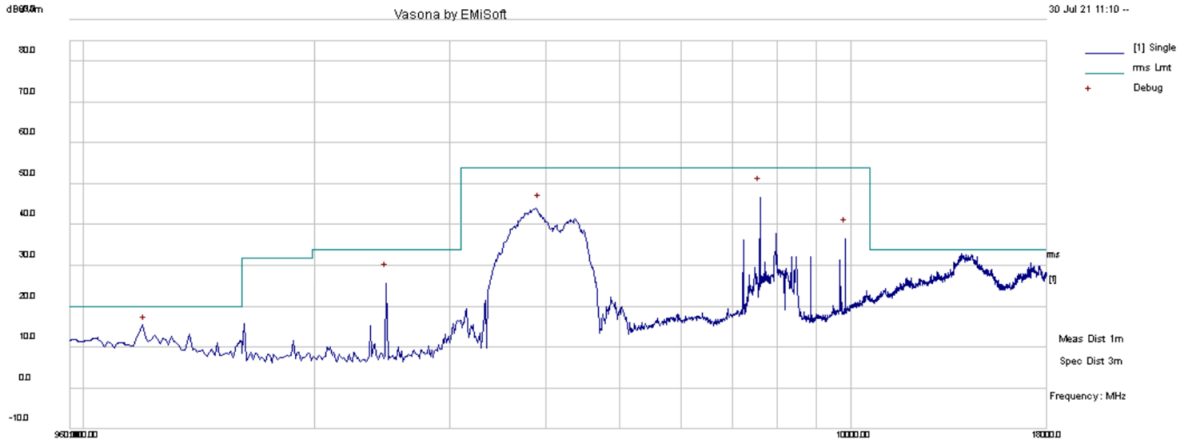


Radiated Emissions
Template: FCC 15.117 (3m) 1GHz-18GHz
Filename: c:\users\camara\google drive\2021\gl-21072044-lc-fcc-ised\foos\used\testing\test results\rf\unb\ve (radiated emission)\above 1ghz\1.eml

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Limit dBuV/m	Margin dB	Pass/Fail
3925.982	48.11	6.34	-13.18	41.27	RMS	V	53.9	-12.63	Pass
7616.28	43.59	9.79	-9.05	44.33	RMS	V	53.9	-9.57	Pass
2483.075	37.84	4.9	-18.69	24.05	RMS	V	33.9	-9.85	Pass
1204.838	22.12	3.96	-14.82	11.26	RMS	V	19.9	-8.64	Pass
9831.445	33.08	11.07	-8.72	35.43	RMS	V	53.9	-18.47	Pass

RADIATED EMISSIONS ABOVE 960 MHZ

Test Standard:	FCC Part 15F	Mode:	CH5 - Horizontal
Frequency Range:	960MHz-18GHz	Test Date:	07/29/2021-08/02/2021
Antenna Type/Polarity:	Horn & Horizontal	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

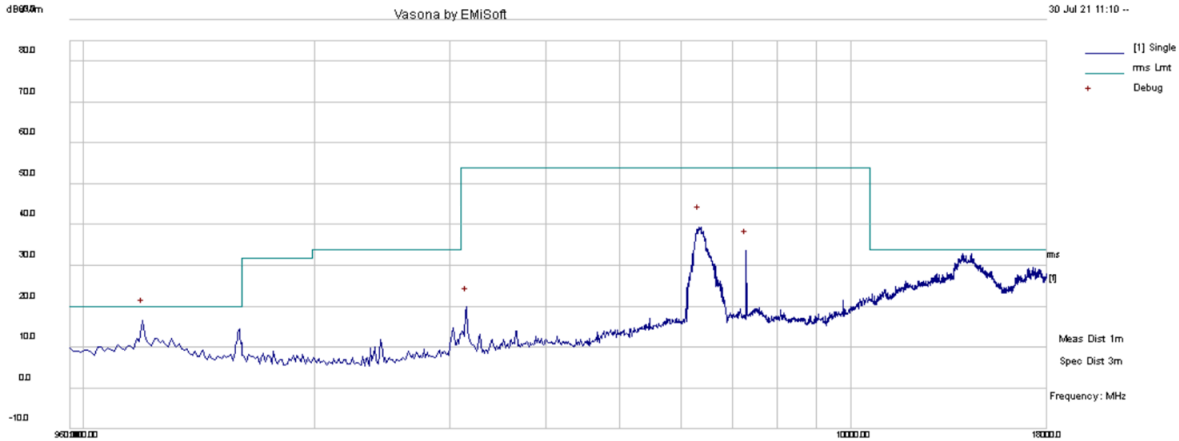


Radiated Emissions Template: FCC 15.117 (3m) 1GHz-18GHz
Filename: c:\users\camara\google drive\2021\gl-21072044-lc-fcc-ised\foe\sed\testing\test results\rf\unb\ve (radiated emission)\above 1ghz\1.emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Limit dBuV/m	Margin dB	Pass/Fail
6339.526	38.91	7.87	-9.02	37.76	RMS	H	53.9	-16.14	Pass
7307.478	31.29	9.4	-8.35	32.34	RMS	H	53.9	-21.56	Pass
3154.66	28.24	5.54	-16.08	17.7	RMS	H	53.9	-36.2	Pass
1194.481	26.35	3.94	-14.76	15.53	RMS	H	19.9	-4.37	Pass

RADIATED EMISSIONS ABOVE 960 MHZ

Test Standard:	FCC Part 15F	Mode:	CH5 - Vertical
Frequency Range:	960MHz-18GHz	Test Date:	07/29/2021-08/02/2021
Antenna Type/Polarity:	Horn & Ver	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

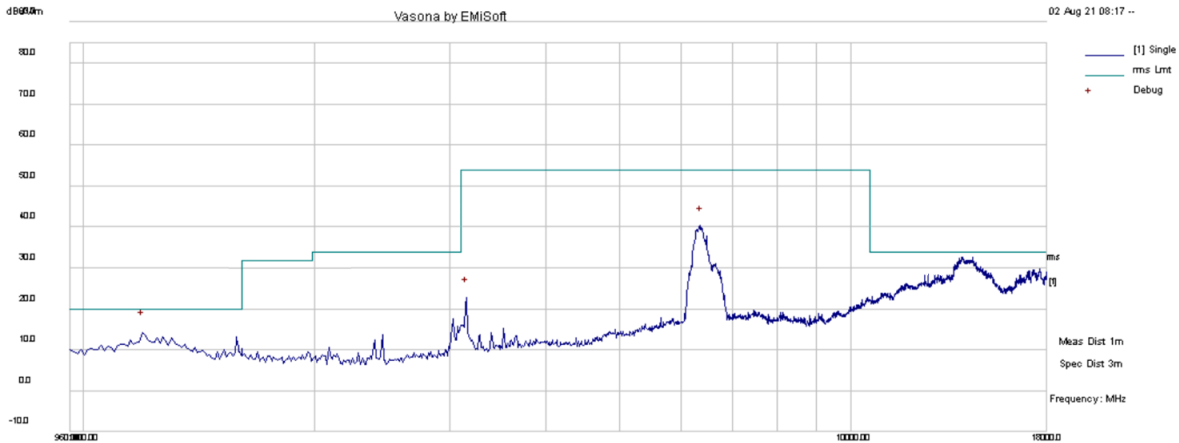


Radiated Emissions
Template: FCC 15.117 (3m) 1GHz-18GHz
Filename: c:\users\camara\google drive\2021\gl-21072044-lc-fcc-issd\testing\test results\rf\unb\ve (radiated emission)\above 1ghz\1.emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Limit dBuV/m	Margin dB	Pass/Fail
1195.096	24.31	3.95	-14.76	13.5	RMS	V	19.9	-6.4	Pass
3154.74	31.15	5.54	-16.08	20.61	RMS	V	53.9	-33.29	Pass
6377.2	38.92	7.87	-9.08	37.71	RMS	V	53.9	-16.19	Pass

RADIATED EMISSIONS ABOVE 960 MHZ

Test Standard:	FCC Part 15F	Mode:	CH7 - Horizontal
Frequency Range:	960MHz-18GHz	Test Date:	07/29/2021-08/02/2021
Antenna Type/Polarity:	Horn & Horizontal	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

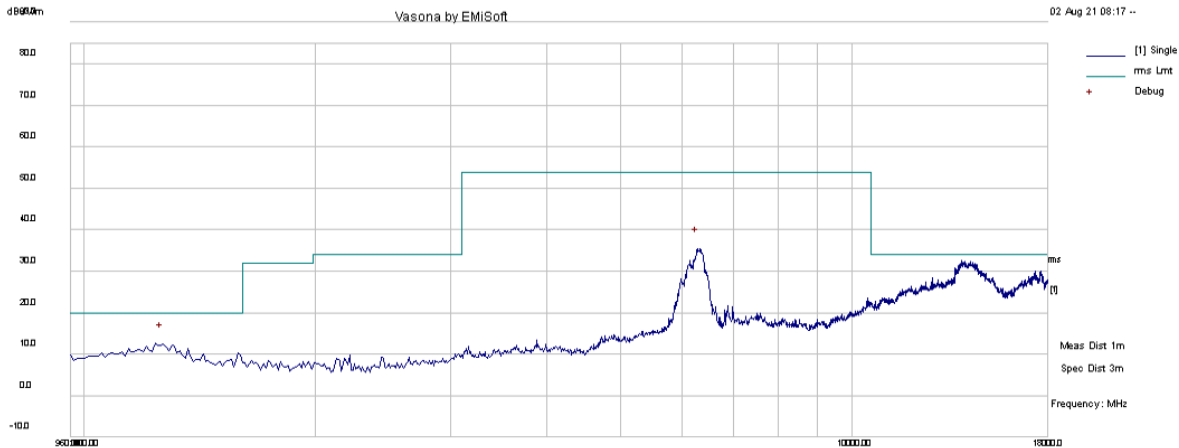


Radiated Emissions Template: FCC 15.17 (3m) 1GHz-18GHz
Filename: c:\users\camara\google drive\2021\gl-21072044-lc fcc ised\fcc_ised\testing\test results\rf\umb\re (radiated emission)\above 1ghz\1.emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Limit dBuV/m	Margin dB	Pass/Fail
1258.995	21.39	4.06	-15.33	10.12	RMS	H	19.9	-9.78	Pass
6287.915	35.56	7.87	-8.85	34.58	RMS	H	53.9	-19.32	Pass

RADIATED EMISSIONS ABOVE 960 MHZ

Test Standard:	FCC Part 15F	Mode:	CH7 - Vertical
Frequency Range:	960MHz-18GHz	Test Date:	07/29/2021-08/02/2021
Antenna Type/Polarity:	Horn & Ver	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

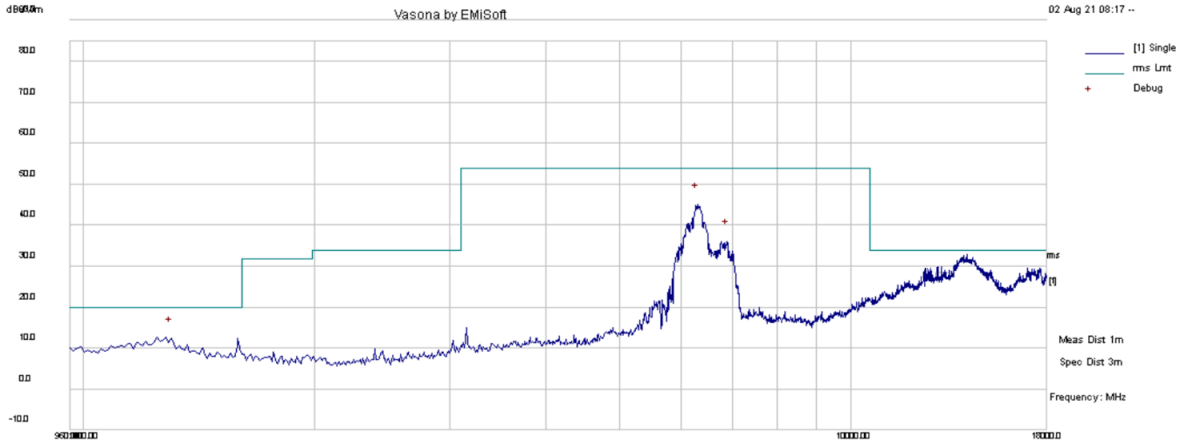

Radiated Emissions Template: FCC 15.117 (3m) 1GHz-18GHz
Filename: c:\users\camara\google drive\2021\gl-21072044-lc-fcc-ised\test\test results\rf\unb\ve (radiated emission)\above 1ghz\1.emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Limit dBuV/m	Margin dB	Pass/Fail
1298.346	22.39	4.13	-15.67	10.85	RMS	V	19.9	-9.05	Pass
6307.39	44.2	7.87	-8.9	43.17	RMS	V	53.9	-10.73	Pass
6902.673	35.25	8.57	-8.76	35.06	RMS	V	53.9	-18.84	Pass

Radiated Emission between 18GHz – 40GHz test result

Note: no substantial emission is found other than the noise floor. Different modes have been verified.

7.3 Peak Emissions in a 50 MHz Bandwidth


7.3.1 Requirement

§ 15.519 €, 15.521 (g)

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, fM. That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in §15.521.

Per 15.521 (g), when a peak measurement is required, it is acceptable to use a resolution bandwidth other than the 50 MHz specified in this subpart. This resolution bandwidth shall not be lower than 1 MHz or greater than 50 MHz, and the measurement shall be centered on the frequency at which the highest radiated emission occurs, fM. If a resolution bandwidth other than 50 MHz is employed, the peak EIRP limit shall be $20 \log (RBW/50)$ dBm where RBW is the resolution bandwidth in megahertz that is employed. This may be converted to a peak field strength level at 3 meters using $E(dBuV/m) = P(dBm \text{ EIRP}) + 95.2$. If RBW is greater than 3 MHz, the application for certification filed with the Commission must contain a detailed description of the test procedure, calibration of the test setup, and the instrumentation employed in the testing.

7.3.2 Test Setup

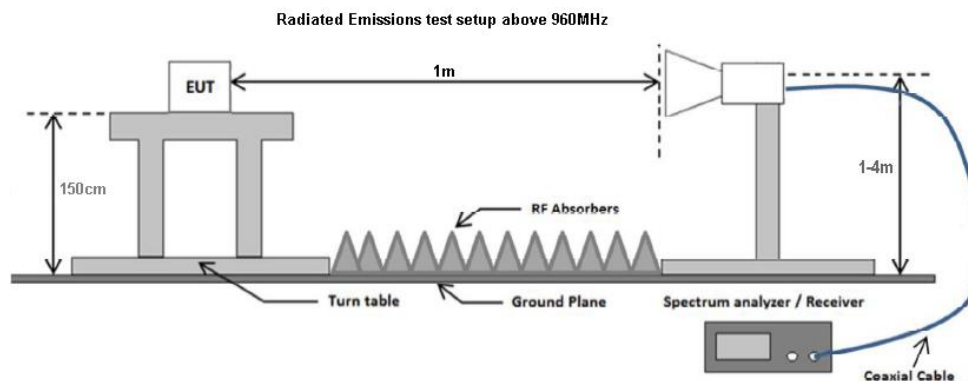

7.3.3 Test Procedure

Setting:

Frequency Range: EUT operating frequencies

Measurement distance: 1m distance

Spectrum analyzer RBW: 10MHz

Spectrum analyser VBW: 50MHz

Detector Function: Peak for peak emission

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission. All X, Y and Z axis are evaluated.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth of test receiver/spectrum analyzer is 10MHz and video bandwidth is 50MHz with Peak detection for Peak and average measurement at frequency above 1GHz.
4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.


Note: Actual measurement distance is 1-meter distance and the result is converted to 3m distance to compare to the 3m distance EIRP limit.

7.3.4 Test Result


CH	Fm(MHz)	Field Strength (dBuV/m @ 3m)	Peak Power (dBm/10MHz)	Peak Power (dBm/50MHz)	Limit (dBm/50MHz)	Result
1	3499	77.65	-17.55	-3.57	0	Pass
2	3994	78.26	-16.94	-2.96	0	Pass
3	4493	78.05	-17.15	-3.17	0	Pass
4	3994	78.28	-16.92	-2.94	0	Pass
5	6489	74.86	-20.34	-6.36	0	Pass
7	6489	77.31	-17.89	-3.91	0	Pass

Note: Field Strength E(dBuV/m) = P (dBm EIRP) + 95.2


Peak Power(dBm/50MHz) = Peak Power (dBm/10MHz) – 20*log (10/50)

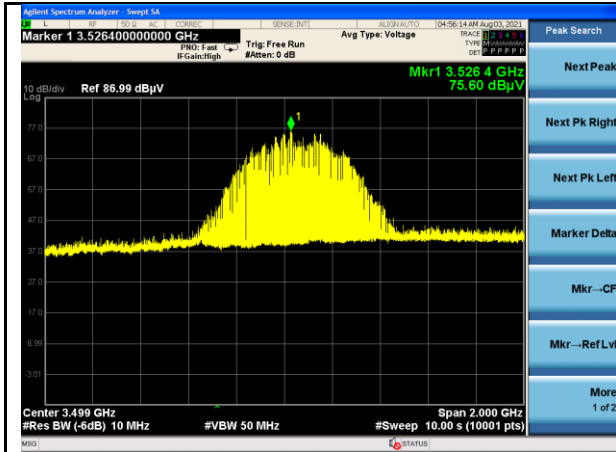


Peak Power Emission (CH1) – Peak search

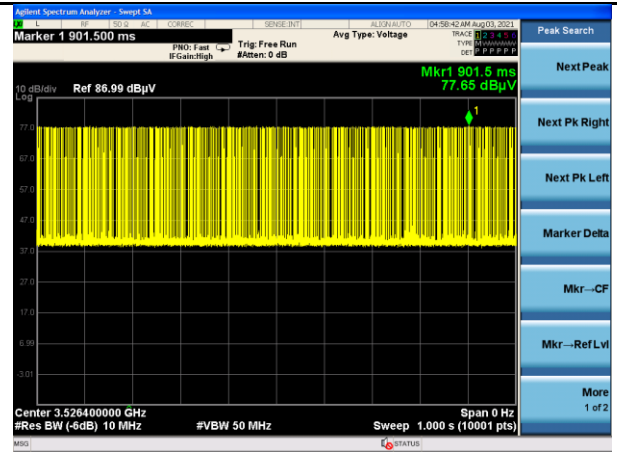


Peak Power Emission (CH1) – Zoom

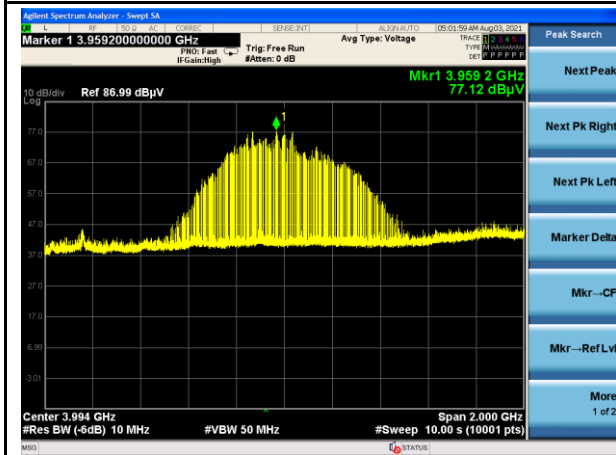


Peak Power Emission (CH2) – Peak search

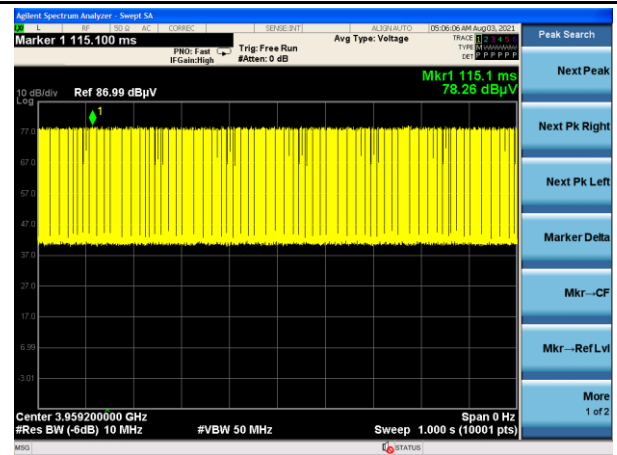


Peak Power Emission (CH2) – Zoom

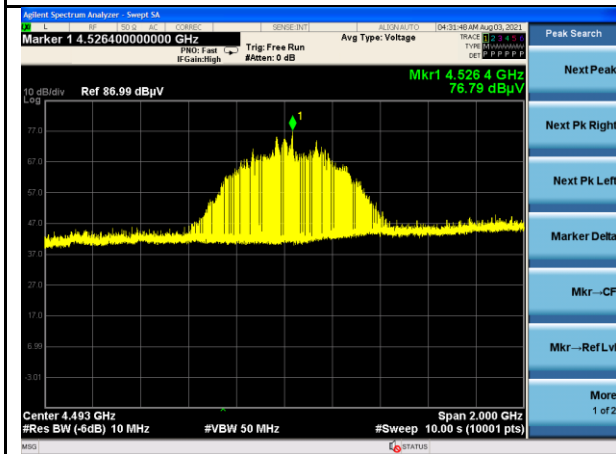


Peak Power Emission (CH3) – Peak search

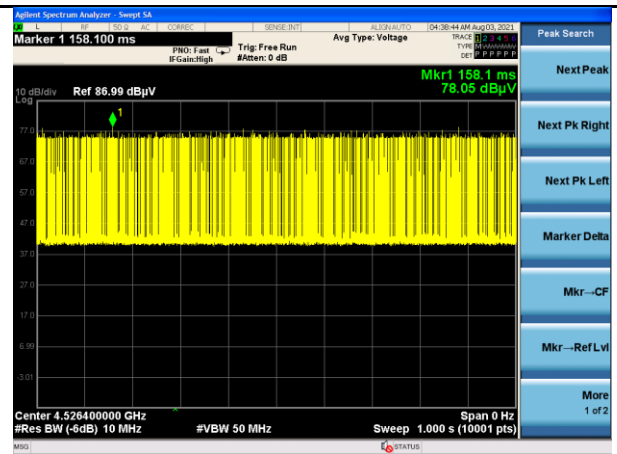


Peak Power Emission (CH3) – Zoom

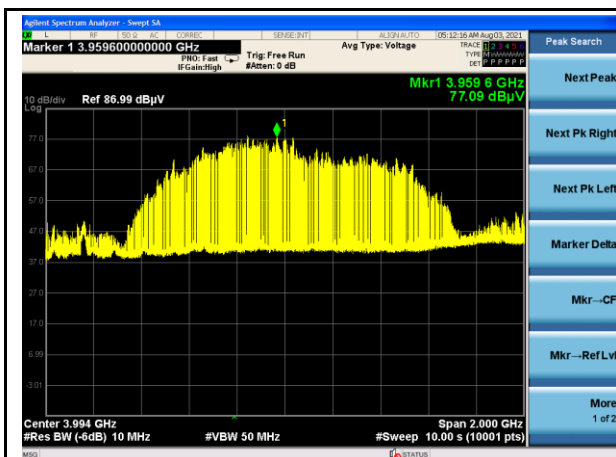


Peak Power Emission (CH4) – Peak search

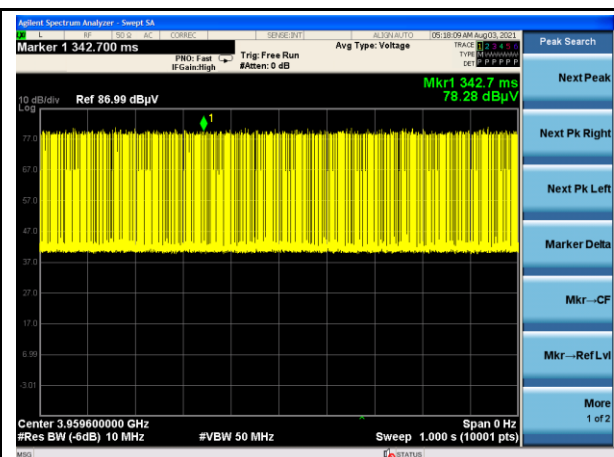


Peak Power Emission (CH4) – Zoom

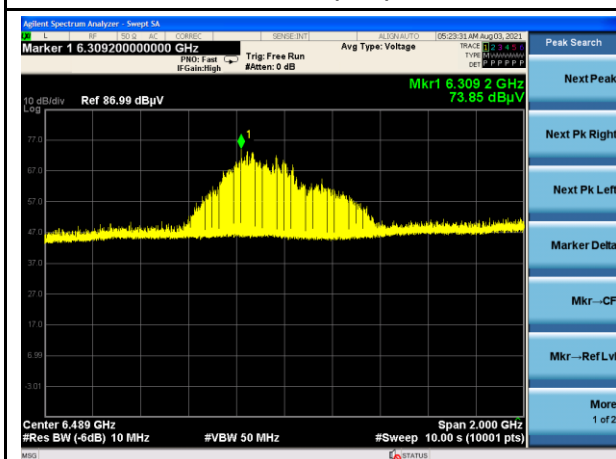


Peak Power Emission (CH5) – Peak search

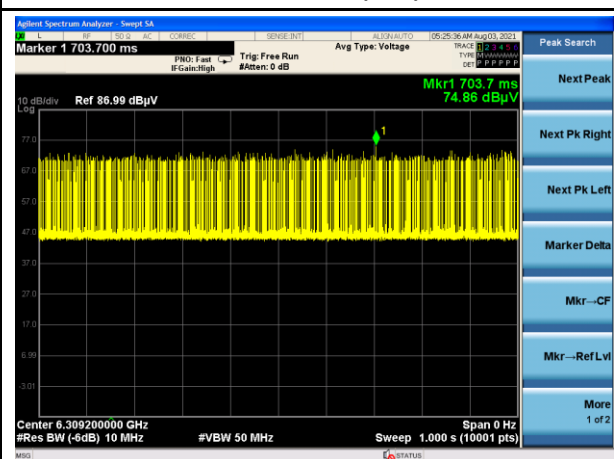

Peak Power Emission (CH5) – Zoom

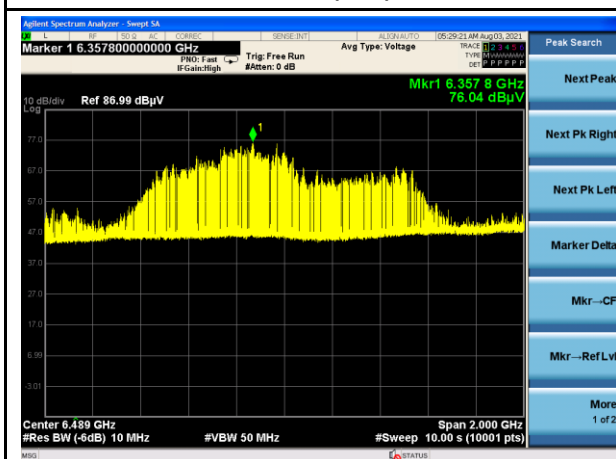

Peak Power Emission (CH7) – Peak search

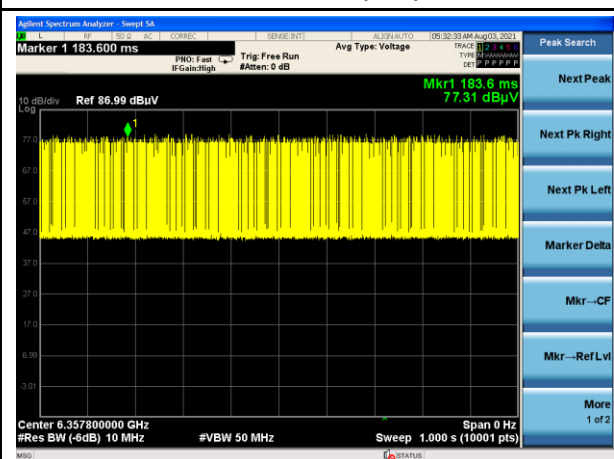

Peak Power Emission (CH7) – Zoom

8 EUT and Test Setup Photos

See FCC exhibits

9 Test Instrument List

Equipment	Manufacturer	Model	Instrument Number	Cal. Date	Cal. Due
Semi-Anechoic Chamber	ETS-Lindgren	10M	VL001	10/18/2020	10/18/2021
Shielding Control Room	ETS-Lindgren	Series 81	VL006	N/A	N/A
Spectrum Analyzer	Keysight	N9020A	MY50110074	06/17/2021	06/17/2022
Spectrum Analyser (9kHz-40GHz)	R&S	FSP38	100630	06/15/2021	06/15/2022
EMC Test Receiver	R&S	ESL6	100230	06/14/2021	06/14/2022
LISN (9KHz – 30MHz)	EMCO	3816/2	9705-1066	05/04/2021	05/04/2022
Bi-Log Antenna	ETS-Lindgren	3142E	217921	11/15/2020	11/15/2021
Horn Antenna (1-18GHz)	Electro-Metrics	EM-6961	6292	05/14/2021	05/14/2022
Horn Antenna (18-40GHz)	Com-Power	AH-840	101109	06/24/2021	06/24/2022
Preamplifier	RF Bay, Inc.	LPA-10-20	11180621	07/15/2021	07/15/2022
True RMS Multi-meter	UNI-T	UT181A	C173014829	05/05/2021	05/05/2022
Temp / Humidity / Pressure Meter	PCE Instruments	PCE-THB 40	R062028	05/15/2021	05/15/2022
RF Attenuator	Pasternack	PE7005-3	VL061	07/16/2021	07/16/2022
Preamplifier 100KHz - 40GHz	Aeroflex	33711-392-77150-11	064	07/16/2021	07/16/2022
EM Center Control	ETS-Lindgren	7006-001	160136	N/A	N/A
Turn Table	ETS-Lindgren	2181-3.03	VL002	N/A	N/A
Boresight Antenna Tower	ETS-Lindgren	2171B	VL003	N/A	N/A
Loop Antenna (9k-30MHz)	Com-Power	AL-130	121012	05/16/2021	05/16/2122
RE test cable(below 6GHz)	Vista	RE-6GHz-01	RE-6GHz-01	07/16/2021	07/16/2022
RE test cable (1-18GHz)	PhaseTrack	II-240	RE-18GHz-01	07/16/2021	07/16/2022
RE test cable (>18GHz)	Sucoflex	104	344903/4	07/16/2021	07/16/2022
Pulse limiter	Com-Power	LIT-930A	531727	07/16/2021	07/16/2022
CE test cable #1	FIRST RF	FRF-C-1002-001	CE-6GHz-01	07/16/2021	07/16/2022
CE test cable#2	FIRST RF	FRF-C-1002-001	CE-6GHz-02	07/16/2021	07/16/2022