



# Emissions Test Report

**EUT Name:** EzClean

**Model No.:** SC1500

CFR 47 Part 15.247: 2020 and RSS 247: 2017

*Prepared for:*

SoClean Inc.  
12 Vose farm road  
Petersborough, NH, 03458 U.S.A.

*Prepared by:*

TUV Rheinland of North America, Inc.  
5015 Brandin Ct.  
Fremont, CA 94538  
Tel: (925) 249-9123  
Fax: (925) 249-9124  
<http://www.tuv.com/>

*Report/Issue Date:* July 27, 2020  
*Job #* 234157779  
*Report Number:* 32062980.001

## Revisions

Note: Latest revision report will replace all previous reports.

# Statement of Compliance

*Manufacturer:* SoClean Inc.  
12 Vose farm road  
Petersborough, NH, 03458

*Requester / Applicant:* SoClean Inc.

*Name of Equipment:* EzClean  
*Model No.* SC1500

*Type of Equipment:* Intentional Radiator

*Application of Regulations:* CFR 47 Part 15.247: 2020 and RSS 247: 2017

*Test Dates:* July 20th, 2020 to July 22nd, 2020

## Guidance Documents:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

## Test Methods:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.

Rachana Khanduri

Test Engineer

Osvaldo Casorla

A2LA Signatory

Date July 27, 2020



Industry  
Canada

**Testing Cert #3331.02**

**US1131**

**2932D**

<b>1</b>	<b><i>Executive Summary</i></b>	<b>7</b>
1.1	Scope	7
1.2	Purpose	7
1.3	Summary of Test Results	8
1.4	Special Accessories	8
1.5	Equipment Modifications	8
<b>2</b>	<b><i>Laboratory Information</i></b>	<b>9</b>
2.1	Accreditations & Endorsements	9
2.1.1	US Federal Communications Commission	9
2.1.2	NIST / A2LA	9
2.1.3	Canada – Industry Canada	9
2.1.4	Japan – VCCI	9
2.1.5	Acceptance by Mutual Recognition Arrangement	10
2.2	Test Facilities	10
2.2.1	Emission Test Facility	10
2.3	Measurement Uncertainty	10
2.3.1	Sample Calculation – radiated & conducted emissions	11
2.3.2	Measurement Uncertainty	11
2.4	Calibration Traceability	11
<b>3</b>	<b><i>Product Information</i></b>	<b>12</b>
3.1	Product Description	12
3.2	Equipment Configuration	12
3.3	Operating Mode	12
<b>4</b>	<b><i>Emissions</i></b>	<b>13</b>
4.1	Out of Band Emissions: Restricted Band Edge	13
4.1.1	Test Method	13
4.1.2	Test Results	14
4.2	Transmitter Spurious Emissions	17
4.2.1	Test Methodology	17
4.2.2	Test Setup:	18
4.2.3	Transmitter Spurious Emission Limit	19
4.2.4	Test Results	19
<b>5</b>	<b><i>Test Equipment List</i></b>	<b>31</b>
5.1	Equipment List	31
<b>6</b>	<b><i>EMC Test Plan</i></b>	<b>32</b>
6.1	Introduction	32
6.2	Customer	32

## Table of Contents

<b>6.3</b>	<b>Equipment Under Test (EUT)</b>	<b>32</b>
<b>6.4</b>	<b>Product Specifications</b>	<b>33</b>
<b>6.5</b>	<b>Test Specifications</b>	<b>35</b>

## Index of Tables

<b>Table 1:</b> Summary of Test Results .....	8
<b>Table 2:</b> Emissions at the Band-Edge – Test Results.....	14
<b>Table 3:</b> Customer Information.....	32
<b>Table 4:</b> Technical Contact Information .....	32
<b>Table 5:</b> EUT Designation.....	32
<b>Table 6:</b> EUT Specifications .....	33
<b>Table 7:</b> Antenna Information.....	34
<b>Table 8:</b> Interface Specifications.....	34
<b>Table 9:</b> Accessory Equipment .....	34
<b>Table 10:</b> Ancillary Equipment (used for test purposes only).....	34
<b>Table 11:</b> Description of Sample used for Testing.....	35
<b>Table 12:</b> Description of Test Configuration used for Radiated Measurement. ....	35
<b>Table 13:</b> Test Specifications .....	35

## 1 Executive Summary

### 1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247: 2020 and RSS 247: 2017 based on the results of testing performed on July 20, 2020 to July 22, 2020 on the EzClean Model SC1500SC1500 manufactured by SoClean Inc.. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

### 1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report. The 2404 MHz to 2480 MHz frequency band for Bluetooth, Low Energy is covered in this document.

We have verified that all testing and results leveraged from the test reports of original grant are still valid and not impacted from updates to relevant rule parts or test standards since then.

Original test reports number 31965017.001 with FCC ID: 2AVU3-SC140015.247 and IC ID: 26066-SC1400 issued on July 10, 2020.

### 1.3 Summary of Test Results

**Table 1:** Summary of Test Results

Test	Test Method ANSI C 63.10 & C63.4	Worse Case (Measured)	Result
Maximum Output Power	CFR47 15.247 (b), RSS 247 Sect. 5.4 (d)	N/A	Not tested*
DTS Bandwidth (6dB)	CFR47 15.247 (a)(2), RSS 247 Sect. 5.2 (a)	N/A	Not tested*
Peak Power Spectral Density	CFR47 15.247 (e), RSS 247 Sect. 5.2 (b)	N/A	Not tested*
Out of Band Emissions: Non-Restricted	CFR47 15.247 (d), RSS 247 Sect.5.5	N/A	Not tested*
Out of Band Emissions: Restricted	CFR47 15.247 (d), RSS 247 Sect.5.5	Class B	Complied
Transmitter Spurious Emissions	CFR47 15.247 (d), RSS 247 Sect.5.5	Class B	Complied
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.8.8	N/A	Not tested*

Note 1: This test report covers 2400 MHz to 2480 MHz band. \* = summed power.

Note 2: Class B limits were applied where applicable.

\*Refer to test report number 31965017.001 issued on July 10, 2020.

### 1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

### 1.5 Equipment Modifications

None

## 2 Laboratory Information

### 2.1 *Accreditations & Endorsements*

#### 2.1.1 US Federal Communications Commission



TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct, Fremont, CA 94538, are recognized by the Commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No. US1131). The laboratory Scopes of Accreditation include Title 47 CFR Parts 15, 18 and 90. The accreditations are updated every three years.

#### 2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2017. The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

#### 2.1.3 Canada – Industry Canada



Industry Canada Industrie Canada The Pleasanton 5-meter Semi-Anechoic Chamber, Registration No. 2932M-1, has been accepted by Industry Canada to perform testing to 3 and 5 meters based on the test procedures described in ANSI C63.4-2014. The Fremont 10-meter Semi-Anechoic Chamber, Registration No. 2932D-1, has been accepted by Industry Canada to perform testing to 3 and 10 meters based on the test procedures described in ANSI C63.4-2014.

#### 2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct, Fremont, CA 94538, have been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0326

VCCI Registration No. for Fremont: A-0327

## 2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

## 2.2 Test Facilities

Test facilities are located at 5015 Brandin Ct, Fremont, California, 94538, USA and 1279 Quarry Lane, Pleasanton, California 94566, USA (Fremont is the Pleasanton Annex).

### 2.2.1 Emission Test Facility

The Semi-Anechoic Chambers and AC Line Conducted measurement facilities used to collect radiated and conducted emissions data have been constructed in accordance with ANSI C63.7:1992. The Fremont 10 meter semi-anechoic chamber has been measured in accordance with and verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2014 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04), at test distances of 3 and 10 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02). The Pleasanton 5 meter semi-anechoic chamber has been verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2009 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04) at a test distance of 3 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02).

## 2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1<sup>st</sup> Edition, 1995.

*The Combined Standard Uncertainty* is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

*The Expanded Uncertainty* defines an interval about the result of a measurement that may be expected to encompass a large fraction of the distribution of values that could reasonably be attributed to the measurement and the fraction may be viewed as the coverage probability or level of confidence of the interval.

### 2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB $\mu$ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V / m}}{20}}$$

#### Sample radiated emissions calculation @ 30 MHz

**Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)**

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

### 2.3.2 Measurement Uncertainty

Per CISPR 16-4-2	$U_{\text{lab}}$	$U_{\text{cispr}}$
<b>Radiated Disturbance @ 10 meters</b>		
30 – 1,000 MHz	2.25 dB	4.51 dB
<b>Radiated Disturbance @ 3 meters</b>		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 18 GHz	2.47 dB	4.93 dB
<b>Conducted Disturbance @ Mains Terminals</b>		
150 kHz – 30 MHz	1.09 dB	2.18 dB
<b>Disturbance Power</b>		
30 MHz – 300 MHz	3.92 dB	4.3 dB

### 2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2017. Equipment calibration records are kept on file at the test facility.

## 3 Product Information

### 3.1 Product Description

The Model SC1500 is EzClean utilizing Bluetooth. The EUT will be in compliance with regulatory standards of regions it will be operating in.

### 3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

### 3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing.

## 4 Emissions

Testing was performed in accordance with CFR 47 Part 15.247: 2020 and RSS 247: 2017. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

### 4.1 Out of Band Emissions: Restricted Band Edge


*Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-247 Sect. 5.5, RSS-GEN Sect. 8.9 and 8.10.*

#### 4.1.1 Test Method

Radiated measurements per ANSI C63.10-2013 Section 6.10.5 were used to measure the undesirable emission requirement in restricted bands. Peak points were found and RMS Average was taken for each point found. The measurement was performed with modulation. This test was conducted on 3 channels in each mode on the EUT. The worst case measurement of each channel is recorded in this report. All channels were tested at highest power settings.

RBW is set to 1MHz, VBW is set to 3MHz.

### Test Setup

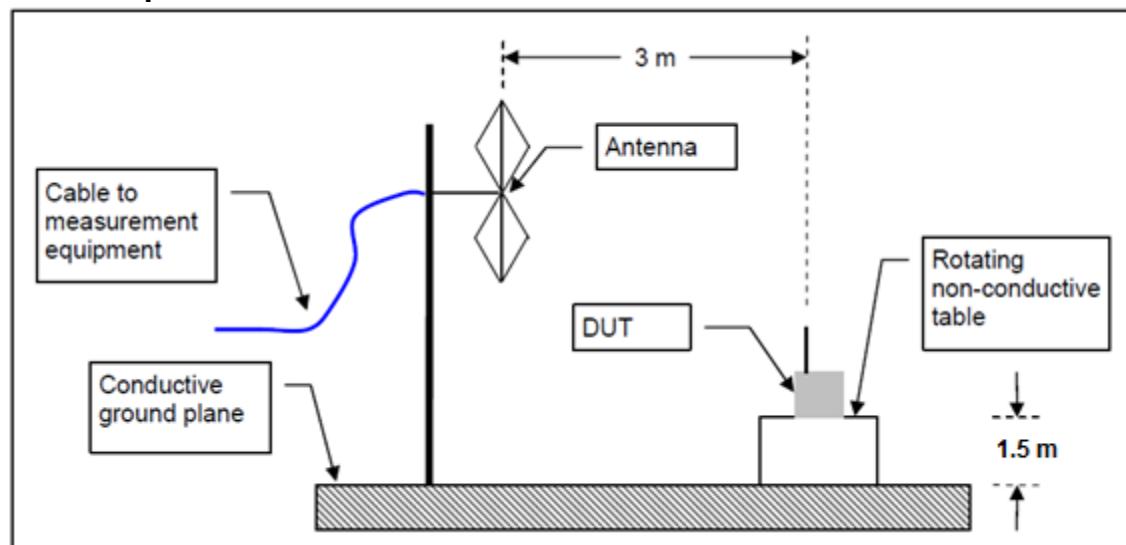


The DUT was stimulated by manufacturer provided test software that is not available to the end user.

#### 4.1.2 Test Results


**Table 2:** Emissions at the Band-Edge – Test Results

<b>Test Conditions:</b> Radiated Measurement, Normal Temperature and Voltage							
<b>Lower Restricted Band Edge</b>							
<b>Freq. (MHz)</b>	<b>Mode</b>	<b>Center Freq (MHz)</b>	<b>Detector (Average/Peak)</b>	<b>Measured (dBuV/m)</b>	<b>Limit (dBuV/m)</b>	<b>Margin</b>	<b>Results</b>
2312.381	BLE GFSK 1Mbps	2402	Average	52.57	54	-1.43	Pass
2312.381	BLE GFSK 1Mbps	2402	Peak	62.10	74	-11.90	Pass
<b>Upper Restricted Band Edge</b>							
<b>Freq. (MHz)</b>	<b>Mode</b>	<b>Center Freq (MHz)</b>	<b>Detector (Average/Peak)</b>	<b>Measured (dBuV/m)</b>	<b>Limit (dBuV/m)</b>	<b>Margin</b>	<b>Results</b>
2607.814	BLE GFSK 1Mbps	2480	Average	39.83	54	-14.17	Pass
2607.814	BLE GFSK 1Mbps	2480	Peak	49.36	74	-24.64	Pass

**Note:** 1. The DCCF (Average Detector) is included in this table, the following plots are of peak values

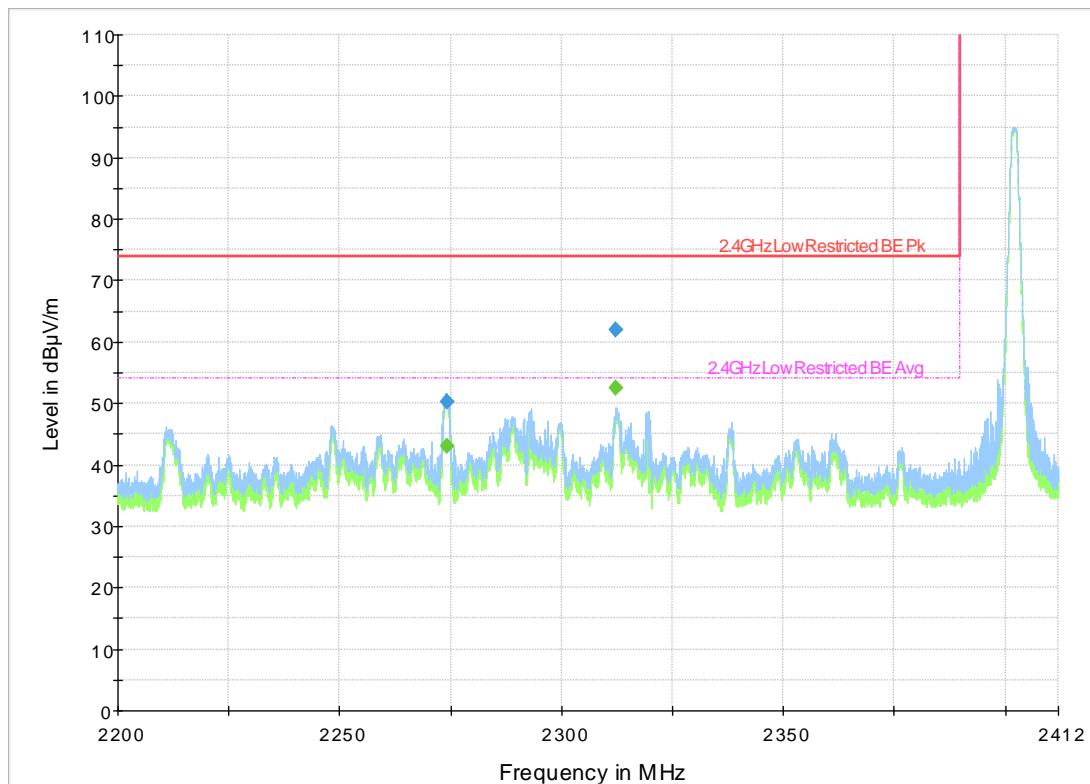

**Plot 1.** 2402MHz, Lower Band Edge, Restricted

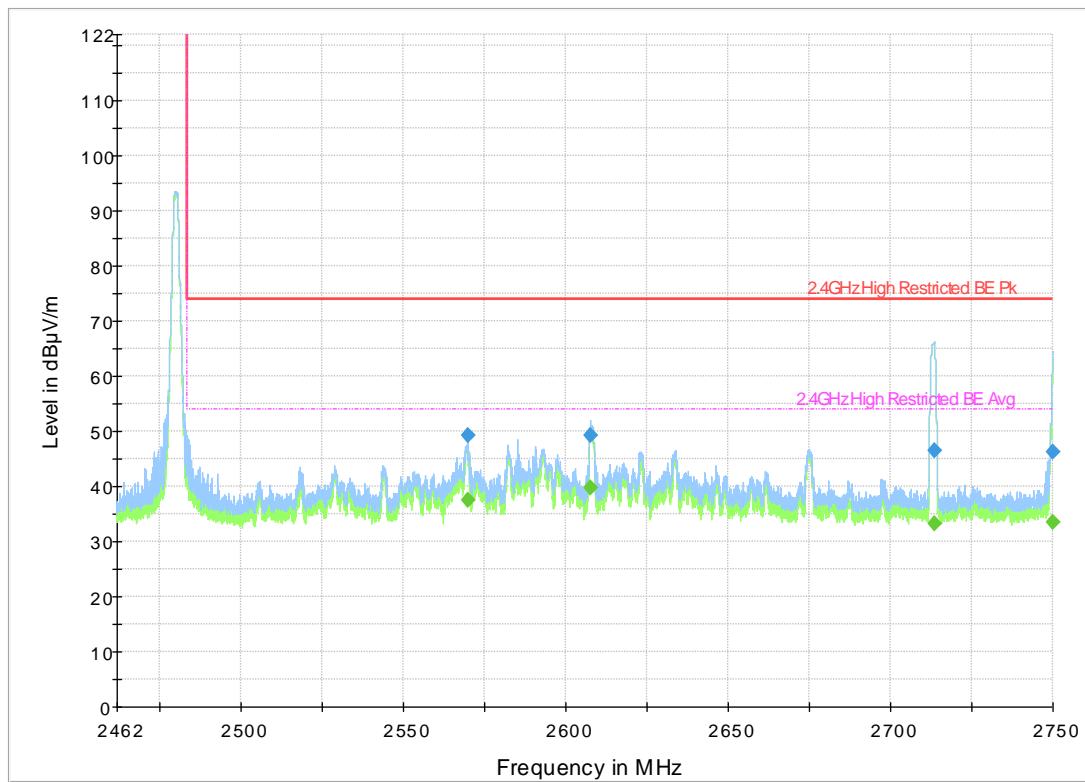

**Plot 2.** 2480MHz, Upper Band Edge, Restricted

## 4.2 Transmitter Spurious Emissions

*Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS 247 Sect.5.5, RSS-GEN Sect. 8.9 and 8.10.*

### 4.2.1 Test Methodology

#### 4.2.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Pre-scans were performed to determine the worst data rate / chains.

#### 4.2.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

RBW is set to 200Hz and VBW is set to 1 KHz for 9 KHz-150 KHz.

RBW is set to 9 KHz and VBW is set to 30 KHz for 150 KHz-30 MHz

RBW is set to 100 KHz, VBW is set to 300 KHz for 30MHz-1GHz.

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz.


#### 4.2.1.3 Deviations

None.


#### 4.2.2 Test Setup:

All tests were conducted at full power on low, middle, and high channels. The DUT was stimulated by manufacturer provided test software that is not available to the end user.

##### 30MHz-1GHz

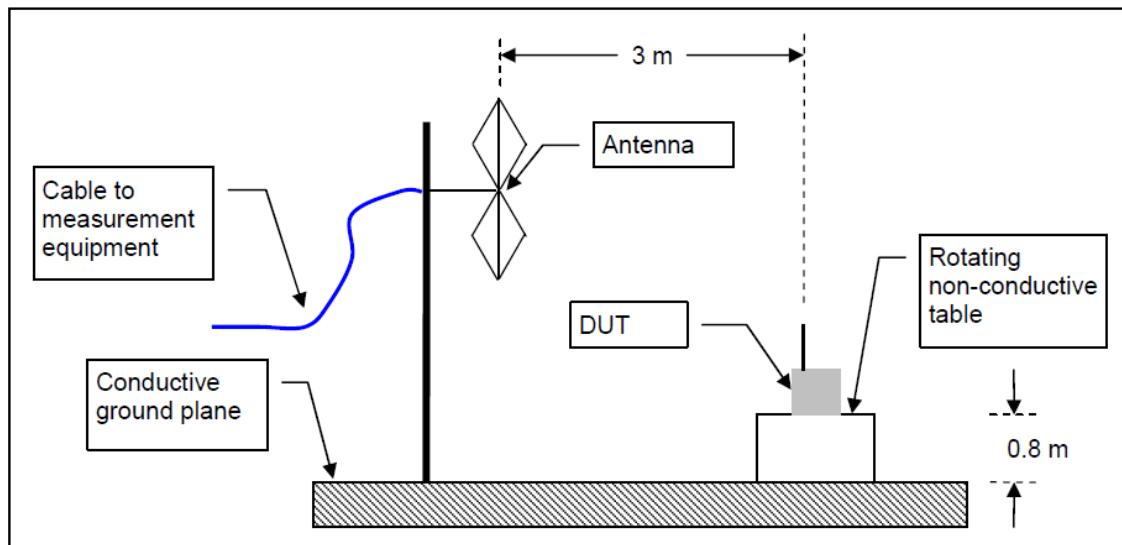

##### 1-26GHz

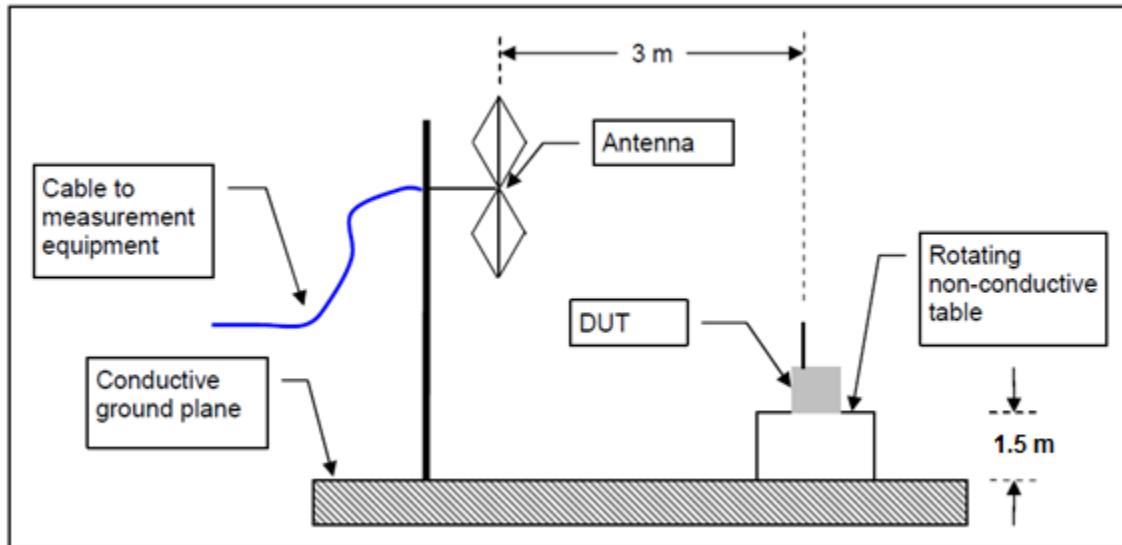

#### 4.2.3 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2015 and RSS Gen Sect. 8.9 and 8.10: 2014.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F (kHz)	300
0.490-1.705.....	24000/F (kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

#### 4.2.4 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and test plan.


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Note: Below 30 MHz was investigated and no emissions was found above noise floor.

Note: The 2.4 GHz notch filter was used to protect the front end of the pre-amp.


#### 4.2.4.1 Plots

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol (0/90)	Azimuth (deg)	Corr. (dB/m)
0.606954	43.82	71.94	28.12	1000.0	9.000	100.0	0	-93.0	15.5
0.832410	40.64	69.20	28.56	1000.0	9.000	100.0	0	180.0	15.6
1.251984	36.34	65.65	29.31	1000.0	9.000	100.0	0	130.0	15.8
1.848285	32.36	69.54	37.18	1000.0	9.000	100.0	0	-133.0	15.9
2.838660	28.40	69.54	41.14	1000.0	9.000	100.0	0	-159.0	15.7
6.147621	22.09	69.54	47.45	1000.0	9.000	100.0	0	-77.0	15.3

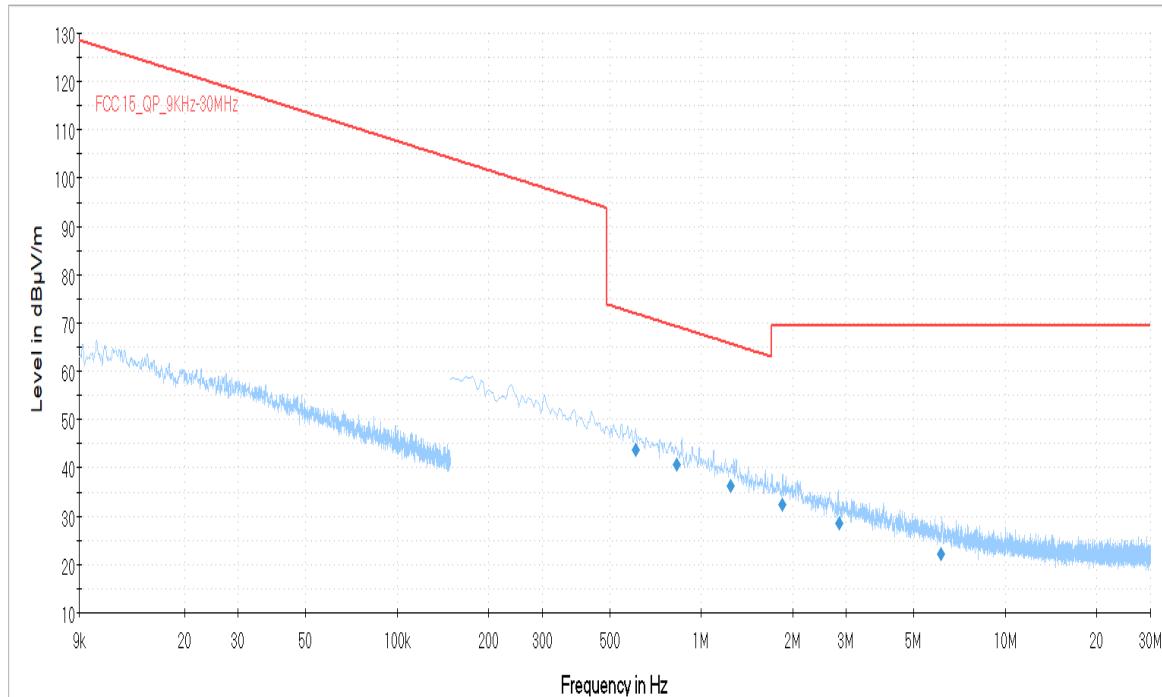


Plot 3. 9kHz-30MHz, 2402MHz - 0 degree

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.730812	42.01	70.33	28.32	1000.0	9.000	100.0	90	180.0	15.5
1.095135	37.89	66.82	28.92	1000.0	9.000	100.0	90	170.0	15.8
1.467570	34.74	64.27	29.53	1000.0	9.000	100.0	90	31.0	15.8
2.617401	29.06	69.54	40.48	1000.0	9.000	100.0	90	58.0	15.8
6.147831	21.98	69.54	47.56	1000.0	9.000	100.0	90	74.0	15.3
12.676695	18.35	69.54	51.19	1000.0	9.000	100.0	90	-14.0	15.1

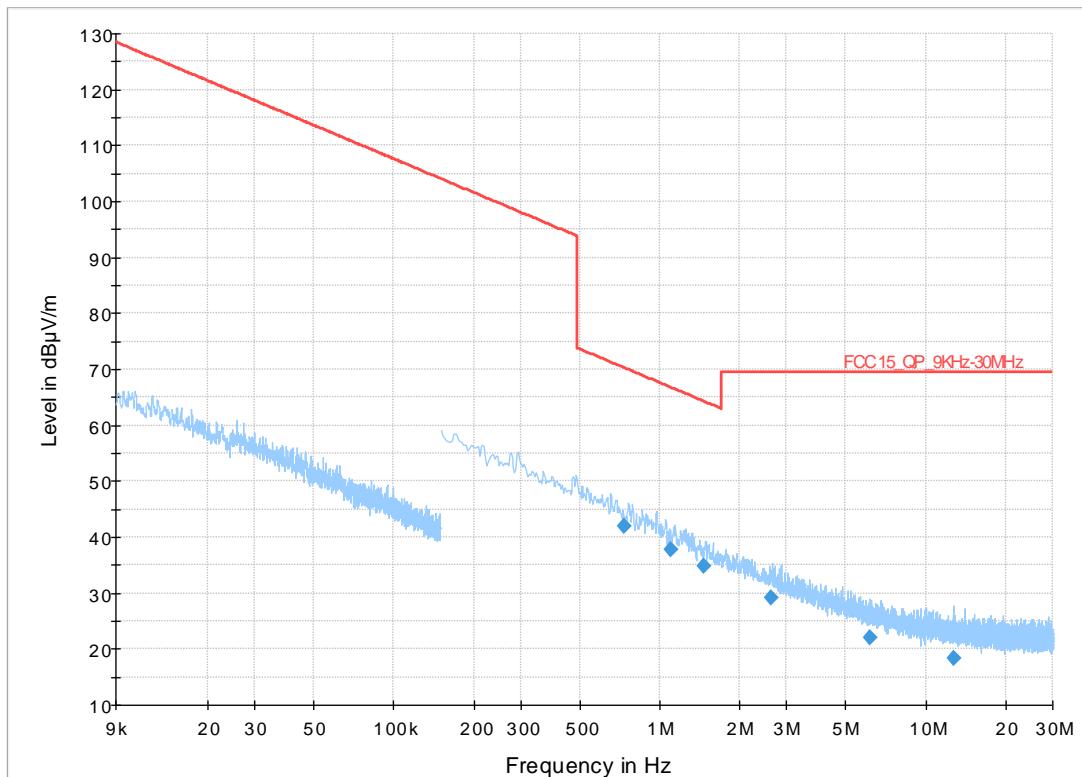


Plot 4. 9kHz-30MHz, 2402MHz - 90 degree

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
54.654760	27.02	40.00	12.98	1000.0	120.000	103.0	V	-112.0	-18.0
120.011440	23.79	43.52	19.73	1000.0	120.000	103.0	V	-158.0	-10.7
197.786000	20.93	43.52	22.59	1000.0	120.000	103.0	V	-125.0	-14.6
296.702680	21.95	46.00	24.05	1000.0	120.000	104.0	V	180.0	-13.0
372.336000	16.65	46.00	29.35	1000.0	120.000	107.0	V	-180.0	-10.5
931.794040	19.28	46.00	26.72	1000.0	120.000	103.0	V	-180.0	-0.7

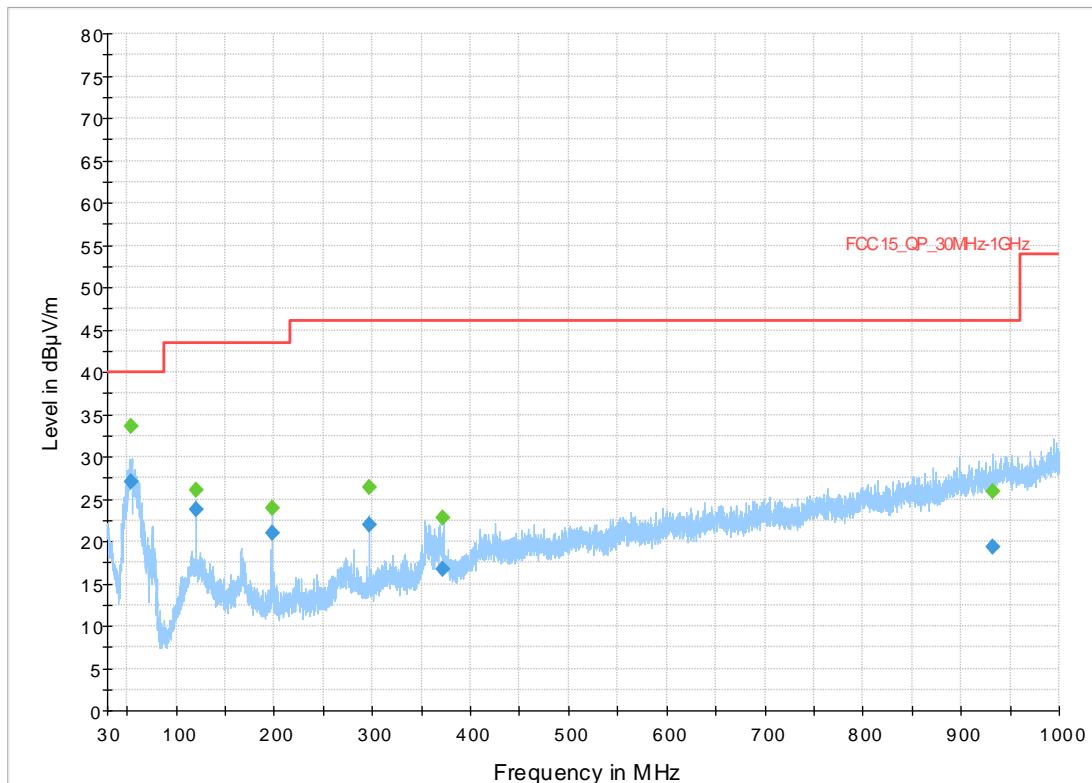


Plot 5. 30MHz-1GHz, 2402MHz

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.068720	27.53	40.00	12.47	1000.0	120.000	104.0	V	-180.0	-18.0
120.010840	23.64	43.52	19.88	1000.0	120.000	104.0	V	-151.0	-10.7
197.791760	19.89	43.52	23.63	1000.0	120.000	104.0	V	27.0	-14.6
296.709400	22.65	46.00	23.35	1000.0	120.000	104.0	V	180.0	-13.0
369.890160	18.01	46.00	27.99	1000.0	120.000	105.0	V	180.0	-10.4
901.788480	19.26	46.00	26.74	1000.0	120.000	104.0	V	-180.0	-1.3

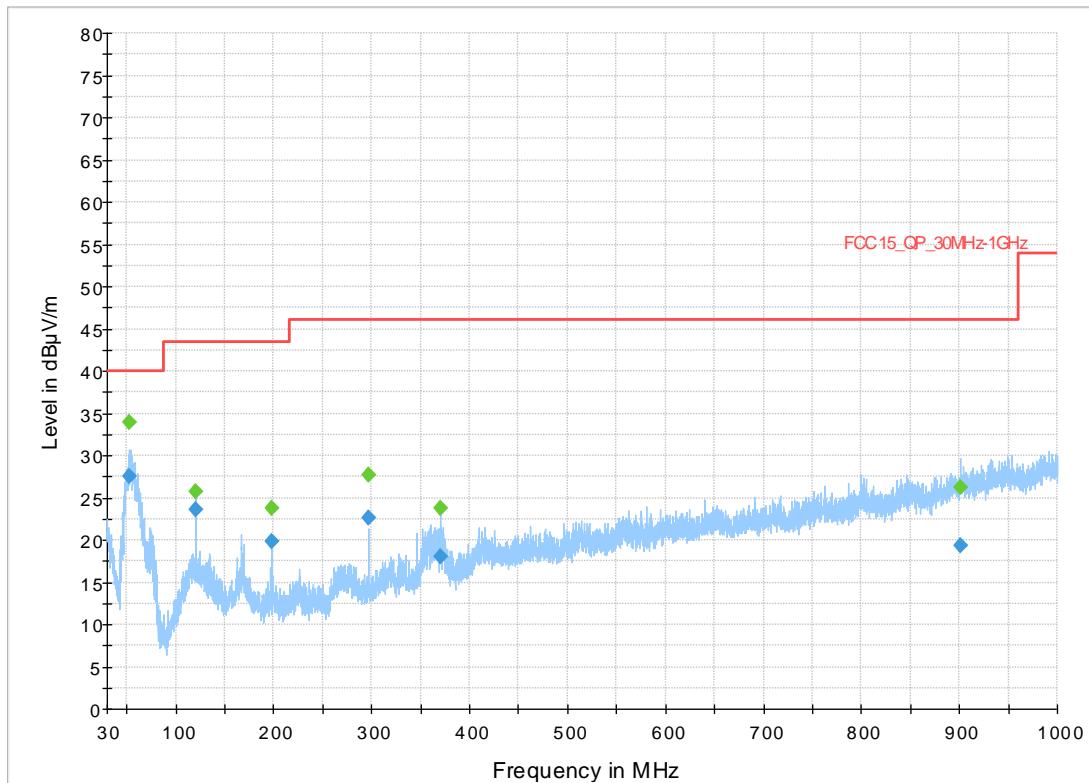


**Plot 6.** 30MHz-1GHz, 2440MHz

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.952880	25.79	40.00	14.21	1000.0	120.000	105.0	V	-180.0	-18.1
53.945040	27.41	40.00	12.59	1000.0	120.000	106.0	V	-69.0	-18.0
120.004720	23.76	43.52	19.76	1000.0	120.000	105.0	V	-180.0	-10.7
197.803520	21.72	43.52	21.80	1000.0	120.000	106.0	V	50.0	-14.6
296.693920	22.26	46.00	23.74	1000.0	120.000	106.0	V	180.0	-13.0
373.701080	17.18	46.00	28.82	1000.0	120.000	107.0	V	180.0	-10.6

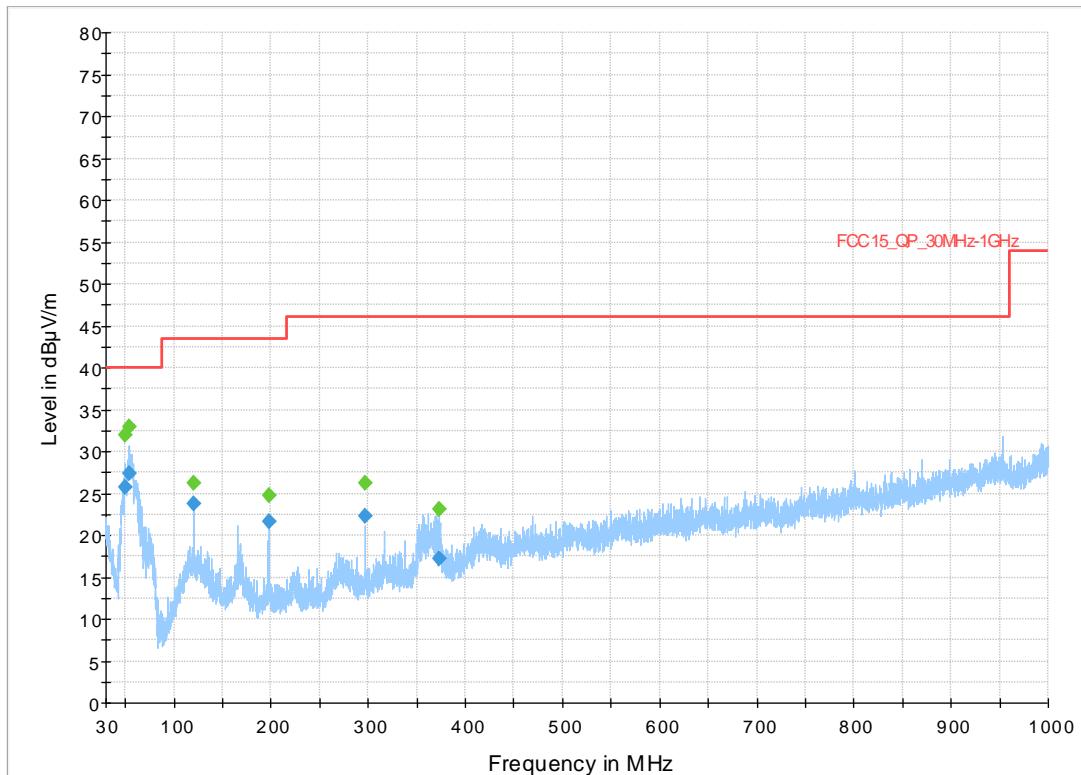


Plot 7. 30MHz-1GHz, 2480MHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4822.611000	---	26.68	54.00	27.32	1000.0	1000.000	103.0	H	-180.0	-24.2
4822.611000	39.97	---	74.00	34.03	1000.0	1000.000	103.0	H	-180.0	-24.2
9609.451500	44.88	---	74.00	29.12	1000.0	1000.000	200.0	V	180.0	-16.4
9609.451500	---	31.62	54.00	22.38	1000.0	1000.000	200.0	V	180.0	-16.4
17945.808500	53.50	---	74.00	20.50	1000.0	1000.000	103.0	V	36.0	-6.0
17945.808500	---	40.32	54.00	13.68	1000.0	1000.000	103.0	V	36.0	-6.0

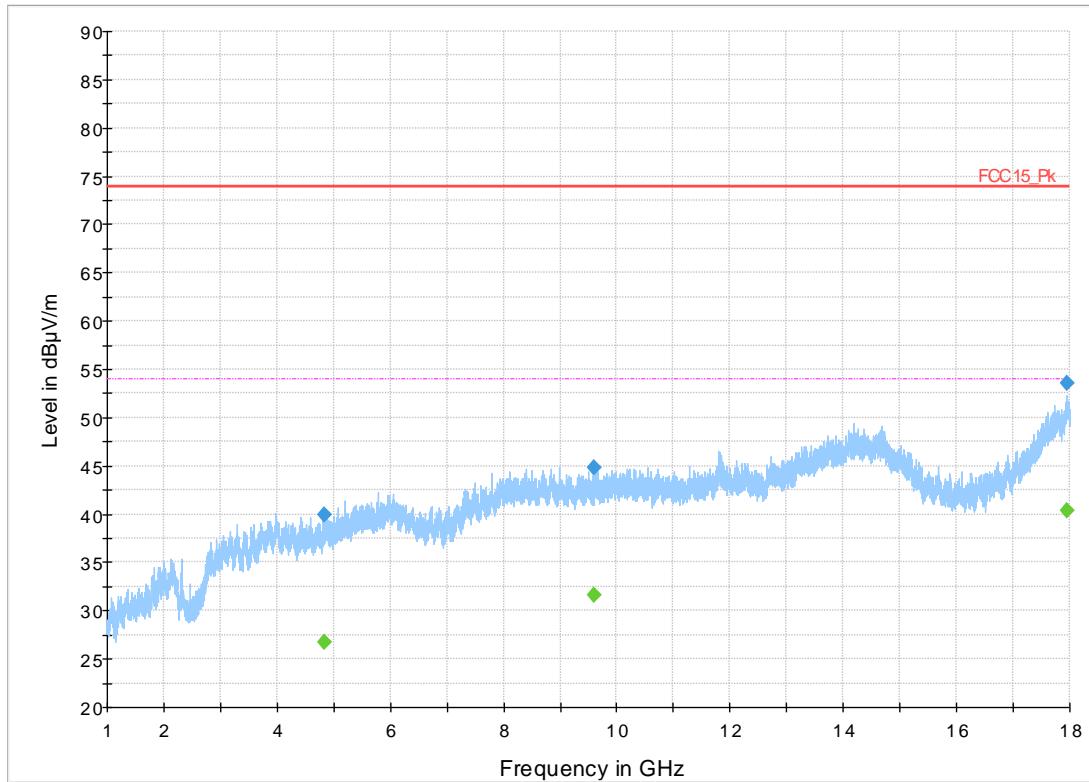


Plot 8. 1-18GHz, 2402MHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4880.760000	---	53.30	54.00	0.70	1000.0	1000.000	201.0	H	-41.0	-24.2
4880.760000	62.32	---	74.00	11.68	1000.0	1000.000	201.0	H	-41.0	-24.2
7321.139000	49.41	---	74.00	24.59	1000.0	1000.000	104.0	V	88.0	-19.6
7321.139000	---	38.87	54.00	15.13	1000.0	1000.000	104.0	V	88.0	-19.6
17945.688500	52.18	---	74.00	21.82	1000.0	1000.000	103.0	V	-180.0	-6.0
17945.688500	---	38.95	54.00	15.05	1000.0	1000.000	103.0	V	-180.0	-6.0

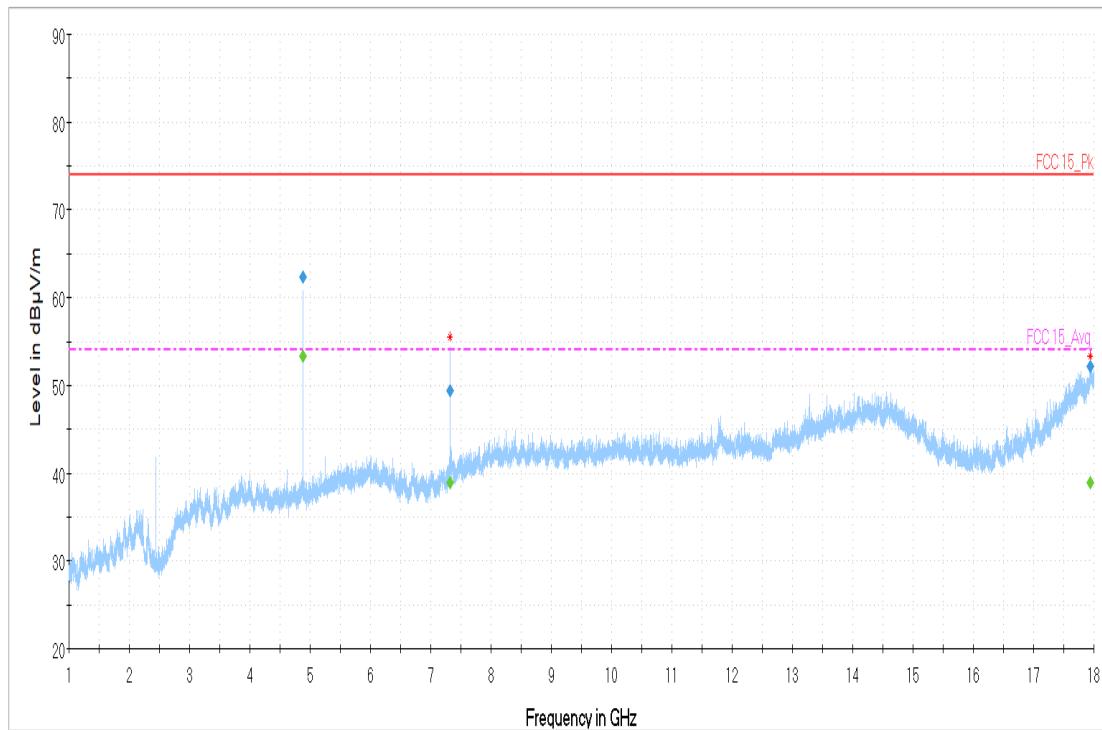


Plot 9. 1-18GHz, 2440MHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.498500	60.31	---	74.00	13.69	1000.0	1000.000	201.0	H	-61.0	-24.1
4959.498500	---	52.34	54.00	1.66	1000.0	1000.000	201.0	H	-61.0	-24.1
7439.292000	51.08	---	74.00	22.92	1000.0	1000.000	104.0	V	-30.0	-19.3
7439.292000	---	41.59	54.00	12.41	1000.0	1000.000	104.0	V	-30.0	-19.3
17968.219000	---	38.92	54.00	15.08	1000.0	1000.000	103.0	H	180.0	-5.9
17968.219000	52.60	---	74.00	21.40	1000.0	1000.000	103.0	H	180.0	-5.9

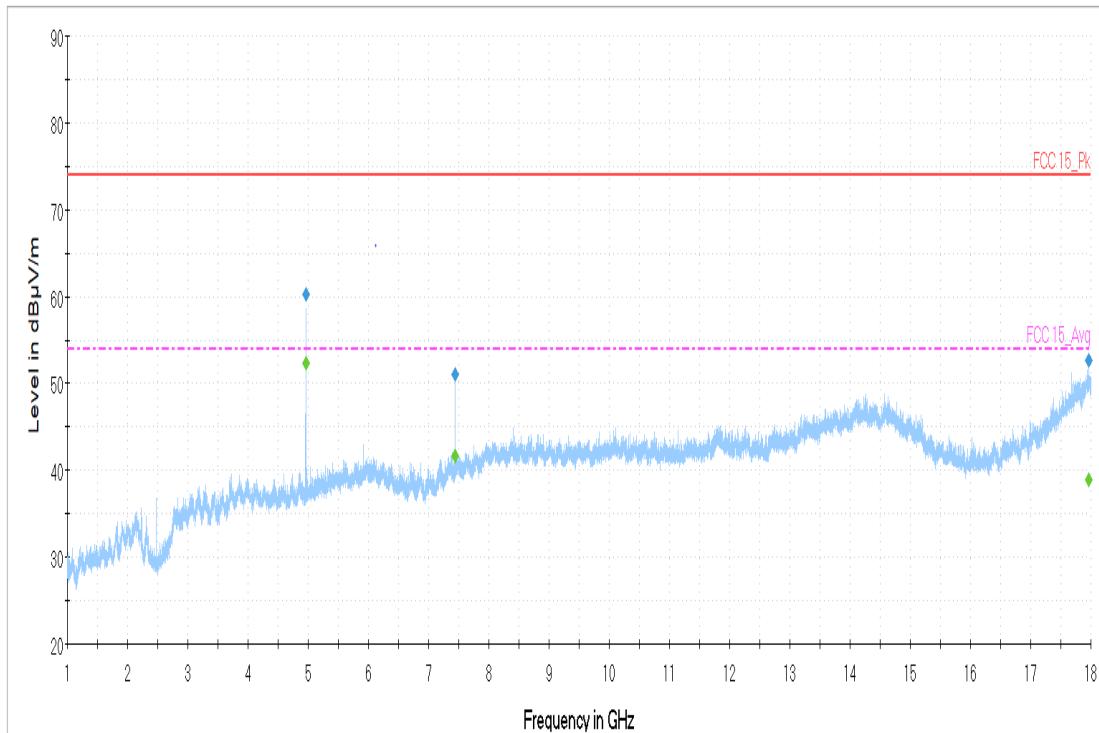


Plot 10. 1-18GHz, 2480MHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19779.380000	---	30.99	54.00	23.01	1000.0	1000.000	176.0	H	-180.0	11.8
19779.380000	44.06	---	74.00	29.94	1000.0	1000.000	176.0	H	-180.0	11.8
22558.233125	---	31.10	54.00	22.90	1000.0	1000.000	176.0	H	-155.0	12.0
22558.233125	44.01	---	74.00	29.99	1000.0	1000.000	176.0	H	-155.0	12.0
24643.505625	---	32.49	54.00	21.51	1000.0	1000.000	128.0	V	180.0	12.0
24643.505625	45.26	---	74.00	28.74	1000.0	1000.000	128.0	V	180.0	12.0

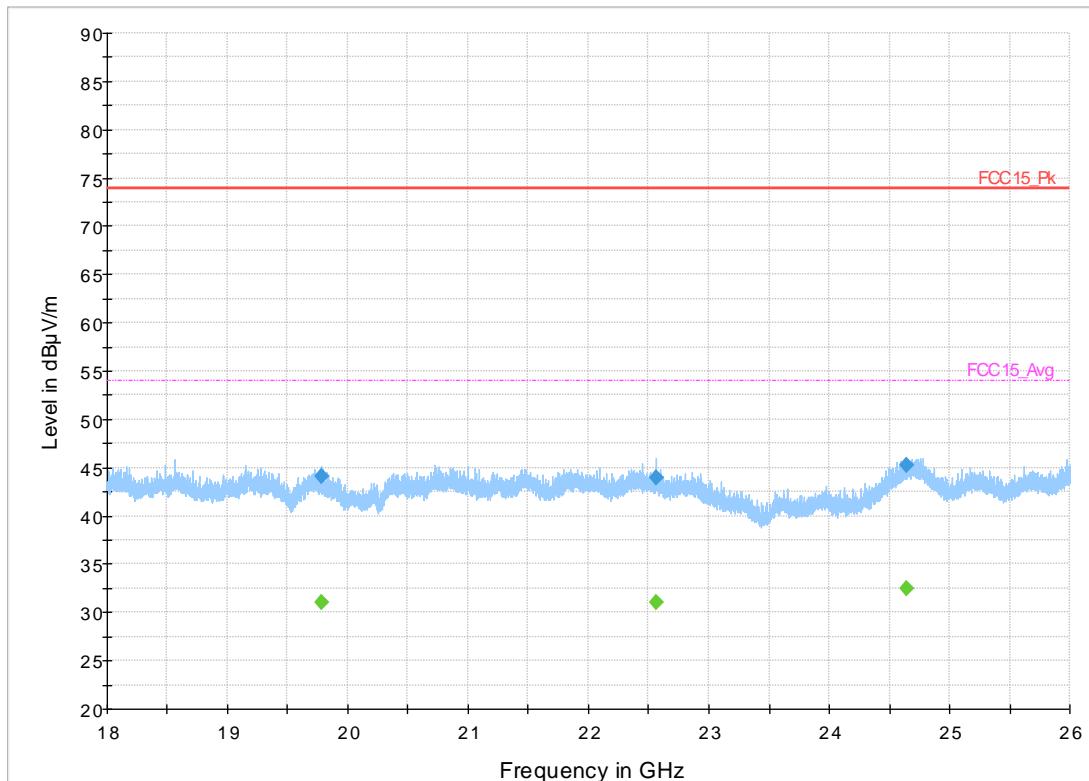


Plot 11. 18-26GHz, 2402MHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18640.621250	42.30	---	74.00	31.70	1000.0	1000.000	129.0	V	-180.0	11.1
18640.621250	---	29.27	54.00	24.73	1000.0	1000.000	129.0	V	-180.0	11.1
21464.193125	43.31	---	74.00	30.69	1000.0	1000.000	129.0	V	72.0	12.1
21464.193125	---	30.81	54.00	23.19	1000.0	1000.000	129.0	V	72.0	12.1
24726.119375	---	32.45	54.00	21.55	1000.0	1000.000	128.0	H	-180.0	11.9
24726.119375	45.34	---	74.00	28.66	1000.0	1000.000	128.0	H	-180.0	11.9

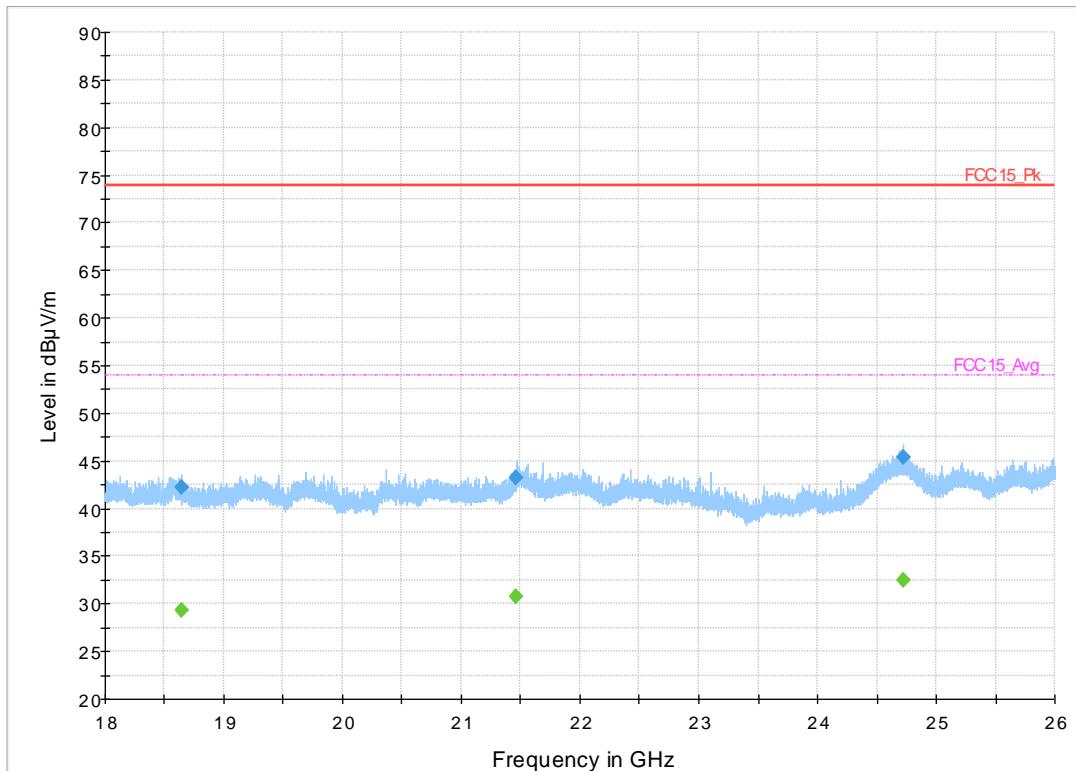

Plot 12. 18-26GHz, 2440MHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19684.753750	44.56	---	74.00	29.44	1000.0	1000.000	176.0	V	180.0	11.8
19684.753750	---	31.38	54.00	22.62	1000.0	1000.000	176.0	V	180.0	11.8
21097.233125	---	30.71	54.00	23.29	1000.0	1000.000	176.0	V	93.0	12.0
21097.233125	43.46	---	74.00	30.54	1000.0	1000.000	176.0	V	93.0	12.0
24696.758125	45.74	---	74.00	28.26	1000.0	1000.000	128.0	V	-180.0	12.1
24696.758125	---	32.73	54.00	21.27	1000.0	1000.000	128.0	V	-180.0	12.1

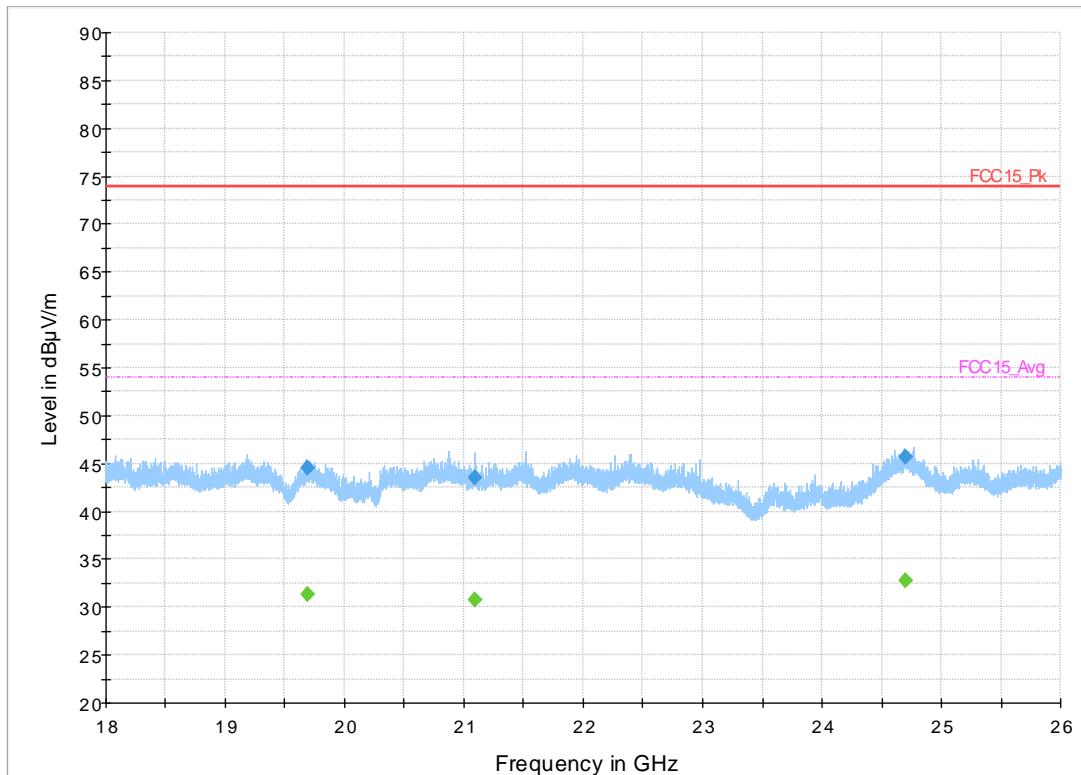

Plot 13. 18-26GHz, 2480MHz

## 5 Test Equipment List

### 5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal mm/dd/yyyy	Next Cal mm/dd/yyyy
EMI Receiver	R&S	ESW, 2Hz-44GHz	838399	1/10/2019	01/10/2021
Preamplifier, 9 kHz – 1 GHz	Sonoma	310N	213221	08/06/2020	08/06/2022
Bilog Antenna	Sunol Sciences	JB3	A061907	12/19/2018	12/19/2020
Preamp, 1-10 GHz	HP	8449B	3008A01013	06/08/2020	06/08/2022
Preamplifier, 1-18GHz	Miteq	AMF-70-01001800-30-10P-L	2074297	01/16/2019	01/16/2021
Pre-Amp/Antenna	Rohde & Schwarz	TS-PR40	100012	06/13/2020	06/13/2022
Pre-Amp/Antenna	Rohde & Schwarz	TS-PR26	100011	06/13/2020	06/13/2022
Horn Antenna	Sunol Sciences	DRh-118	A040806	06/17/2020	06/17/2022
Active Loop Antenna	EMCO	6502	00062531	07/01/2019	07/01/2021
Amplifier	Sonoma	310N	185516	N/A (See Note)	
1.6 GHz Low Pass Filter	K&L Microwave	8L120-X1600-0/09135-0249	UA691-35	N/A (See Note)	
2.4 GHz Notch Filter	Micro-Tronics	BRM50702	009	01/15/2020	01/15/2021

Note: Equipment is characterized before use.

## 6 EMC Test Plan

### 6.1 *Introduction*

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

### 6.2 *Customer*

**Table 3:** Customer Information

Company Name	SoClean Inc.
Address	12 Vose farm road
City, State, Zip	Petersborough, NH, 03458
Country	USA

**Table 4:** Technical Contact Information

Name	Alex Wang
E-mail	awang@baycomp.com

### 6.3 *Equipment Under Test (EUT)*

The information provided in the following table should be listed as it should appear in the final report. For those products that have only a model name, list the model number as *non-applicable* and vice-versa.

**Table 5:** EUT Designation

Product Name	EzClean
Model Number	SC1500
System Name	EzClean
Product Description	High-touch item disinfecter.

## 6.4 Product Specifications

**Table 6:** EUT Specifications

EUT Specifications	
AC Input	AC Adapter: 100-240VAC, DC:12V 1.5A
Environment	Indoor
Operating Temperature Range:	-20°C 38°C
Multiple Feeds:	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No
Product Marketing Name (PMN)	EzClean
Hardware Version Identification Number (HVIN)	Rev 14
Firmware Version Identification Number (FVIN)	EzClean complianceTesting 17839
RF Test Software Version	EzClean complianceTesting 17839
Operating Modes	BT Low Energy, 1Mbps
Transmitter Frequency Band	2.4 GHz – 2.480 GHz
Power Setting @ Operating Channel	0dBm
Antenna Type	PCB Trace
Antenna Gain	0 dBi
Modulation	FSK
TX/RX Chain (s)	N/A
Type of Equipment	<input checked="" type="checkbox"/> Table Top <input type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet <input type="checkbox"/> Other:
<b>Note:</b> EUT will be on / transmitted at all times with the highest power levels and antenna gains per channel.	

**Table 7:** Antenna Information

Number	Antenna Type	Description	Max Gain (dBi)
Antenna 0	PCB trace antenna	Bluetooth Low Energy	0

**Table 8:** Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
USB	USB	Yes	< 3m	M

**Table 9:** Accessory Equipment

Equipment	Manufacturer	Model	Serial	Comment
N/A	N/A	N/A	N/A	N/A
<b>Note:</b> None.				

**Table 10:** Ancillary Equipment (used for test purposes only)

Equipment	Manufacturer	Model	Serial	Used for
Laptop	Dell	Inspiron 15-5548	N/A	Setup EUT operating modes/ channels via a USB connection to pins in EUT

**Table 11:** Description of Sample used for Testing

Sample Number	Device	Serial Number	Configuration	Used For
1	SC1500	SC1500200501100043	Radiated Sample	TX Spurious Emissions, Bandedge
<b>Note:</b> None.				

**Table 12:** Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Photo (X-Axis)	Setup Photo (Y-Axis)	Setup Photo (Z-Axis)
SC1500	PCB trace antenna	Transmit	EUT upright	N/A	N/A
<b>Note:</b>					

## 6.5 Test Specifications

**Table 13:** Test Specifications

Emissions and Immunity	
Standard	Requirement
CFR 47 Part 15.247: 2020	All
RSS 247 Issue 2, 2017	All

---

## END OF REPORT