



RADIO TEST REPORT

Report No.:STS2003219W10

Issued for

EyeTech Digital Systems, Inc.

1128 E Greenway Street, Suite 1, Mesa, Arizona 85203 USA

Product Name:	EyeOn
Brand Name:	eyeon™
Model Name:	EyeOn-14WE
Series Model:	N/A
FCC ID:	2AVV8-EYEON
IC:	25941-EYEON
Test Standard:	FCC Part 15.407 RSS-247 Issue 2, February 2017

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com





TEST RESULT CERTIFICATION

Applicant's Name..... : EyeTech Digital Systems, Inc.
Address : 1128 E Greenway Street, Suite 1, Mesa, Arizona 85203 USA
Manufacture's Name..... : EyeTech Digital Systems, Inc.
Address : 1128 E Greenway Street, Suite 1, Mesa, Arizona 85203 USA

Product Description

Product Name..... : EyeOn
Brand Name : 
Model Name : EyeOn-14WE
Series Model..... : N/A

FCC Part15.407

Test Standards : RSS-247 Issue 2, February 2017
RSS-Gen Issue 5 ,March 2019

Test Procedure..... ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC/IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test..... :

Date of receipt of test item : 18 Mar. 2020

Date (s) of performance of tests..... : 18 Mar. 2020 ~ 03 Apr. 2020

Date of Issue..... : 05 Apr. 2020

Test Result..... : **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sean she)

Authorized Signatory :

(Vita Li)

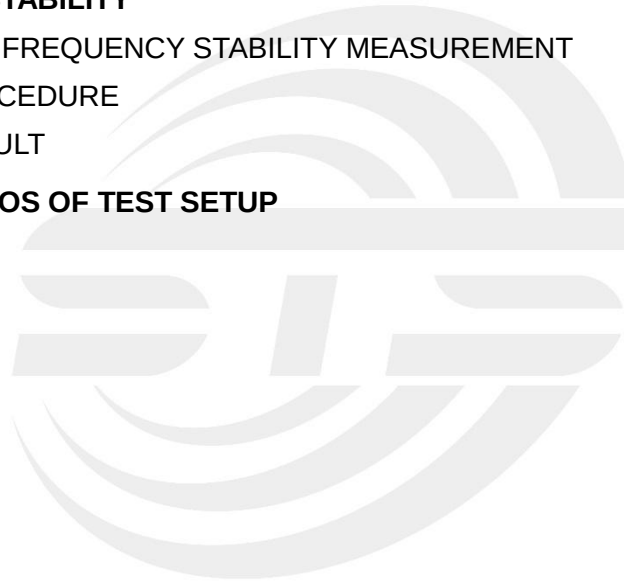




Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	12
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	14
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	15
3 . EMC EMISSION TEST	16
3.1 CONDUCTED EMISSION MEASUREMENT	16
3.2 RADIATED EMISSION AND (BANDEGE) MEASUREMENT	20
4. CONDUCTED SPURIOUS EMISSIONS AND BANDEGE	41
4.1 LIMIT	41
4.2 TEST PROCEDURE	41
4.3 DEVIATION FROM STANDARD	41
4.4 TEST SETUP	42
4.5 EUT OPERATION CONDITIONS	42
4.6 TEST RESULTS	42
5. POWER SPECTRAL DENSITY TEST	43
5.1 LIMIT	43
5.2 TEST PROCEDURE	44
5.3 DEVIATION FROM STANDARD	44
5.4 TEST SETUP	44
5.5 EUT OPERATION CONDITIONS	44
5.6 TEST RESULTS	45
6. BANDWIDTH MEASUREMENT	50
6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	50
6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	53
6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	56
7. MAXIMUM CONDUCTED OUTPUT POWER	58
7.1 LIMIT	58
7.2 TEST PROCEDURE	59
7.3 DEVIATION FROM STANDARD	59



Table of Contents	Page
7.4 TEST SETUP	59
7.5 EUT OPERATION CONDITIONS	59
7.6 TEST RESULTS	60
8. AUTOMATICALLY DISCONTINUE TRANSMISSION	71
8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	71
8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	71
9. ANTENNA REQUIREMENT	72
9.1 STANDARD REQUIREMENT	72
9.2 EUT ANTENNA	72
10. FREQUENCY STABILITY	73
10.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	73
10.2 TEST PROCEDURE	73
10.3 TEST RESULT	73
APPENDIX - PHOTOS OF TEST SETUP	77



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	05 Apr. 2020	STS2003219W10	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407 RSS-247 Issue 2, February 2017		
FCC standard	Test Item	Results
15.207 RSS-Gen Issue 5, Amendment 1, March 2019	AC Conducted Emission	PASS
§ 15.407 (2) (26 dB) / § 15.407 (e) (6 dB) / § 15.407 (a) (99%) RSS-Gen Issue 5, Amendment 1, March 2019	26dB/6dB & 99% Bandwidth	PASS
15.407(a) (1).(2).(3).(4).(5) RSS-247 Issue 2, February 2017	Maximum Conducted Output Power	PASS
15.407(b) & 15.209 RSS-247 Issue 2, February 2017	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(b)7 RSS-247 Issue 2, February 2017	Conducted Emission And (bandedge Emissions) Measurement	PASS
15.407(a) (1).(2).(3).(4).(5) RSS-247 Issue 2, February 2017	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204 RSS-Gen Issue 5, Amendment 1, March 2019	Antenna Requirement	PASS
RSS-Gen Issue 5, Amendment 1, March 2019	Frequency Stability	PASS

NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 30-1GHz	$\pm 6.7\text{dB}$
4	All emissions, radiated 1G-6GHz	$\pm 5.5\text{dB}$
5	All emissions, radiated >6G	$\pm 5.8\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 4.43\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 5\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	EyeOn								
Trade Name									
Model Name	EyeOn-14WE								
Series Model	N/A								
Model Difference	N/A								
Product Description	The EUT is a EyeOn <table><tr><td>Operation Frequency:</td><td>IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz IEEE 802.11a/ n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz IEEE 802.11a/ n(HT20)/ac(VHT20): 5.500GHz-5.700GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.510GHz-5.670GHz IEEE 802.11ac(VHT80): 5.530GHz-5.610GHz IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/ n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz</td></tr><tr><td>Modulation Type:</td><td>802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM</td></tr><tr><td>Antenna Designation:</td><td>Please refer to the Note 3.</td></tr><tr><td>Max.Output Power(Conducted):</td><td>14.69dBm</td></tr></table> More details of EUT technical specification, please refer to the User Manual.	Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz IEEE 802.11a/ n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz IEEE 802.11a/ n(HT20)/ac(VHT20): 5.500GHz-5.700GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.510GHz-5.670GHz IEEE 802.11ac(VHT80): 5.530GHz-5.610GHz IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/ n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz	Modulation Type:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM	Antenna Designation:	Please refer to the Note 3.	Max.Output Power(Conducted):	14.69dBm
Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz IEEE 802.11a/ n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz IEEE 802.11a/ n(HT20)/ac(VHT20): 5.500GHz-5.700GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.510GHz-5.670GHz IEEE 802.11ac(VHT80): 5.530GHz-5.610GHz IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/ n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz								
Modulation Type:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM								
Antenna Designation:	Please refer to the Note 3.								
Max.Output Power(Conducted):	14.69dBm								
Test Channel	Please refer to the Note 2.								
Adapter	Input: 100-240Vac, 50/60Hz, 1.7A Max Output: DC 19V, 3A, 57W								
Battery	Rated Voltage: 7.4V Charge Limit: 8.4V Capacity: 7400mAh								
Hardware version number	VerC								



Software version number	windows10 Pro 64bit
Connecting I/O Port(s)	Please refer to the Note 1.

Note

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.





2. Operation Frequency of channel

5.180GHz-5.240GHz		5.500GHz-5.720GHz	
Channel	Frequency	Channel	Frequency
36	5180	100	5500
38	5190	102	5510
40	5200	104	5520
42	5210	108	5540
44	5220	110	5550
46	5230	112	5560
48	5240	116	5580
		118	5590
		120	5600
5.260GHz-5.320GHz		124	5620
Channel	Frequency	126	5630
52	5260	128	5640
54	5270	132	5660
56	5280	134	5670
58	5290	136	5680
60	5300	140	5700
62	5310		
64	5320		
5.745GHz-5.825GHz			
Channel	Frequency		
149	5745		
151	5755		
153	5765		
157	5785		
159	5795		
161	5805		
165	5825		

Note:

1. IC not support Band 5600MHz-5650MHz.
2. In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

For 802.11a/n(HT20)/ac(VHT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
36	5180	52	5260
40	5200	60	5300
48	5240	64	5320

For 802.11a/n(HT20)/ac(VHT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
100	5500	149	5745
116	5580	157	5785
140	5700	165	5825



For 802.11 n(HT40)/ac(VHT40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
38	5190	54	5270
46	5230	62	5310

For 802.11 n(HT40)/ac(VHT40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
102	5510	151	5755
110	5550	159	5795
134	5670		

For 802.11ac (VHT80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
42	5210	58	5290

For 802.11ac (VHT80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
106	5530	155	5775
122	5610		

3. KDB 662911 D01 Multiple Transmitter Output v02r01

2) Directional Gain Calculations for In-Band Measurements

a) Basic methodology with NANT transmit antennas, each with the same directional gain G_A NT dBi, being driven by NANT transmitter outputs of equal power. Directional gain is to be computed as follows:

(i) If any transmit signals are correlated with each other,

$$\text{Directional gain} = G_{ANT} + 10 \log(NANT) \text{ dBi}$$

(ii) If all transmit signals are completely uncorrelated with each other,

$$\text{Directional gain} = G_{ANT}$$

Antenna number: 2

Antenna A gain : 0dBi

Antenna B gain : 0dBi

MIMO technology Directional gain=3.01dBi

$$G_{ANT} + 10 \log(NANT) \text{ dBi}$$

$$\text{Directional gain} = 0 + 10 \log 2 = 3.01 \text{ dBi}$$

Ant	Brand	Model Name	Ant Type	Connector	Gain (dBi)	NOTE
A	eyeon™	EyeOn-14WE	PIFA Antenna	N/A	Ant A gain : 0dBi Ant B gain : 0dBi MIMO technology Directional gain=3.01dBi	WLAN Ant



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH52&CH60&CH64	6 Mbps
Mode 3	TX IEEE 802.11a HT20 CH100&CH116&CH140	6 Mbps
Mode 4	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 5	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 6	TX IEEE 802.11ac HT20 CH36&CH40&CH48	NSS1 MCS0
Mode 7	TX IEEE 802.11n HT20 CH52&CH60&CH64	MCS 0
Mode 8	TX IEEE 802.11ac HT20 CH52&CH60&CH64	NSS1 MCS0
Mode 9	TX IEEE 802.11n HT20 CH100&CH116&CH140	MCS 0
Mode 10	TX IEEE 802.11ac HT20 CH100&CH116&CH140	NSS1 MCS0
Mode 11	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 12	TX IEEE 802.11ac HT20 CH149&CH157&CH165	NSS1 MCS0
Mode 13	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 14	TX IEEE 802.11ac HT40 CH38&CH46	NSS1 MCS0
Mode 15	TX IEEE 802.11n HT40 CH54 &CH62	MCS 0
Mode 16	TX IEEE 802.11ac HT40 CH54 &CH62	NSS1 MCS0
Mode 17	TX IEEE 802.11n HT40 CH102&CH110&CH134	MCS 0
Mode 18	TX IEEE 802.11ac HT40 CH102&CH110&CH134	NSS1 MCS0
Mode 19	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 20	TX IEEE 802.11ac HT40 CH151&CH159	NSS1 MCS0
Mode 21	TX IEEE 802.11ac HT80 CH42	NSS1 MCS0
Mode 22	TX IEEE 802.11ac HT80 CH58	NSS1 MCS0
Mode 23	TX IEEE 802.11ac HT80 CH106&122	NSS1 MCS0
Mode 24	TX IEEE 802.11ac HT80 CH155	NSS1 MCS0

- Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
(3) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.




AC Conducted Emission


Test Case	
AC Conducted Emission	Mode 25: Keeping TX + WLAN Link

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious EmissionTest



Conducted Emission Test

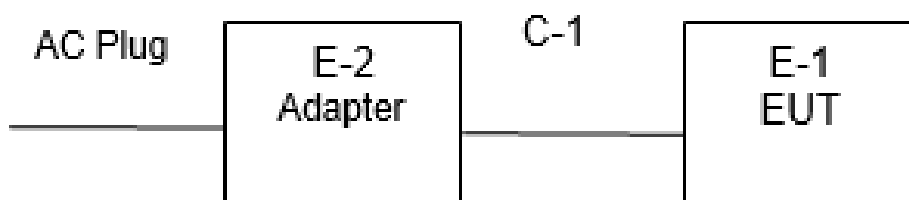



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Adapter	N/A	SOY-1900300	N/A	N/A
C-1	DC Cable	N/A	110cm	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	101427	2019.07.29	2020.07.28
Signal Analyzer	Agilent	N9020A	MY51110105	2020.03.05	2021.03.04
Active loop Antenna	ZHINAN	ZN30900C	16035	2018.03.11	2021.03.10
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.01
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
Horn Antenna (18-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Pre-mpifier (18G-40G)	SKET	LNPA_1840-50	SK2018101801	2019.10.22	2020.10.21
Spectrum Analyzer	R&S	FSV40-N	101823	2019.06.05	2020.06.04
Pre-Amplifier(0.1 M-3GHz)	EM	EM330	060665	2019.10.09	2020.10.08
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-4 5	SK2018080901	2019.10.12	2020.10.11
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Test SW	BULUN	BL410-E/18.905			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2019.07.29	2020.07.28
LISN	R&S	ENV216	101242	2019.10.09	2020.10.08
LISN	EMCO	3810/2NM	23625	2019.10.09	2020.10.08
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2019.10.09	2020.10.08
Signal Analyzer	Agilent	N9020A	MY49100060	2019.10.09	2020.10.08
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Test SW	FARAD	LZ-RF /LzRf-3A3			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

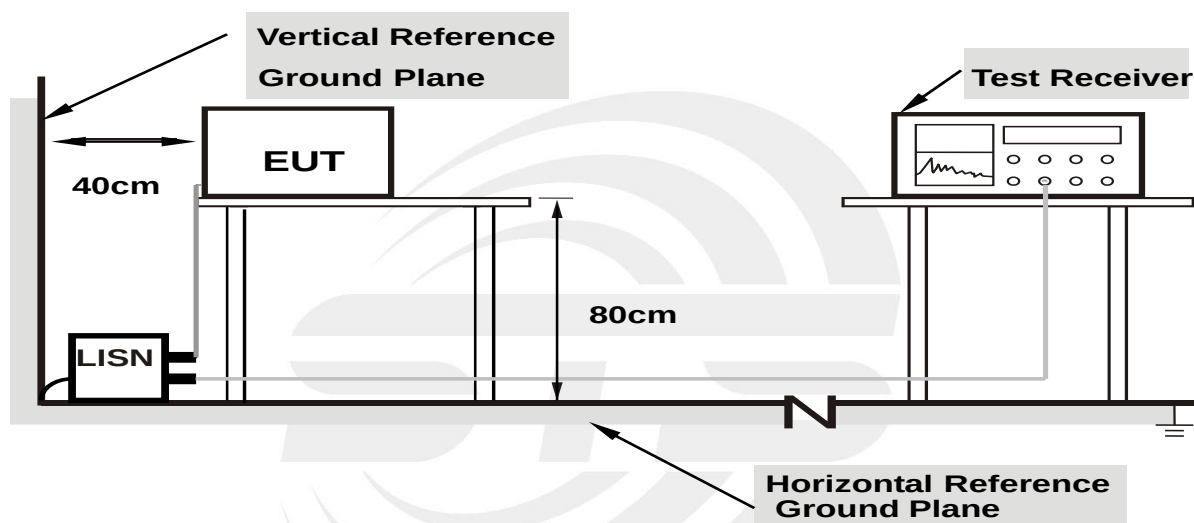

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Temperature:	25.3(C)	Relative Humidity:	58%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 25		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1780	32.69	20.27	52.96	64.58	-11.62	QP
2	0.1780	16.15	20.27	36.42	54.58	-18.16	AVG
3	0.2380	31.75	20.49	52.24	62.17	-9.93	QP
4	0.2380	19.24	20.49	39.73	52.17	-12.44	AVG
5	0.4220	31.12	20.50	51.62	57.41	-5.79	QP
6	0.4220	15.22	20.50	35.72	47.41	-11.69	AVG
7	1.0220	29.61	20.16	49.77	56.00	-6.23	QP
8	1.0220	15.83	20.16	35.99	46.00	-10.01	AVG
9	2.9660	28.13	20.08	48.21	56.00	-7.79	QP
10	2.9660	15.44	20.08	35.52	46.00	-10.48	AVG
11	9.8420	24.36	19.86	44.22	60.00	-15.78	QP
12	9.8420	2.12	19.86	21.98	50.00	-28.02	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

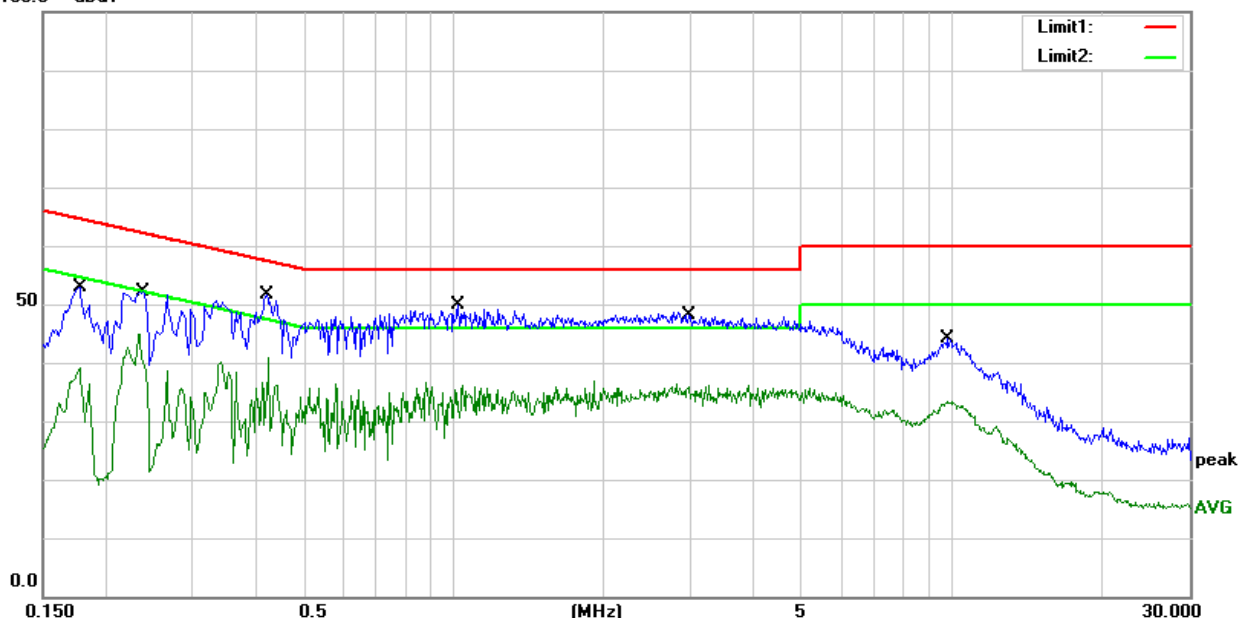




Temperature:	25.3(C)	Relative Humidity:	58%RH
Test Voltage	AC 120V/60Hz	Phase:	N
Test Mode	Mode 25		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.3460	29.04	20.65	49.69	59.06	-9.37	QP
2	0.3460	16.63	20.65	37.28	49.06	-11.78	AVG
3	0.4460	29.46	20.48	49.94	56.95	-7.01	QP
4	0.4460	16.06	20.48	36.54	46.95	-10.41	AVG
5	0.6300	29.84	20.33	50.17	56.00	-5.83	QP
6	0.6300	14.75	20.33	35.08	46.00	-10.92	AVG
7	1.2340	31.08	20.16	51.24	56.00	-4.76	QP
8	1.2340	16.70	20.16	36.86	46.00	-9.14	AVG
9	1.7060	30.43	20.15	50.58	56.00	-5.42	QP
10	1.7060	14.86	20.15	35.01	46.00	-10.99	AVG
11	5.1860	26.11	20.01	46.12	60.00	-13.88	QP
12	5.1860	14.45	20.01	34.46	50.00	-15.54	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

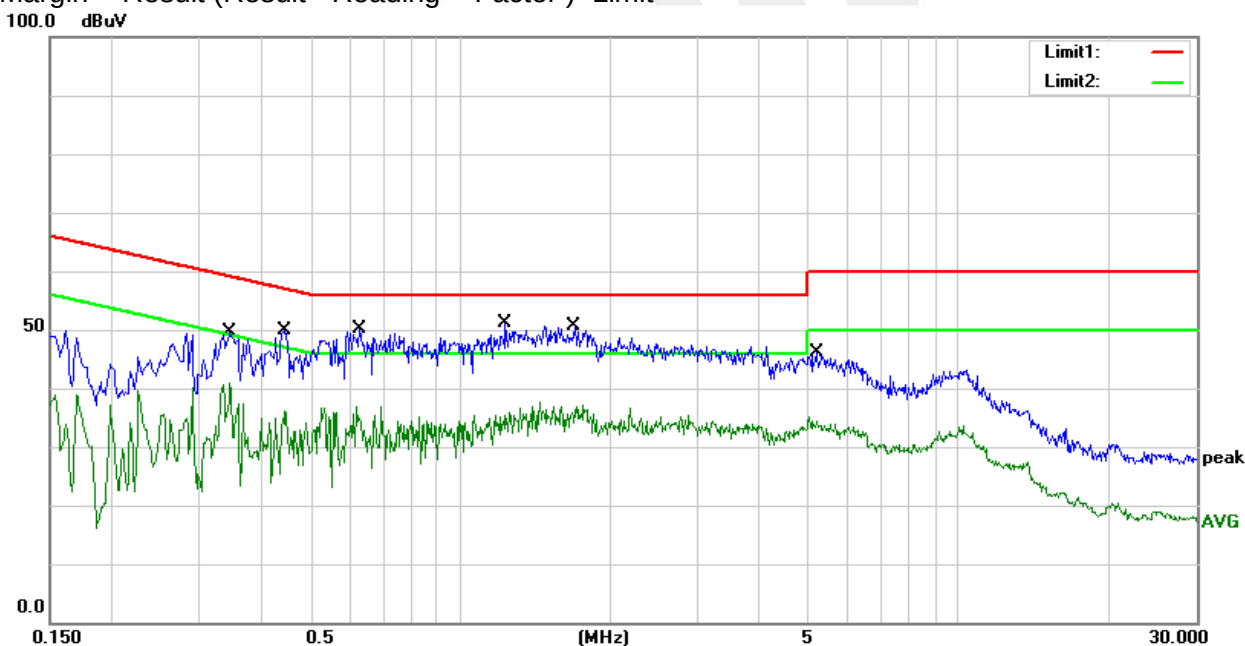



3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band; limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	68.2	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FCC:

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



IC:

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz



For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz / 3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed test to three orthogonal axis. The worst case emissions were reported

3.2.2 DEVIATION FROM TEST STANDARD


No deviation

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

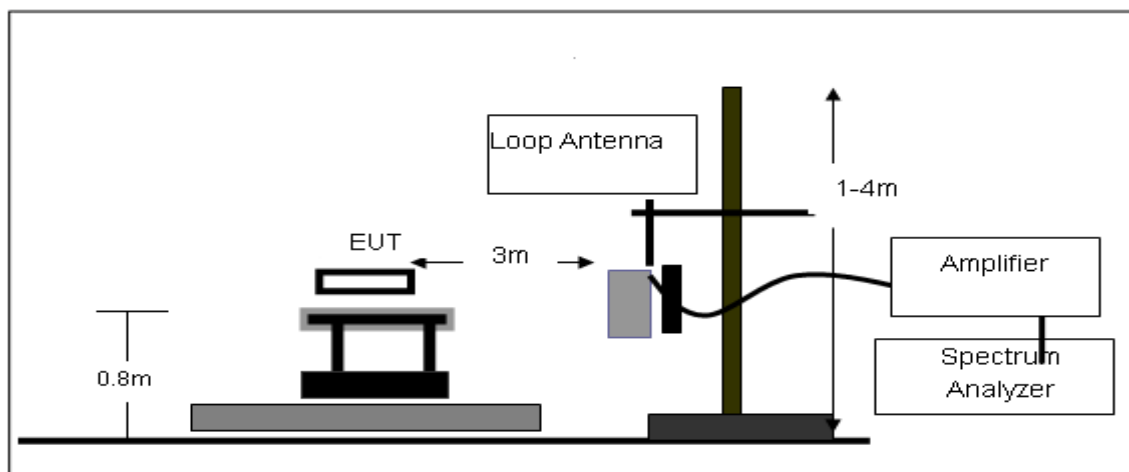

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

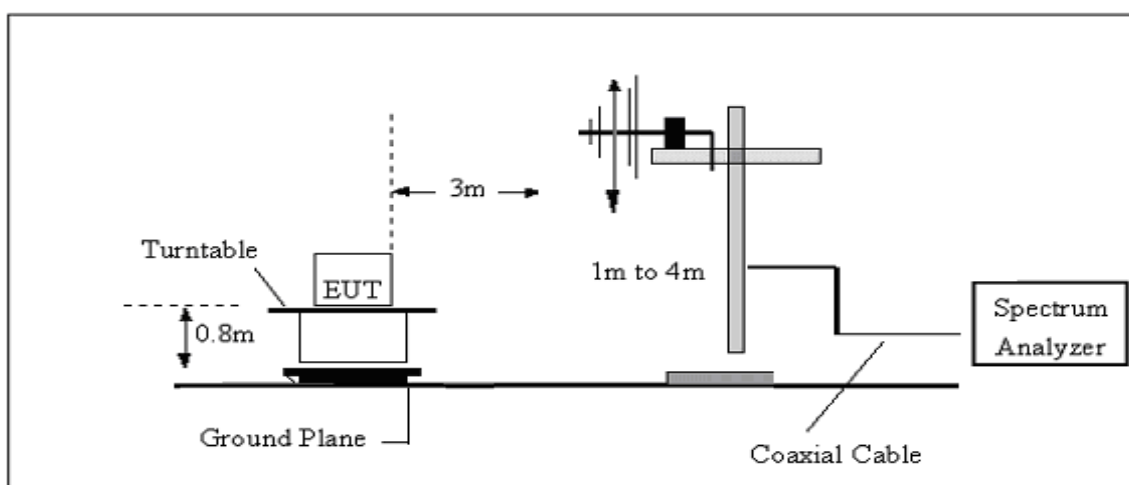

(C) Radiated Emission Test-Up Frequency Above 1GHz

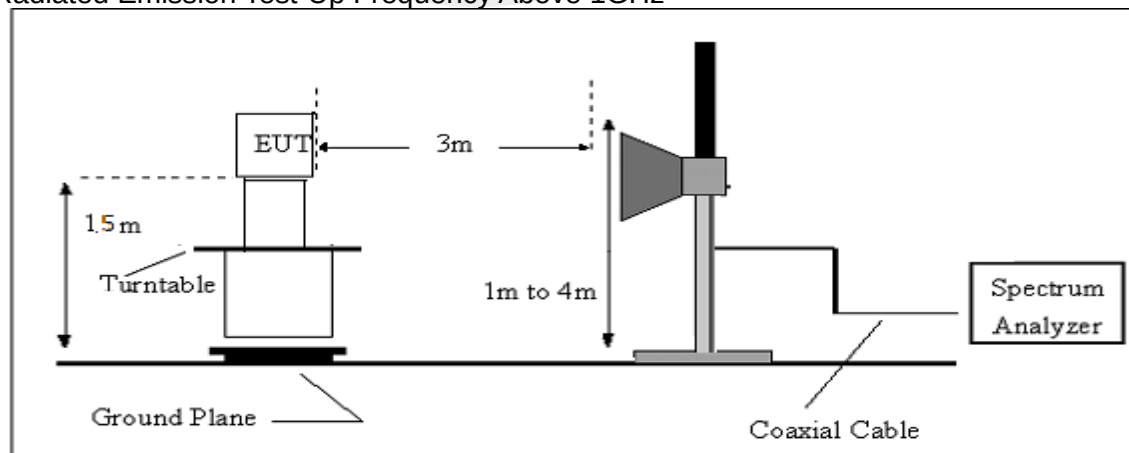



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	23.5(C)	Relative Humidity:	57%RH
Test Voltage:	DC 7.4V	Polarization :	--
Test Mode:	TX Mode		


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuV) + distance extrapolation factor.

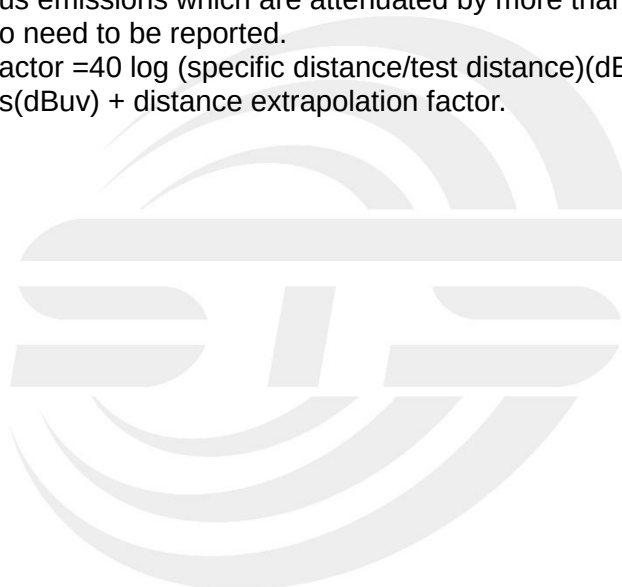


**3.2.7 TEST RESULTS (Between 30MHz – 1GHz)**

Temperature	23.5(C)	Relative Humidity:	57%RH
Test Voltage	DC 7.4V	Polarization:	Horizontal
Test Mode	Mode 1~24(Mode 2 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	29.57	-12.85	16.72	40.00	-23.28	QP
2	260.8600	31.80	-14.78	17.02	46.00	-28.98	QP
3	466.5000	32.70	-9.17	23.53	46.00	-22.47	QP
4	734.2200	31.46	-2.31	29.15	46.00	-16.85	QP
5	857.4100	30.97	-0.50	30.47	46.00	-15.53	QP
6	983.5100	30.43	2.46	32.89	54.00	-21.11	QP

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit

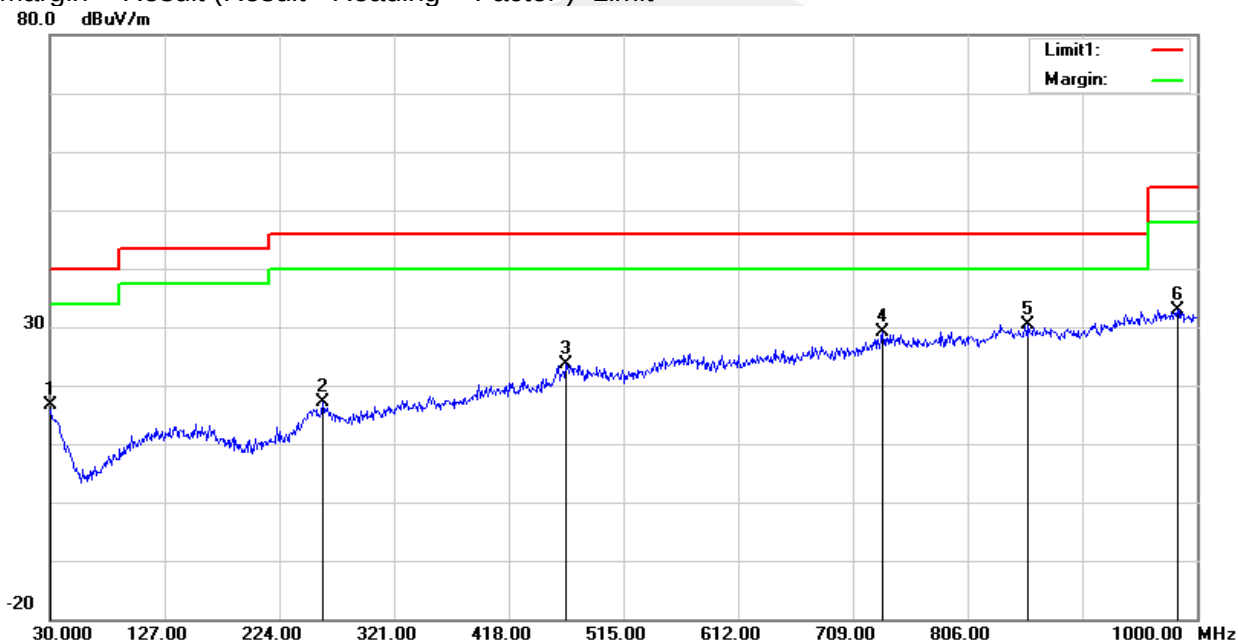




Temperature	23.5(C)	Relative Humidity:	57%RH
Test Voltage	DC 7.4V	Polarization:	Vertical
Test Mode	Mode 1~24(Mode 2 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	30.28	-12.85	17.43	40.00	-22.57	QP
2	260.8600	32.46	-14.78	17.68	46.00	-28.32	QP
3	501.4200	31.04	-8.00	23.04	46.00	-22.96	QP
4	644.0100	31.07	-4.87	26.20	46.00	-19.80	QP
5	839.9500	31.24	-0.34	30.90	46.00	-15.10	QP
6	974.7800	30.88	2.32	33.20	54.00	-20.80	QP

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit

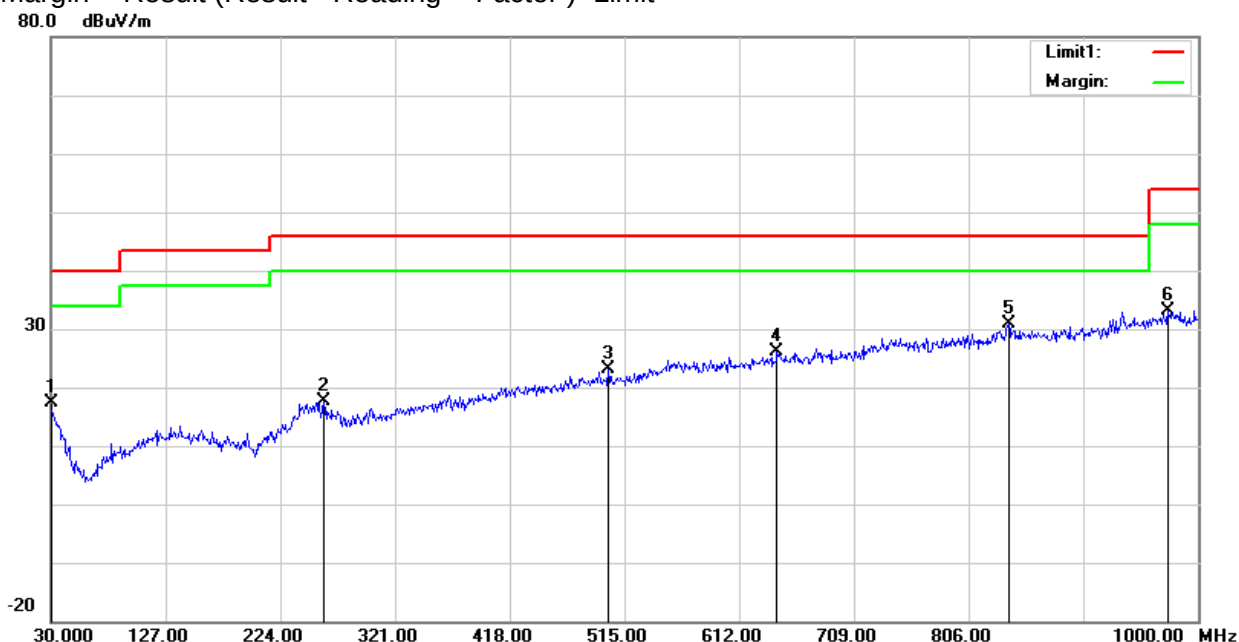



3.2.8 TEST RESULTS (Above 1000 MHz)

Band I 5150-5250MHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11a/ 5180 MHz)										
3264.36	44.27	44.70	6.70	28.20	-9.80	34.47	68.20	-33.73	Pk	Vertical
3264.36	41.85	44.70	6.70	28.20	-9.80	32.05	54.00	-21.95	AV	Vertical
3251.86	44.93	44.70	6.70	28.20	-9.80	35.13	68.20	-33.07	Pk	Horizontal
3251.86	40.96	44.70	6.70	28.20	-9.80	31.16	54.00	-22.84	AV	Horizontal
3991.95	38.99	44.20	7.90	29.70	-6.60	32.39	68.20	-35.81	Pk	Vertical
3991.95	36.23	44.20	7.90	29.70	-6.60	29.63	54.00	-24.37	AV	Vertical
3988.34	38.71	44.20	7.90	29.70	-6.60	32.11	68.20	-36.09	Pk	Horizontal
3988.34	36.70	44.20	7.90	29.70	-6.60	30.10	54.00	-23.90	AV	Horizontal
7229.81	37.50	43.50	11.40	35.50	3.40	40.90	68.20	-27.30	Pk	Vertical
7229.81	34.16	43.50	11.40	35.50	3.40	37.56	54.00	-16.44	AV	Vertical
7230.77	37.31	43.50	11.40	35.50	3.40	40.71	68.20	-27.49	Pk	Horizontal
7230.77	34.48	43.50	11.40	35.50	3.40	37.88	54.00	-16.12	AV	Horizontal
10360.18	39.06	44.50	13.80	38.80	8.10	47.16	68.20	-21.04	Pk	Vertical
10360.18	35.83	44.50	13.80	38.80	8.10	43.93	54.00	-10.07	AV	Vertical
10360.01	39.37	44.50	13.80	38.80	8.10	47.47	68.20	-20.73	Pk	Horizontal
10360.01	36.45	44.50	13.80	38.80	8.10	44.55	54.00	-9.45	AV	Horizontal
11024.54	32.92	43.60	14.30	39.50	10.20	43.12	68.20	-25.08	Pk	Vertical
11024.54	30.46	43.60	14.30	39.50	10.20	40.66	54.00	-13.34	AV	Vertical
11024.13	34.17	43.60	14.30	39.50	10.20	44.37	68.20	-23.83	Pk	Horizontal
11024.13	30.01	43.60	14.30	39.50	10.20	40.21	54.00	-13.79	AV	Horizontal
13289.86	32.30	42.60	15.90	38.90	12.20	44.50	68.20	-23.70	Pk	Vertical
13289.86	28.91	42.60	15.90	38.90	12.20	41.11	54.00	-12.89	AV	Vertical
13284.94	31.97	42.60	15.90	38.90	12.20	44.17	68.20	-24.03	Pk	Horizontal
13284.94	28.76	42.60	15.90	38.90	12.20	40.96	54.00	-13.04	AV	Horizontal
Mid Channel (802.11a/ 5200 MHz)										
3246.76	44.82	44.70	6.70	28.20	-9.80	35.02	68.20	-33.18	Pk	Vertical
3246.76	40.98	44.70	6.70	28.20	-9.80	31.18	54.00	-22.82	AV	Vertical
3254.89	45.22	44.70	6.70	28.20	-9.80	35.42	68.20	-32.78	Pk	Horizontal
3254.89	40.77	44.70	6.70	28.20	-9.80	30.97	54.00	-23.03	AV	Horizontal
3991.61	40.04	44.20	7.90	29.70	-6.60	33.44	68.20	-34.76	Pk	Vertical
3991.61	36.01	44.20	7.90	29.70	-6.60	29.41	54.00	-24.59	AV	Vertical
3998.61	38.91	44.20	7.90	29.70	-6.60	32.31	68.20	-35.89	Pk	Horizontal
3998.61	36.51	44.20	7.90	29.70	-6.60	29.91	54.00	-24.09	AV	Horizontal
7225.42	37.83	43.50	11.40	35.50	3.40	41.23	68.20	-26.97	Pk	Vertical
7225.42	34.78	43.50	11.40	35.50	3.40	38.18	54.00	-15.82	AV	Vertical
7232.48	37.31	43.50	11.40	35.50	3.40	40.71	68.20	-27.49	Pk	Horizontal
7232.48	34.57	43.50	11.40	35.50	3.40	37.97	54.00	-16.03	AV	Horizontal
10400.16	40.06	44.50	13.80	38.80	8.10	48.16	68.20	-20.04	Pk	Vertical
10400.16	35.93	44.50	13.80	38.80	8.10	44.03	54.00	-9.97	AV	Vertical
10400.23	38.98	44.50	13.80	38.80	8.10	47.08	68.20	-21.12	Pk	Horizontal
10400.23	35.78	44.50	13.80	38.80	8.10	43.88	54.00	-10.12	AV	Horizontal
11033.00	33.28	43.60	14.30	39.50	10.20	43.48	68.20	-24.72	Pk	Vertical
11033.00	30.96	43.60	14.30	39.50	10.20	41.16	54.00	-12.84	AV	Vertical
11024.02	33.08	43.60	14.30	39.50	10.20	43.28	68.20	-24.92	Pk	Horizontal
11024.02	30.88	43.60	14.30	39.50	10.20	41.08	54.00	-12.92	AV	Horizontal
13287.28	32.42	42.60	15.90	38.90	12.20	44.62	68.20	-23.58	Pk	Vertical
13287.28	29.24	42.60	15.90	38.90	12.20	41.44	54.00	-12.56	AV	Vertical
13295.27	32.18	42.60	15.90	38.90	12.20	44.38	68.20	-23.82	Pk	Horizontal
13295.27	29.14	42.60	15.90	38.90	12.20	41.34	54.00	-12.66	AV	Horizontal



High Channel (802.11a/ 5240 MHz)										
3258.06	44.48	44.70	6.70	28.20	-9.80	34.68	68.20	-33.52	Pk	Vertical
3258.06	42.20	44.70	6.70	28.20	-9.80	32.40	54.00	-21.60	AV	Vertical
3261.61	44.92	44.70	6.70	28.20	-9.80	35.12	68.20	-33.08	Pk	Horizontal
3261.61	40.83	44.70	6.70	28.20	-9.80	31.03	54.00	-22.97	AV	Horizontal
3991.22	39.03	44.20	7.90	29.70	-6.60	32.43	68.20	-35.77	Pk	Vertical
3991.22	36.14	44.20	7.90	29.70	-6.60	29.54	54.00	-24.46	AV	Vertical
3994.01	38.96	44.20	7.90	29.70	-6.60	32.36	68.20	-35.84	Pk	Horizontal
3994.01	37.12	44.20	7.90	29.70	-6.60	30.52	54.00	-23.48	AV	Horizontal
7222.74	36.97	43.50	11.40	35.50	3.40	40.37	68.20	-27.83	Pk	Vertical
7222.74	34.90	43.50	11.40	35.50	3.40	38.30	54.00	-15.70	AV	Vertical
7221.20	37.22	43.50	11.40	35.50	3.40	40.62	68.20	-27.58	Pk	Horizontal
7221.20	34.29	43.50	11.40	35.50	3.40	37.69	54.00	-16.31	AV	Horizontal
10480.01	39.93	44.50	13.80	38.80	8.10	48.03	68.20	-20.17	Pk	Vertical
10480.01	36.26	44.50	13.80	38.80	8.10	44.36	54.00	-9.64	AV	Vertical
10480.14	39.85	44.50	13.80	38.80	8.10	47.95	68.20	-20.25	Pk	Horizontal
10480.14	36.97	44.50	13.80	38.80	8.10	45.07	54.00	-8.93	AV	Horizontal
11017.76	33.83	43.60	14.30	39.50	10.20	44.03	68.20	-24.17	Pk	Vertical
11017.76	30.44	43.60	14.30	39.50	10.20	40.64	54.00	-13.36	AV	Vertical
11023.16	33.56	43.60	14.30	39.50	10.20	43.76	68.20	-24.44	Pk	Horizontal
11023.16	30.48	43.60	14.30	39.50	10.20	40.68	54.00	-13.32	AV	Horizontal
13293.22	32.97	42.60	15.90	38.90	12.20	45.17	68.20	-23.03	Pk	Vertical
13293.22	29.70	42.60	15.90	38.90	12.20	41.90	54.00	-12.10	AV	Vertical
13283.37	32.22	42.60	15.90	38.90	12.20	44.42	68.20	-23.78	Pk	Horizontal
13283.37	28.93	42.60	15.90	38.90	12.20	41.13	54.00	-12.87	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11a.
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
4. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported.



Band II 5250-5350MHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11a/ 5260 MHz)										
3259.05	44.66	44.70	6.70	28.20	-9.80	34.86	68.20	-33.34	Pk	Vertical
3259.05	41.08	44.70	6.70	28.20	-9.80	31.28	54.00	-22.72	AV	Vertical
3251.27	44.85	44.70	6.70	28.20	-9.80	35.05	68.20	-33.15	Pk	Horizontal
3251.27	41.15	44.70	6.70	28.20	-9.80	31.35	54.00	-22.65	AV	Horizontal
3987.45	39.64	44.20	7.90	29.70	-6.60	33.04	68.20	-35.16	Pk	Vertical
3987.45	36.35	44.20	7.90	29.70	-6.60	29.75	54.00	-24.25	AV	Vertical
3984.39	39.88	44.20	7.90	29.70	-6.60	33.28	68.20	-34.92	Pk	Horizontal
3984.39	36.53	44.20	7.90	29.70	-6.60	29.93	54.00	-24.07	AV	Horizontal
7233.23	36.58	43.50	11.40	35.50	3.40	39.98	68.20	-28.22	Pk	Vertical
7233.23	34.13	43.50	11.40	35.50	3.40	37.53	54.00	-16.47	AV	Vertical
7219.68	37.86	43.50	11.40	35.50	3.40	41.26	68.20	-26.94	Pk	Horizontal
7219.68	34.43	43.50	11.40	35.50	3.40	37.83	54.00	-16.17	AV	Horizontal
10360.30	40.15	44.50	13.80	38.80	8.10	48.25	68.20	-19.95	Pk	Vertical
10360.30	36.98	44.50	13.80	38.80	8.10	45.08	54.00	-8.92	AV	Vertical
10360.06	39.77	44.50	13.80	38.80	8.10	47.87	68.20	-20.33	Pk	Horizontal
10360.06	36.96	44.50	13.80	38.80	8.10	45.06	54.00	-8.94	AV	Horizontal
11028.12	32.98	43.60	14.30	39.50	10.20	43.18	68.20	-25.02	Pk	Vertical
11028.12	30.92	43.60	14.30	39.50	10.20	41.12	54.00	-12.88	AV	Vertical
11016.54	33.20	43.60	14.30	39.50	10.20	43.40	68.20	-24.80	Pk	Horizontal
11016.54	30.64	43.60	14.30	39.50	10.20	40.84	54.00	-13.16	AV	Horizontal
13294.23	32.59	42.60	15.90	38.90	12.20	44.79	68.20	-23.41	Pk	Vertical
13294.23	29.97	42.60	15.90	38.90	12.20	42.17	54.00	-11.83	AV	Vertical
13286.00	32.79	42.60	15.90	38.90	12.20	44.99	68.20	-23.21	Pk	Horizontal
13286.00	29.39	42.60	15.90	38.90	12.20	41.59	54.00	-12.41	AV	Horizontal
Mid Channel (802.11a/ 5300 MHz)										
3259.87	44.98	44.70	6.70	28.20	-9.80	35.18	68.20	-33.02	Pk	Vertical
3259.87	40.92	44.70	6.70	28.20	-9.80	31.12	54.00	-22.88	AV	Vertical
3260.18	45.19	44.70	6.70	28.20	-9.80	35.39	68.20	-32.81	Pk	Horizontal
3260.18	40.89	44.70	6.70	28.20	-9.80	31.09	54.00	-22.91	AV	Horizontal
3995.15	39.13	44.20	7.90	29.70	-6.60	32.53	68.20	-35.67	Pk	Vertical
3995.15	36.41	44.20	7.90	29.70	-6.60	29.81	54.00	-24.19	AV	Vertical
3985.59	39.02	44.20	7.90	29.70	-6.60	32.42	68.20	-35.78	Pk	Horizontal
3985.59	35.82	44.20	7.90	29.70	-6.60	29.22	54.00	-24.78	AV	Horizontal
7221.12	37.89	43.50	11.40	35.50	3.40	41.29	68.20	-26.91	Pk	Vertical
7221.12	33.49	43.50	11.40	35.50	3.40	36.89	54.00	-17.11	AV	Vertical
7234.66	36.90	43.50	11.40	35.50	3.40	40.30	68.20	-27.90	Pk	Horizontal
7234.66	34.17	43.50	11.40	35.50	3.40	37.57	54.00	-16.43	AV	Horizontal
10400.07	40.09	44.50	13.80	38.80	8.10	48.19	68.20	-20.01	Pk	Vertical
10400.07	36.75	44.50	13.80	38.80	8.10	44.85	54.00	-9.15	AV	Vertical
10400.06	39.05	44.50	13.80	38.80	8.10	47.15	68.20	-21.05	Pk	Horizontal
10400.06	36.51	44.50	13.80	38.80	8.10	44.61	54.00	-9.39	AV	Horizontal
11024.78	33.95	43.60	14.30	39.50	10.20	44.15	68.20	-24.05	Pk	Vertical
11024.78	30.39	43.60	14.30	39.50	10.20	40.59	54.00	-13.41	AV	Vertical
11029.15	34.16	43.60	14.30	39.50	10.20	44.36	68.20	-23.84	Pk	Horizontal
11029.15	30.76	43.60	14.30	39.50	10.20	40.96	54.00	-13.04	AV	Horizontal
13292.58	31.86	42.60	15.90	38.90	12.20	44.06	68.20	-24.14	Pk	Vertical
13292.58	29.19	42.60	15.90	38.90	12.20	41.39	54.00	-12.61	AV	Vertical
13281.82	32.78	42.60	15.90	38.90	12.20	44.98	68.20	-23.22	Pk	Horizontal
13281.82	29.94	42.60	15.90	38.90	12.20	42.14	54.00	-11.86	AV	Horizontal



High Channel (802.11a/ 5320 MHz)										
3256.77	44.06	44.70	6.70	28.20	-9.80	34.26	68.20	-33.94	Pk	Vertical
3256.77	41.66	44.70	6.70	28.20	-9.80	31.86	54.00	-22.14	AV	Vertical
3247.51	45.20	44.70	6.70	28.20	-9.80	35.40	68.20	-32.80	Pk	Horizontal
3247.51	41.70	44.70	6.70	28.20	-9.80	31.90	54.00	-22.10	AV	Horizontal
3991.05	39.44	44.20	7.90	29.70	-6.60	32.84	68.20	-35.36	Pk	Vertical
3991.05	37.11	44.20	7.90	29.70	-6.60	30.51	54.00	-23.49	AV	Vertical
3996.71	39.87	44.20	7.90	29.70	-6.60	33.27	68.20	-34.93	Pk	Horizontal
3996.71	36.44	44.20	7.90	29.70	-6.60	29.84	54.00	-24.16	AV	Horizontal
7220.82	37.88	43.50	11.40	35.50	3.40	41.28	68.20	-26.92	Pk	Vertical
7220.82	33.61	43.50	11.40	35.50	3.40	37.01	54.00	-16.99	AV	Vertical
7227.48	37.14	43.50	11.40	35.50	3.40	40.54	68.20	-27.66	Pk	Horizontal
7227.48	34.82	43.50	11.40	35.50	3.40	38.22	54.00	-15.78	AV	Horizontal
10480.23	39.94	44.50	13.80	38.80	8.10	48.04	68.20	-20.16	Pk	Vertical
10480.23	36.07	44.50	13.80	38.80	8.10	44.17	54.00	-9.83	AV	Vertical
10480.43	40.03	44.50	13.80	38.80	8.10	48.13	68.20	-20.07	Pk	Horizontal
10480.43	36.37	44.50	13.80	38.80	8.10	44.47	54.00	-9.53	AV	Horizontal
11020.47	33.23	43.60	14.30	39.50	10.20	43.43	68.20	-24.77	Pk	Vertical
11020.47	30.78	43.60	14.30	39.50	10.20	40.98	54.00	-13.02	AV	Vertical
11024.67	32.90	43.60	14.30	39.50	10.20	43.10	68.20	-25.10	Pk	Horizontal
11024.67	30.54	43.60	14.30	39.50	10.20	40.74	54.00	-13.26	AV	Horizontal
13284.10	32.47	42.60	15.90	38.90	12.20	44.67	68.20	-23.53	Pk	Vertical
13284.10	28.92	42.60	15.90	38.90	12.20	41.12	54.00	-12.88	AV	Vertical
13286.13	32.99	42.60	15.90	38.90	12.20	45.19	68.20	-23.01	Pk	Horizontal
13286.13	28.60	42.60	15.90	38.90	12.20	40.80	54.00	-13.20	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11n (HT-20).
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
4. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported.



Band III 5470-5725MHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11a/ 5500 MHz)										
3246.94	44.95	44.70	6.70	28.20	-9.80	35.15	68.20	-33.05	Pk	Vertical
3246.94	41.91	44.70	6.70	28.20	-9.80	32.11	54.00	-21.89	AV	Vertical
3248.45	44.54	44.70	6.70	28.20	-9.80	34.74	68.20	-33.46	Pk	Horizontal
3248.45	40.99	44.70	6.70	28.20	-9.80	31.19	54.00	-22.81	AV	Horizontal
3990.18	40.08	44.20	7.90	29.70	-6.60	33.48	68.20	-34.72	Pk	Vertical
3990.18	36.30	44.20	7.90	29.70	-6.60	29.70	54.00	-24.30	AV	Vertical
3986.05	39.44	44.20	7.90	29.70	-6.60	32.84	68.20	-35.36	Pk	Horizontal
3986.05	36.02	44.20	7.90	29.70	-6.60	29.42	54.00	-24.58	AV	Horizontal
7229.88	37.49	43.50	11.40	35.50	3.40	40.89	68.20	-27.31	Pk	Vertical
7229.88	34.31	43.50	11.40	35.50	3.40	37.71	54.00	-16.29	AV	Vertical
7220.09	37.89	43.50	11.40	35.50	3.40	41.29	68.20	-26.91	Pk	Horizontal
7220.09	34.00	43.50	11.40	35.50	3.40	37.40	54.00	-16.60	AV	Horizontal
10360.14	39.15	44.50	13.80	38.80	8.10	47.25	68.20	-20.95	Pk	Vertical
10360.14	36.25	44.50	13.80	38.80	8.10	44.35	54.00	-9.65	AV	Vertical
10360.21	39.14	44.50	13.80	38.80	8.10	47.24	68.20	-20.96	Pk	Horizontal
10360.21	36.49	44.50	13.80	38.80	8.10	44.59	54.00	-9.41	AV	Horizontal
11029.08	34.04	43.60	14.30	39.50	10.20	44.24	68.20	-23.96	Pk	Vertical
11029.08	30.34	43.60	14.30	39.50	10.20	40.54	54.00	-13.46	AV	Vertical
11025.54	33.59	43.60	14.30	39.50	10.20	43.79	68.20	-24.41	Pk	Horizontal
11025.54	29.90	43.60	14.30	39.50	10.20	40.10	54.00	-13.90	AV	Horizontal
13283.56	32.82	42.60	15.90	38.90	12.20	45.02	68.20	-23.18	Pk	Vertical
13283.56	28.64	42.60	15.90	38.90	12.20	40.84	54.00	-13.16	AV	Vertical
13281.28	32.52	42.60	15.90	38.90	12.20	44.72	68.20	-23.48	Pk	Horizontal
13281.28	29.68	42.60	15.90	38.90	12.20	41.88	54.00	-12.12	AV	Horizontal
Mid Channel (802.11a/ 5580 MHz)										
3252.69	44.64	44.70	6.70	28.20	-9.80	34.84	68.20	-33.36	Pk	Vertical
3252.69	40.98	44.70	6.70	28.20	-9.80	31.18	54.00	-22.82	AV	Vertical
3257.82	43.98	44.70	6.70	28.20	-9.80	34.18	68.20	-34.02	Pk	Horizontal
3257.82	41.46	44.70	6.70	28.20	-9.80	31.66	54.00	-22.34	AV	Horizontal
3981.20	39.20	44.20	7.90	29.70	-6.60	32.60	68.20	-35.60	Pk	Vertical
3981.20	35.69	44.20	7.90	29.70	-6.60	29.09	54.00	-24.91	AV	Vertical
3996.46	39.53	44.20	7.90	29.70	-6.60	32.93	68.20	-35.27	Pk	Horizontal
3996.46	36.46	44.20	7.90	29.70	-6.60	29.86	54.00	-24.14	AV	Horizontal
7219.86	36.66	43.50	11.40	35.50	3.40	40.06	68.20	-28.14	Pk	Vertical
7219.86	33.56	43.50	11.40	35.50	3.40	36.96	54.00	-17.04	AV	Vertical
7216.41	37.46	43.50	11.40	35.50	3.40	40.86	68.20	-27.34	Pk	Horizontal
7216.41	33.91	43.50	11.40	35.50	3.40	37.31	54.00	-16.69	AV	Horizontal
10400.19	40.05	44.50	13.80	38.80	8.10	48.15	68.20	-20.05	Pk	Vertical
10400.19	36.62	44.50	13.80	38.80	8.10	44.72	54.00	-9.28	AV	Vertical
10400.37	39.05	44.50	13.80	38.80	8.10	47.15	68.20	-21.05	Pk	Horizontal
10400.37	36.54	44.50	13.80	38.80	8.10	44.64	54.00	-9.36	AV	Horizontal
11018.94	32.99	43.60	14.30	39.50	10.20	43.19	68.20	-25.01	Pk	Vertical
11018.94	31.00	43.60	14.30	39.50	10.20	41.20	54.00	-12.80	AV	Vertical
11028.27	33.03	43.60	14.30	39.50	10.20	43.23	68.20	-24.97	Pk	Horizontal
11028.27	29.76	43.60	14.30	39.50	10.20	39.96	54.00	-14.04	AV	Horizontal
13282.95	32.37	42.60	15.90	38.90	12.20	44.57	68.20	-23.63	Pk	Vertical
13282.95	29.82	42.60	15.90	38.90	12.20	42.02	54.00	-11.98	AV	Vertical
13297.73	31.77	42.60	15.90	38.90	12.20	43.97	68.20	-24.23	Pk	Horizontal
13297.73	29.72	42.60	15.90	38.90	12.20	41.92	54.00	-12.08	AV	Horizontal



High Channel (802.11a/ 5700 MHz)										
3246.46	45.21	44.70	6.70	28.20	-9.80	35.41	68.20	-32.79	Pk	Vertical
3246.46	42.14	44.70	6.70	28.20	-9.80	32.34	54.00	-21.66	AV	Vertical
3254.24	45.19	44.70	6.70	28.20	-9.80	35.39	68.20	-32.81	Pk	Horizontal
3254.24	41.84	44.70	6.70	28.20	-9.80	32.04	54.00	-21.96	AV	Horizontal
4000.02	39.97	44.20	7.90	29.70	-6.60	33.37	68.20	-34.83	Pk	Vertical
4000.02	36.65	44.20	7.90	29.70	-6.60	30.05	54.00	-23.95	AV	Vertical
3983.51	39.57	44.20	7.90	29.70	-6.60	32.97	68.20	-35.23	Pk	Horizontal
3983.51	36.87	44.20	7.90	29.70	-6.60	30.27	54.00	-23.73	AV	Horizontal
7228.07	36.66	43.50	11.40	35.50	3.40	40.06	68.20	-28.14	Pk	Vertical
7228.07	34.27	43.50	11.40	35.50	3.40	37.67	54.00	-16.33	AV	Vertical
7224.65	37.42	43.50	11.40	35.50	3.40	40.82	68.20	-27.38	Pk	Horizontal
7224.65	34.89	43.50	11.40	35.50	3.40	38.29	54.00	-15.71	AV	Horizontal
10480.34	39.45	44.50	13.80	38.80	8.10	47.55	68.20	-20.65	Pk	Vertical
10480.34	37.04	44.50	13.80	38.80	8.10	45.14	54.00	-8.86	AV	Vertical
10480.25	40.08	44.50	13.80	38.80	8.10	48.18	68.20	-20.02	Pk	Horizontal
10480.25	37.12	44.50	13.80	38.80	8.10	45.22	54.00	-8.78	AV	Horizontal
11024.50	33.63	43.60	14.30	39.50	10.20	43.83	68.20	-24.37	Pk	Vertical
11024.50	30.67	43.60	14.30	39.50	10.20	40.87	54.00	-13.13	AV	Vertical
11021.78	33.41	43.60	14.30	39.50	10.20	43.61	68.20	-24.59	Pk	Horizontal
11021.78	30.74	43.60	14.30	39.50	10.20	40.94	54.00	-13.06	AV	Horizontal
13293.19	32.80	42.60	15.90	38.90	12.20	45.00	68.20	-23.20	Pk	Vertical
13293.19	30.02	42.60	15.90	38.90	12.20	42.22	54.00	-11.78	AV	Vertical
13281.53	32.73	42.60	15.90	38.90	12.20	44.93	68.20	-23.27	Pk	Horizontal
13281.53	29.71	42.60	15.90	38.90	12.20	41.91	54.00	-12.09	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11n (HT-20).
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
4. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported.



Band IV(5.725-5.850) GHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11a/ 5745 MHz)										
3250.94	44.87	44.70	6.70	28.20	-9.80	35.07	68.20	-33.13	Pk	Vertical
3250.94	41.48	44.70	6.70	28.20	-9.80	31.68	54.00	-22.32	AV	Vertical
3263.04	44.69	44.70	6.70	28.20	-9.80	34.89	68.20	-33.31	Pk	Horizontal
3263.04	40.88	44.70	6.70	28.20	-9.80	31.08	54.00	-22.92	AV	Horizontal
3998.24	38.70	44.20	7.90	29.70	-6.60	32.10	68.20	-36.10	Pk	Vertical
3998.24	36.91	44.20	7.90	29.70	-6.60	30.31	54.00	-23.69	AV	Vertical
3984.44	38.75	44.20	7.90	29.70	-6.60	32.15	68.20	-36.05	Pk	Horizontal
3984.44	36.50	44.20	7.90	29.70	-6.60	29.90	54.00	-24.10	AV	Horizontal
7235.72	36.75	43.50	11.40	35.50	3.40	40.15	68.20	-28.05	Pk	Vertical
7235.72	33.84	43.50	11.40	35.50	3.40	37.24	54.00	-16.76	AV	Vertical
7234.88	36.70	43.50	11.40	35.50	3.40	40.10	68.20	-28.10	Pk	Horizontal
7234.88	33.72	43.50	11.40	35.50	3.40	37.12	54.00	-16.88	AV	Horizontal
10360.25	39.33	44.50	13.80	38.80	8.10	47.43	68.20	-20.77	Pk	Vertical
10360.25	36.74	44.50	13.80	38.80	8.10	44.84	54.00	-9.16	AV	Vertical
10359.96	39.35	44.50	13.80	38.80	8.10	47.45	68.20	-20.75	Pk	Horizontal
10359.96	37.07	44.50	13.80	38.80	8.10	45.17	54.00	-8.83	AV	Horizontal
11034.08	33.19	43.60	14.30	39.50	10.20	43.39	68.20	-24.81	Pk	Vertical
11034.08	30.11	43.60	14.30	39.50	10.20	40.31	54.00	-13.69	AV	Vertical
11021.93	33.43	43.60	14.30	39.50	10.20	43.63	68.20	-24.57	Pk	Horizontal
11021.93	29.89	43.60	14.30	39.50	10.20	40.09	54.00	-13.91	AV	Horizontal
13285.70	31.56	42.60	15.90	38.90	12.20	43.76	68.20	-24.44	Pk	Vertical
13285.70	28.66	42.60	15.90	38.90	12.20	40.86	54.00	-13.14	AV	Vertical
13283.32	32.22	42.60	15.90	38.90	12.20	44.42	68.20	-23.78	Pk	Horizontal
13283.32	29.28	42.60	15.90	38.90	12.20	41.48	54.00	-12.52	AV	Horizontal
Mid Channel (802.11a/ 5785 MHz)										
3252.16	44.93	44.70	6.70	28.20	-9.80	35.13	68.20	-33.07	Pk	Vertical
3252.16	41.64	44.70	6.70	28.20	-9.80	31.84	54.00	-22.16	AV	Vertical
3254.87	44.61	44.70	6.70	28.20	-9.80	34.81	68.20	-33.39	Pk	Horizontal
3254.87	41.18	44.70	6.70	28.20	-9.80	31.38	54.00	-22.62	AV	Horizontal
3995.71	39.73	44.20	7.90	29.70	-6.60	33.13	68.20	-35.07	Pk	Vertical
3995.71	36.37	44.20	7.90	29.70	-6.60	29.77	54.00	-24.23	AV	Vertical
3996.42	38.67	44.20	7.90	29.70	-6.60	32.07	68.20	-36.13	Pk	Horizontal
3996.42	35.90	44.20	7.90	29.70	-6.60	29.30	54.00	-24.70	AV	Horizontal
7227.24	37.12	43.50	11.40	35.50	3.40	40.52	68.20	-27.68	Pk	Vertical
7227.24	34.06	43.50	11.40	35.50	3.40	37.46	54.00	-16.54	AV	Vertical
7225.57	37.04	43.50	11.40	35.50	3.40	40.44	68.20	-27.76	Pk	Horizontal
7225.57	34.65	43.50	11.40	35.50	3.40	38.05	54.00	-15.95	AV	Horizontal
10400.10	39.35	44.50	13.80	38.80	8.10	47.45	68.20	-20.75	Pk	Vertical
10400.10	37.02	44.50	13.80	38.80	8.10	45.12	54.00	-8.88	AV	Vertical
10400.43	39.52	44.50	13.80	38.80	8.10	47.62	68.20	-20.58	Pk	Horizontal
10400.43	37.16	44.50	13.80	38.80	8.10	45.26	54.00	-8.74	AV	Horizontal
11021.63	33.97	43.60	14.30	39.50	10.20	44.17	68.20	-24.03	Pk	Vertical
11021.63	30.78	43.60	14.30	39.50	10.20	40.98	54.00	-13.02	AV	Vertical
11019.68	32.96	43.60	14.30	39.50	10.20	43.16	68.20	-25.04	Pk	Horizontal
11019.68	30.14	43.60	14.30	39.50	10.20	40.34	54.00	-13.66	AV	Horizontal
13281.55	31.58	42.60	15.90	38.90	12.20	43.78	68.20	-24.42	Pk	Vertical
13281.55	28.79	42.60	15.90	38.90	12.20	40.99	54.00	-13.01	AV	Vertical
13284.04	32.24	42.60	15.90	38.90	12.20	44.44	68.20	-23.76	Pk	Horizontal
13284.04	28.87	42.60	15.90	38.90	12.20	41.07	54.00	-12.93	AV	Horizontal



High Channel (802.11a/ 5825 MHz)										
3259.31	45.08	44.70	6.70	28.20	-9.80	35.28	68.20	-32.92	Pk	Vertical
3259.31	41.03	44.70	6.70	28.20	-9.80	31.23	54.00	-22.77	AV	Vertical
3246.81	44.43	44.70	6.70	28.20	-9.80	34.63	68.20	-33.57	Pk	Horizontal
3246.81	41.31	44.70	6.70	28.20	-9.80	31.51	54.00	-22.49	AV	Horizontal
3992.57	39.17	44.20	7.90	29.70	-6.60	32.57	68.20	-35.63	Pk	Vertical
3992.57	36.07	44.20	7.90	29.70	-6.60	29.47	54.00	-24.53	AV	Vertical
3997.89	39.62	44.20	7.90	29.70	-6.60	33.02	68.20	-35.18	Pk	Horizontal
3997.89	35.96	44.20	7.90	29.70	-6.60	29.36	54.00	-24.64	AV	Horizontal
7234.09	37.24	43.50	11.40	35.50	3.40	40.64	68.20	-27.56	Pk	Vertical
7234.09	34.54	43.50	11.40	35.50	3.40	37.94	54.00	-16.06	AV	Vertical
7224.31	37.62	43.50	11.40	35.50	3.40	41.02	68.20	-27.18	Pk	Horizontal
7224.31	34.30	43.50	11.40	35.50	3.40	37.70	54.00	-16.30	AV	Horizontal
10480.07	39.38	44.50	13.80	38.80	8.10	47.48	68.20	-20.72	Pk	Vertical
10480.07	36.11	44.50	13.80	38.80	8.10	44.21	54.00	-9.79	AV	Vertical
10479.98	39.52	44.50	13.80	38.80	8.10	47.62	68.20	-20.58	Pk	Horizontal
10479.98	36.12	44.50	13.80	38.80	8.10	44.22	54.00	-9.78	AV	Horizontal
11028.37	34.10	43.60	14.30	39.50	10.20	44.30	68.20	-23.90	Pk	Vertical
11028.37	30.04	43.60	14.30	39.50	10.20	40.24	54.00	-13.76	AV	Vertical
11019.74	33.86	43.60	14.30	39.50	10.20	44.06	68.20	-24.14	Pk	Horizontal
11019.74	30.87	43.60	14.30	39.50	10.20	41.07	54.00	-12.93	AV	Horizontal
13297.69	31.57	42.60	15.90	38.90	12.20	43.77	68.20	-24.43	Pk	Vertical
13297.69	28.61	42.60	15.90	38.90	12.20	40.81	54.00	-13.19	AV	Vertical
13287.88	32.83	42.60	15.90	38.90	12.20	45.03	68.20	-23.17	Pk	Horizontal
13287.88	29.29	42.60	15.90	38.90	12.20	41.49	54.00	-12.51	AV	Horizontal


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11n (HT-20).
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
4. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported.




3.2.9 Band Edge

Band I 5150-5250MHz

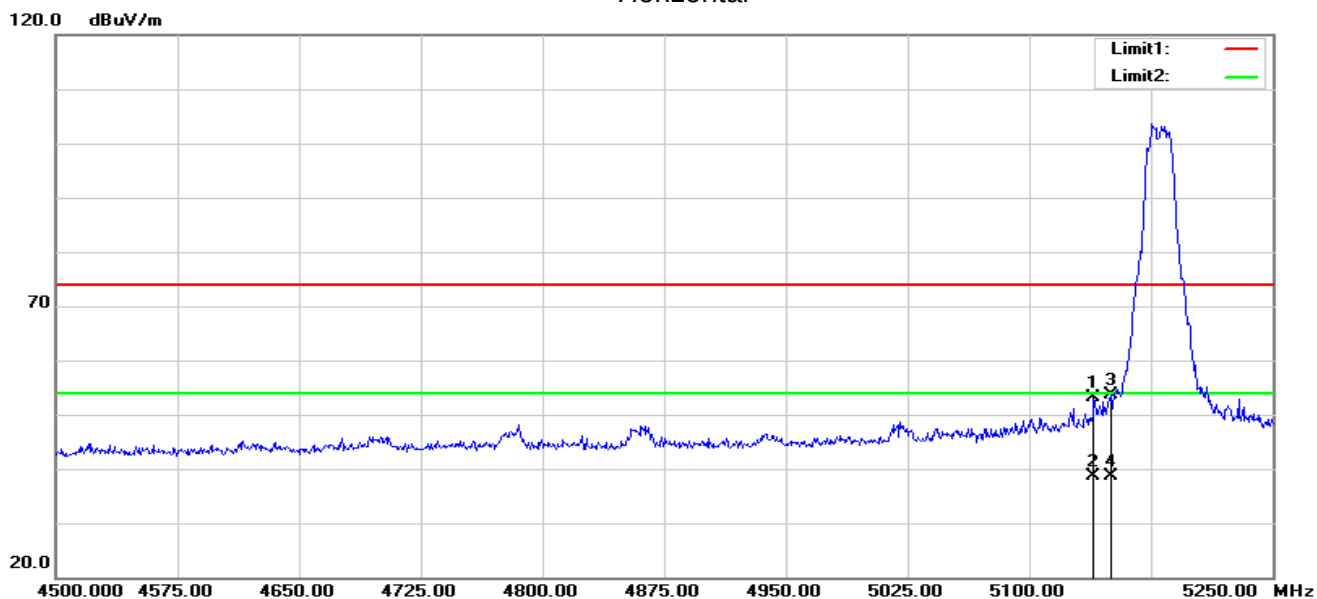
802.11ac (VHT-20) Low
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5139.750	58.94	-5.74	53.20	74.00	-20.80	peak
2	5139.750	44.26	-5.74	38.52	54.00	-15.48	AVG
3	5150.000	59.39	-5.73	53.66	74.00	-20.34	peak
4	5150.000	44.41	-5.73	38.68	54.00	-15.32	AVG


Vertical

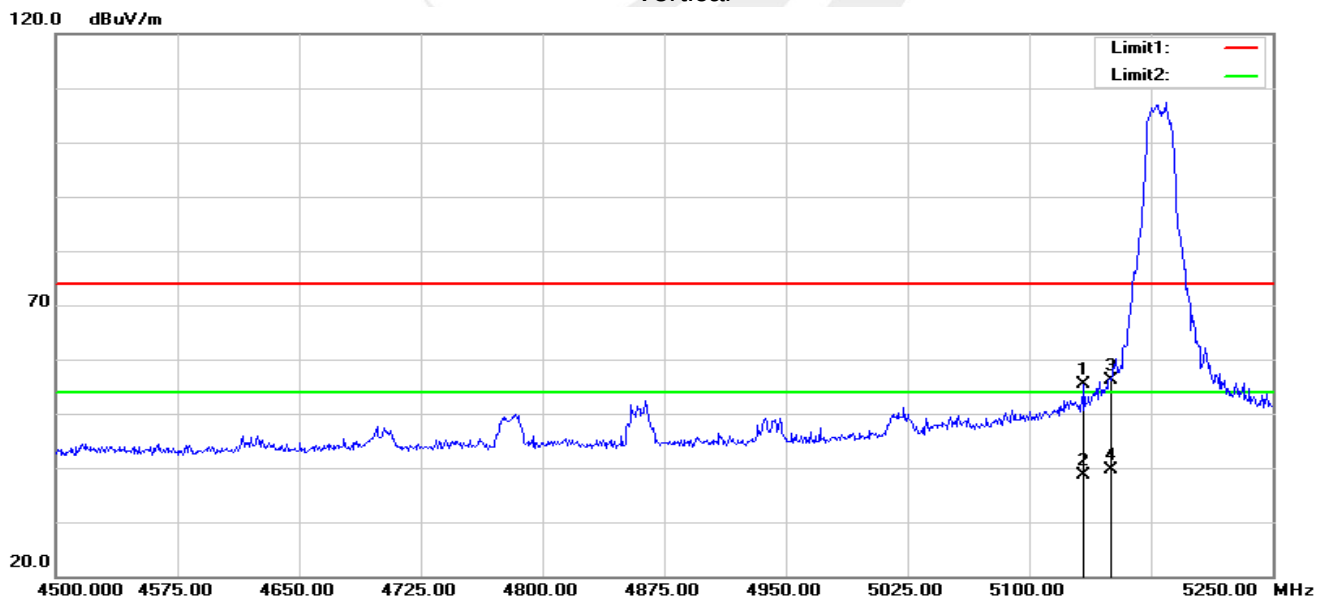

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5133.750	61.03	-5.73	55.30	74.00	-18.70	peak
2	5133.750	44.47	-5.73	38.74	54.00	-15.26	AVG
3	5150.000	61.88	-5.73	56.15	74.00	-17.85	peak
4	5150.000	45.41	-5.73	39.68	54.00	-14.32	AVG

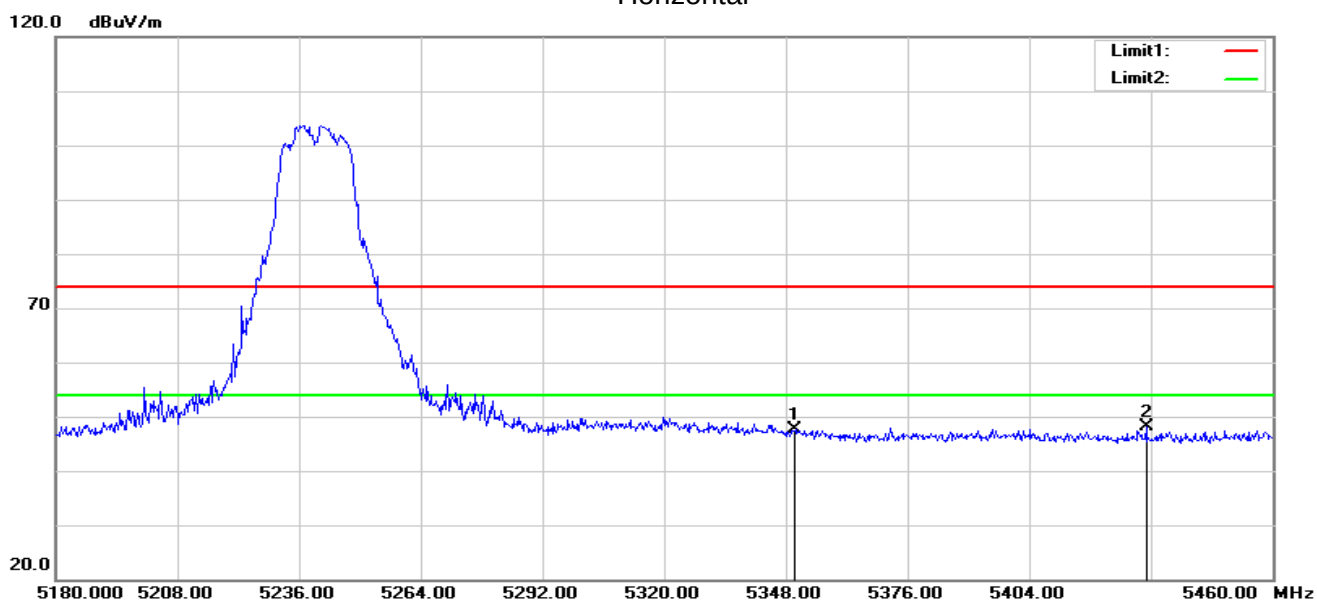**802.11ac (VHT-20) High
Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	52.86	-5.23	47.63	74.00	-26.37	peak
2	5430.880	53.30	-5.18	48.12	74.00	-25.88	peak

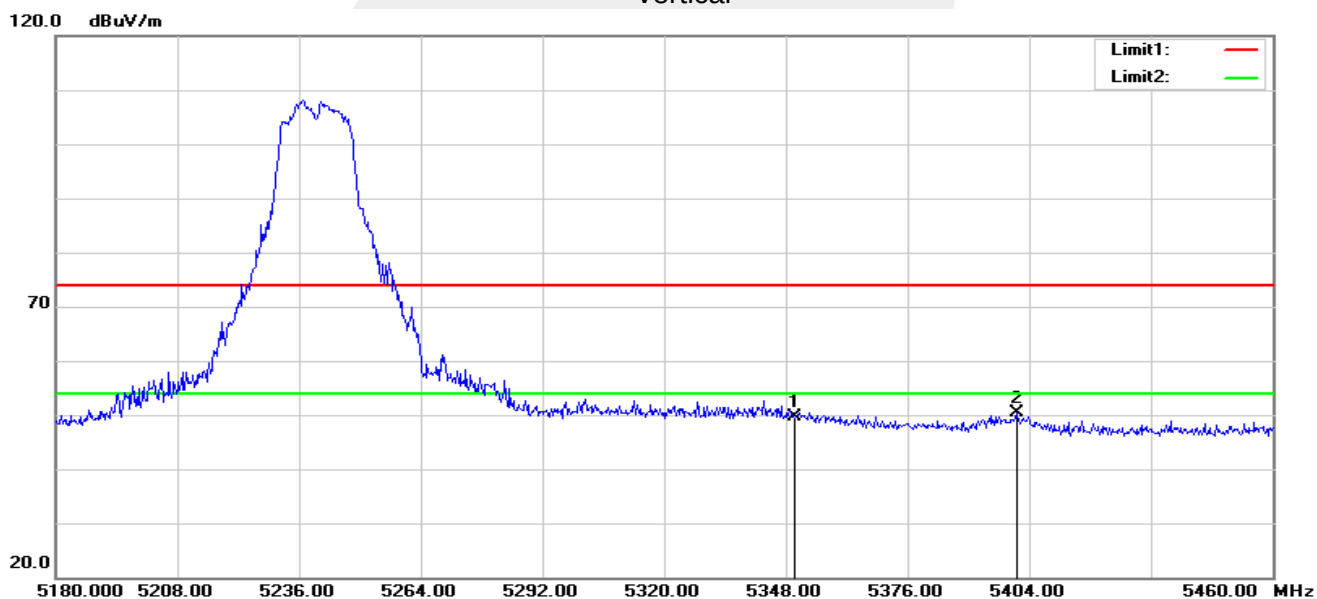Vertical


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	54.82	-5.23	49.59	74.00	-24.41	peak
2	5401.200	55.57	-5.25	50.32	74.00	-23.68	peak

Note: 1. 802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80) all has been tested, the worst case is 802.11ac (VHT-20),only shown the worst case.

2. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported.




Band II 5250-5350MHz

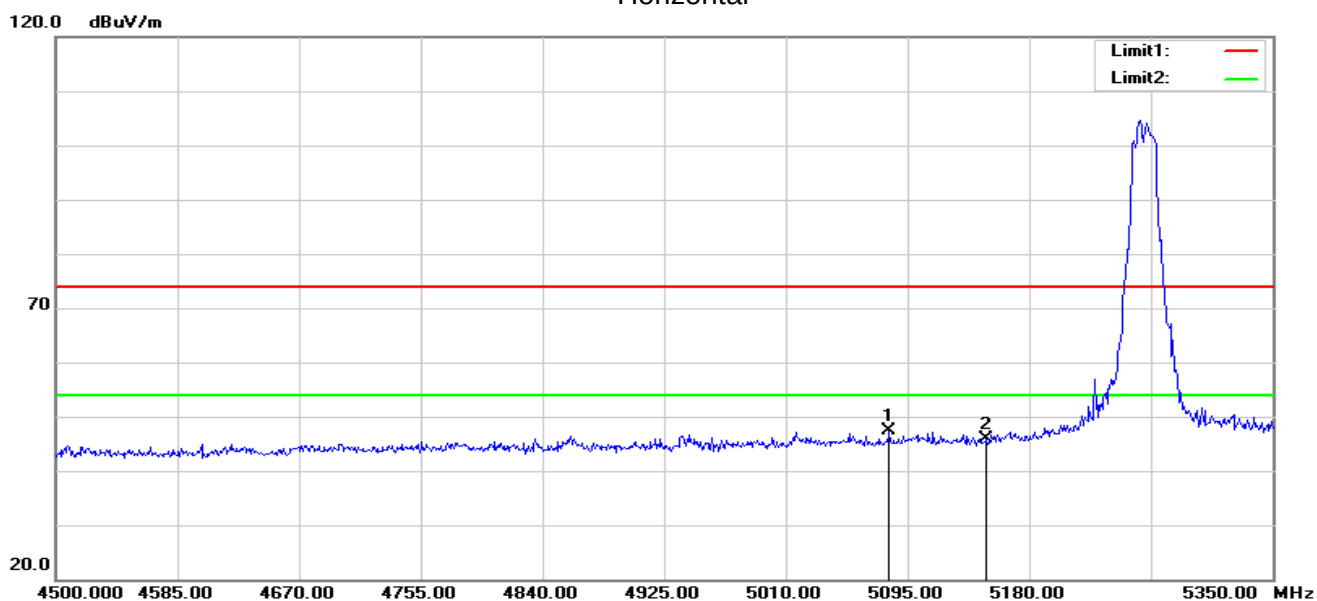
802.11ac (VHT-20) Low
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5082.250	53.14	-5.82	47.32	74.00	-26.68	peak
2	5150.000	51.56	-5.73	45.83	74.00	-28.17	peak

Vertical

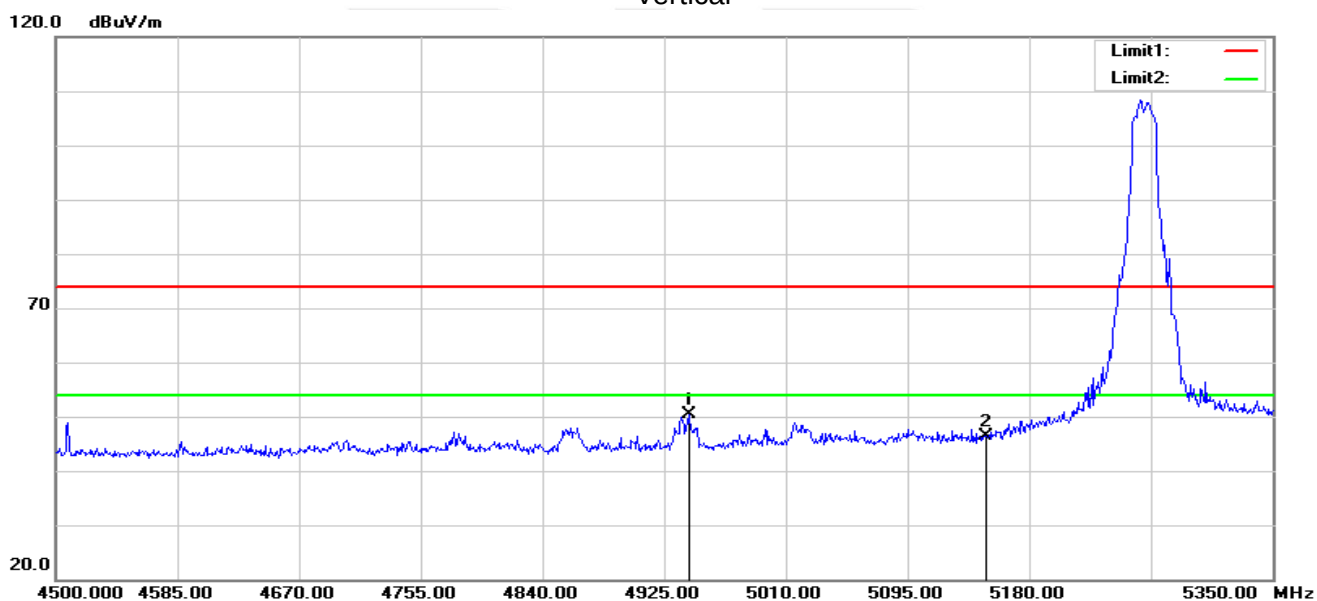


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4942.000	56.84	-6.57	50.27	74.00	-23.73	peak
2	5150.000	52.10	-5.73	46.37	74.00	-27.63	peak

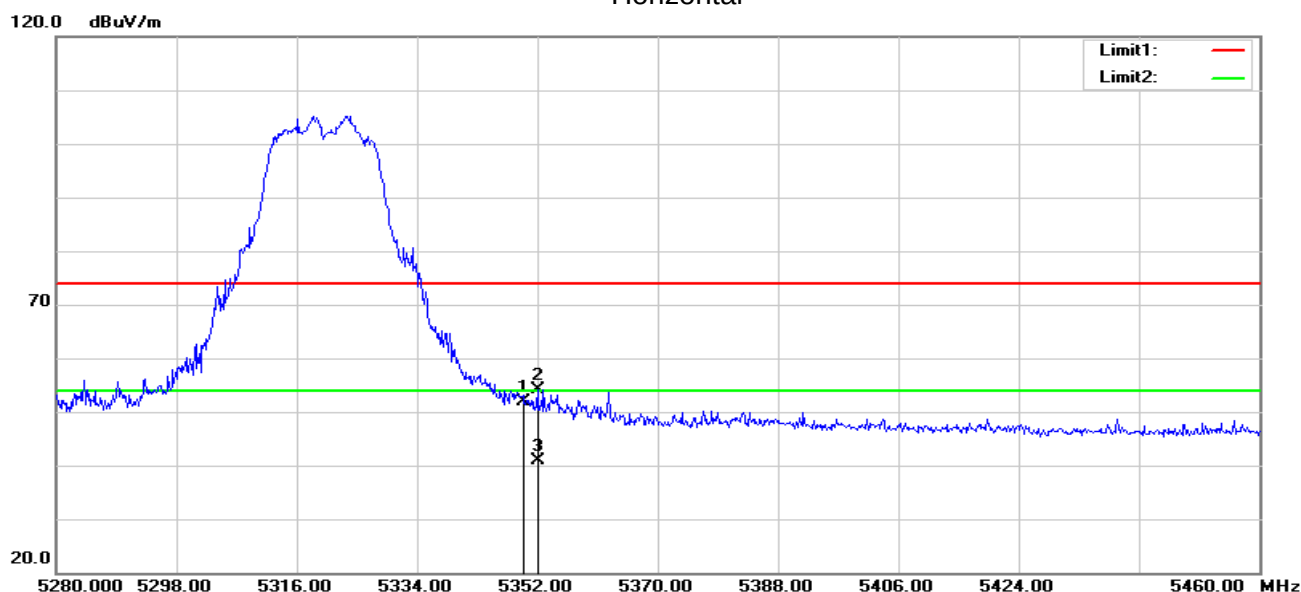**802.11ac (VHT-20) High
Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	56.99	-5.23	51.76	74.00	-22.24	peak
2	5352.000	59.29	-5.23	54.06	74.00	-19.94	peak
3	5352.000	46.07	-5.23	40.84	54.00	-13.16	AVG

Vertical

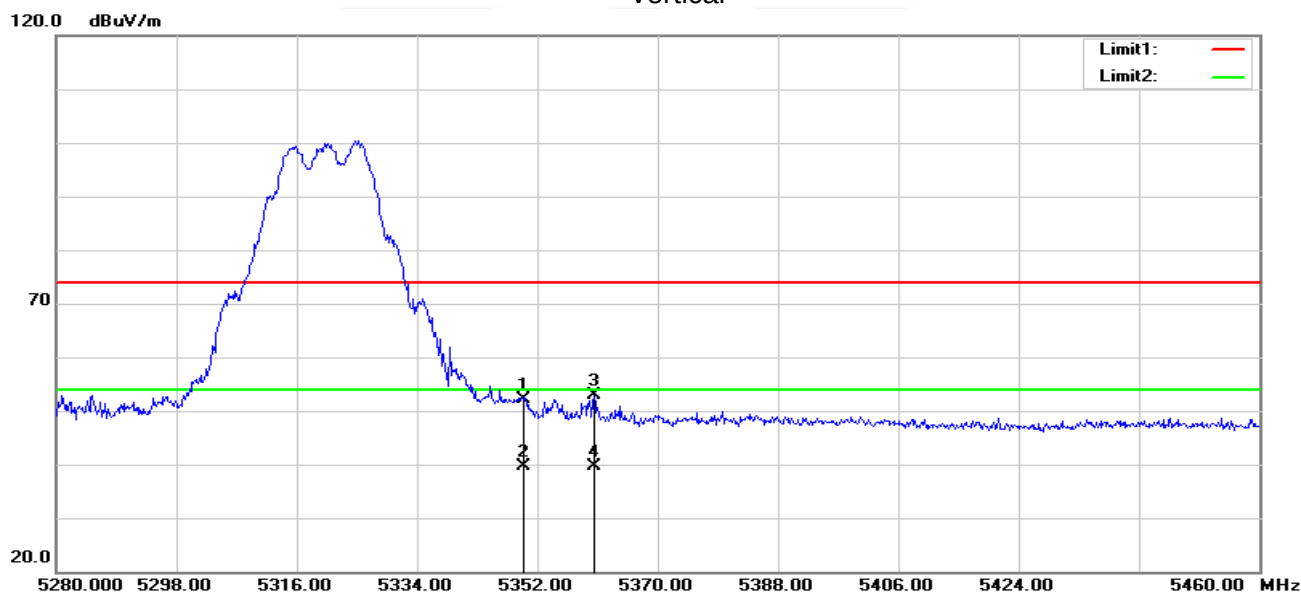


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	57.37	-5.23	52.14	74.00	-21.86	peak
2	5350.000	44.90	-5.23	39.67	54.00	-14.33	AVG
3	5360.460	58.07	-5.23	52.84	74.00	-21.16	peak
4	5360.460	44.75	-5.23	39.52	54.00	-14.48	AVG

Note: 1. 802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80) all has been tested, the worst case is 802.11ac (VHT-20),only shown the worst case.

2. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported.




Band III 5470-5725MHz

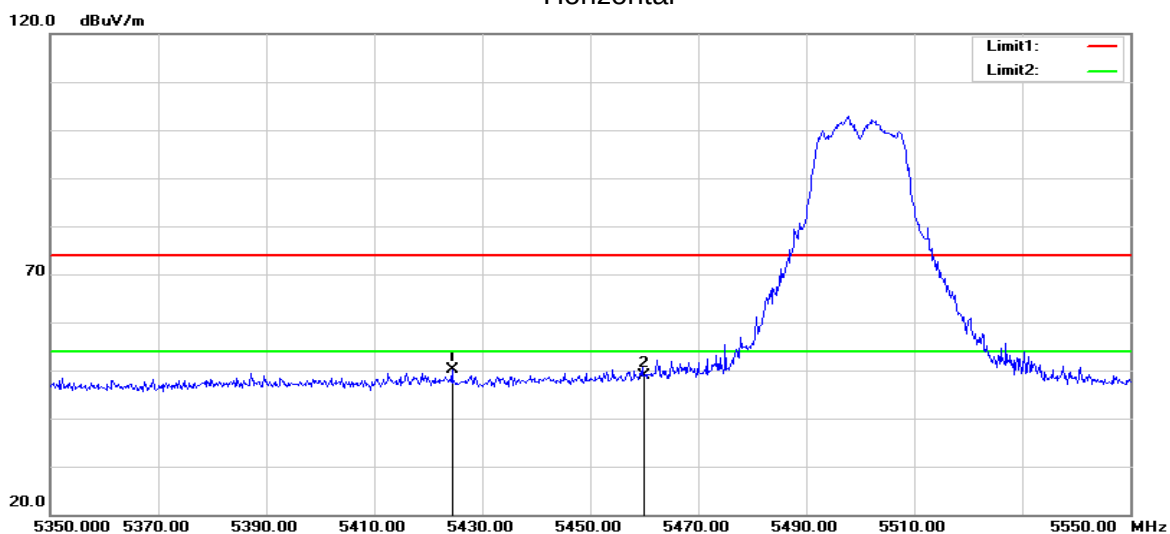802.11ac (VHT-20) Low
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5424.400	55.27	-5.19	50.08	74.00	-23.92	peak
2	5460.000	54.06	-5.11	48.95	74.00	-25.05	peak

Vertical

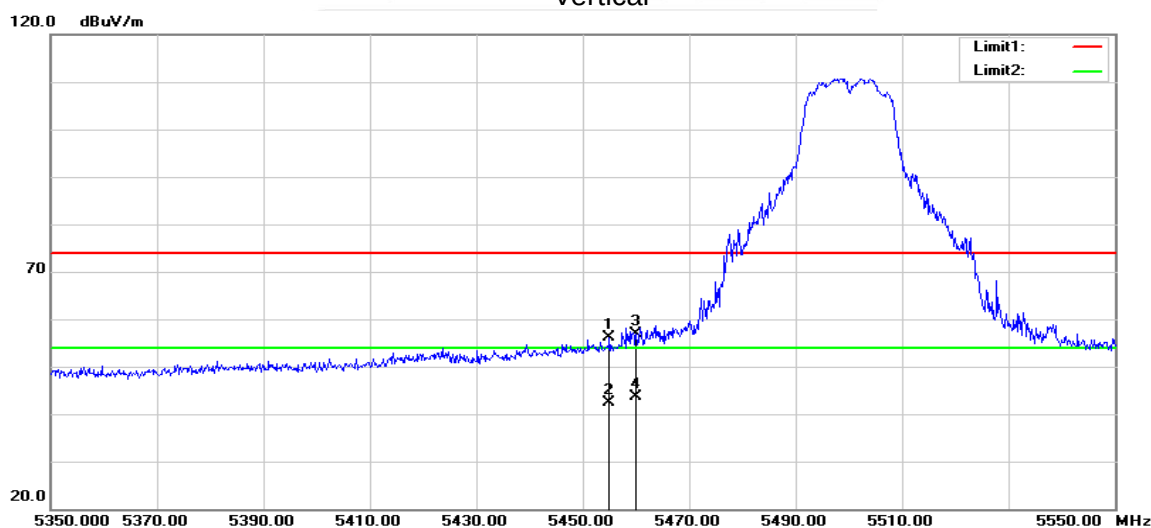

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.000	61.21	-5.13	56.08	74.00	-17.92	peak
2	5455.000	47.50	-5.13	42.37	54.00	-11.63	AVG
3	5460.000	61.89	-5.11	56.78	74.00	-17.22	peak
4	5460.000	48.83	-5.11	43.72	54.00	-10.28	AVG

Note: 1. 802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80) all has been tested, the worst case is 802.11ac (VHT-20),only shown the worst case.

2. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported.

3. The High channel main frequency is too far away from the restricted band and does not require testing.

Band IV(5.725-5.85 GHz)

Note: The main frequency is too far away from the restricted band and does not require testing.

4. CONDUCTED SPURIOUS EMISSIONS AND BANDEDGE

4.1 LIMIT

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold


For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 5700 to 5725 MHz Upper Band Edge: 5850 to 5870 MHz
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP

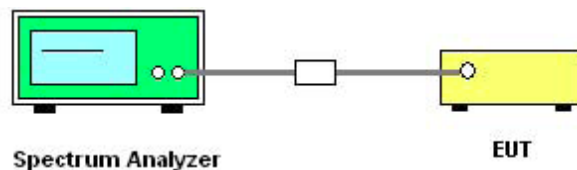

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1000 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

Data See Attachment A





5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

FCC:

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC:

1. For the 5.15-5.25 GHz, The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.
3. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

5.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.6 TEST RESULTS**

5150-5250MHz								
Frequency	Ant_A Power Density(dBm)	Ant_B Power Density(dBm)	Duty cycle factor	Ant_A Power Density(dBm)	Ant_B Power Density(dBm)	Power Density Total(dBm)	Limit	Result
802.11a								
5180	9.550	9.428	0.206	9.756	9.634	--	11	PASS
5200	9.506	9.350	0.206	9.712	9.556	--	11	PASS
5240	9.438	9.041	0.206	9.644	9.247	--	11	PASS
802.11n20								
5180	3.640	4.801	0.166	3.806	4.967	7.435	11	PASS
5200	4.037	4.644	0.166	4.203	4.810	7.527	11	PASS
5240	4.822	4.623	0.166	4.988	4.789	7.900	11	PASS
802.11n40								
5190	0.680	0.958	0.711	1.391	1.669	4.542	11	PASS
5230	0.439	1.296	0.711	1.150	2.007	4.610	11	PASS
802.11ac20								
5180	5.823	5.554	0.701	6.524	6.255	9.402	11	PASS
5200	4.605	5.005	0.701	5.306	5.706	8.521	11	PASS
5240	4.775	5.851	0.701	5.476	6.552	9.058	11	PASS
802.11ac40								
5190	0.859	2.097	0.366	1.225	2.463	4.899	11	PASS
5230	1.057	2.474	0.366	1.423	2.840	5.200	11	PASS
802.11ac80								
5210	-1.858	0.538	0.722	-1.136	1.260	3.236	11	PASS



5250-5350MHz								
Frequency	Ant_A Power Density(dBm)	Ant_B Power Density(dBm)	Duty cycle factor	Ant_A Power Density(dBm)	Ant_B Power Density(dBm)	Power Density Total(dBm)	Limit	Result
802.11a								
5260	9.795	9.590	0.206	10.001	9.796	--	11	PASS
5300	9.817	9.826	0.206	10.023	10.032	--	11	PASS
5320	10.109	9.987	0.206	10.315	10.193	--	11	PASS
802.11n20								
5260	4.318	4.824	0.177	4.495	5.001	7.766	11	PASS
5300	4.091	4.994	0.177	4.268	5.171	7.754	11	PASS
5320	3.870	4.837	0.177	4.047	5.014	7.568	11	PASS
802.11n40								
5270	1.020	1.346	0.711	1.731	2.057	4.907	11	PASS
5310	0.829	1.405	0.711	1.540	2.116	4.847	11	PASS
802.11ac20								
5260	4.424	6.613	0.703	5.127	7.316	9.368	11	PASS
5300	4.860	6.298	0.703	5.563	7.001	9.352	11	PASS
5320	5.015	6.198	0.703	5.718	6.901	9.360	11	PASS
802.11ac40								
5270	1.654	3.093	0.393	2.047	3.486	5.836	11	PASS
5310	1.862	2.930	0.393	2.255	3.323	5.832	11	PASS
802.11ac80								
5290	-1.193	-0.233	0.708	-0.485	0.475	3.031	11	PASS



5470-5725MHz								
Frequency	Ant_A Power Density(dBm)	Ant_B Power Density(dBm)	Duty cycle factor	Ant_A Power Density(dBm)	Ant_B Power Density(dBm)	Power Density Total(dBm)	Limit	Result
802.11a								
5500	10.046	9.221	0.206	10.252	9.427	--	11	PASS
5580	8.602	9.314	0.206	8.808	9.520	--	11	PASS
5700	8.734	9.091	0.206	8.940	9.297	--	11	PASS
802.11n20								
5500	4.688	4.444	0.166	4.854	4.610	7.744	11	PASS
5580	4.227	3.651	0.166	4.393	3.817	7.125	11	PASS
5700	4.172	3.970	0.166	4.338	4.136	7.248	11	PASS
802.11n40								
5510	2.221	0.728	0.699	2.920	1.427	5.248	11	PASS
5550	3.675	2.971	0.699	4.374	3.670	7.046	11	PASS
5670	0.944	0.438	0.699	1.643	1.137	4.408	11	PASS
802.11ac20								
5500	5.220	3.603	0.701	5.921	4.304	8.198	11	PASS
5580	4.069	3.659	0.701	4.770	4.360	7.580	11	PASS
5700	4.136	4.084	0.701	4.837	4.785	7.822	11	PASS
802.11ac40								
5510	1.235	0.719	0.380	1.615	1.099	4.375	11	PASS
5550	1.648	0.717	0.380	2.028	1.097	4.598	11	PASS
5670	0.872	0.537	0.380	1.252	0.917	4.098	11	PASS
802.11ac80								
5530	1.324	0.873	0.711	2.035	1.584	4.826	11	PASS
5610	-1.790	-2.322	0.711	-1.079	-1.611	1.674	11	PASS



5725-5850MHz								
Frequency	Ant_A Power Density(dBm)	Ant_B Power Density(dBm)	Duty cycle factor	Ant_A Power Density(dBm)	Ant_B Power Density(dBm)	Power Density Total(dBm)	Limit	Result
802.11a								
5745	4.711	4.373	0.206	4.917	4.579	--	30	PASS
5785	4.817	4.538	0.206	5.023	4.744	--	30	PASS
5825	5.465	4.451	0.206	5.671	4.657	--	30	PASS
802.11n20								
5745	1.092	0.596	0.177	1.269	0.773	4.039	30	PASS
5785	0.784	0.694	0.177	0.961	0.871	3.927	30	PASS
5825	0.800	0.958	0.177	0.977	1.135	4.067	30	PASS
802.11n40								
5755	-2.070	-2.267	0.699	-1.371	-1.568	1.542	30	PASS
5795	-1.786	-2.840	0.699	-1.087	-2.141	1.428	30	PASS
802.11ac20								
5745	1.105	1.956	0.701	1.806	2.657	5.263	30	PASS
5785	0.992	2.808	0.701	1.693	3.509	5.706	30	PASS
5825	1.080	2.250	0.701	1.781	2.951	5.416	30	PASS
802.11ac40								
5755	-2.386	-0.626	0.379	-2.007	-0.247	1.972	30	PASS
5795	-2.202	-1.653	0.379	-1.823	-1.274	1.470	30	PASS
802.11ac80								
5775	-5.601	-4.134	0.698	-4.903	-3.436	-1.098	30	PASS



EIRP PSD

Band I (5.15-5.25GHz)								
Test Channel	Frequency (MHz)	Ant_A Power Density(dBm)	Ant_B Power Density(dBm)	Ant Gain(dBi)	Ant_A EIRP Power Density(dBm)	Ant_B EIRP Power Density(dBm)	EIRP Power Density Total(dBm)	LIMIT (dBm)
802.11a								
36	5180	9.756	9.634	0.000	9.756	9.634	--	10
40	5200	9.712	9.556	0.000	9.712	9.556	--	10
48	5240	9.644	9.247	0.000	9.644	9.247	--	10
802.11n(HT20)								
36	5180	3.806	4.967	0.000	3.806	4.967	7.435	10
40	5200	4.203	4.810	0.000	4.203	4.810	7.527	10
48	5240	4.988	4.789	0.000	4.988	4.789	7.900	10
802.11n(HT40)								
38	5190	1.391	1.669	0.000	1.391	1.669	4.543	10
46	5230	1.150	2.007	0.000	1.150	2.007	4.610	10
802.11ac(VHT20)								
36	5180	6.524	6.225	0.000	6.524	6.225	9.387	10
40	5200	5.306	5.706	0.000	5.306	5.706	8.521	10
48	5240	5.476	6.552	0.000	5.476	6.552	9.058	10
802.11ac(VHT40)								
38	5190	1.225	2.463	0.000	1.225	2.463	4.898	10
46	5230	1.423	2.840	0.000	1.423	2.840	5.199	10
802.11ac(VHT80)								
42	5210	-1.136	1.260	0.000	(1.136)	1.260	3.235	10

Data see Attachment B



6. BANDWIDTH MEASUREMENT

6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

The following procedure shall be used for measuring 26 bandwidth.

6.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW $\geq$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**

Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5180	22.66	Pass
5200	22.93	Pass
5240	22.17	Pass
802.11n(HT20)		
5180	22.43	Pass
5200	23.20	Pass
5240	22.61	Pass
802.11n(HT40)		
5190	44.73	Pass
5230	44.36	Pass
802.11ac(VHT20)		
5180	22.76	Pass
5200	22.89	Pass
5240	22.17	Pass
802.11ac(VHT40)		
5190	42.19	Pass
5230	44.26	Pass
802.11ac(VHT80)		
5210	86.42	Pass

Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5260	23.00	Pass
5300	21.93	Pass
5320	22.03	Pass
802.11n(HT20)		
5260	22.73	Pass
5300	23.10	Pass
5320	22.73	Pass
802.11n(HT40)		
5270	40.88	Pass
5310	44.70	Pass
802.11ac(VHT20)		
5260	22.64	Pass
5300	22.97	Pass
5320	22.17	Pass
802.11ac(VHT40)		
5270	45.11	Pass
5310	45.59	Pass
802.11ac(VHT80)		
5290	84.84	Pass



Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5500	23.07	Pass
5580	22.76	Pass
5700	22.99	Pass
802.11n(HT20)		
5500	23.47	Pass
5580	22.57	Pass
5700	22.59	Pass
802.11n(HT40)		
5510	45.10	Pass
5550	45.12	Pass
5670	45.05	Pass
802.11ac(VHT20)		
5500	22.70	Pass
5580	21.66	Pass
5700	23.04	Pass
802.11ac(VHT40)		
5510	45.75	Pass
5550	44.75	Pass
5670	45.69	Pass
802.11ac(VHT80)		
5530	87.03	Pass
5610	86.96	Pass

Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5745	22.94	Pass
5785	22.91	Pass
5825	22.74	Pass
802.11n(HT20)		
5745	22.83	Pass
5785	19.63	Pass
5825	22.07	Pass
802.11n(HT40)		
5755	45.05	Pass
5795	45.13	Pass
802.11ac(VHT20)		
5745	22.54	Pass
5785	22.10	Pass
5825	22.29	Pass
802.11ac(VHT40)		
5755	44.90	Pass
5795	44.98	Pass
802.11ac(VHT80)		
5775	85.90	Pass

Note: 1. Antenna A Power > Antenna B Power, Both antenna A and B have been test, Only show the worst data of Antenna A.

2. Test plot see Attachment C.



6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth.

6.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.


The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.2.2 DEVIATION FROM STANDARD

No deviation.

6.2.3 TEST SETUP

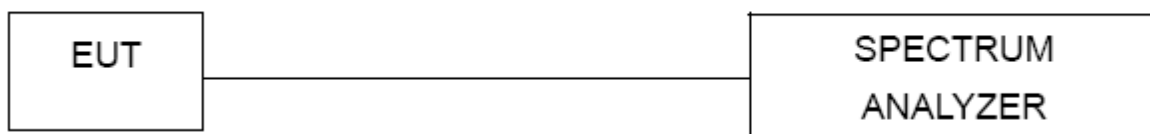

6.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.2.5 TEST RESULTS**

Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5180	16.448	Pass
5200	16.446	Pass
5240	16.427	Pass
802.11n(HT20)		
5180	17.619	Pass
5200	17.621	Pass
5240	17.617	Pass
802.11n(HT40)		
5190	36.131	Pass
5230	36.127	Pass
802.11ac(VHT20)		
5180	17.617	Pass
5200	17.624	Pass
5240	17.650	Pass
802.11ac(VHT40)		
5190	36.157	Pass
5230	36.132	Pass
802.11ac(VHT80)		
5210	75.119	Pass

Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5260	16.443	Pass
5300	16.447	Pass
5320	16.419	Pass
802.11n(HT20)		
5260	17.610	Pass
5300	17.632	Pass
5320	17.592	Pass
802.11n(HT40)		
5270	36.027	Pass
5310	36.113	Pass
802.11ac(VHT20)		
5260	17.620	Pass
5300	17.617	Pass
5320	17.608	Pass
802.11ac(VHT40)		
5270	36.146	Pass
5310	36.140	Pass
802.11ac(VHT80)		
5290	74.974	Pass



Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5500	16.471	Pass
5580	16.488	Pass
5700	16.452	Pass
802.11n(HT20)		
5500	17.617	Pass
5580	17.627	Pass
5700	17.641	Pass
802.11n(HT40)		
5510	36.166	Pass
5550	36.172	Pass
5670	36.116	Pass
802.11ac(VHT20)		
5500	17.623	Pass
5580	17.540	Pass
5700	17.575	Pass
802.11ac(VHT40)		
5510	36.139	Pass
5550	36.127	Pass
5670	36.106	Pass
802.11ac(VHT80)		
5530	75.049	Pass
5610	75.073	Pass

Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5745	16.481	Pass
5785	16.480	Pass
5825	16.465	Pass
802.11n(HT20)		
5745	17.625	Pass
5785	17.575	Pass
5825	17.596	Pass
802.11n(HT40)		
5755	36.076	Pass
5795	36.061	Pass
802.11ac(VHT20)		
5745	17.615	Pass
5785	17.599	Pass
5825	17.620	Pass
802.11ac(VHT40)		
5755	36.092	Pass
5795	36.099	Pass
802.11ac(VHT80)		
5775	74.991	Pass

Note: 1. Antenna A Power > Antenna B Power, Both antenna A and B have been test, Only show the worst data of Antenna A.

2. Test plot see Attachment C.

6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth.


6.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.2 DEVIATION FROM STANDARD

No deviation.

6.3.3 TEST SETUP

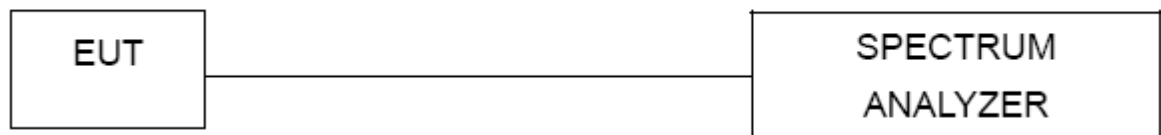

6.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.3.5 TEST RESULTS**

Frequency (MHz)	6dB Bandwidth (MHz)	Pass/Fail
802.11a		
5745	15.15	Pass
5785	14.97	Pass
5825	15.43	Pass
802.11n(HT20)		
5745	15.70	Pass
5785	15.08	Pass
5825	15.11	Pass
802.11n(HT40)		
5755	35.07	Pass
5795	35.08	Pass
802.11ac(VHT20)		
5745	15.13	Pass
5785	15.09	Pass
5825	15.45	Pass
802.11ac(VHT40)		
5755	35.09	Pass
5795	35.09	Pass
802.11ac(VHT80)		
5775	71.32	Pass

Note: 1. Antenna A Power > Antenna B Power, Both antenna A and B have been test, Only show the worst data of Antenna A.
2. Test plot see Attachment D.



7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 LIMIT

FCC:

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Peak Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or $11 \text{ dBm} + 10 \log (26 \text{ dB emission bandwidth})$	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5825	

IC:

For devices in the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum conducted output power shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

RSS-247 Issue 2, February 2017				
Section	Test Item	Limit	Frequency Range (MHz)	Result
6.2.1.1	Peak Output Power	200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz	5150-5250	PASS
6.2.2.1 6.2.3.1		The lesser of 250 mW or $11 \text{ dBm} + 10 \log (26 \text{ dB emission bandwidth})$	5250-5350 5470-5725	
6.2.4.1		1 watt	5725-5825	


7.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

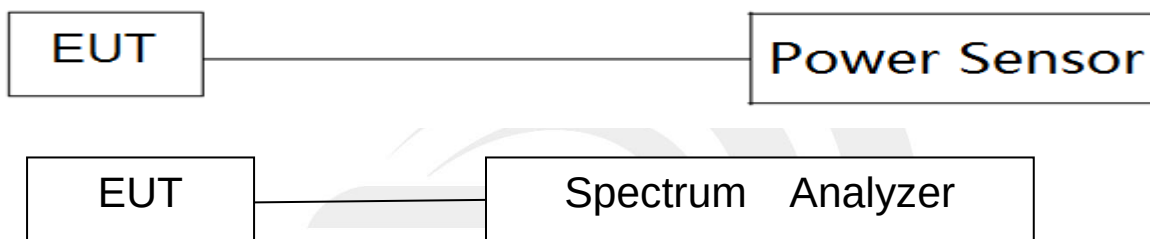

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

Note:

1. For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 0.25 W.
2. For mobile and portable client devices in the 5.25-5.35 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 0.25 W.
3. For mobile and portable client devices in the 5.47-5.725 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 0.25 W.
4. For the band 5.745-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W.

Band I (5.15-5.25GHz)								
Test Channel	Frequency (MHz)	Ant_A AV Power (dBm)	Ant_B AV Power (dBm)	Duty cycle factor(dB)	Ant_A AV Power (dBm)	Ant_B AV Power (dBm)	AV Power Total(dBm)	LIMIT (dBm)
802.11a								
36	5180	14.18	13.95	0.206	14.39	14.16	--	23.98
40	5200	14.14	14.17	0.206	14.35	14.38	--	23.98
48	5240	14.28	14.36	0.206	14.49	14.57	--	23.98
802.11n(HT20)								
36	5180	9.56	8.95	0.166	9.73	9.12	12.44	23.98
40	5200	9.51	8.98	0.166	9.68	9.15	12.43	23.98
48	5240	9.61	9.11	0.166	9.78	9.28	12.54	23.98
802.11n(HT40)								
38	5190	8.55	7.86	0.711	9.26	8.57	11.94	23.98
46	5230	8.76	8.02	0.711	9.47	8.73	12.13	23.98
802.11ac(VHT20)								
36	5180	8.96	8.32	0.701	9.66	9.02	12.36	23.98
40	5200	8.99	8.46	0.701	9.69	9.16	12.44	23.98
48	5240	9.06	8.61	0.701	9.76	9.31	12.55	23.98
802.11ac(VHT40)								
38	5190	8.51	7.89	0.366	8.88	8.26	11.59	23.98
46	5230	8.72	8.04	0.366	9.09	8.41	11.77	23.98
802.11ac(VHT80)								
42	5210	8.43	8.97	0.722	9.15	9.69	12.44	23.98



Band II(5.25-5.35GHz)								
Test Channel	Frequency (MHz)	Ant_A AV Power (dBm)	Ant_B AV Power (dBm)	Duty cycle factor(dB)	Ant_A AV Power (dBm)	Ant_B AV Power (dBm)	AV Power Total(dBm)	LIMIT (dBm)
802.11a								
52	5260	14.24	14.43	0.206	14.45	14.64	--	23.98
60	5300	14.31	14.47	0.206	14.52	14.68	--	23.98
64	5320	14.33	14.48	0.206	14.54	14.69	--	23.98
802.11n(HT20)								
52	5260	9.53	9.14	0.177	9.71	9.32	12.53	23.98
60	5300	9.62	9.15	0.177	9.80	9.33	12.58	23.98
64	5320	9.67	9.12	0.177	9.85	9.30	12.59	23.98
802.11n(HT40)								
54	5270	8.61	8.15	0.711	9.32	8.86	12.11	23.98
62	5310	8.72	8.23	0.711	9.43	8.94	12.20	23.98
802.11ac(VHT20)								
52	5260	9.01	8.65	0.703	9.71	9.35	12.55	23.98
60	5300	9.08	8.63	0.703	9.78	9.33	12.57	23.98
64	5320	9.12	8.59	0.703	9.82	9.29	12.58	23.98
802.11ac(VHT40)								
54	5270	8.62	8.18	0.393	9.01	8.57	11.81	23.98
62	5310	8.70	8.17	0.393	9.09	8.56	11.85	23.98
802.11ac(VHT80)								
58	5290	8.87	9.04	0.708	9.58	9.75	12.67	23.98

Band III(5.47-5.725GHz)								
Test Channel	Frequency (MHz)	Ant_A AV Power (dBm)	Ant_B AV Power (dBm)	Duty cycle factor(dB)	Ant_A AV Power (dBm)	Ant_B AV Power (dBm)	AV Power Total(dBm)	LIMIT (dBm)
802.11a								
100	5500	14.07	13.64	0.206	14.28	13.85	--	23.98
116	5580	13.66	13.28	0.206	13.87	13.49	--	23.98
140	5700	13.71	13.44	0.206	13.92	13.65	--	23.98
802.11n(HT20)								
100	5500	9.66	8.43	0.166	9.83	8.60	12.26	23.98
116	5580	9.21	7.99	0.166	9.38	8.16	11.82	23.98
140	5700	9.23	7.85	0.166	9.40	8.02	11.77	23.98
802.11n(HT40)								
102	5510	8.55	7.39	0.699	9.25	8.09	11.72	23.98
110	5550	8.62	7.37	0.699	9.32	8.07	11.75	23.98
134	5670	8.13	7.06	0.699	8.83	7.76	11.34	23.98
802.11ac(VHT20)								
100	5500	9.04	7.92	0.701	9.74	8.62	12.23	23.98
116	5580	8.69	7.46	0.701	9.39	8.16	11.83	23.98
140	5700	8.67	7.32	0.701	9.37	8.02	11.76	23.98
802.11ac(VHT40)								
102	5510	8.55	7.38	0.380	8.93	7.76	11.39	23.98
110	5550	8.58	7.40	0.380	8.96	7.78	11.42	23.98
134	5670	8.06	7.01	0.380	8.44	7.39	10.96	23.98
802.11ac(VHT80)								
106	5530	8.80	8.42	0.711	9.51	9.13	12.34	23.98
122	5610	8.32	8.17	0.711	9.03	8.88	11.97	23.98




Band IV (5.725-5.85GHz)								
Test Channel	Frequency (MHz)	Ant_A AV Power (dBm)	Ant B_AV Power (dBm)	Duty cycle factor(dB)	Ant_A AV Power (dBm)	Ant_B AV Power (dBm)	AV Power Total(dBm)	LIMIT (dBm)
802.11a								
149	5745	8.66	7.52	0.206	8.87	7.73	--	30
157	5785	8.79	7.47	0.206	9.00	7.68	--	30
165	5825	9.09	7.85	0.206	9.30	8.06	--	30
802.11n(HT20)								
149	5745	5.16	3.88	0.177	5.34	4.06	7.755	30
157	5785	5.32	3.85	0.177	5.50	4.03	7.834	30
165	5825	5.62	4.24	0.177	5.80	4.42	8.172	30
802.11n(HT40)								
151	5755	4.22	2.85	0.699	4.92	3.55	7.298	30
159	5795	4.38	2.92	0.699	5.08	3.62	7.420	30
802.11ac(VHT20)								
149	5745	4.64	3.37	0.701	5.34	4.07	7.763	30
157	5785	4.74	3.32	0.701	5.44	4.02	7.799	30
165	5825	5.03	3.66	0.701	5.73	4.36	8.110	30
802.11ac(VHT40)								
151	5755	4.09	2.83	0.379	4.47	3.21	6.895	30
159	5795	4.23	2.78	0.379	4.61	3.16	6.955	30
802.11ac(VHT80)								
155	5775	4.53	4.84	0.698	5.23	5.54	8.396	30




EIRP Power


Band I (5.15-5.25GHz)-EIRP								
Test Channel	Frequency (MHz)	Ant_A AV Power (dBm)	Ant B_AV Power (dBm)	Ant Gain(dBi)	Ant_A EIRP Power (dBm)	Ant_B EIRP Power (dBm)	EIRP Power Total(dBm)	LIMIT (dBm)
802.11a								
36	5180	14.39	14.16	0.00	14.39	14.16	--	23.01
40	5200	14.35	14.38	0.00	14.35	14.38	--	23.01
48	5240	14.49	14.57	0.00	14.49	14.57	--	23.01
802.11n(HT20)								
36	5180	9.73	9.12	0.00	9.73	9.12	12.45	23.01
40	5200	9.68	9.15	0.00	9.68	9.15	12.43	23.01
48	5240	9.78	9.28	0.00	9.78	9.28	12.55	23.01
802.11n(HT40)								
38	5190	9.26	8.57	0.00	9.26	8.57	11.94	23.01
46	5230	9.47	8.73	0.00	9.47	8.73	12.13	23.01
802.11ac(VHT20)								
36	5180	9.66	9.02	0.00	9.66	9.02	12.36	23.01
40	5200	9.69	9.16	0.00	9.69	9.16	12.44	23.01
48	5240	9.76	9.31	0.00	9.76	9.31	12.55	23.01
802.11ac(VHT40)								
38	5190	8.88	8.26	0.00	8.88	8.26	11.59	23.01
46	5230	9.09	8.41	0.00	9.09	8.41	11.77	23.01
802.11ac(VHT80)								
42	5210	9.15	9.69	0.00	9.15	9.69	12.44	23.01

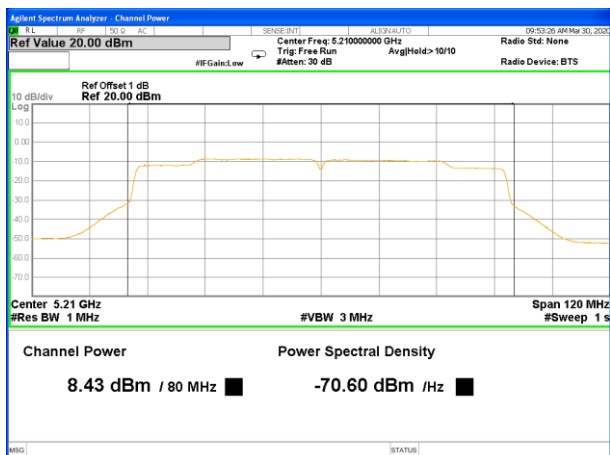


5210MHz_Ant A

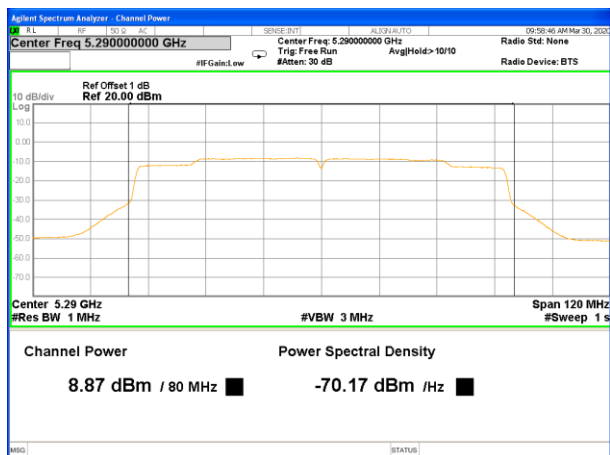


5290MHz_Ant A

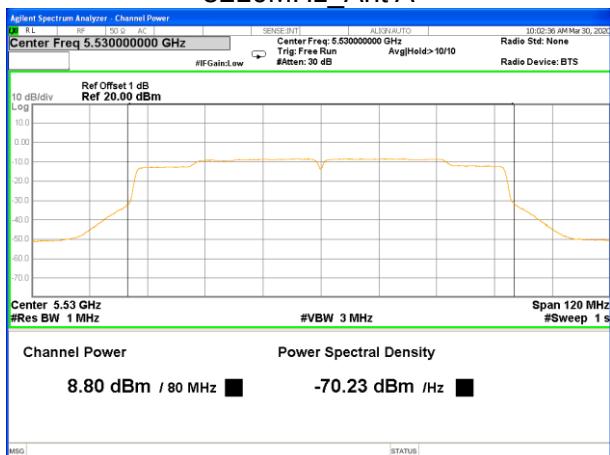


5530MHz_Ant A

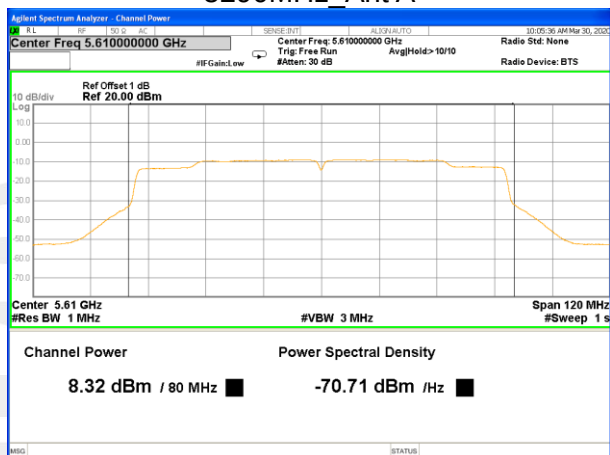


5610MHz_Ant A

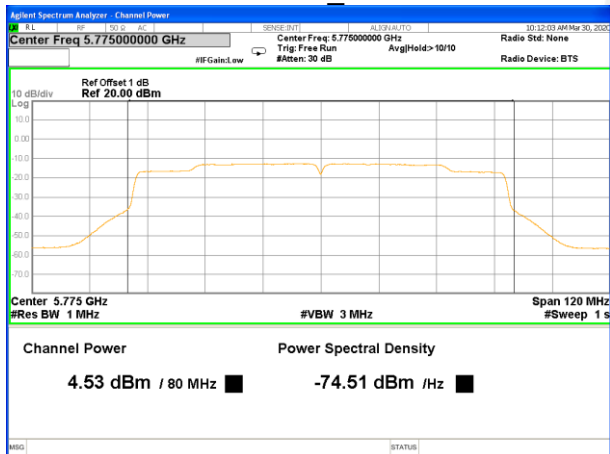


5775MHz_Ant A

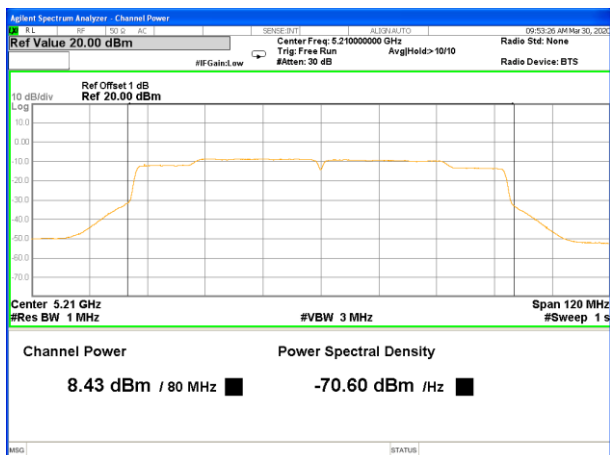


5210MHz_Ant B

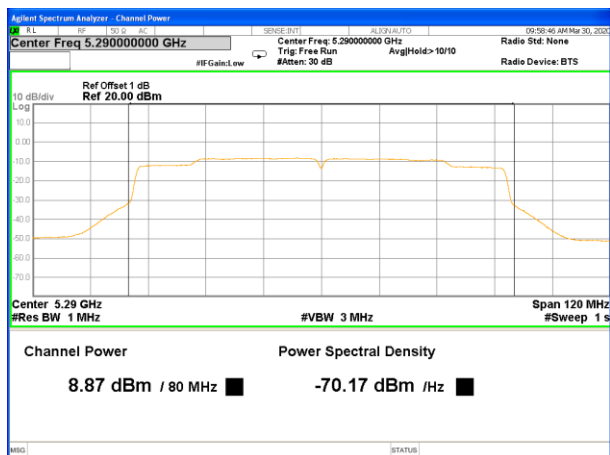


5290MHz_Ant B

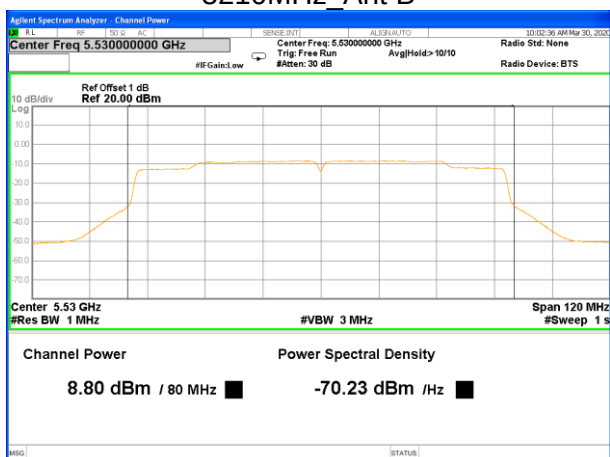

5530MHz_Ant B

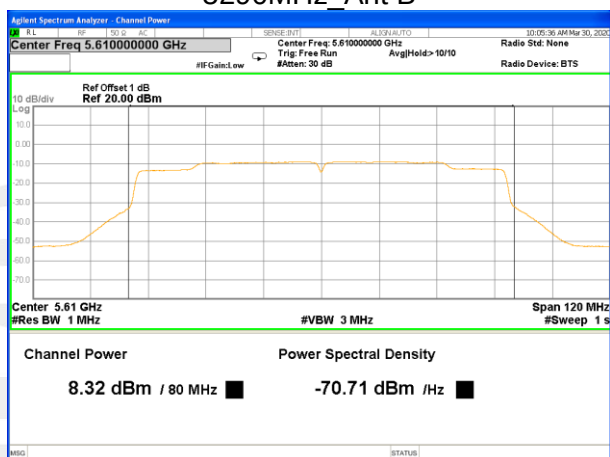

5610MHz_Ant B

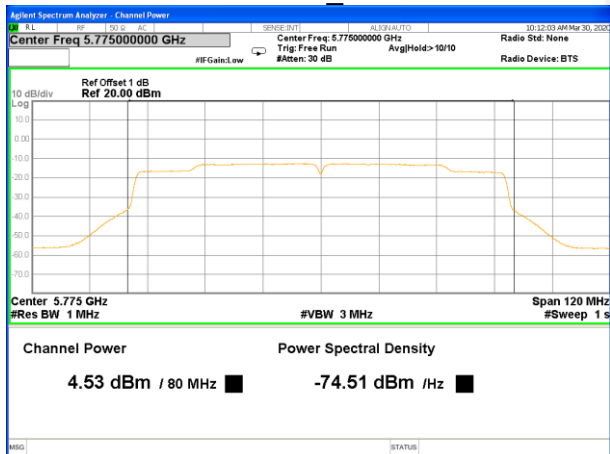


5775MHz_Ant B




Duty cycle

Band 1				
Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty factor(dB)
a	2.060	2.160	95.37%	0.206
n20	1.925	2.000	96.25%	0.166
n40	0.945	1.113	84.91%	0.711
ac20	0.993	1.167	85.09%	0.701
ac40	0.954	1.038	91.91%	0.366
ac80	0.464	0.548	84.68%	0.722
Band 2				
Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty factor(dB)
a	2.060	2.160	95.37%	0.206
n20	1.920	2.000	96.00%	0.177
n40	0.945	1.113	84.91%	0.711
ac20	0.990	1.164	85.05%	0.703
ac40	0.951	1.041	91.35%	0.393
ac80	0.466	0.548	84.96%	0.708
Band 3				
Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty factor(dB)
a	2.060	2.160	95.37%	0.206
n20	1.925	2.000	96.25%	0.166
n40	0.945	1.110	85.14%	0.699
ac20	0.993	1.167	85.09%	0.701
ac40	0.951	1.038	91.62%	0.380
ac80	0.466	0.548	84.90%	0.711
Band 4				
Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty factor(dB)
a	2.060	2.160	95.37%	0.206
n20	1.920	2.000	96.00%	0.177
n40	0.945	1.110	85.14%	0.699
ac20	0.993	1.167	85.09%	0.701
ac40	0.954	1.041	91.64%	0.379
ac80	0.468	0.550	85.15%	0.698

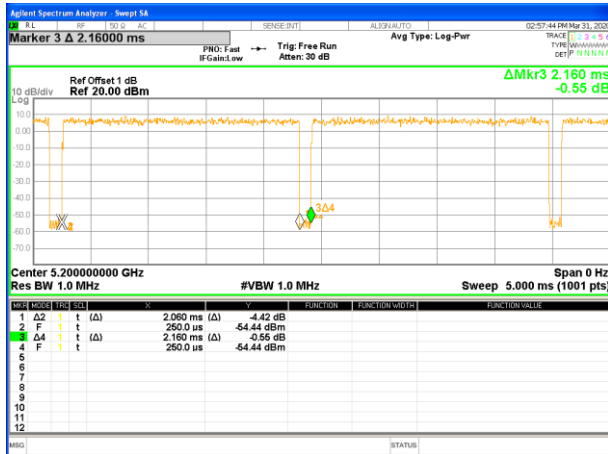

Band 1-a20

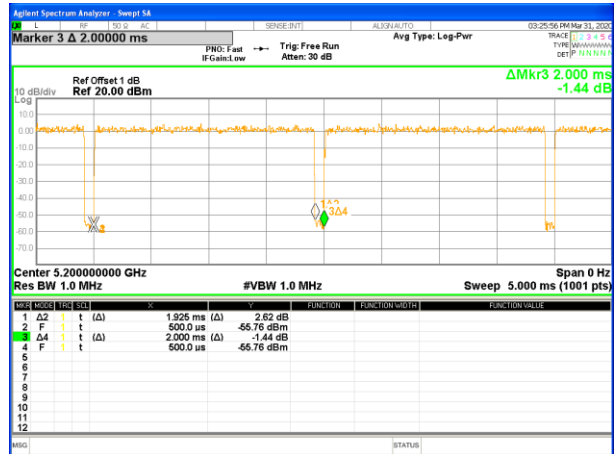


Band 1-n20



Band 1-n40



Band 1-ac20

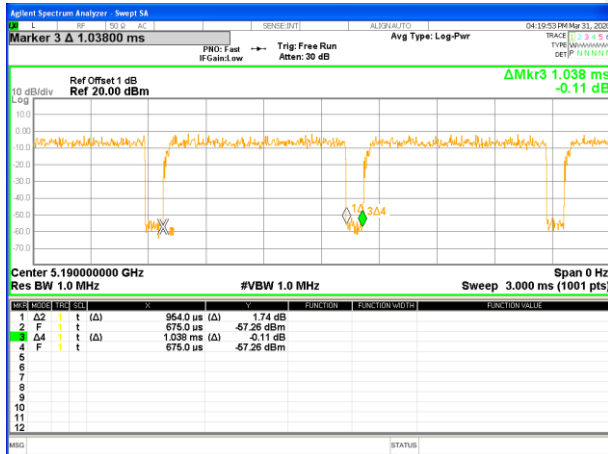

Band 1-ac40



Band 1-ac80




Band 2-a20




Band 2-n20



Band 2-n40

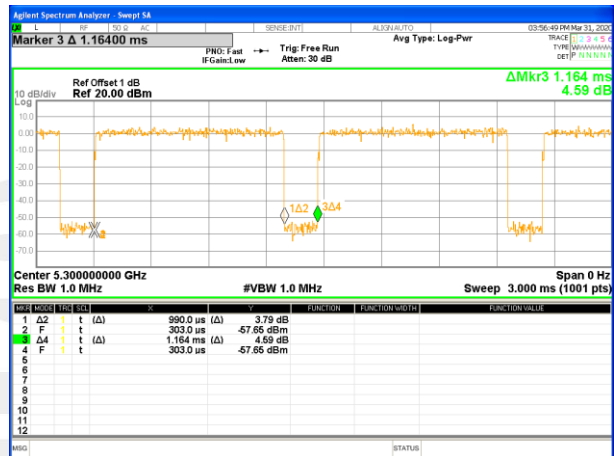

Band 2-ac20

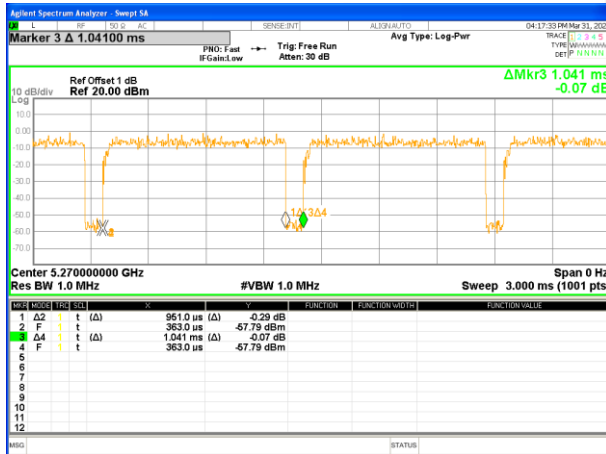

Band 2-ac40




Band 2-ac80




Band 3-a20




Band 3-n20

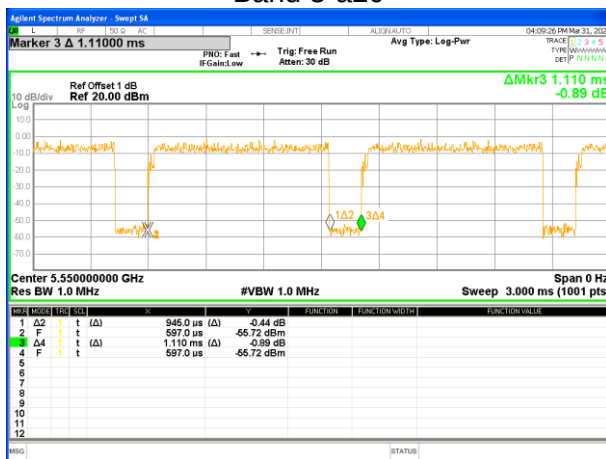

Band 3-n40

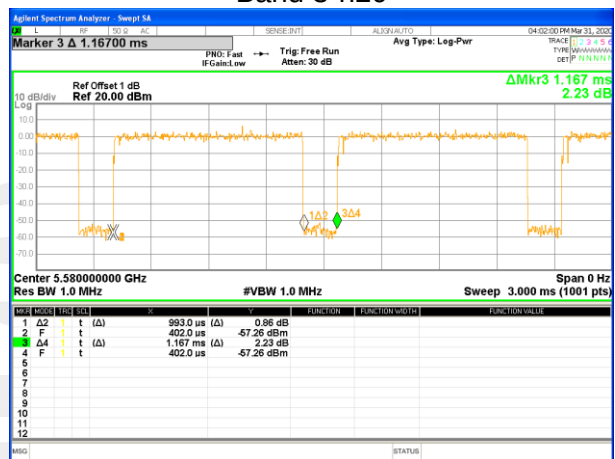


Band 3-ac20

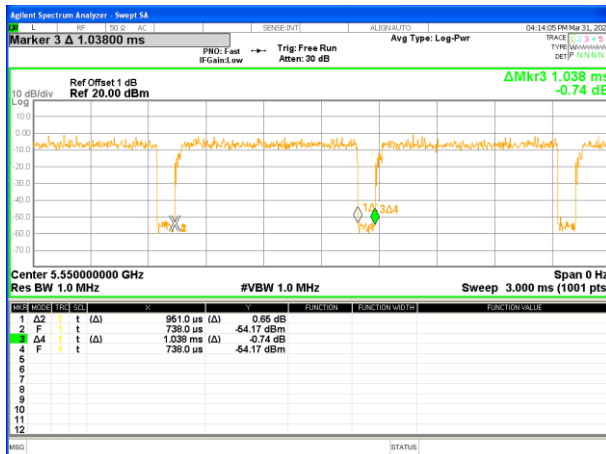

Band 3-ac40



Band 3-ac80

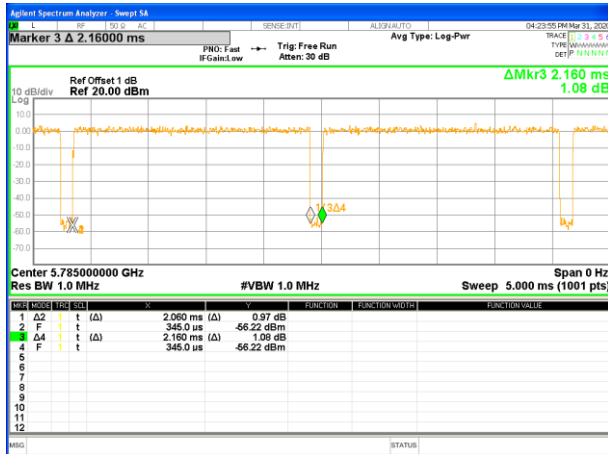

Band 4-a20



Band 4-n20



Band 4-n40



Band 4-ac20



Band 4-ac40



Band 4-ac80



8. AUTOMATICALLY DISCONTINUE TRANSMISSION

8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission





9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203&RSS GEN requirement: For intentional device, according to 15.203&RSS GEN: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is PIFA Antenna. It comply with the standard requirement.





10. FREQUENCY STABILITY

10.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.02\%$ of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees.

10.2 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

10.3 TEST RESULT

Channel 40 (5200MHz)

Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency(MHz)
8.51	5200.0032
7.4	5200.0028
6.29	5200.0031
Max.Deviation(MHz)	0.0032
Max.Deviation(ppm)	0.62

Rated working voltage: DC 7.4V

Temperature vs. Frequency Stability

Temperature($^{\circ}$ C)	Measurement Frequency(MHz)
-30	5200.0038
-20	5200.0030
-10	5200.0036
0	5200.0034
10	5200.0035
20	5200.0030
30	5200.0031
40	5200.0028
50	5200.0037
Max.Deviation(MHz)	0.0038
Max.Deviation(ppm)	0.73



Channel 60 (5300MHz)

Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency(MHz)
8.51	5300.0037
7.4	5300.0036
6.29	5300.0029
Max.Deviation(MHz)	0.0037
Max.Deviation(ppm)	0.70

Rated working voltage: DC 7.4V

Temperature vs. Frequency Stability

Temperature(°C)	Measurement Frequency(MHz)
-30	5300.0035
-20	5300.0031
-10	5300.0025
0	5300.0032
10	5300.0030
20	5300.0028
30	5300.0027
40	5300.0028
50	5300.0026
Max.Deviation(MHz)	0.0035
Max.Deviation(ppm)	0.66



Channel 116 (5580MHz)

Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency(MHz)
8.51	5580.0031
7.4	5580.0023
6.29	5580.0026
Max.Deviation(MHz)	0.0031
Max.Deviation(ppm)	0.56

Rated working voltage: DC 7.4V

Temperature vs. Frequency Stability

Temperature(°C)	Measurement Frequency(MHz)
-30	5580.0039
-20	5580.0032
-10	5580.0034
0	5580.0030
10	5580.0029
20	5580.0029
30	5580.0035
40	5580.0032
50	5580.0032
Max.Deviation(MHz)	0.0039
Max.Deviation(ppm)	0.70



Channel 157 (5785MHz)

Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency(MHz)
8.51	5785.0036
7.4	5785.0036
6.29	5785.0027
Max.Deviation(MHz)	0.0036
Max.Deviation(ppm)	0.62

Rated working voltage: DC 7.4V

Temperature vs. Frequency Stability

Temperature(°C)	Measurement Frequency(MHz)
-30	5785.0033
-20	5785.0030
-10	5785.0032
0	5785.0030
10	5785.0029
20	5785.0029
30	5785.0032
40	5785.0031
50	5785.0025
Max.Deviation(MHz)	0.0033
Max.Deviation(ppm)	0.57



APPENDIX - PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※

