



# FCC RADIO TEST REPORT

FCC ID : 2AVVJ-5273  
Equipment : Digital Media Receiver  
Model Name : L4S3RE  
Applicant : Coral Creep LLC  
BROWNSBORO CROSSING  
9850 VON ALLMEN COURT, SUITE  
201, LOUISVILLE, KENTUCKY, 40241  
Standard : FCC Part 15 Subpart C §15.247

The product was received on Apr. 24, 2020 and testing was started from May 08, 2020 and completed on Jun. 29, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT .....	5
1.4 Testing Location .....	6
1.5 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system .....	10
2.5 EUT Operation Test Setup .....	10
2.6 Measurement Results Explanation Example.....	10
<b>3 Test Result.....</b>	<b>11</b>
3.1 6dB and 99% Bandwidth Measurement .....	11
3.2 Output Power Measurement.....	15
3.3 Power Spectral Density Measurement .....	16
3.4 Conducted Band Edges and Spurious Emission Measurement .....	20
3.5 Radiated Band Edges and Spurious Emission Measurement .....	25
3.6 AC Conducted Emission Measurement.....	30
3.7 Antenna Requirements.....	32
<b>4 List of Measuring Equipment .....</b>	<b>33</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>35</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	



### History of this test report

Report No.	Version	Description	Issued Date
FR012305-01D	01	Initial issue of report	Jul. 06, 2020
FR012305-01D	02	Revise frequency range in section 1.2	Jul. 28, 2020



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.247(a)(2)	6dB Bandwidth	Pass
3.1	2.1049	99% Occupied Bandwidth	Reporting only
3.2	15.247(b)(3)	Output Power	Pass
3.3	15.247(e)	Power Spectral Density	Pass
3.4	15.247(d)	Radiated Band Edges and Spurious Emission	Pass
3.6	15.207	AC Conducted Emission	Pass
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Yimin Ho**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	L4S3RE
FCC ID	2AVVJ-5273
EUT supports Radios application	WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE Zigbee/FSK/LoRa

## 1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2405 MHz ~ 2475 MHz
Number of Channels	16
Carrier Frequency of Each Channel	5 MHz
Maximum Output Power to Antenna	14.10 dBm (0.0257 W)
99% Occupied Bandwidth	2.330 MHz
Antenna Type / Gain	Flex PIFA Antenna with gain 4.99 dBi
Type of Modulation	OQPSK

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.4 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH11-HY	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

### 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440		

### 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower)
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	250 kbps / OQPSK
<b>Conducted Test Cases</b>	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH17_2435 MHz Mode 3: Zigbee Tx CH25_2475 MHz
<b>Radiated Test Cases</b>	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH17_2435 MHz Mode 3: Zigbee Tx CH25_2475 MHz
<b>AC Conducted Emission</b>	Mode 1 :WLAN (2.4GHz) Link + Bluetooth Link + Internal Speaker play Bangarang + Adapter Mode 2 :WLAN (2.4GHz) Link + Zigbee Link + Line in + Adapter Mode 3 :Lora Tx + Adapter
<b>Remark:</b> The worst case of conducted emission is mode 2; only the test data of it was reported.	

## 2.3 Connection Diagram of Test System

<AC Conducted Emission with Bluetooth Mode>

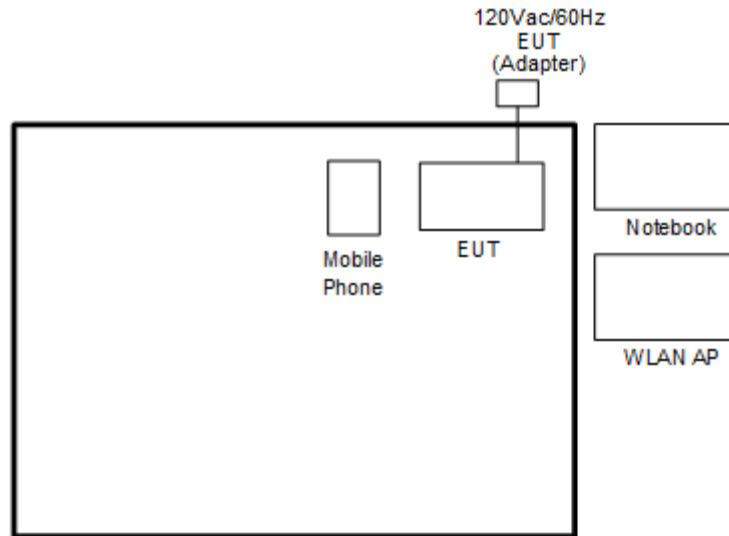


<AC Conducted Emission with Zigbee Mode>

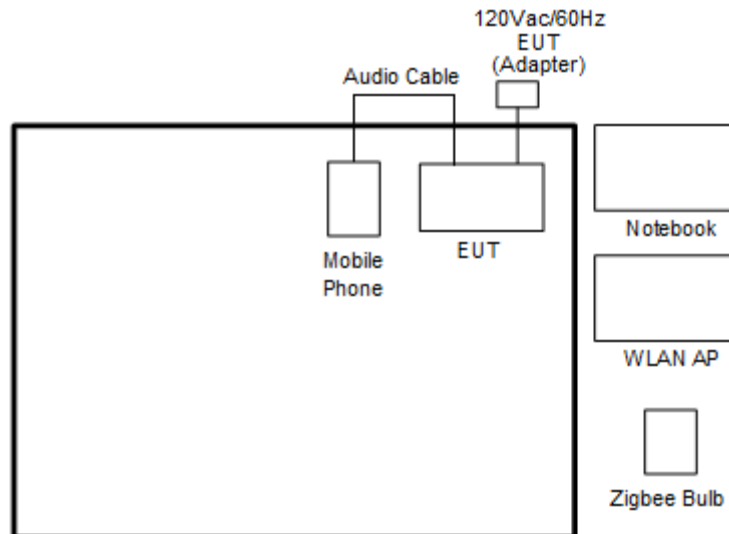




<AC Conducted Emission Lora Tx Mode>

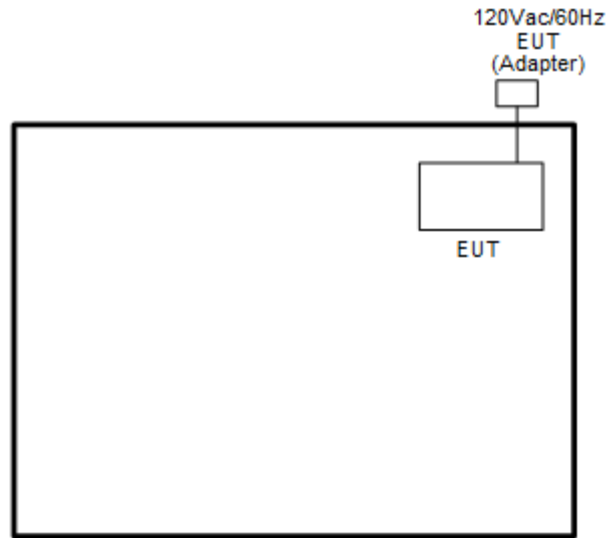

<Zigbee Tx Mode>

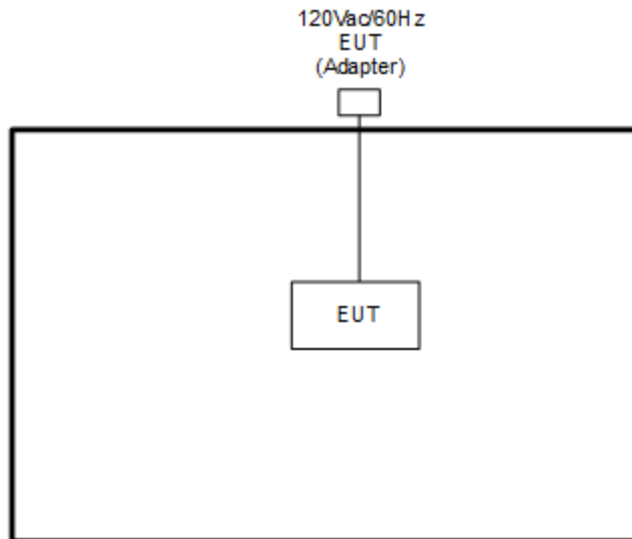



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
2.	Notebook	DELL	Latitude E3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Zigbee Bulb	OSRAM	73674	DZO-IQHOME	N/A	N/A
4.	Smart Phone	Samsung	SM-A730F/DS	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

The RF test items, utility “Compliance v1.0.0.79” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

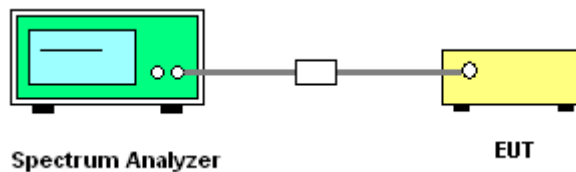




### 3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

#### 6 dB Bandwidth Plot on Channel 11

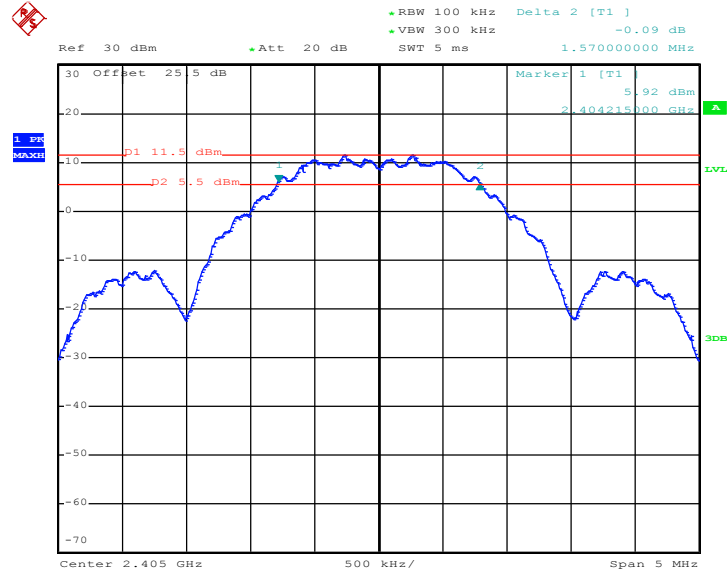

Date: 8.JUN.2020 15:35:30


#### 6 dB Bandwidth Plot on Channel 17

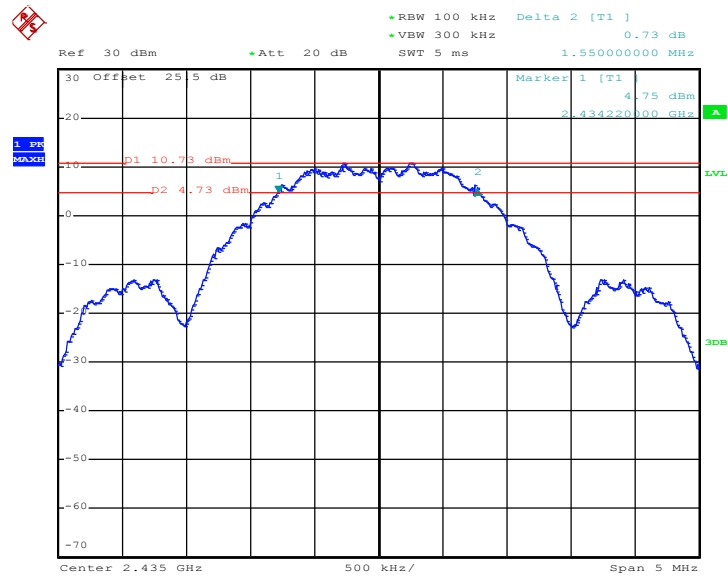

Date: 8.JUN.2020 16:16:34



6 dB Bandwidth Plot on Channel 25

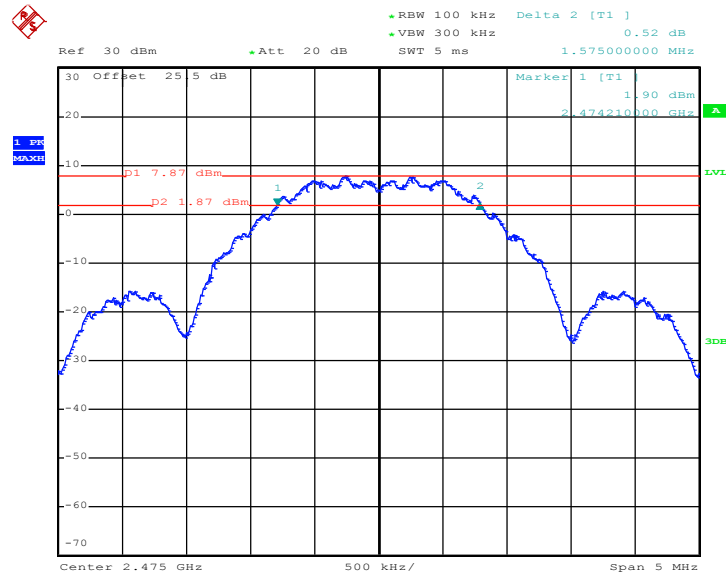


Date: 28.MAY.2020 21:11:53

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


99% Occupied Bandwidth Plot on Channel 11

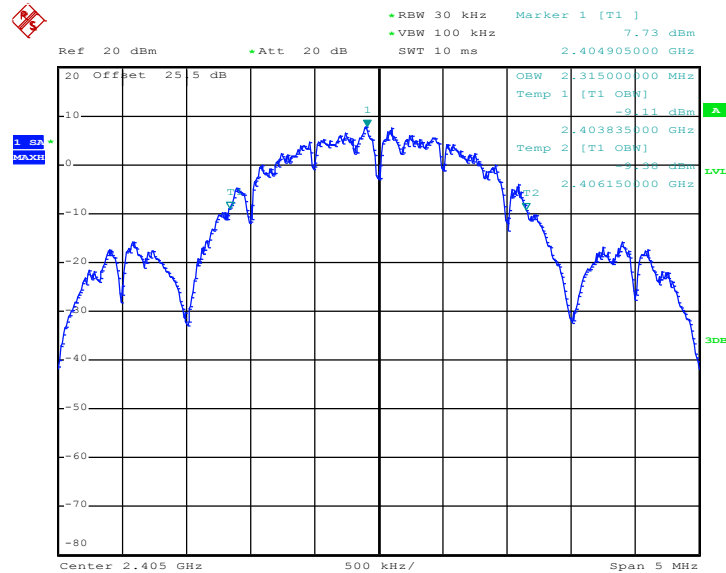

Date: 8.JUN.2020 16:06:15




99% Occupied Bandwidth Plot on Channel 17

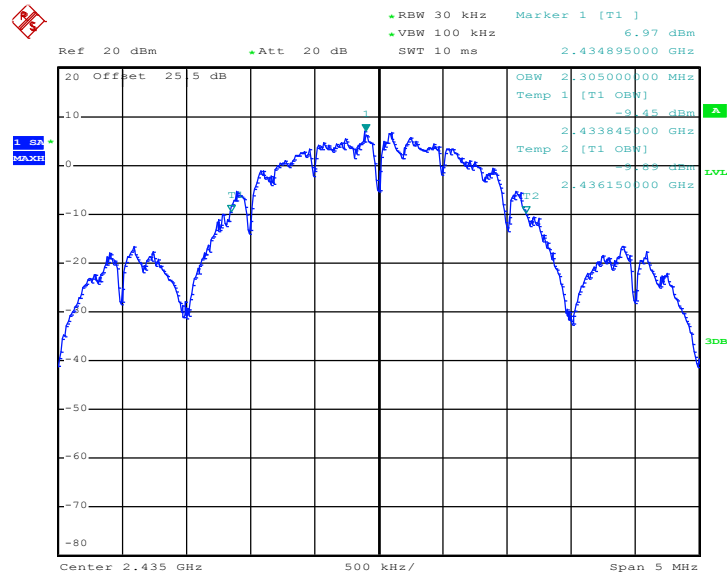

Date: 8.JUN.2020 16:23:59

99% Occupied Bandwidth Plot on Channel 25

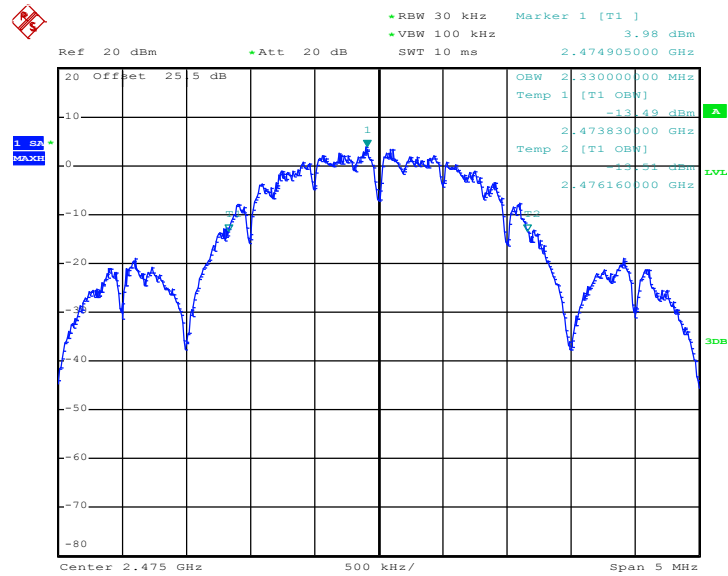

Date: 28.MAY.2020 21:17:28

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGP-M-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

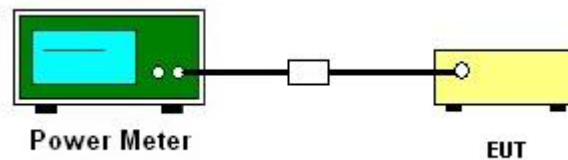

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

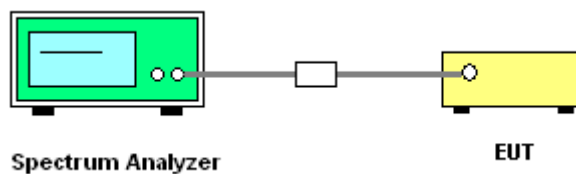

#### 3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.






### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 11

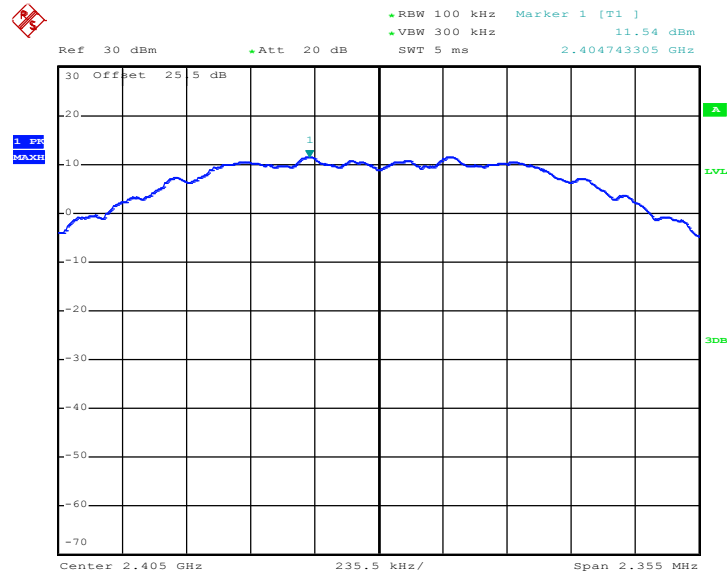

Date: 8.JUN.2020 15:49:36


PSD 100kHz Plot on Channel 17

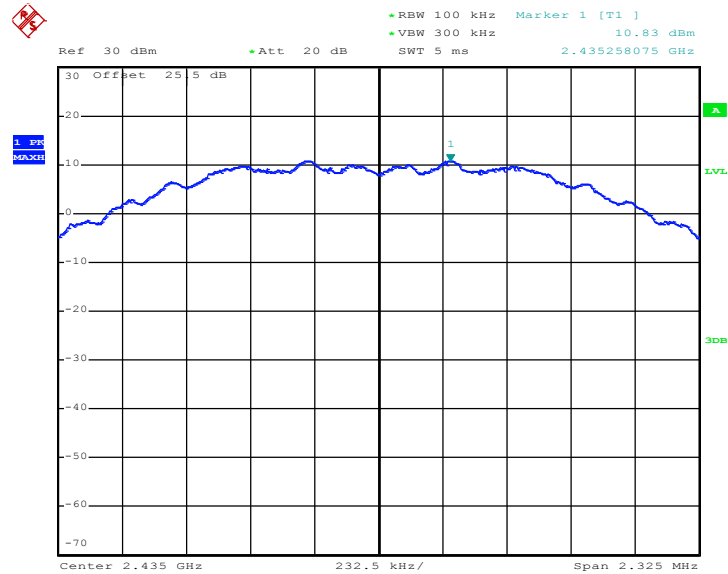

Date: 8.JUN.2020 16:20:22




### PSD 100kHz Plot on Channel 25

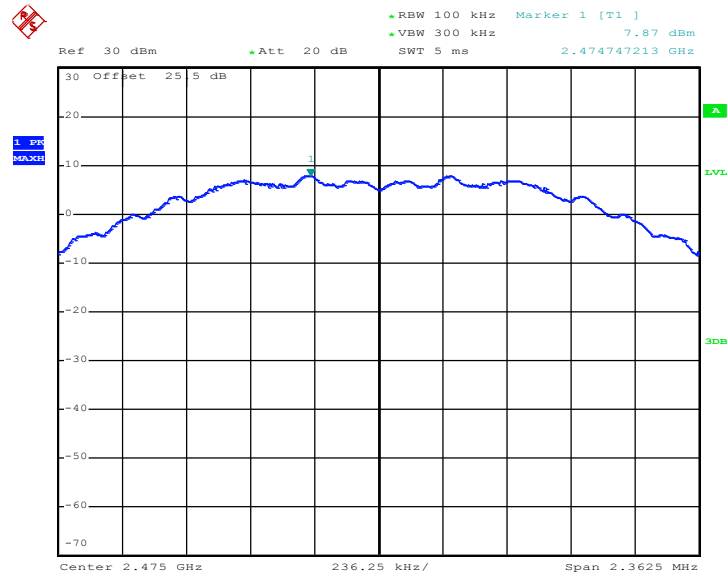

Date: 28.MAY.2020 21:14:57

### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


#### PSD 3kHz Plot on Channel 11

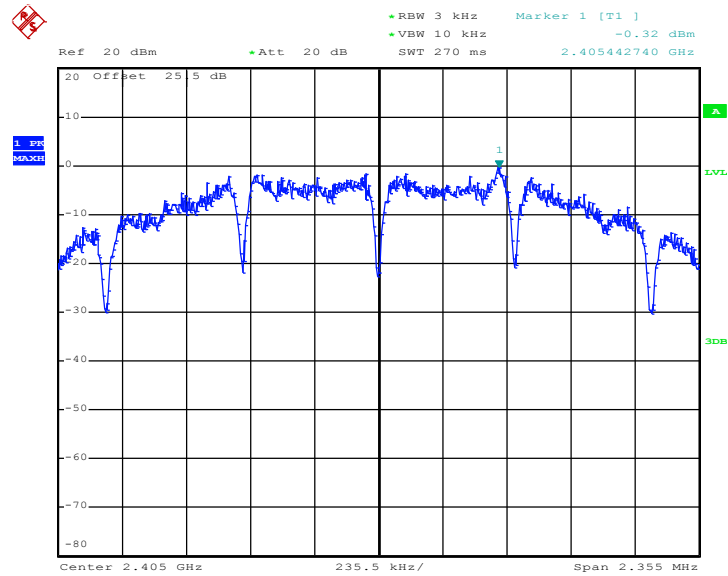

Date: 8.JUN.2020 15:40:01




PSD 3kHz Plot on Channel 17

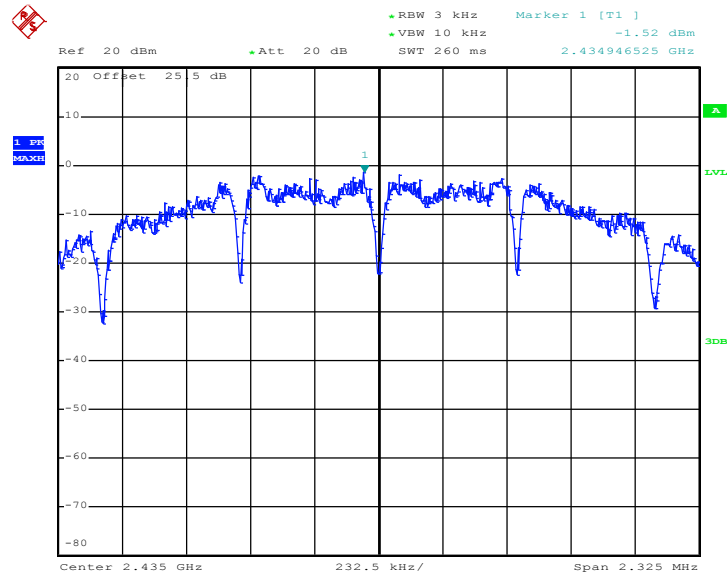

Date: 8.JUN.2020 16:17:47

PSD 3kHz Plot on Channel 25

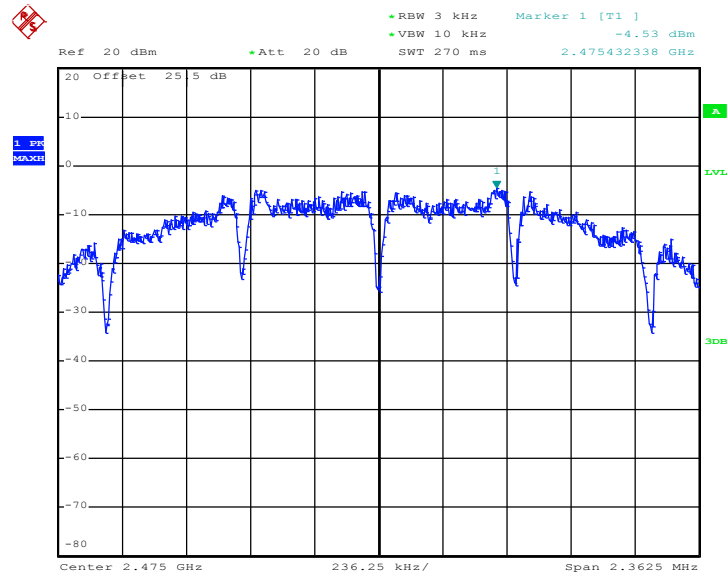

Date: 28.MAY.2020 21:13:02

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

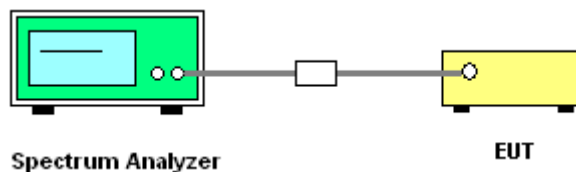




### 3.4.5 Test Result of Conducted Band Edges Plots

#### Low Band Edge Plot on Channel 11

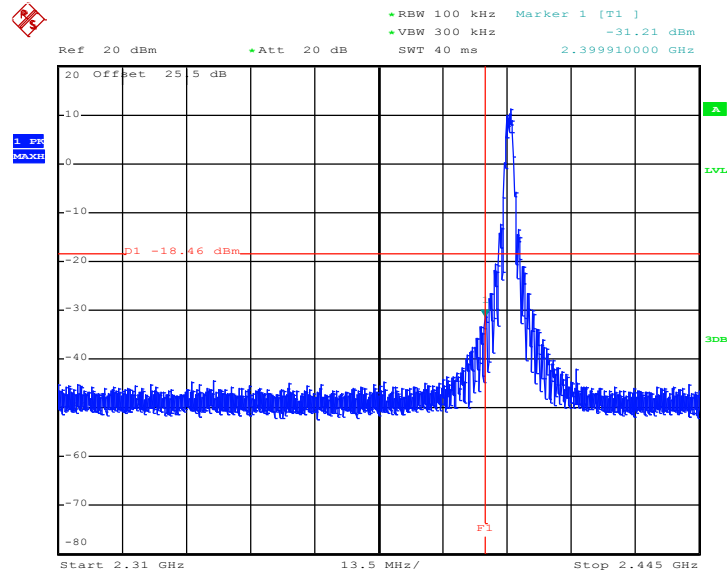

Date: 8.JUN.2020 16:09:03

#### High Band Edge Plot on Channel 25

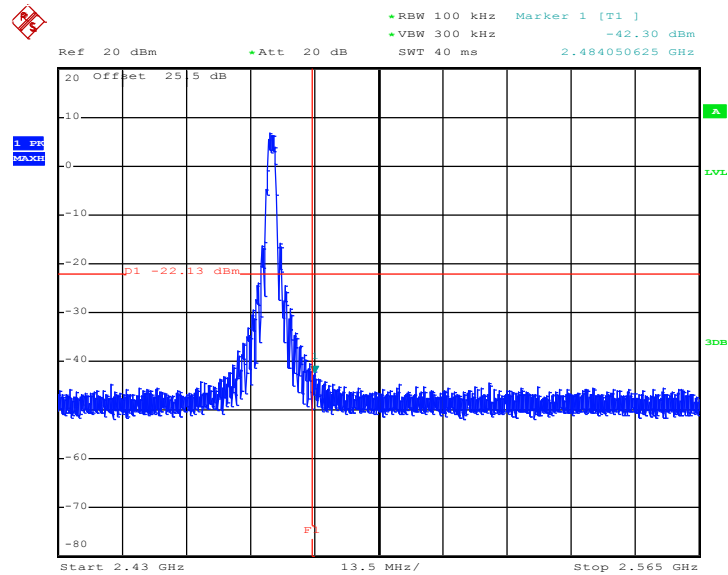


Date: 28.MAY.2020 21:15:32




### 3.4.6 Test Result of Conducted Spurious Emission Plots

#### Conducted Spurious Emission Plot on Zigbee Channel 11

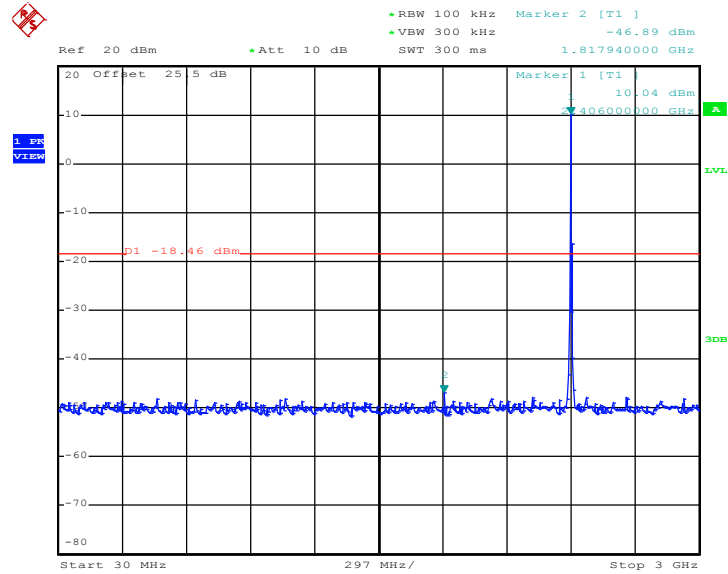

Date: 8.JUN.2020 16:05:13


#### Conducted Spurious Emission Plot on Zigbee Channel 11

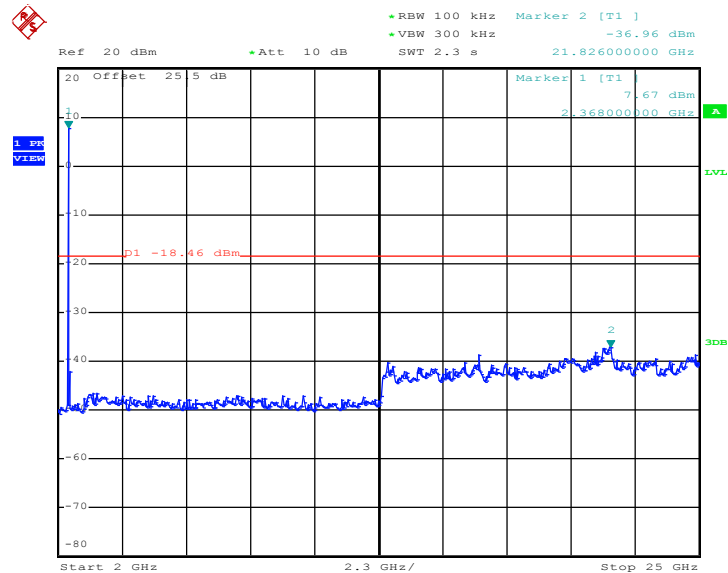

Date: 8.JUN.2020 16:05:29




### Conducted Spurious Emission Plot on Zigbee Channel 17

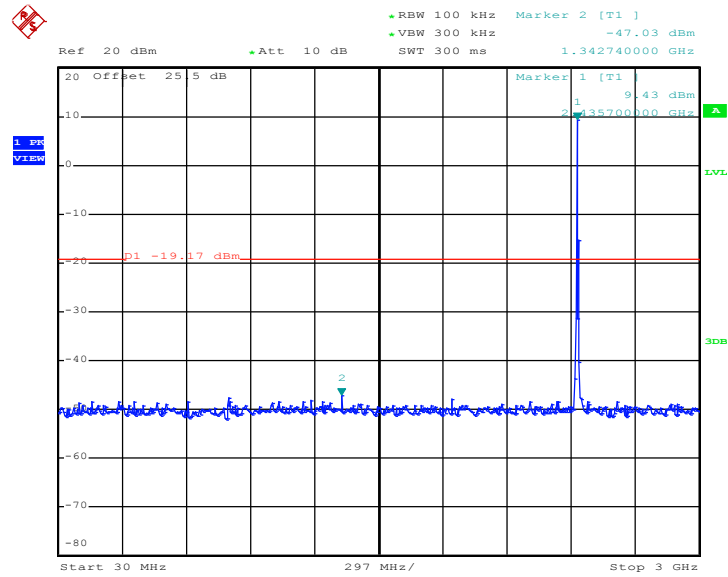

Date: 8.JUN.2020 16:21:19


### Conducted Spurious Emission Plot on Zigbee Channel 17

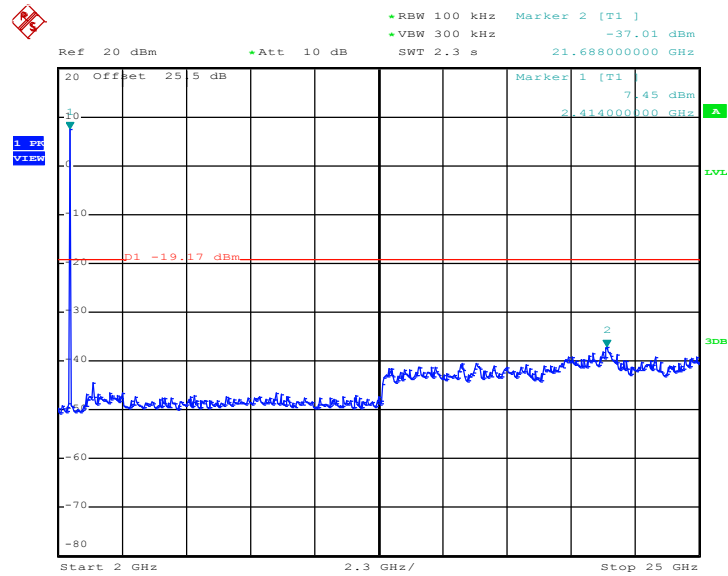

Date: 8.JUN.2020 16:21:34




### Conducted Spurious Emission Plot on Zigbee Channel 25

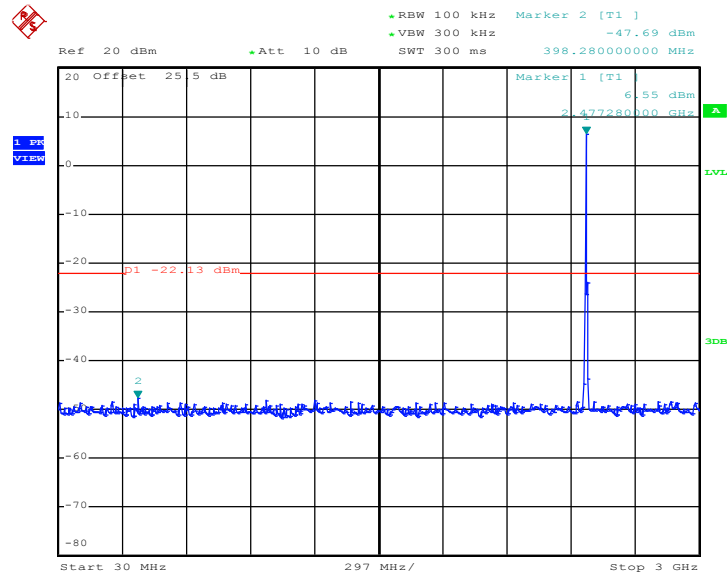

Date: 28.MAY.2020 21:16:35

### Conducted Spurious Emission Plot on Zigbee Channel 25

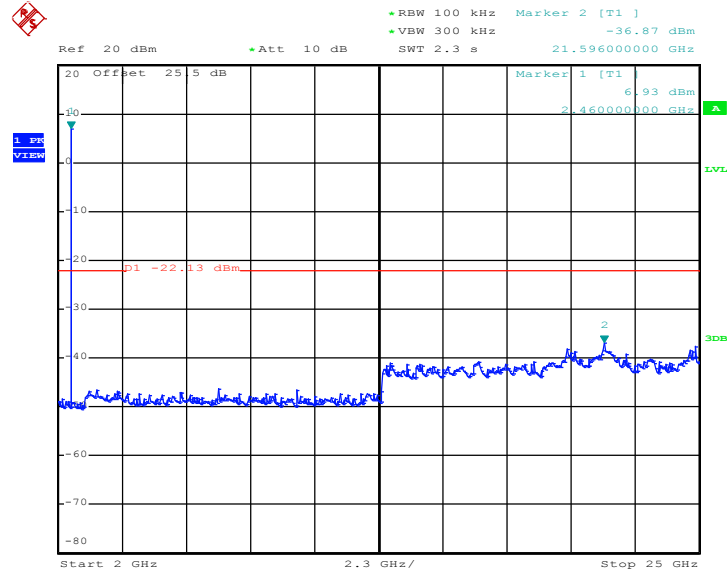

Date: 28.MAY.2020 21:16:50





### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

See list of measuring equipment of this test report.




### 3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

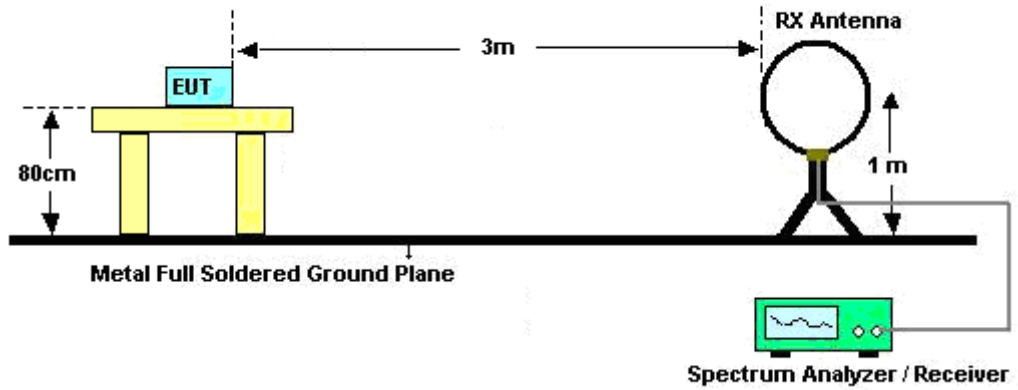


For radiated emissions from 30MHz to 1GHz

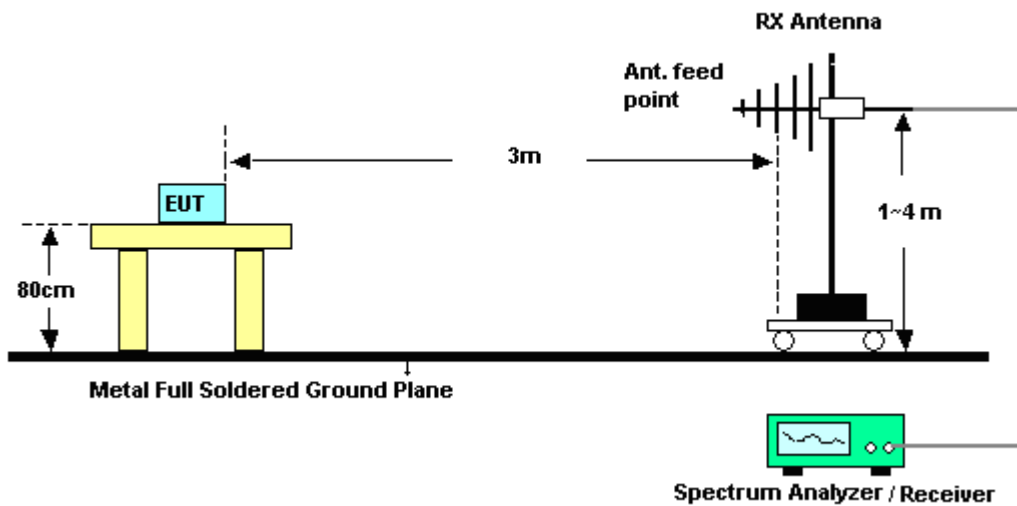

For radiated emissions above 1GHz

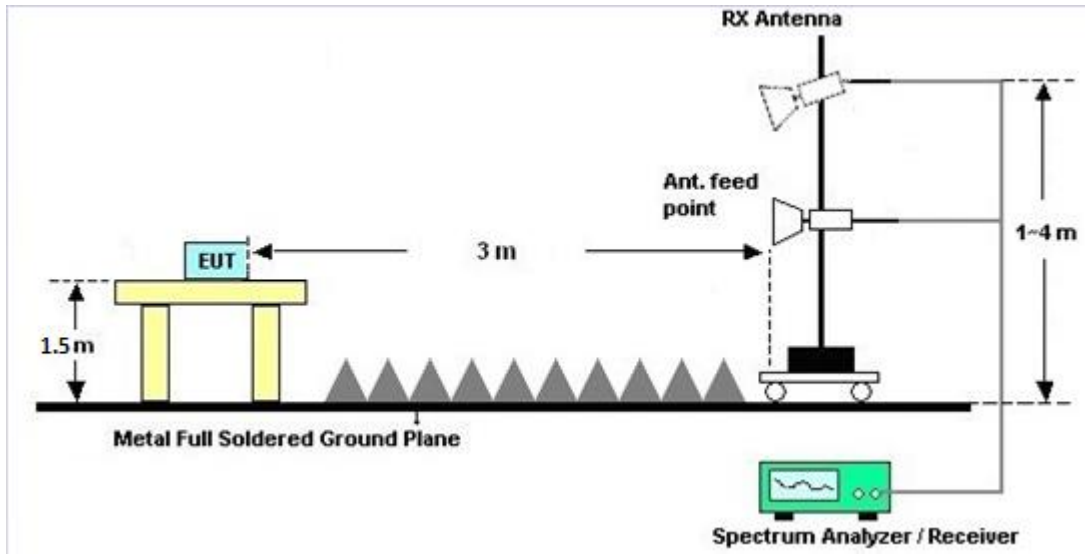

For radiated emissions above 18GHz

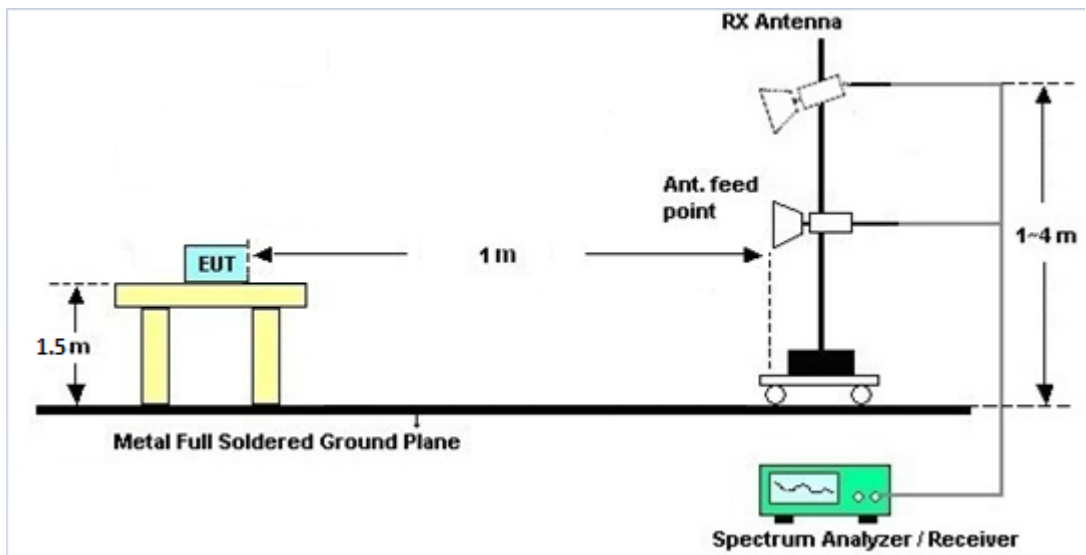



### **3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C and D.

### **3.5.7 Duty Cycle**

Please refer to Appendix E.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)**

Please refer to Appendix C and D.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

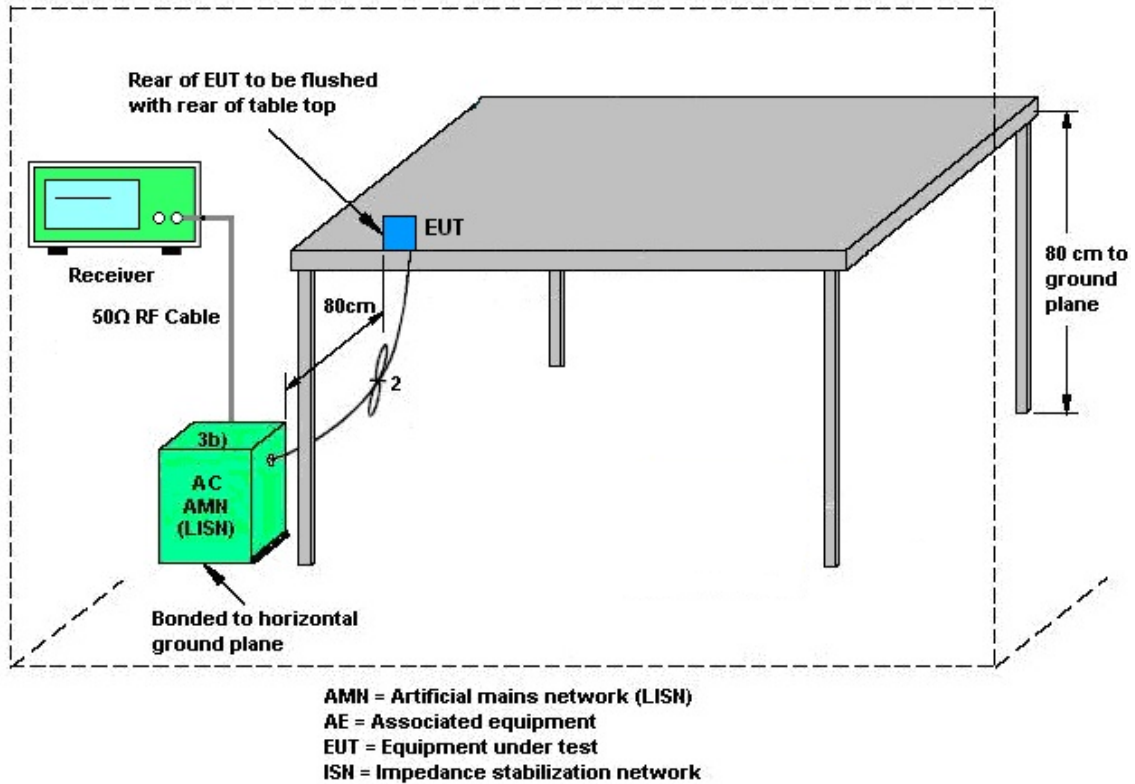

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Preamplifier	EMCE	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Jun. 29, 2020	Dec. 12, 2020	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 03, 2019	May 08, 2020~ Jun. 29, 2020	Dec. 02, 2020	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 12, 2019	May 08, 2020~ Jun. 29, 2020	Oct. 11, 2020	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Nov. 04, 2019	May 08, 2020~ Jun. 29, 2020	Nov. 03, 2020	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Dec. 26, 2019	May 08, 2020~ Jun. 29, 2020	Dec. 25, 2020	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 13, 2019	May 08, 2020~ Jun. 29, 2020	Nov. 12, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 28, 2019	May 08, 2020~ Jun. 29, 2020	Oct. 27, 2020	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	May 08, 2020~ Jun. 29, 2020	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	May 08, 2020~ Jun. 29, 2020	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	May 08, 2020~ Jun. 29, 2020	N/A	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-30 3K	171000180 0054002	1GHz~18GHz	Aug. 06, 2019	May 08, 2020~ Jun. 29, 2020	Aug. 05, 2020	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 576	18GHz- 40GHz	May 22, 2020	Jun. 29, 2020	May 21, 2021	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz~44GHz	Oct. 28, 2019	May 08, 2020~ Jun. 29, 2020	Oct. 27, 2020	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-00105 3	N/A	N/A	May 08, 2020~ Jun. 29, 2020	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz-30MHz	Mar. 12, 2020	May 08, 2020~ Jun. 29, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 12, 2020	May 08, 2020~ Jun. 29, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M-18G	Mar. 12, 2020	May 08, 2020~ Jun. 29, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 12, 2020	May 08, 2020~ Jun. 29, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN11	1.53G Low Pass	Sep. 15, 2019	May 08, 2020~ Jun. 29, 2020	Sep. 14, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN3	3GHz High Pass Filter	Sep. 15, 2019	May 08, 2020~ Jun. 29, 2020	Sep. 14, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-935- 1000-15000-40 ST	SN1	1GHz High Pass Filter	Apr. 30, 2020	May 08, 2020~ Jun. 29, 2020	Apr. 29, 2021	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP140325	N/A	Nov. 07, 2019	May 08, 2020~ Jun. 29, 2020	Nov. 06, 2020	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP161237	N/A	Oct. 25, 2019	May 08, 2020~ Jun. 29, 2020	Oct. 24, 2020	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 26, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	Jun. 26, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 07, 2019	Jun. 26, 2020	Nov. 06, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	Jun. 26, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 26, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Jun. 26, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Jun. 26, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H2	41410069	N/A	Jun. 17, 2019	May 18, 2020~ Jun. 08, 2020	Jun. 16, 2020	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO10	10MHz~6GHz	Dec. 23, 2019	May 18, 2020~ Jun. 08, 2020	Dec. 22, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Aug. 14, 2019	May 18, 2020~ Jun. 08, 2020	Aug. 13, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC130048 4	N/A	Aug. 22, 2019	May 18, 2020~ Jun. 08, 2020	Aug. 21, 2020	Conducted (TH05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.3
---	-----

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Shiming Liu	Temperature:	21.3~23.7	°C
Test Date:	2020/5/18~2020/6/8	Relative Humidity:	47.2~57.8	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250K	1	11	2405	2.315	1.570	0.50	Pass
Zigbee	250K	1	17	2435	2.305	1.550	0.50	Pass
Zigbee	250K	1	25	2475	2.330	1.575	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250K	1	11	2405	14.10	30.00	4.99	19.09	36.00	Pass
Zigbee	250K	1	17	2435	13.20	30.00	4.99	18.19	36.00	Pass
Zigbee	250K	1	25	2475	10.50	30.00	4.99	15.49	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250K	1	11	2405	11.54	-0.32	4.99	8.00	Pass
Zigbee	250K	1	17	2435	10.83	-1.52	4.99	8.00	Pass
Zigbee	250K	1	25	2475	7.87	-4.53	4.99	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~25°C
		Relative Humidity :	42~50%

# EUT Information

Report NO : 012305-01  
 Test Mode : Mode 2  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

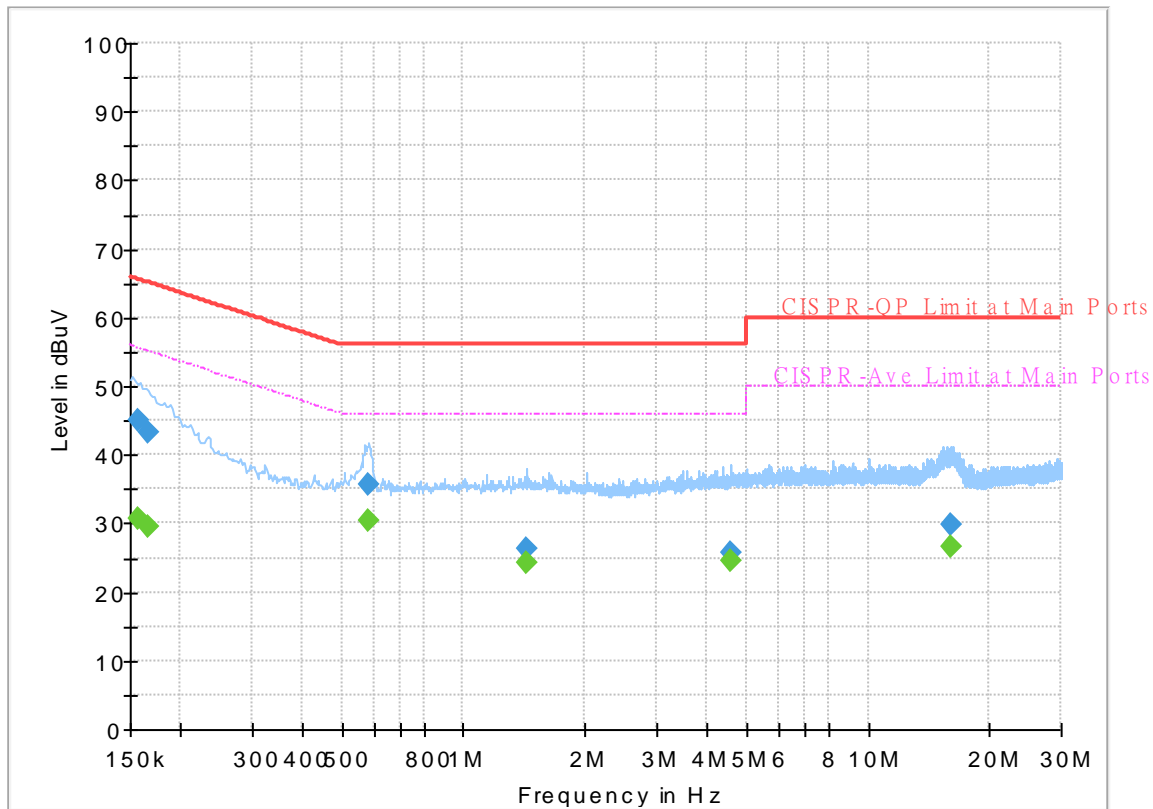


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	30.71	55.63	24.92	L1	OFF	19.6
0.156750	45.10	---	65.63	20.53	L1	OFF	19.6
0.165750	---	29.48	55.17	25.69	L1	OFF	19.6
0.165750	43.31	---	65.17	21.86	L1	OFF	19.6
0.582090	---	30.55	46.00	15.45	L1	OFF	19.6
0.582090	35.66	---	56.00	20.34	L1	OFF	19.6
1.432860	---	24.41	46.00	21.59	L1	OFF	19.6
1.432860	26.42	---	56.00	29.58	L1	OFF	19.6
4.564230	---	24.58	46.00	21.42	L1	OFF	19.8
4.564230	25.61	---	56.00	30.39	L1	OFF	19.8
16.052190	---	26.52	50.00	23.48	L1	OFF	20.3
16.052190	29.79	---	60.00	30.21	L1	OFF	20.3

# EUT Information

Report NO : 012305-01  
 Test Mode : Mode 2  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

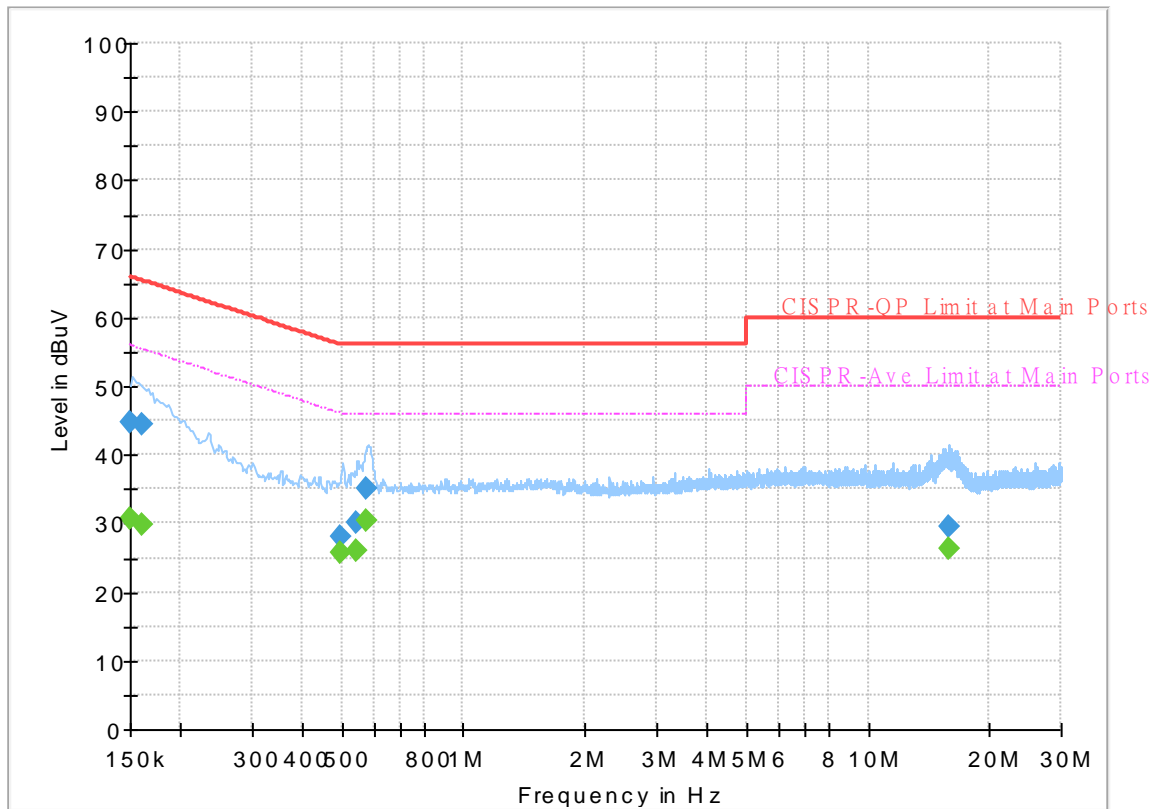

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	30.62	56.00	25.38	N	OFF	19.6
0.150000	44.77	---	66.00	21.23	N	OFF	19.6
0.161250	---	29.96	55.40	25.44	N	OFF	19.5
0.161250	44.41	---	65.40	20.99	N	OFF	19.5
0.498750	---	25.63	46.02	20.39	N	OFF	19.5
0.498750	28.18	---	56.02	27.84	N	OFF	19.5
0.546270	---	26.13	46.00	19.87	N	OFF	19.5
0.546270	29.97	---	56.00	26.03	N	OFF	19.5
0.577950	---	30.38	46.00	15.62	N	OFF	19.5
0.577950	35.16	---	56.00	20.84	N	OFF	19.5
15.907740	---	26.18	50.00	23.82	N	OFF	19.9
15.907740	29.53	---	60.00	30.47	N	OFF	19.9



### Appendix C. Radiated Spurious Emission

Test Engineer :	Cookie Ku, Fu Chen and Troye Hsieh	Temperature :	19.1~26.3°C
		Relative Humidity :	50.2~69.1%

2.4GHz 2400~2483.5MHz

Zigbee (Band Edge @ 3m)

Zigbee	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
ZIGBEE CH 11 2405MHz		2389.275	57.13	-16.87	74	46.22	27.52	16.62	33.23	150	358	P	H
		2390	49.84	-4.16	54	38.93	27.52	16.62	33.23	150	358	A	H
	*	2405	115.52	-	-	104.62	27.49	16.64	33.23	150	358	P	H
	*	2405	113.72	-	-	102.82	27.49	16.64	33.23	150	358	A	H
		2386.65	57.37	-16.63	74	46.45	27.53	16.62	33.23	100	352	P	V
		2390	50.22	-3.78	54	39.31	27.52	16.62	33.23	100	352	A	V
	*	2405	115.72	-	-	104.82	27.49	16.64	33.23	100	352	P	V
	*	2405	114.02	-	-	103.12	27.49	16.64	33.23	100	352	A	V
ZIGBEE CH 17 2435MHz		2358.96	53.75	-20.25	74	42.82	27.58	16.59	33.24	198	2	P	H
		2339.12	43.7	-10.3	54	32.76	27.62	16.57	33.25	198	2	A	H
	*	2435	114.17	-	-	103.29	27.43	16.67	33.22	198	2	P	H
	*	2435	112.33	-	-	101.45	27.43	16.67	33.22	198	2	A	H
		2486.16	53.85	-20.15	74	43.08	27.26	16.72	33.21	198	2	P	H
		2498.88	42.87	-11.13	54	32.14	27.2	16.74	33.21	198	2	A	H
		2389.68	54.06	-19.94	74	43.15	27.52	16.62	33.23	146	345	P	V
		2339.12	43.88	-10.12	54	32.94	27.62	16.57	33.25	146	345	A	V
	*	2435	114.31	-	-	103.43	27.43	16.67	33.22	146	345	P	V
	*	2435	112.51	-	-	101.63	27.43	16.67	33.22	146	345	A	V
		2492.96	53.36	-20.64	74	42.61	27.23	16.73	33.21	146	345	P	V
	2499.04	43.03	-10.97	54	32.3	27.2	16.74	33.21	146	345	A	V	





<b>ZIGBEE CH 25 2475MHz</b>	*	2475	108.33	-	-	97.54	27.3	16.71	33.22	195	359	P	H
	*	2475	106.44	-	-	95.65	27.3	16.71	33.22	195	359	A	H
		2483.6	60.47	-13.53	74	49.69	27.27	16.72	33.21	195	359	P	H
		2483.52	52.5	-1.5	54	41.72	27.27	16.72	33.21	195	359	A	H
	*	2475	108.33	-	-	97.54	27.3	16.71	33.22	126	354	P	V
	*	2475	106.54	-	-	95.75	27.3	16.71	33.22	126	354	A	V
		2483.56	60.46	-13.54	74	49.68	27.27	16.72	33.21	126	354	P	V
		2483.52	52.33	-1.67	54	41.55	27.27	16.72	33.21	126	354	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz**

**Zigbee (Harmonic @ 3m)**

Zigbee	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
<b>ZIGBEE CH 11 2405MHz</b>		4810	53.05	-20.95	74	71.56	31	10.94	60.45	343	64	P	H
		4810	47.68	-6.32	54	66.19	31	10.94	60.45	343	64	P	H
		4810	57.03	-16.97	74	75.54	31	10.94	60.45	400	37	P	V
		4810	52.39	-1.61	54	70.9	31	10.94	60.45	400	37	P	V
<b>ZIGBEE CH 17 2435MHz</b>		4870	52.11	-21.89	74	70.55	31	10.96	60.4	354	73	P	H
		4870	46.65	-7.35	54	65.09	31	10.96	60.4	354	73	A	H
		7305	43.04	-30.96	74	52.27	36.5	13.39	59.12	100	0	P	H
		4870	55.52	-18.48	74	73.96	31	10.96	60.4	374	36	P	V
		4870	50.5	-3.5	54	68.94	31	10.96	60.4	374	36	A	V
		7305	43.39	-30.61	74	52.62	36.5	13.39	59.12	100	0	P	V
<b>ZIGBEE CH 25 2475MHz</b>		4950	44.04	-29.96	74	62.28	31.1	11	60.34	100	0	P	H
		7425	42.78	-31.22	74	52.27	36.35	13.2	59.04	100	0	P	H
		4950	45.77	-28.23	74	64.01	31.1	11	60.34	100	0	P	V
		7425	44.25	-29.75	74	53.74	36.35	13.2	59.04	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission above 18GHz

2.4GHz Zigbee (SHF)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz Zigbee SHF		23887	42.59	-31.41	74	47.77	38.9	9.22	53.3	100	0	P	H
		23859	42.03	-31.97	74	47.2	38.9	9.23	53.3	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz Zigbee (LF)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					Line	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
2.4GHz Zigbee LF		81.41	29.84	-10.16	40	47.54	13.43	1.31	32.44	100	0	P	H
		103.72	28.81	-14.69	43.5	43.59	16.14	1.47	32.39	-	-	P	H
		127.97	30.64	-12.86	43.5	44.06	17.4	1.62	32.44	-	-	P	H
		777.87	28.31	-17.69	46	28.49	27.92	4	32.1	-	-	P	H
		851.59	29.45	-16.55	46	28.36	28.83	4.2	31.94	-	-	P	H
		909.79	30.53	-15.47	46	28.95	28.85	4.33	31.6	-	-	P	H
		42.61	30.92	-9.08	40	44.56	17.91	0.94	32.49	-	-	P	V
		78.5	31.61	-8.39	40	49.87	12.9	1.29	32.45	100	0	P	V
		125.06	30.08	-13.42	43.5	43.54	17.37	1.6	32.43	-	-	P	V
		817.64	29.95	-16.05	46	30.13	27.81	4.09	32.08	-	-	P	V
		877.78	29.93	-16.07	46	28.44	29.07	4.25	31.83	-	-	P	V
		958.29	30.66	-15.34	46	26.6	30.57	4.45	30.96	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

ZIGBEE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	TaZigbee	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
ZIGBEE		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = CaZigbee loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots

<b>Test Engineer :</b>	Cookie Ku, Fu Chen and Troye Hsieh	<b>Temperature :</b>	19.1~26.3°C
		<b>Relative Humidity :</b>	50.2~69.1%

### Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz

Zigbee (Band Edge @ 3m)

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH11 2405MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



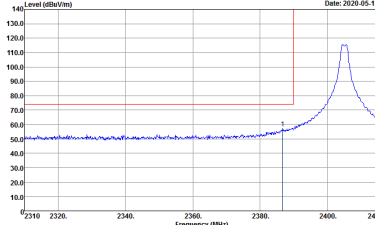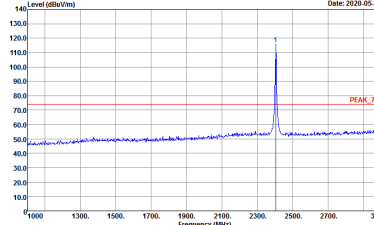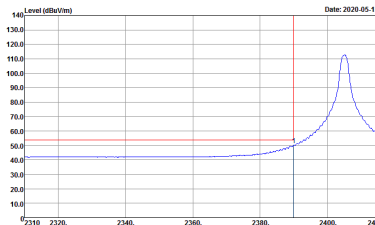
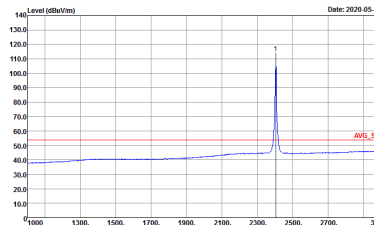


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH11 2405MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>







Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH17 2435MHz - L	
	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

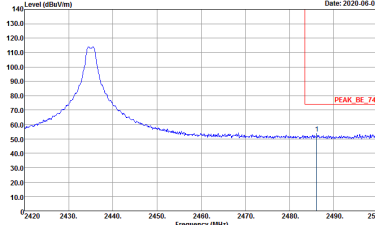
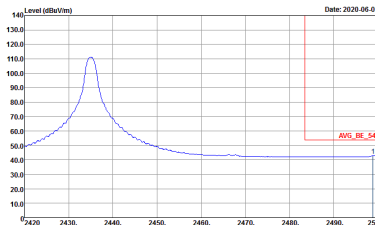


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH17 2435MHz - R	
	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Left blank</p>

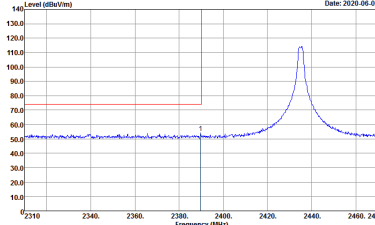
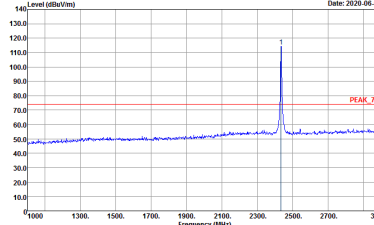
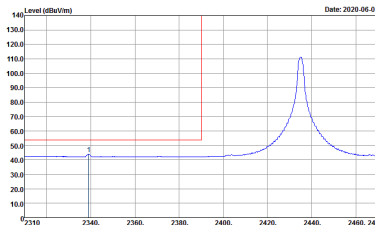
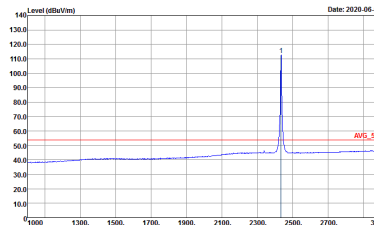


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH17 2435MHz - L	
	Vertical	Fundamental
Peak	 <p>Date: 2020-06-02</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2020-06-02</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2020-06-02</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Date: 2020-06-02</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



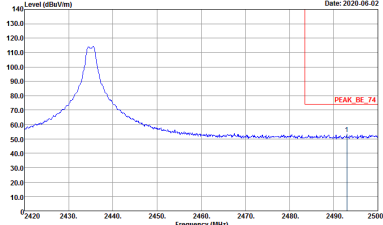
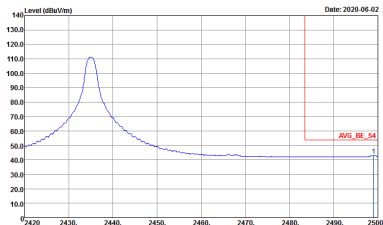


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH17 2435MHz - R	
	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH11-4-Y Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH11-4-Y Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	<p>Left blank</p>

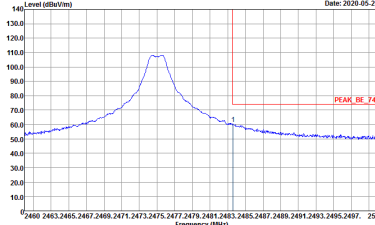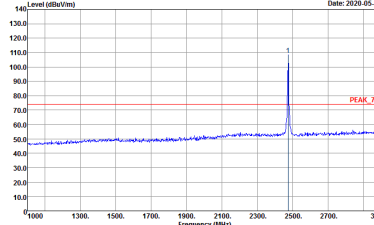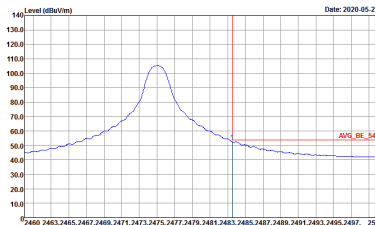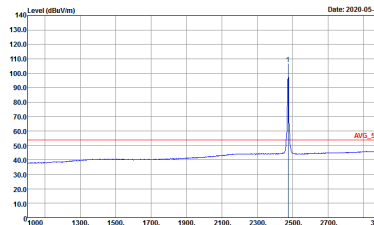

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH25 2475MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

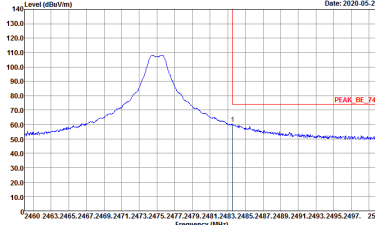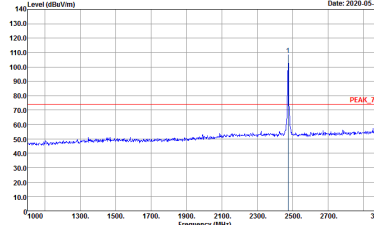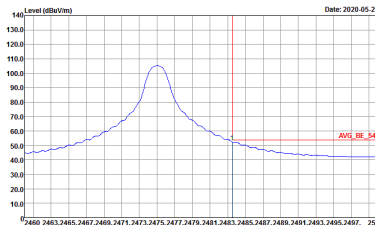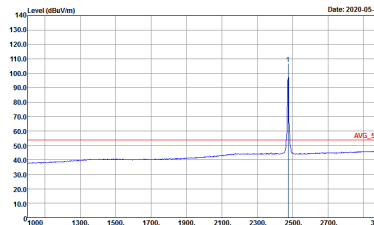

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH25 2475MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>





2.4GHz 2400~2483.5MHz

Zigbee (Harmonic @ 3m)



Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH11 2405MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak</p>



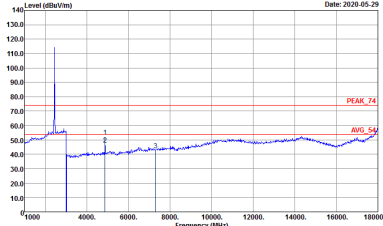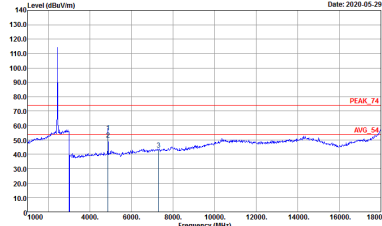

Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH17 2435MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-1Y Condition : PEAK_74 3m HORN 91200-1HF HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-1Y Condition : PEAK_74 3m HORN 91200-1HF VERTICAL Detector : Peak</p>

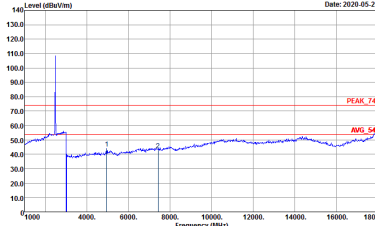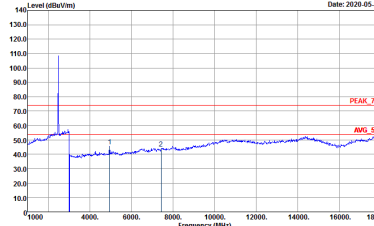

Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH25 2475MHz	
	Horizontal	Vertical
Peak	 <p>Site : 03CH11-4Y Condition : PEAK_74 3m HORN 91200-4F HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-4Y Condition : PEAK_74 3m HORN 91200-4F VERTICAL Detector : Peak</p>



Emission above 18GHz



2.4GHz Zigbee (SHF)

Zigbee	2.4GHz 2400~2483.5MHz	
	Zigbee SHF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH11-14Y Condition : PEAK_74_1M 1m SHF HORN BBHA9170576 HORIZONTAL Project : 012305-01</p>	<p>Site : 03CH11-14Y Condition : PEAK_74_1M 1m SHF HORN BBHA9170576 VERTICAL Project : 012305-01</p>



Emission below 1GHz

2.4GHz Zigbee (LF)

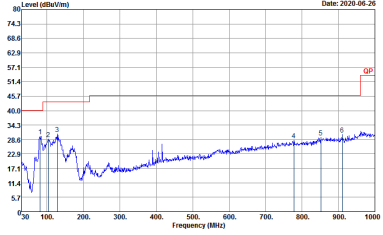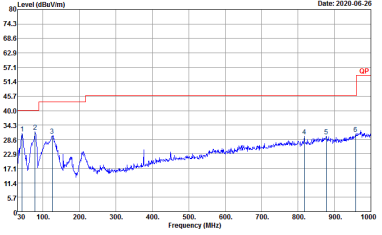
Zigbee	2.4GHz 2400~2483.5MHz	
	Zigbee LF	
	Horizontal	Vertical
<p>QP / Peak</p>	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak</p>



### Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
Zigbee	100	-	-	10Hz	0.00

#### Zigbee

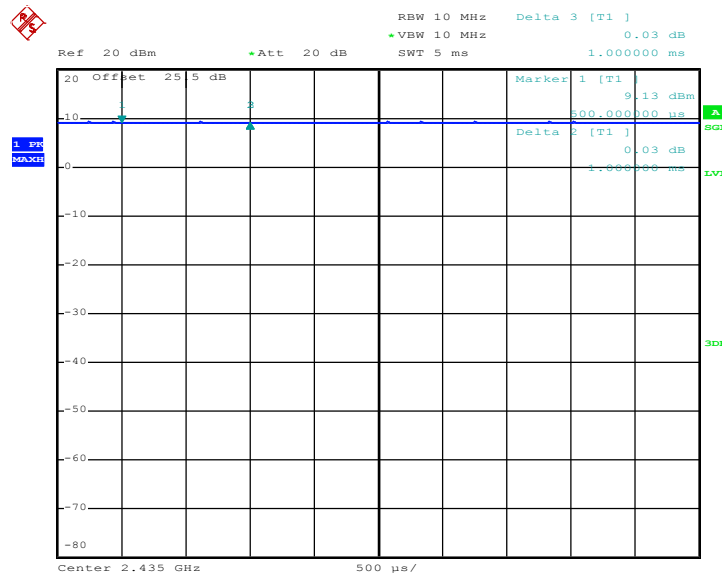

Date: 19.MAY.2020 14:13:54

————THE END————