

RF Test Report

Applicant : Meter Inc
Product Type : Meter wireless access point
Trade Name : meter
Model Number : MW06
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Received Date : Nov. 30, 2021
Test Period : Dec. 07, 2021 ~ Jan. 28, 2022
Issued Date : Jan. 28, 2022

Issued by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Frequency Range : 9 kHz to 40 GHz
Test Firm MRA designation number: TW0010

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Revisions	Revised By
00	Jan. 28, 2022	Initial Issue	Snow Wang

Verification of Compliance

Applicant : Meter Inc

Product Type : Meter wireless access point

Trade Name : meter

Model Number : MW06

FCC ID : 2AVVV-MW06

Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____
(Kai Yu Yang)

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Measurement Uncertainty	6
2	EUT Description.....	7
3	Test Methodology	9
3.1.	Mode of Operation.....	9
3.2.	EUT Test Step.....	18
3.3.	Configuration of Test System Details.....	19
3.4.	Test Instruments	20
3.5.	Test Site Environment.....	22
4	Measurement Procedure.....	23
4.1.	AC Power Line Conducted Emission Measurement.....	23
4.2.	Radiated Emission Measurement.....	25
4.3.	Maximum Conducted Output Power Measurement.....	29
4.4.	6 dB RF Bandwidth Measurement.....	30
4.5.	Maximum Power Spectral Density Measurement	31
4.6.	Out of Band Conducted Emissions Measurement.....	32
4.7.	Antenna Measurement	33
5	Test Results	35
5.1	Conducted Emission.....	35
5.2	Conducted Test Results.....	38
5.3	Radiated Emission Measurement.....	171

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6 dB RF Bandwidth	PASS	-----
15.247(e)	Maximum Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	2.2 dB
	30 MHz ~ 1000 MHz	5.1 dB
	1000 MHz ~ 18000 MHz	5.2 dB
	18000 MHz ~ 26500 MHz	4.6 dB
	26500 MHz ~ 40000 MHz	4.6 dB
Conducted Output Power	1.1 dB	
RF Bandwidth	4.7 %	
Power Spectral Density	1.1 dB	

2 EUT Description

Applicant	Meter Inc 548 Market St., PMB 22716, San Francisco, CA 94104-5401			
Product Type	Meter wireless access point			
Trade Name	meter			
Model Number	MW06			
FCC ID	2AVVV-MW06			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate 400 G1 (ns)
IEEE 802.11b	2412 ~ 2462	DSSS	20 MHz	Up to 11 Mbps
IEEE 802.11g	2412 ~ 2462	OFDM	20 MHz	Up to 54 Mbps
IEEE 802.11n 2.4 GHz 20 MHz	2412 ~ 2462	OFDM (64QAM)	20 MHz	Up to 288.9 Mbps
IEEE 802.11n 2.4 GHz 40 MHz	2422 ~ 2452	OFDM (64QAM)	40 MHz	Up to 600 Mbps
IEEE 802.11n 2.4 GHz 20 MHz	2412 ~ 2462	OFDM (256QAM)	20 MHz	Up to 346.7 Mbps
IEEE 802.11n 2.4 GHz 40 MHz	2422 ~ 2452	OFDM (256QAM)	40 MHz	Up to 800 Mbps
Antenna information	ANT	Model Number	Type	Max. Gain (dBi)
	QCA9884-2G			
	ANT-0	5718A0346300	PIFA Antenna	2.86
	ANT-1	5718A0347300	PIFA Antenna	3.12
	ANT-2	5718A0348300	PIFA Antenna	3.14
	ANT-3	5718A0349300	PIFA Antenna	3.29
	QCA9889			
	ANT-0	5718A0643300	PIFA Antenna	2.91
Antenna Delivery	Reference section 3.1			
Operate Temp. Range	0 ~ +40 °C			
EUT Power Rating	DC INPUT: 12 V, 2 A PoE INPUT: 54 V, 0.6 A			

QCA9884-2G

Frequency Band	Max. RF Output Power (W)
IEEE 802.11b	0.246
IEEE 802.11g	0.172
IEEE 802.11n 2.4 GHz 20 MHz(64QAM)	0.161
IEEE 802.11n 2.4 GHz 40 MHz(64QAM)	0.185
IEEE 802.11n 2.4 GHz 20 MHz(256QAM)	0.165
IEEE 802.11n 2.4 GHz 40 MHz(256QAM)	0.188

Beamforming on

Frequency Band	Max. RF Output Power (W)
IEEE 802.11n 2.4 GHz 20 MHz(64QAM)	0.037
IEEE 802.11n 2.4 GHz 40 MHz(64QAM)	0.041
IEEE 802.11n 2.4 GHz 20 MHz(256QAM)	0.037
IEEE 802.11n 2.4 GHz 40 MHz(256QAM)	0.041

QCA9889

Frequency Band	Max. RF Output Power (W)
IEEE 802.11b	0.007
IEEE 802.11g	0.007
IEEE 802.11n 2.4 GHz 20 MHz(64QAM)	0.007
IEEE 802.11n 2.4 GHz 40 MHz(64QAM)	0.007

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test mode
Mode 1: Transmit mode
Mode 2: IEEE 802.11b Continuous TX mode
Mode 3: IEEE 802.11g Continuous TX mode
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz(64QAM) Continuous TX mode
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz(64QAM) Continuous TX mode
Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX mode
Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX mode

Final-Test Mode
Mode 1: Transmit mode
Mode 2: IEEE 802.11b Continuous TX mode
Mode 3: IEEE 802.11g Continuous TX mode
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz(64QAM) Continuous TX mode
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz(64QAM) Continuous TX mode
Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX mode
Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note: The Output power used by Scan Radio Antenna is Low Power, so only Output power and Power Density are evaluated.

QCA9884-2G

Test Mode	ANT-0	ANT-1	ANT-2	ANT-3	ANT-0+1+2+3
Mode 2	V	V	V	V	V
Mode 3	V	V	V	V	V
Mode 4	V	V	V	V	V
Mode 5	V	V	V	V	V
Mode 6	V	V	V	V	V
Mode 7	V	V	V	V	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
Mode 2	4TX (CDD/Beamforming on)	1	1, 6, 11
Mode 3	4TX (CDD/Beamforming on)	6	1, 6, 11
Mode 4	4TX (STBC/Beamforming on)	26	1, 6, 11
Mode 5	4TX (STBC/Beamforming on)	54	3, 6, 9
Mode 6	4TX (STBC/Beamforming on)	26	1, 6, 11
Mode 7	4TX (STBC/Beamforming on)	54	3, 6, 9

QCA9889

Test Mode	ANT-0
Mode 2	V
Mode 3	V
Mode 4	V
Mode 5	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
Mode 2	1TX	1	1, 6, 11
Mode 3	1TX	6	1, 6, 11
Mode 4	1TX	6.5	1, 6, 11
Mode 5	1TX	13.5	3, 6, 9

QCA9884-2G

Duty cycle

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	2412	9.270	9.270	1.000	0.000	0.010
Mode 3	2412	2.060	2.100	0.981	0.084	0.010
Mode 6	2412	4.540	4.980	0.912	0.402	0.220
Mode 7	2422	2.220	2.676	0.830	0.811	0.450


Beamforming on

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 6	2412	4.540	4.980	0.912	0.402	0.220
Mode 7	2422	2.220	2.676	0.830	0.811	0.450

Duty Cycle Graphs


Mode 2: IEEE 802.11b Continuous TX mode

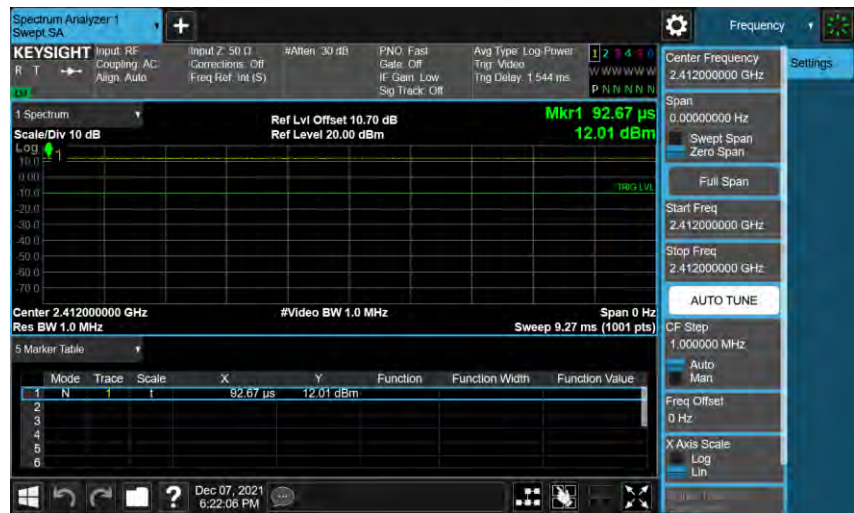On+off time




Mode 3: IEEE 802.11g Continuous TX mode

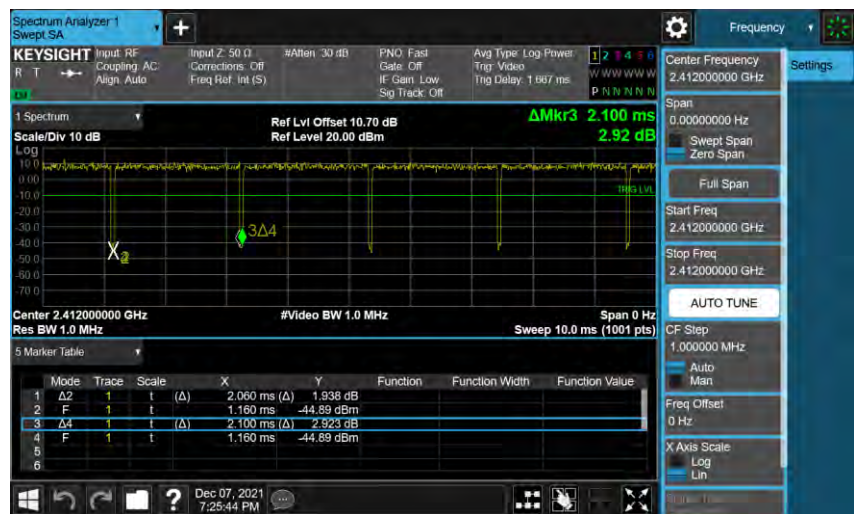
On+off time



Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX mode

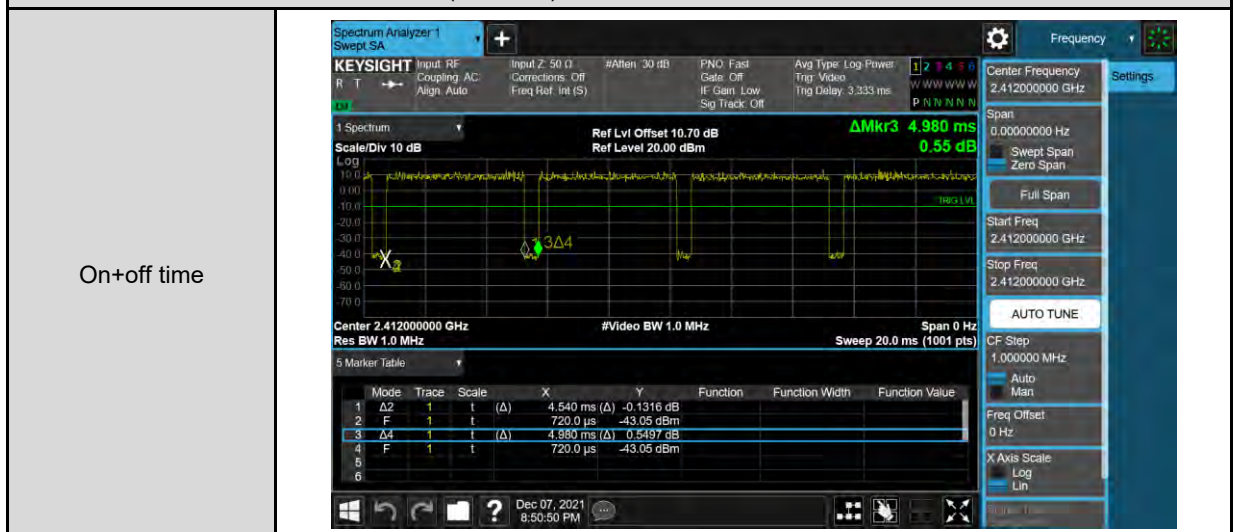


Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX mode

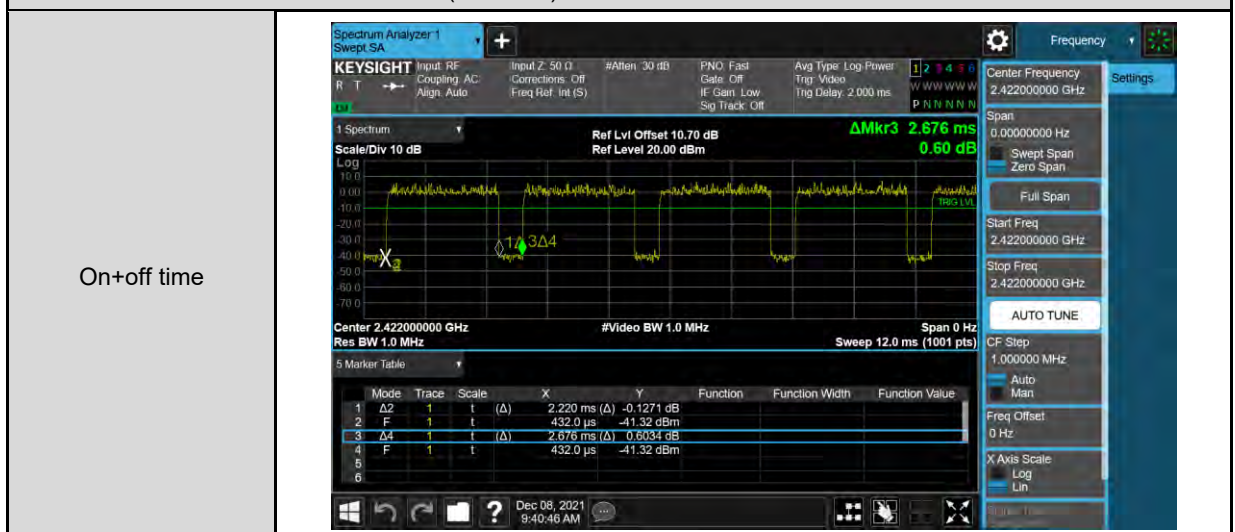

Beamforming on


Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX mode

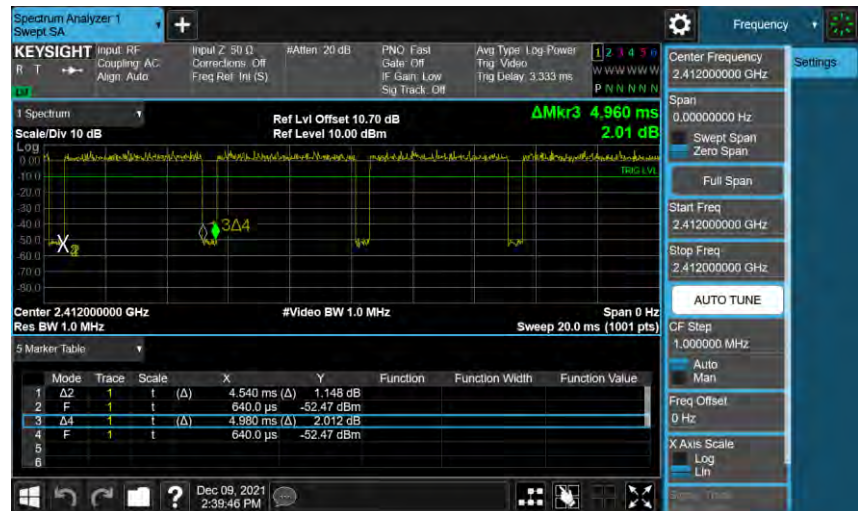On+off time



Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX mode

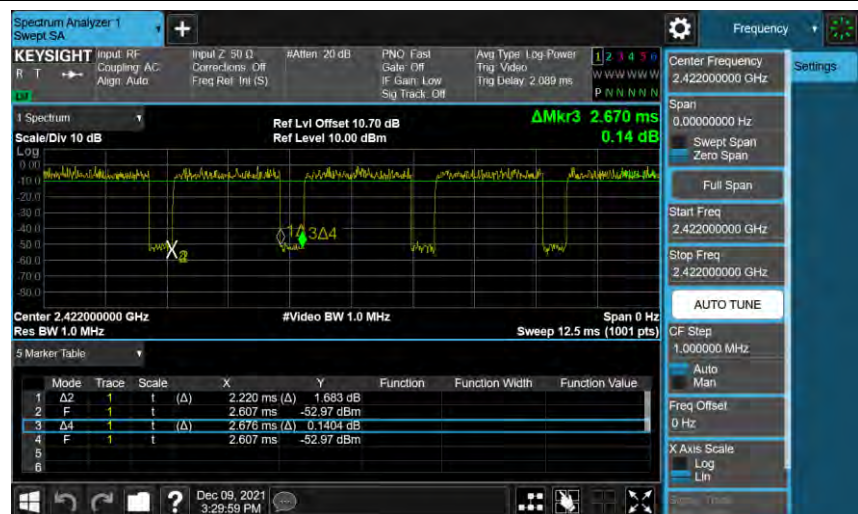On+off time



QCA9889

Duty cycle

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	2412	12.270	12.300	0.998	0.011	0.010
Mode 3	2412	2.049	2.102	0.975	0.111	0.488
Mode 4	2412	1.913	1.959	0.977	0.103	0.523
Mode 5	2422	0.942	1.011	0.932	0.307	1.062

Duty Cycle Graphs


Mode 2: IEEE 802.11b Continuous TX mode

On+off time




Mode 3: IEEE 802.11g Continuous TX mode

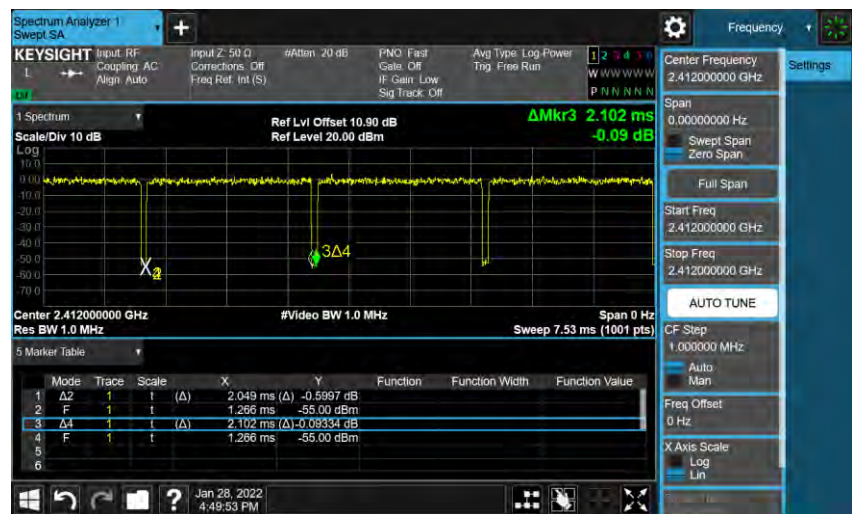On+off time




Mode 4: IEEE 802.11n 2.4 GHz 20 MHz(64QAM) Continuous TX mode

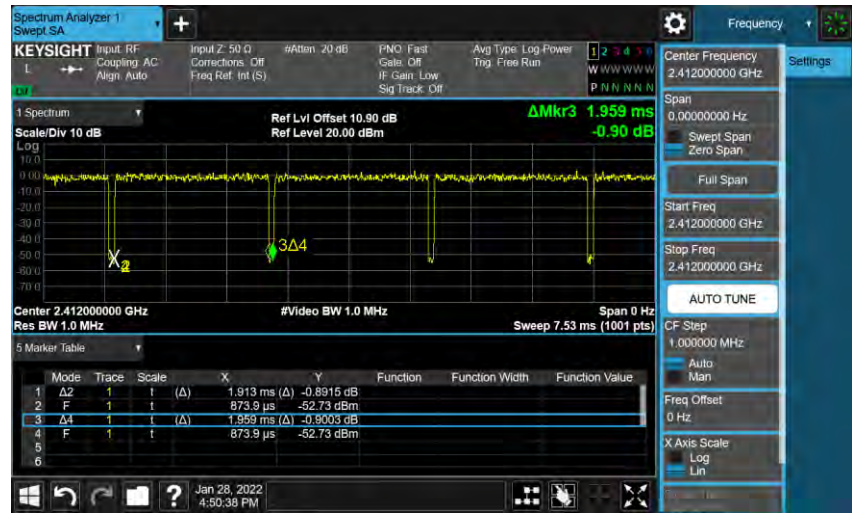On+off time



Mode 5: IEEE 802.11n 2.4 GHz 40 MHz(64QAM) Continuous TX mode

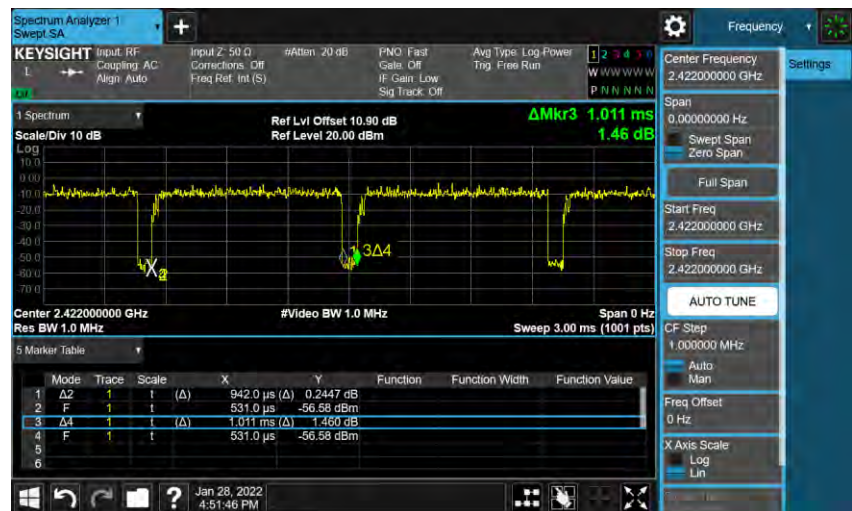On+off time




3.2. EUT Test Step


1.	Setup the EUT shown on “Configuration of Test System Details”.
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.

3.3. Configuration of Test System Details

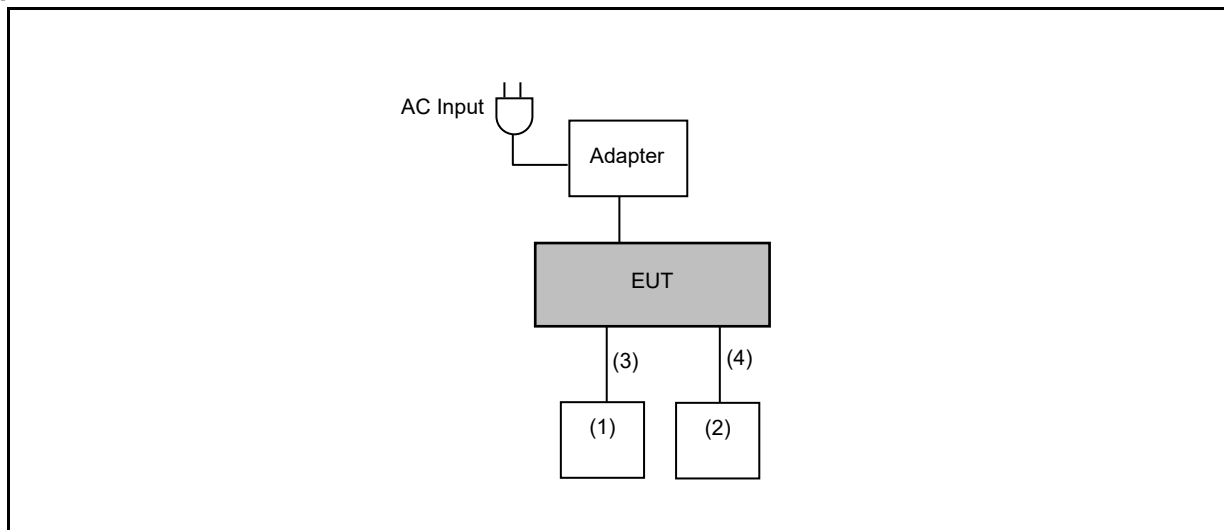Conducted Emissions



Radiated Emissions

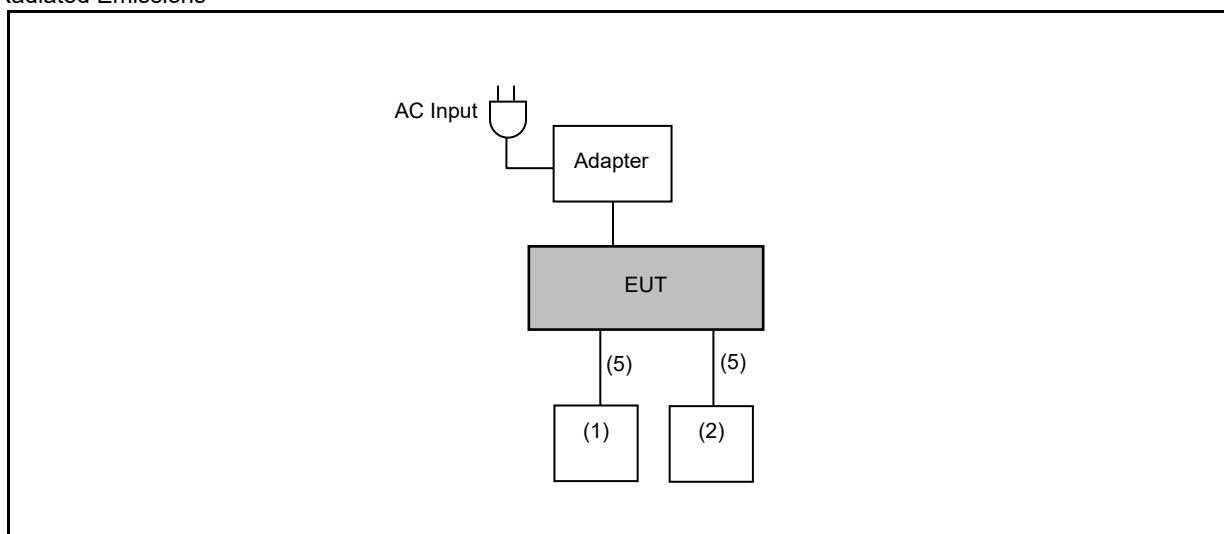

Product		Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	Acer	N19C1	---	---
(2)	Notebook	ASUS	P2430U	---	---
(3)	LAN Cable	TATUNG	CAT5E	---	---
(4)	LAN Cable	SERVICEPRO	CAT6	---	---
(5)	LAN Cable	TATUNG	CAT5E	---	---

3.4. Test Instruments

For Conducted Emission
Test Period: Dec. 18, 2021
Testing Engineer: Chi Chang

Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Test Receiver	R&S	ESCI	100367	May 21, 2021	1 year
☐	Test Receiver	R&S	ESCI	100722	Nov. 02, 2021	1 year
☐	Test Receiver	R&S	ESCI	101000	Nov. 26, 2021	1 year
☒	LISN	R&S	ENV216	101040	Mar. 29, 2021	1 year
☒	LISN	R&S	ENV216	101041	Apr. 08, 2021	1 year
☒	RF Cable	Woken	00100D1380194M	TE-02-03	May 28, 2021	1 year
☒	Software	EZ EMC	1.1.4.3	N/A	N.C.R.	---

For Conducted
Test Period: Dec. 07, 2021 ~ Jan. 28, 2022
Testing Engineer: Brian Lin

Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☐	Power Sensor	Anritsu	MA2411B	1126022	Sep. 03, 2021	1 year
☐	Power Meter	Anritsu	ML2495A	1135009	Sep. 03, 2021	1 year
☒	Power Sensor	Agilent	N1921A	MY45241957	Dec. 06, 2021	1 year
☒	Power Meter	Agilent	N1911A	MY45101619	Dec. 06, 2021	1 year
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY59071418	Mar. 17, 2021	1 year
☐	Spectrum Analyzer (9 kHz~26.5 GHz)	Agilent	N9010A	MY48030518	Jul. 23, 2021	1 year
☐	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Sep. 09, 2021	1 year
☐	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Jan. 08, 2021	1 year
☐	Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	Mar. 30, 2021	1 year
☐	Signal Generator	Keysight	N5182B	MY53052569	Apr. 20, 2021	1 year
☐	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 20, 2021	1 year
☐	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
☐	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 02, 2021	1 year
☐	Power Supply	KEITHLEY	2303	4045290	Feb. 01, 2021	1 year
☐	RF Communication Test Set	HP	8920A	3344A03297	Aug. 10, 2021	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Dec. 16, 2021 ~ Jan. 21, 2022

Testing Engineer: Hung Chou, Marc Yeh

Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (2 Hz~50 GHz)	Keysight	N9030B	MY57143537	Apr. 19, 2021	1 year
☒	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	Jan. 15, 2021 Jan. 14, 2022	1 year
☐	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A10961	Jul. 06, 2021	1 year
☐	Broadband Amplifier (100 kHz~1 GHz)	Titan	T0910E00014330 A1F	001	Jul. 23, 2021	1 year
☐	Amplifier (1 GHz~26.5 GHz)	Agilent	8449B	3008A02237	Oct. 21, 2021	1 year
☒	Broadband Amplifier (1 GHz~26.5 GHz)	Titan	T0912E01263025 A1F	002	Jul. 26, 2021	1 year
☒	Preamplifier (26.5 GHz~40 GHz)	EMCI	EMC2654045	980028	Aug. 19, 2021	1 year
☒	Loop Antenna (9 kHz~30 MHz)	COM-POWER CORPORATION	AL-130	121014	Apr. 07, 2021	1 year
☒	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	01146	Jul. 19, 2021	1 year
☐	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	416	Nov. 17, 2021	1 year
☒	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Jul. 09, 2021	1 year
☐	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	9120D-550	Aug. 24, 2021	1 year
☒	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Aug. 24, 2021	1 year
☐	Horn Antenna (18 GHz~40 GHz)	ETS	3116	00086467	Dec. 03, 2021	1 year
☐	RF Cable	EMCI	EMC104-N-N-600 0	TE01-1	Feb. 19, 2021	1 year
☐	Microwave Cable	EMCI	EMC104-SM-SM- 13000	170814	Feb. 19, 2021	1 year
☐	Microwave Cable	EMCI	EMC102-KM-KM- 14000	151001	Feb. 19, 2021	1 year
☒	Coaxial Cable	Titan	T0710AT327A10A 100	J11005	Aug. 06, 2021	1 year

Note: N.C.R. = No Calibration Request.

Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Coaxial Cable	Titan	T0710AT327A10A 900	J11004	Aug. 06, 2021	1 year
☒	Coaxial Cable	Titan	CFD400NL-LW	001	Aug. 06, 2021	1 year
☐	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
☐	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 02, 2021	1 year
☐	Power Supply	KEITHLEY	2303	4045290	Feb. 01, 2021	1 year
☒	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75


4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

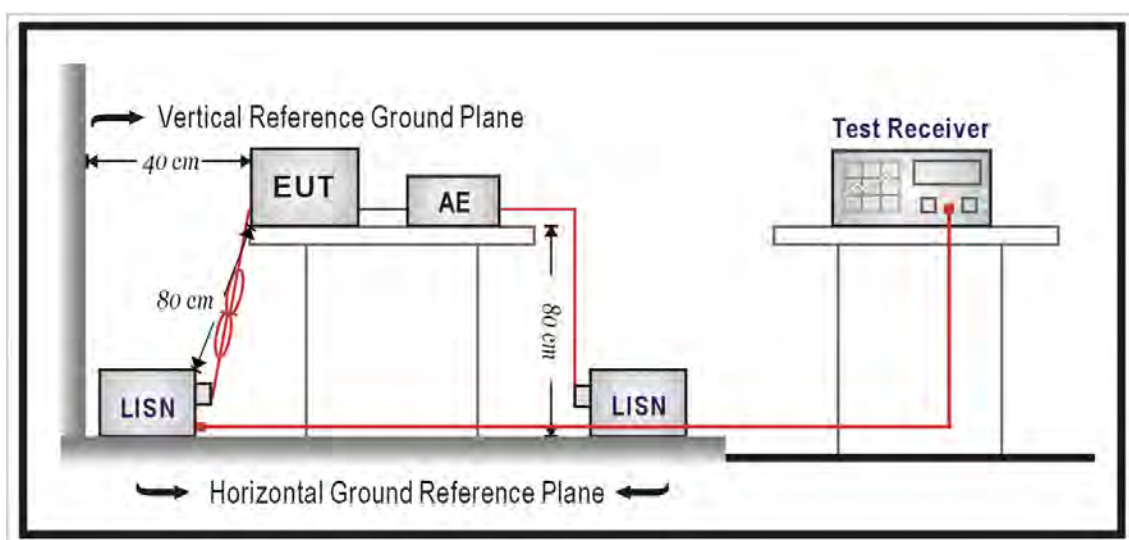■ Test Setup



■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All $50\ \Omega$ ports of the LISN shall be resistively terminated into $50\ \Omega$ loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.2. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup

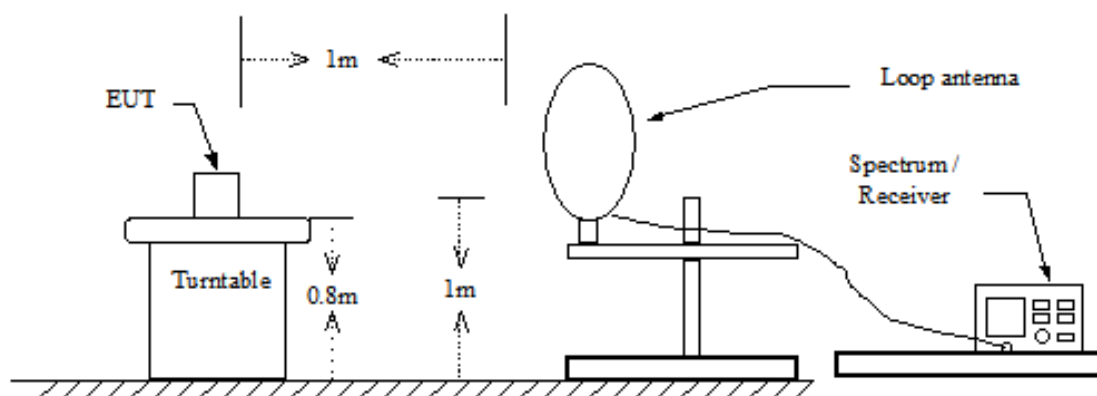
9 kHz ~ 30 MHz



Below 1 GHz

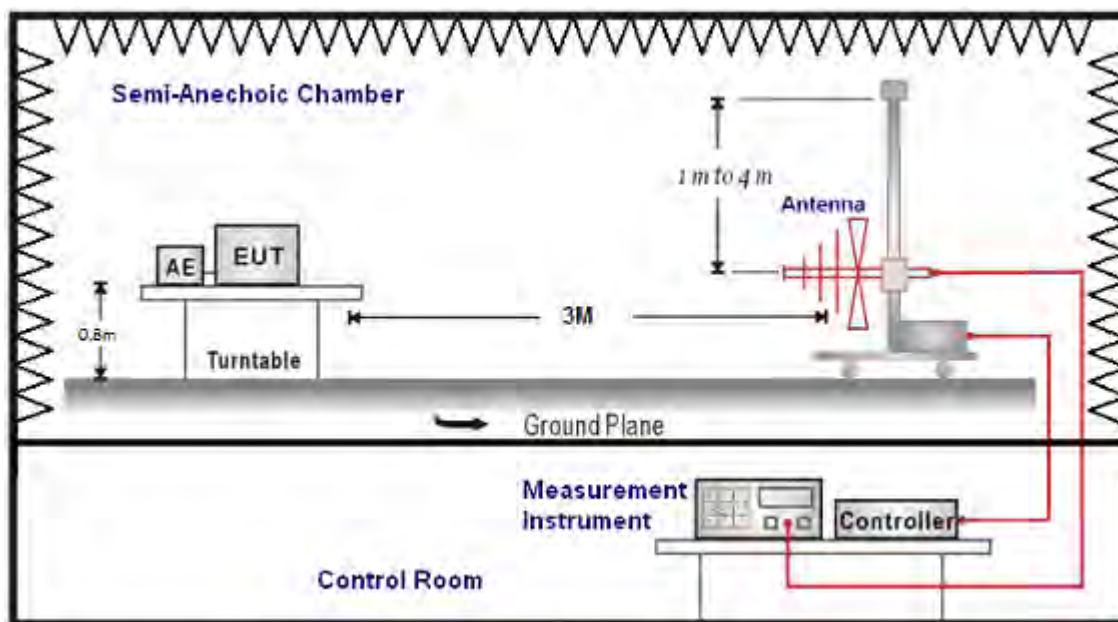

Above 1 GHz

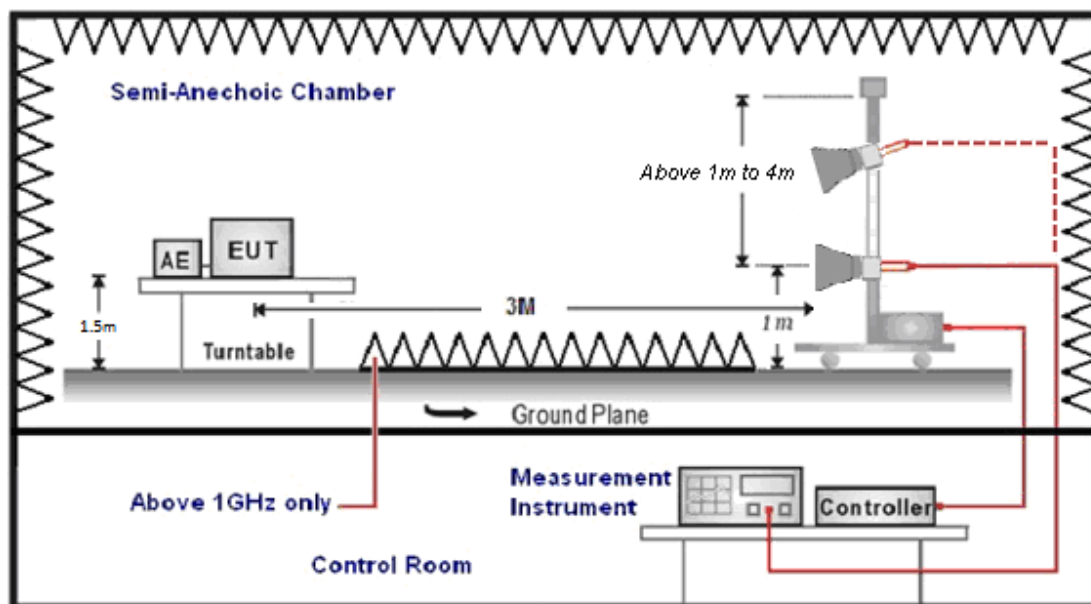

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / $1/T$ for average measurements when Duty cycle <0.98 . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

4.3. Maximum Conducted Output Power Measurement

■ Limit

For systems using digital modulation in the 2400-2483.5 MHz, the limit for maximum output power is 30 dBm.

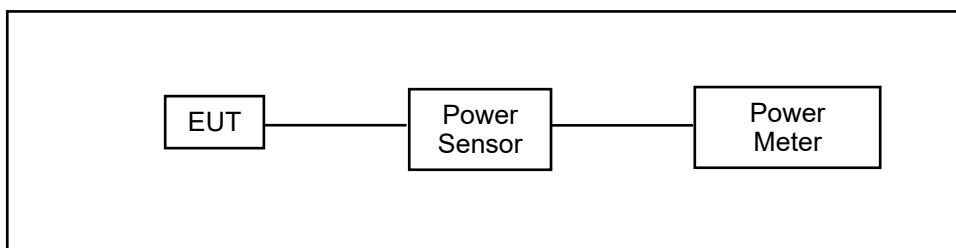
And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

BF mode:

Directional Gain = $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\}$ = 9.12 dBi > 6 dBi

* power limit shall be reduced = 30 - 3.12 = 26.88 dBm

■ Test Setup



■ Test Procedure

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.

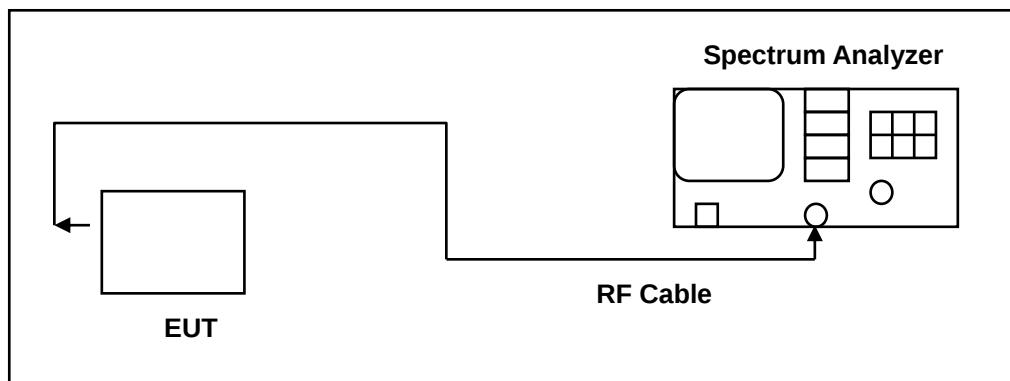
The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.

4.4. 6 dB RF Bandwidth Measurement

■ Limit

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ Test Setup



■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

4.5. Maximum Power Spectral Density Measurement

■ Limit

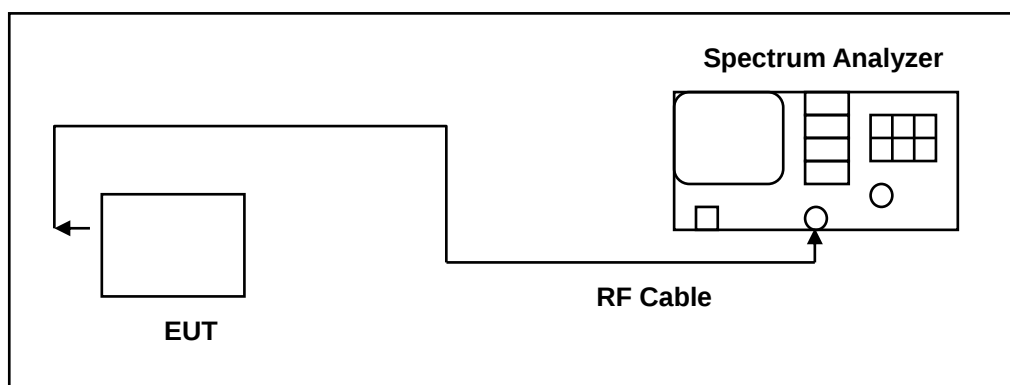
For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

BF mode:

Directional Gain = $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\} = 9.12 \text{ dBi} > 6 \text{ dBi}$

* power spectral density limit shall be reduced = $8 - 3.12 = 4.88 \text{ dBm/3 kHz}$

■ Test Setup



■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD for compliance to FCC 47CFR 15.247 requirements.

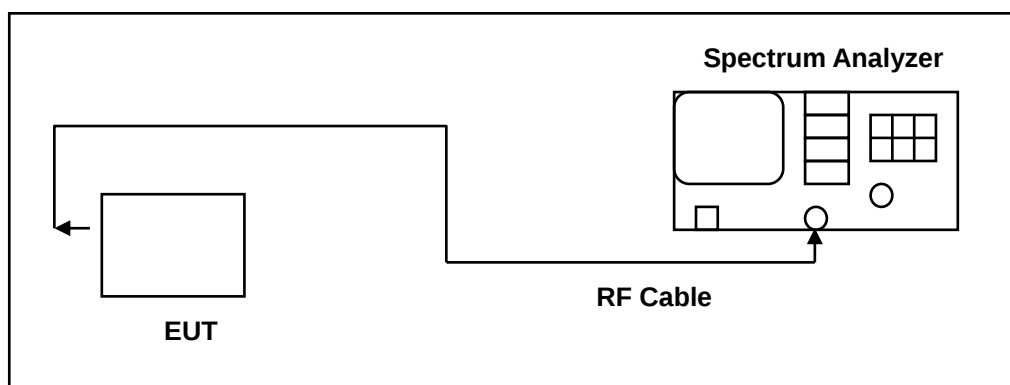
1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.6. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup



■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 30 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

4.7. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Antenna Description

See section 2 – antenna information.

■ Directional Gain Calculated

For Maximum Conducted Output Power

$$\text{Directional Gain} = 10 \cdot \log\{[10^{(G1/10)} + 10^{(G2/10)} + \dots + 10^{(Gn/10)}] / NANT\}$$

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11b	3.11
IEEE 802.11g	3.11
IEEE 802.11n 2.4 GHz 20 MHz(64QAM)	3.11
IEEE 802.11n 2.4 GHz 40 MHz(64QAM)	3.11
IEEE 802.11n 2.4 GHz 20 MHz(256QAM)	3.11
IEEE 802.11n 2.4 GHz 40 MHz(256QAM)	3.11

For Maximum Power Density

$$\text{Directional Gain} = 10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\}$$

$$\text{Directional Gain} = 10 \cdot \log\{[10^{(G1/10)} + 10^{(G2/10)} + \dots + 10^{(Gn/10)}] / NANT\}$$

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11b	9.12
IEEE 802.11g	9.12
IEEE 802.11n 2.4 GHz 20 MHz(256QAM)	3.11
IEEE 802.11n 2.4 GHz 40 MHz(256QAM)	3.11

Beamforming on

For Maximum Conducted Output Power

$$\text{Directional Gain} = 10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\}$$

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11n 2.4 GHz 20 MHz(64QAM)	9.12
IEEE 802.11n 2.4 GHz 40 MHz(64QAM)	9.12
IEEE 802.11n 2.4 GHz 20 MHz(256QAM)	9.12
IEEE 802.11n 2.4 GHz 40 MHz(256QAM)	9.12

For Maximum Power Density


$$\text{Directional Gain} = 10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\}$$

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11n 2.4 GHz 20 MHz(256QAM)	9.12
IEEE 802.11n 2.4 GHz 40 MHz(256QAM)	9.12

5 Test Results

5.1 Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

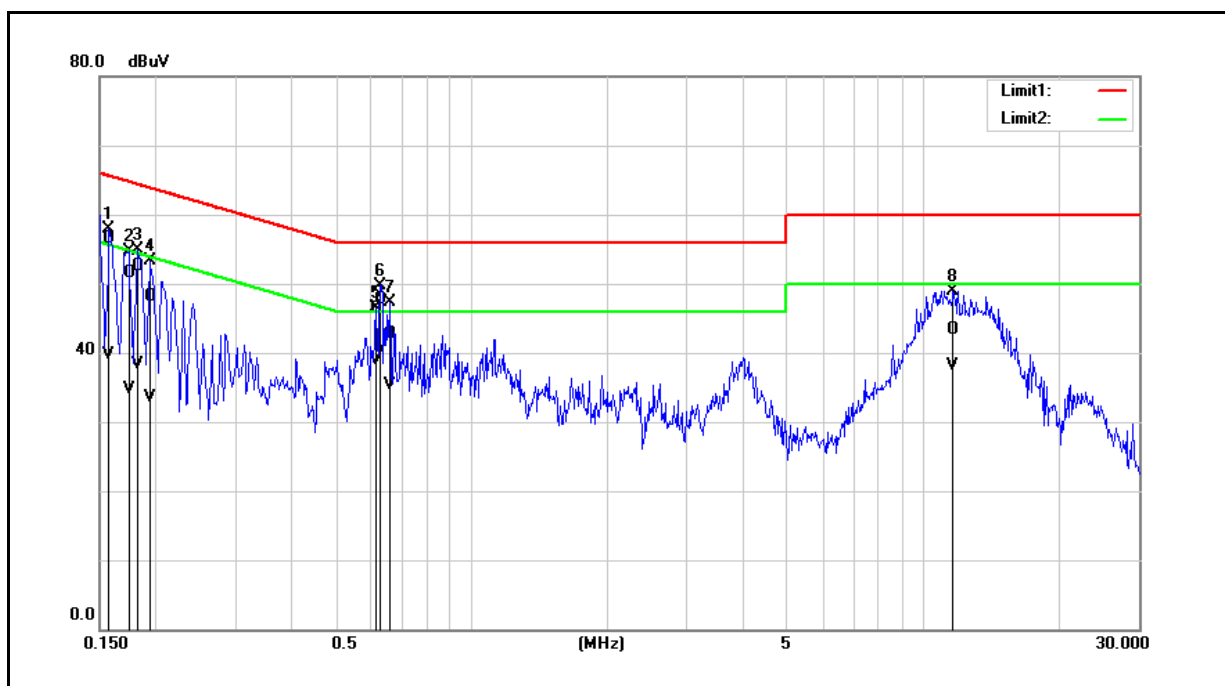


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	46.84	29.91	9.74	56.58	39.65	65.57	55.57	-8.99	-15.92	Pass
2	0.1740	41.86	24.93	9.74	51.60	34.67	64.77	54.77	-13.17	-20.10	Pass
3	0.1820	42.73	28.47	9.74	52.47	38.21	64.39	54.39	-11.92	-16.18	Pass
4	0.1940	38.28	23.79	9.74	48.02	33.53	63.86	53.86	-15.84	-20.33	Pass
5	0.6140	36.47	29.15	9.74	46.21	38.89	56.00	46.00	-9.79	-7.11	Pass
6	0.6300	38.02	30.61	9.75	47.77	40.36	56.00	46.00	-8.23	-5.64	Pass
7	0.6580	32.91	25.57	9.75	42.66	35.32	56.00	46.00	-13.34	-10.68	Pass
8	11.6540	33.37	28.05	9.99	43.36	38.04	60.00	50.00	-16.64	-11.96	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Description:			

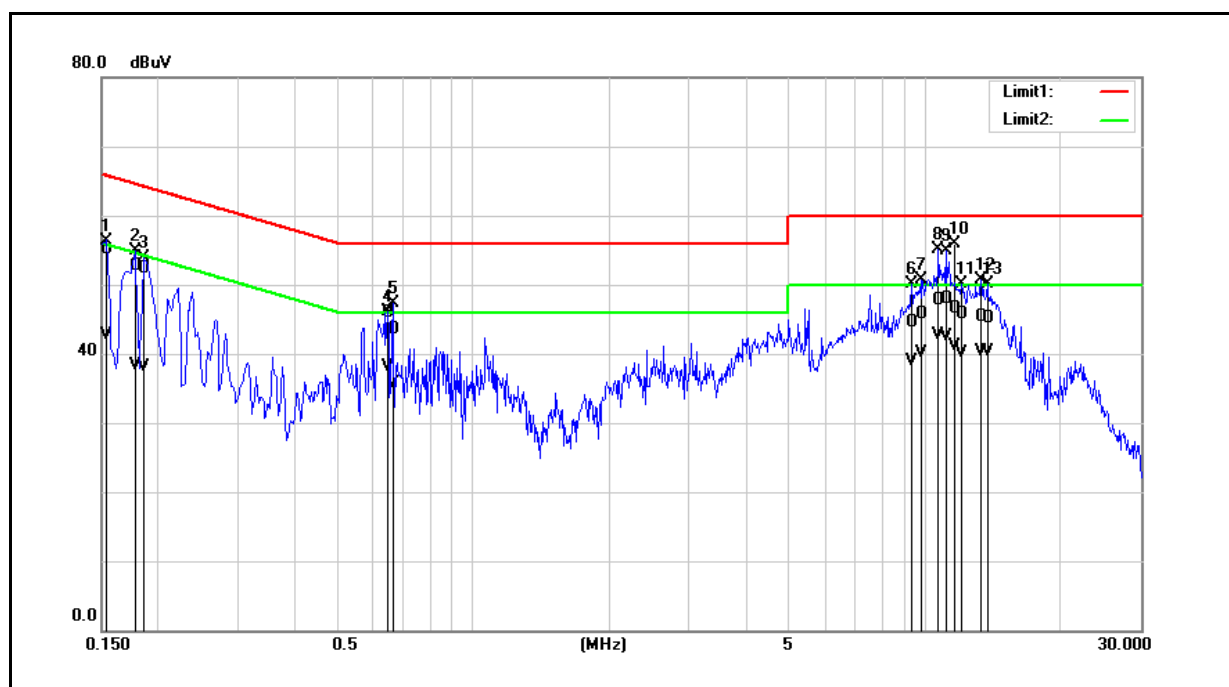

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	45.44	33.03	9.74	55.18	42.77	65.78	55.78	-10.60	-13.01	Pass
2	0.1780	42.95	28.65	9.73	52.68	38.38	64.58	54.58	-11.90	-16.20	Pass
3	0.1860	42.50	28.36	9.73	52.23	38.09	64.21	54.21	-11.98	-16.12	Pass
4	0.6460	36.07	28.39	9.74	45.81	38.13	56.00	46.00	-10.19	-7.87	Pass
5	0.6620	33.77	25.94	9.74	43.51	35.68	56.00	46.00	-12.49	-10.32	Pass
6	9.3300	34.60	28.86	9.97	44.57	38.83	60.00	50.00	-15.43	-11.17	Pass
7	9.8180	35.78	30.16	9.99	45.77	40.15	60.00	50.00	-14.23	-9.85	Pass
8	10.7220	37.77	32.72	10.01	47.78	42.73	60.00	50.00	-12.22	-7.27	Pass
9	11.1020	37.91	32.53	10.01	47.92	42.54	60.00	50.00	-12.08	-7.46	Pass
10	11.6500	36.48	31.06	10.03	46.51	41.09	60.00	50.00	-13.49	-8.91	Pass
11	12.0580	35.63	30.05	10.03	45.66	40.08	60.00	50.00	-14.34	-9.92	Pass
12	13.3180	35.14	30.21	10.07	45.21	40.28	60.00	50.00	-14.79	-9.72	Pass
13	13.7260	34.95	30.14	10.07	45.02	40.21	60.00	50.00	-14.98	-9.79	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5.2 Conducted Test Results

Maximum Conducted Output Power Measurement

Test Mode	Frequency (MHz)	RF Power setting in Test Software				Test Software Version
		ANT-0	ANT-1	ANT-2	ANT-3	
Mode 2	2412	18.0	18.0	18.0	18.0	QSPR Version 5.0-00188
	2437	18.0	18.0	18.0	18.0	
	2462	17.5	17.5	17.5	17.5	
Mode 3	2412	17.0	17.0	17.0	17.0	
	2437	17.0	17.0	17.0	17.0	
	2462	16.5	16.5	16.5	16.5	
Mode 4	2412	17.0	17.0	17.0	17.0	
	2437	16.5	16.5	16.5	16.5	
	2462	15.0	15.0	15.0	15.0	
Mode 5	2422	14.5	14.5	14.5	14.5	
	2437	17.0	17.0	17.0	17.0	
	2452	13.5	13.5	13.5	13.5	
Mode 6	2412	17.0	17.0	17.0	17.0	
	2437	16.5	16.5	16.5	16.5	
	2462	15.0	15.0	15.0	15.0	
Mode 7	2422	14.5	14.5	14.5	14.5	
	2437	17.0	17.0	17.0	17.0	
	2452	13.5	13.5	13.5	13.5	

Test Mode	Frequency (MHz)	Data Rate	Average Output Power										
			Measurement Results										Limit (dBm)
			ANT-0		ANT-1		ANT-2		ANT-3		ANT-0+1+2+3		
			(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
Mode 2	2412	1 M	18.01	0.063	17.94	0.062	17.71	0.059	17.91	0.062	23.91	0.246	≤ 30.00
	2437		17.33	0.054	17.73	0.059	18.30	0.068	17.76	0.060	23.81	0.240	≤ 30.00
	2462		17.62	0.058	17.41	0.055	17.39	0.055	17.56	0.057	23.52	0.225	≤ 30.00
Mode 3	2412	6 M	16.19	0.042	16.42	0.044	16.39	0.044	16.35	0.043	22.36	0.172	≤ 30.00
	2437		16.01	0.040	16.33	0.043	16.25	0.042	16.17	0.041	22.21	0.166	≤ 30.00
	2462		15.71	0.037	16.17	0.041	16.18	0.041	15.82	0.038	22.00	0.158	≤ 30.00
Mode 4	2412	26 M	15.85	0.038	16.08	0.041	16.03	0.040	16.26	0.042	22.08	0.161	≤ 30.00
	2437		15.30	0.034	15.29	0.034	15.37	0.034	15.53	0.036	21.39	0.138	≤ 30.00
	2462		14.09	0.026	14.23	0.026	14.41	0.028	14.22	0.026	20.26	0.106	≤ 30.00
Mode 5	2422	54 M	14.02	0.025	14.40	0.028	14.57	0.029	14.33	0.027	20.36	0.109	≤ 30.00
	2437		16.49	0.045	16.47	0.044	16.87	0.049	16.72	0.047	22.66	0.185	≤ 30.00
	2452		13.19	0.021	13.57	0.023	13.38	0.022	13.43	0.022	19.42	0.087	≤ 30.00
Mode 6	2412	26 M	15.96	0.039	16.22	0.042	16.16	0.041	16.28	0.042	22.18	0.165	≤ 30.00
	2437		15.33	0.034	15.41	0.035	15.47	0.035	15.61	0.036	21.48	0.141	≤ 30.00
	2462		14.13	0.026	14.33	0.027	14.47	0.028	14.25	0.027	20.32	0.108	≤ 30.00
Mode 7	2422	54 M	14.13	0.026	14.42	0.028	14.63	0.029	14.35	0.027	20.41	0.110	≤ 30.00
	2437		16.59	0.046	16.60	0.046	16.89	0.049	16.79	0.048	22.74	0.188	≤ 30.00
	2452		13.23	0.021	13.69	0.023	13.41	0.022	13.49	0.022	19.48	0.089	≤ 30.00

Note: The relevant measured result has the offset with cable loss already.

6 dB RF Bandwidth Measurement

Test Mode	Frequency (MHz)	Measurement (kHz)				Limit (kHz)
		ANT-0	ANT-1	ANT-2	ANT-3	
Mode 2	2412	8109	8102	8560	8115	≥ 500
	2437	8584	8107	8114	8112	≥ 500
	2462	9043	8110	8588	8098	≥ 500
Mode 3	2412	16330	15940	16340	16360	≥ 500
	2437	16340	15700	16340	16360	≥ 500
	2462	16340	15660	16340	16370	≥ 500
Mode 6	2412	17030	16750	16860	17270	≥ 500
	2437	17120	16740	17010	17410	≥ 500
	2462	16990	16700	17170	17170	≥ 500
Mode 7	2422	35170	35170	35170	35170	≥ 500
	2437	35140	35170	35180	35150	≥ 500
	2452	35200	35180	35240	35150	≥ 500

Test Graphs

Mode 2: IEEE 802.11b Continuous TX mode_ANT-0

2412 MHz






2437 MHz






2462 MHz



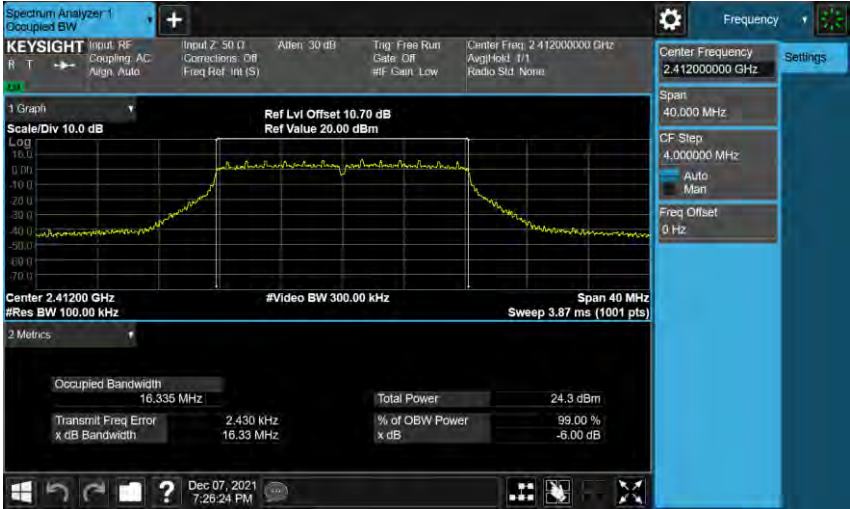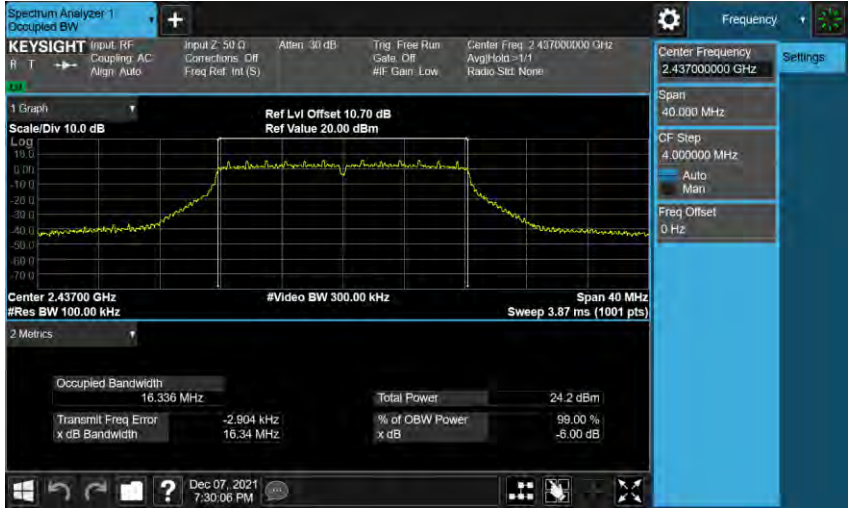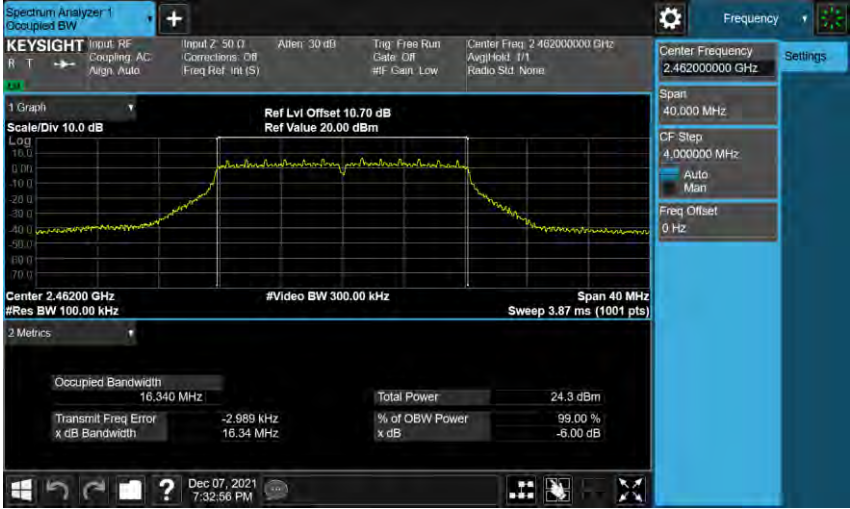Mode 3: IEEE 802.11g Continuous TX mode_ANT-0


2412 MHz	
2437 MHz	
2462 MHz	

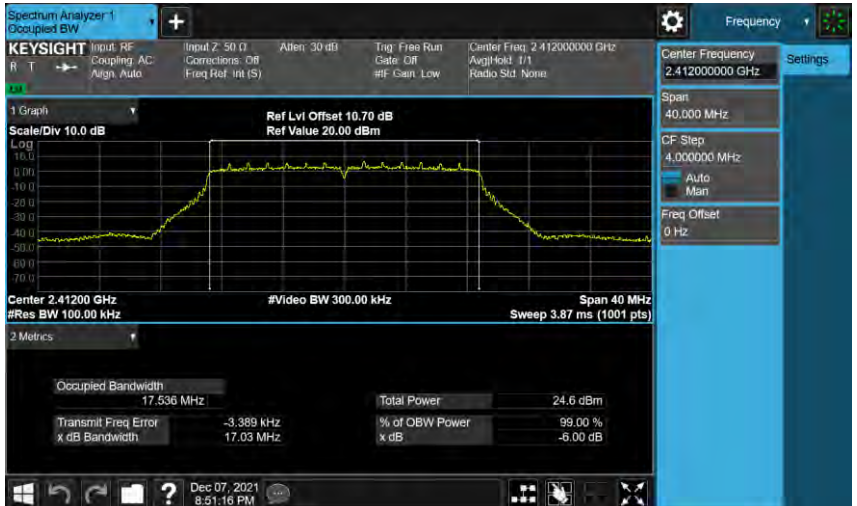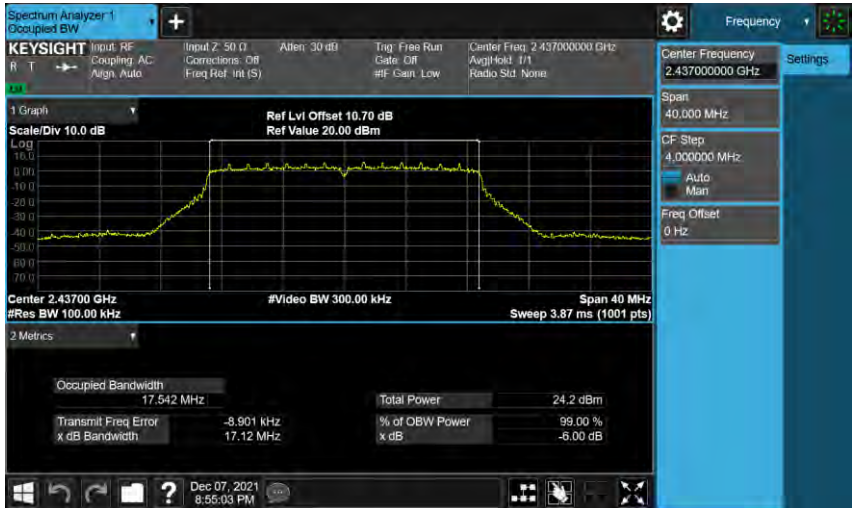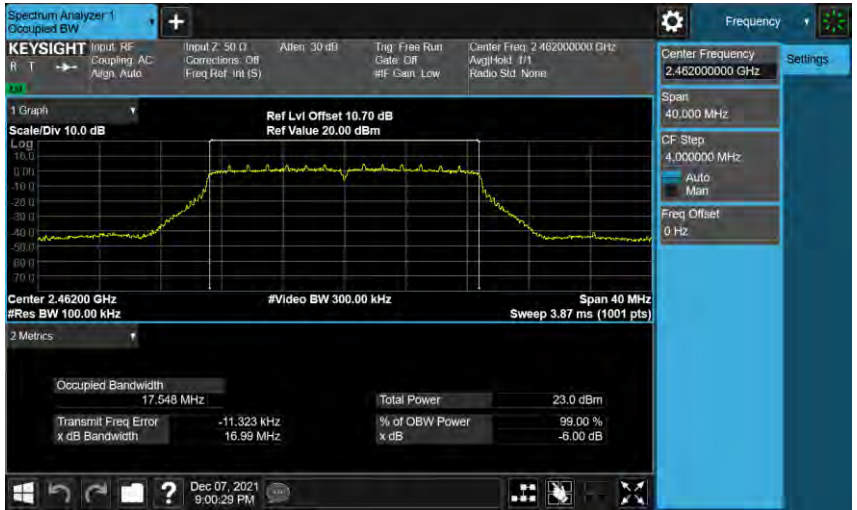Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX mode_ANT-0


2412 MHz	 Center 2.41200 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 40 MHz Sweep 3.87 ms (1001 pts) <table><tr><td>Occupied Bandwidth</td><td>17.536 MHz</td><td>Total Power</td><td>24.6 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-3.389 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>17.03 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	17.536 MHz	Total Power	24.6 dBm	Transmit Freq Error	-3.389 kHz	% of OBW Power	99.00 %	x dB Bandwidth	17.03 MHz	x dB	-6.00 dB
Occupied Bandwidth	17.536 MHz	Total Power	24.6 dBm										
Transmit Freq Error	-3.389 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	17.03 MHz	x dB	-6.00 dB										
2437 MHz	 Center 2.43700 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 40 MHz Sweep 3.87 ms (1001 pts) <table><tr><td>Occupied Bandwidth</td><td>17.542 MHz</td><td>Total Power</td><td>24.2 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-8.901 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>17.12 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	17.542 MHz	Total Power	24.2 dBm	Transmit Freq Error	-8.901 kHz	% of OBW Power	99.00 %	x dB Bandwidth	17.12 MHz	x dB	-6.00 dB
Occupied Bandwidth	17.542 MHz	Total Power	24.2 dBm										
Transmit Freq Error	-8.901 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	17.12 MHz	x dB	-6.00 dB										
2462 MHz	 Center 2.46200 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 40 MHz Sweep 3.87 ms (1001 pts) <table><tr><td>Occupied Bandwidth</td><td>17.548 MHz</td><td>Total Power</td><td>23.0 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-11.323 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>16.99 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	17.548 MHz	Total Power	23.0 dBm	Transmit Freq Error	-11.323 kHz	% of OBW Power	99.00 %	x dB Bandwidth	16.99 MHz	x dB	-6.00 dB
Occupied Bandwidth	17.548 MHz	Total Power	23.0 dBm										
Transmit Freq Error	-11.323 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	16.99 MHz	x dB	-6.00 dB										

Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX mode_ANT-0

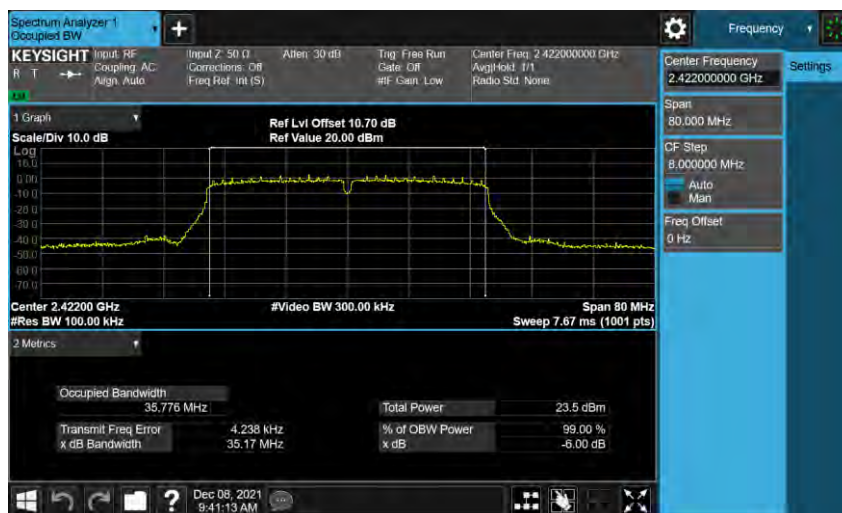2422 MHz



2437 MHz

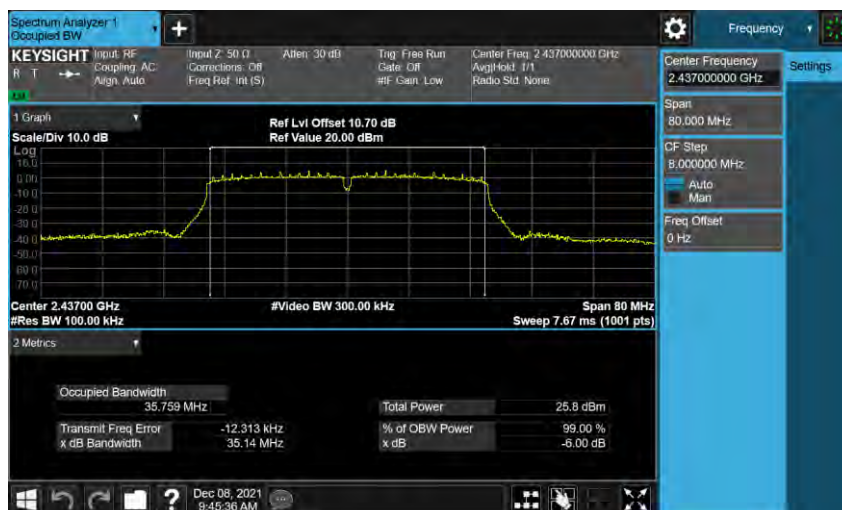

2452 MHz



Mode 2: IEEE 802.11b Continuous TX mode_ANT-1


2412 MHz	 Center Frequency: 2.41200000 GHz Span: 40.000 MHz CF Step: 4.000000 MHz Res BW: 100.00 kHz Video BW: 300.00 kHz Span: 40 MHz Sweep: 3.87 ms (1001 pts) Occupied Bandwidth: 12.963 MHz Total Power: 26.1 dBm Transmit Freq Error: 15.846 kHz % of OBW Power: 99.00 % x dB Bandwidth: 8.102 MHz x dB: -6.00 dB
2437 MHz	 Center Frequency: 2.43700000 GHz Span: 40.000 MHz CF Step: 4.000000 MHz Res BW: 100.00 kHz Video BW: 300.00 kHz Span: 40 MHz Sweep: 3.87 ms (1001 pts) Occupied Bandwidth: 12.997 MHz Total Power: 25.7 dBm Transmit Freq Error: -3.878 kHz % of OBW Power: 99.00 % x dB Bandwidth: 8.107 MHz x dB: -6.00 dB
2462 MHz	 Center Frequency: 2.46200000 GHz Span: 40.000 MHz CF Step: 4.000000 MHz Res BW: 100.00 kHz Video BW: 300.00 kHz Span: 40 MHz Sweep: 3.87 ms (1001 pts) Occupied Bandwidth: 13.018 MHz Total Power: 25.5 dBm Transmit Freq Error: -5.354 kHz % of OBW Power: 99.00 % x dB Bandwidth: 8.110 MHz x dB: -6.00 dB

Mode 3: IEEE 802.11g Continuous TX mode_ANT-1


2412 MHz




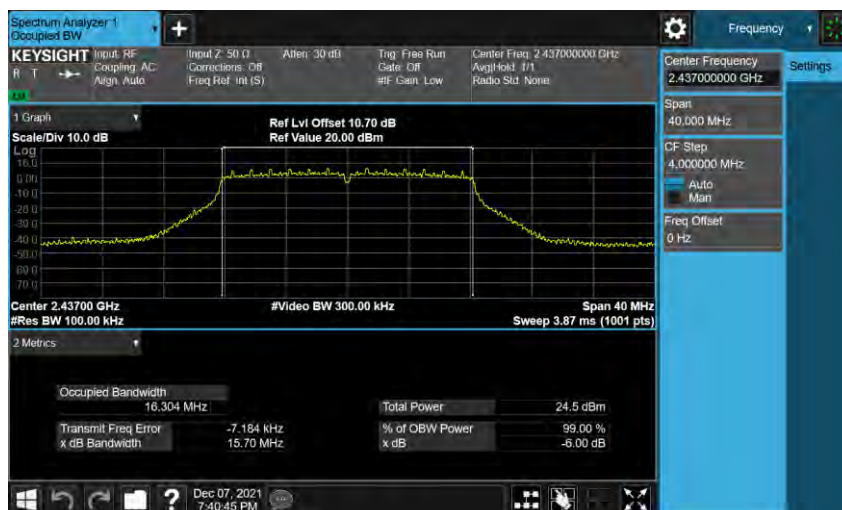
2437 MHz





2462 MHz

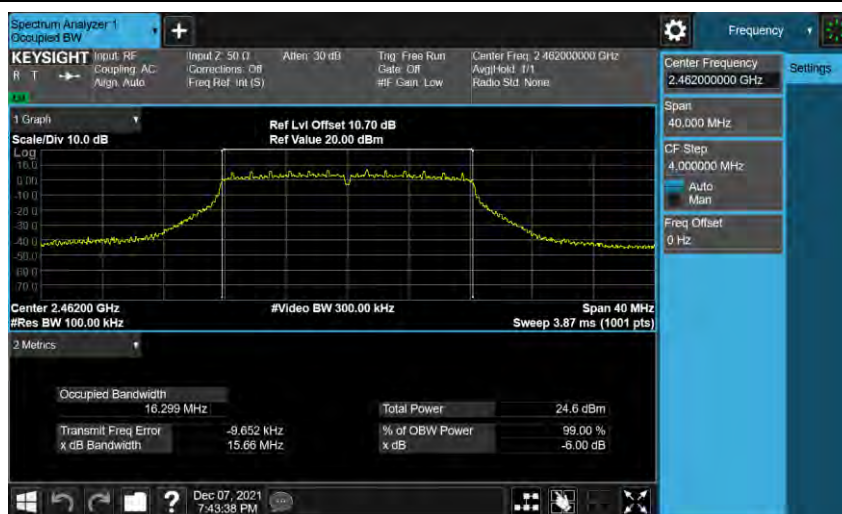

Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX mode_ANT-1

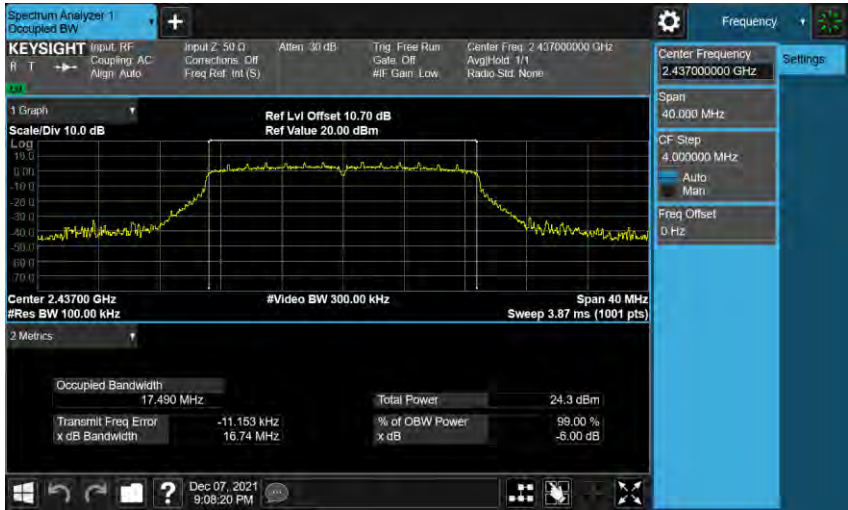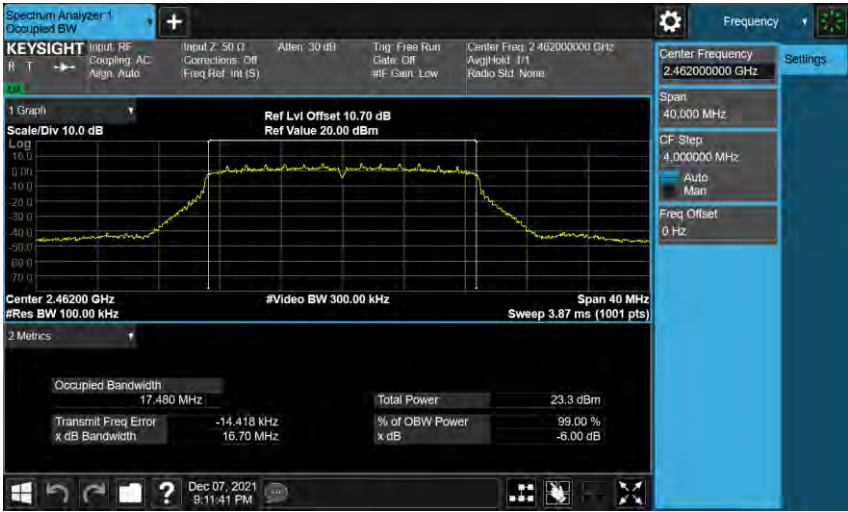2412 MHz	
2437 MHz	
2462 MHz	

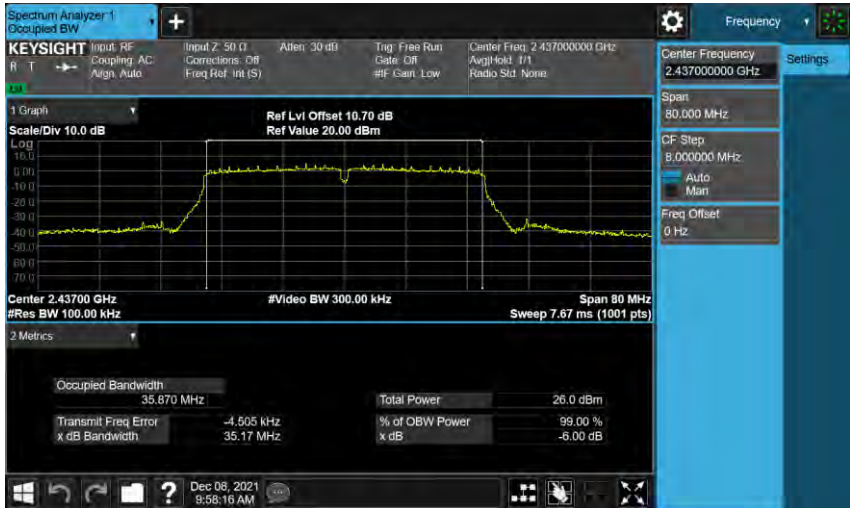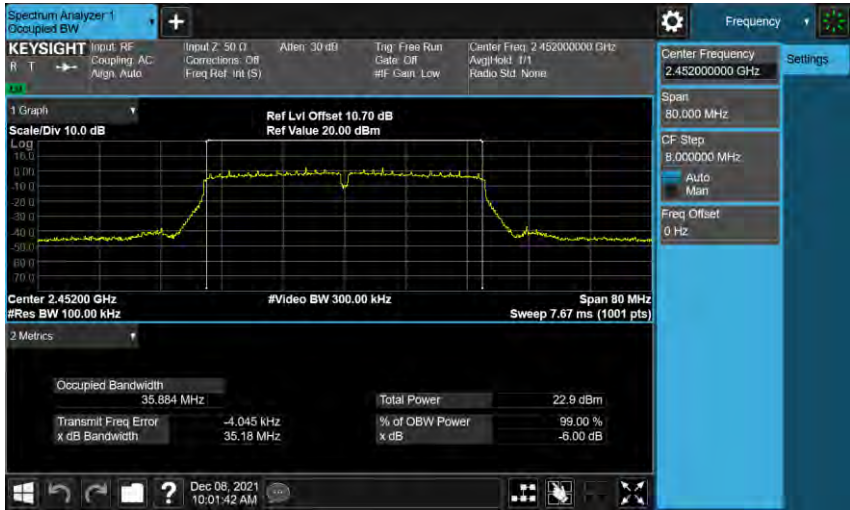Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX mode_ANT-1

2422 MHz	 Center 2.42200 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 80 MHz Sweep 7.67 ms (1001 pts) 2 Metrics <table><tr><td>Occupied Bandwidth</td><td>35.631 MHz</td><td>Total Power</td><td>23.7 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-86 Hz</td><td>% of OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>35.17 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table> Dec 08, 2021 9:53:40 AM	Occupied Bandwidth	35.631 MHz	Total Power	23.7 dBm	Transmit Freq Error	-86 Hz	% of OBW Power	99.00 %	x dB Bandwidth	35.17 MHz	x dB	-6.00 dB
Occupied Bandwidth	35.631 MHz	Total Power	23.7 dBm										
Transmit Freq Error	-86 Hz	% of OBW Power	99.00 %										
x dB Bandwidth	35.17 MHz	x dB	-6.00 dB										
2437 MHz	 Center 2.43700 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 80 MHz Sweep 7.67 ms (1001 pts) 2 Metrics <table><tr><td>Occupied Bandwidth</td><td>35.670 MHz</td><td>Total Power</td><td>26.0 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-4.505 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>35.17 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table> Dec 08, 2021 9:58:16 AM	Occupied Bandwidth	35.670 MHz	Total Power	26.0 dBm	Transmit Freq Error	-4.505 kHz	% of OBW Power	99.00 %	x dB Bandwidth	35.17 MHz	x dB	-6.00 dB
Occupied Bandwidth	35.670 MHz	Total Power	26.0 dBm										
Transmit Freq Error	-4.505 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	35.17 MHz	x dB	-6.00 dB										
2452 MHz	 Center 2.45200 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 80 MHz Sweep 7.67 ms (1001 pts) 2 Metrics <table><tr><td>Occupied Bandwidth</td><td>35.684 MHz</td><td>Total Power</td><td>22.9 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-4.045 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>35.18 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table> Dec 08, 2021 10:01:42 AM	Occupied Bandwidth	35.684 MHz	Total Power	22.9 dBm	Transmit Freq Error	-4.045 kHz	% of OBW Power	99.00 %	x dB Bandwidth	35.18 MHz	x dB	-6.00 dB
Occupied Bandwidth	35.684 MHz	Total Power	22.9 dBm										
Transmit Freq Error	-4.045 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	35.18 MHz	x dB	-6.00 dB										

Mode 2: IEEE 802.11b Continuous TX mode_ANT-2

2412 MHz





2437 MHz






2462 MHz




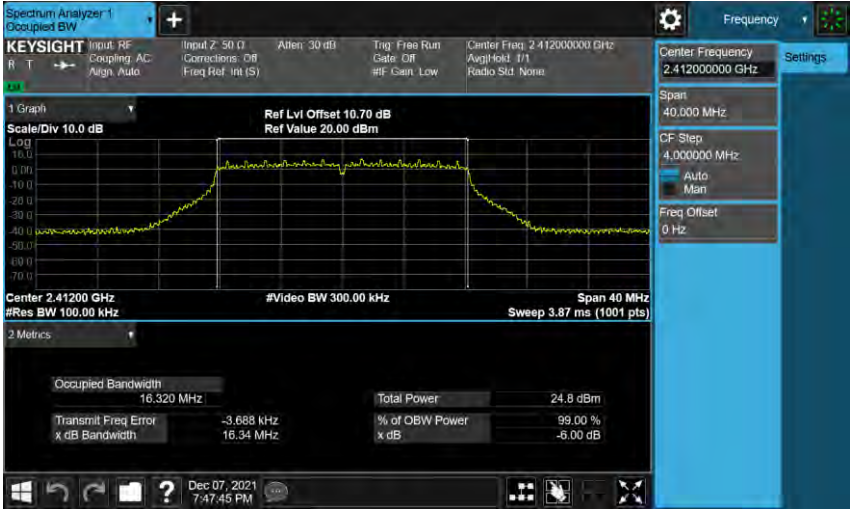
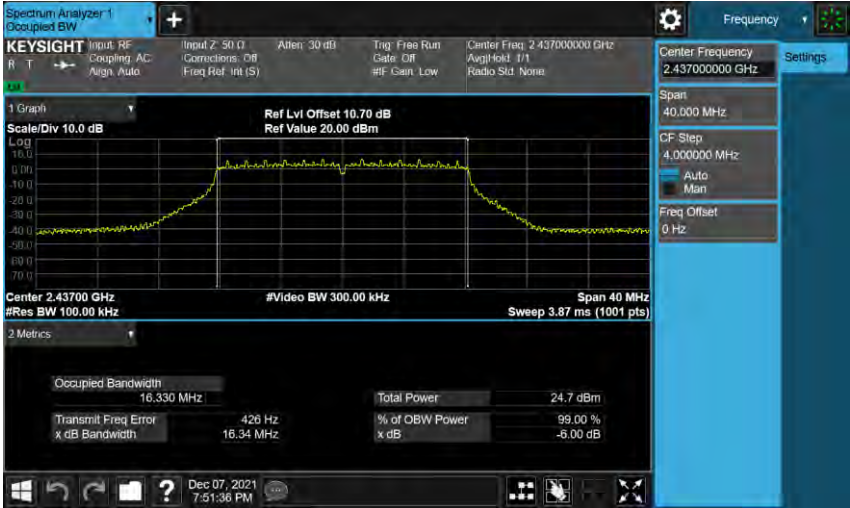
Mode 3: IEEE 802.11g Continuous TX mode_ANT-2

2412 MHz	
2437 MHz	
2462 MHz	

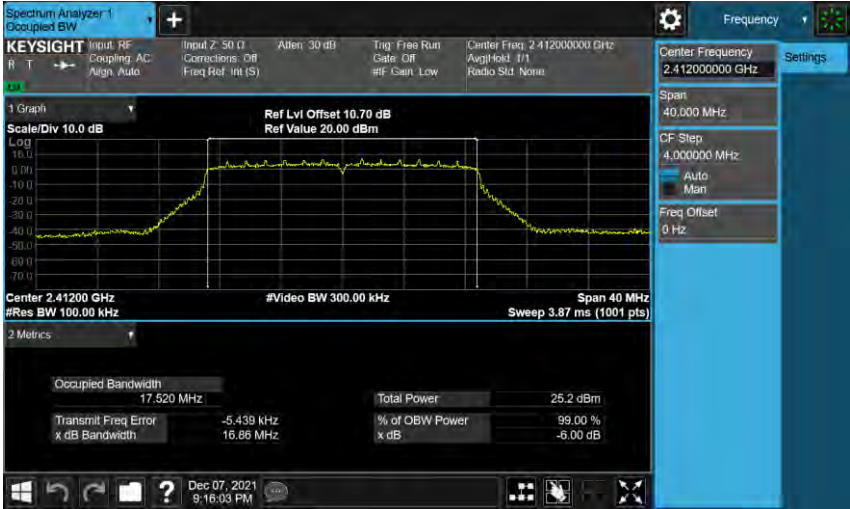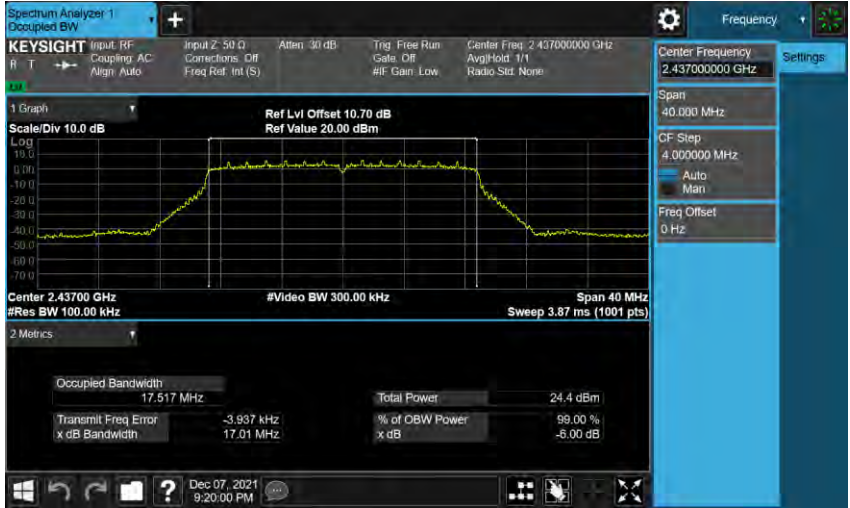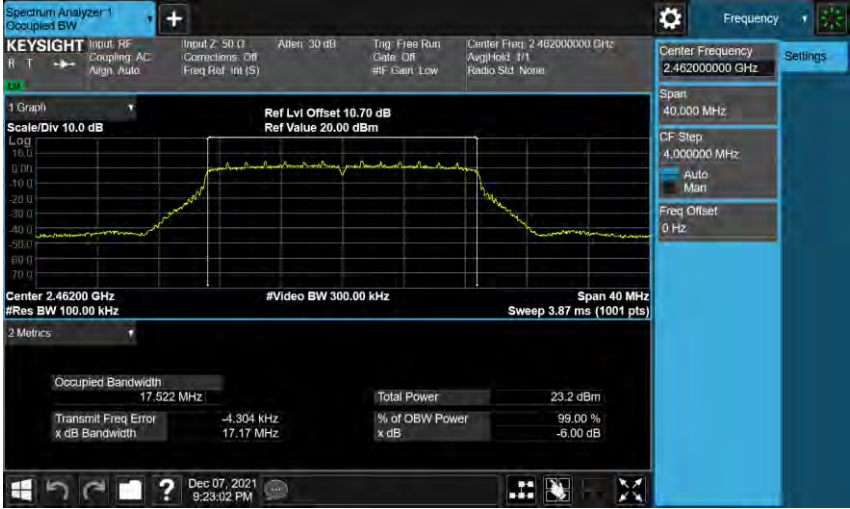Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX mode_ANT-2

2412 MHz	 Center Frequency: 2.412000000 GHz Span: 40.000 MHz CF Step: 4.000000 MHz FREQ Offset: 0 Hz Occupied Bandwidth: 17.520 MHz Total Power: 25.2 dBm Transmit Freq Error: -5.439 kHz % of OBW Power: 99.00 % x dB Bandwidth: 16.86 MHz x dB: -6.00 dB
2437 MHz	 Center Frequency: 2.437000000 GHz Span: 40.000 MHz CF Step: 4.000000 MHz FREQ Offset: 0 Hz Occupied Bandwidth: 17.517 MHz Total Power: 24.4 dBm Transmit Freq Error: -3.937 kHz % of OBW Power: 99.00 % x dB Bandwidth: 17.01 MHz x dB: -6.00 dB
2462 MHz	 Center Frequency: 2.462000000 GHz Span: 40.000 MHz CF Step: 4.000000 MHz FREQ Offset: 0 Hz Occupied Bandwidth: 17.522 MHz Total Power: 23.2 dBm Transmit Freq Error: -4.304 kHz % of OBW Power: 99.00 % x dB Bandwidth: 17.17 MHz x dB: -6.00 dB

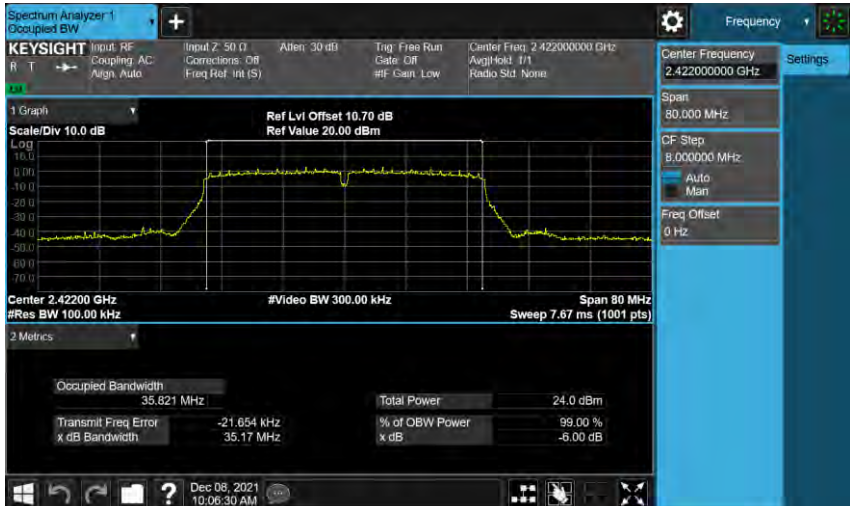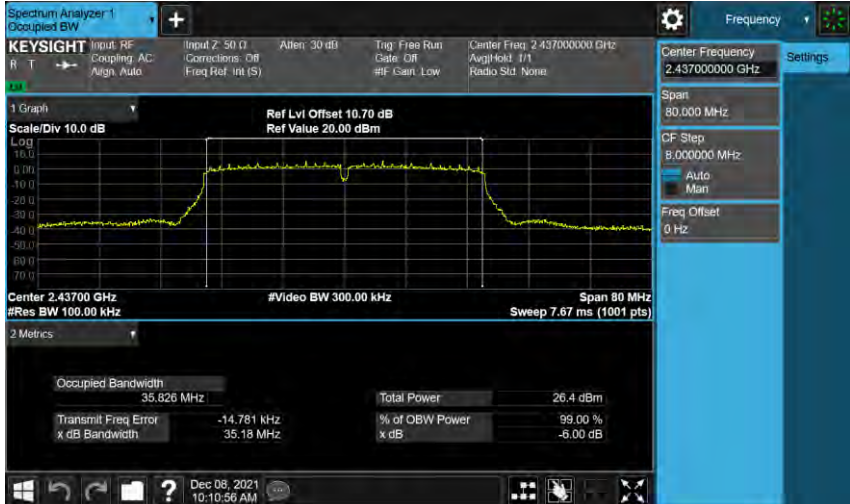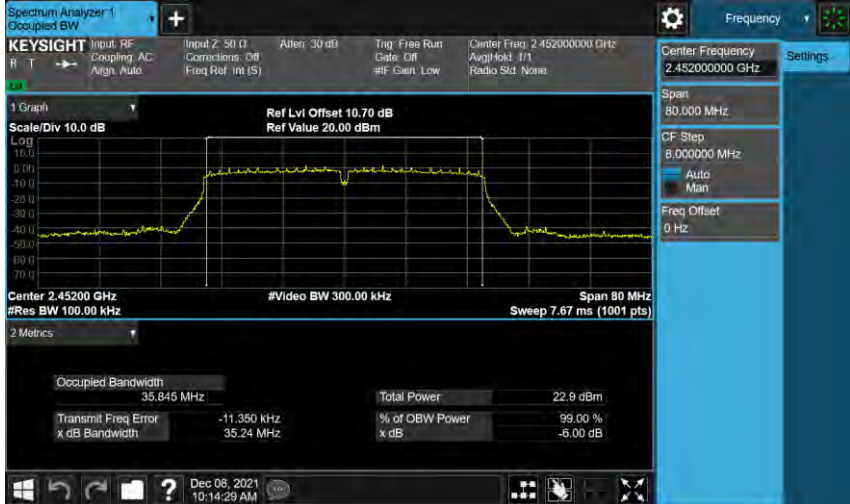Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX mode_ANT-2

2422 MHz	 Center 2.42200 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 80 MHz Sweep 7.67 ms (1001 pts) 2 Metrics <table><tr><td>Occupied Bandwidth</td><td>35.621 MHz</td><td>Total Power</td><td>24.0 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-21.654 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>35.17 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	35.621 MHz	Total Power	24.0 dBm	Transmit Freq Error	-21.654 kHz	% of OBW Power	99.00 %	x dB Bandwidth	35.17 MHz	x dB	-6.00 dB
Occupied Bandwidth	35.621 MHz	Total Power	24.0 dBm										
Transmit Freq Error	-21.654 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	35.17 MHz	x dB	-6.00 dB										
2437 MHz	 Center 2.43700 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 80 MHz Sweep 7.67 ms (1001 pts) 2 Metrics <table><tr><td>Occupied Bandwidth</td><td>35.626 MHz</td><td>Total Power</td><td>26.4 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-14.781 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>35.18 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	35.626 MHz	Total Power	26.4 dBm	Transmit Freq Error	-14.781 kHz	% of OBW Power	99.00 %	x dB Bandwidth	35.18 MHz	x dB	-6.00 dB
Occupied Bandwidth	35.626 MHz	Total Power	26.4 dBm										
Transmit Freq Error	-14.781 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	35.18 MHz	x dB	-6.00 dB										
2452 MHz	 Center 2.45200 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 80 MHz Sweep 7.67 ms (1001 pts) 2 Metrics <table><tr><td>Occupied Bandwidth</td><td>35.645 MHz</td><td>Total Power</td><td>22.9 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-11.350 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>35.24 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	35.645 MHz	Total Power	22.9 dBm	Transmit Freq Error	-11.350 kHz	% of OBW Power	99.00 %	x dB Bandwidth	35.24 MHz	x dB	-6.00 dB
Occupied Bandwidth	35.645 MHz	Total Power	22.9 dBm										
Transmit Freq Error	-11.350 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	35.24 MHz	x dB	-6.00 dB										

Mode 2: IEEE 802.11b Continuous TX mode_ANT-3

2412 MHz	
2437 MHz	
2462 MHz	

Mode 3: IEEE 802.11g Continuous TX mode_ANT-3

2412 MHz






2437 MHz






2462 MHz



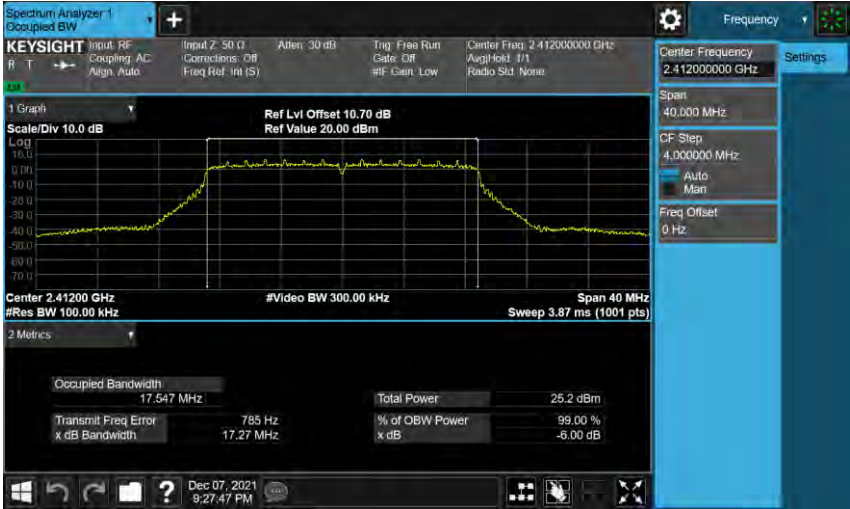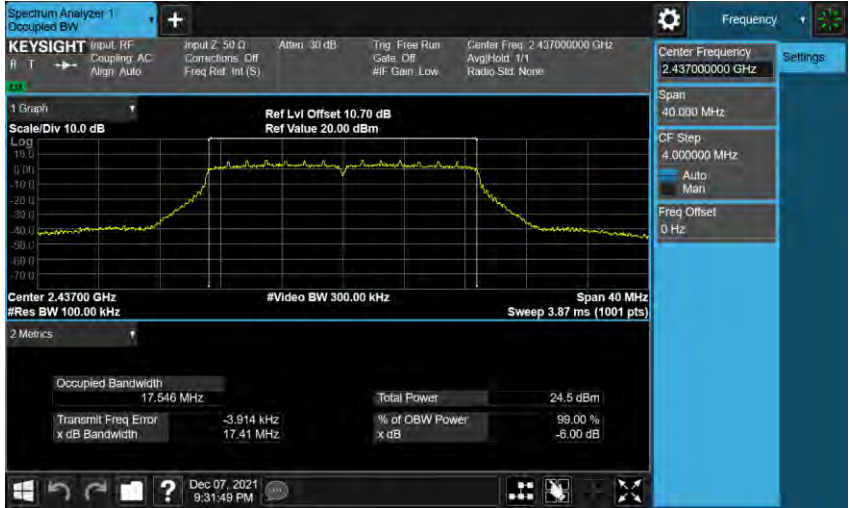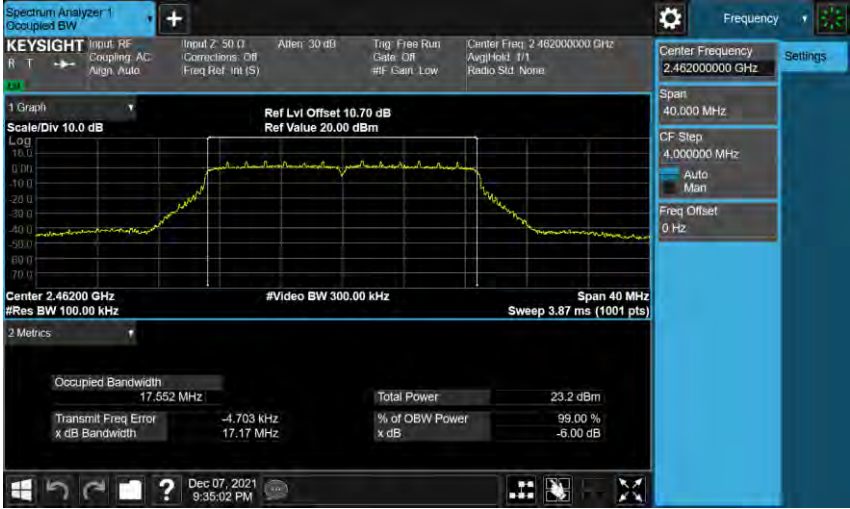Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX mode_ANT-3

2412 MHz	 Center Frequency: 2.41200000 GHz Span: 40.000 MHz CF Step: 4.000000 MHz Auto Man Freq Offset: 0 Hz Center: 2.41200 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 40 MHz Sweep 3.87 ms (1001 pts) 2 Metrics Occupied Bandwidth: 17.547 MHz Total Power: 25.2 dBm Transmit Freq Error: 785 Hz % of OBW Power: 99.00 % x dB Bandwidth: 17.27 MHz x dB: -6.00 dB Dec 07, 2021 9:27:47 PM
2437 MHz	 Center Frequency: 2.43700000 GHz Span: 40.000 MHz CF Step: 4.000000 MHz Auto Man Freq Offset: 0 Hz Center: 2.43700 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 40 MHz Sweep 3.87 ms (1001 pts) 2 Metrics Occupied Bandwidth: 17.546 MHz Total Power: 24.5 dBm Transmit Freq Error: -3.914 kHz % of OBW Power: 99.00 % x dB Bandwidth: 17.41 MHz x dB: -6.00 dB Dec 07, 2021 9:31:49 PM
2462 MHz	 Center Frequency: 2.46200000 GHz Span: 40.000 MHz CF Step: 4.000000 MHz Auto Man Freq Offset: 0 Hz Center: 2.46200 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 40 MHz Sweep 3.87 ms (1001 pts) 2 Metrics Occupied Bandwidth: 17.552 MHz Total Power: 23.2 dBm Transmit Freq Error: -4.703 kHz % of OBW Power: 99.00 % x dB Bandwidth: 17.17 MHz x dB: -6.00 dB Dec 07, 2021 9:35:02 PM

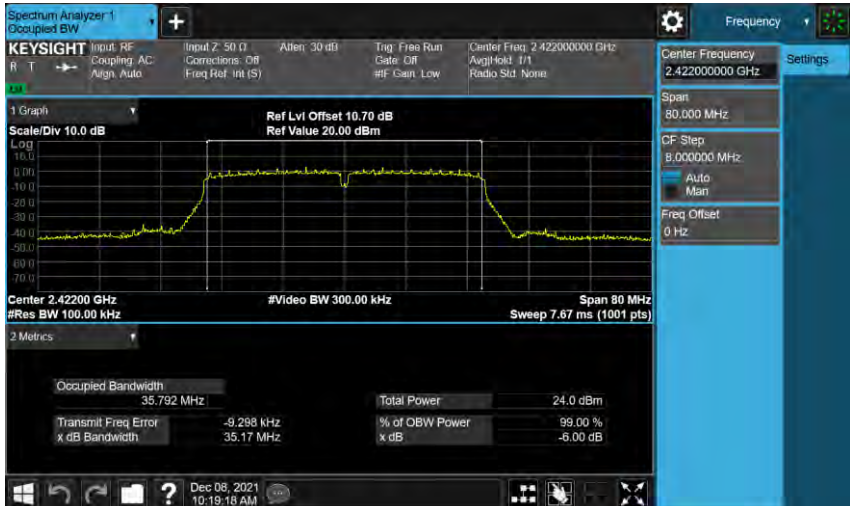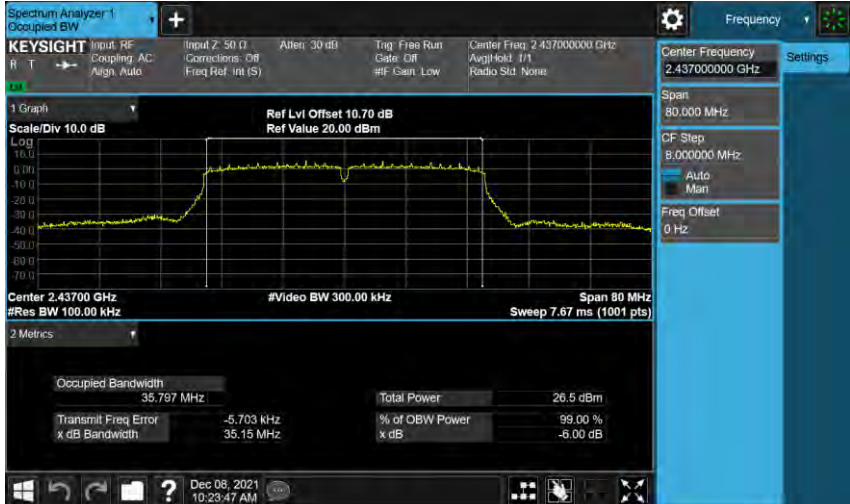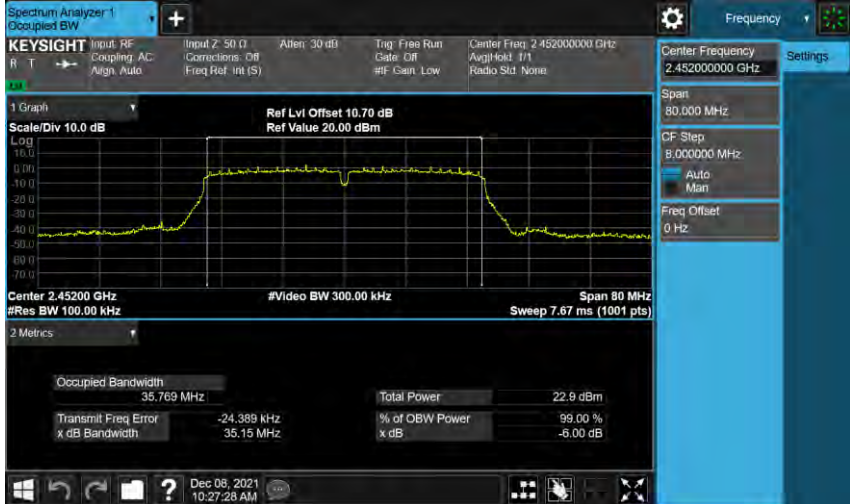Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX mode_ANT-3


2422 MHz	 Center 2.42200 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 80 MHz Sweep 7.67 ms (1001 pts) 2 Metrics <table><tr><td>Occupied Bandwidth</td><td>35.792 MHz</td><td>Total Power</td><td>24.0 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-9.298 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>35.17 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table> Dec 08, 2021 10:19:18 AM	Occupied Bandwidth	35.792 MHz	Total Power	24.0 dBm	Transmit Freq Error	-9.298 kHz	% of OBW Power	99.00 %	x dB Bandwidth	35.17 MHz	x dB	-6.00 dB
Occupied Bandwidth	35.792 MHz	Total Power	24.0 dBm										
Transmit Freq Error	-9.298 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	35.17 MHz	x dB	-6.00 dB										
2437 MHz	 Center 2.43700 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 80 MHz Sweep 7.67 ms (1001 pts) 2 Metrics <table><tr><td>Occupied Bandwidth</td><td>35.797 MHz</td><td>Total Power</td><td>26.5 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-5.703 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>35.15 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table> Dec 08, 2021 10:23:47 AM	Occupied Bandwidth	35.797 MHz	Total Power	26.5 dBm	Transmit Freq Error	-5.703 kHz	% of OBW Power	99.00 %	x dB Bandwidth	35.15 MHz	x dB	-6.00 dB
Occupied Bandwidth	35.797 MHz	Total Power	26.5 dBm										
Transmit Freq Error	-5.703 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	35.15 MHz	x dB	-6.00 dB										
2452 MHz	 Center 2.45200 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 80 MHz Sweep 7.67 ms (1001 pts) 2 Metrics <table><tr><td>Occupied Bandwidth</td><td>35.769 MHz</td><td>Total Power</td><td>22.9 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-24.389 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>35.15 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table> Dec 08, 2021 10:27:28 AM	Occupied Bandwidth	35.769 MHz	Total Power	22.9 dBm	Transmit Freq Error	-24.389 kHz	% of OBW Power	99.00 %	x dB Bandwidth	35.15 MHz	x dB	-6.00 dB
Occupied Bandwidth	35.769 MHz	Total Power	22.9 dBm										
Transmit Freq Error	-24.389 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	35.15 MHz	x dB	-6.00 dB										

Maximum Power Spectral Density Measurement



Test Mode	Frequency (MHz)	Measurement Results (dBm/3 kHz)					Limit (dBm/3 kHz)
		ANT-0	ANT-1	ANT-2	ANT-3	ANT-0+1+2+3	
Mode 2	2412	-4.320	-3.960	-2.690	-3.310	2.496	≤ 4.88
	2437	-3.840	-4.310	-3.880	-3.180	2.237	≤ 4.88
	2462	-4.420	-3.840	-3.530	-2.980	2.359	≤ 4.88
Mode 3	2412	-7.030	-7.210	-7.650	-6.450	-1.043	≤ 4.88
	2437	-8.590	-6.360	-8.260	-7.480	-1.565	≤ 4.88
	2462	-7.090	-8.560	-8.440	-7.050	-1.706	≤ 4.88
Mode 6	2412	-8.790	-8.450	-8.950	-9.120	-2.800	≤ 8.00
	2437	-10.370	-9.640	-10.040	-9.500	-3.854	≤ 8.00
	2462	-10.700	-10.360	-10.640	-11.220	-4.698	≤ 8.00
Mode 7	2422	-12.020	-12.340	-11.940	-12.730	-6.226	≤ 8.00
	2437	-10.740	-10.080	-8.340	-10.360	-3.756	≤ 8.00
	2452	-13.270	-13.280	-13.640	-13.190	-7.321	≤ 8.00

■ Test Graphs

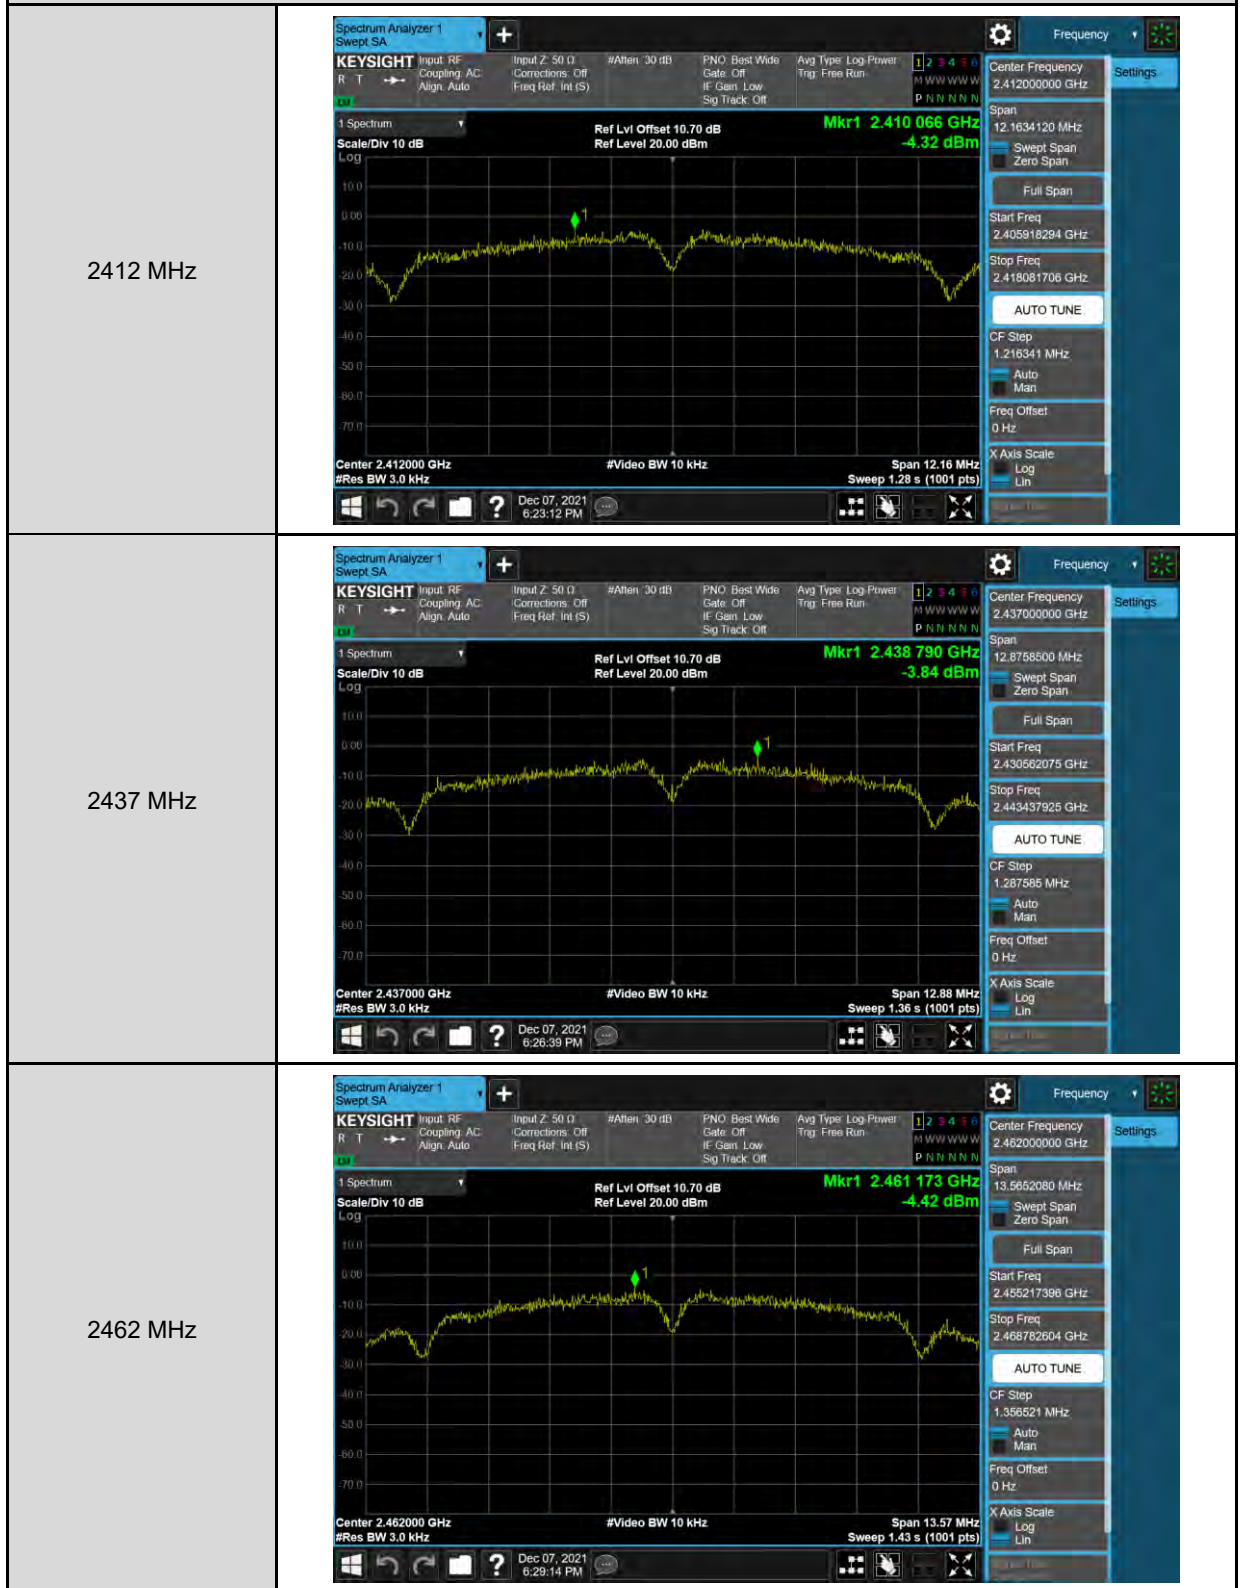
Mode 2: IEEE 802.11b Continuous TX mode_ANT-0




Mode 3: IEEE 802.11g Continuous TX mode_ANT-0

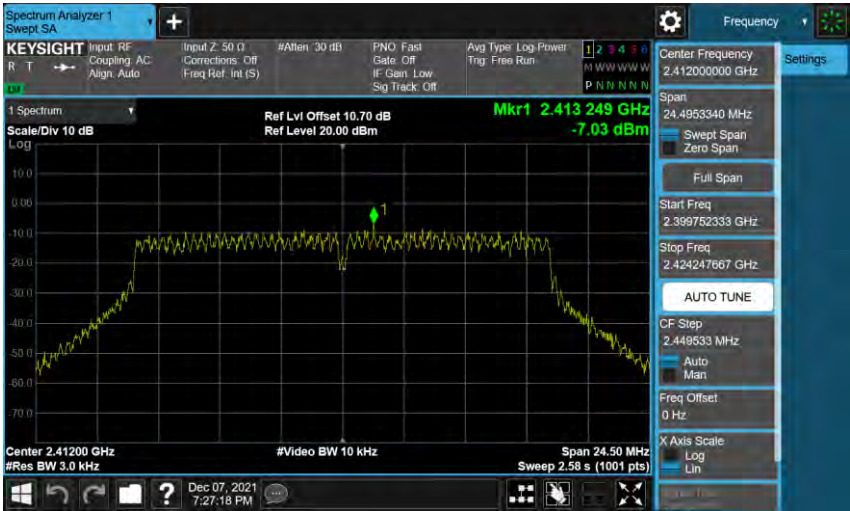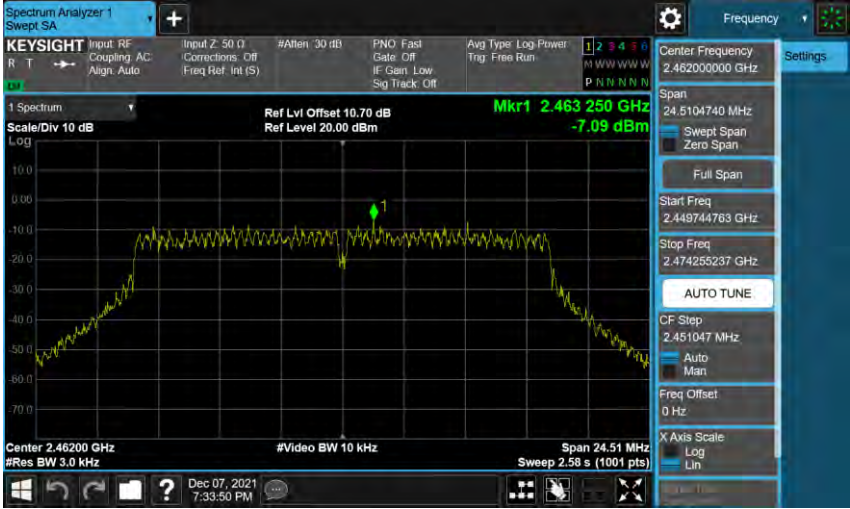2412 MHz	
2437 MHz	
2462 MHz	

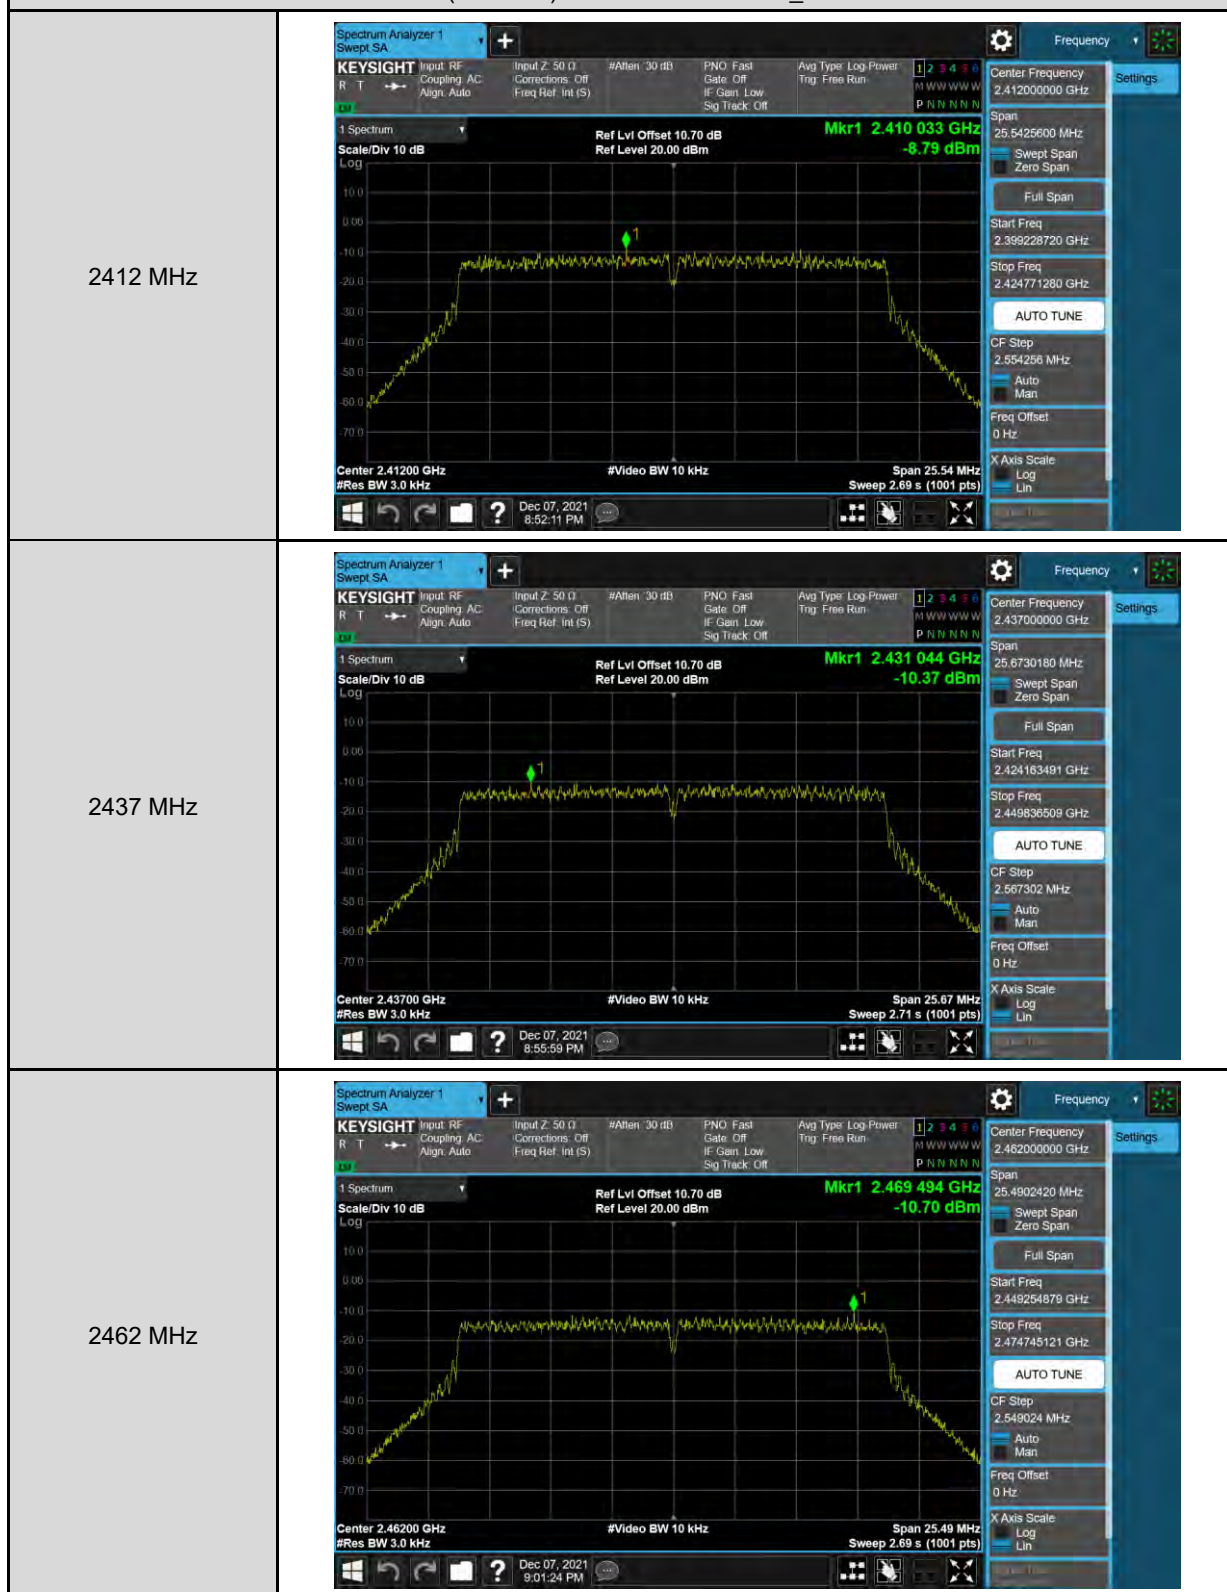
Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX mode_ANT-0




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX mode_ANT-0

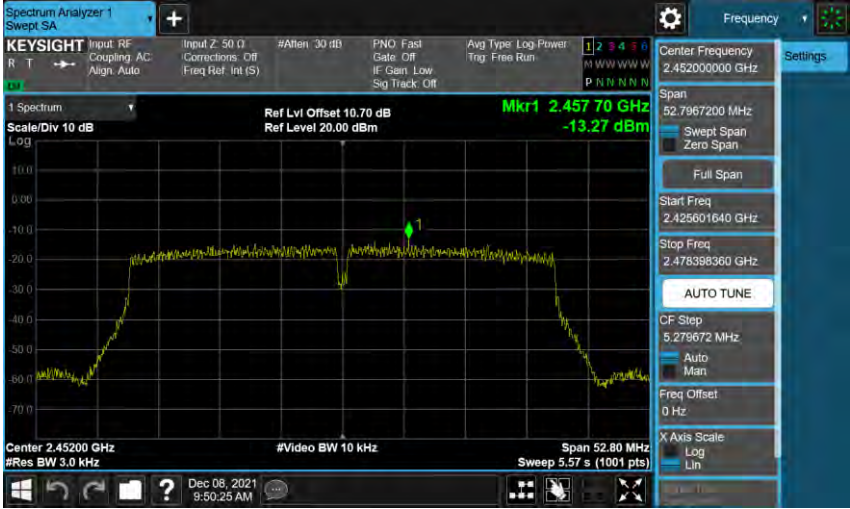2422 MHz	
2437 MHz	
2452 MHz	



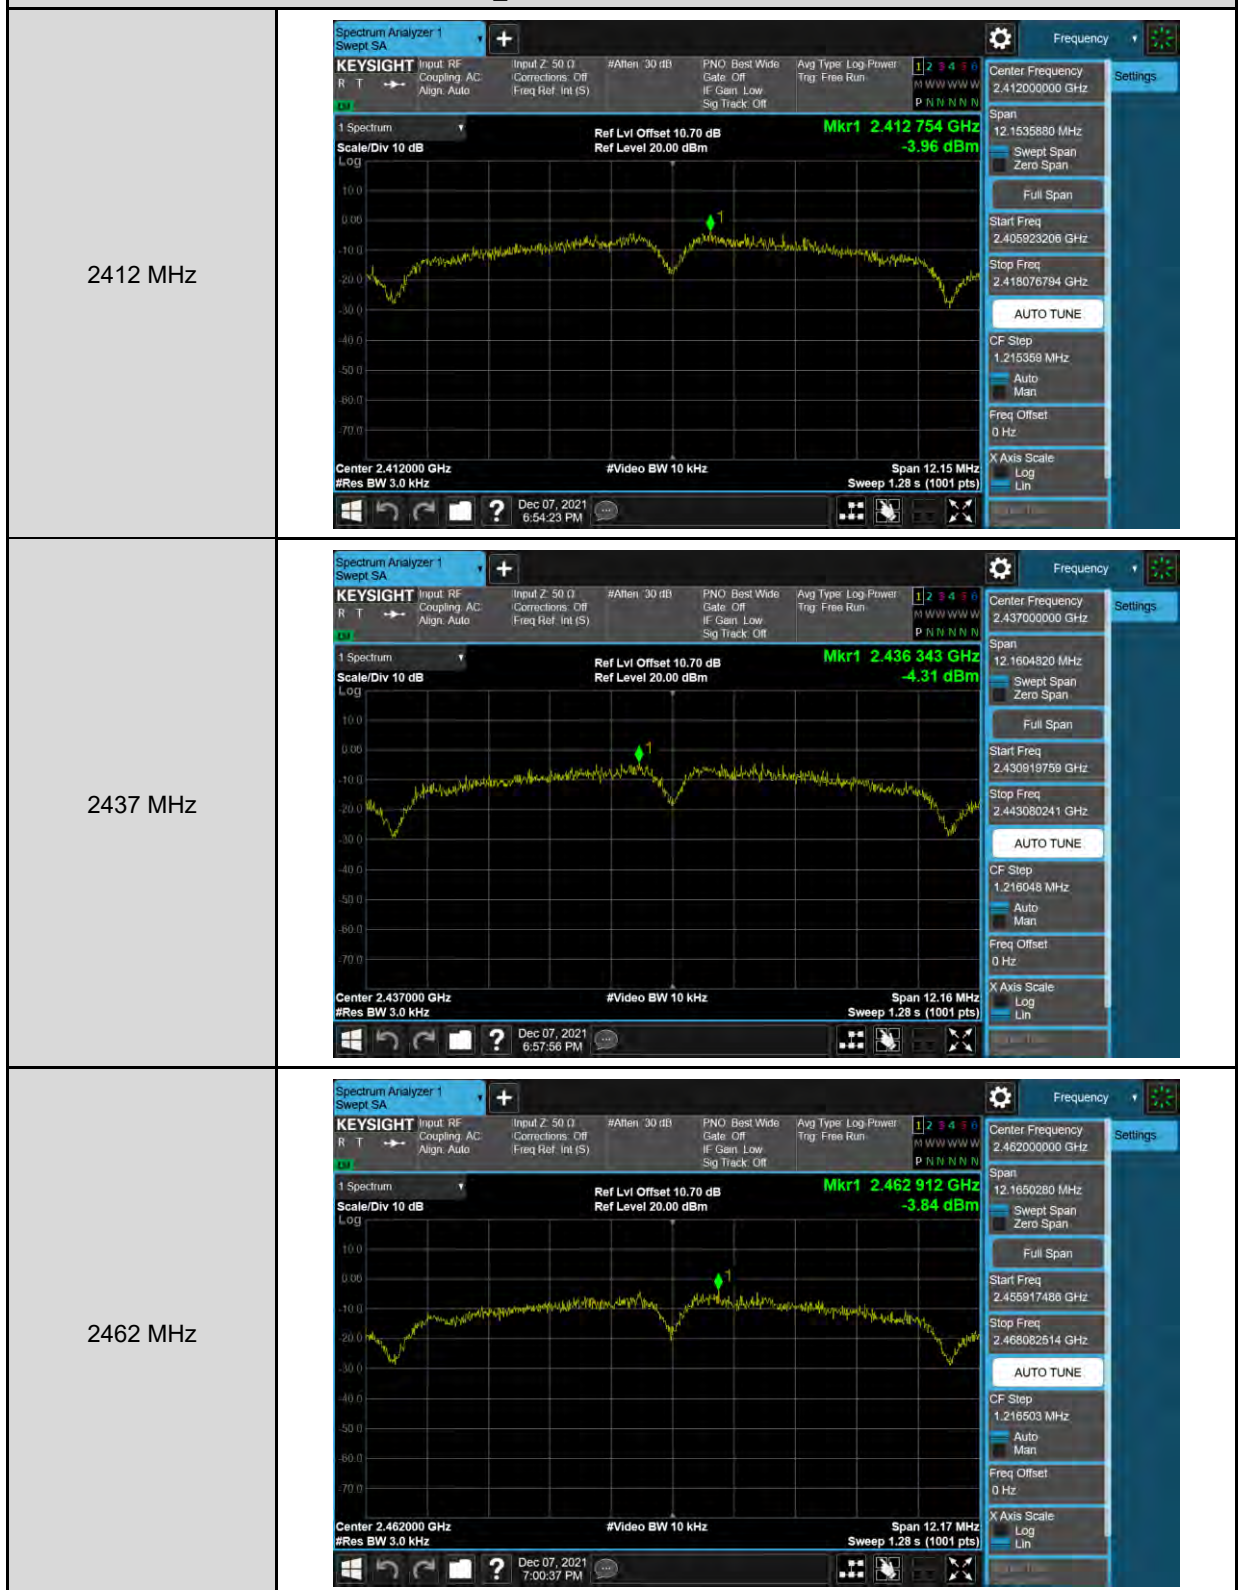
Mode 2: IEEE 802.11b Continuous TX mode_ANT-1





Mode 3: IEEE 802.11g Continuous TX mode_ANT-1

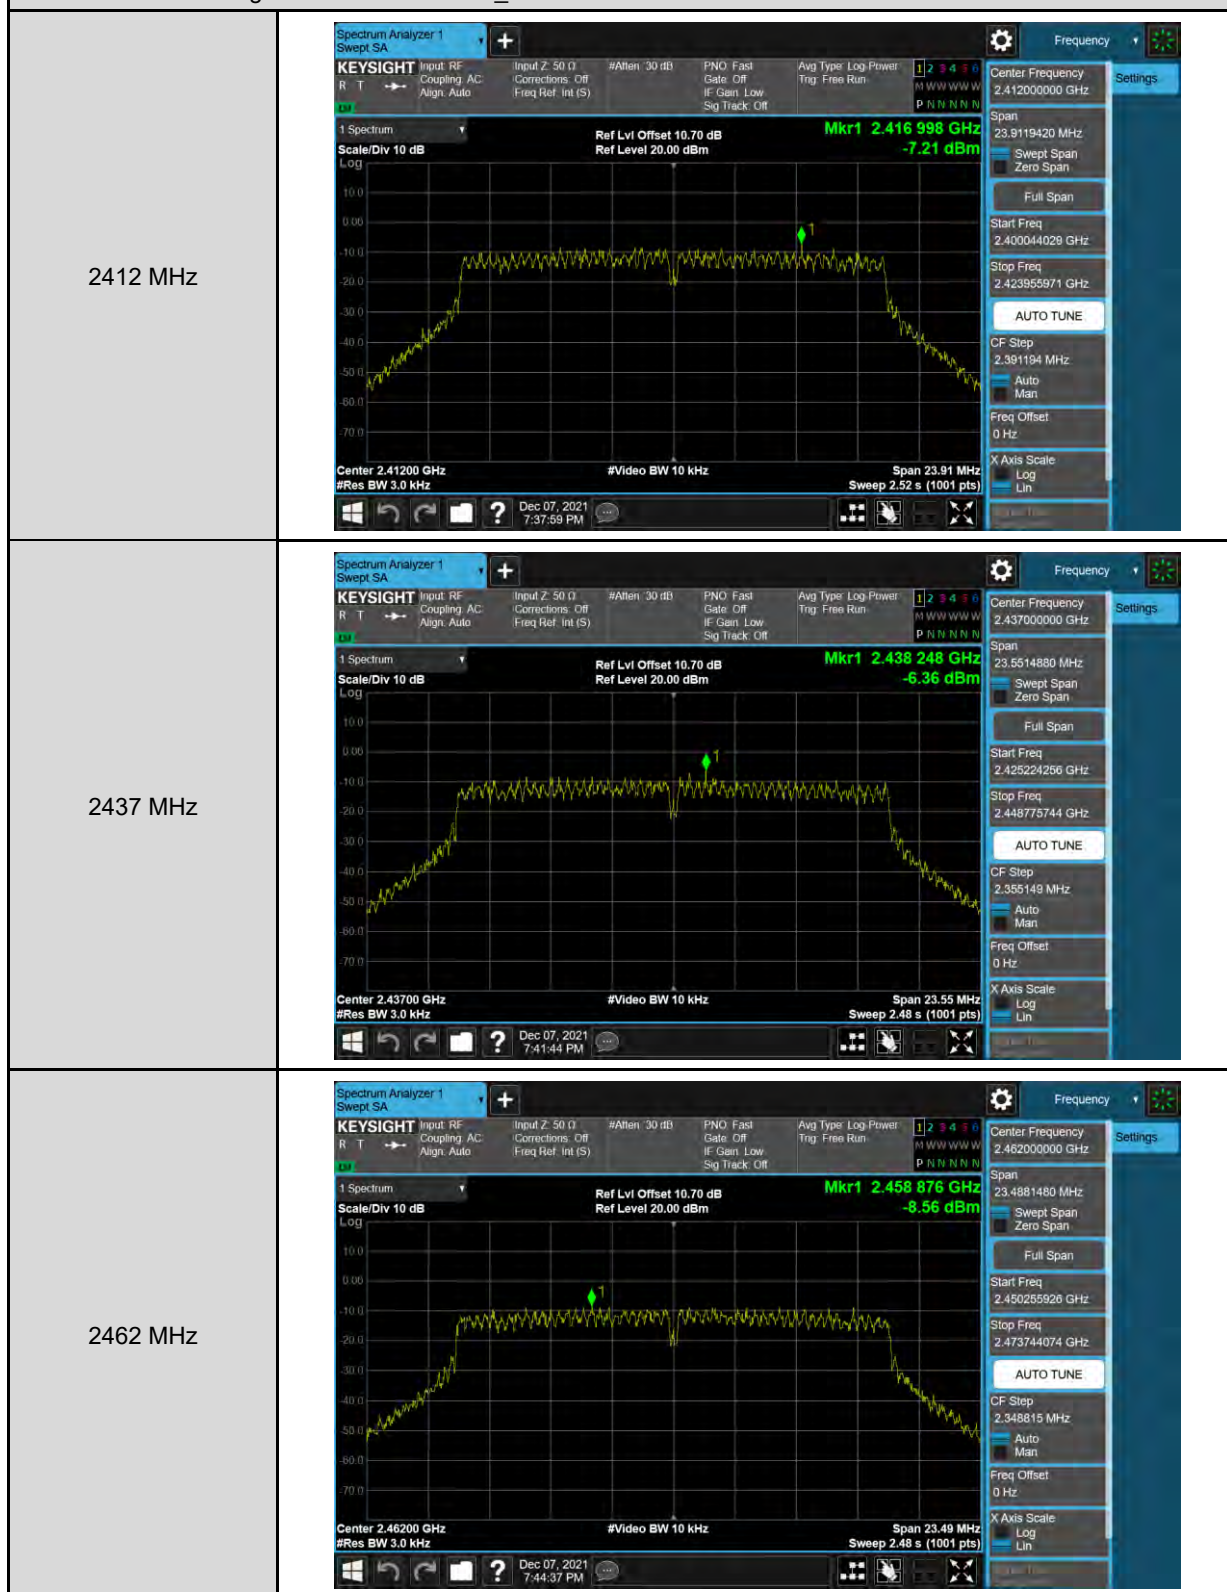



Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX mode_ANT-1

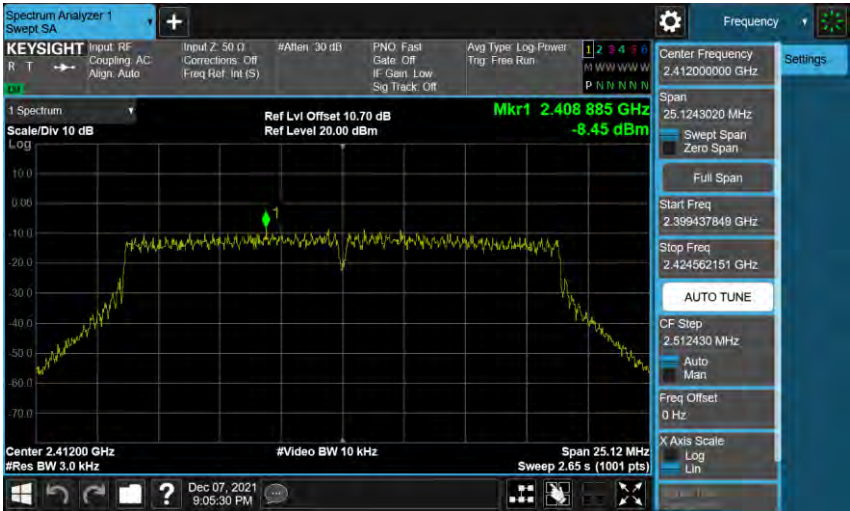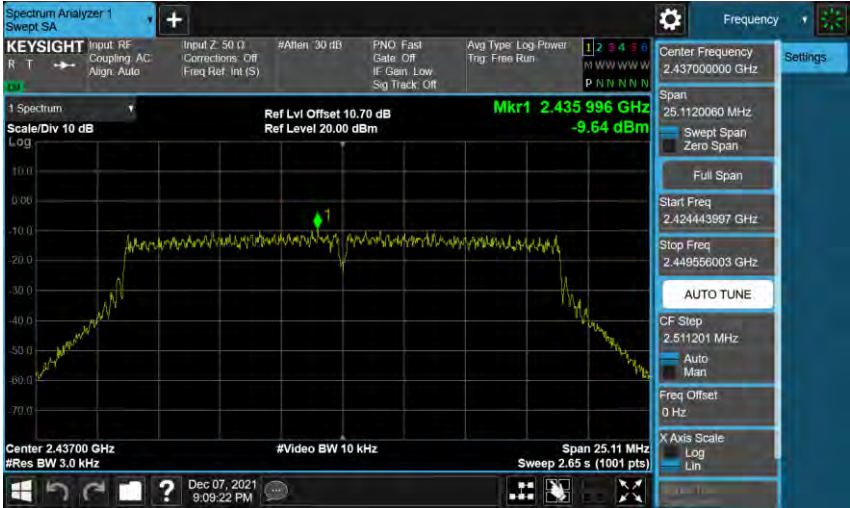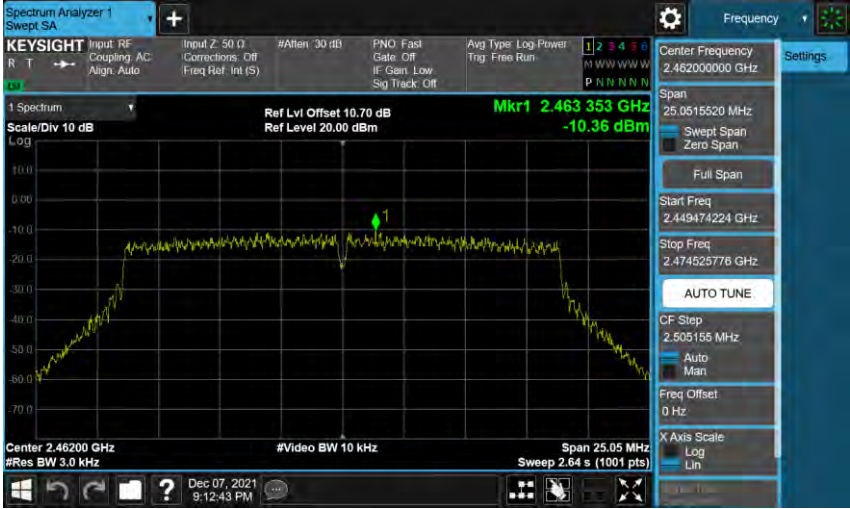2412 MHz	
2437 MHz	
2462 MHz	


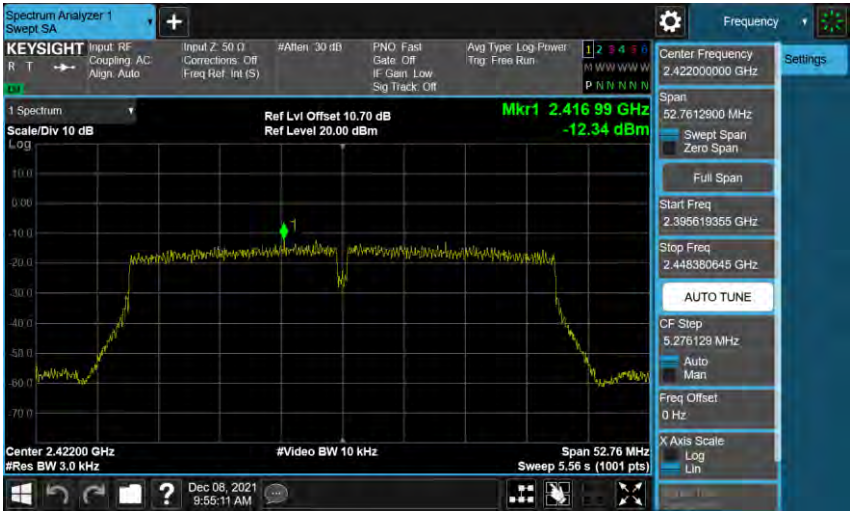
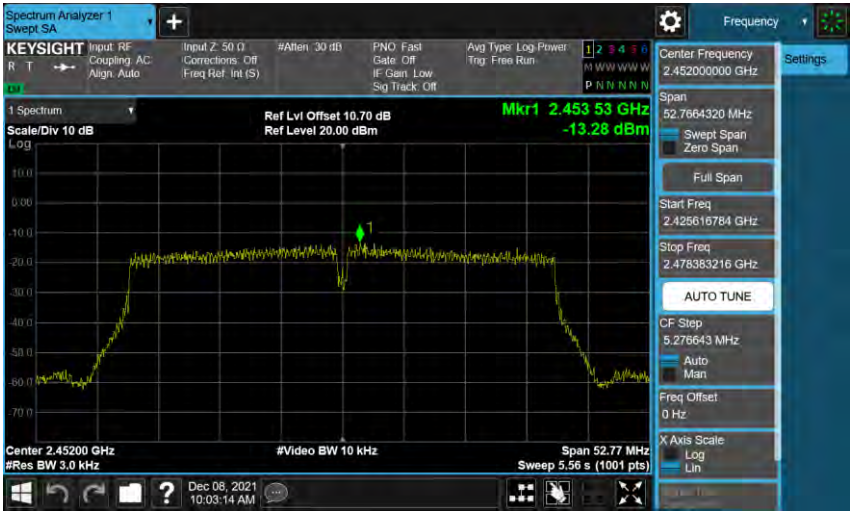
Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX mode_ANT-1

2422 MHz	
2437 MHz	
2452 MHz	

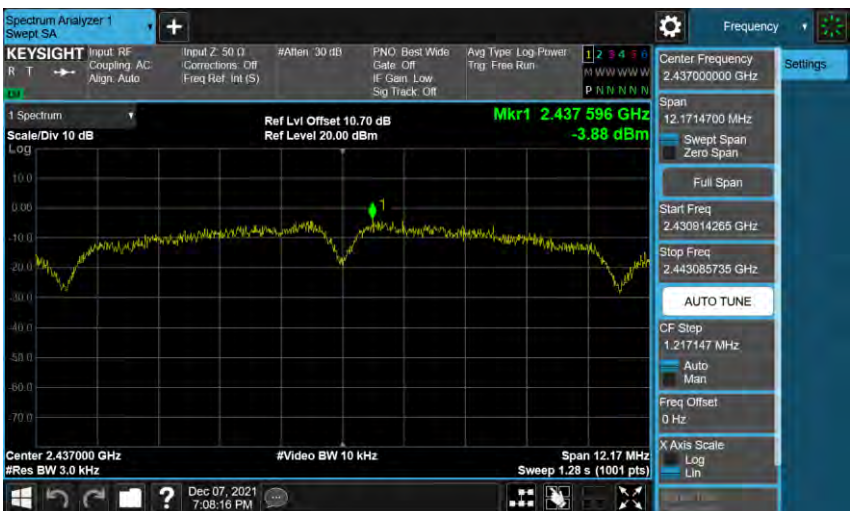
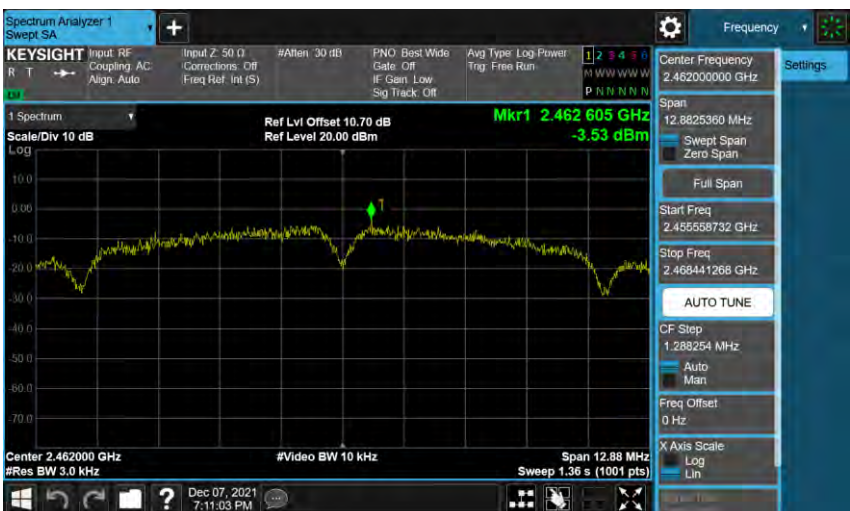
Mode 2: IEEE 802.11b Continuous TX mode_ANT-2

2412 MHz	
2437 MHz	
2462 MHz	

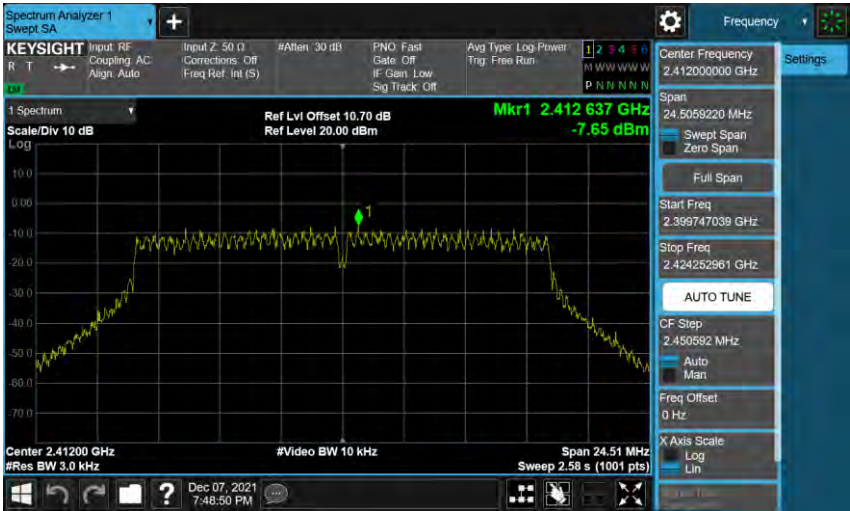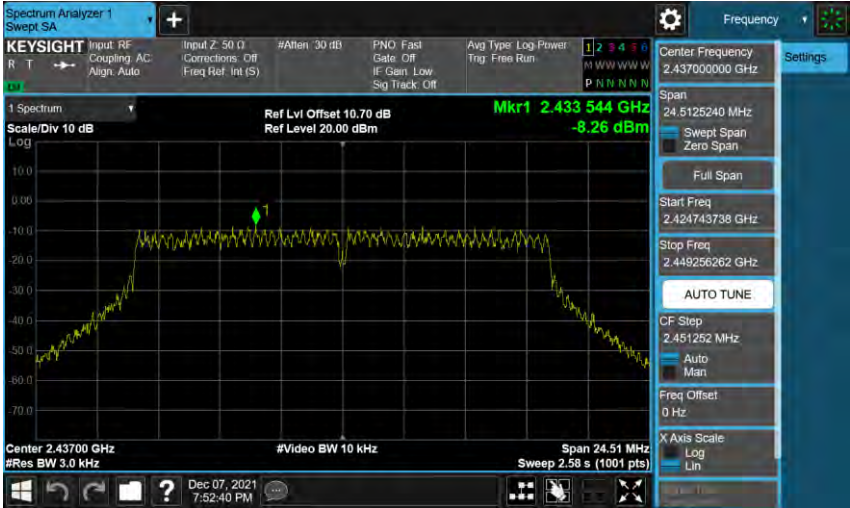
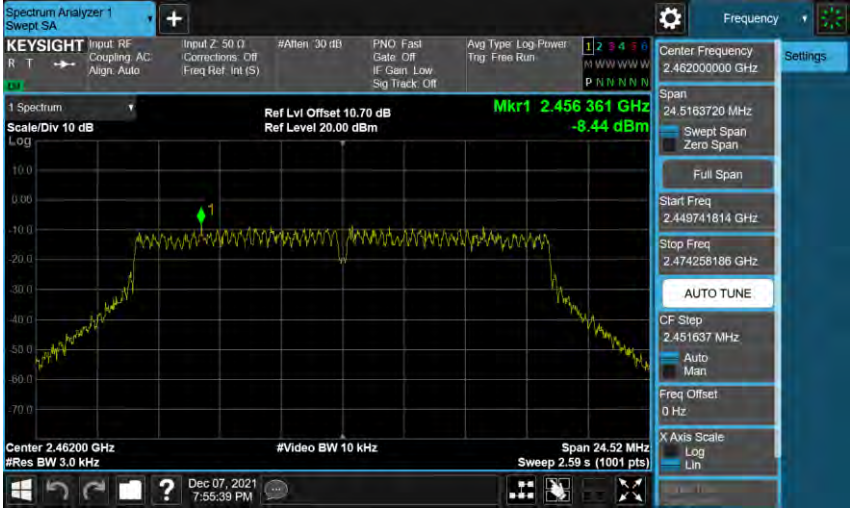
Mode 3: IEEE 802.11g Continuous TX mode_ANT-2

2412 MHz	
2437 MHz	
2462 MHz	

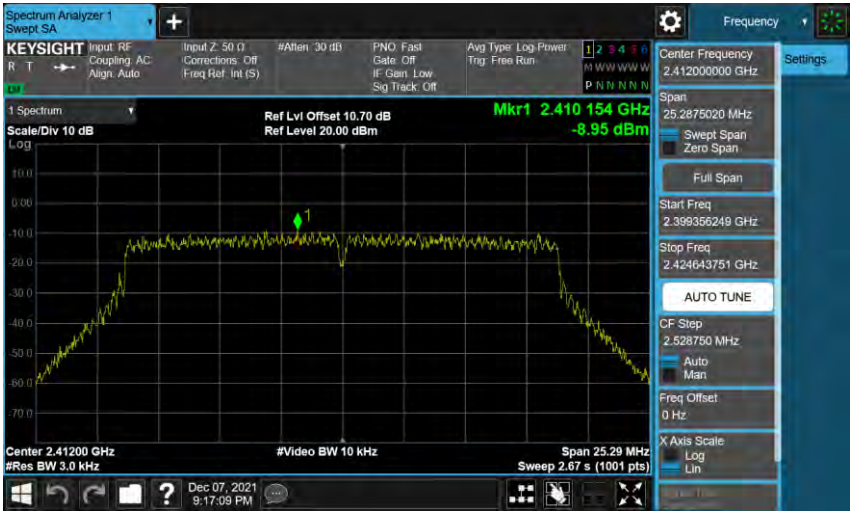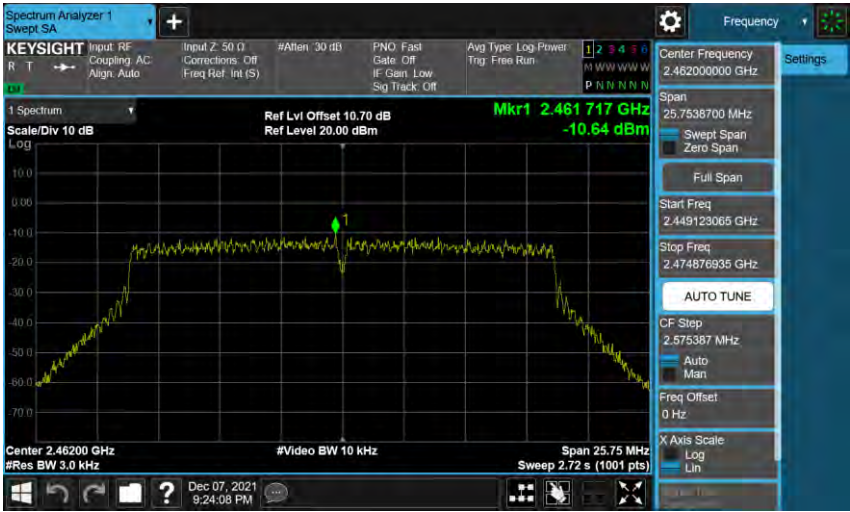
Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX mode_ANT-2

2412 MHz	
2437 MHz	
2462 MHz	


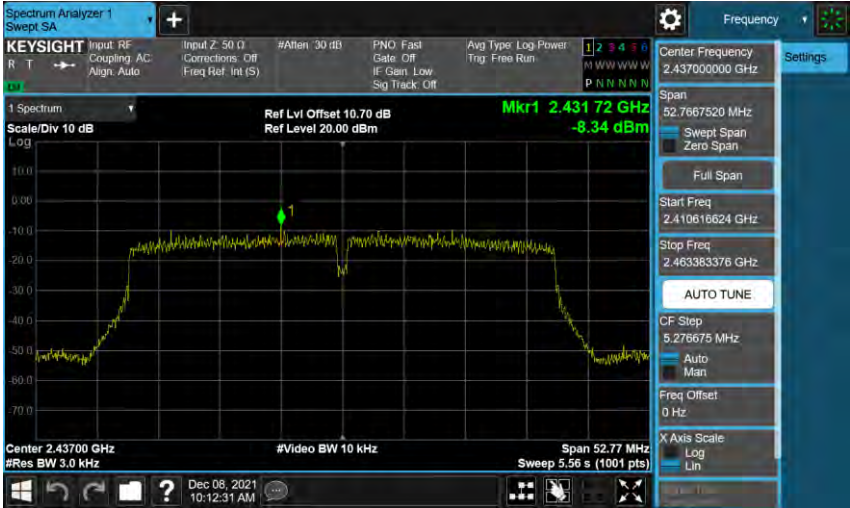
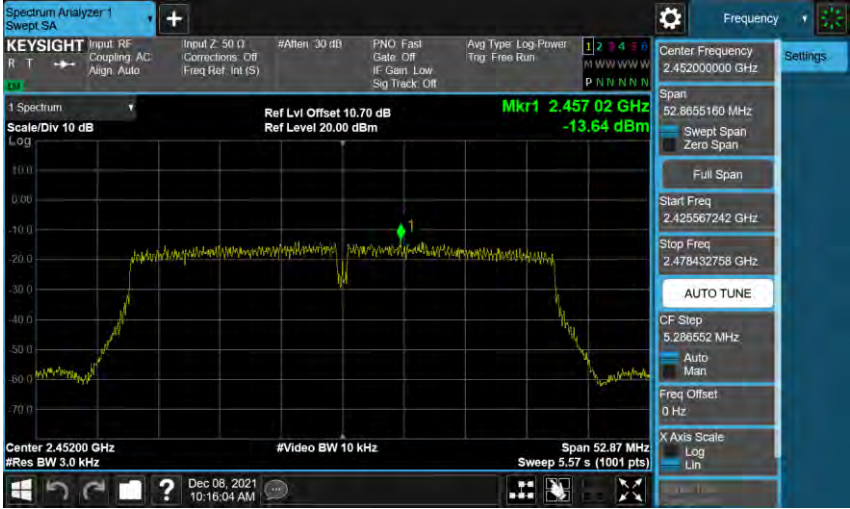
Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX mode_ANT-2

2422 MHz	
2437 MHz	
2452 MHz	



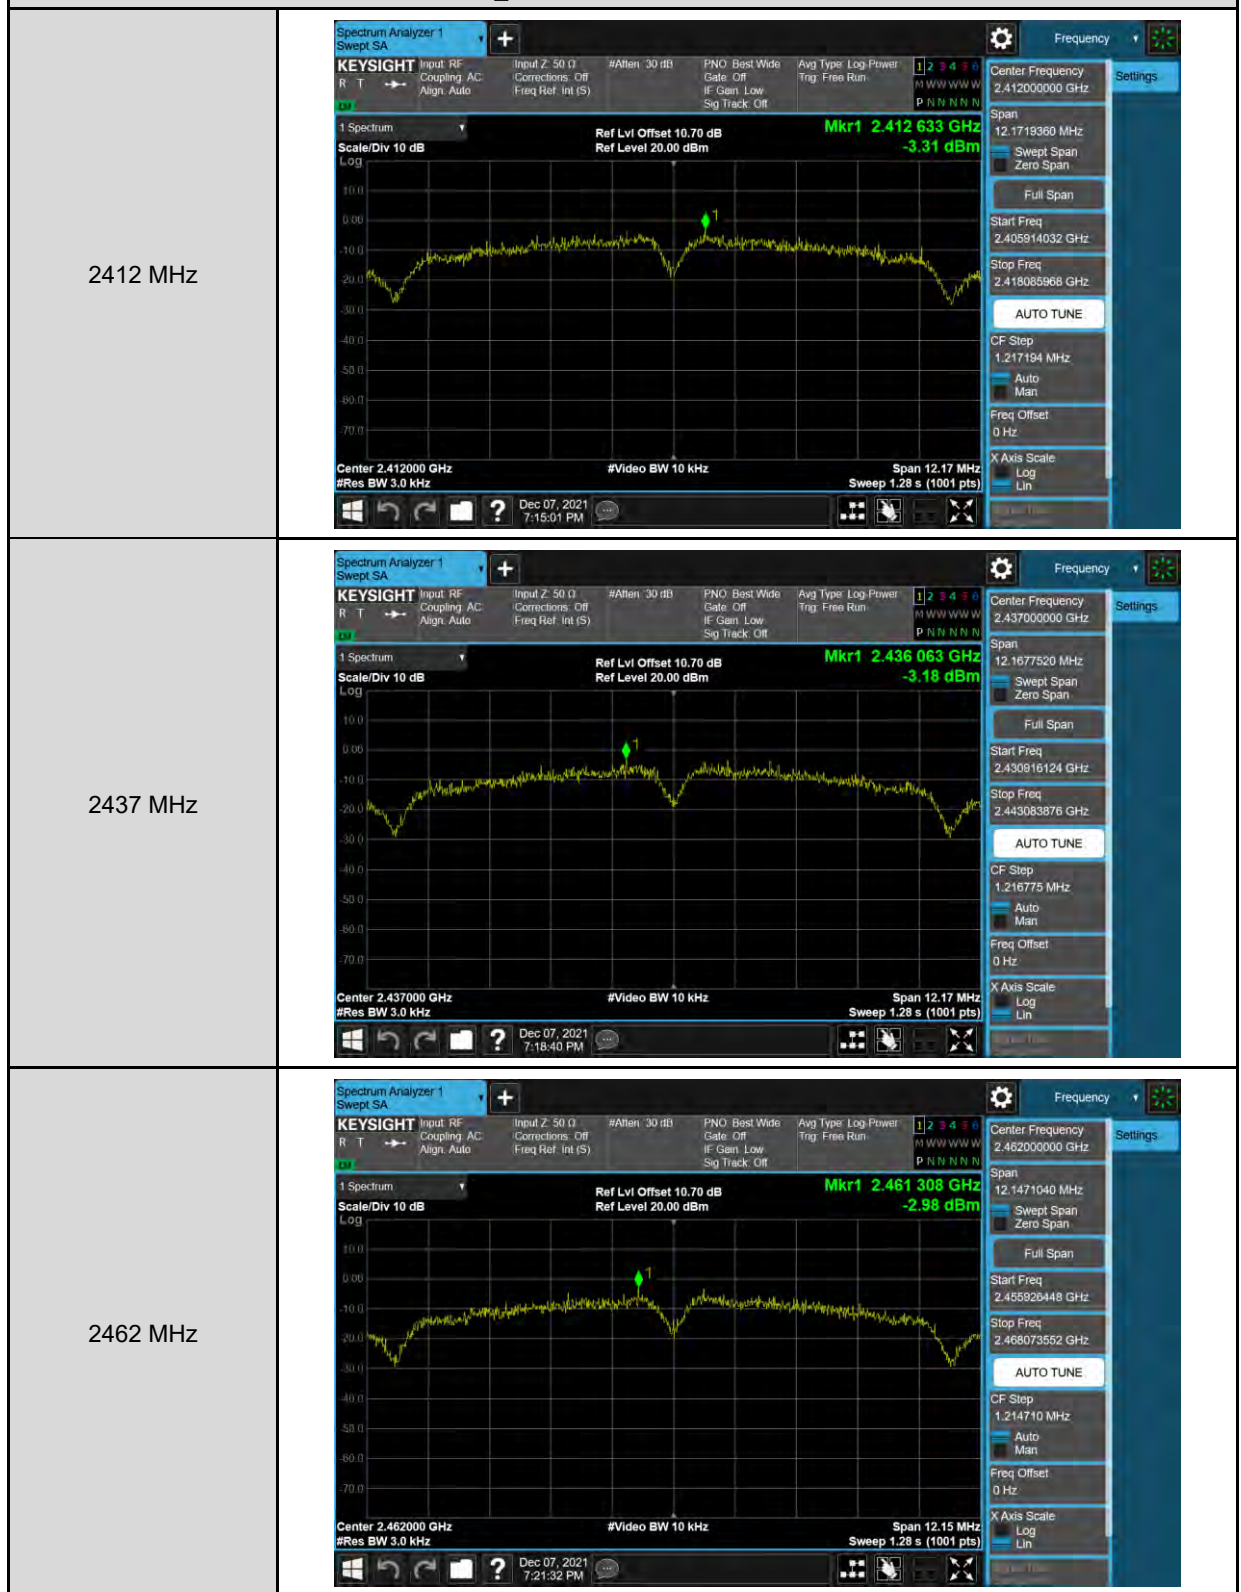
Mode 2: IEEE 802.11b Continuous TX mode_ANT-3





Mode 3: IEEE 802.11g Continuous TX mode_ANT-3

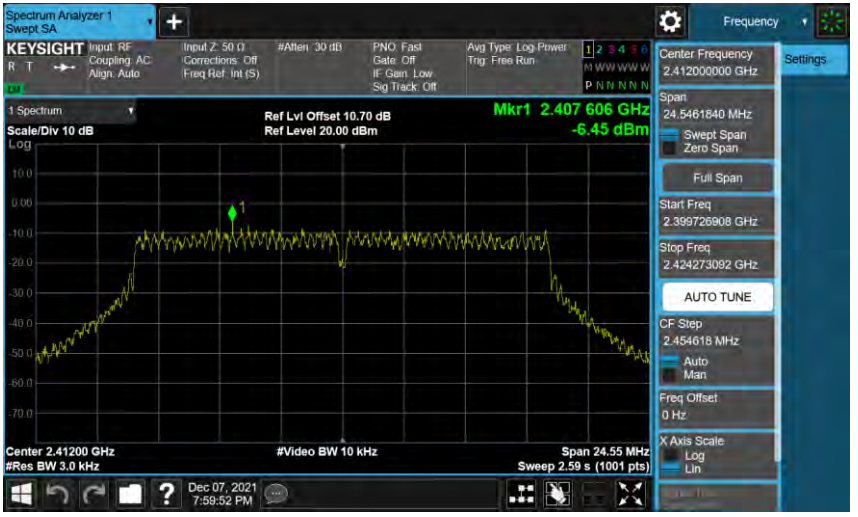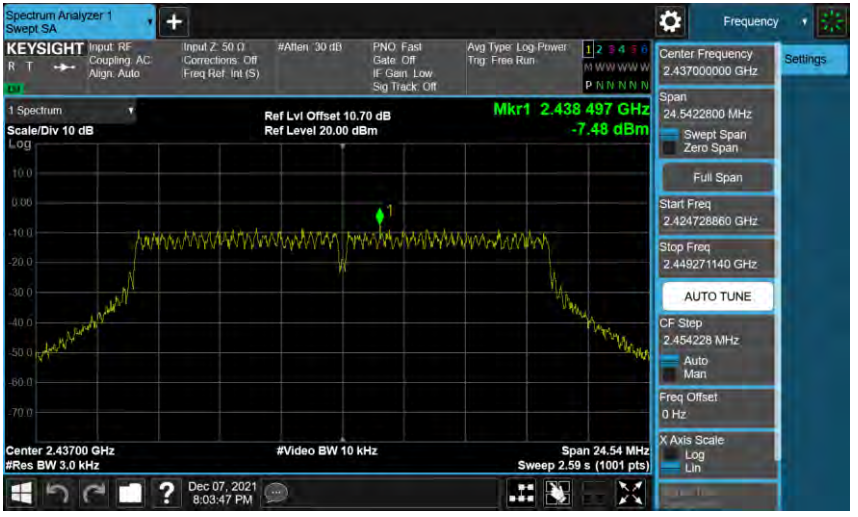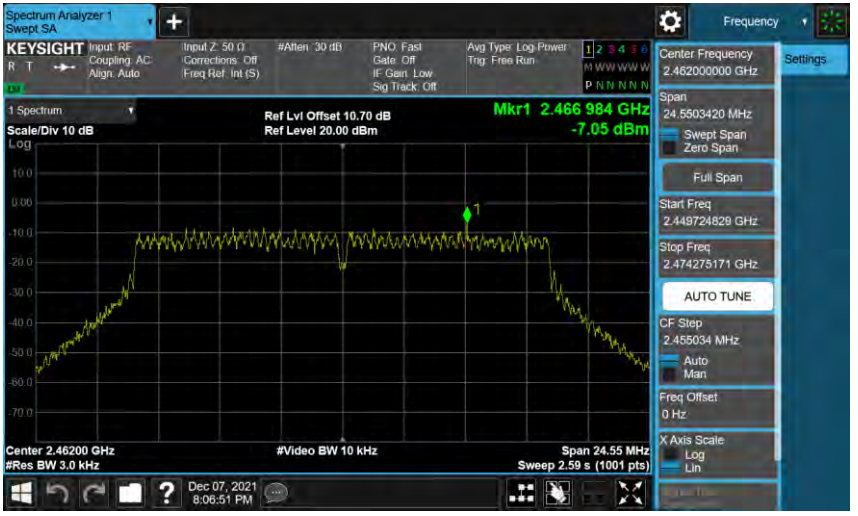2412 MHz	
2437 MHz	
2462 MHz	

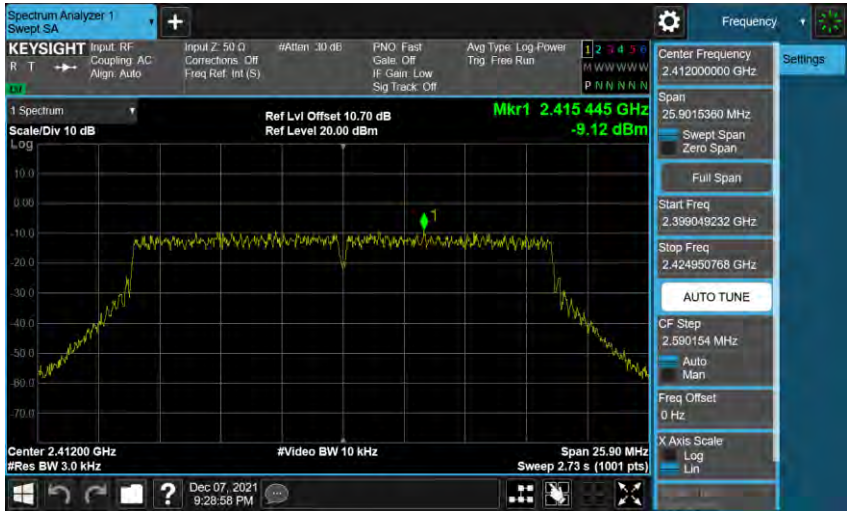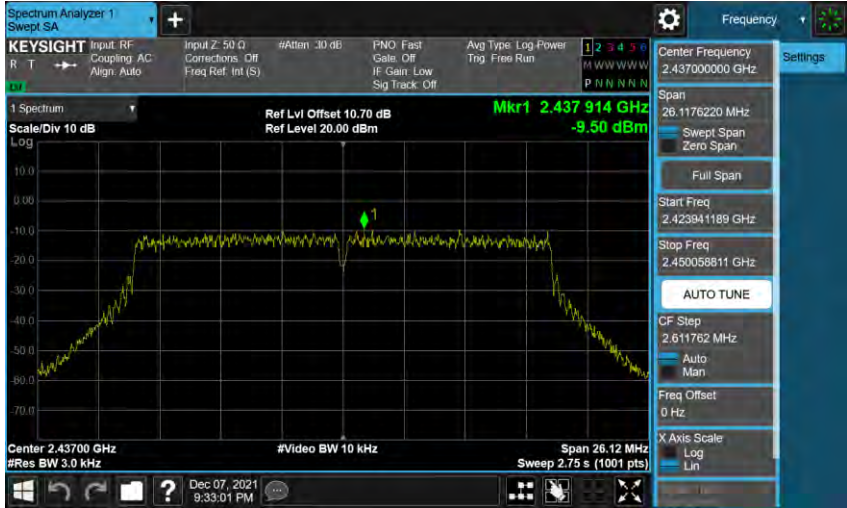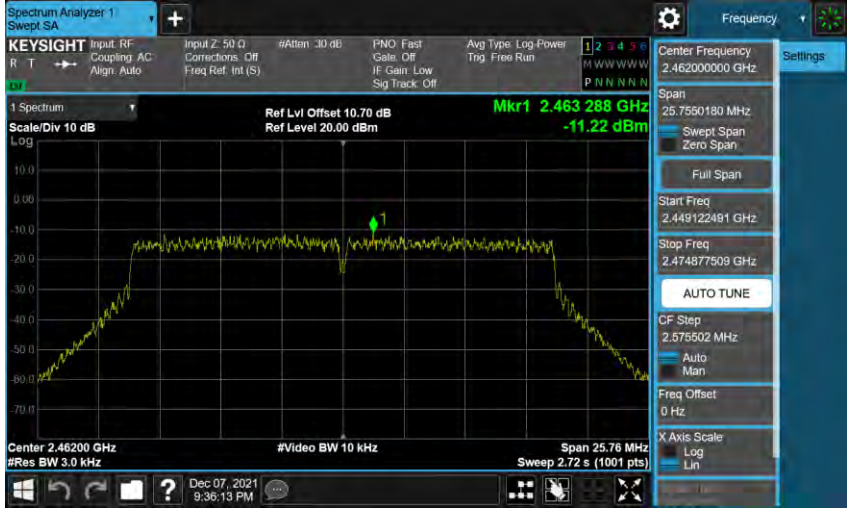Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX mode_ANT-3

2412 MHz	
2437 MHz	
2462 MHz	

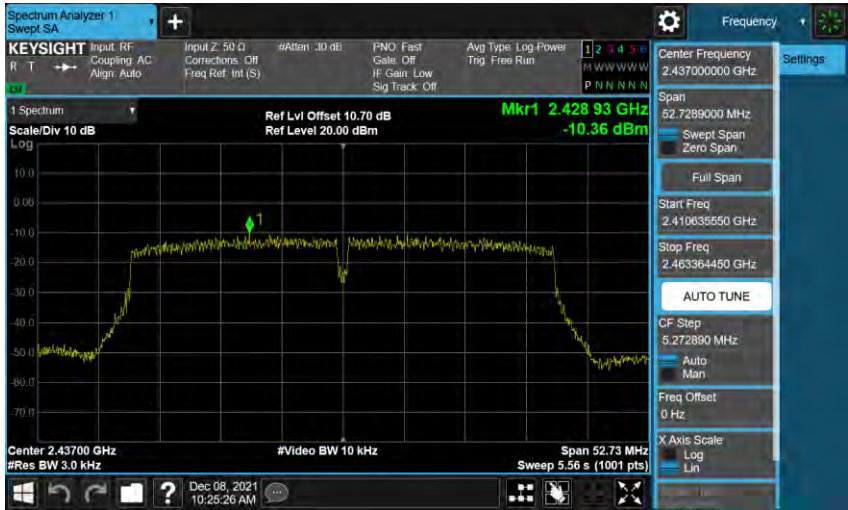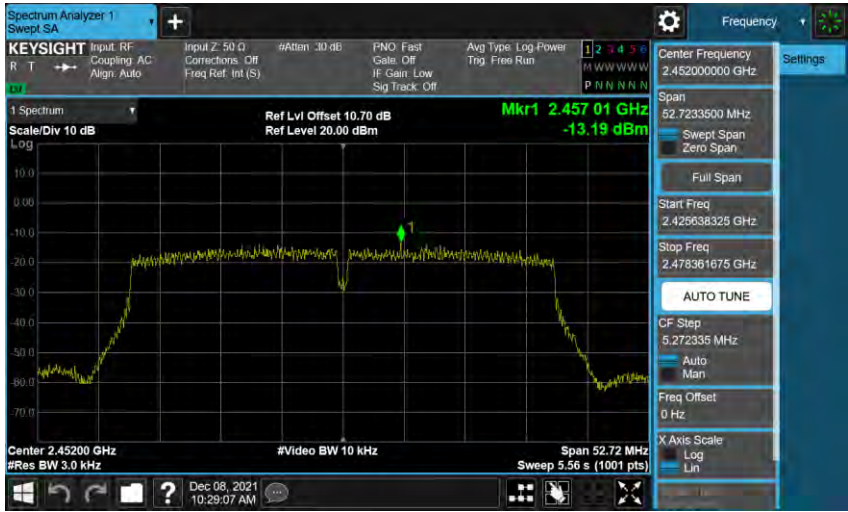Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX mode_ANT-3

2422 MHz	 Center Frequency: 2.42200000 GHz Span: 52.749250 MHz Start Freq: 2.395625374 GHz Stop Freq: 2.448374626 GHz Mkr1 2.436 45 GHz -12.73 dBm Center 2.42200 GHz #Res BW 3.0 kHz #Video BW 10 kHz Sweep 5.56 s (1001 pts)
2437 MHz	 Center Frequency: 2.43700000 GHz Span: 52.728900 MHz Start Freq: 2.410635550 GHz Stop Freq: 2.463364450 GHz Mkr1 2.428 93 GHz -10.36 dBm Center 2.43700 GHz #Res BW 3.0 kHz #Video BW 10 kHz Sweep 5.56 s (1001 pts)
2452 MHz	 Center Frequency: 2.45200000 GHz Span: 52.723350 MHz Start Freq: 2.425638325 GHz Stop Freq: 2.478361675 GHz Mkr1 2.457 01 GHz -13.19 dBm Center 2.45200 GHz #Res BW 3.0 kHz #Video BW 10 kHz Sweep 5.56 s (1001 pts)