




Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

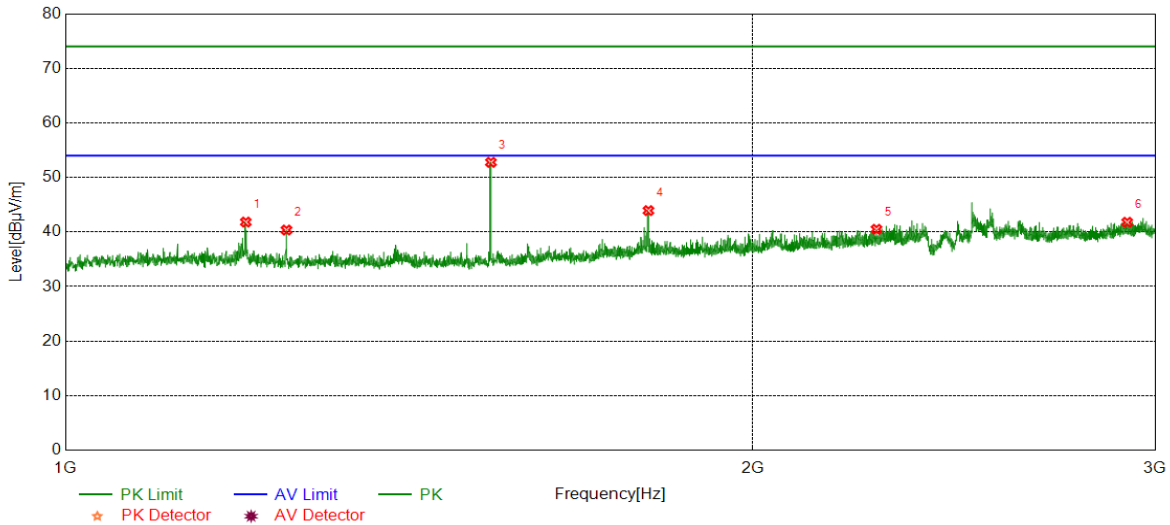


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1199.5249	47.38	-5.56	41.82	74.00	-32.18	Horizontal
2	1249.7812	46.02	-5.66	40.36	74.00	-33.64	Horizontal
3	1535.8170	58.52	-5.75	52.77	74.00	-21.23	Horizontal
4	1800.1000	47.77	-3.85	43.92	74.00	-30.08	Horizontal
5	2265.4082	42.61	-2.11	40.50	74.00	-33.50	Horizontal
6	2916.7396	41.21	0.57	41.78	74.00	-32.22	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

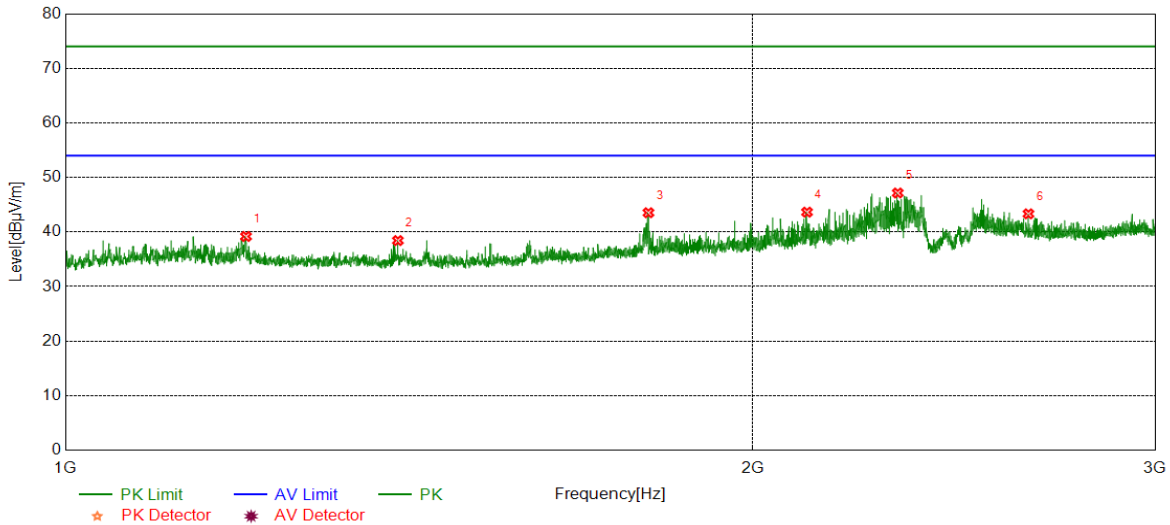


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1199.7750	44.74	-5.56	39.18	74.00	-34.82	Vertical
2	1398.2998	44.11	-5.68	38.43	74.00	-35.57	Vertical
3	1800.1000	47.38	-3.85	43.53	74.00	-30.47	Vertical
4	2112.1390	46.16	-2.52	43.64	74.00	-30.36	Vertical
5	2314.4143	48.80	-1.65	47.15	74.00	-26.85	Vertical
6	2640.4551	44.16	-0.83	43.33	74.00	-30.67	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

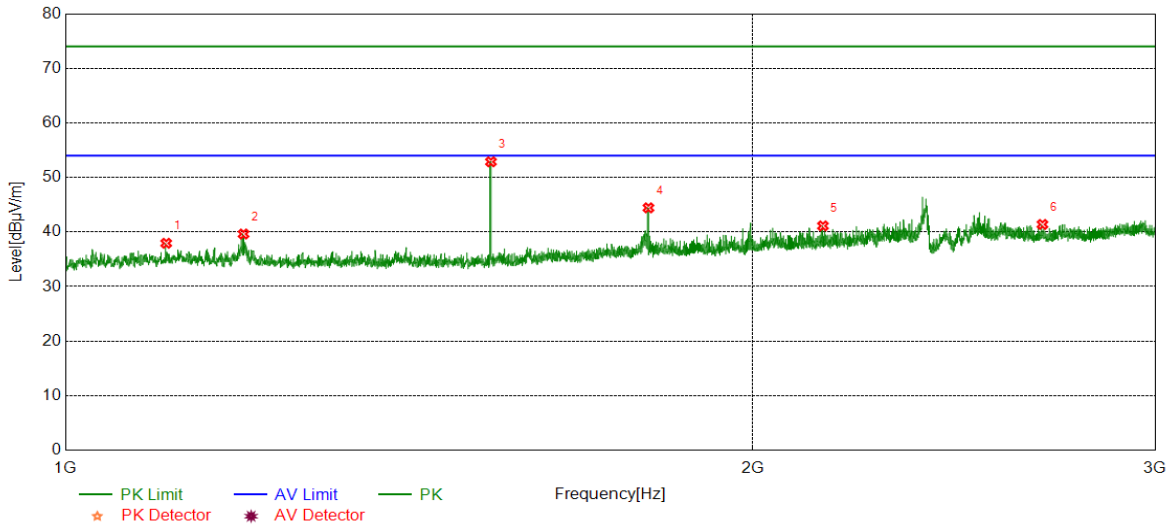


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1107.0134	43.46	-5.52	37.94	74.00	-36.06	Horizontal
2	1196.7746	45.19	-5.56	39.63	74.00	-34.37	Horizontal
3	1535.8170	58.62	-5.75	52.87	74.00	-21.13	Horizontal
4	1800.1000	48.28	-3.85	44.43	74.00	-29.57	Horizontal
5	2146.3933	43.49	-2.37	41.12	74.00	-32.88	Horizontal
6	2677.9597	42.07	-0.68	41.39	74.00	-32.61	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

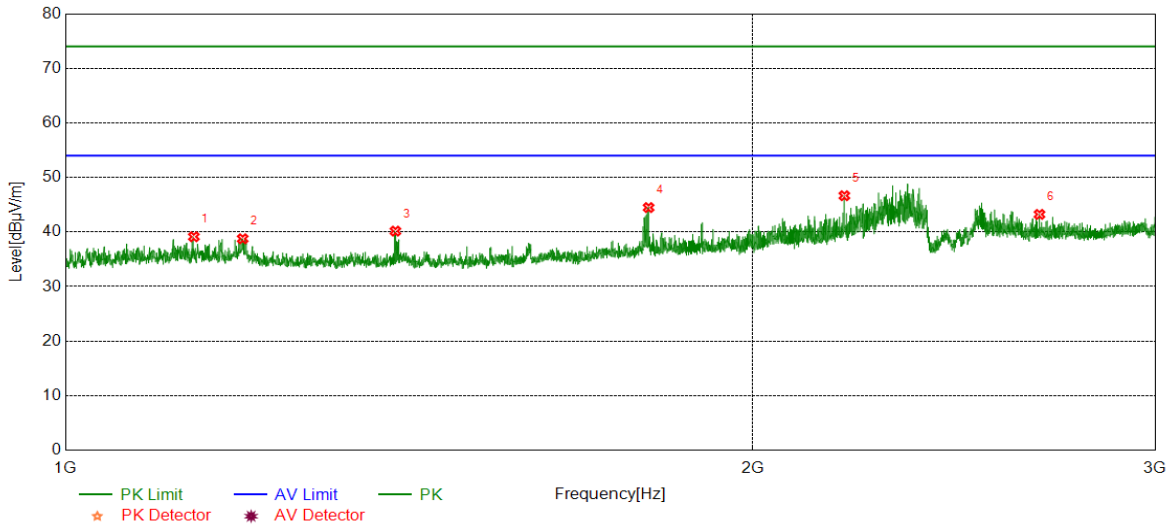


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1138.2673	44.66	-5.53	39.13	74.00	-34.87	Vertical
2	1195.7745	44.32	-5.56	38.76	74.00	-35.24	Vertical
3	1394.7994	45.88	-5.72	40.16	74.00	-33.84	Vertical
4	1800.3500	48.33	-3.85	44.48	74.00	-29.52	Vertical
5	2193.1491	48.98	-2.33	46.65	74.00	-27.35	Vertical
6	2669.9587	43.97	-0.74	43.23	74.00	-30.77	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

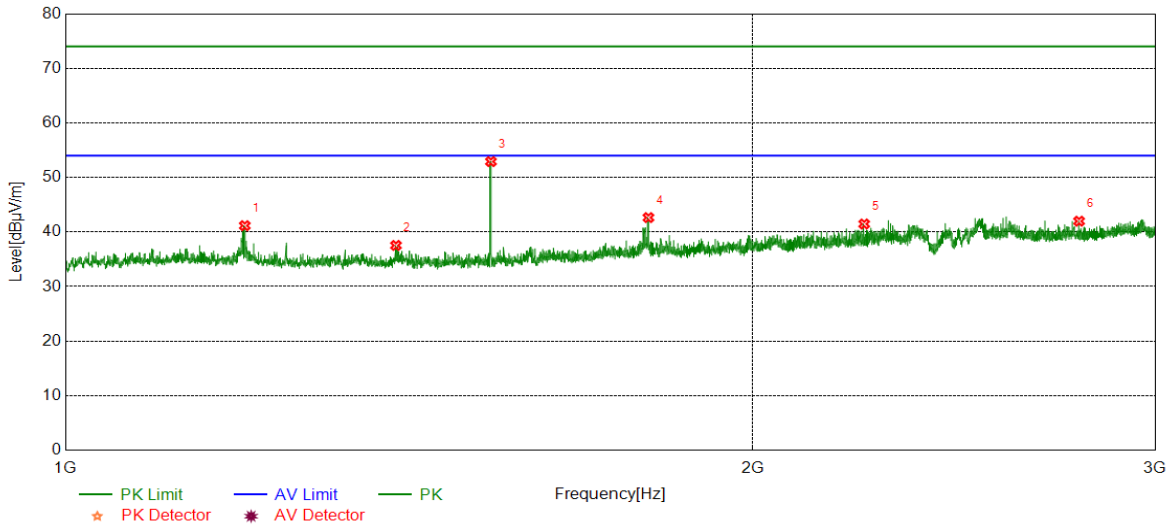


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1198.2748	46.72	-5.56	41.16	74.00	-32.84	Horizontal
2	1395.5494	43.25	-5.71	37.54	74.00	-36.46	Horizontal
3	1535.8170	58.66	-5.75	52.91	74.00	-21.09	Horizontal
4	1800.1000	46.49	-3.85	42.64	74.00	-31.36	Horizontal
5	2237.4047	43.72	-2.25	41.47	74.00	-32.53	Horizontal
6	2778.7223	42.25	-0.27	41.98	74.00	-32.02	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

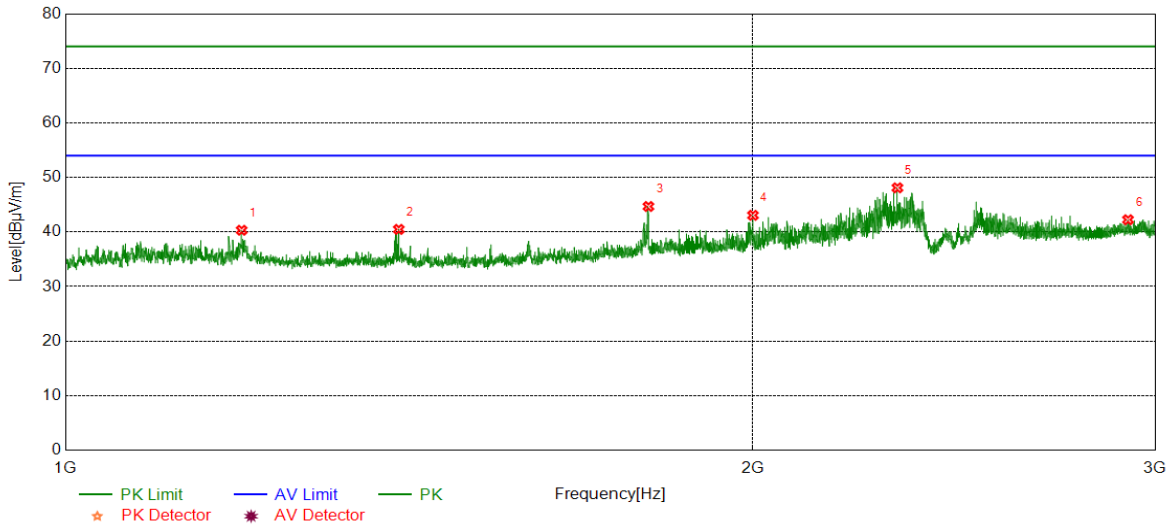


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1194.5243	45.89	-5.57	40.32	74.00	-33.68	Vertical
2	1399.5499	46.14	-5.66	40.48	74.00	-33.52	Vertical
3	1800.1000	48.53	-3.85	44.68	74.00	-29.32	Vertical
4	2000.1250	46.05	-2.99	43.06	74.00	-30.94	Vertical
5	2313.6642	49.75	-1.65	48.10	74.00	-25.90	Vertical
6	2919.2399	41.63	0.62	42.25	74.00	-31.75	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

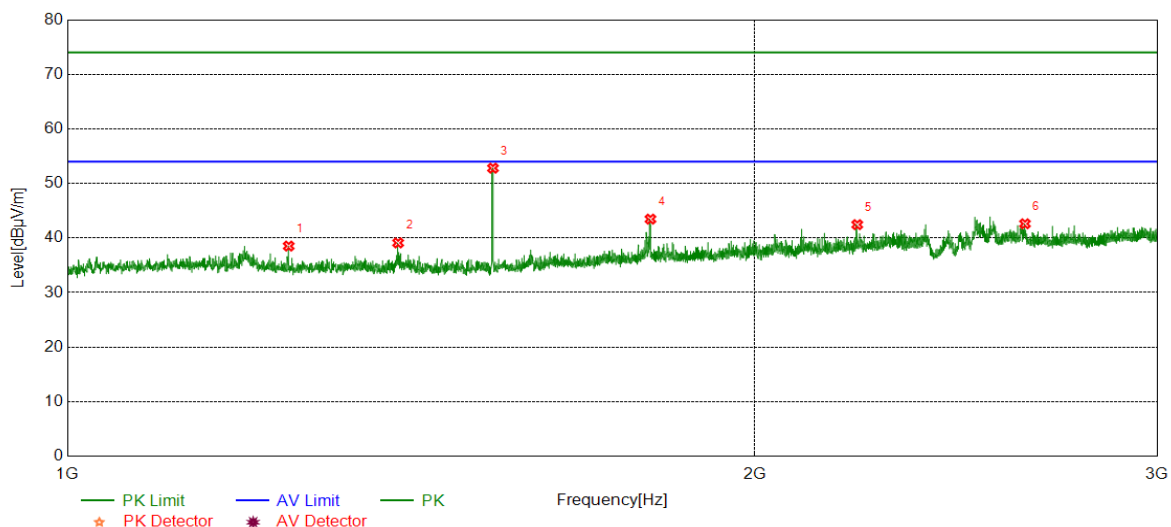


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1250.0313	44.18	-5.66	38.52	74.00	-35.48	Horizontal
2	1395.7995	44.81	-5.71	39.10	74.00	-34.90	Horizontal
3	1535.8170	58.55	-5.75	52.80	74.00	-21.20	Horizontal
4	1800.1000	47.31	-3.85	43.46	74.00	-30.54	Horizontal
5	2217.4022	44.70	-2.25	42.45	74.00	-31.55	Horizontal
6	2625.9532	43.13	-0.52	42.61	74.00	-31.39	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

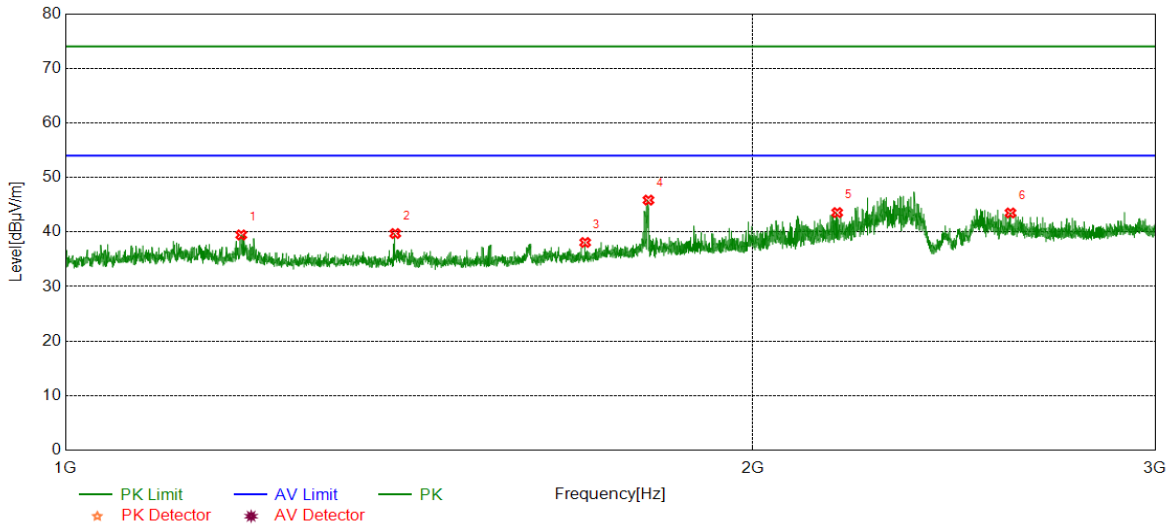


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1194.0243	45.03	-5.57	39.46	74.00	-34.54	Vertical
2	1394.5493	45.44	-5.72	39.72	74.00	-34.28	Vertical
3	1688.8361	42.84	-4.76	38.08	74.00	-35.92	Vertical
4	1800.1000	49.69	-3.85	45.84	74.00	-28.16	Vertical
5	2177.3972	45.88	-2.33	43.55	74.00	-30.45	Vertical
6	2592.9491	44.24	-0.75	43.49	74.00	-30.51	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

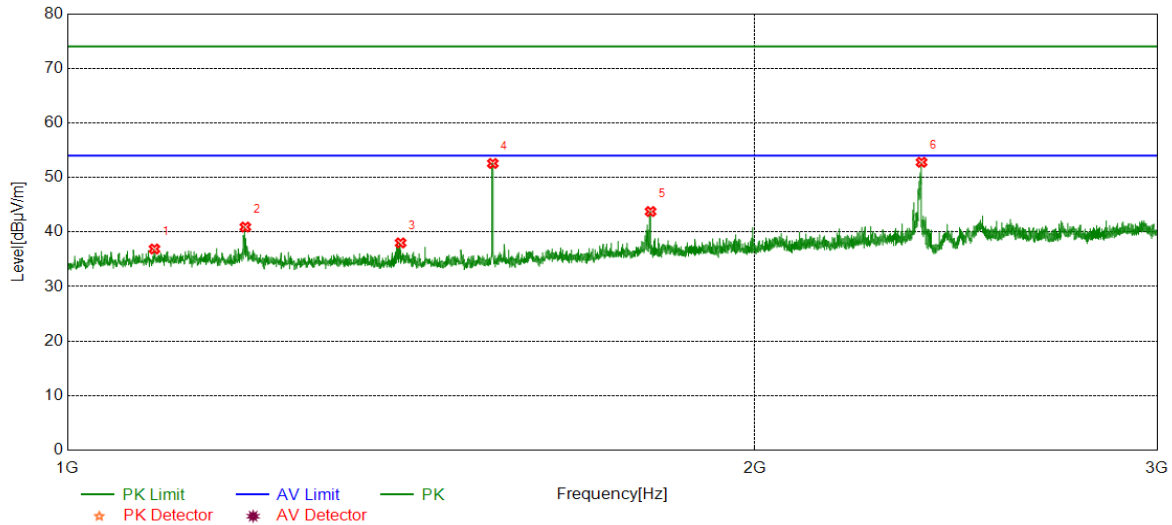


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1091.7615	42.49	-5.60	36.89	74.00	-37.11	Horizontal
2	1196.5246	46.47	-5.56	40.91	74.00	-33.09	Horizontal
3	1399.2999	43.66	-5.66	38.00	74.00	-36.00	Horizontal
4	1535.5669	58.32	-5.75	52.57	74.00	-21.43	Horizontal
5	1800.3500	47.60	-3.85	43.75	74.00	-30.25	Horizontal
6	2365.9207	53.93	-1.15	52.78	74.00	-21.22	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

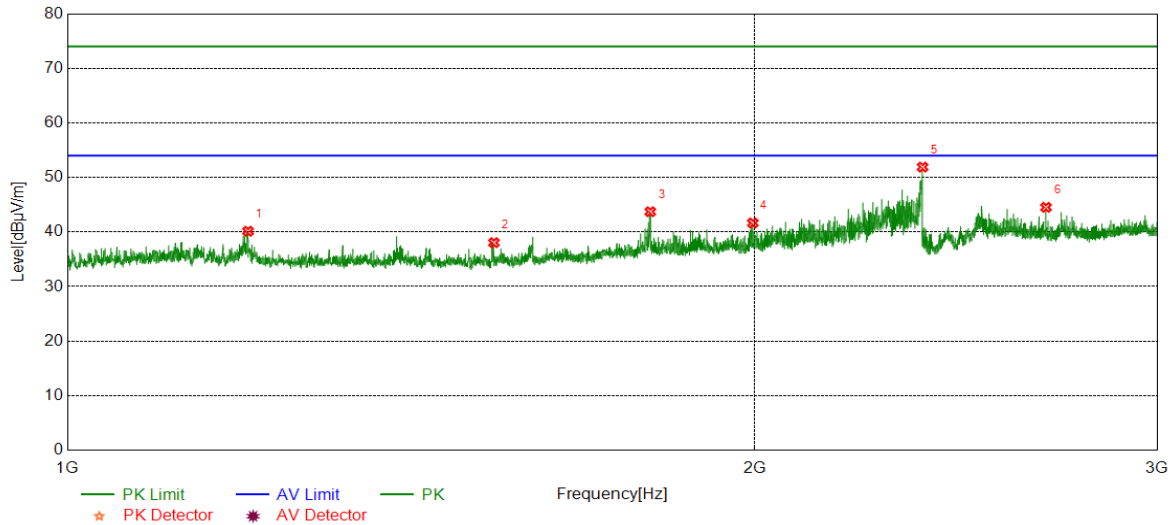


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1199.7750	45.70	-5.56	40.14	74.00	-33.86	Vertical
2	1537.3172	43.78	-5.74	38.04	74.00	-35.96	Vertical
3	1799.8500	47.56	-3.84	43.72	74.00	-30.28	Vertical
4	1995.8745	44.68	-3.03	41.65	74.00	-32.35	Vertical
5	2368.4211	53.04	-1.14	51.90	74.00	-22.10	Vertical
6	2682.2103	45.16	-0.64	44.52	74.00	-29.48	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

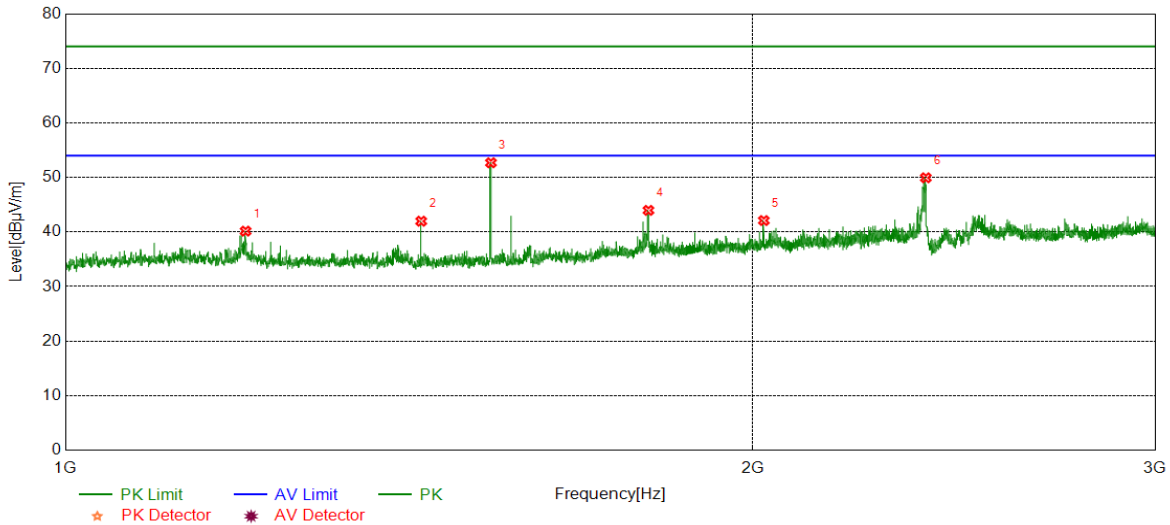


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1199.2749	45.72	-5.56	40.16	74.00	-33.84	Horizontal
2	1431.5539	47.76	-5.78	41.98	74.00	-32.02	Horizontal
3	1535.8170	58.44	-5.75	52.69	74.00	-21.31	Horizontal
4	1800.1000	47.82	-3.85	43.97	74.00	-30.03	Horizontal
5	2022.1278	44.91	-2.81	42.10	74.00	-31.90	Horizontal
6	2380.9226	51.01	-1.07	49.94	74.00	-24.06	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

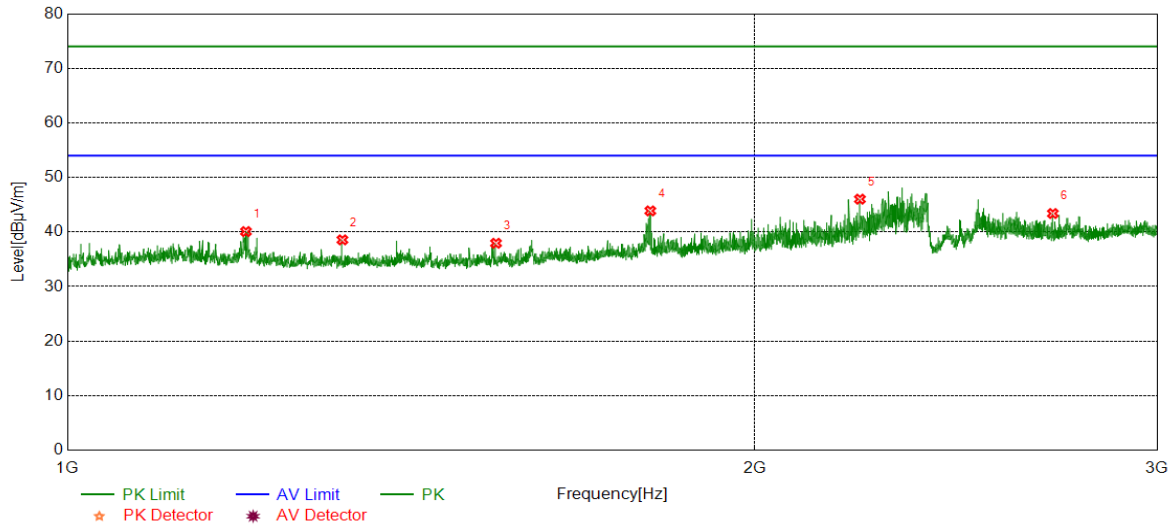


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.2747	45.64	-5.56	40.08	74.00	-33.92	Vertical
2	1319.5399	44.15	-5.59	38.56	74.00	-35.44	Vertical
3	1540.5676	43.65	-5.71	37.94	74.00	-36.06	Vertical
4	1799.8500	47.71	-3.84	43.87	74.00	-30.13	Vertical
5	2223.4029	48.22	-2.20	46.02	74.00	-27.98	Vertical
6	2700.7126	43.79	-0.40	43.39	74.00	-30.61	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

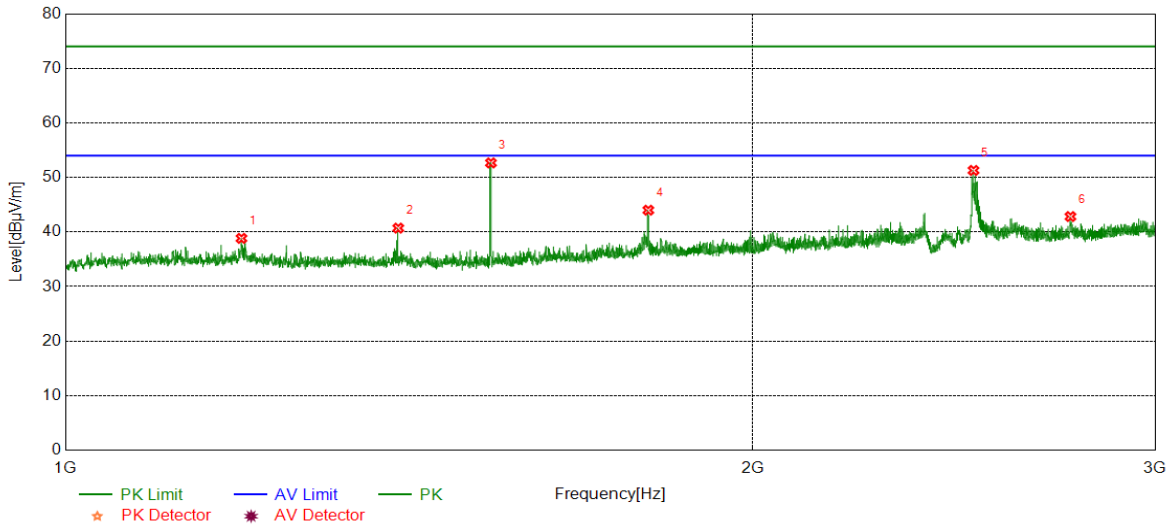


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1194.2743	44.40	-5.57	38.83	74.00	-35.17	Horizontal
2	1398.7999	46.38	-5.67	40.71	74.00	-33.29	Horizontal
3	1535.8170	58.41	-5.75	52.66	74.00	-21.34	Horizontal
4	1799.8500	47.84	-3.84	44.00	74.00	-30.00	Horizontal
5	2498.1873	51.75	-0.46	51.29	74.00	-22.71	Horizontal
6	2754.7193	43.19	-0.36	42.83	74.00	-31.17	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

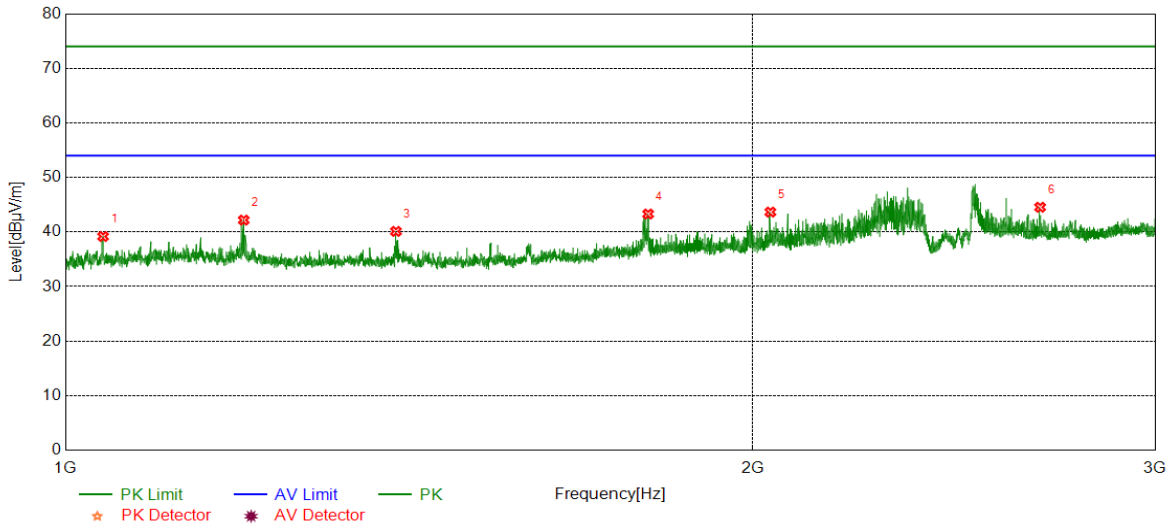

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1038.7548	44.49	-5.32	39.17	74.00	-34.83	Vertical
2	1197.0246	47.74	-5.56	42.18	74.00	-31.82	Vertical
3	1395.5494	45.82	-5.71	40.11	74.00	-33.89	Vertical
4	1799.6000	47.14	-3.84	43.30	74.00	-30.70	Vertical
5	2035.6295	46.19	-2.54	43.65	74.00	-30.35	Vertical
6	2671.7090	45.26	-0.72	44.54	74.00	-29.46	Vertical


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part II: 3GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

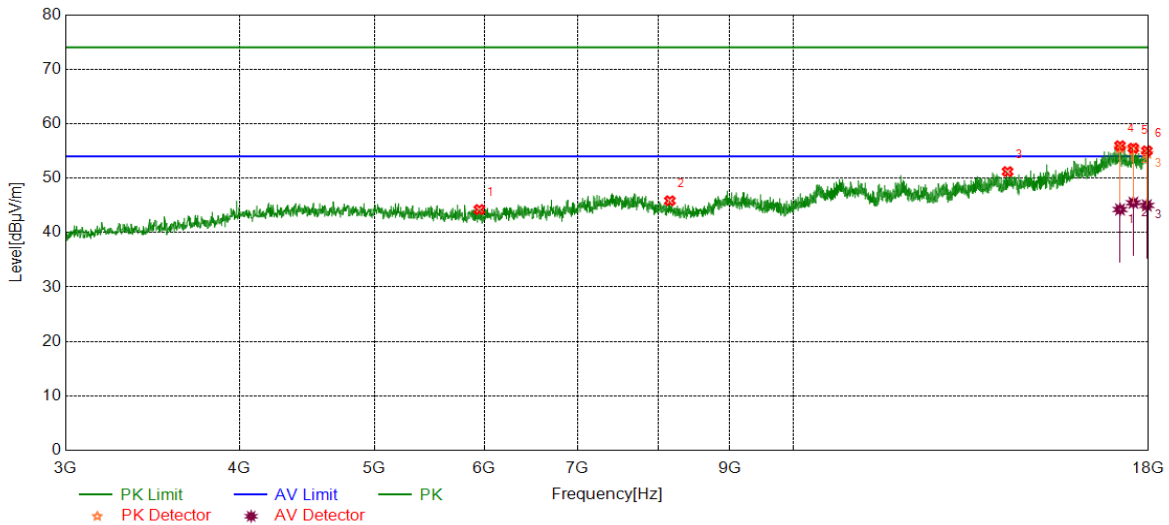

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5949.7437	38.97	5.26	44.23	74.00	-29.77	Horizontal
2	8155.0194	38.62	7.22	45.84	74.00	-28.16	Horizontal
3	14257.0321	37.27	13.93	51.20	74.00	-22.80	Horizontal
4	17171.1464	37.62	18.33	55.95	74.00	-18.05	Horizontal
5	17553.6942	37.49	18.01	55.50	74.00	-18.50	Horizontal
6	17951.2439	36.45	18.56	55.01	74.00	-18.99	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17171.1464	25.91	18.33	44.24	54.00	-9.76	Horizontal
2	17553.6942	27.46	18.01	45.47	54.00	-8.53	Horizontal
3	17951.2439	26.43	18.56	44.99	54.00	-9.01	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

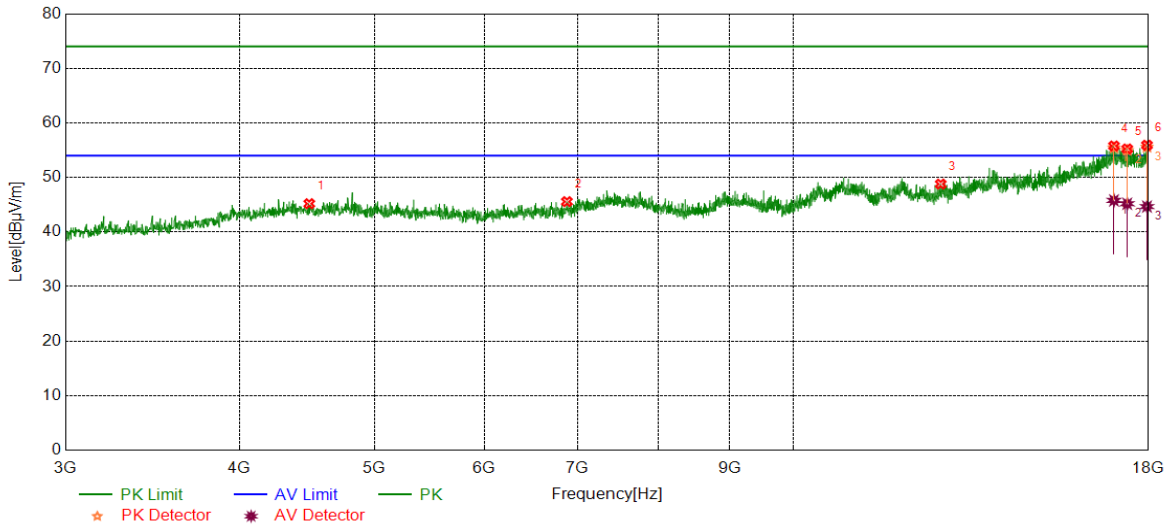

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4490.8114	39.97	5.22	45.19	74.00	-28.81	Vertical
2	6877.9847	37.37	8.20	45.57	74.00	-28.43	Vertical
3	12764.3455	37.07	11.72	48.79	74.00	-25.21	Vertical
4	17000.5001	37.19	18.58	55.77	74.00	-18.23	Vertical
5	17377.4222	36.65	18.58	55.23	74.00	-18.77	Vertical
6	17954.9944	37.39	18.52	55.91	74.00	-18.09	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17000.5001	27.21	18.58	45.79	54.00	-8.21	Vertical
2	17377.4222	26.60	18.58	45.18	54.00	-8.82	Vertical
3	17954.9944	26.14	18.52	44.66	54.00	-9.34	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

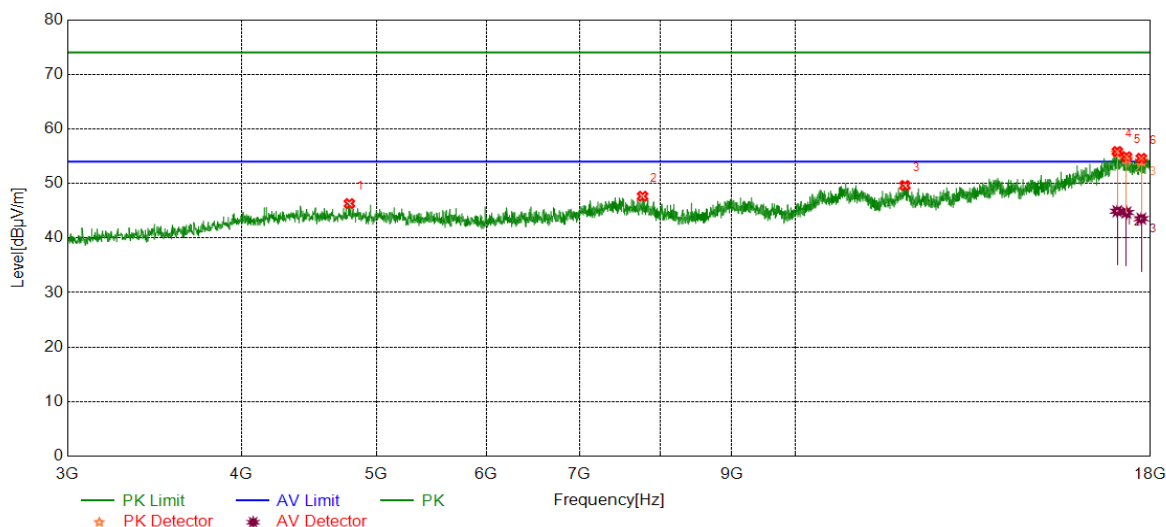

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4783.3479	40.47	5.84	46.31	74.00	-27.69	Horizontal
2	7768.7211	39.49	8.16	47.65	74.00	-26.35	Horizontal
3	11991.7490	36.73	12.90	49.63	74.00	-24.37	Horizontal
4	17038.0048	36.93	18.92	55.85	74.00	-18.15	Horizontal
5	17298.6623	37.13	17.76	54.89	74.00	-19.11	Horizontal
6	17729.9662	36.94	17.67	54.61	74.00	-19.39	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17038.0048	25.99	18.92	44.91	54.00	-9.09	Horizontal
2	17298.6623	26.91	17.76	44.67	54.00	-9.33	Horizontal
3	17729.9662	25.87	17.67	43.54	54.00	-10.46	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

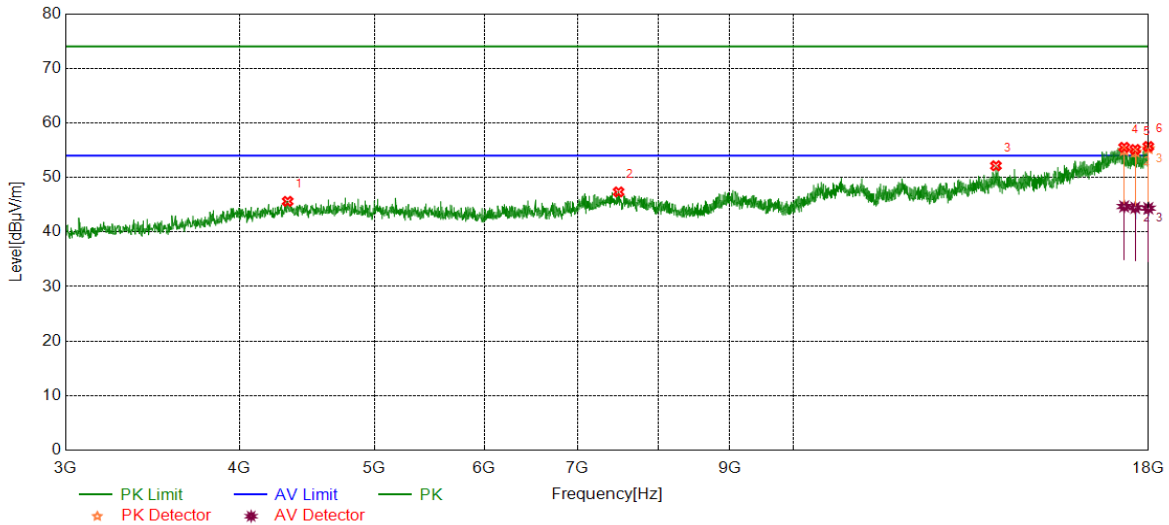

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4333.2917	40.46	5.16	45.62	74.00	-28.38	Vertical
2	7491.1864	38.77	8.58	47.35	74.00	-26.65	Vertical
3	13985.1231	38.16	13.98	52.14	74.00	-21.86	Vertical
4	17289.2862	37.63	17.89	55.52	74.00	-18.48	Vertical
5	17609.9512	37.26	17.87	55.13	74.00	-18.87	Vertical
6	17994.3743	37.91	17.77	55.68	74.00	-18.32	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17289.2862	26.79	17.89	44.68	54.00	-9.32	Vertical
2	17609.9512	26.58	17.87	44.45	54.00	-9.55	Vertical
3	17994.3743	26.59	17.77	44.36	54.00	-9.64	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

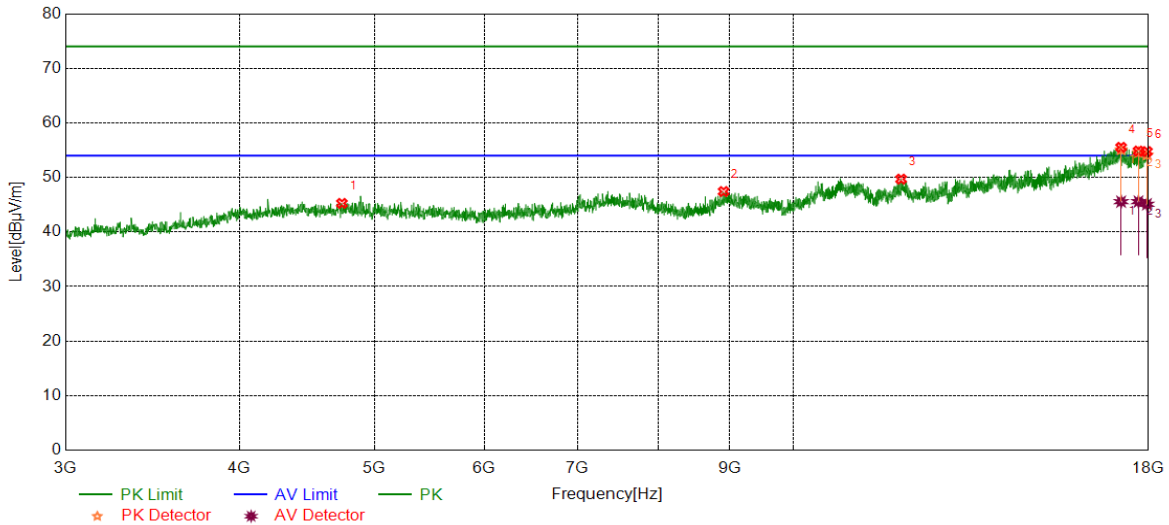

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4740.2175	40.04	5.21	45.25	74.00	-28.75	Horizontal
2	8912.6141	38.89	8.53	47.42	74.00	-26.58	Horizontal
3	11954.2443	37.07	12.62	49.69	74.00	-24.31	Horizontal
4	17203.0254	37.32	18.20	55.52	74.00	-18.48	Horizontal
5	17703.7130	37.13	17.71	54.84	74.00	-19.16	Horizontal
6	17953.1191	36.20	18.54	54.74	74.00	-19.26	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17203.0254	27.36	18.20	45.56	54.00	-8.44	Horizontal
2	17703.7130	27.86	17.71	45.57	54.00	-8.43	Horizontal
3	17953.1191	26.54	18.54	45.08	54.00	-8.92	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

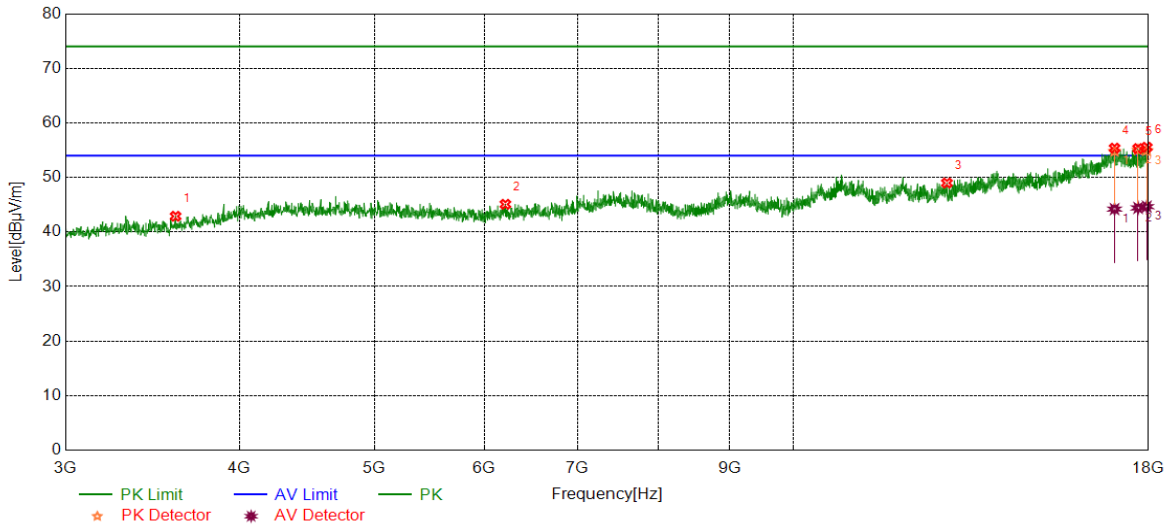

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3600.0750	40.61	2.27	42.88	74.00	-31.12	Vertical
2	6212.2765	39.03	6.05	45.08	74.00	-28.92	Vertical
3	12895.6120	36.84	12.14	48.98	74.00	-25.02	Vertical
4	17017.3772	36.98	18.39	55.37	74.00	-18.63	Vertical
5	17692.4616	37.38	17.91	55.29	74.00	-18.71	Vertical
6	17947.4934	37.03	18.50	55.53	74.00	-18.47	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17017.3772	25.81	18.39	44.20	54.00	-9.80	Vertical
2	17692.4616	26.51	17.91	44.42	54.00	-9.58	Vertical
3	17947.4934	26.15	18.50	44.65	54.00	-9.35	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

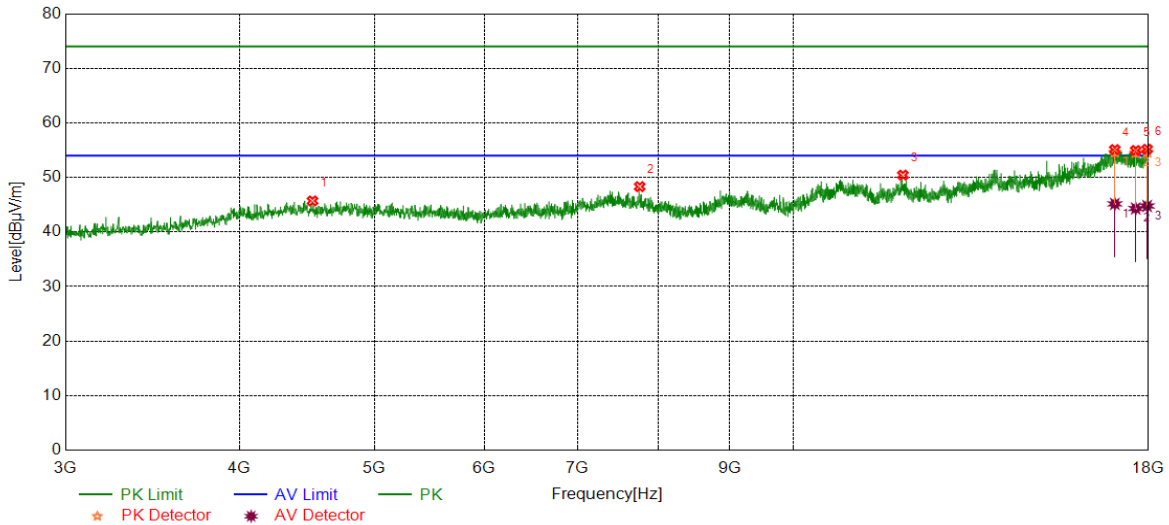

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4515.1894	40.21	5.49	45.70	74.00	-28.30	Horizontal
2	7757.4697	40.11	8.21	48.32	74.00	-25.68	Horizontal
3	11989.8737	37.55	12.88	50.43	74.00	-23.57	Horizontal
4	17024.8781	36.43	18.68	55.11	74.00	-18.89	Horizontal
5	17623.0779	37.45	17.50	54.95	74.00	-19.05	Horizontal
6	17958.7448	36.71	18.48	55.19	74.00	-18.81	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17024.8781	26.47	18.68	45.15	54.00	-8.85	Horizontal
2	17623.0779	26.81	17.50	44.31	54.00	-9.69	Horizontal
3	17958.7448	26.29	18.48	44.77	54.00	-9.23	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

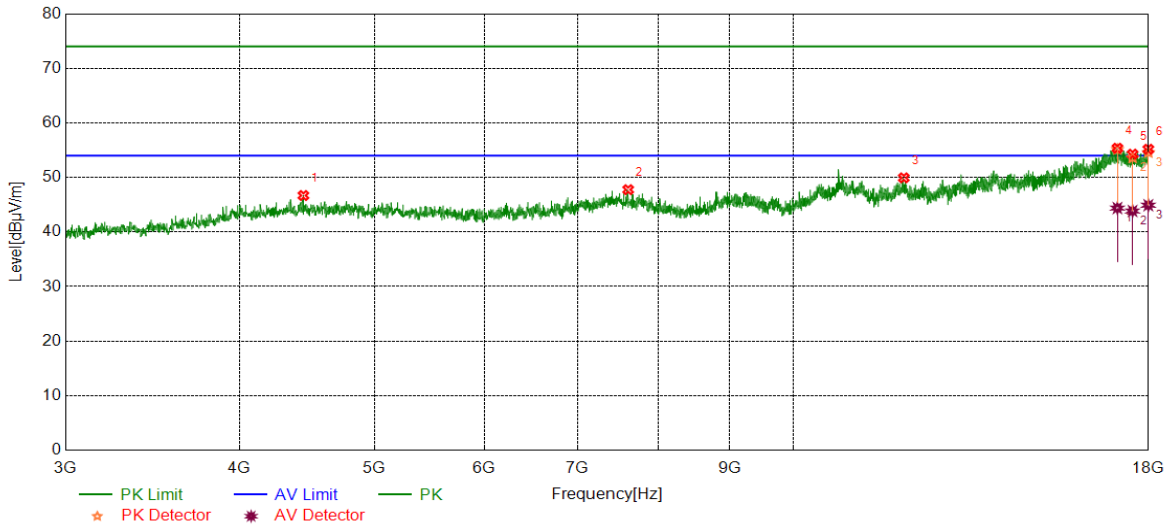

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4447.6810	41.26	5.43	46.69	74.00	-27.31	Vertical
2	7611.2014	39.13	8.63	47.76	74.00	-26.24	Vertical
3	12008.6261	37.19	12.74	49.93	74.00	-24.07	Vertical
4	17098.0123	37.08	18.28	55.36	74.00	-18.64	Vertical
5	17531.1914	36.41	17.86	54.27	74.00	-19.73	Vertical
6	17994.3743	37.40	17.77	55.17	74.00	-18.83	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17098.0123	26.10	18.28	44.38	54.00	-9.62	Vertical
2	17531.1914	25.99	17.86	43.85	54.00	-10.15	Vertical
3	17994.3743	27.14	17.77	44.91	54.00	-9.09	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

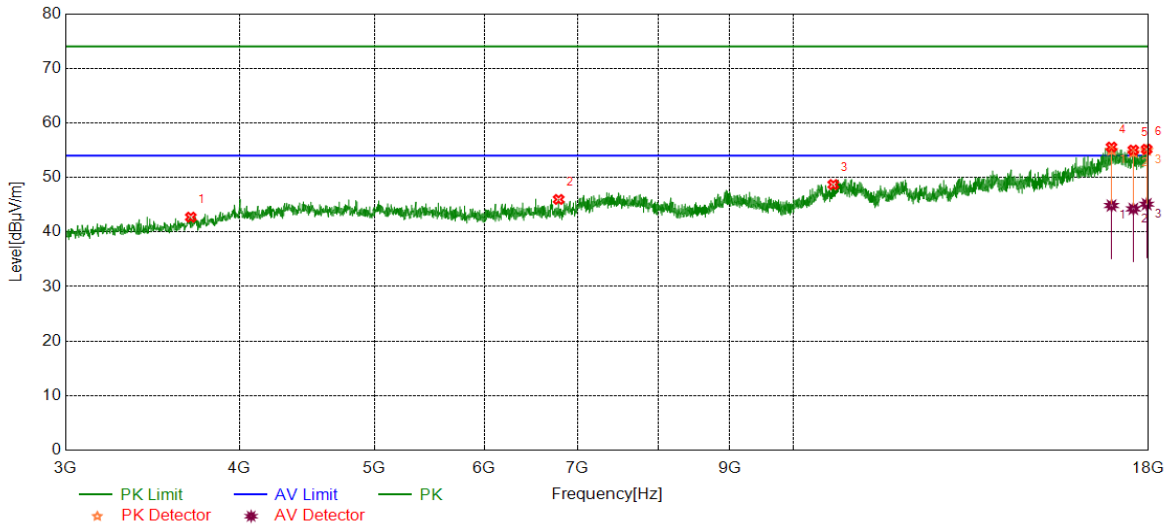

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3691.9615	40.05	2.67	42.72	74.00	-31.28	Horizontal
2	6784.2230	38.14	7.83	45.97	74.00	-28.03	Horizontal
3	10686.5858	36.56	12.13	48.69	74.00	-25.31	Horizontal
4	16931.1164	37.19	18.38	55.57	74.00	-18.43	Horizontal
5	17553.6942	37.01	18.01	55.02	74.00	-18.98	Horizontal
6	17945.6182	36.73	18.44	55.17	74.00	-18.83	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16931.1164	26.47	18.38	44.85	54.00	-9.15	Horizontal
2	17553.6942	26.23	18.01	44.24	54.00	-9.76	Horizontal
3	17945.6182	26.66	18.44	45.10	54.00	-8.90	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

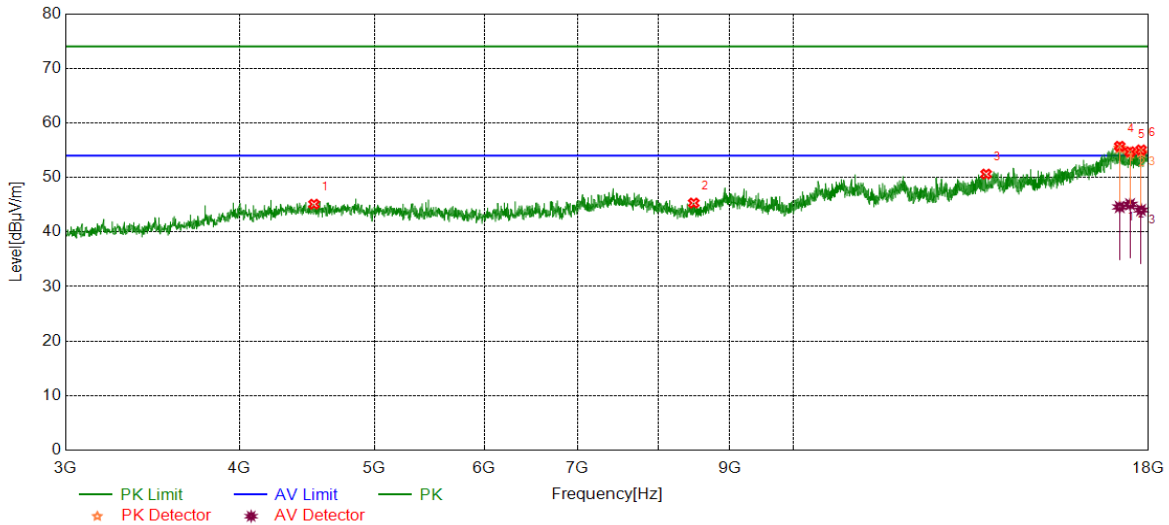

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4526.4408	39.74	5.36	45.10	74.00	-28.90	Vertical
2	8483.1854	38.77	6.54	45.31	74.00	-28.69	Vertical
3	13760.0950	37.21	13.41	50.62	74.00	-23.38	Vertical
4	17163.6455	37.43	18.28	55.71	74.00	-18.29	Vertical
5	17459.9325	36.98	17.73	54.71	74.00	-19.29	Vertical
6	17780.5976	36.73	18.31	55.04	74.00	-18.96	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17163.6455	26.31	18.28	44.59	54.00	-9.41	Vertical
2	17459.9325	27.34	17.73	45.07	54.00	-8.93	Vertical
3	17780.5976	25.72	18.31	44.03	54.00	-9.97	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

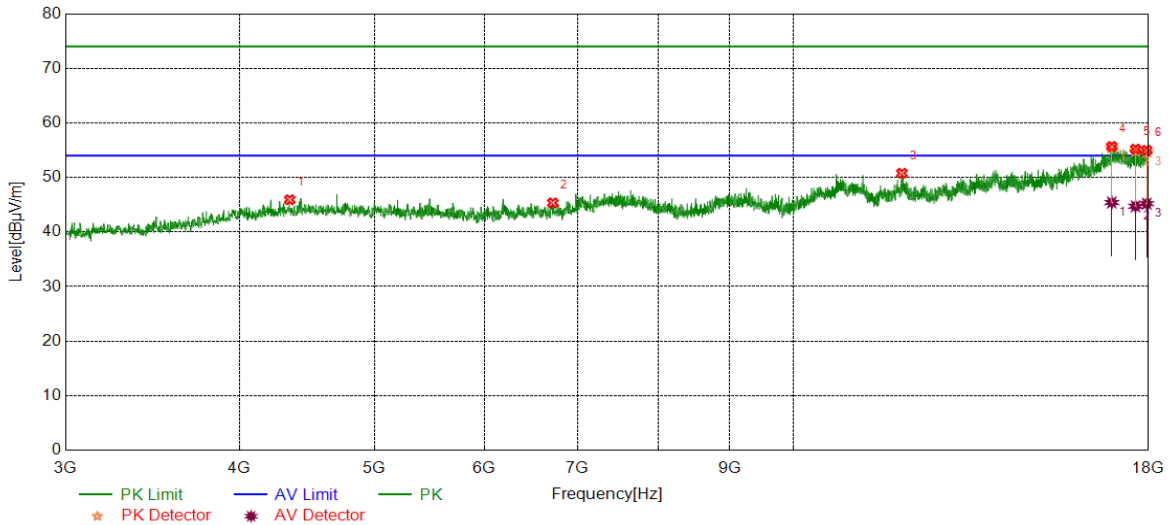

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4348.2935	40.64	5.28	45.92	74.00	-28.08	Horizontal
2	6718.5898	37.56	7.78	45.34	74.00	-28.66	Horizontal
3	11971.1214	38.24	12.53	50.77	74.00	-23.23	Horizontal
4	16938.6173	37.22	18.45	55.67	74.00	-18.33	Horizontal
5	17617.4522	37.52	17.68	55.20	74.00	-18.80	Horizontal
6	17947.4934	36.48	18.50	54.98	74.00	-19.02	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16938.6173	26.96	18.45	45.41	54.00	-8.59	Horizontal
2	17617.4522	27.04	17.68	44.72	54.00	-9.28	Horizontal
3	17947.4934	26.69	18.50	45.19	54.00	-8.81	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

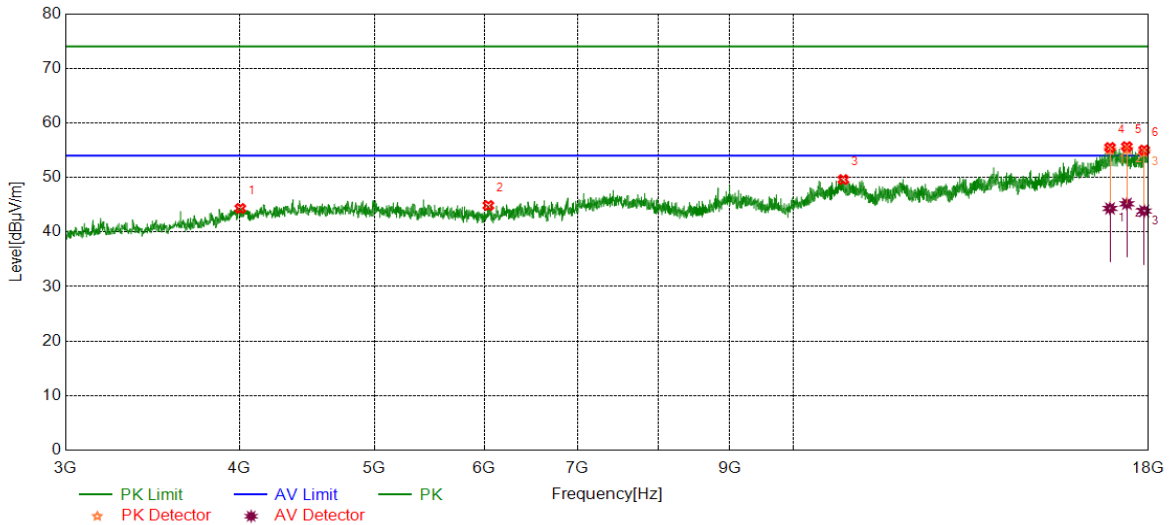

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4007.0009	39.78	4.53	44.31	74.00	-29.69	Vertical
2	6039.7550	39.57	5.29	44.86	74.00	-29.14	Vertical
3	10864.7331	37.45	12.16	49.61	74.00	-24.39	Vertical
4	16889.8612	37.70	17.79	55.49	74.00	-18.51	Vertical
5	17368.0460	37.25	18.40	55.65	74.00	-18.35	Vertical
6	17872.4841	36.71	18.30	55.01	74.00	-18.99	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16889.8612	26.53	17.79	44.32	54.00	-9.68	Vertical
2	17368.0460	26.77	18.40	45.17	54.00	-8.83	Vertical
3	17872.4841	25.55	18.30	43.85	54.00	-10.15	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

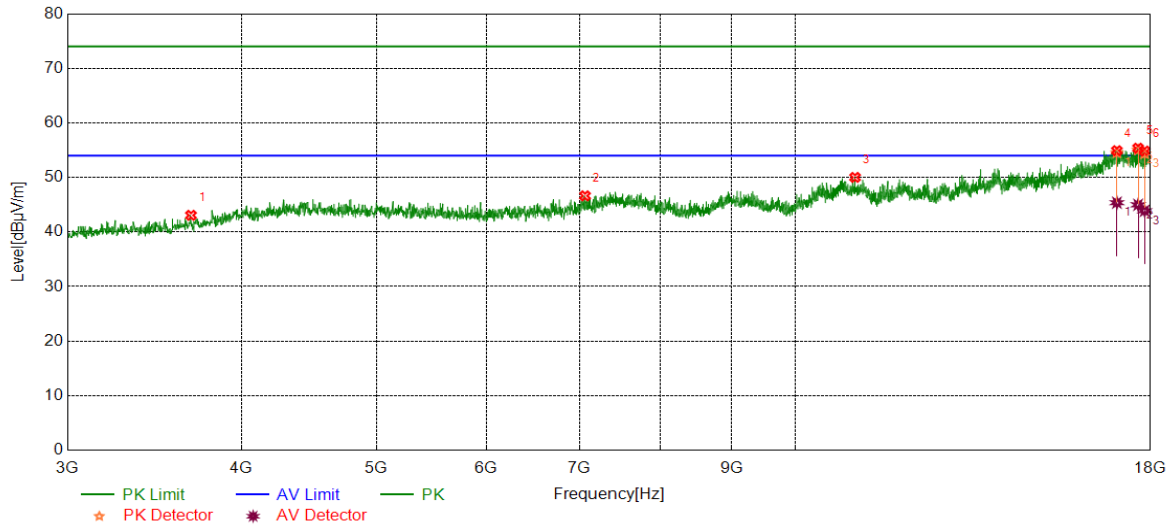

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3680.7101	40.18	2.88	43.06	74.00	-30.94	Horizontal
2	7063.6330	38.45	8.18	46.63	74.00	-27.37	Horizontal
3	11041.0051	37.85	12.16	50.01	74.00	-23.99	Horizontal
4	17026.7533	36.10	18.81	54.91	74.00	-19.09	Horizontal
5	17634.3293	37.95	17.42	55.37	74.00	-18.63	Horizontal
6	17827.4784	36.82	18.02	54.84	74.00	-19.16	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17026.7533	26.56	18.81	45.37	54.00	-8.63	Horizontal
2	17634.3293	27.56	17.42	44.98	54.00	-9.02	Horizontal
3	17827.4784	25.87	18.02	43.89	54.00	-10.11	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

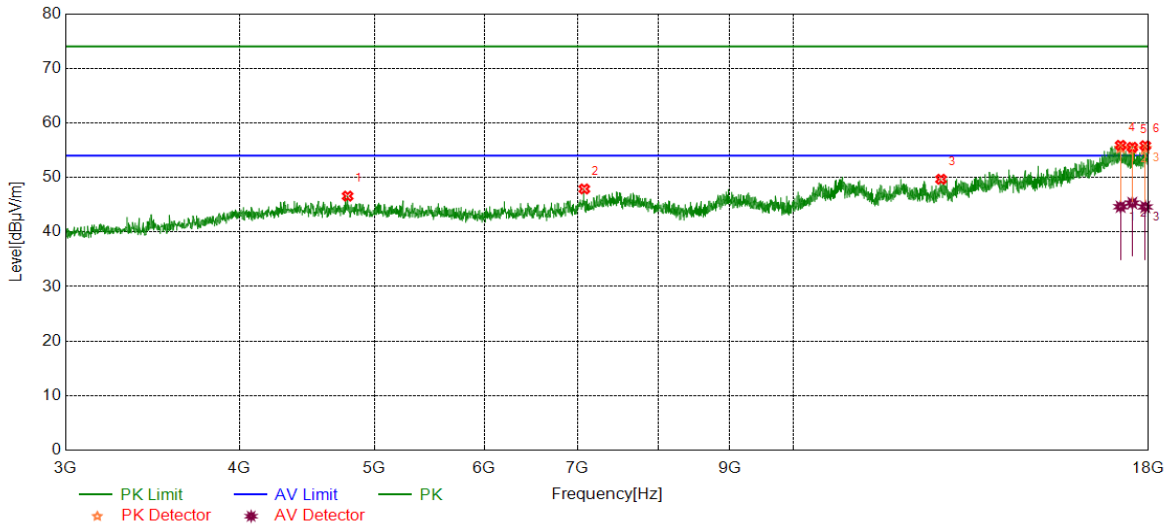

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4785.2232	40.65	5.93	46.58	74.00	-27.42	Vertical
2	7078.6348	39.61	8.28	47.89	74.00	-26.11	Vertical
3	12771.8465	37.85	11.82	49.67	74.00	-24.33	Vertical
4	17189.8987	37.71	18.18	55.89	74.00	-18.11	Vertical
5	17523.6905	37.74	17.79	55.53	74.00	-18.47	Vertical
6	17904.3630	37.48	18.35	55.83	74.00	-18.17	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17189.8987	26.45	18.18	44.63	54.00	-9.37	Vertical
2	17523.6905	27.53	17.79	45.32	54.00	-8.68	Vertical
3	17904.3630	26.25	18.35	44.60	54.00	-9.40	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

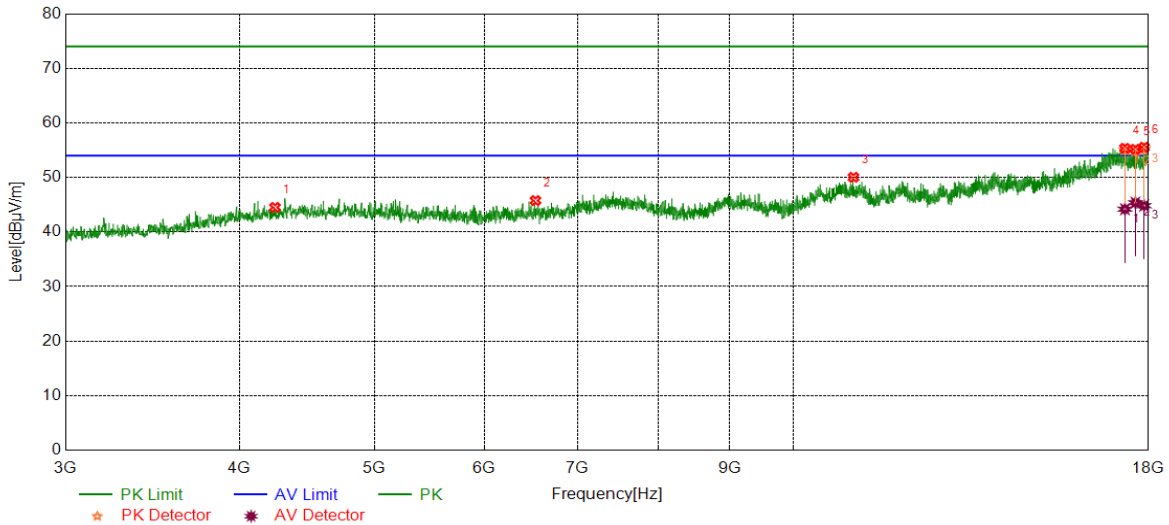

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4243.2804	39.72	4.79	44.51	74.00	-29.49	Horizontal
2	6529.1911	38.42	7.34	45.76	74.00	-28.24	Horizontal
3	11048.5061	37.87	12.16	50.03	74.00	-23.97	Horizontal
4	17311.7890	37.80	17.54	55.34	74.00	-18.66	Horizontal
5	17613.7017	37.38	17.78	55.16	74.00	-18.84	Horizontal
6	17868.7336	37.17	18.37	55.54	74.00	-18.46	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17311.7890	26.64	17.54	44.18	54.00	-9.82	Horizontal
2	17613.7017	27.58	17.78	45.36	54.00	-8.64	Horizontal
3	17868.7336	26.46	18.37	44.83	54.00	-9.17	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

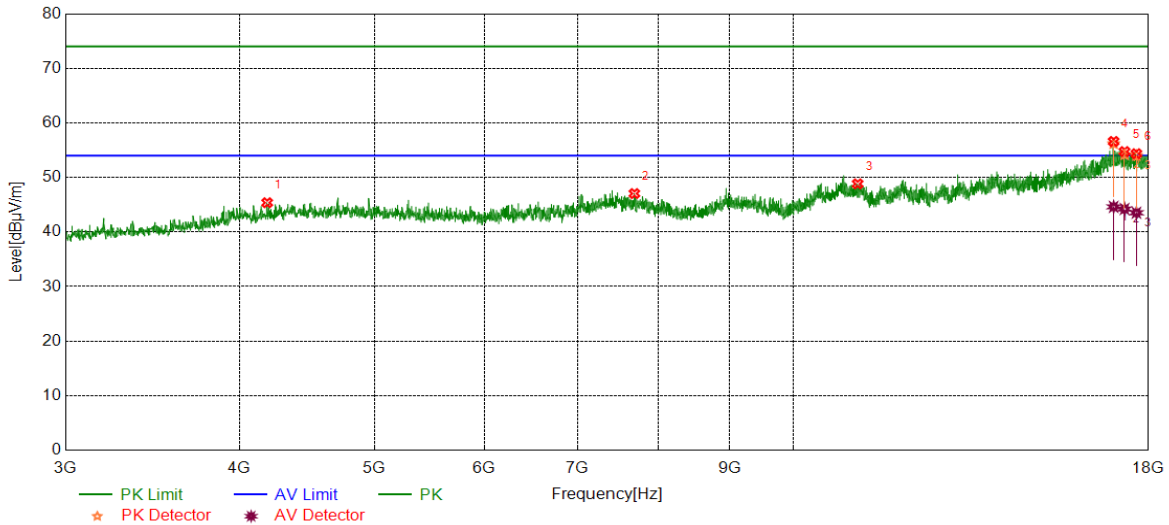

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4188.8986	40.83	4.54	45.37	74.00	-28.63	Vertical
2	7689.9612	38.38	8.67	47.05	74.00	-26.95	Vertical
3	11125.3907	36.74	12.09	48.83	74.00	-25.17	Vertical
4	16991.1239	37.84	18.76	56.60	74.00	-17.40	Vertical
5	17300.5376	37.02	17.72	54.74	74.00	-19.26	Vertical
6	17643.7055	36.87	17.49	54.36	74.00	-19.64	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16991.1239	25.85	18.76	44.61	54.00	-9.39	Vertical
2	17300.5376	26.50	17.72	44.22	54.00	-9.78	Vertical
3	17643.7055	26.04	17.49	43.53	54.00	-10.47	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

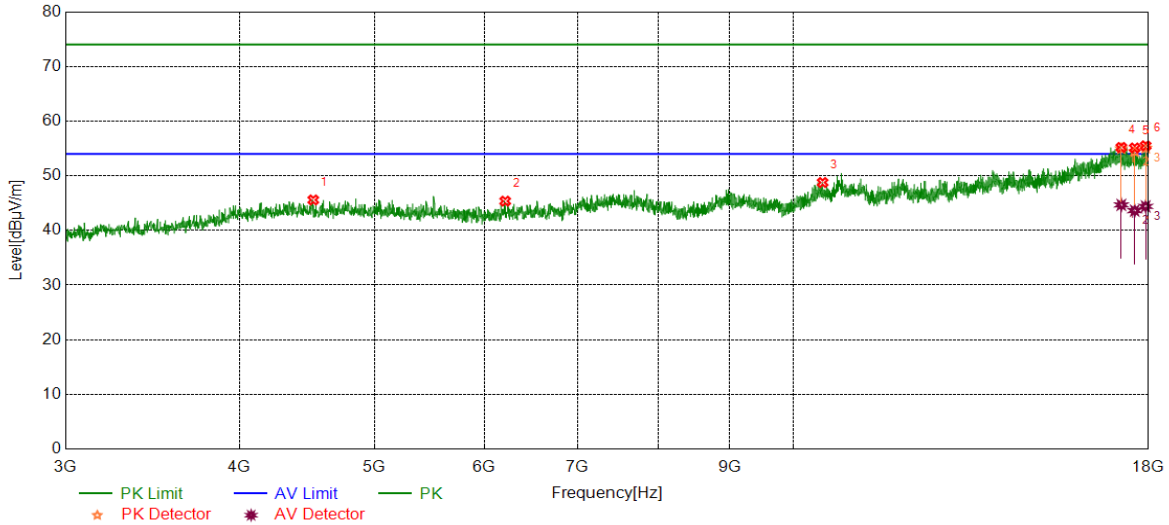

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4520.8151	40.16	5.42	45.58	74.00	-28.42	Horizontal
2	6210.4013	39.30	6.06	45.36	74.00	-28.64	Horizontal
3	10499.0624	37.24	11.53	48.77	74.00	-25.23	Horizontal
4	17208.6511	37.29	17.90	55.19	74.00	-18.81	Horizontal
5	17593.0741	37.78	17.31	55.09	74.00	-18.91	Horizontal
6	17915.6145	37.49	18.00	55.49	74.00	-18.51	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17208.6511	26.77	17.90	44.67	54.00	-9.33	Horizontal
2	17593.0741	26.31	17.31	43.62	54.00	-10.38	Horizontal
3	17915.6145	26.40	18.00	44.40	54.00	-9.60	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

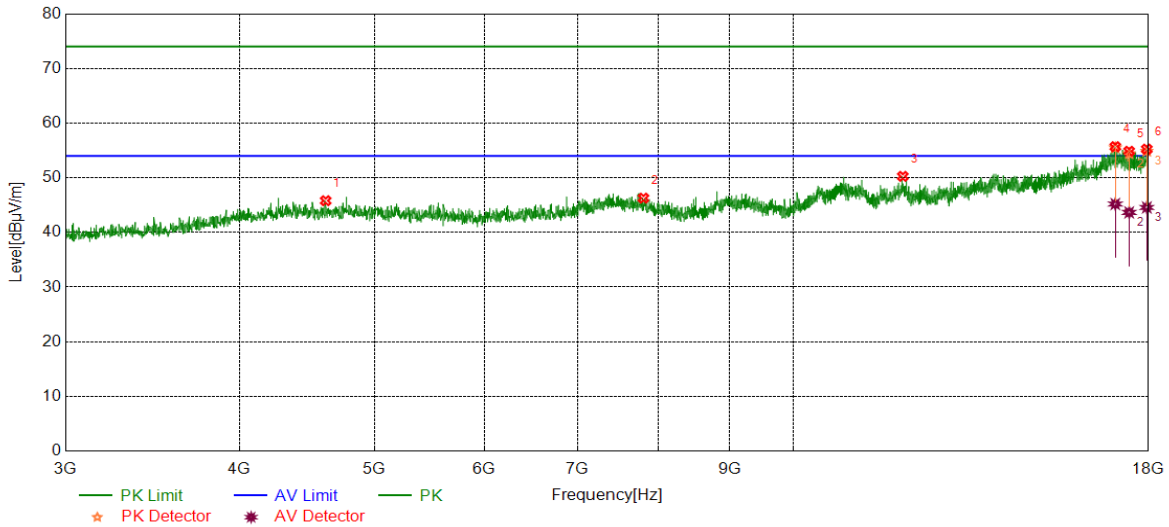

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4614.5768	40.53	5.28	45.81	74.00	-28.19	Vertical
2	7806.2258	38.27	8.01	46.28	74.00	-27.72	Vertical
3	11987.9985	37.39	12.87	50.26	74.00	-23.74	Vertical
4	17038.0048	36.77	18.92	55.69	74.00	-18.31	Vertical
5	17433.6792	36.97	17.89	54.86	74.00	-19.14	Vertical
6	17949.3687	36.69	18.55	55.24	74.00	-18.76	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17038.0048	26.28	18.92	45.20	54.00	-8.80	Vertical
2	17433.6792	25.77	17.89	43.66	54.00	-10.34	Vertical
3	17949.3687	26.02	18.55	44.57	54.00	-9.43	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

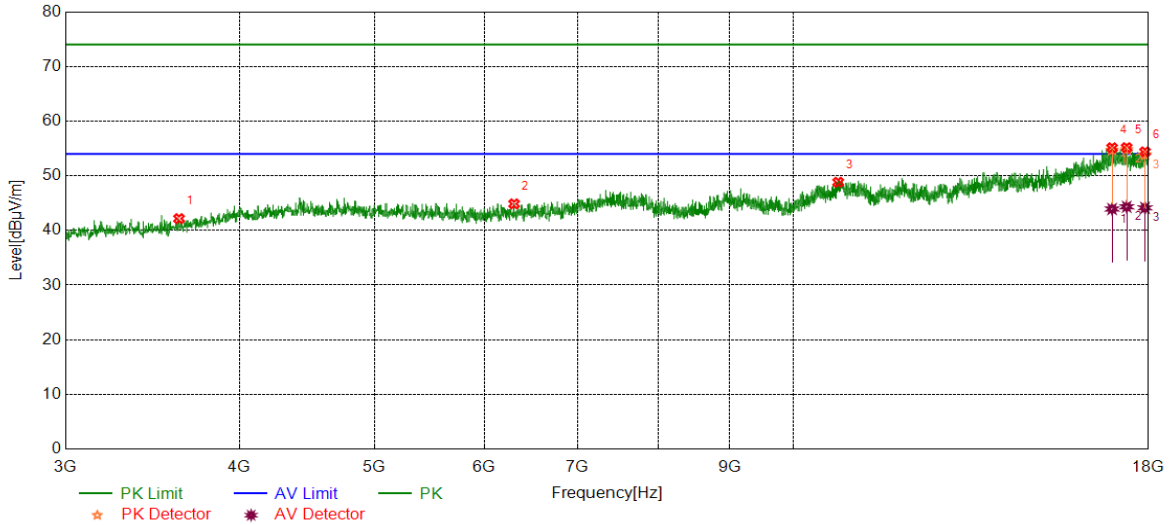

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3620.7026	39.83	2.33	42.16	74.00	-31.84	Horizontal
2	6302.2878	38.64	6.23	44.87	74.00	-29.13	Horizontal
3	10772.8466	36.56	12.26	48.82	74.00	-25.18	Horizontal
4	16947.9935	36.75	18.37	55.12	74.00	-18.88	Horizontal
5	17362.4203	37.03	18.12	55.15	74.00	-18.85	Horizontal
6	17896.8621	35.93	18.45	54.38	74.00	-19.62	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16947.9935	25.55	18.37	43.92	54.00	-10.08	Horizontal
2	17362.4203	26.21	18.12	44.33	54.00	-9.67	Horizontal
3	17896.8621	25.68	18.45	44.13	54.00	-9.87	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

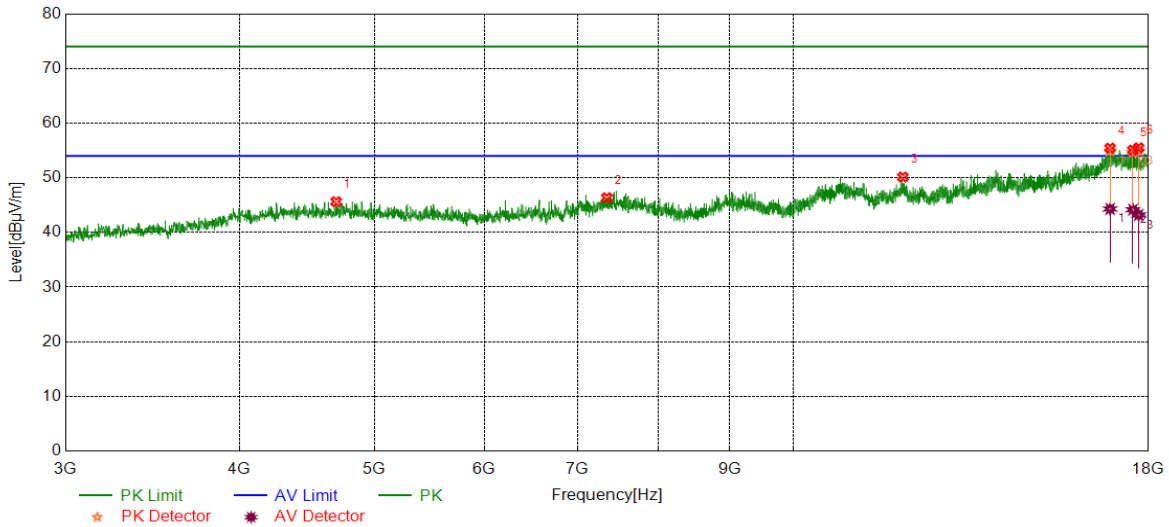

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4695.2119	40.11	5.52	45.63	74.00	-28.37	Vertical
2	7346.7933	37.87	8.49	46.36	74.00	-27.64	Vertical
3	11989.8737	37.26	12.88	50.14	74.00	-23.86	Vertical
4	16891.7365	37.60	17.83	55.43	74.00	-18.57	Vertical
5	17540.5676	37.65	17.41	55.06	74.00	-18.94	Vertical
6	17709.3387	37.86	17.63	55.49	74.00	-18.51	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16891.7365	26.46	17.83	44.29	54.00	-9.71	Vertical
2	17540.5676	26.74	17.41	44.15	54.00	-9.85	Vertical
3	17709.3387	25.57	17.63	43.20	54.00	-10.80	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

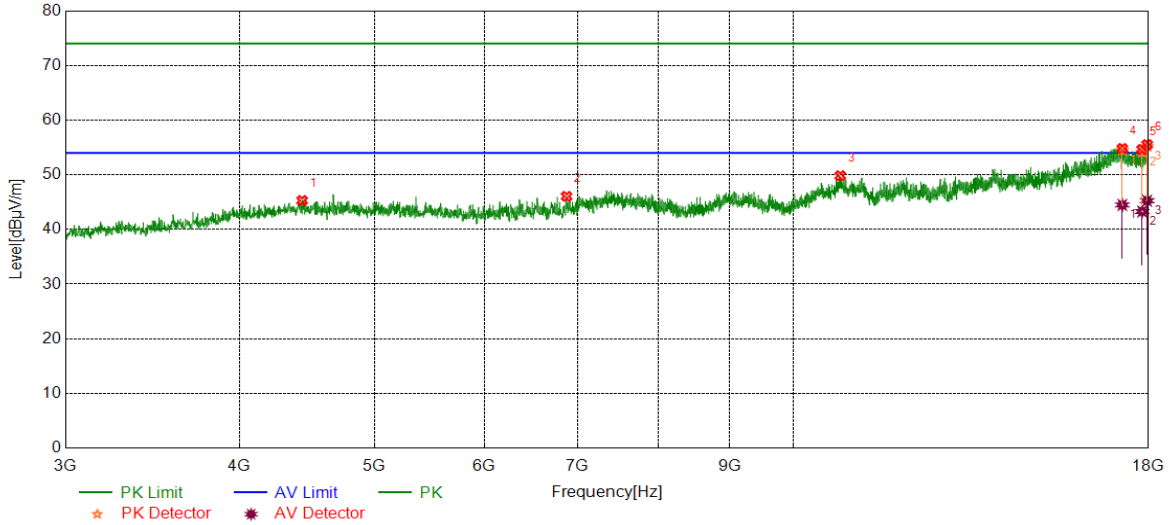

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4438.3048	40.20	5.10	45.30	74.00	-28.70	Horizontal
2	6874.2343	37.93	8.12	46.05	74.00	-27.95	Horizontal
3	10810.3513	37.62	12.21	49.83	74.00	-24.17	Horizontal
4	17236.7796	37.12	17.69	54.81	74.00	-19.19	Horizontal
5	17810.6013	36.90	17.73	54.63	74.00	-19.37	Horizontal
6	17960.6201	37.10	18.42	55.52	74.00	-18.48	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17236.7796	26.79	17.69	44.48	54.00	-9.52	Horizontal
2	17810.6013	25.55	17.73	43.28	54.00	-10.72	Horizontal
3	17960.6201	26.83	18.42	45.25	54.00	-8.75	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

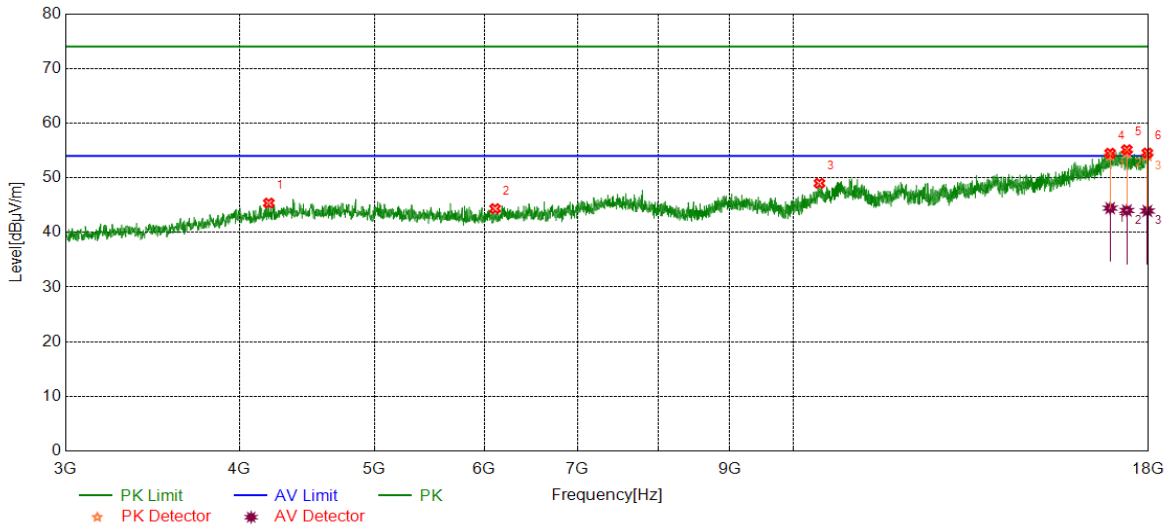

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4200.1500	40.60	4.77	45.37	74.00	-28.63	Vertical
2	6107.2634	38.51	5.84	44.35	74.00	-29.65	Vertical
3	10444.6806	37.66	11.33	48.99	74.00	-25.01	Vertical
4	16893.6117	36.62	17.87	54.49	74.00	-19.51	Vertical
5	17366.1708	36.82	18.31	55.13	74.00	-18.87	Vertical
6	17966.2458	36.57	17.96	54.53	74.00	-19.47	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16893.6117	26.57	17.87	44.44	54.00	-9.56	Vertical
2	17366.1708	25.71	18.31	44.02	54.00	-9.98	Vertical
3	17966.2458	25.97	17.96	43.93	54.00	-10.07	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

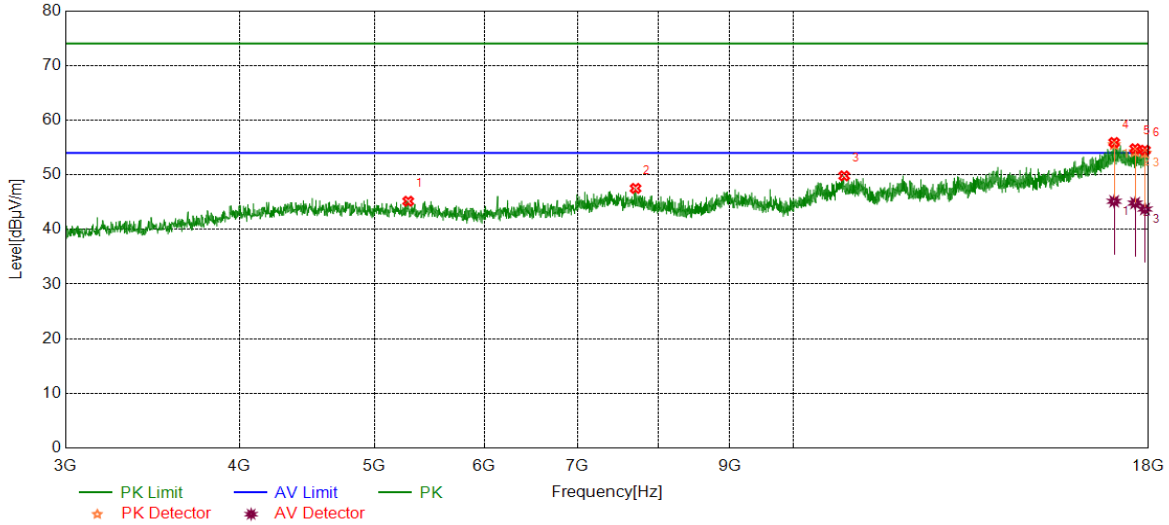

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5289.6612	39.72	5.44	45.16	74.00	-28.84	Horizontal
2	7704.9631	39.15	8.36	47.51	74.00	-26.49	Horizontal
3	10879.7350	37.56	12.24	49.80	74.00	-24.20	Horizontal
4	17006.1258	37.37	18.54	55.91	74.00	-18.09	Horizontal
5	17606.2008	37.06	17.71	54.77	74.00	-19.23	Horizontal
6	17894.9869	36.02	18.48	54.50	74.00	-19.50	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17006.1258	26.61	18.54	45.15	54.00	-8.85	Horizontal
2	17606.2008	27.11	17.71	44.82	54.00	-9.18	Horizontal
3	17894.9869	25.25	18.48	43.73	54.00	-10.27	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

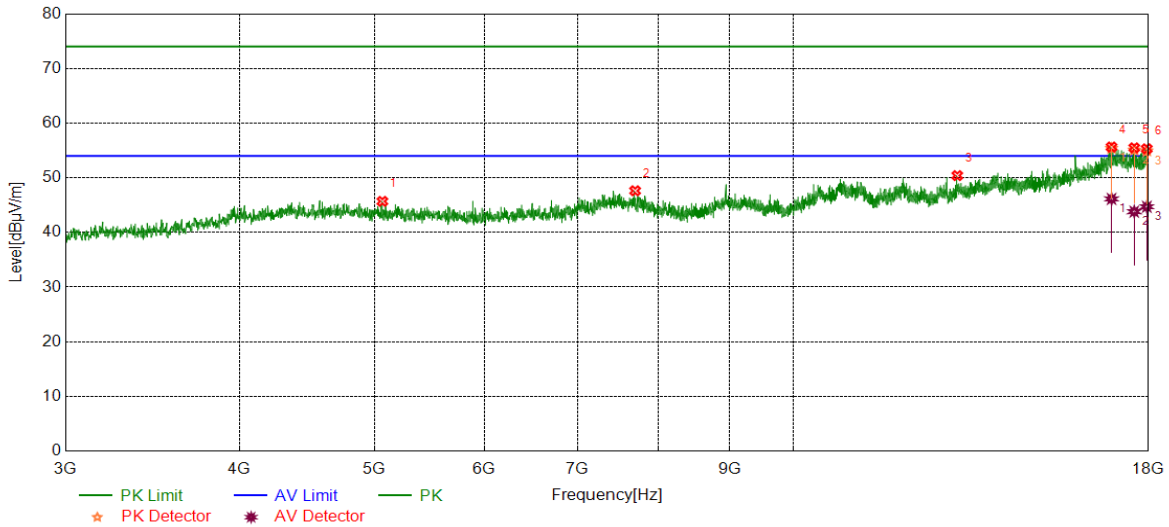

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5068.3835	40.28	5.41	45.69	74.00	-28.31	Vertical
2	7699.3374	39.10	8.52	47.62	74.00	-26.38	Vertical
3	13118.7648	38.15	12.25	50.40	74.00	-23.60	Vertical
4	16932.9916	37.24	18.39	55.63	74.00	-18.37	Vertical
5	17579.9475	37.92	17.56	55.48	74.00	-18.52	Vertical
6	17949.3687	36.75	18.55	55.30	74.00	-18.70	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16932.9916	27.74	18.39	46.13	54.00	-7.87	Vertical
2	17579.9475	26.24	17.56	43.80	54.00	-10.20	Vertical
3	17949.3687	26.15	18.55	44.70	54.00	-9.30	Vertical


- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part III: 18GHz~26.5GHz

SPURIOUS EMISSIONS 18GHz TO 26.5GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

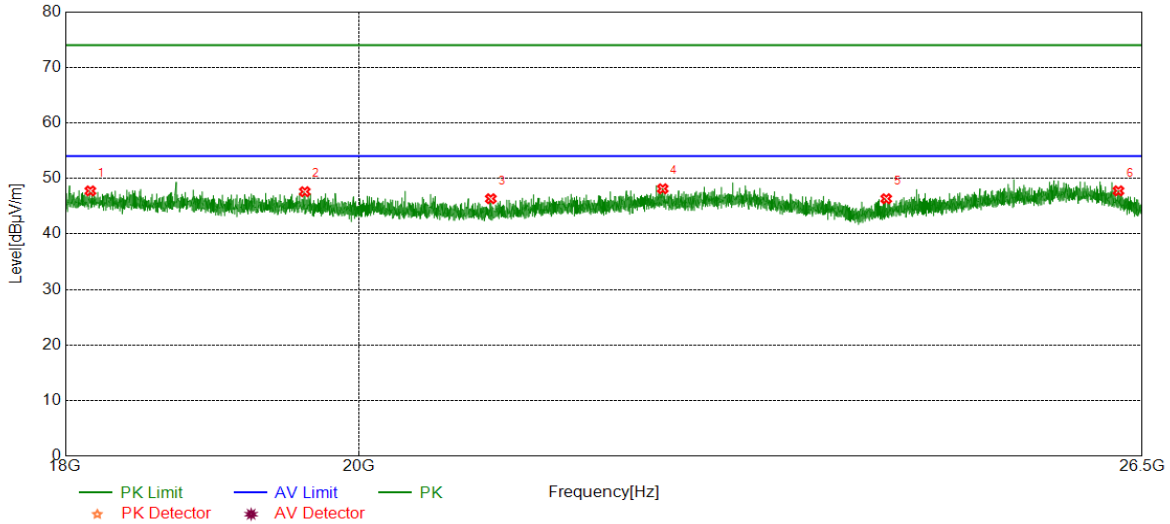


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	18162.3662	48.82	-1.07	47.75	74.00	-26.25	Horizontal
2	19616.8617	48.30	-0.69	47.61	74.00	-26.39	Horizontal
3	20972.7473	47.33	-0.99	46.34	74.00	-27.66	Horizontal
4	22309.0809	47.59	0.55	48.14	74.00	-25.86	Horizontal
5	24174.1674	47.33	-0.99	46.34	74.00	-27.66	Horizontal
6	26277.2777	46.62	1.14	47.76	74.00	-26.24	Horizontal

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

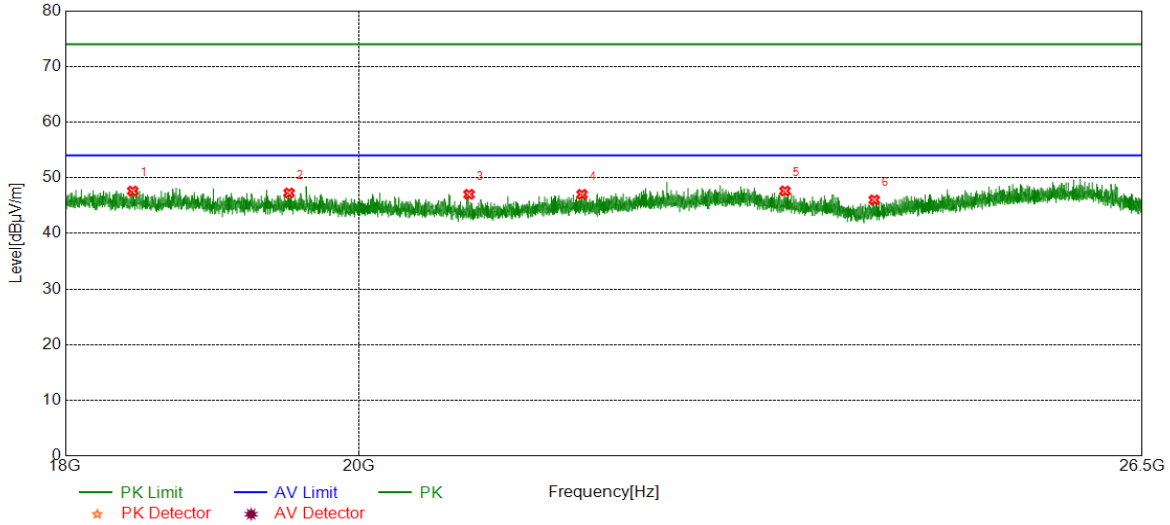

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	18441.1941	48.57	-0.96	47.61	74.00	-26.39	Vertical
2	19507.2007	47.97	-0.72	47.25	74.00	-26.75	Vertical
3	20809.5310	47.92	-0.90	47.02	74.00	-26.98	Vertical
4	21671.5172	47.30	-0.28	47.02	74.00	-26.98	Vertical
5	23311.3311	47.20	0.42	47.62	74.00	-26.38	Vertical
6	24070.4570	47.16	-1.14	46.02	74.00	-27.98	Vertical


- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part IV: 30MHz~1GHz

SPURIOUS EMISSIONS 30M TO 1GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

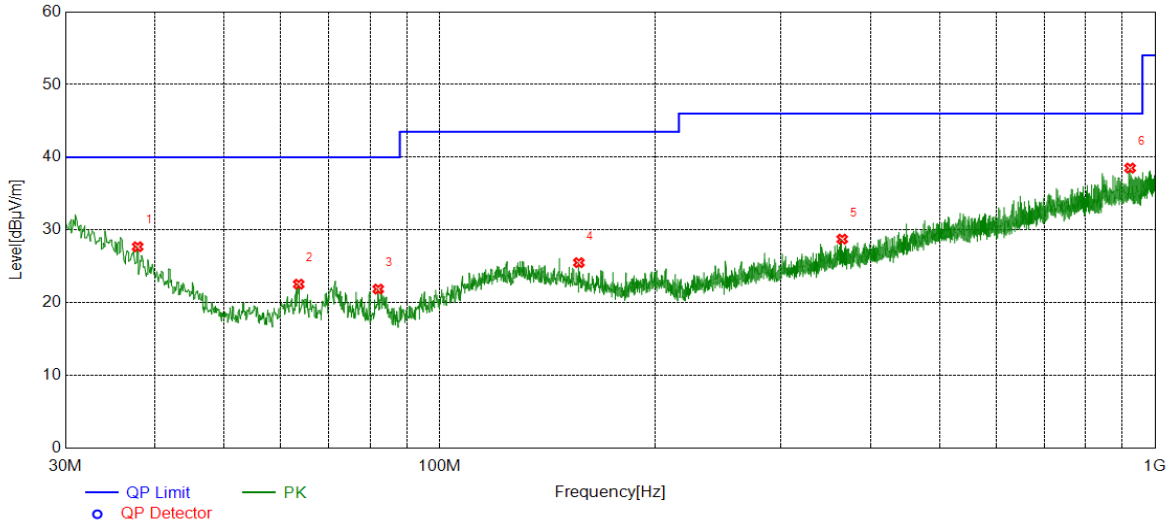


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	37.8578	5.70	22.00	27.70	40.00	-12.30	Horizontal
2	63.5654	8.25	14.30	22.55	40.00	-17.45	Horizontal
3	82.0942	7.48	14.40	21.88	40.00	-18.12	Horizontal
4	156.5977	6.51	19.00	25.51	43.50	-17.99	Horizontal
5	365.3625	6.68	22.06	28.74	46.00	-17.26	Horizontal
6	922.6833	7.09	31.42	38.51	46.00	-7.49	Horizontal

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

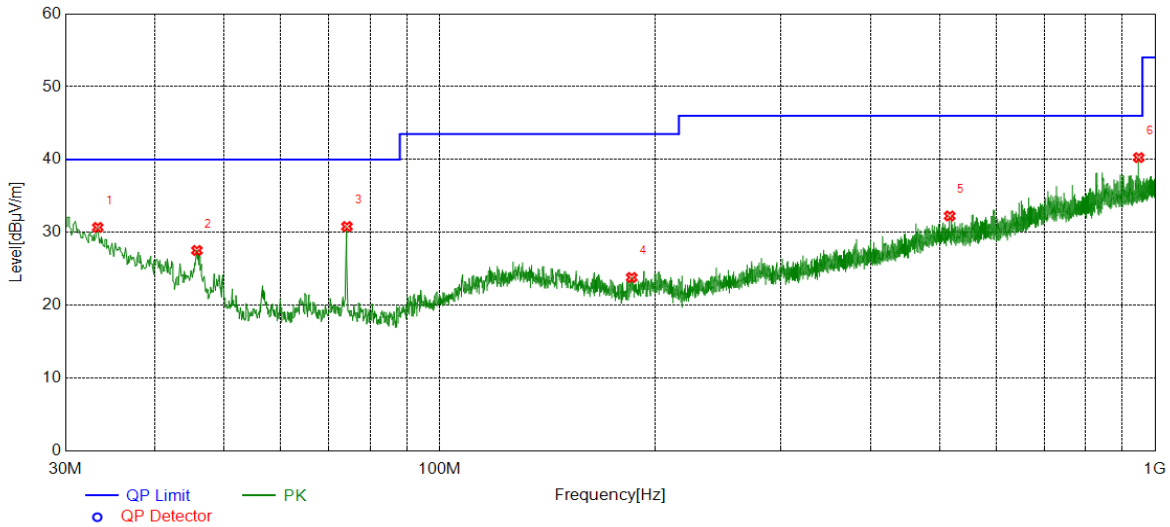

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	33.2983	5.74	24.95	30.69	40.00	-9.31	Vertical
2	45.8126	10.41	17.12	27.53	40.00	-12.47	Vertical
3	74.2364	16.20	14.61	30.81	40.00	-9.19	Vertical
4	185.6036	5.58	18.24	23.82	43.50	-19.68	Vertical
5	516.4066	6.34	25.92	32.26	46.00	-13.74	Vertical
6	948.7789	8.50	31.77	40.27	46.00	-5.73	Vertical


Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.



Part V: 9KHz~30MHz

SPURIOUS EMISSIONS Below 30MHz (WORST CASE CONFIGURATION-FACE ON)

Test Mode	Channel	Frequency Range	Verdict
11B	HCH	9kHz~150kHz	PASS

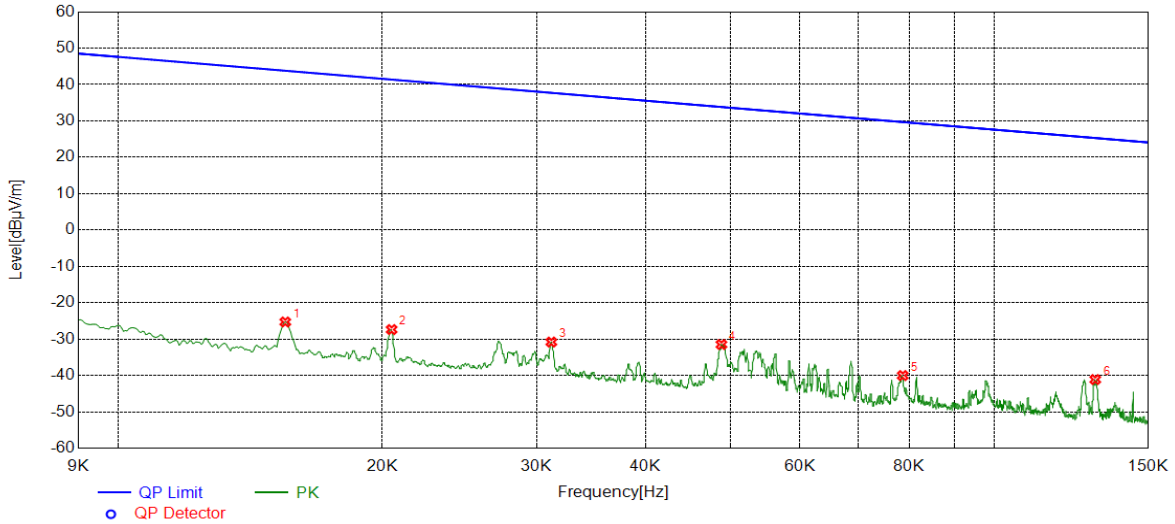


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.0155	35.69	-60.98	-25.29	43.77	-69.06	Horizontal
2	0.0205	33.47	-60.85	-27.38	41.38	-68.76	Horizontal
3	0.0312	30.11	-60.92	-30.81	37.72	-68.53	Horizontal
4	0.0488	29.54	-61.03	-31.49	33.83	-65.32	Horizontal
5	0.0786	21.30	-61.33	-40.03	29.69	-69.72	Horizontal
6	0.1304	19.96	-61.08	-41.12	25.30	-66.42	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



Test Mode	Channel	Frequency Range	Verdict
11B	HCH	150kHz~490kHz	PASS

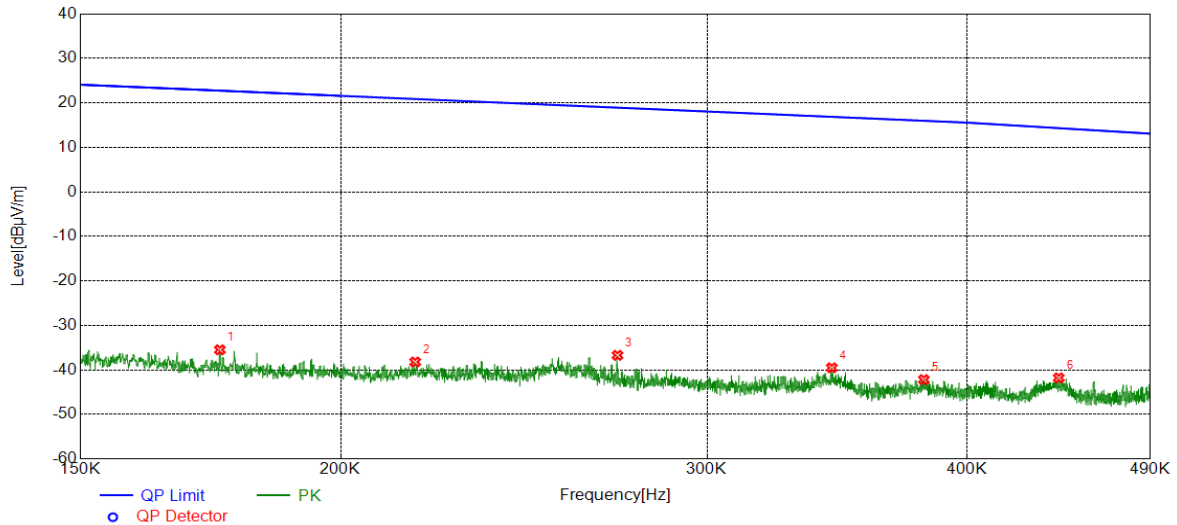


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.1750	25.71	-61.19	-35.48	22.75	-58.23	Vertical
2	0.2172	22.75	-60.97	-38.22	20.87	-59.09	Vertical
3	0.2717	24.07	-60.79	-36.72	18.92	-55.64	Vertical
4	0.3444	21.20	-60.72	-39.52	16.86	-56.38	Vertical
5	0.3813	18.51	-60.69	-42.18	15.98	-58.16	Vertical
6	0.4427	18.85	-60.64	-41.79	14.32	-56.11	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



Test Mode	Channel	Frequency Range	Verdict
11B	HCH	490kHz~30MHz	PASS

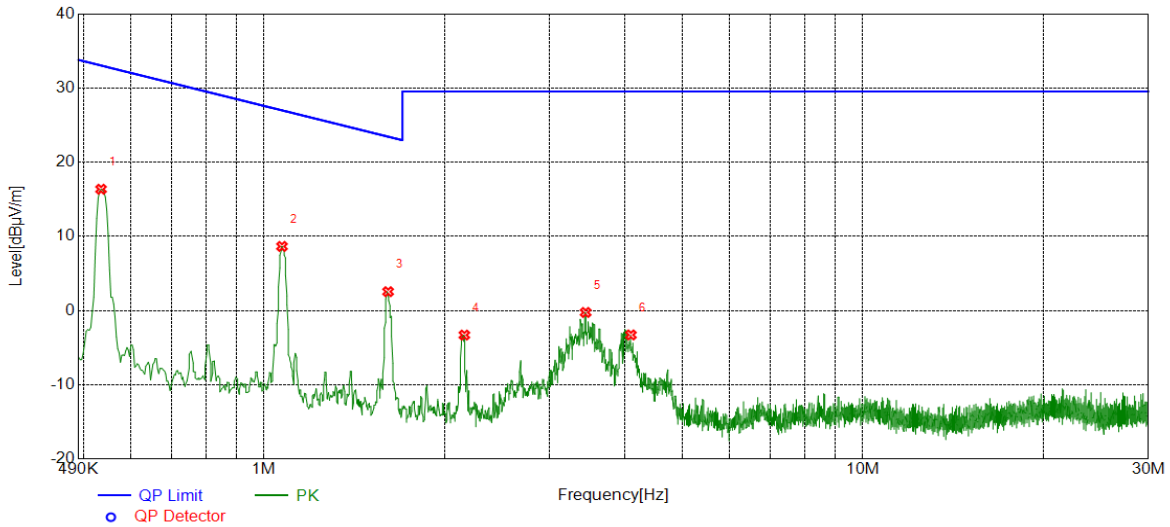

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.5343	36.96	-20.60	16.36	33.05	-16.69	Vertical
2	1.0714	29.00	-20.35	8.65	27.01	-18.36	Vertical
3	1.6115	22.82	-20.27	2.55	23.46	-20.91	Vertical
4	2.1604	16.95	-20.25	-3.30	29.54	-32.84	Vertical
5	3.4442	20.03	-20.28	-0.25	29.54	-29.79	Vertical
6	4.0994	16.78	-20.06	-3.28	29.54	-32.82	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a)

FREQUENCY (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

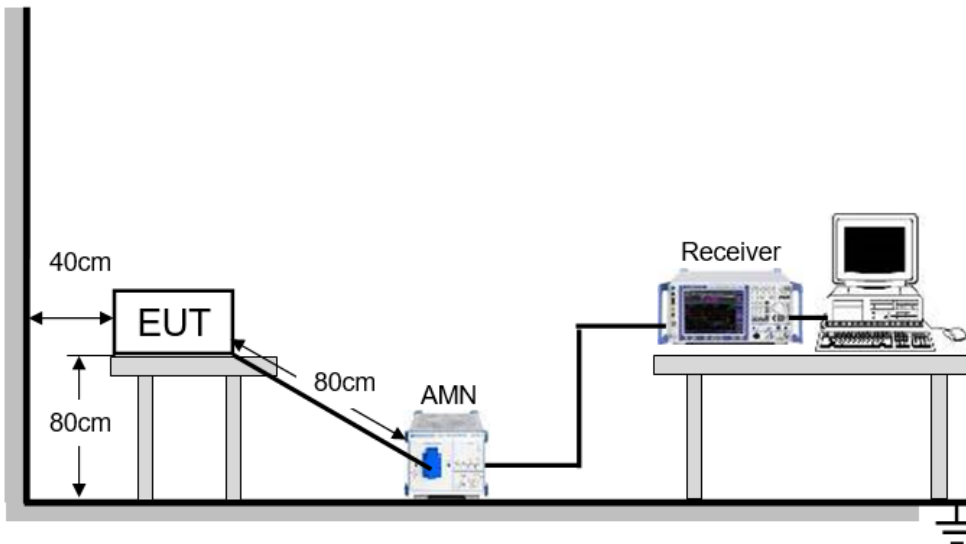


The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.



LINE L RESULTS (WORST-CASE CONFIGURATION)

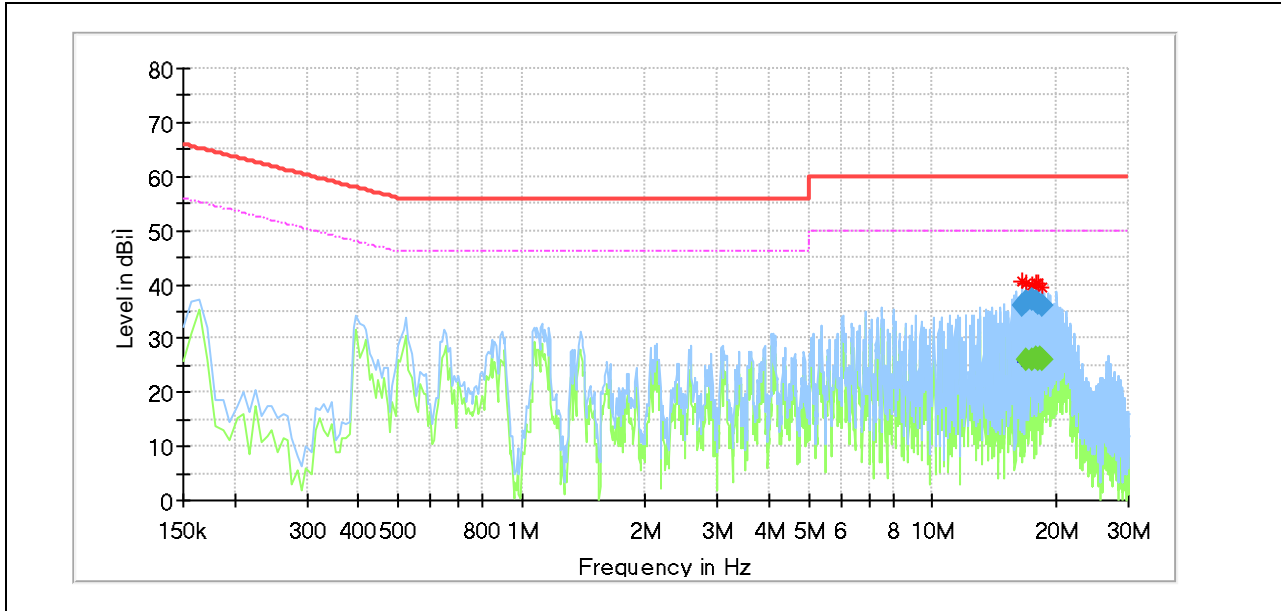


Final_Result

Frequency [MHz]	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	Filter	Corr. [dB]
16.589888	35.91	---	60.00	24.09	1000.0	9.000	L1	OFF	9.5
16.836150	---	25.96	50.00	24.04	1000.0	9.000	L1	OFF	9.6
16.836150	36.94	---	60.00	23.06	1000.0	9.000	L1	OFF	9.6
17.530163	---	26.00	50.00	24.00	1000.0	9.000	L1	OFF	9.6
17.530163	37.05	---	60.00	22.95	1000.0	9.000	L1	OFF	9.6
17.828663	---	26.38	50.00	23.62	1000.0	9.000	L1	OFF	9.6
17.828663	36.76	---	60.00	23.24	1000.0	9.000	L1	OFF	9.6
18.060000	---	26.08	50.00	23.92	1000.0	9.000	L1	OFF	9.6
18.060000	36.48	---	60.00	23.52	1000.0	9.000	L1	OFF	9.6
18.328650	---	26.37	50.00	23.63	1000.0	9.000	L1	OFF	9.6
18.530138	---	26.04	50.00	23.96	1000.0	9.000	L1	OFF	9.6
18.530138	36.03	---	60.00	23.97	1000.0	9.000	L1	OFF	9.6

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
 4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
 5. Pre-testing all test modes and channels, and find the HCH of 11b which is the worst case, so only the worst case is included in this test report.

LINE N RESULTS (WORST-CASE CONFIGURATION)

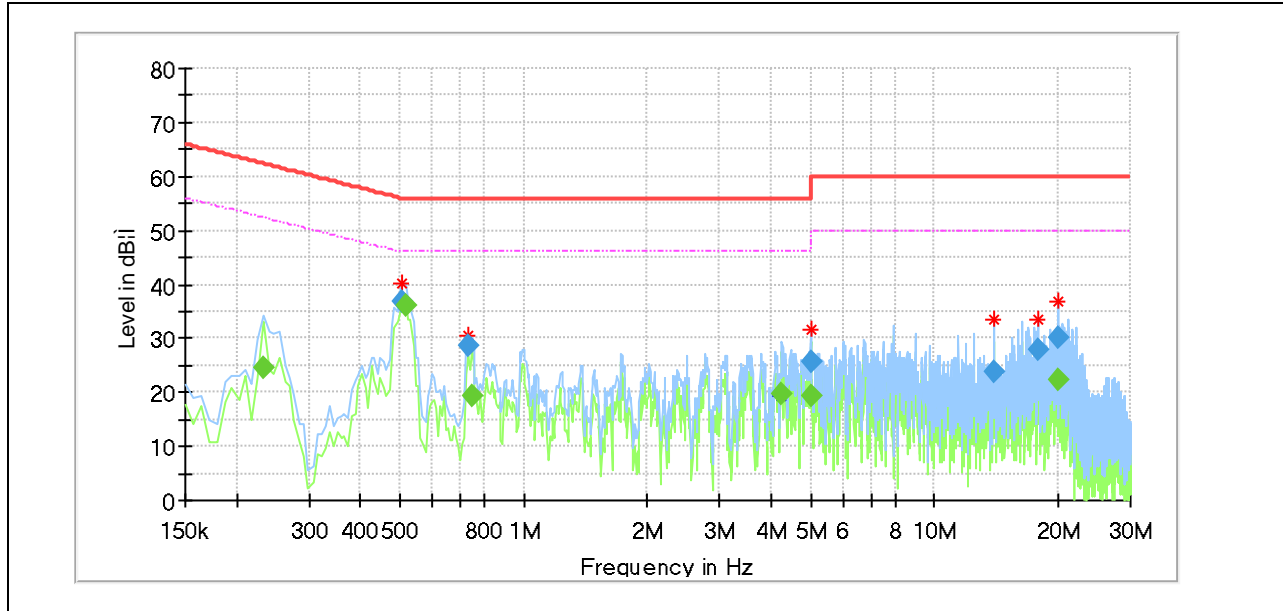

Final_Result

Frequency [MHz]	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	Filter	Corr. [dB]
0.232088	---	24.53	52.38	27.84	1000.0	9.000	N	OFF	9.6
0.508200	36.95	---	56.00	19.05	1000.0	9.000	N	OFF	9.6
0.515663	---	36.06	46.00	9.95	1000.0	9.000	N	OFF	9.6
0.732075	28.56	---	56.00	27.44	1000.0	9.000	N	OFF	9.5
0.747000	---	19.23	46.00	26.77	1000.0	9.000	N	OFF	9.5
4.254375	---	19.55	46.00	26.45	1000.0	9.000	N	OFF	9.6
4.993163	25.66	---	56.00	30.34	1000.0	9.000	N	OFF	9.7
4.993163	---	19.37	46.00	26.63	1000.0	9.000	N	OFF	9.7
13.948163	23.84	---	60.00	36.16	1000.0	9.000	N	OFF	9.5
17.925675	27.85	---	60.00	32.15	1000.0	9.000	N	OFF	9.6
20.074875	---	22.48	50.00	27.52	1000.0	9.000	N	OFF	9.6
20.074875	30.01	---	60.00	29.99	1000.0	9.000	N	OFF	9.6

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
 4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
 5. Pre-testing all test modes and channels, and find the HCH of 11b which is the worst case, so only the worst case is included in this test report.



9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi

END OF REPORT