




Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

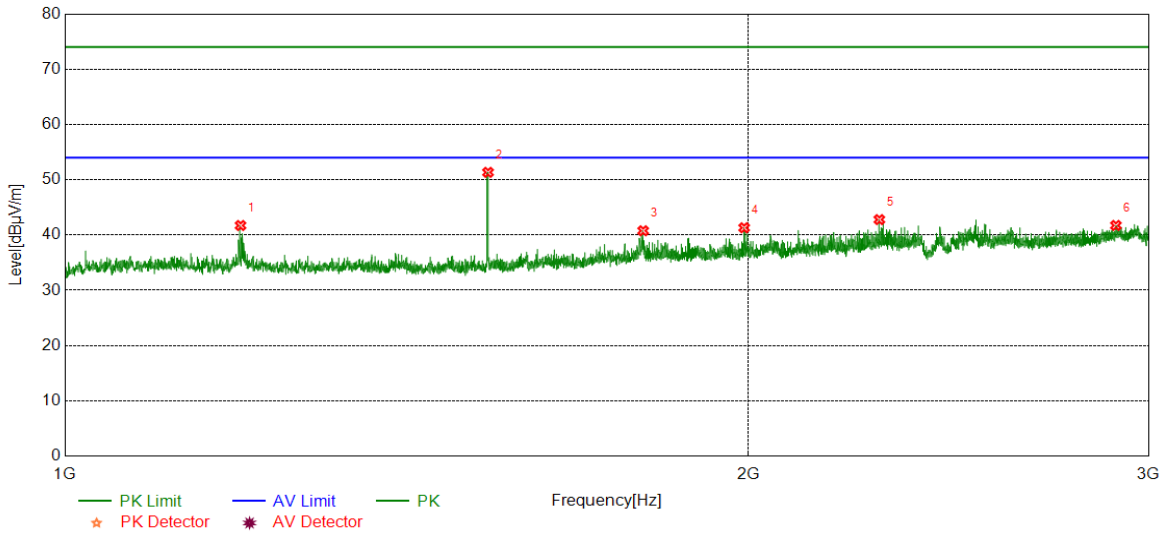


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1195.0244	47.29	-5.57	41.72	74.00	-32.28	Horizontal
2	1535.8170	57.09	-5.75	51.34	74.00	-22.66	Horizontal
3	1797.3497	44.59	-3.82	40.77	74.00	-33.23	Horizontal
4	1991.1239	44.39	-3.08	41.31	74.00	-32.69	Horizontal
5	2283.6605	44.73	-1.94	42.79	74.00	-31.21	Horizontal
6	2902.4878	41.37	0.36	41.73	74.00	-32.27	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

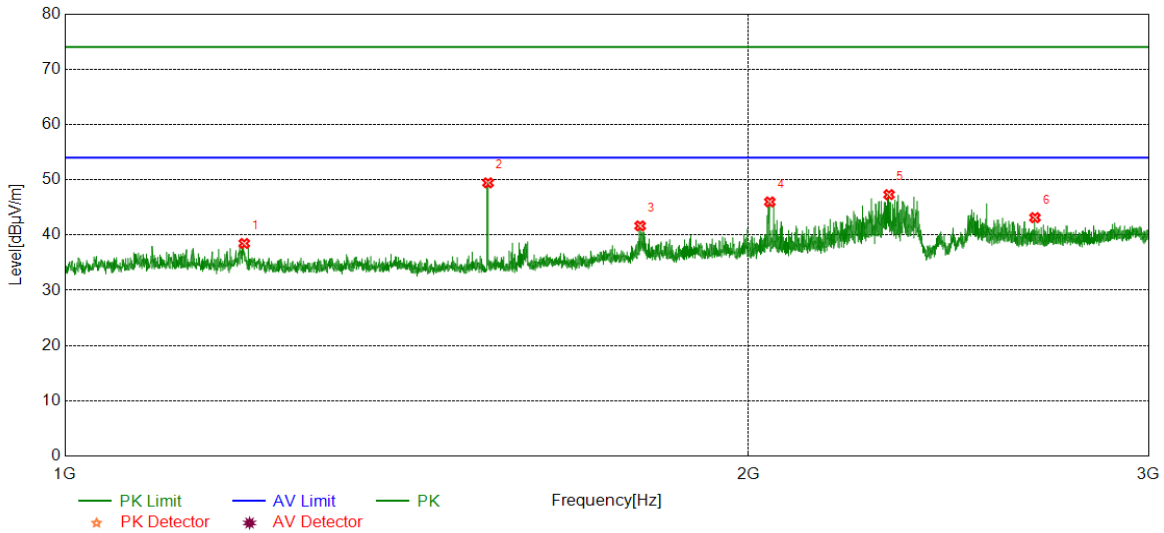


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1199.5249	44.03	-5.56	38.47	74.00	-35.53	Vertical
2	1535.8170	55.19	-5.75	49.44	74.00	-24.56	Vertical
3	1791.8490	45.41	-3.76	41.65	74.00	-32.35	Vertical
4	2043.6305	48.38	-2.39	45.99	74.00	-28.01	Vertical
5	2306.1633	49.04	-1.73	47.31	74.00	-26.69	Vertical
6	2673.9592	43.85	-0.71	43.14	74.00	-30.86	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

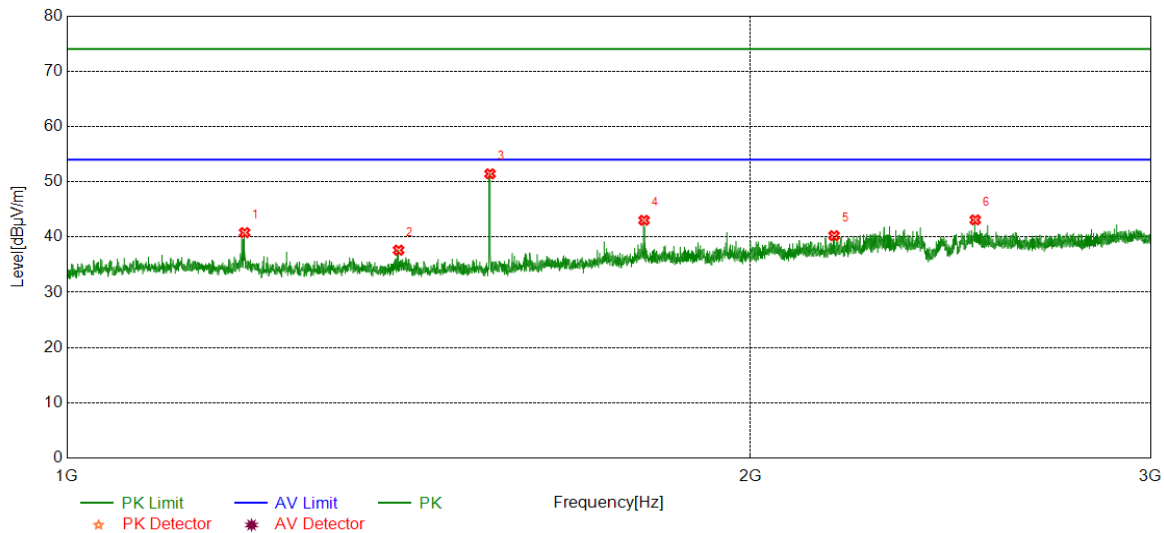


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.5247	46.35	-5.56	40.79	74.00	-33.21	Horizontal
2	1399.8000	43.28	-5.66	37.62	74.00	-36.38	Horizontal
3	1535.8170	57.19	-5.75	51.44	74.00	-22.56	Horizontal
4	1795.3494	46.82	-3.79	43.03	74.00	-30.97	Horizontal
5	2176.6471	42.57	-2.33	40.24	74.00	-33.76	Horizontal
6	2511.6890	43.48	-0.38	43.10	74.00	-30.90	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

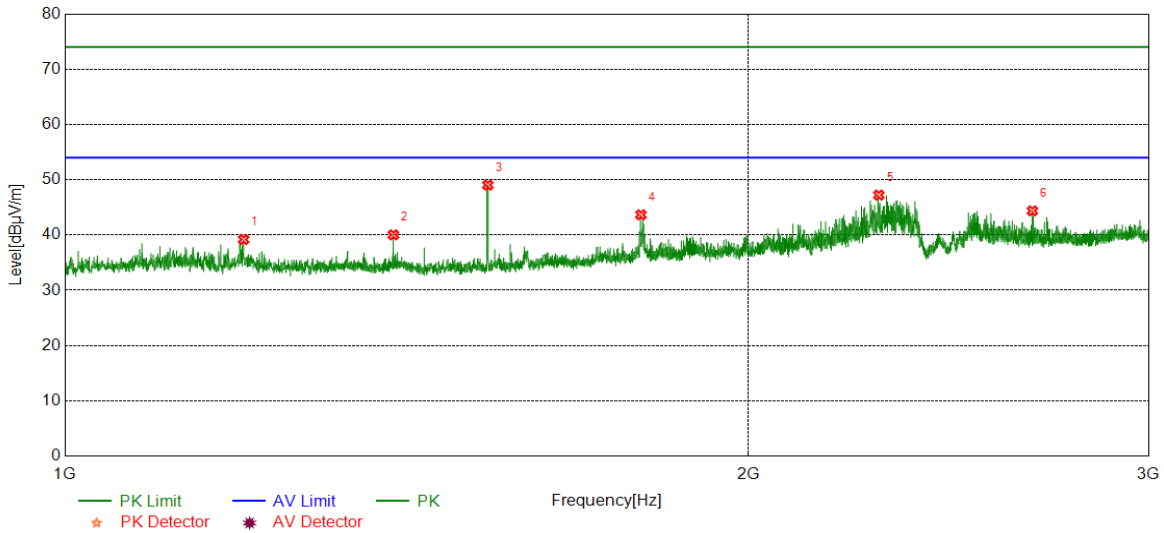


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1198.7748	44.74	-5.56	39.18	74.00	-34.82	Vertical
2	1395.2994	45.74	-5.71	40.03	74.00	-33.97	Vertical
3	1535.5669	54.79	-5.75	49.04	74.00	-24.96	Vertical
4	1793.3492	47.43	-3.77	43.66	74.00	-30.34	Vertical
5	2282.4103	49.16	-1.94	47.22	74.00	-26.78	Vertical
6	2666.9584	45.09	-0.72	44.37	74.00	-29.63	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

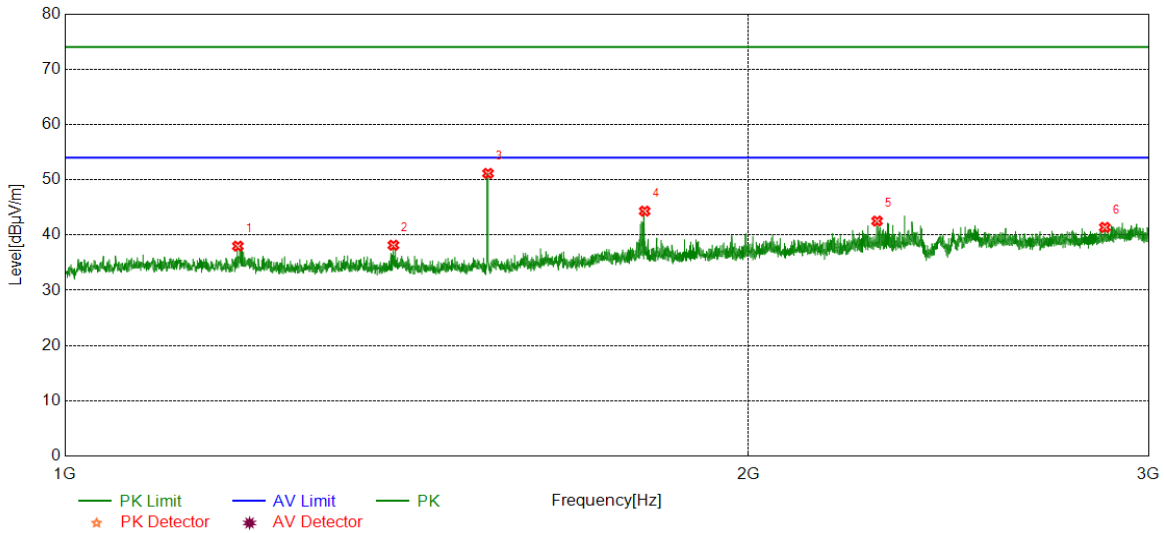


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1191.7740	43.56	-5.57	37.99	74.00	-36.01	Horizontal
2	1395.2994	43.86	-5.71	38.15	74.00	-35.85	Horizontal
3	1535.8170	56.90	-5.75	51.15	74.00	-22.85	Horizontal
4	1800.1000	48.17	-3.85	44.32	74.00	-29.68	Horizontal
5	2278.4098	44.50	-1.97	42.53	74.00	-31.47	Horizontal
6	2870.2338	41.24	0.14	41.38	74.00	-32.62	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

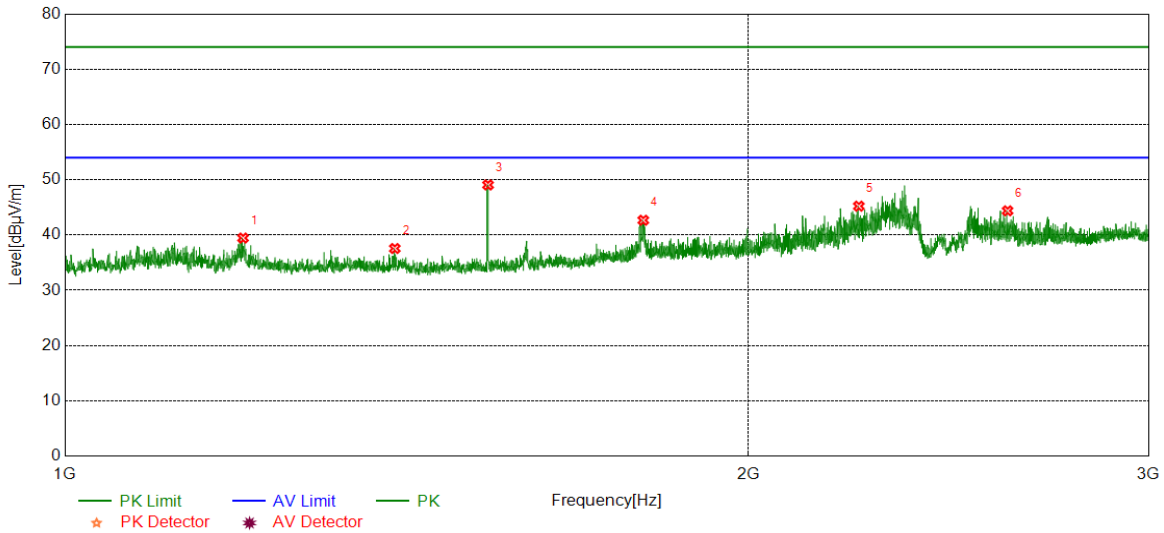


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1198.0248	45.01	-5.56	39.45	74.00	-34.55	Vertical
2	1397.2997	43.25	-5.69	37.56	74.00	-36.44	Vertical
3	1535.8170	54.81	-5.75	49.06	74.00	-24.94	Vertical
4	1797.5997	46.49	-3.82	42.67	74.00	-31.33	Vertical
5	2236.6546	47.46	-2.24	45.22	74.00	-28.78	Vertical
6	2600.7001	45.07	-0.69	44.38	74.00	-29.62	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

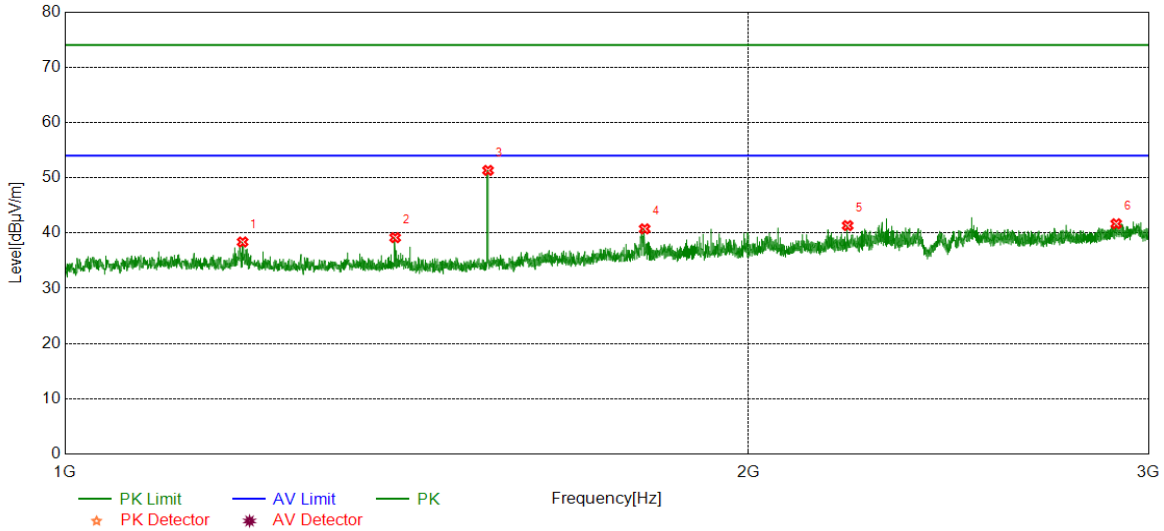


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.5247	43.94	-5.56	38.38	74.00	-35.62	Horizontal
2	1397.7997	44.84	-5.68	39.16	74.00	-34.84	Horizontal
3	1535.8170	57.08	-5.75	51.33	74.00	-22.67	Horizontal
4	1800.1000	44.60	-3.85	40.75	74.00	-33.25	Horizontal
5	2211.4014	43.66	-2.32	41.34	74.00	-32.66	Horizontal
6	2903.4879	41.30	0.37	41.67	74.00	-32.33	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

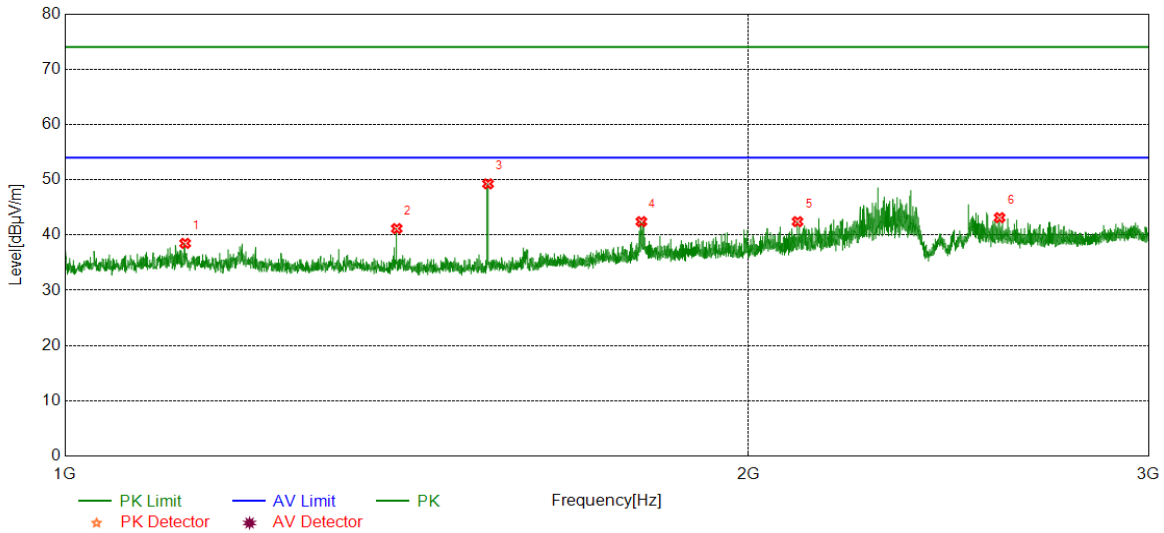


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1129.7662	43.95	-5.46	38.49	74.00	-35.51	Vertical
2	1400.0500	46.81	-5.65	41.16	74.00	-32.84	Vertical
3	1535.8170	55.01	-5.75	49.26	74.00	-24.74	Vertical
4	1794.0993	46.20	-3.78	42.42	74.00	-31.58	Vertical
5	2101.8877	44.94	-2.52	42.42	74.00	-31.58	Vertical
6	2579.6975	44.11	-0.97	43.14	74.00	-30.86	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

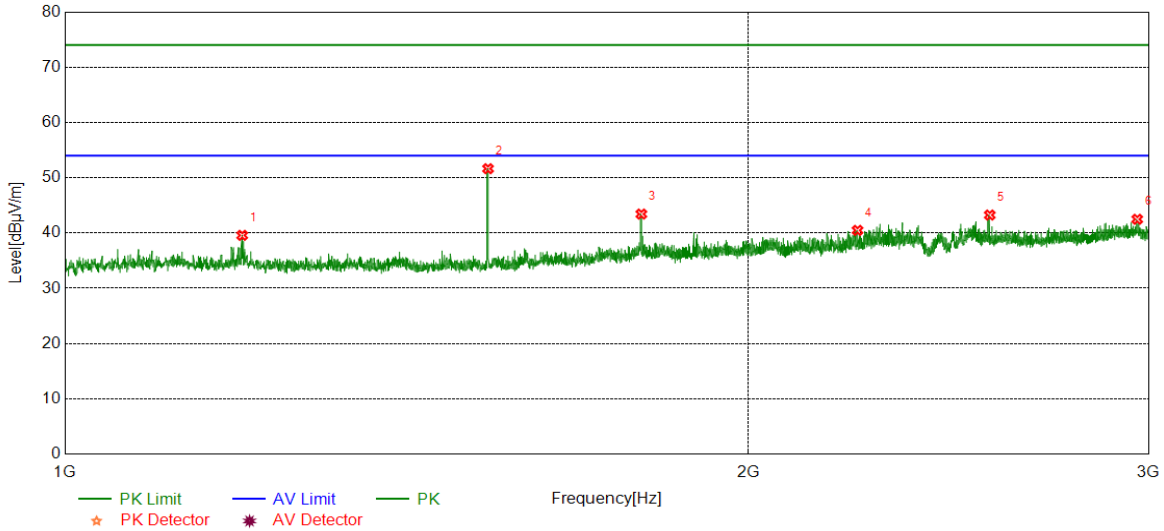


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.0246	45.14	-5.56	39.58	74.00	-34.42	Horizontal
2	1535.8170	57.39	-5.75	51.64	74.00	-22.36	Horizontal
3	1794.0993	47.21	-3.78	43.43	74.00	-30.57	Horizontal
4	2233.6542	42.69	-2.21	40.48	74.00	-33.52	Horizontal
5	2554.1943	44.23	-0.98	43.25	74.00	-30.75	Horizontal
6	2965.9957	41.43	1.06	42.49	74.00	-31.51	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

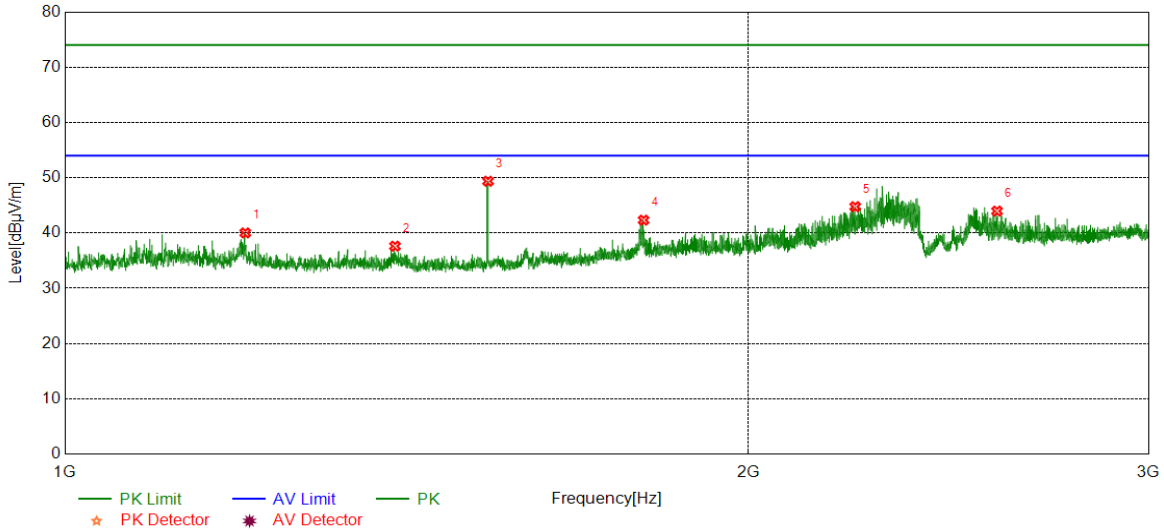


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1200.7751	45.56	-5.54	40.02	74.00	-33.98	Vertical
2	1397.5497	43.30	-5.68	37.62	74.00	-36.38	Vertical
3	1535.8170	55.12	-5.75	49.37	74.00	-24.63	Vertical
4	1798.0998	46.16	-3.83	42.33	74.00	-31.67	Vertical
5	2228.4036	46.94	-2.17	44.77	74.00	-29.23	Vertical
6	2572.9466	44.81	-0.84	43.97	74.00	-30.03	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

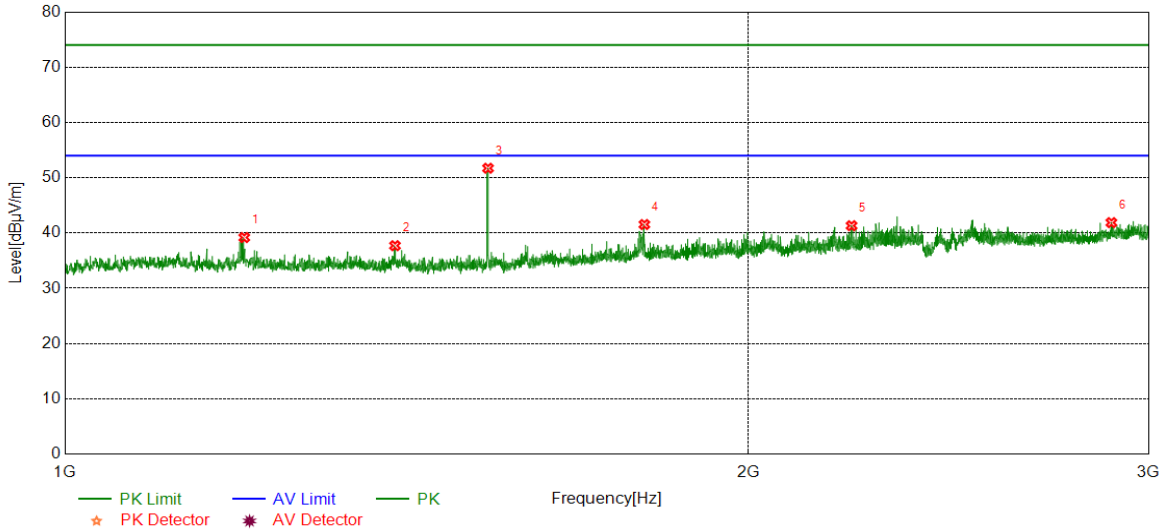


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1199.5249	44.74	-5.56	39.18	74.00	-34.82	Horizontal
2	1397.5497	43.39	-5.68	37.71	74.00	-36.29	Horizontal
3	1535.8170	57.47	-5.75	51.72	74.00	-22.28	Horizontal
4	1799.6000	45.38	-3.84	41.54	74.00	-32.46	Horizontal
5	2220.1525	43.54	-2.22	41.32	74.00	-32.68	Horizontal
6	2889.2362	41.35	0.53	41.88	74.00	-32.12	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

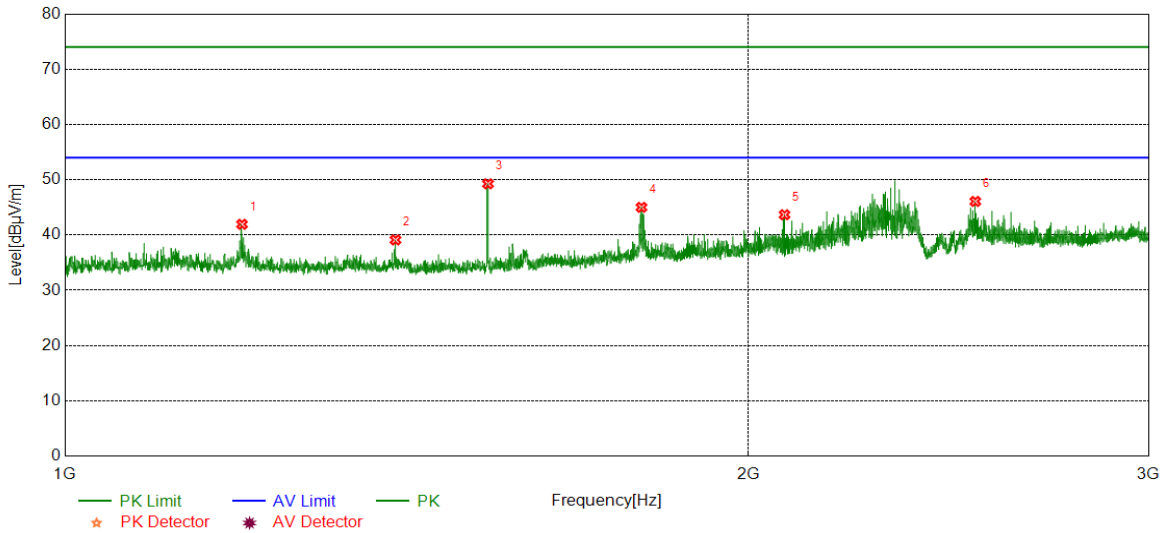


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.7746	47.50	-5.56	41.94	74.00	-32.06	Vertical
2	1398.2998	44.79	-5.68	39.11	74.00	-34.89	Vertical
3	1535.8170	55.02	-5.75	49.27	74.00	-24.73	Vertical
4	1794.3493	48.79	-3.78	45.01	74.00	-28.99	Vertical
5	2074.3843	46.44	-2.77	43.67	74.00	-30.33	Vertical
6	2516.9396	46.42	-0.34	46.08	74.00	-27.92	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

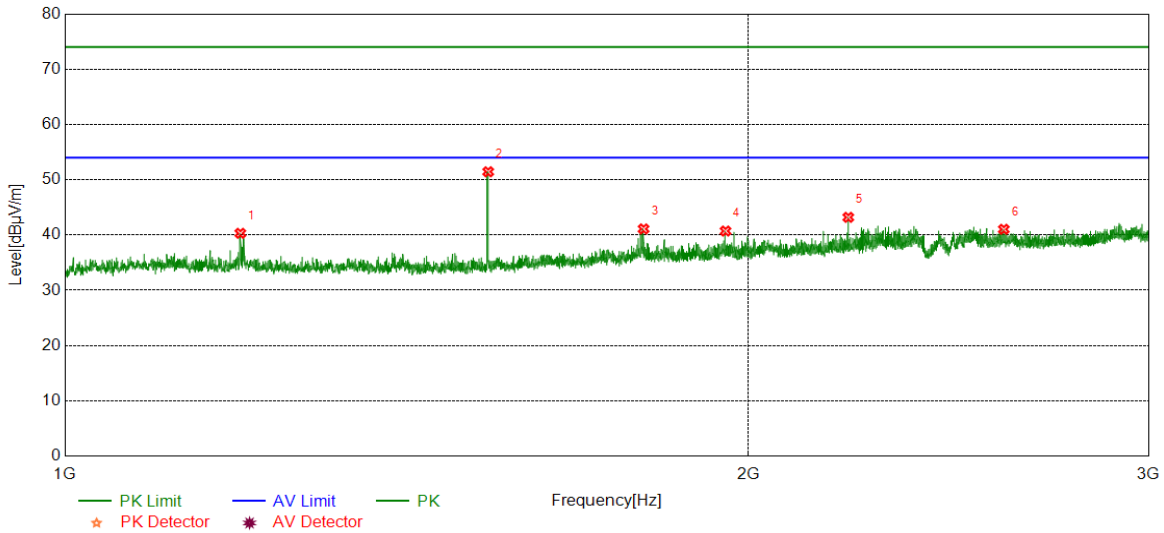


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1194.7743	45.88	-5.57	40.31	74.00	-33.69	Horizontal
2	1536.0670	57.20	-5.75	51.45	74.00	-22.55	Horizontal
3	1798.0998	44.93	-3.83	41.10	74.00	-32.90	Horizontal
4	1953.8692	43.71	-2.99	40.72	74.00	-33.28	Horizontal
5	2212.9016	45.50	-2.30	43.20	74.00	-30.80	Horizontal
6	2590.6988	41.80	-0.76	41.04	74.00	-32.96	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

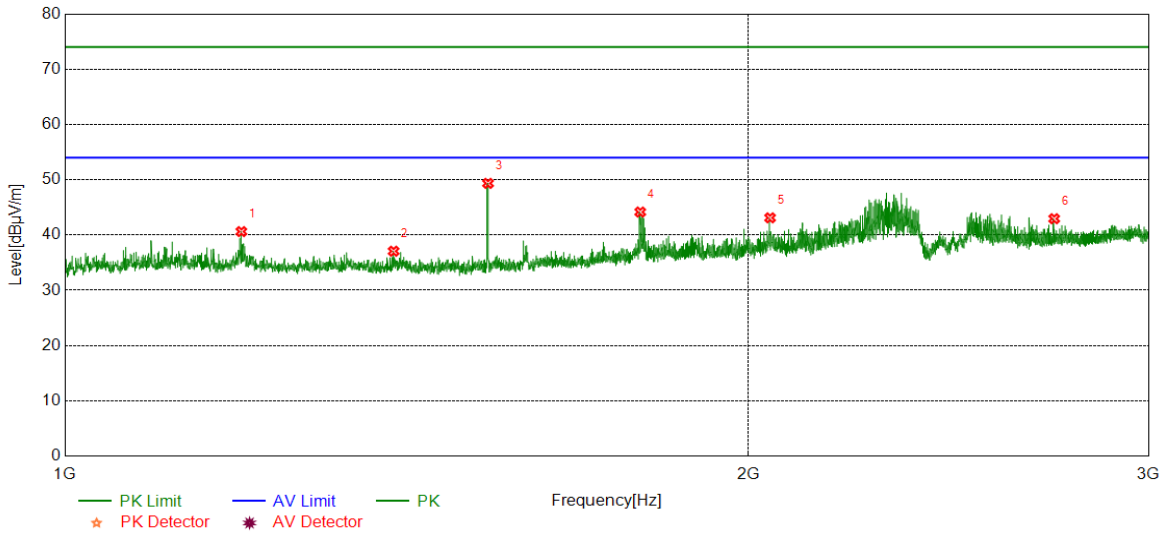

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.0245	46.18	-5.56	40.62	74.00	-33.38	Vertical
2	1395.5494	42.78	-5.71	37.07	74.00	-36.93	Vertical
3	1535.8170	55.10	-5.75	49.35	74.00	-24.65	Vertical
4	1792.0990	47.92	-3.76	44.16	74.00	-29.84	Vertical
5	2044.1305	45.50	-2.39	43.11	74.00	-30.89	Vertical
6	2726.4658	43.40	-0.45	42.95	74.00	-31.05	Vertical


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part II: 3GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

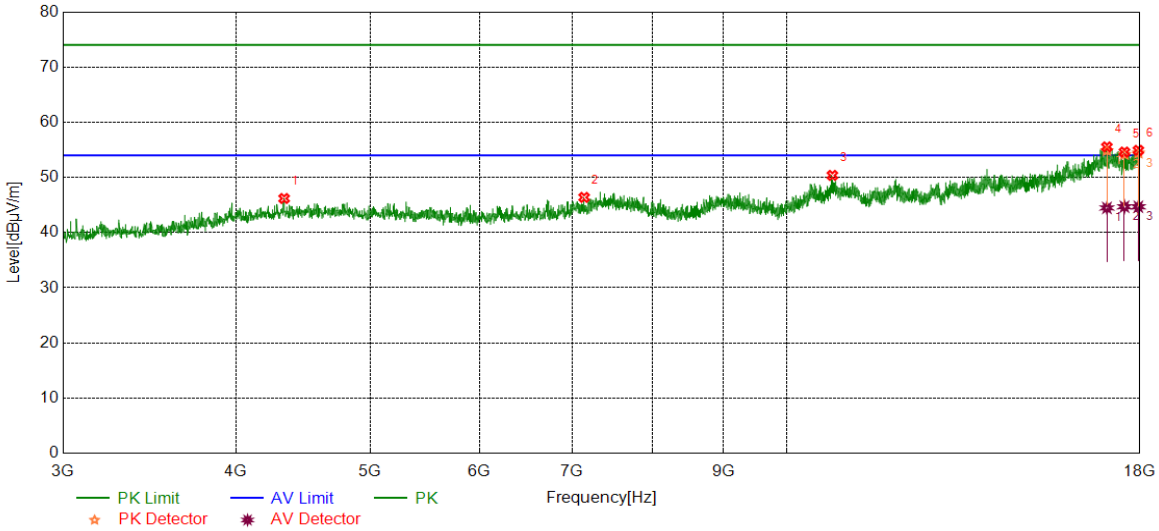

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4335.1669	40.96	5.22	46.18	74.00	-27.82	Horizontal
2	7140.5176	37.98	8.40	46.38	74.00	-27.62	Horizontal
3	10791.5990	38.28	12.09	50.37	74.00	-23.63	Horizontal
4	17038.0048	36.61	18.92	55.53	74.00	-18.47	Horizontal
5	17542.4428	37.05	17.55	54.60	74.00	-19.40	Horizontal
6	17953.1191	36.37	18.54	54.91	74.00	-19.09	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17038.0048	25.55	18.92	44.47	54.00	-9.53	Horizontal
2	17542.4428	27.14	17.55	44.69	54.00	-9.31	Horizontal
3	17953.1191	26.14	18.54	44.68	54.00	-9.32	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

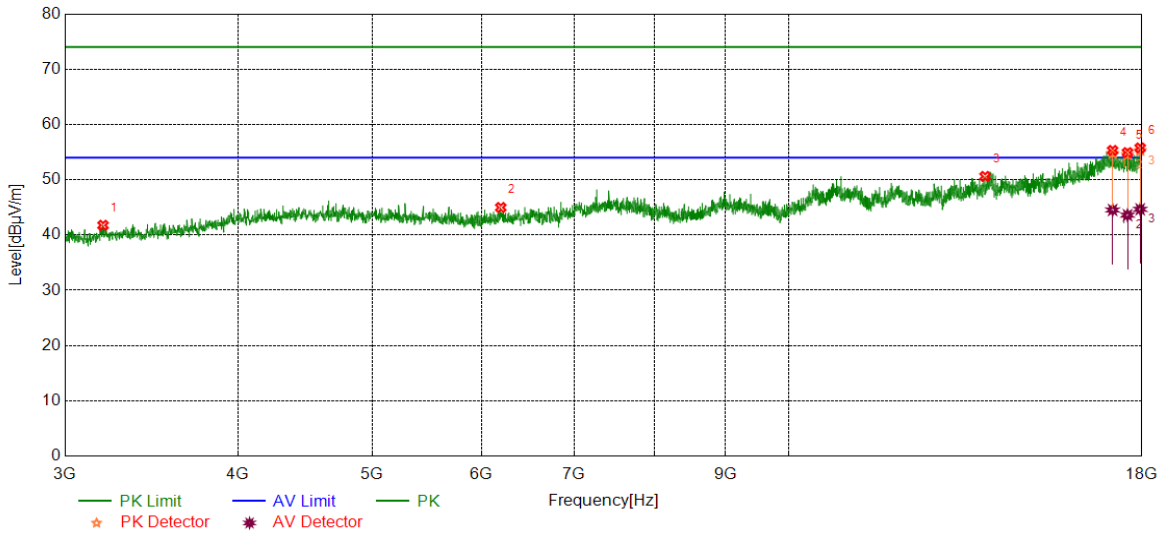

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3196.8996	40.63	1.13	41.76	74.00	-32.24	Vertical
2	6195.3994	38.86	6.12	44.98	74.00	-29.02	Vertical
3	13866.9834	37.06	13.54	50.60	74.00	-23.40	Vertical
4	17143.0179	37.02	18.28	55.30	74.00	-18.70	Vertical
5	17574.3218	37.03	17.88	54.91	74.00	-19.09	Vertical
6	17947.4934	37.26	18.50	55.76	74.00	-18.24	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17143.0179	26.25	18.28	44.53	54.00	-9.47	Vertical
2	17574.3218	25.71	17.88	43.59	54.00	-10.41	Vertical
3	17947.4934	26.15	18.50	44.65	54.00	-9.35	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

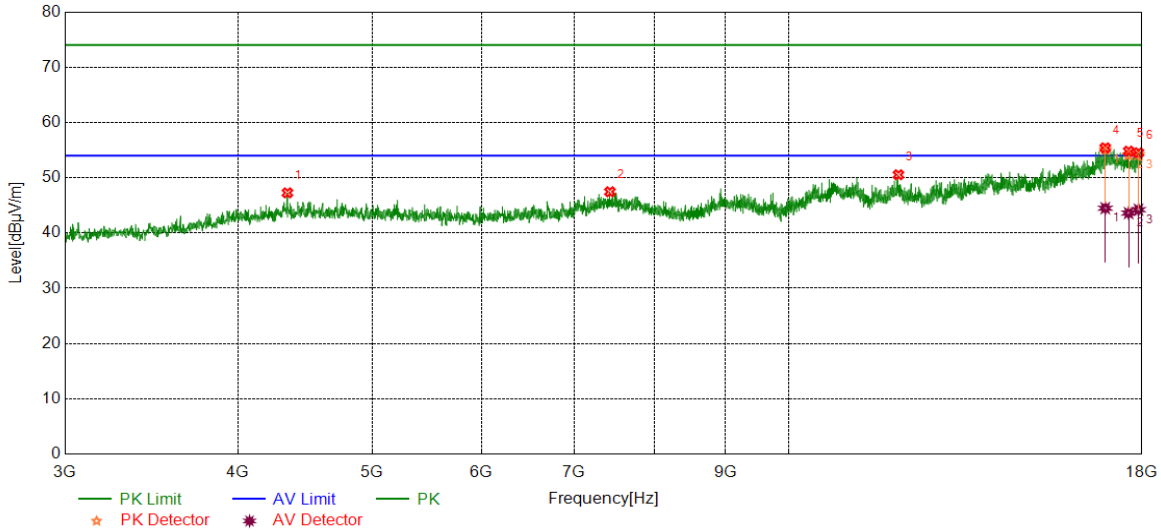

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4344.5431	41.95	5.32	47.27	74.00	-26.73	Horizontal
2	7429.3037	38.92	8.54	47.46	74.00	-26.54	Horizontal
3	12004.8756	37.70	12.84	50.54	74.00	-23.46	Horizontal
4	16934.8669	37.00	18.41	55.41	74.00	-18.59	Horizontal
5	17606.2008	37.11	17.71	54.82	74.00	-19.18	Horizontal
6	17896.8621	36.07	18.45	54.52	74.00	-19.48	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16934.8669	26.08	18.41	44.49	54.00	-9.51	Horizontal
2	17606.2008	25.90	17.71	43.61	54.00	-10.39	Horizontal
3	17896.8621	25.77	18.45	44.22	54.00	-9.78	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

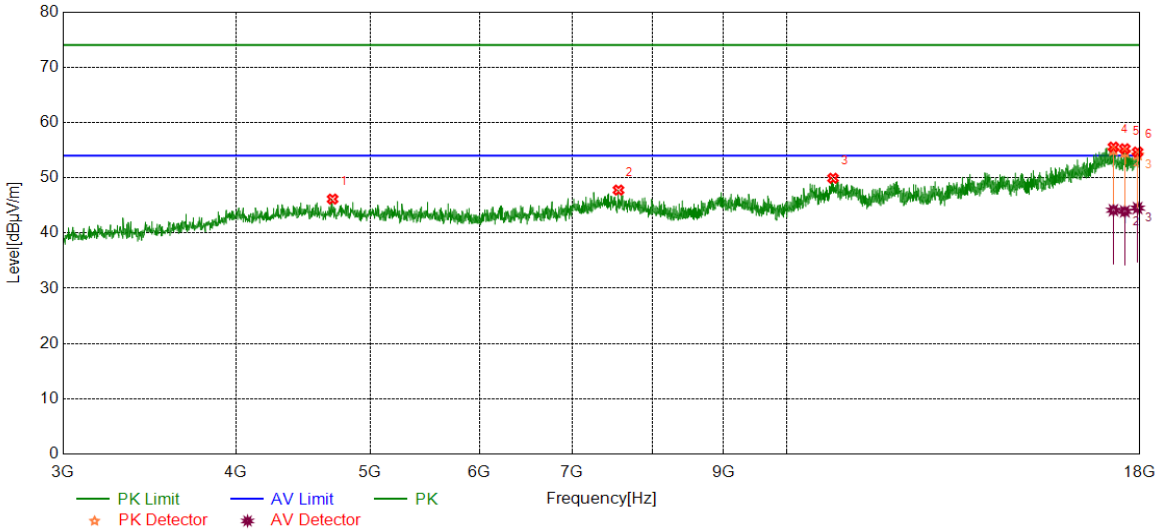

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4698.9624	40.57	5.57	46.14	74.00	-27.86	Vertical
2	7560.5701	39.18	8.59	47.77	74.00	-26.23	Vertical
3	10802.8504	37.82	12.09	49.91	74.00	-24.09	Vertical
4	17223.6530	38.05	17.50	55.55	74.00	-18.45	Vertical
5	17553.6942	37.23	18.01	55.24	74.00	-18.76	Vertical
6	17930.6163	36.50	18.15	54.65	74.00	-19.35	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17223.6530	26.63	17.50	44.13	54.00	-9.87	Vertical
2	17553.6942	25.91	18.01	43.92	54.00	-10.08	Vertical
3	17930.6163	26.37	18.15	44.52	54.00	-9.48	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

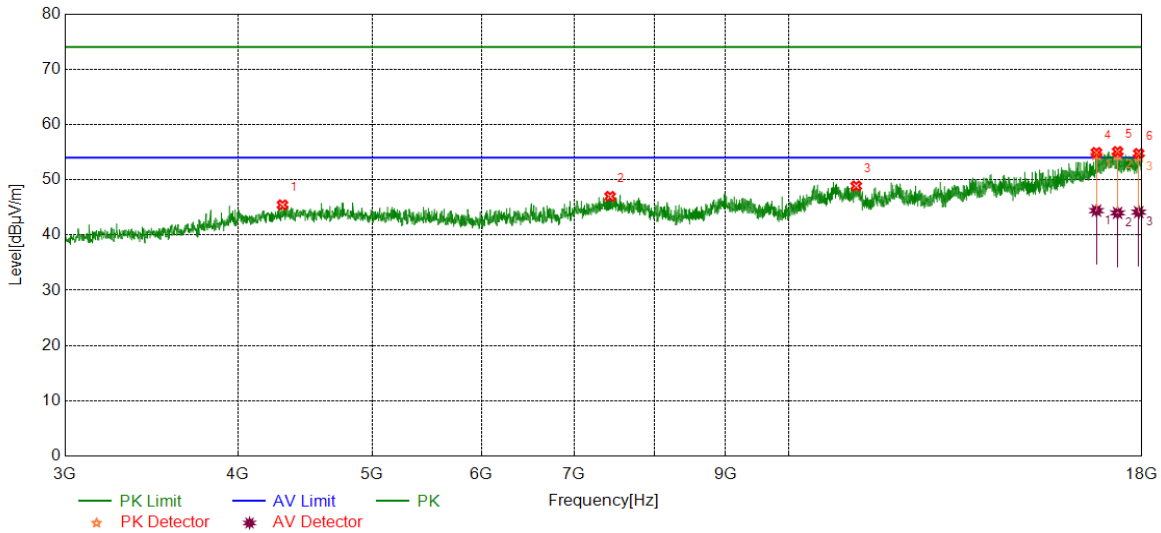

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4308.9136	40.43	5.02	45.45	74.00	-28.55	Horizontal
2	7431.1789	38.44	8.55	46.99	74.00	-27.01	Horizontal
3	11191.0239	36.90	11.97	48.87	74.00	-25.13	Horizontal
4	16689.2112	36.76	18.17	54.93	74.00	-19.07	Horizontal
5	17285.5357	37.35	17.76	55.11	74.00	-18.89	Horizontal
6	17904.3630	36.40	18.35	54.75	74.00	-19.25	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16689.2112	26.25	18.17	44.42	54.00	-9.58	Horizontal
2	17285.5357	26.24	17.76	44.00	54.00	-10.00	Horizontal
3	17904.3630	25.79	18.35	44.14	54.00	-9.86	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

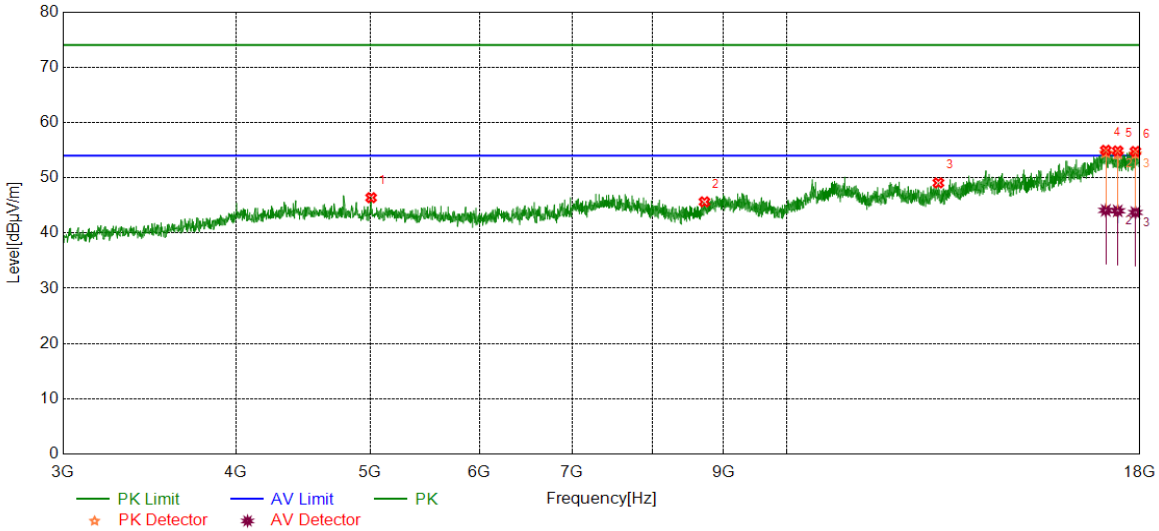

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5010.2513	41.00	5.39	46.39	74.00	-27.61	Vertical
2	8723.2154	37.98	7.66	45.64	74.00	-28.36	Vertical
3	12873.1091	37.11	11.96	49.07	74.00	-24.93	Vertical
4	17006.1258	36.43	18.54	54.97	74.00	-19.03	Vertical
5	17347.4184	37.12	17.73	54.85	74.00	-19.15	Vertical
6	17864.9831	36.34	18.42	54.76	74.00	-19.24	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17006.1258	25.56	18.54	44.10	54.00	-9.90	Vertical
2	17347.4184	26.28	17.73	44.01	54.00	-9.99	Vertical
3	17864.9831	25.30	18.42	43.72	54.00	-10.28	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

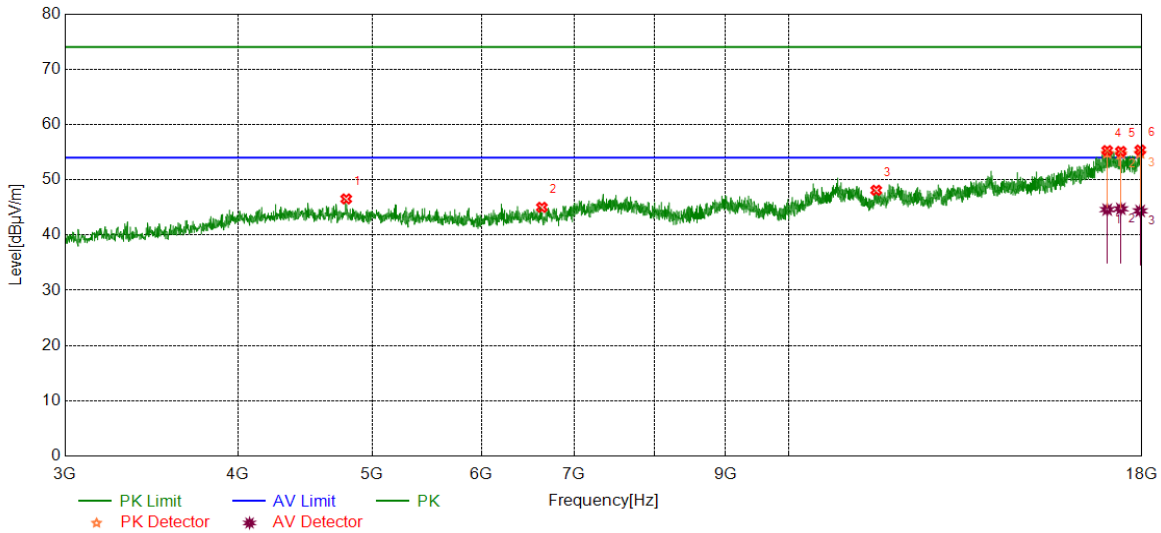

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4790.8489	40.43	6.10	46.53	74.00	-27.47	Horizontal
2	6634.2043	37.45	7.56	45.01	74.00	-28.99	Horizontal
3	11569.8212	36.85	11.25	48.10	74.00	-25.90	Horizontal
4	16989.2487	36.50	18.78	55.28	74.00	-18.72	Horizontal
5	17379.2974	36.52	18.60	55.12	74.00	-18.88	Horizontal
6	17947.4934	36.87	18.50	55.37	74.00	-18.63	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16989.2487	25.82	18.78	44.60	54.00	-9.40	Horizontal
2	17379.2974	26.14	18.60	44.74	54.00	-9.26	Horizontal
3	17947.4934	25.86	18.50	44.36	54.00	-9.64	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

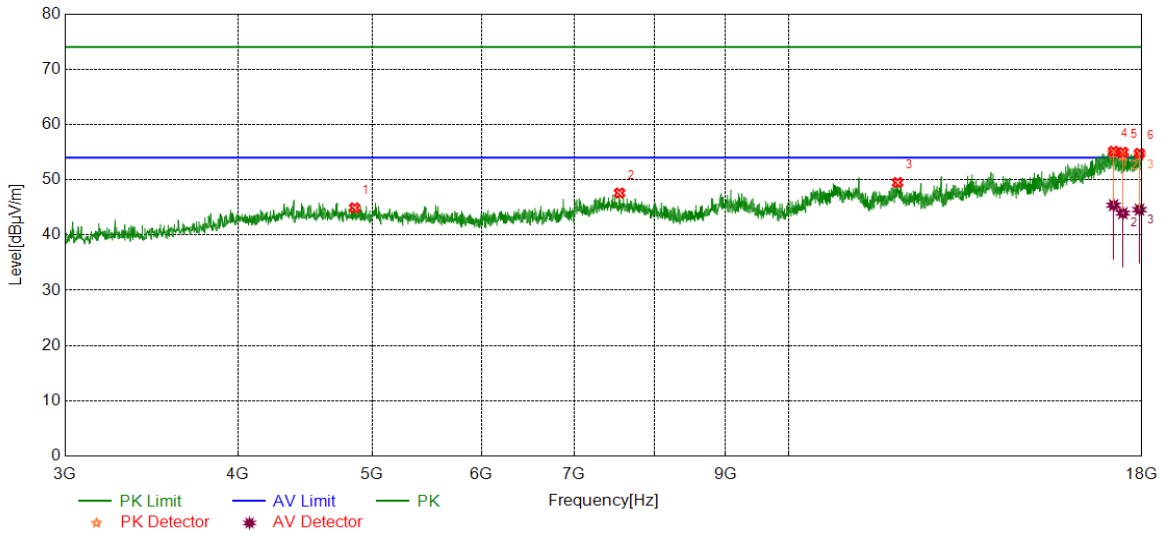

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4858.3573	39.53	5.38	44.91	74.00	-29.09	Vertical
2	7549.3187	39.09	8.51	47.60	74.00	-26.40	Vertical
3	11987.9985	36.62	12.87	49.49	74.00	-24.51	Vertical
4	17171.1464	36.82	18.33	55.15	74.00	-18.85	Vertical
5	17439.3049	37.10	17.87	54.97	74.00	-19.03	Vertical
6	17926.8659	36.74	18.03	54.77	74.00	-19.23	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17171.1464	27.06	18.33	45.39	54.00	-8.61	Vertical
2	17439.3049	26.08	17.87	43.95	54.00	-10.05	Vertical
3	17926.8659	26.56	18.03	44.59	54.00	-9.41	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

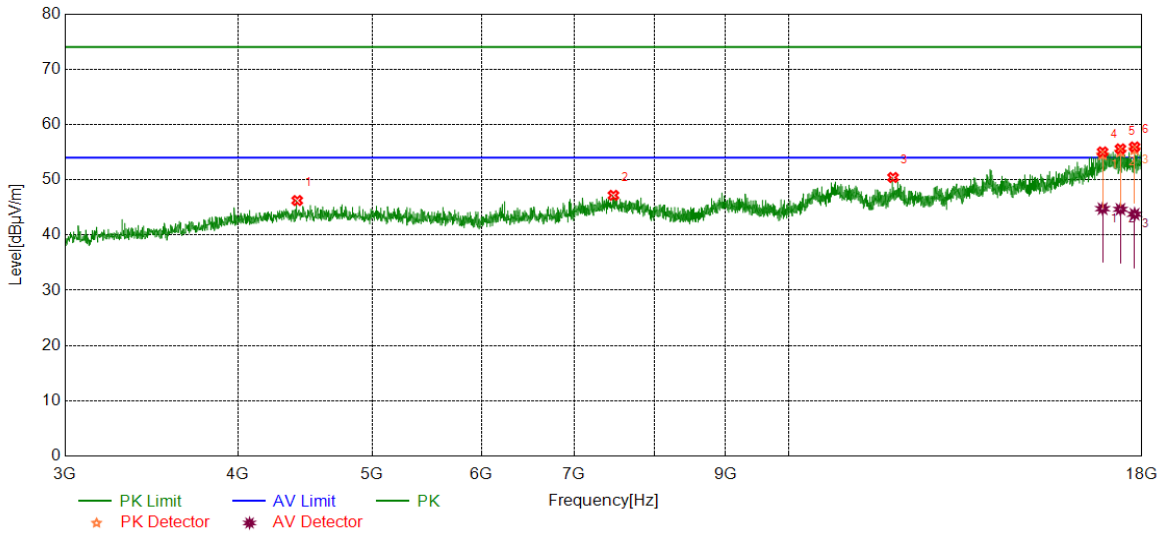

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4415.8020	40.99	5.25	46.24	74.00	-27.76	Horizontal
2	7472.4341	38.40	8.78	47.18	74.00	-26.82	Horizontal
3	11897.9872	37.96	12.45	50.41	74.00	-23.59	Horizontal
4	16859.8575	36.98	18.05	55.03	74.00	-18.97	Horizontal
5	17368.0460	37.19	18.40	55.59	74.00	-18.41	Horizontal
6	17780.5976	37.62	18.31	55.93	74.00	-18.07	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16859.8575	26.71	18.05	44.76	54.00	-9.24	Horizontal
2	17368.0460	26.26	18.40	44.66	54.00	-9.34	Horizontal
3	17780.5976	25.45	18.31	43.76	54.00	-10.24	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

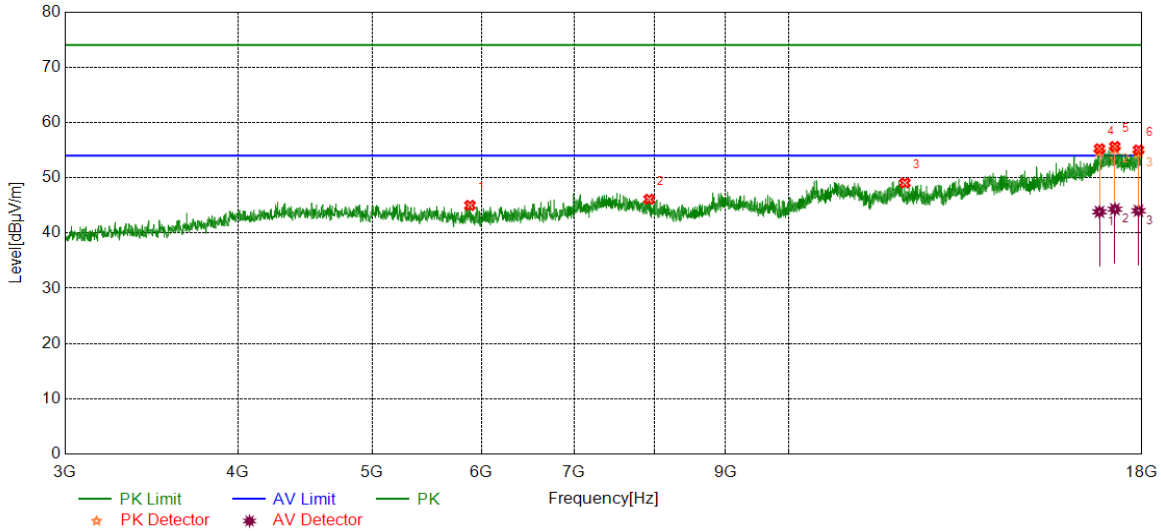

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5885.9857	39.81	5.18	44.99	74.00	-29.01	Vertical
2	7929.9912	38.54	7.57	46.11	74.00	-27.89	Vertical
3	12134.2668	36.71	12.36	49.07	74.00	-24.93	Vertical
4	16773.5967	37.78	17.46	55.24	74.00	-18.76	Vertical
5	17208.6511	37.76	17.90	55.66	74.00	-18.34	Vertical
6	17896.8621	36.58	18.45	55.03	74.00	-18.97	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16773.5967	26.38	17.46	43.84	54.00	-10.16	Vertical
2	17208.6511	26.41	17.90	44.31	54.00	-9.69	Vertical
3	17896.8621	25.58	18.45	44.03	54.00	-9.97	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

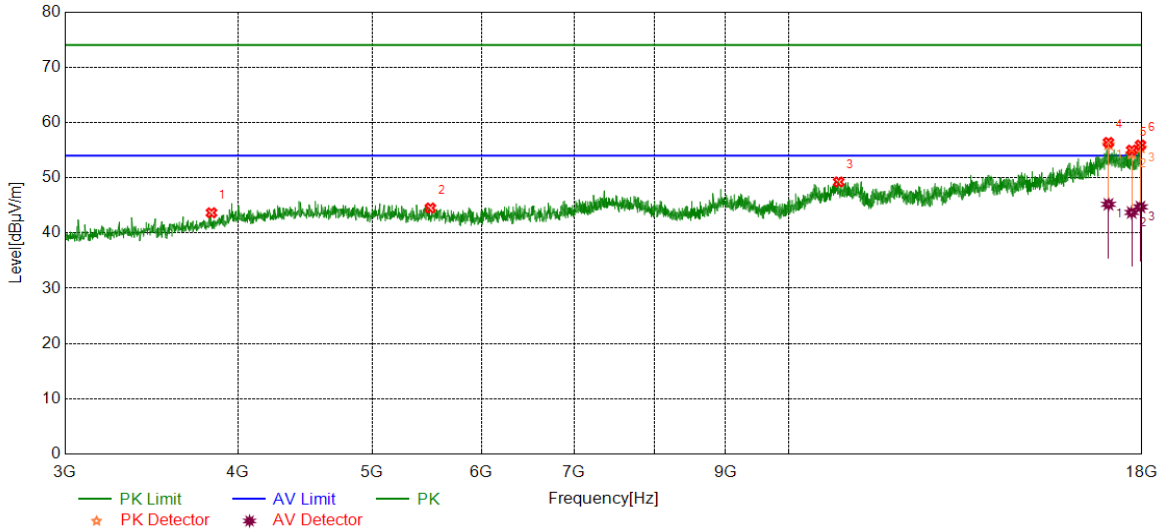

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3828.8536	39.94	3.72	43.66	74.00	-30.34	Horizontal
2	5510.9389	39.06	5.46	44.52	74.00	-29.48	Horizontal
3	10870.3588	37.08	12.16	49.24	74.00	-24.76	Horizontal
4	17024.8781	37.71	18.68	56.39	74.00	-17.61	Horizontal
5	17696.2120	37.17	17.83	55.00	74.00	-19.00	Horizontal
6	17956.8696	37.41	18.50	55.91	74.00	-18.09	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17024.8781	26.52	18.68	45.20	54.00	-8.80	Horizontal
2	17696.2120	25.89	17.83	43.72	54.00	-10.28	Horizontal
3	17956.8696	26.22	18.50	44.72	54.00	-9.28	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

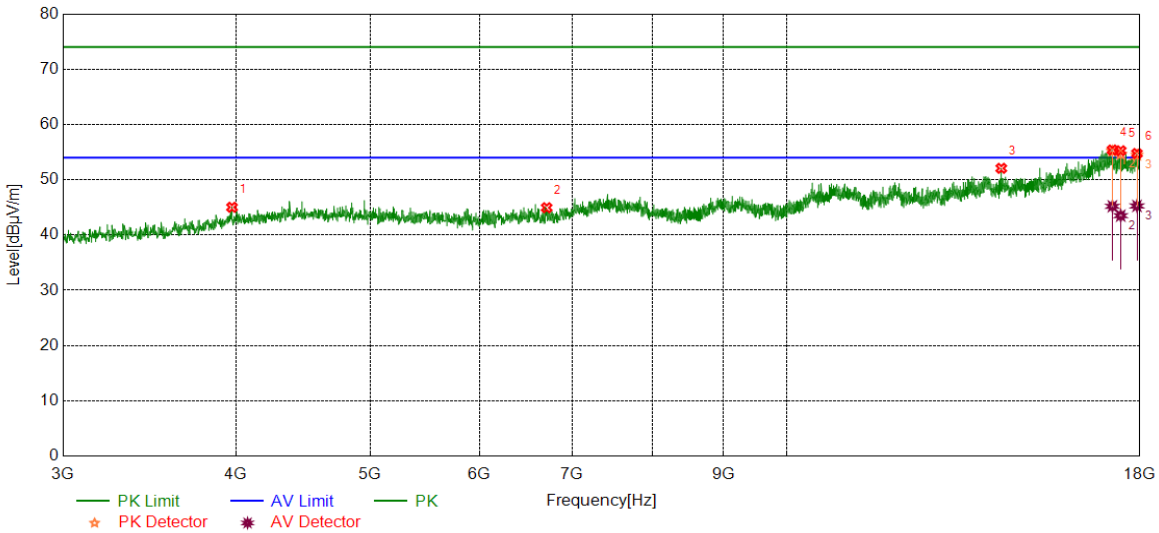

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3975.1219	40.77	4.25	45.02	74.00	-28.98	Vertical
2	6709.2137	36.87	8.07	44.94	74.00	-29.06	Vertical
3	14292.6616	38.19	13.88	52.07	74.00	-21.93	Vertical
4	17193.6492	37.14	18.24	55.38	74.00	-18.62	Vertical
5	17433.6792	37.36	17.89	55.25	74.00	-18.75	Vertical
6	17911.8640	36.56	18.19	54.75	74.00	-19.25	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17193.6492	26.96	18.24	45.20	54.00	-8.80	Vertical
2	17433.6792	25.61	17.89	43.50	54.00	-10.50	Vertical
3	17911.8640	27.07	18.19	45.26	54.00	-8.74	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

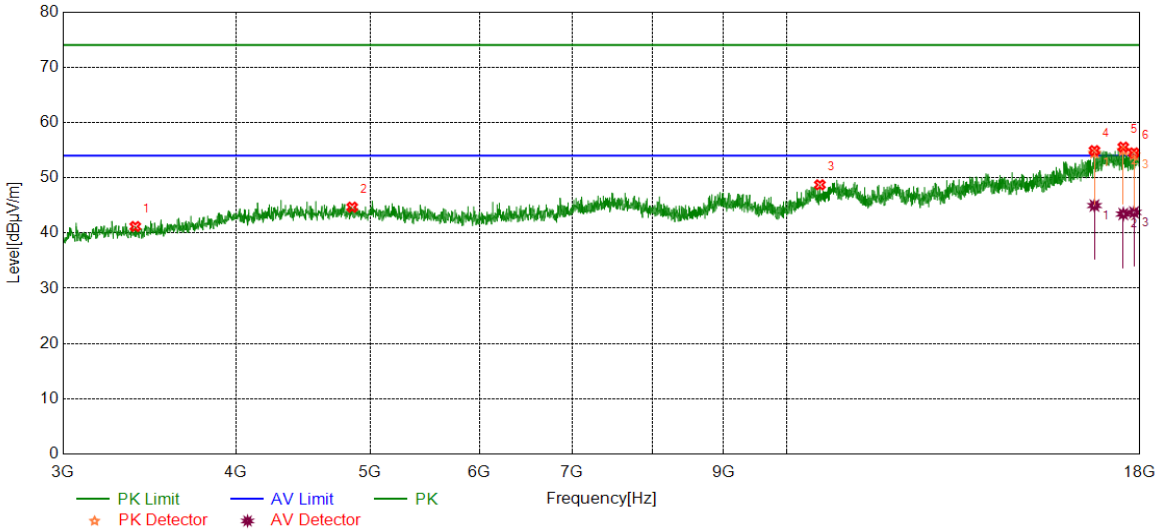

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3384.4231	39.81	1.37	41.18	74.00	-32.82	Horizontal
2	4854.6068	39.26	5.42	44.68	74.00	-29.32	Horizontal
3	10570.3213	36.84	11.88	48.72	74.00	-25.28	Horizontal
4	16689.2112	36.74	18.17	54.91	74.00	-19.09	Horizontal
5	17508.6886	37.74	17.81	55.55	74.00	-18.45	Horizontal
6	17823.7280	36.65	17.85	54.50	74.00	-19.50	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16689.2112	26.80	18.17	44.97	54.00	-9.03	Horizontal
2	17508.6886	25.63	17.81	43.44	54.00	-10.56	Horizontal
3	17823.7280	25.88	17.85	43.73	54.00	-10.27	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

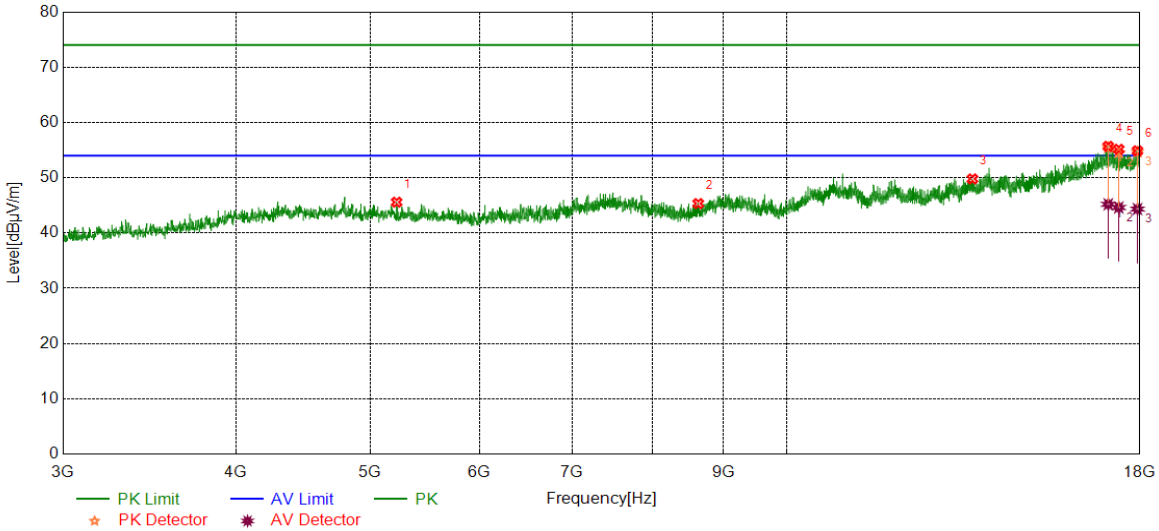

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5227.7785	40.20	5.38	45.58	74.00	-28.42	Vertical
2	8633.2042	38.24	7.09	45.33	74.00	-28.67	Vertical
3	13623.2029	36.76	13.03	49.79	74.00	-24.21	Vertical
4	17075.5094	36.76	18.93	55.69	74.00	-18.31	Vertical
5	17377.4222	36.58	18.58	55.16	74.00	-18.84	Vertical
6	17926.8659	36.85	18.03	54.88	74.00	-19.12	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17075.5094	26.27	18.93	45.20	54.00	-8.80	Vertical
2	17377.4222	26.04	18.58	44.62	54.00	-9.38	Vertical
3	17926.8659	26.31	18.03	44.34	54.00	-9.66	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

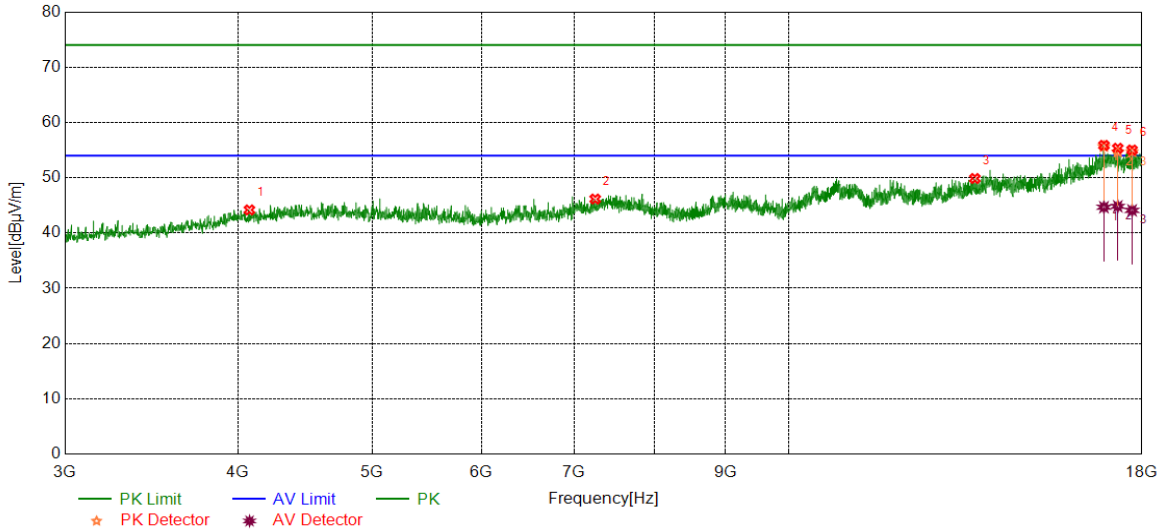

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4078.2598	39.94	4.24	44.18	74.00	-29.82	Horizontal
2	7249.2812	37.45	8.70	46.15	74.00	-27.85	Horizontal
3	13632.5791	36.72	13.14	49.86	74.00	-24.14	Horizontal
4	16897.3622	37.91	17.95	55.86	74.00	-18.14	Horizontal
5	17291.1614	37.44	17.89	55.33	74.00	-18.67	Horizontal
6	17707.4634	37.36	17.66	55.02	74.00	-18.98	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16897.3622	26.72	17.95	44.67	54.00	-9.33	Horizontal
2	17291.1614	26.94	17.89	44.83	54.00	-9.17	Horizontal
3	17707.4634	26.44	17.66	44.10	54.00	-9.90	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

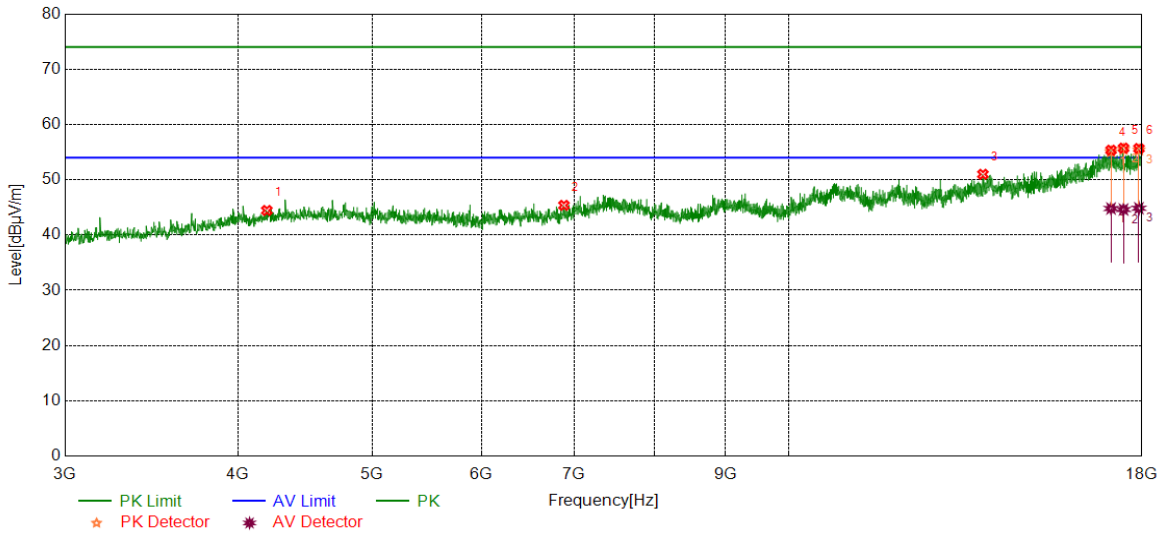

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4198.2748	39.71	4.73	44.44	74.00	-29.56	Vertical
2	6881.7352	37.14	8.23	45.37	74.00	-28.63	Vertical
3	13816.3520	37.53	13.46	50.99	74.00	-23.01	Vertical
4	17098.0123	37.07	18.28	55.35	74.00	-18.65	Vertical
5	17458.0573	37.96	17.76	55.72	74.00	-18.28	Vertical
6	17909.9887	37.38	18.28	55.66	74.00	-18.34	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17098.0123	26.52	18.28	44.80	54.00	-9.20	Vertical
2	17458.0573	26.86	17.76	44.62	54.00	-9.38	Vertical
3	17909.9887	26.56	18.28	44.84	54.00	-9.16	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

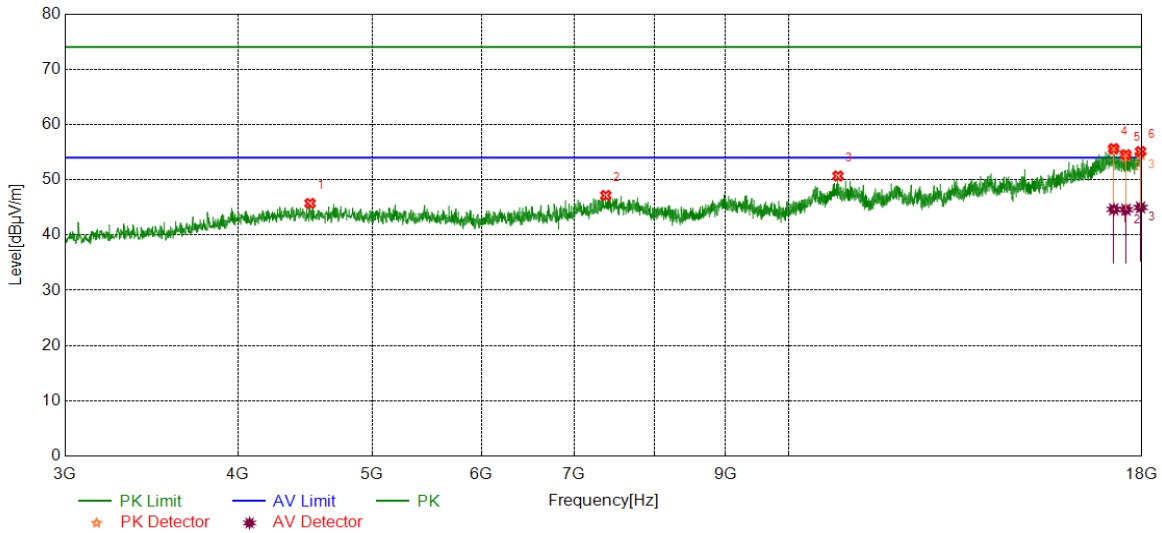

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4511.4389	40.20	5.53	45.73	74.00	-28.27	Horizontal
2	7378.6723	38.59	8.58	47.17	74.00	-26.83	Horizontal
3	10857.2322	38.44	12.24	50.68	74.00	-23.32	Horizontal
4	17174.8969	37.42	18.21	55.63	74.00	-18.37	Horizontal
5	17527.4409	36.67	17.87	54.54	74.00	-19.46	Horizontal
6	17958.7448	36.63	18.48	55.11	74.00	-18.89	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17174.8969	26.44	18.21	44.65	54.00	-9.35	Horizontal
2	17527.4409	26.73	17.87	44.60	54.00	-9.40	Horizontal
3	17958.7448	26.51	18.48	44.99	54.00	-9.01	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

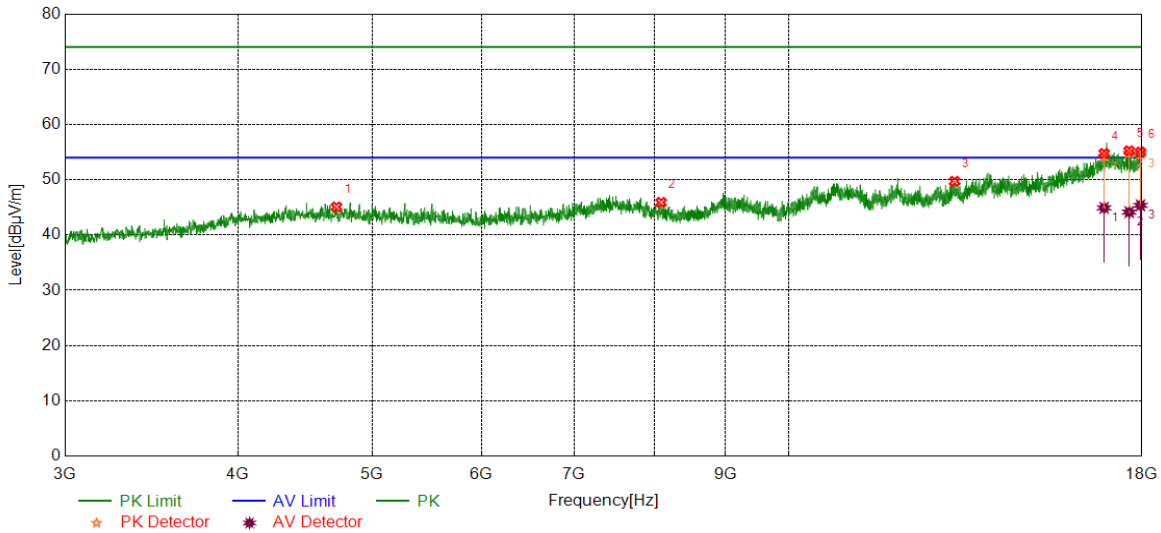

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4713.9642	39.46	5.62	45.08	74.00	-28.92	Vertical
2	8089.3862	38.59	7.31	45.90	74.00	-28.10	Vertical
3	13180.6476	37.10	12.62	49.72	74.00	-24.28	Vertical
4	16902.9879	36.92	17.84	54.76	74.00	-19.24	Vertical
5	17621.2027	37.66	17.57	55.23	74.00	-18.77	Vertical
6	17956.8696	36.50	18.50	55.00	74.00	-19.00	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16902.9879	27.08	17.84	44.92	54.00	-9.08	Vertical
2	17621.2027	26.57	17.57	44.14	54.00	-9.86	Vertical
3	17956.8696	26.87	18.50	45.37	54.00	-8.63	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

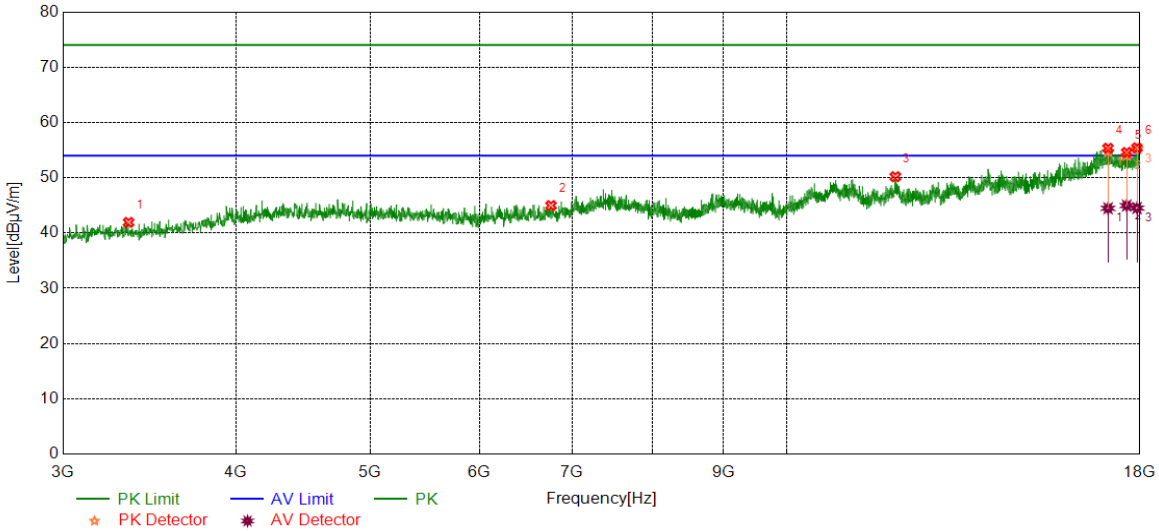

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3346.9184	40.65	1.27	41.92	74.00	-32.08	Horizontal
2	6757.9697	37.09	7.88	44.97	74.00	-29.03	Horizontal
3	11984.2480	37.35	12.84	50.19	74.00	-23.81	Horizontal
4	17069.8837	36.15	19.19	55.34	74.00	-18.66	Horizontal
5	17608.0760	36.79	17.79	54.58	74.00	-19.42	Horizontal
6	17913.7392	37.32	18.09	55.41	74.00	-18.59	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17069.8837	25.28	19.19	44.47	54.00	-9.53	Horizontal
2	17608.0760	27.18	17.79	44.97	54.00	-9.03	Horizontal
3	17913.7392	26.43	18.09	44.52	54.00	-9.48	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

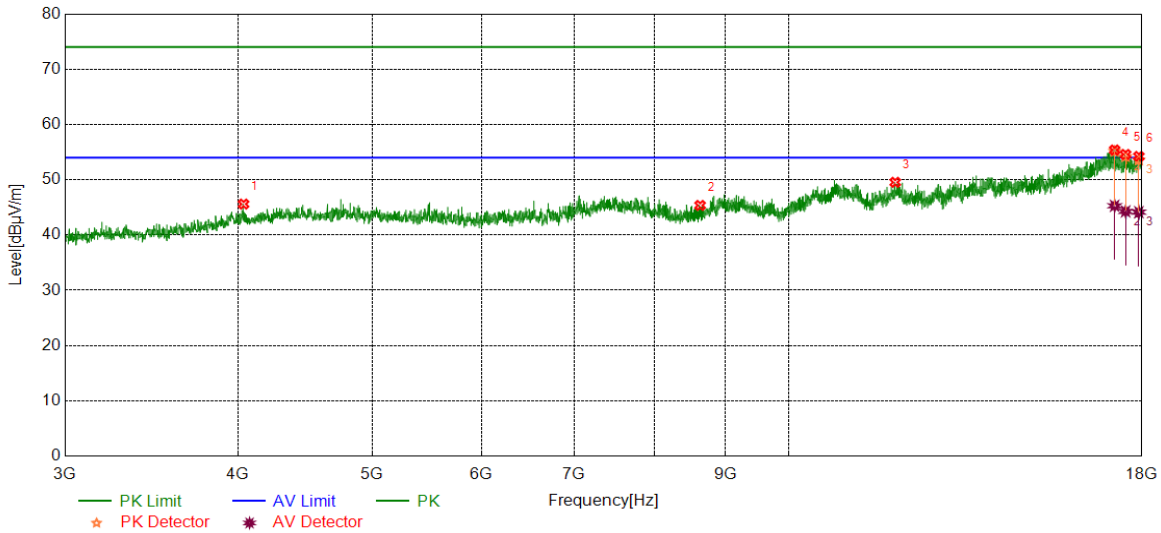

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4038.8799	41.36	4.24	45.60	74.00	-28.40	Vertical
2	8631.3289	38.32	7.04	45.36	74.00	-28.64	Vertical
3	11941.1176	36.94	12.60	49.54	74.00	-24.46	Vertical
4	17201.1501	37.08	18.30	55.38	74.00	-18.62	Vertical
5	17518.0648	36.85	17.73	54.58	74.00	-19.42	Vertical
6	17908.1135	35.93	18.30	54.23	74.00	-19.77	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17201.1501	26.99	18.30	45.29	54.00	-8.71	Vertical
2	17518.0648	26.54	17.73	44.27	54.00	-9.73	Vertical
3	17908.1135	25.84	18.30	44.14	54.00	-9.86	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

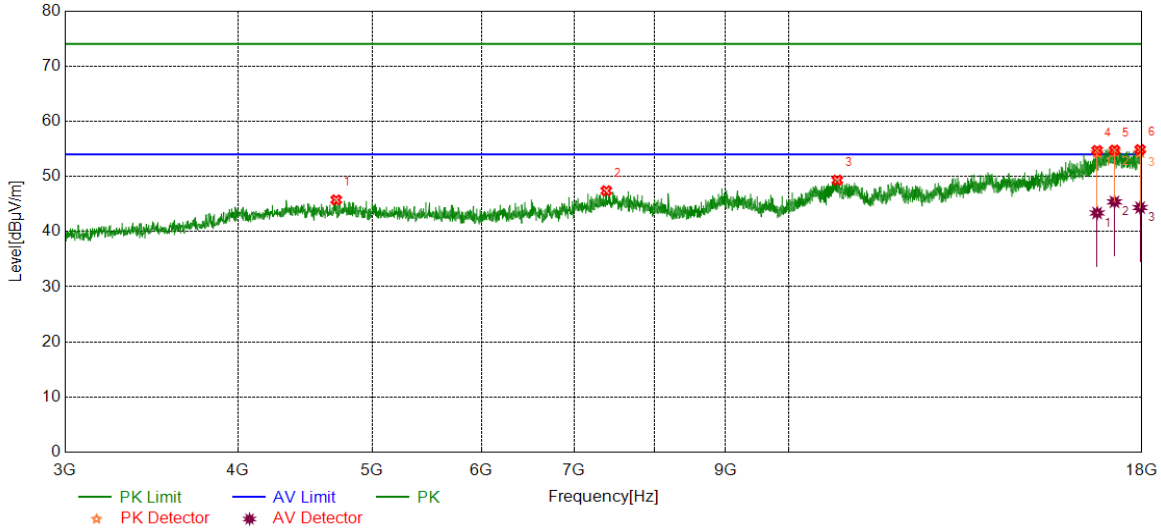

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4712.0890	40.10	5.65	45.75	74.00	-28.25	Horizontal
2	7384.2980	38.81	8.59	47.40	74.00	-26.60	Horizontal
3	10844.1055	37.06	12.26	49.32	74.00	-24.68	Horizontal
4	16707.9635	37.50	17.20	54.70	74.00	-19.30	Horizontal
5	17197.3997	36.45	18.31	54.76	74.00	-19.24	Horizontal
6	17945.6182	36.42	18.44	54.86	74.00	-19.14	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16707.9635	26.17	17.20	43.37	54.00	-10.63	Horizontal
2	17197.3997	27.08	18.31	45.39	54.00	-8.61	Horizontal
3	17945.6182	25.91	18.44	44.35	54.00	-9.65	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

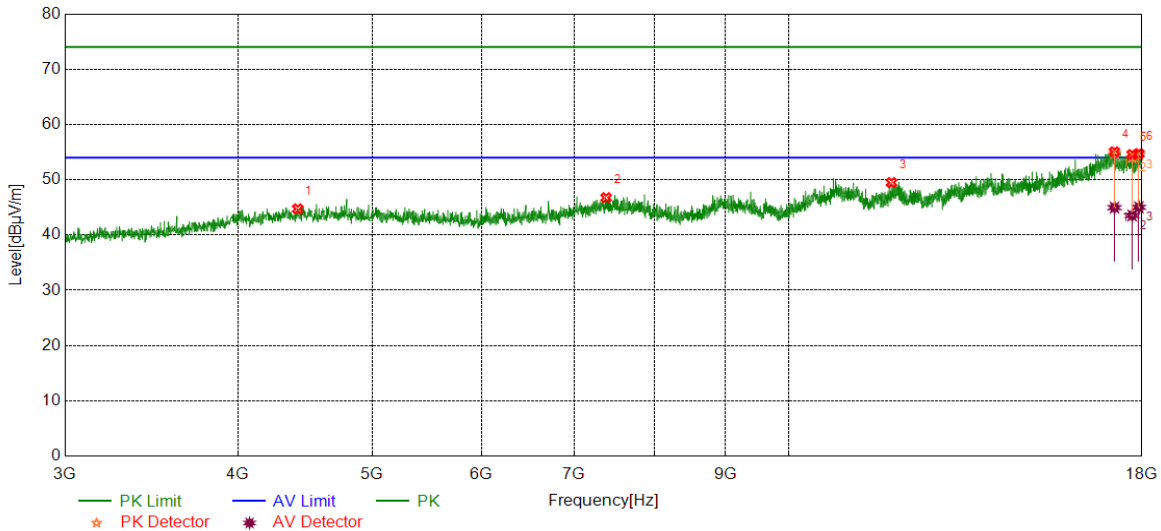

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4419.5524	39.46	5.28	44.74	74.00	-29.26	Vertical
2	7382.4228	38.17	8.59	46.76	74.00	-27.24	Vertical
3	11867.9835	37.12	12.37	49.49	74.00	-24.51	Vertical
4	17197.3997	36.75	18.31	55.06	74.00	-18.94	Vertical
5	17709.3387	36.93	17.63	54.56	74.00	-19.44	Vertical
6	17909.9887	36.45	18.28	54.73	74.00	-19.27	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17197.3997	26.65	18.31	44.96	54.00	-9.04	Vertical
2	17709.3387	25.91	17.63	43.54	54.00	-10.46	Vertical
3	17909.9887	26.73	18.28	45.01	54.00	-8.99	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

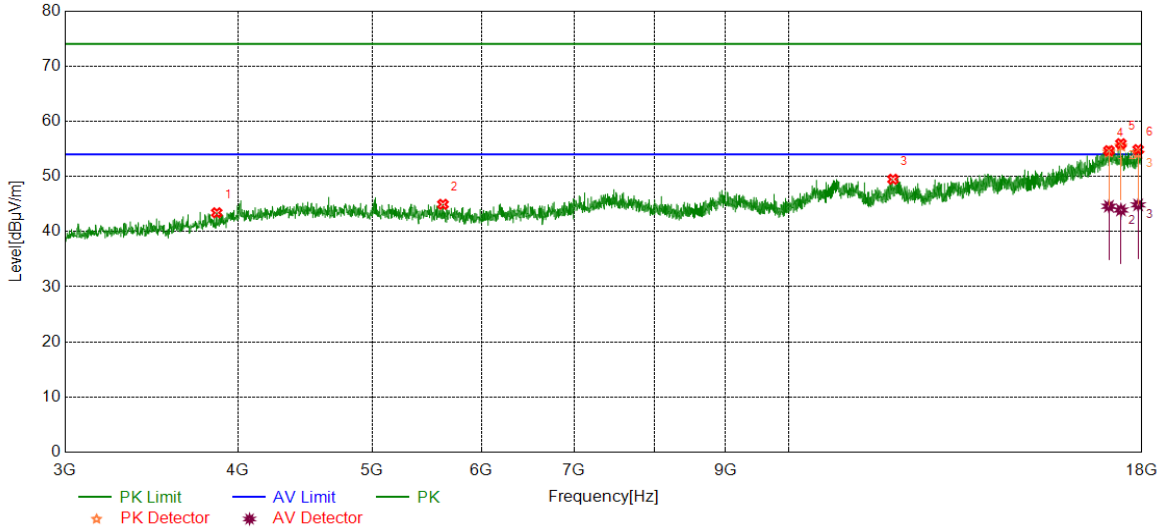

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3862.6078	40.02	3.39	43.41	74.00	-30.59	Horizontal
2	5627.2034	39.63	5.31	44.94	74.00	-29.06	Horizontal
3	11897.9872	37.04	12.45	49.49	74.00	-24.51	Horizontal
4	17038.0048	35.75	18.92	54.67	74.00	-19.33	Horizontal
5	17383.0479	37.59	18.35	55.94	74.00	-18.06	Horizontal
6	17887.4859	36.42	18.45	54.87	74.00	-19.13	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17038.0048	25.67	18.92	44.59	54.00	-9.41	Horizontal
2	17383.0479	25.56	18.35	43.91	54.00	-10.09	Horizontal
3	17887.4859	26.39	18.45	44.84	54.00	-9.16	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

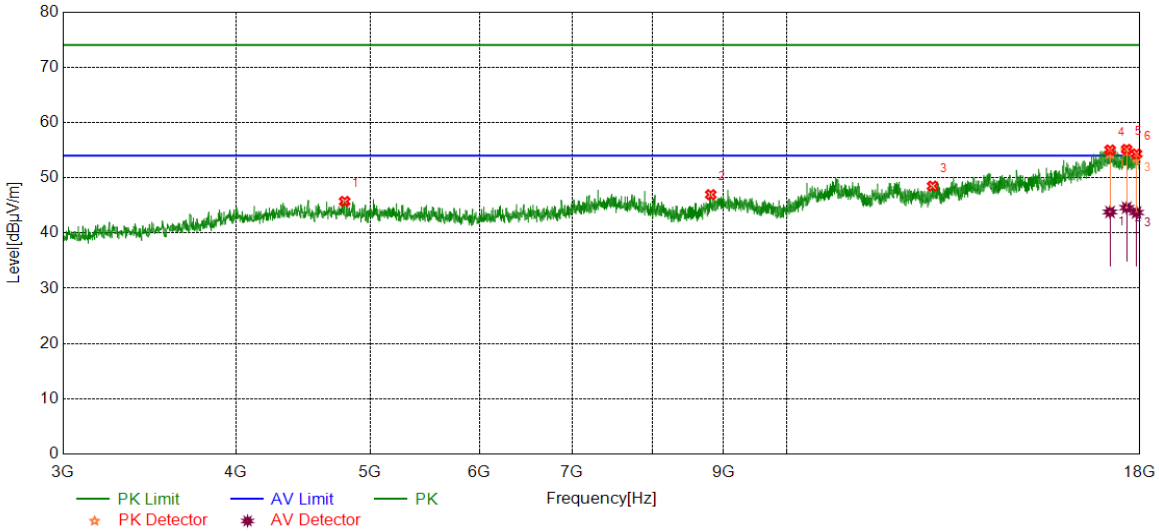

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4794.5993	39.79	5.93	45.72	74.00	-28.28	Vertical
2	8815.1019	38.82	8.13	46.95	74.00	-27.05	Vertical
3	12749.3437	37.00	11.49	48.49	74.00	-25.51	Vertical
4	17126.1408	37.05	17.98	55.03	74.00	-18.97	Vertical
5	17608.0760	37.34	17.79	55.13	74.00	-18.87	Vertical
6	17898.7373	35.89	18.42	54.31	74.00	-19.69	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17126.1408	25.83	17.98	43.81	54.00	-10.19	Vertical
2	17608.0760	26.79	17.79	44.58	54.00	-9.42	Vertical
3	17898.7373	25.29	18.42	43.71	54.00	-10.29	Vertical


- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part III: 18GHz~26.5GHz

SPURIOUS EMISSIONS 18GHz TO 26.5GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

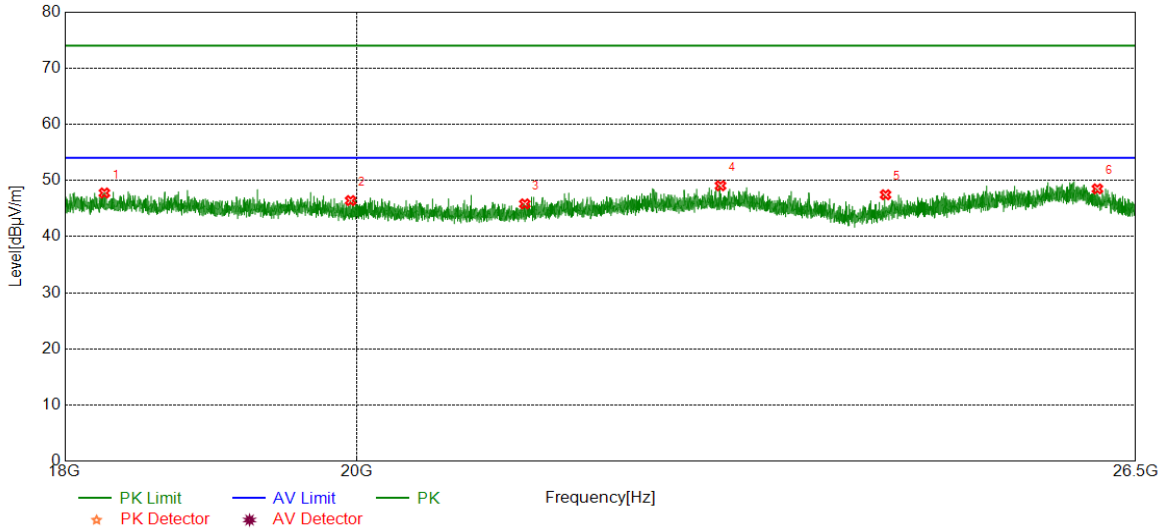


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	18259.2759	48.79	-1.03	47.76	74.00	-26.24	Horizontal
2	19957.7458	46.95	-0.54	46.41	74.00	-27.59	Horizontal
3	21254.1254	46.57	-0.75	45.82	74.00	-28.18	Horizontal
4	22811.4811	47.97	1.08	49.05	74.00	-24.95	Horizontal
5	24213.2713	48.39	-0.94	47.45	74.00	-26.55	Horizontal
6	26138.7139	47.09	1.41	48.50	74.00	-25.50	Horizontal

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

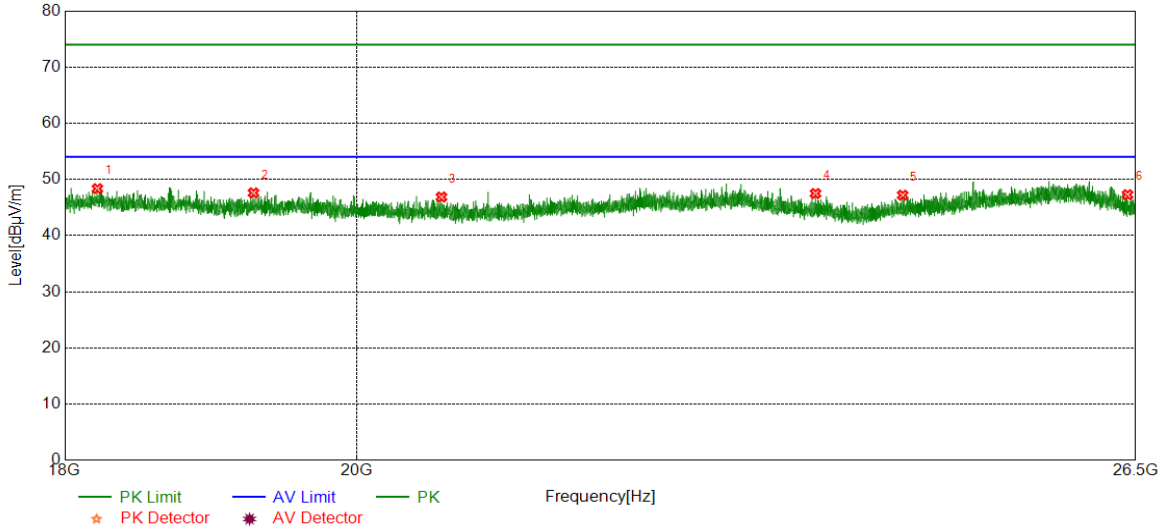

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	18213.3713	49.41	-1.05	48.36	74.00	-25.64	Vertical
2	19270.0270	48.50	-0.90	47.60	74.00	-26.40	Vertical
3	20623.3623	47.67	-0.80	46.87	74.00	-27.13	Vertical
4	23608.0108	47.87	-0.38	47.49	74.00	-26.51	Vertical
5	24362.8863	47.95	-0.75	47.20	74.00	-26.80	Vertical
6	26425.1925	46.49	0.79	47.28	74.00	-26.72	Vertical


- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part IV: 30MHz~1GHz

SPURIOUS EMISSIONS 30M TO 1GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

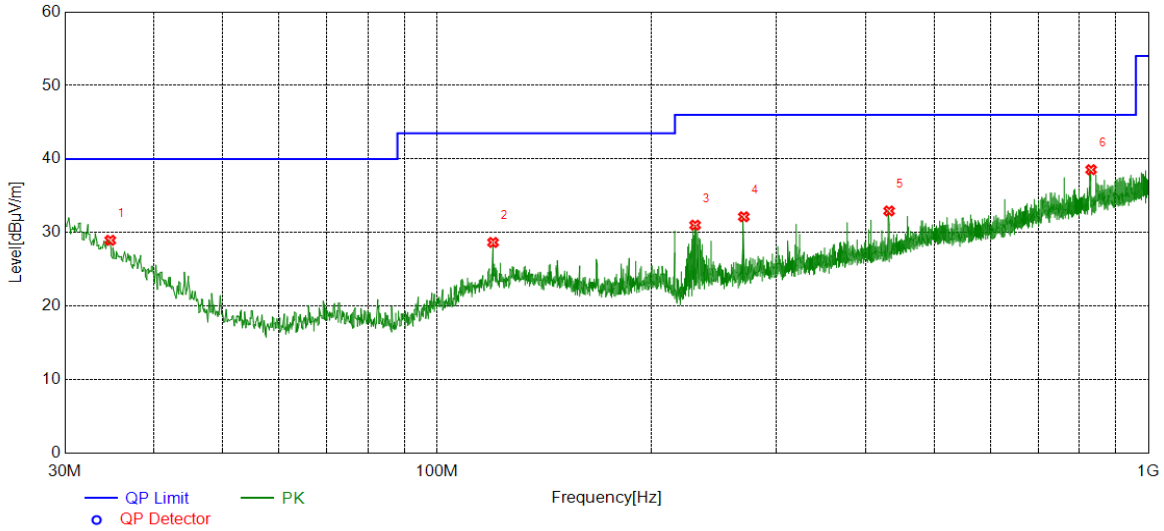


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	34.7535	4.92	24.03	28.95	40.00	-11.05	Horizontal
2	119.9280	8.29	20.37	28.66	43.50	-14.84	Horizontal
3	230.6161	12.72	18.29	31.01	46.00	-14.99	Horizontal
4	270.0020	12.35	19.80	32.15	46.00	-13.85	Horizontal
5	432.0082	9.11	23.83	32.94	46.00	-13.06	Horizontal
6	830.5241	8.34	30.21	38.55	46.00	-7.45	Horizontal

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

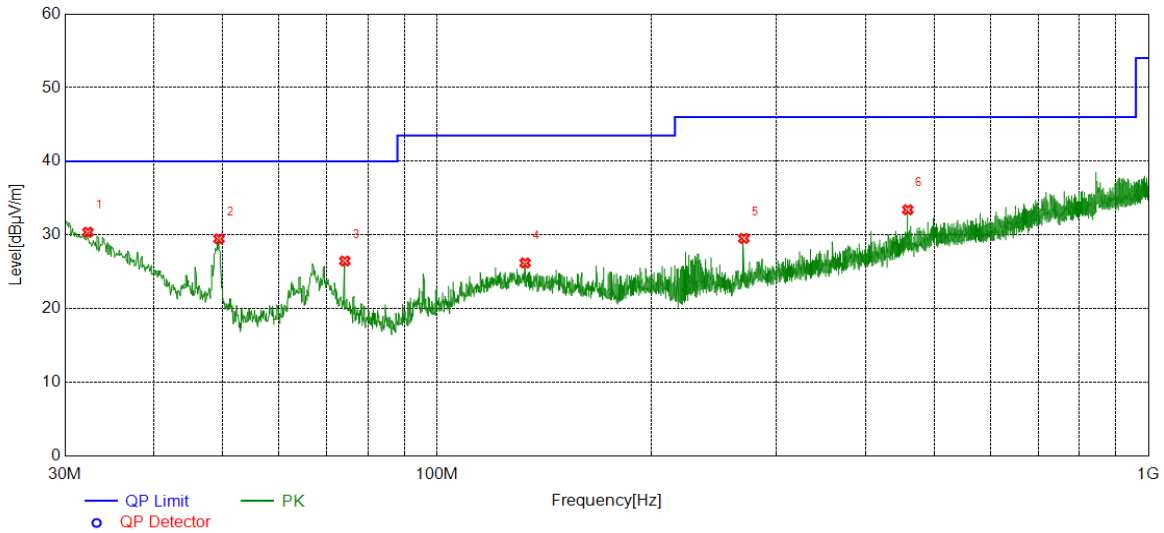

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	32.3282	4.82	25.56	30.38	40.00	-9.62	Vertical
2	49.4019	14.55	14.92	29.47	40.00	-10.53	Vertical
3	74.2364	11.86	14.61	26.47	40.00	-13.53	Vertical
4	133.0243	6.08	20.13	26.21	43.50	-17.29	Vertical
5	270.0020	9.74	19.80	29.54	46.00	-16.46	Vertical
6	458.9769	8.86	24.57	33.43	46.00	-12.57	Vertical


Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.



Part V: 9KHz~30MHz

SPURIOUS EMISSIONS Below 30MHz (WORST CASE CONFIGURATION-FACE ON)

Test Mode	Channel	Frequency Range	Verdict
11B	LCH	9kHz~150kHz	PASS

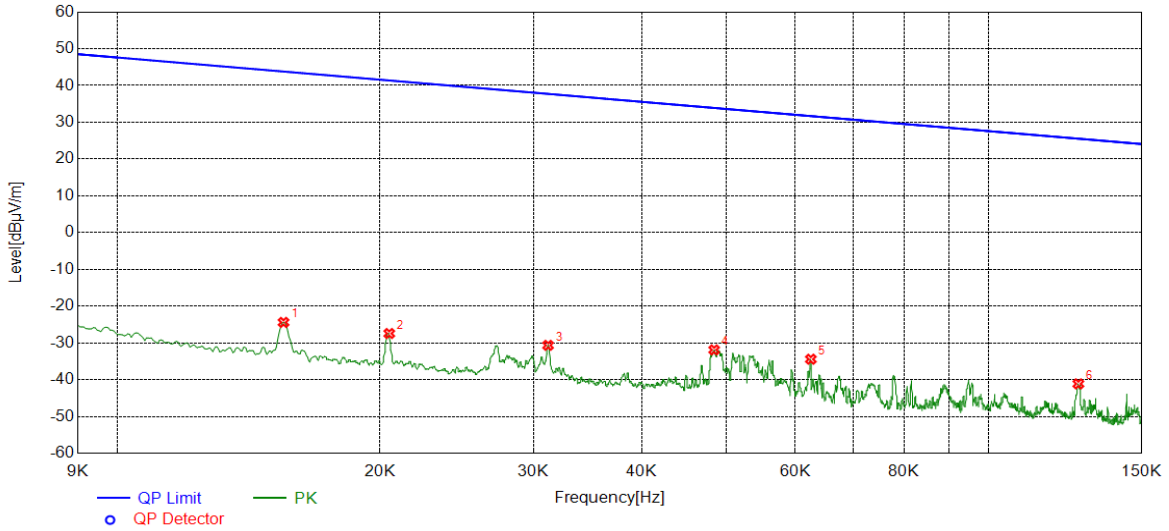


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.0155	36.56	-60.98	-24.42	43.80	-68.22	Horizontal
2	0.0205	33.41	-60.85	-27.44	41.38	-68.82	Horizontal
3	0.0312	30.26	-60.92	-30.66	37.71	-68.37	Horizontal
4	0.0484	29.13	-61.03	-31.90	33.89	-65.79	Horizontal
5	0.0625	26.80	-61.23	-34.43	31.68	-66.11	Horizontal
6	0.1268	19.91	-61.04	-41.13	25.55	-66.68	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



Test Mode	Channel	Frequency Range	Verdict
11B	LCH	150kHz~490kHz	PASS

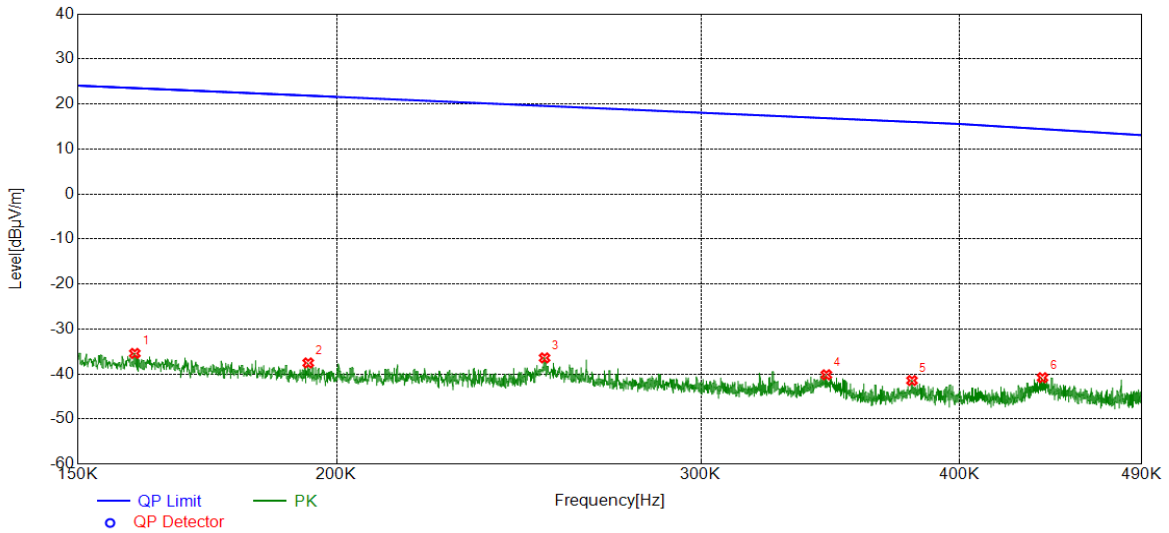


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.1598	25.86	-61.27	-35.41	23.53	-58.94	Vertical
2	0.1938	23.56	-61.09	-37.53	21.85	-59.38	Vertical
3	0.2521	24.39	-60.80	-36.41	19.57	-55.98	Vertical
4	0.3449	20.56	-60.72	-40.16	16.85	-57.01	Vertical
5	0.3794	19.26	-60.70	-41.44	16.02	-57.46	Vertical
6	0.4387	19.84	-60.65	-40.81	14.43	-55.24	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



Test Mode	Channel	Frequency Range	Verdict
11B	LCH	490kHz~30MHz	PASS

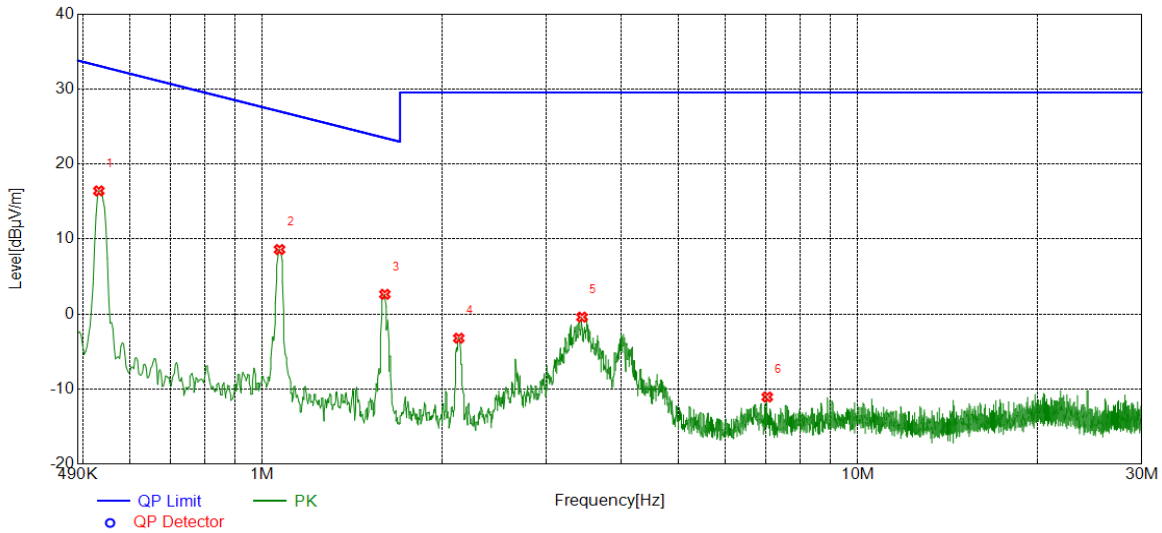

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.5313	37.02	-20.60	16.42	33.10	-16.68	Vertical
2	1.0685	28.95	-20.35	8.60	27.03	-18.43	Vertical
3	1.6056	22.90	-20.27	2.63	23.49	-20.86	Vertical
4	2.1368	17.02	-20.24	-3.22	29.54	-32.76	Vertical
5	3.4413	19.87	-20.28	-0.41	29.54	-29.95	Vertical
6	7.0448	8.60	-19.66	-11.06	29.54	-40.60	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a)

FREQUENCY (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

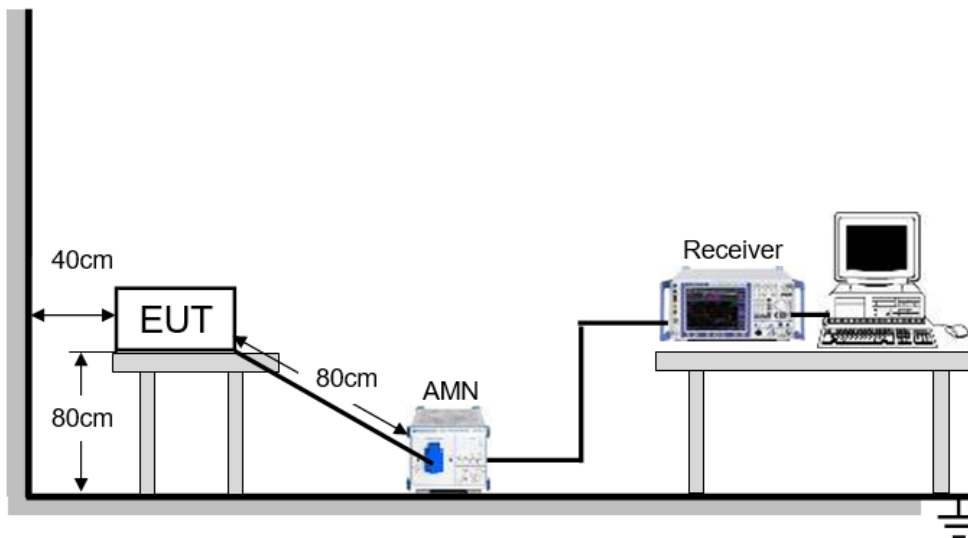


The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.



LINE L RESULTS (WORST-CASE CONFIGURATION)

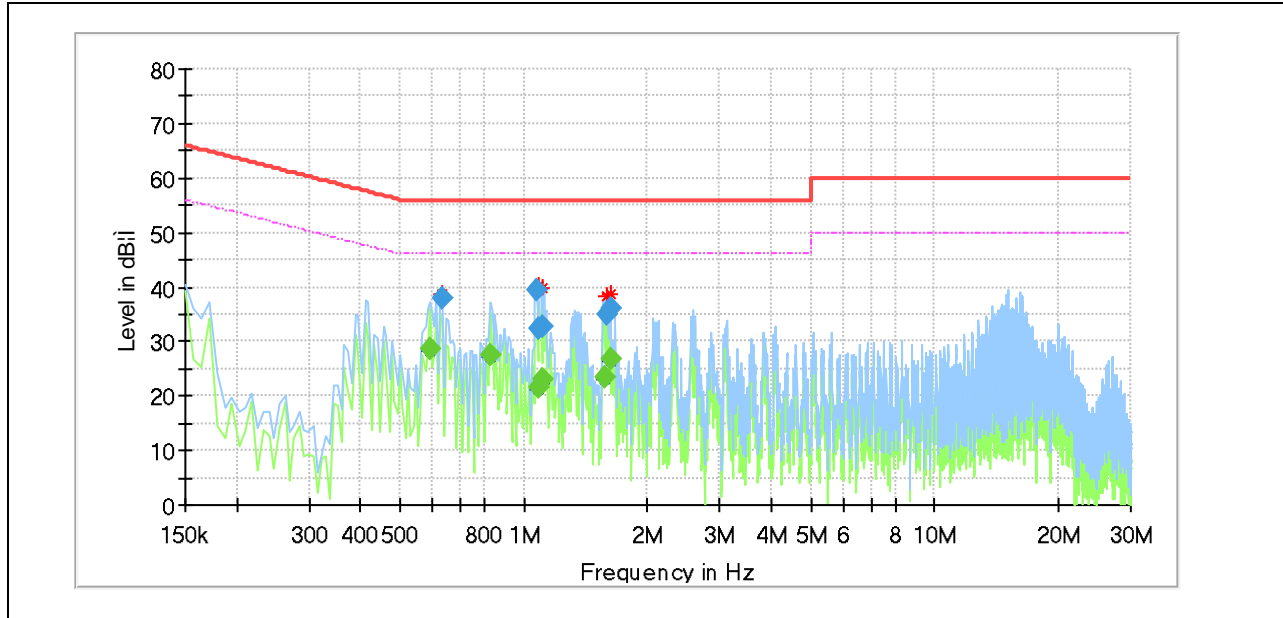


Final_Result

Frequency [MHz]	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	Filter	Corr. [dB]
0.590288	---	28.53	46.00	17.47	1000.0	9.000	L1	OFF	9.6
0.635063	38.08	---	56.00	17.92	1000.0	9.000	L1	OFF	9.6
0.829088	---	27.69	46.00	18.31	1000.0	9.000	L1	OFF	9.6
1.075350	39.61	---	56.00	16.39	1000.0	9.000	L1	OFF	9.6
1.090275	32.54	---	56.00	23.46	1000.0	9.000	L1	OFF	9.6
1.090275	---	21.71	46.00	24.29	1000.0	9.000	L1	OFF	9.6
1.112663	32.90	---	56.00	23.10	1000.0	9.000	L1	OFF	9.6
1.112663	---	22.93	46.00	23.07	1000.0	9.000	L1	OFF	9.6
1.575338	---	23.43	46.00	22.57	1000.0	9.000	L1	OFF	9.6
1.597725	34.99	---	56.00	21.01	1000.0	9.000	L1	OFF	9.6
1.620113	---	26.84	46.00	19.16	1000.0	9.000	L1	OFF	9.6
1.620113	35.94	---	56.00	20.06	1000.0	9.000	L1	OFF	9.6

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
 4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
 5. Pre-testing all test modes and channels, and find the LCH of 11b which is the worst case, so only the worst case is included in this test report.



LINE N RESULTS (WORST-CASE CONFIGURATION)

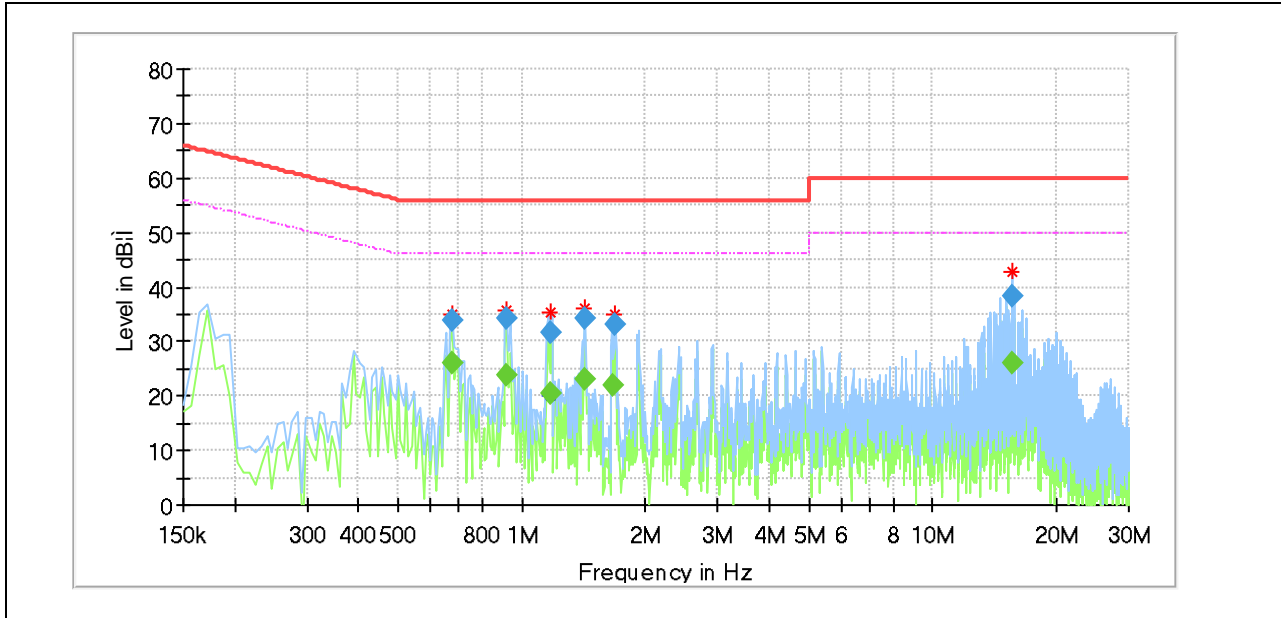

Final_Result

Frequency [MHz]	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	Filter	Corr. [dB]
0.679838	---	25.89	46.00	20.11	1000.0	9.000	N	OFF	9.5
0.679838	33.99	---	56.00	22.01	1000.0	9.000	N	OFF	9.5
0.918638	---	23.85	46.00	22.15	1000.0	9.000	N	OFF	9.7
0.918638	34.05	---	56.00	21.95	1000.0	9.000	N	OFF	9.7
1.179825	31.60	---	56.00	24.40	1000.0	9.000	N	OFF	9.7
1.179825	---	20.33	46.00	25.67	1000.0	9.000	N	OFF	9.7
1.426088	34.38	---	56.00	21.62	1000.0	9.000	N	OFF	9.5
1.426088	---	23.10	46.00	22.90	1000.0	9.000	N	OFF	9.5
1.664888	---	22.13	46.00	23.87	1000.0	9.000	N	OFF	9.6
1.687275	33.24	---	56.00	22.76	1000.0	9.000	N	OFF	9.6
15.597375	---	26.00	50.00	24.00	1000.0	9.000	N	OFF	9.5
15.597375	38.16	---	60.00	21.84	1000.0	9.000	N	OFF	9.5

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
 4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
 5. Pre-testing all test modes and channels, and find the LCH of 11b which is the worst case, so only the worst case is included in this test report.



9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi

END OF REPORT