




Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

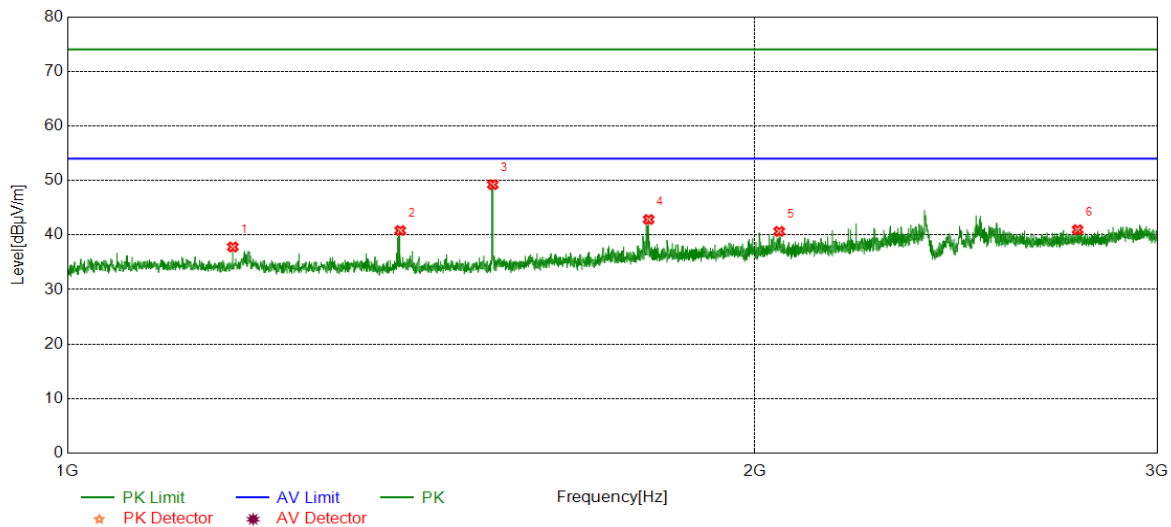


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1181.5227	43.48	-5.67	37.81	74.00	-36.19	Horizontal
2	1398.7999	46.48	-5.67	40.81	74.00	-33.19	Horizontal
3	1535.5669	54.99	-5.75	49.24	74.00	-24.76	Horizontal
4	1796.8496	46.65	-3.81	42.84	74.00	-31.16	Horizontal
5	2049.6312	43.04	-2.38	40.66	74.00	-33.34	Horizontal
6	2768.9711	41.18	-0.21	40.97	74.00	-33.03	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

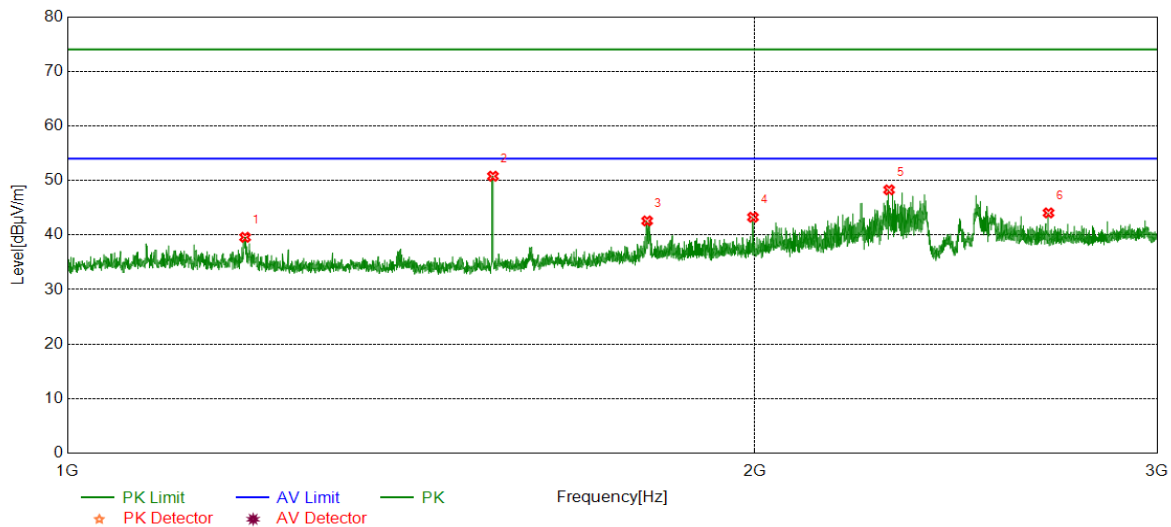


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.2745	45.14	-5.56	39.58	74.00	-34.42	Vertical
2	1535.8170	56.53	-5.75	50.78	74.00	-23.22	Vertical
3	1794.0993	46.36	-3.78	42.58	74.00	-31.42	Vertical
4	1996.1245	46.29	-3.03	43.26	74.00	-30.74	Vertical
5	2289.6612	50.22	-1.94	48.28	74.00	-25.72	Vertical
6	2688.9611	44.64	-0.59	44.05	74.00	-29.95	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

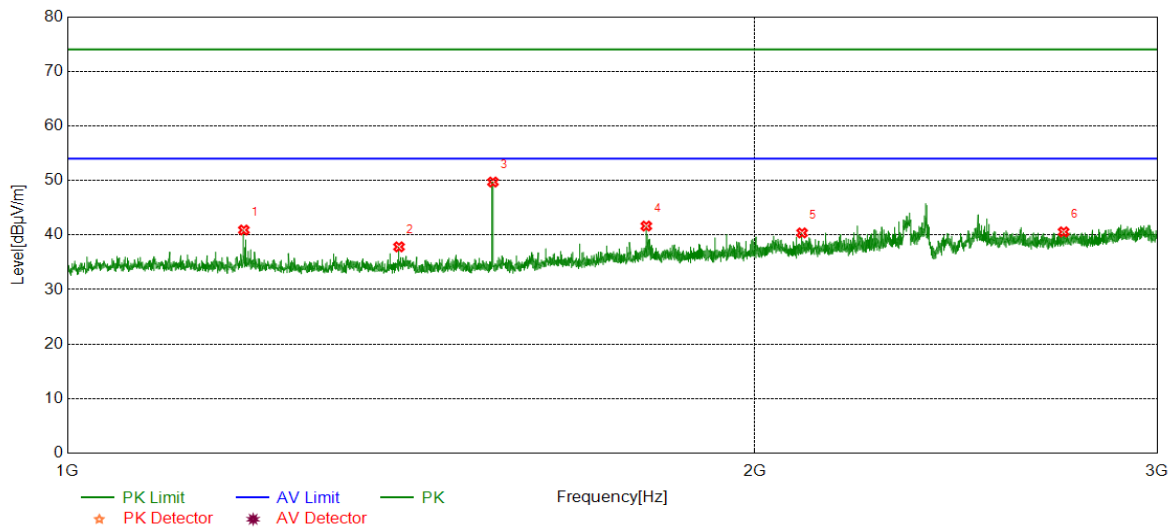


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1194.7743	46.48	-5.57	40.91	74.00	-33.09	Horizontal
2	1397.0496	43.52	-5.69	37.83	74.00	-36.17	Horizontal
3	1535.8170	55.46	-5.75	49.71	74.00	-24.29	Horizontal
4	1792.5991	45.40	-3.76	41.64	74.00	-32.36	Horizontal
5	2097.3872	42.91	-2.53	40.38	74.00	-33.62	Horizontal
6	2730.2163	41.06	-0.49	40.57	74.00	-33.43	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

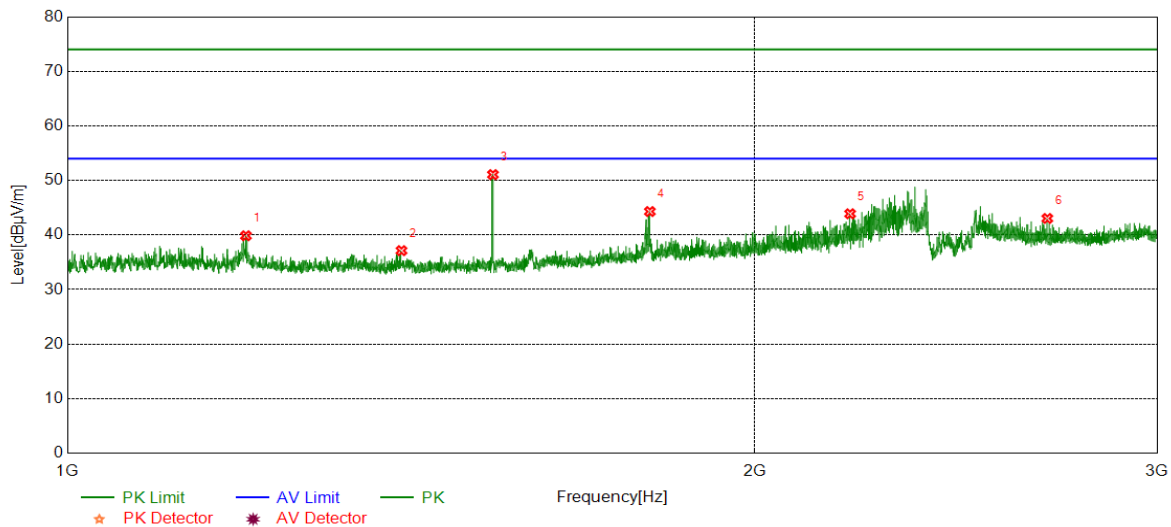


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.2747	45.42	-5.56	39.86	74.00	-34.14	Vertical
2	1400.5501	42.77	-5.64	37.13	74.00	-36.87	Vertical
3	1535.8170	56.82	-5.75	51.07	74.00	-22.93	Vertical
4	1799.0999	48.14	-3.84	44.30	74.00	-29.70	Vertical
5	2201.4002	46.22	-2.33	43.89	74.00	-30.11	Vertical
6	2685.7107	43.64	-0.61	43.03	74.00	-30.97	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

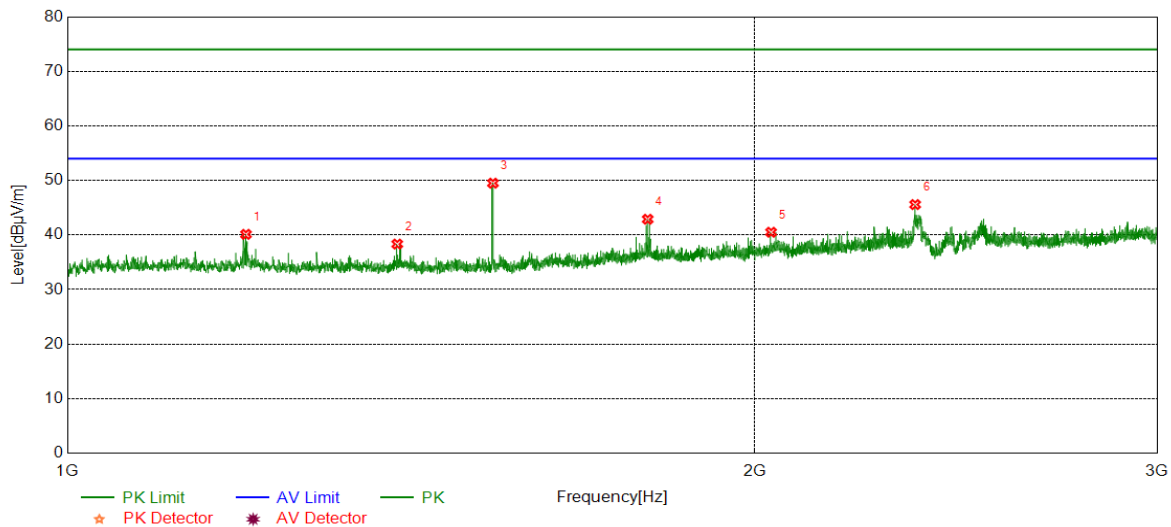


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.2747	45.68	-5.56	40.12	74.00	-33.88	Horizontal
2	1394.5493	44.06	-5.72	38.34	74.00	-35.66	Horizontal
3	1535.8170	55.25	-5.75	49.50	74.00	-24.50	Horizontal
4	1795.0994	46.68	-3.79	42.89	74.00	-31.11	Horizontal
5	2032.8791	43.14	-2.63	40.51	74.00	-33.49	Horizontal
6	2350.6688	47.23	-1.65	45.58	74.00	-28.42	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

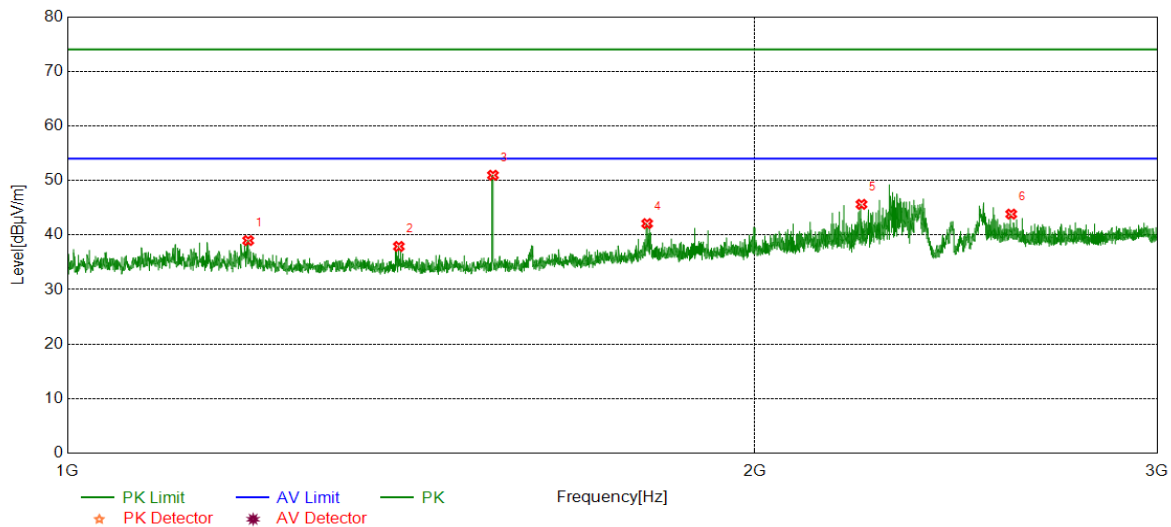


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1200.0250	44.54	-5.56	38.98	74.00	-35.02	Vertical
2	1396.7996	43.59	-5.69	37.90	74.00	-36.10	Vertical
3	1535.8170	56.71	-5.75	50.96	74.00	-23.04	Vertical
4	1794.0993	45.87	-3.78	42.09	74.00	-31.91	Vertical
5	2226.9034	47.80	-2.18	45.62	74.00	-28.38	Vertical
6	2589.6987	44.60	-0.77	43.83	74.00	-30.17	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

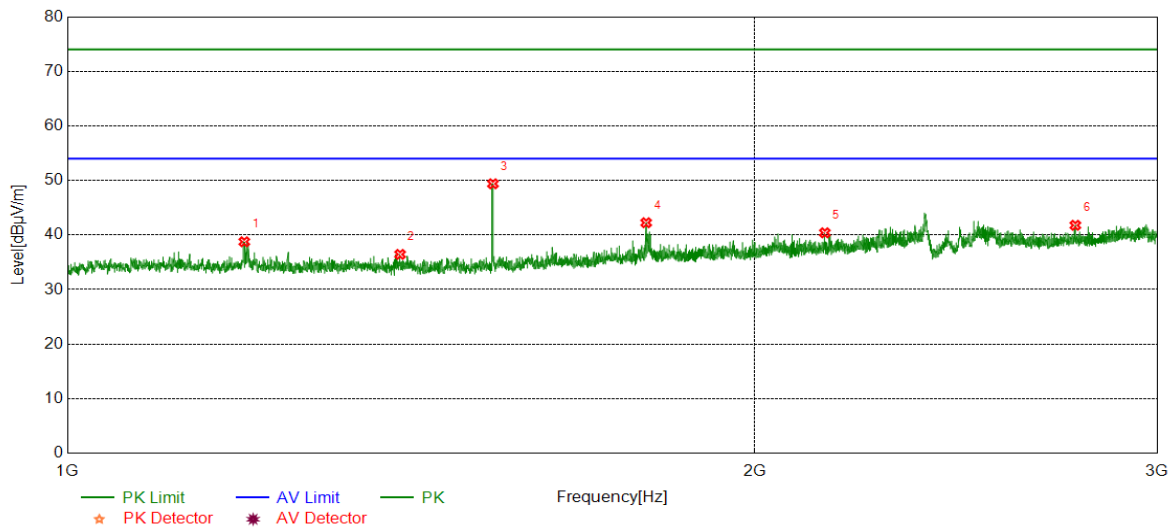


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1195.2744	44.33	-5.57	38.76	74.00	-35.24	Horizontal
2	1398.5498	42.12	-5.67	36.45	74.00	-37.55	Horizontal
3	1535.8170	55.14	-5.75	49.39	74.00	-24.61	Horizontal
4	1792.3490	46.01	-3.76	42.25	74.00	-31.75	Horizontal
5	2146.1433	42.77	-2.37	40.40	74.00	-33.60	Horizontal
6	2762.7203	42.04	-0.26	41.78	74.00	-32.22	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

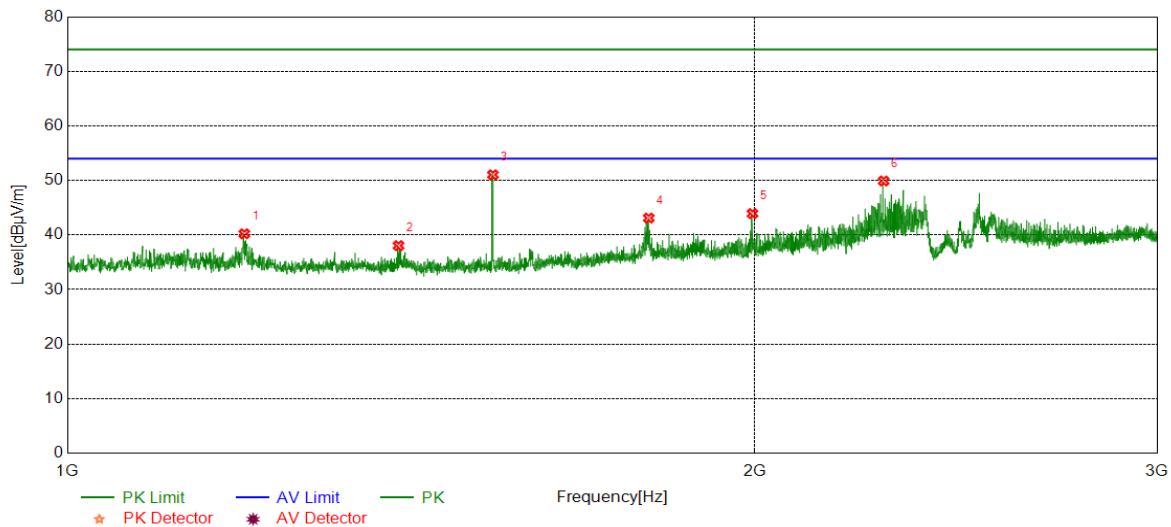


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1195.2744	45.79	-5.57	40.22	74.00	-33.78	Vertical
2	1396.2995	43.75	-5.70	38.05	74.00	-35.95	Vertical
3	1535.8170	56.79	-5.75	51.04	74.00	-22.96	Vertical
4	1797.0996	46.92	-3.81	43.11	74.00	-30.89	Vertical
5	1995.1244	46.97	-3.04	43.93	74.00	-30.07	Vertical
6	2277.1596	51.89	-1.99	49.90	74.00	-24.10	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

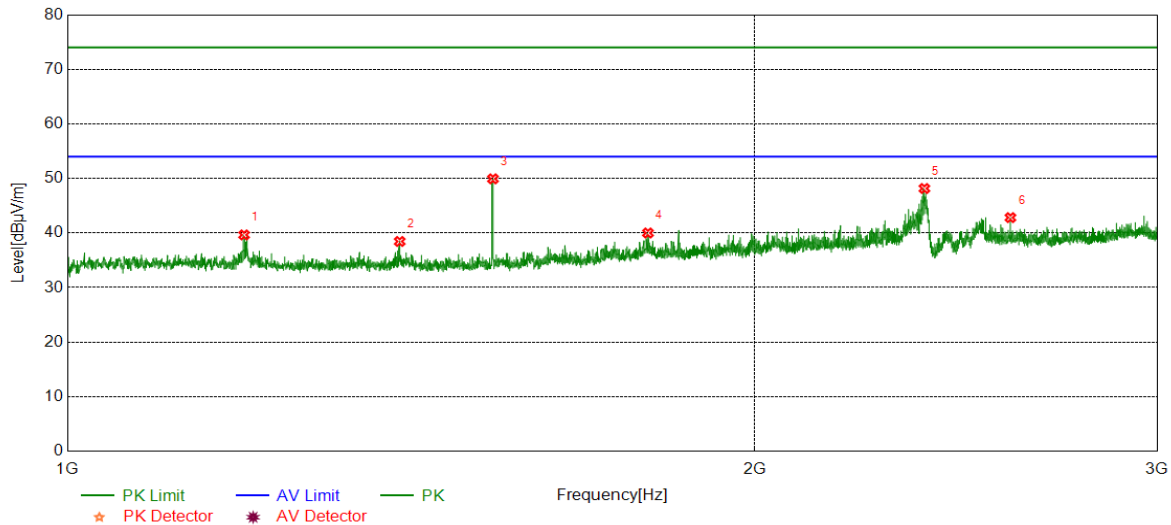


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1195.0244	45.22	-5.57	39.65	74.00	-34.35	Horizontal
2	1398.0498	44.13	-5.68	38.45	74.00	-35.55	Horizontal
3	1535.8170	55.68	-5.75	49.93	74.00	-24.07	Horizontal
4	1795.5995	43.80	-3.80	40.00	74.00	-34.00	Horizontal
5	2372.6716	49.28	-1.12	48.16	74.00	-25.84	Horizontal
6	2587.6985	43.64	-0.82	42.82	74.00	-31.18	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

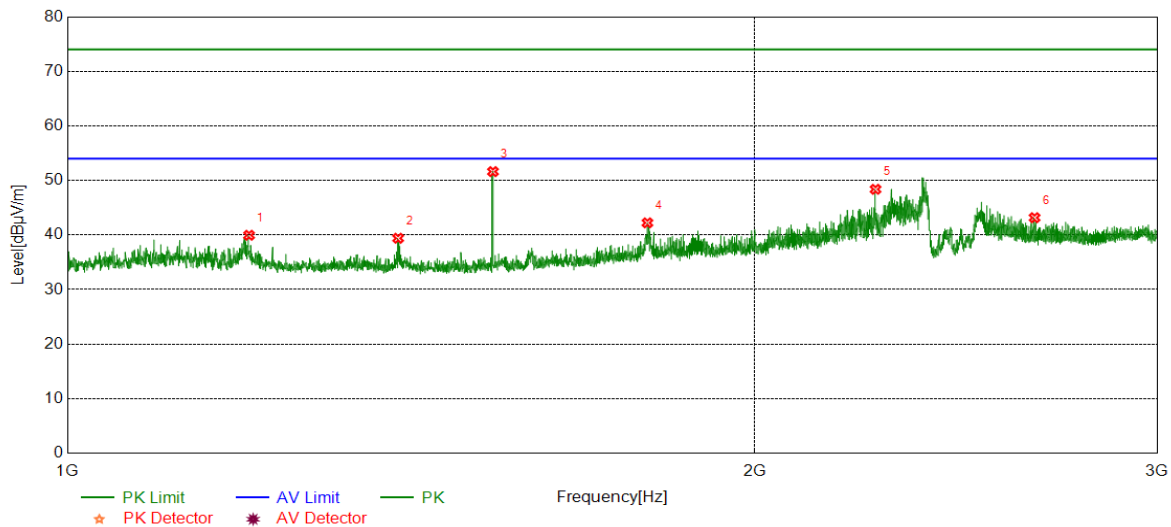


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1201.0251	45.49	-5.54	39.95	74.00	-34.05	Vertical
2	1395.7995	45.11	-5.71	39.40	74.00	-34.60	Vertical
3	1535.8170	57.37	-5.75	51.62	74.00	-22.38	Vertical
4	1794.5993	46.02	-3.79	42.23	74.00	-31.77	Vertical
5	2258.6573	50.49	-2.11	48.38	74.00	-25.62	Vertical
6	2651.4564	43.94	-0.77	43.17	74.00	-30.83	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

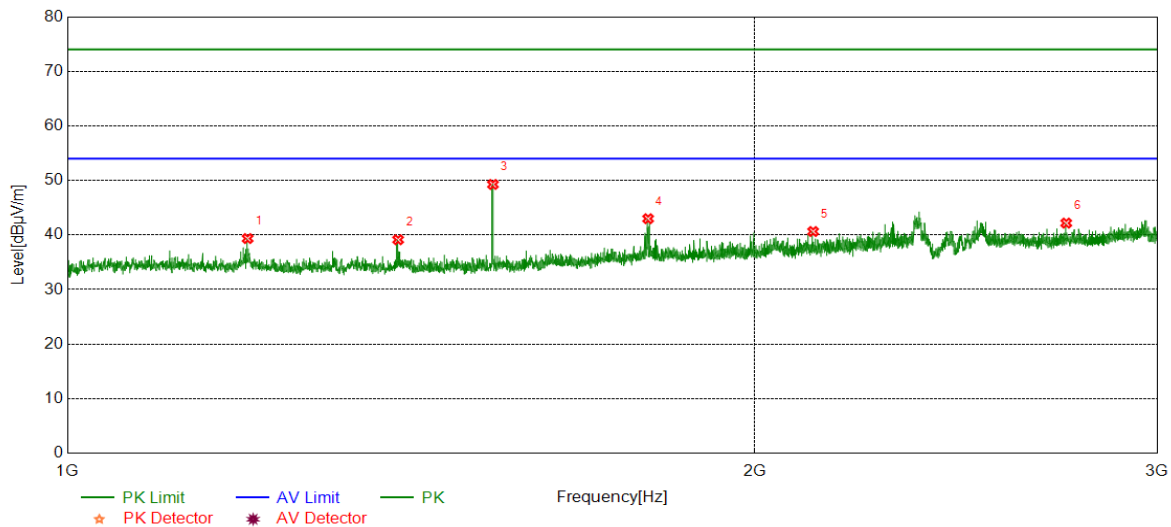


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1199.2749	44.91	-5.56	39.35	74.00	-34.65	Horizontal
2	1395.7995	44.84	-5.71	39.13	74.00	-34.87	Horizontal
3	1535.8170	55.02	-5.75	49.27	74.00	-24.73	Horizontal
4	1795.8495	46.79	-3.80	42.99	74.00	-31.01	Horizontal
5	2120.8901	43.04	-2.40	40.64	74.00	-33.36	Horizontal
6	2737.4672	42.65	-0.47	42.18	74.00	-31.82	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

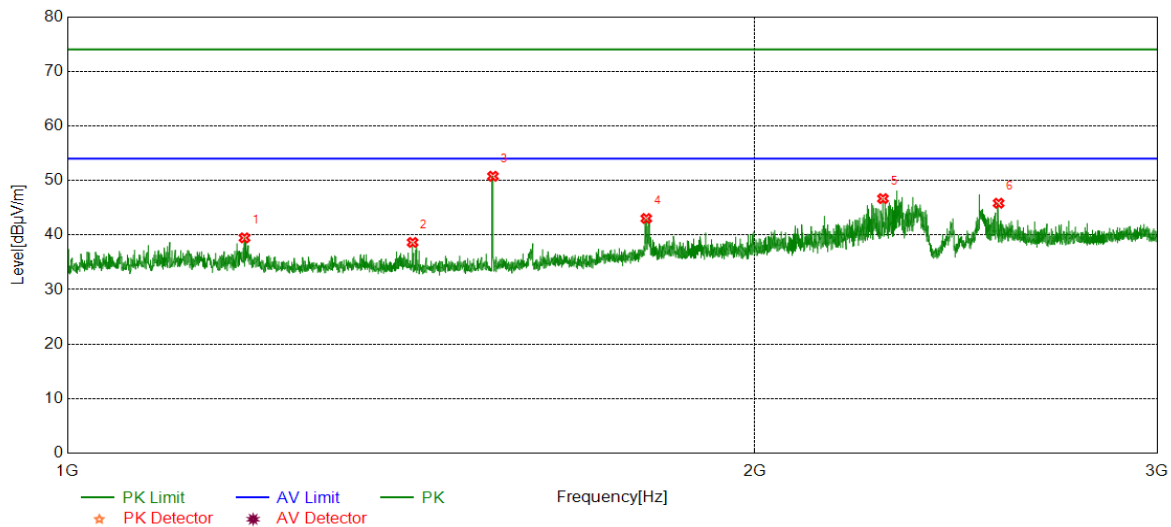


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1195.5244	45.03	-5.56	39.47	74.00	-34.53	Vertical
2	1416.3020	44.28	-5.64	38.64	74.00	-35.36	Vertical
3	1535.8170	56.52	-5.75	50.77	74.00	-23.23	Vertical
4	1792.5991	46.79	-3.76	43.03	74.00	-30.97	Vertical
5	2275.6595	48.68	-2.01	46.67	74.00	-27.33	Vertical
6	2556.9446	46.81	-0.98	45.83	74.00	-28.17	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

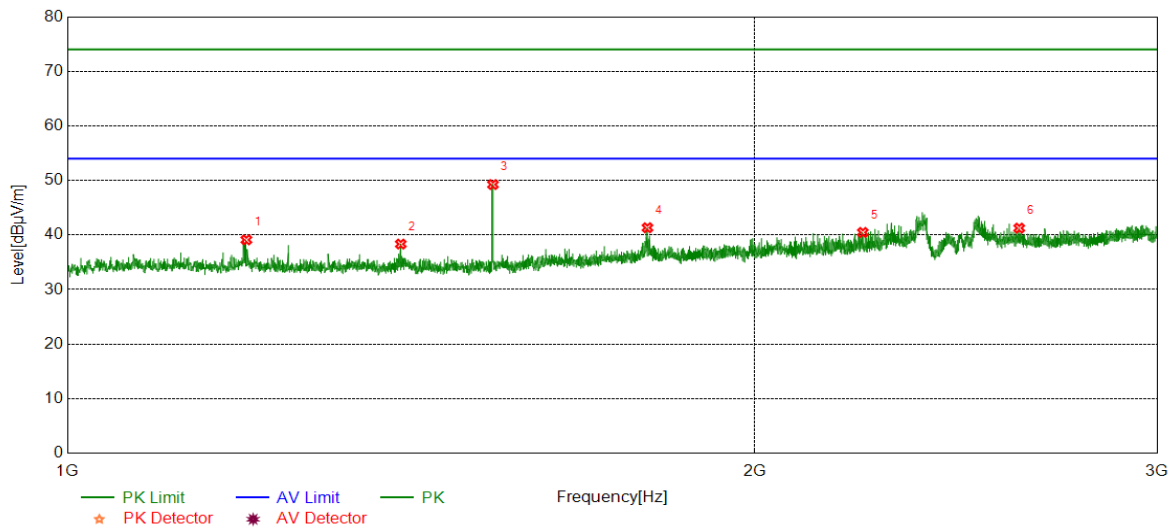


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.7747	44.67	-5.56	39.11	74.00	-34.89	Horizontal
2	1399.5499	44.00	-5.66	38.34	74.00	-35.66	Horizontal
3	1535.8170	55.00	-5.75	49.25	74.00	-24.75	Horizontal
4	1794.5993	45.12	-3.79	41.33	74.00	-32.67	Horizontal
5	2229.9037	42.64	-2.17	40.47	74.00	-33.53	Horizontal
6	2610.7013	41.55	-0.29	41.26	74.00	-32.74	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

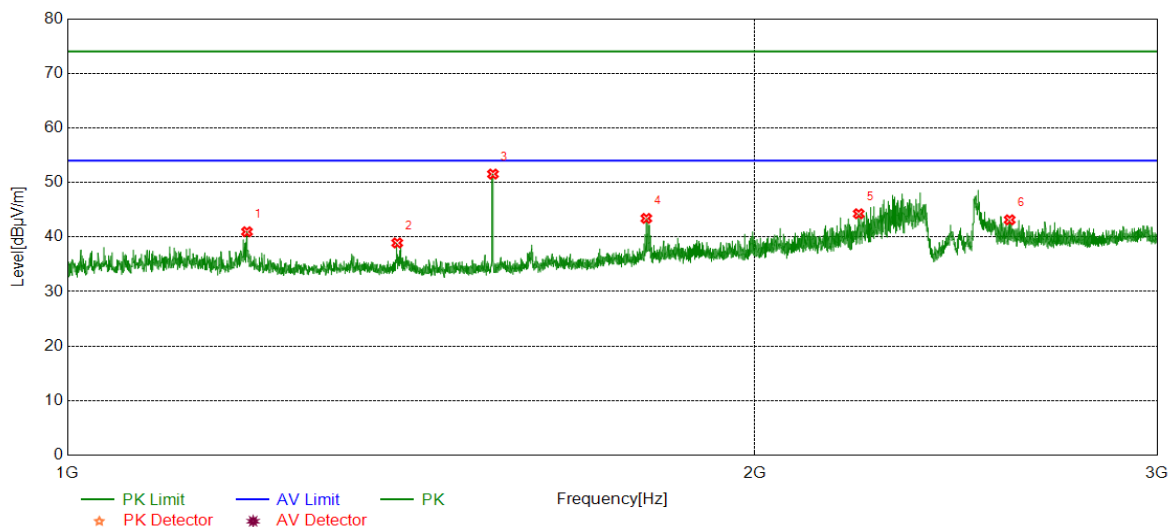

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1198.5248	46.52	-5.56	40.96	74.00	-33.04	Vertical
2	1394.5493	44.63	-5.72	38.91	74.00	-35.09	Vertical
3	1535.8170	57.29	-5.75	51.54	74.00	-22.46	Vertical
4	1792.5991	47.17	-3.76	43.41	74.00	-30.59	Vertical
5	2220.6526	46.48	-2.22	44.26	74.00	-29.74	Vertical
6	2585.6982	44.01	-0.86	43.15	74.00	-30.85	Vertical


- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part II: 3GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

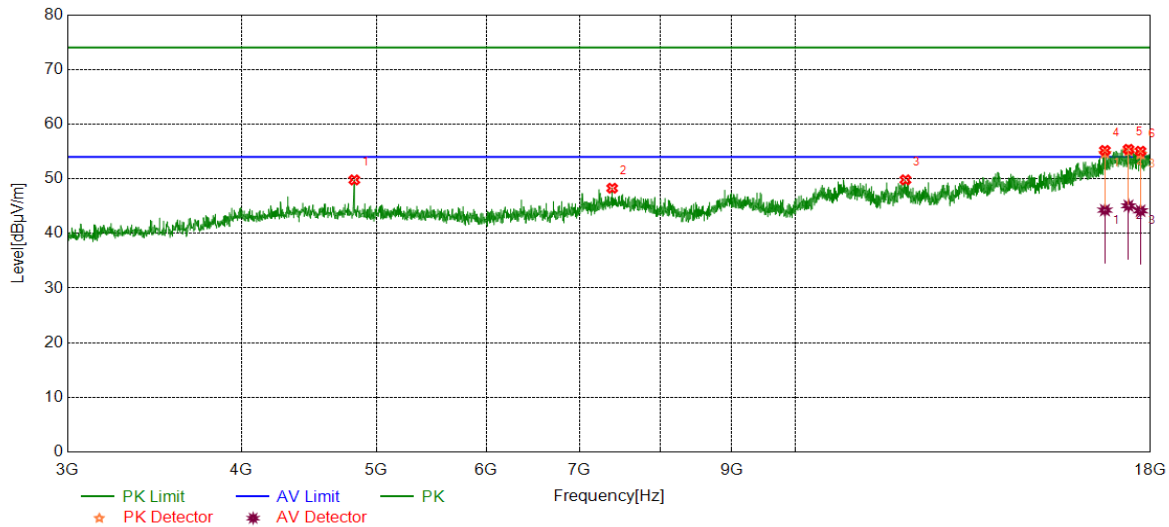

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4822.7278	44.44	5.35	49.79	74.00	-24.21	Horizontal
2	7388.0485	39.68	8.59	48.27	74.00	-25.73	Horizontal
3	12001.1251	36.86	12.95	49.81	74.00	-24.19	Horizontal
4	16692.9616	37.08	18.11	55.19	74.00	-18.81	Horizontal
5	17356.7946	37.47	17.92	55.39	74.00	-18.61	Horizontal
6	17705.5882	37.36	17.68	55.04	74.00	-18.96	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16692.9616	26.15	18.11	44.26	54.00	-9.74	Horizontal
2	17356.7946	27.14	17.92	45.06	54.00	-8.94	Horizontal
3	17705.5882	26.47	17.68	44.15	54.00	-9.85	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

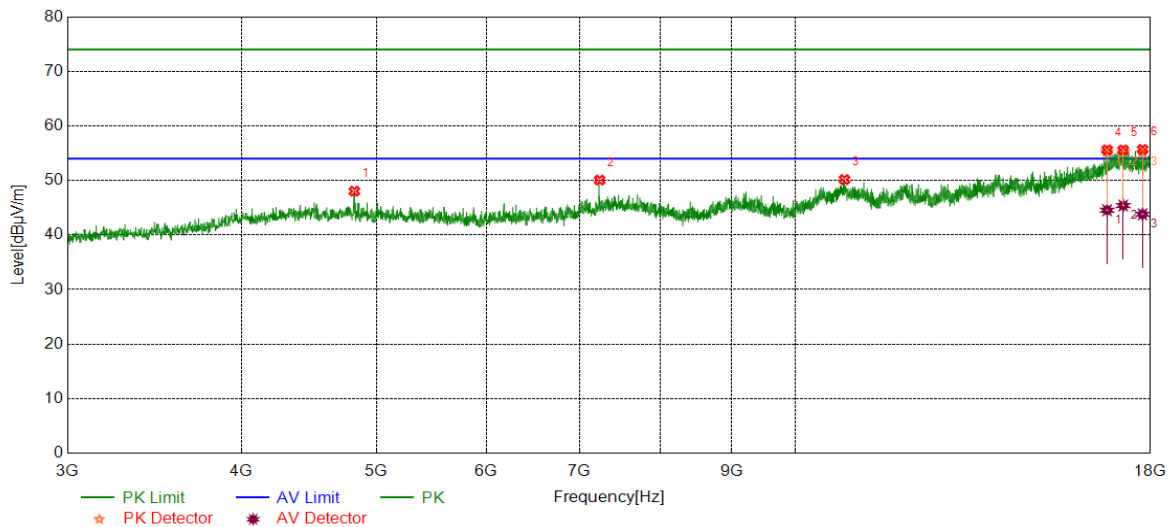

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4822.7278	42.68	5.35	48.03	74.00	-25.97	Vertical
2	7236.1545	41.50	8.56	50.06	74.00	-23.94	Vertical
3	10849.7312	37.73	12.43	50.16	74.00	-23.84	Vertical
4	16752.9691	38.12	17.49	55.61	74.00	-18.39	Vertical
5	17204.9006	37.49	18.10	55.59	74.00	-18.41	Vertical
6	17765.5957	37.97	17.71	55.68	74.00	-18.32	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16752.9691	27.05	17.49	44.54	54.00	-9.46	Vertical
2	17204.9006	27.30	18.10	45.40	54.00	-8.60	Vertical
3	17765.5957	26.09	17.71	43.80	54.00	-10.20	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

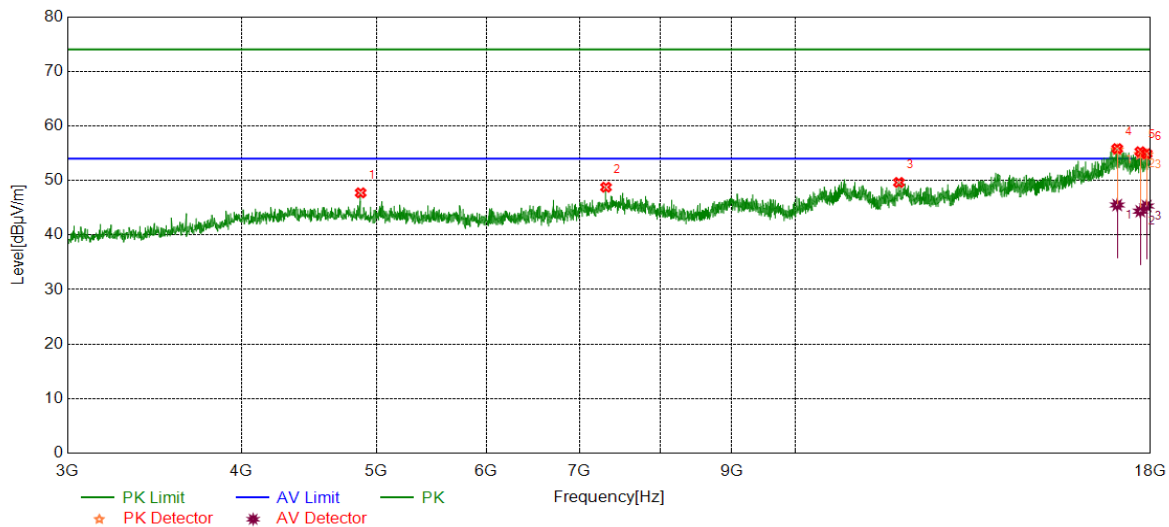

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4873.3592	42.41	5.32	47.73	74.00	-26.27	Horizontal
2	7313.0391	40.29	8.47	48.76	74.00	-25.24	Horizontal
3	11871.7340	37.28	12.35	49.63	74.00	-24.37	Horizontal
4	17036.1295	36.88	18.94	55.82	74.00	-18.18	Horizontal
5	17699.9625	37.50	17.76	55.26	74.00	-18.74	Horizontal
6	17885.6107	36.52	18.38	54.90	74.00	-19.10	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17036.1295	26.56	18.94	45.50	54.00	-8.50	Horizontal
2	17699.9625	26.60	17.76	44.36	54.00	-9.64	Horizontal
3	17885.6107	26.94	18.38	45.32	54.00	-8.68	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

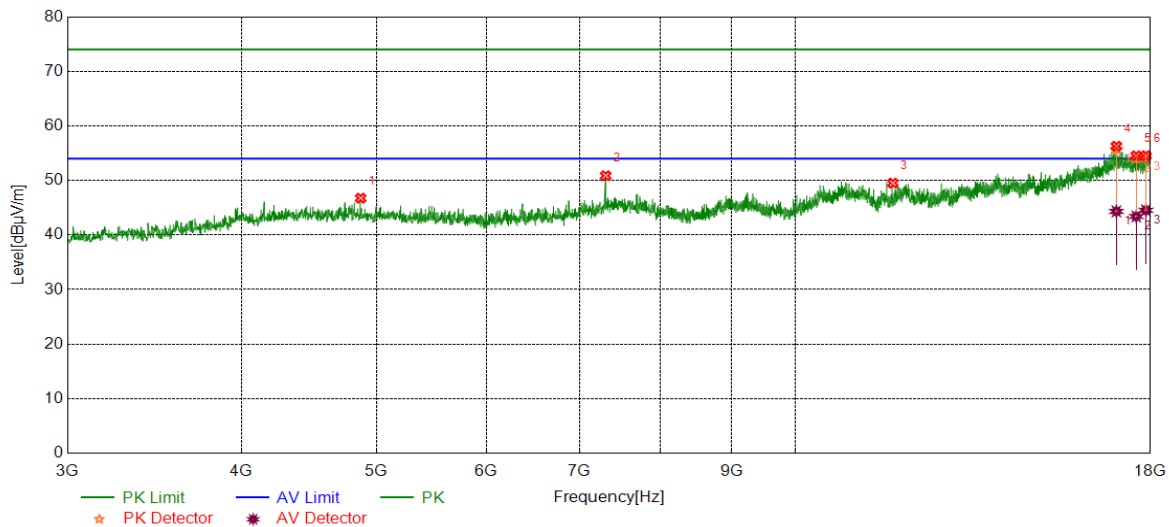

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4873.3592	41.43	5.32	46.75	74.00	-27.25	Vertical
2	7309.2887	42.42	8.44	50.86	74.00	-23.14	Vertical
3	11753.5942	37.57	11.94	49.51	74.00	-24.49	Vertical
4	17011.7515	37.78	18.49	56.27	74.00	-17.73	Vertical
5	17579.9475	36.96	17.56	54.52	74.00	-19.48	Vertical
6	17863.1079	36.07	18.45	54.52	74.00	-19.48	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17011.7515	25.84	18.49	44.33	54.00	-9.67	Vertical
2	17579.9475	25.84	17.56	43.40	54.00	-10.60	Vertical
3	17863.1079	26.08	18.45	44.53	54.00	-9.47	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

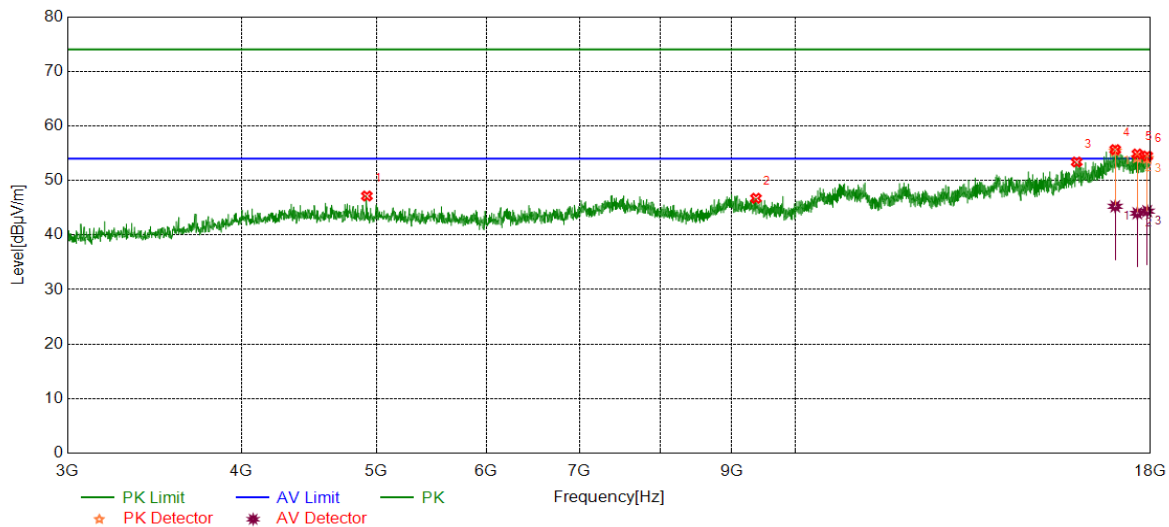

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4923.9905	41.97	5.18	47.15	74.00	-26.85	Horizontal
2	9372.0465	37.94	8.79	46.73	74.00	-27.27	Horizontal
3	15931.6165	37.50	15.88	53.38	74.00	-20.62	Horizontal
4	16979.8725	36.90	18.75	55.65	74.00	-18.35	Horizontal
5	17611.8265	37.03	17.82	54.85	74.00	-19.15	Horizontal
6	17902.4878	36.11	18.37	54.48	74.00	-19.52	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16979.8725	26.50	18.75	45.25	54.00	-8.75	Horizontal
2	17611.8265	26.17	17.82	43.99	54.00	-10.01	Horizontal
3	17902.4878	26.00	18.37	44.37	54.00	-9.63	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

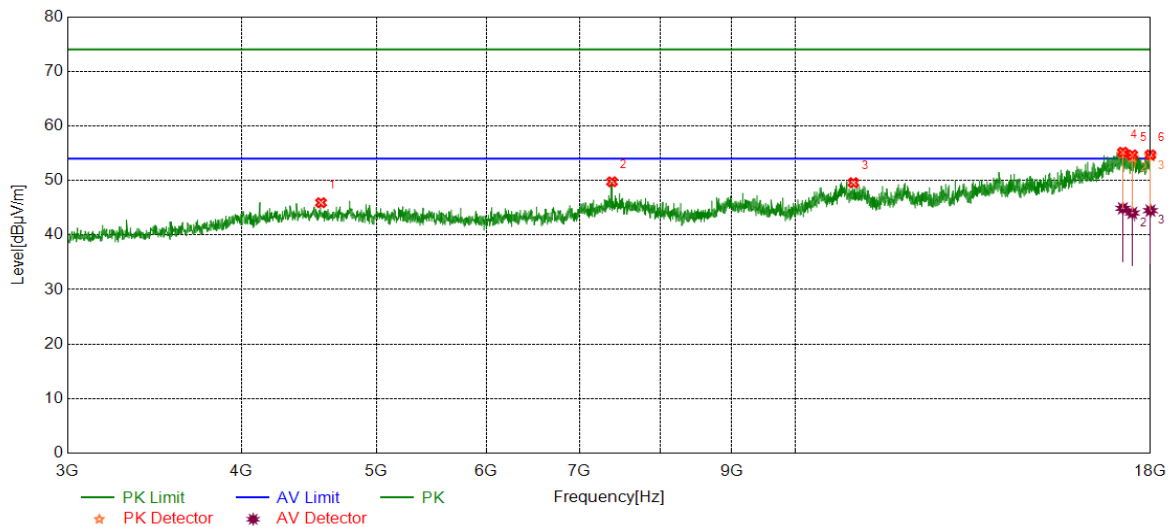

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4563.9455	40.63	5.29	45.92	74.00	-28.08	Vertical
2	7386.1733	41.17	8.59	49.76	74.00	-24.24	Vertical
3	11011.0014	37.12	12.47	49.59	74.00	-24.41	Vertical
4	17195.5244	36.89	18.28	55.17	74.00	-18.83	Vertical
5	17465.5582	36.94	17.74	54.68	74.00	-19.32	Vertical
6	17998.1248	36.68	18.01	54.69	74.00	-19.31	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17195.5244	26.61	18.28	44.89	54.00	-9.11	Vertical
2	17465.5582	26.30	17.74	44.04	54.00	-9.96	Vertical
3	17998.1248	26.46	18.01	44.47	54.00	-9.53	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

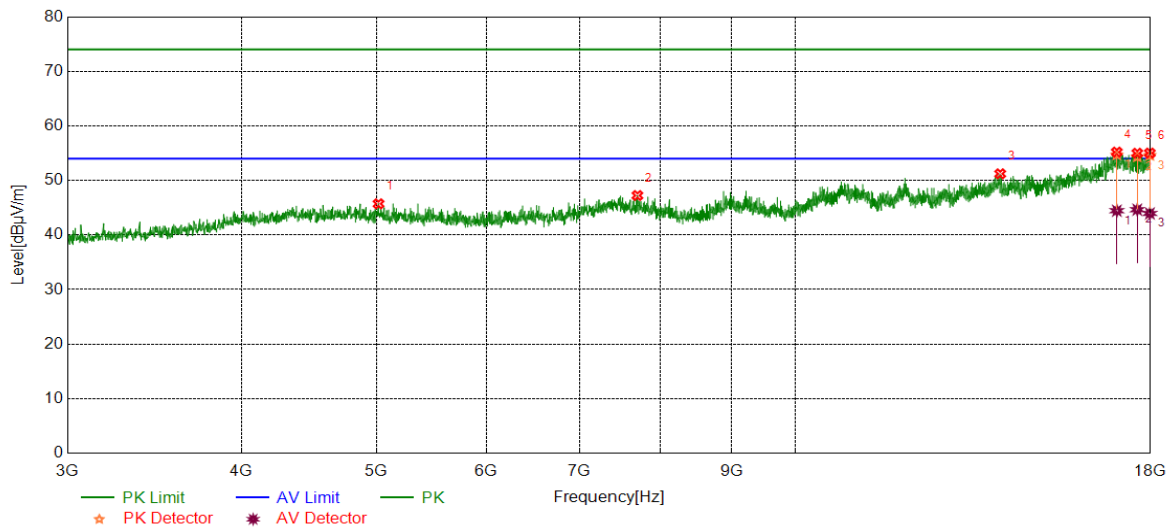

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5019.6275	40.31	5.41	45.72	74.00	-28.28	Horizontal
2	7703.0879	38.82	8.42	47.24	74.00	-26.76	Horizontal
3	14037.6297	36.89	14.33	51.22	74.00	-22.78	Horizontal
4	17024.8781	36.52	18.68	55.20	74.00	-18.80	Horizontal
5	17609.9512	37.13	17.87	55.00	74.00	-19.00	Horizontal
6	17981.2477	36.98	18.04	55.02	74.00	-18.98	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17024.8781	25.77	18.68	44.45	54.00	-9.55	Horizontal
2	17609.9512	26.77	17.87	44.64	54.00	-9.36	Horizontal
3	17981.2477	25.91	18.04	43.95	54.00	-10.05	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

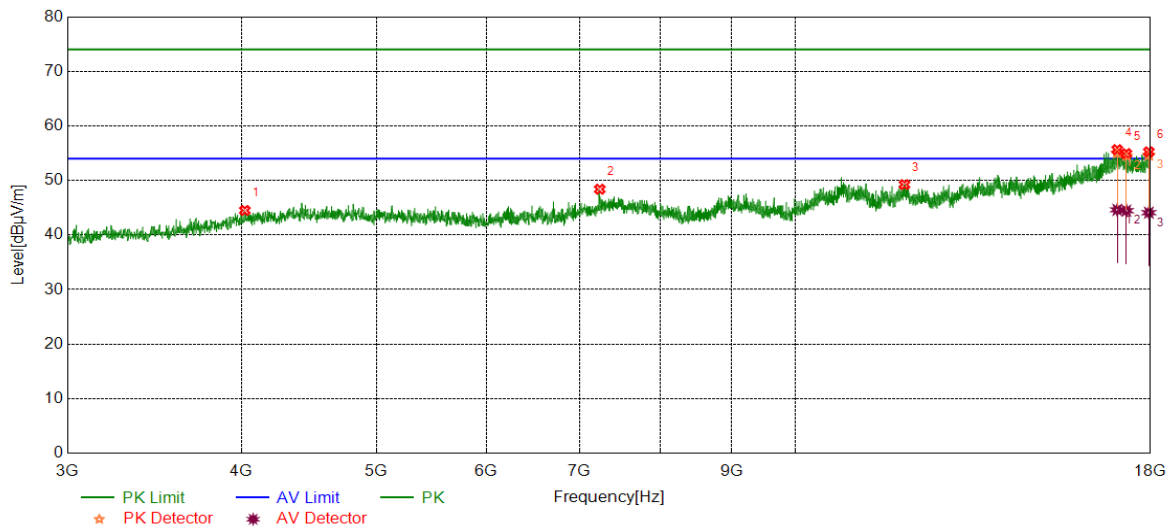

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4023.8780	40.06	4.44	44.50	74.00	-29.50	Vertical
2	7238.0298	39.82	8.57	48.39	74.00	-25.61	Vertical
3	11982.3728	36.41	12.83	49.24	74.00	-24.76	Vertical
4	17036.1295	36.71	18.94	55.65	74.00	-18.35	Vertical
5	17294.9119	37.09	17.83	54.92	74.00	-19.08	Vertical
6	17951.2439	36.69	18.56	55.25	74.00	-18.75	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17036.1295	25.67	18.94	44.61	54.00	-9.39	Vertical
2	17294.9119	26.63	17.83	44.46	54.00	-9.54	Vertical
3	17951.2439	25.53	18.56	44.09	54.00	-9.91	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

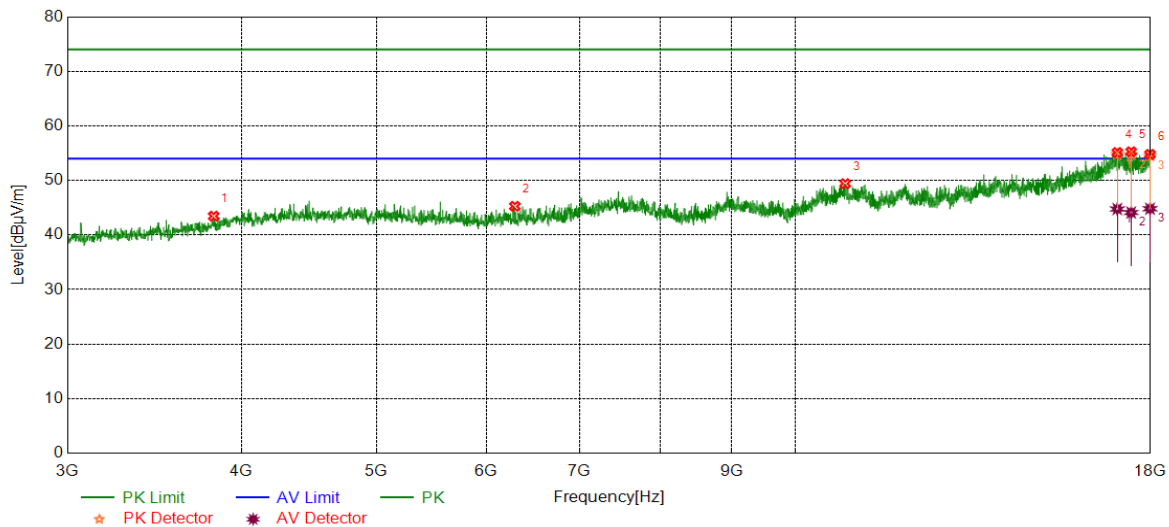

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3821.3527	39.69	3.76	43.45	74.00	-30.55	Horizontal
2	6289.1611	38.99	6.27	45.26	74.00	-28.74	Horizontal
3	10862.8579	37.23	12.17	49.40	74.00	-24.60	Horizontal
4	17038.0048	36.20	18.92	55.12	74.00	-18.88	Horizontal
5	17433.6792	37.37	17.89	55.26	74.00	-18.74	Horizontal
6	17984.9981	36.97	17.81	54.78	74.00	-19.22	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17038.0048	25.84	18.92	44.76	54.00	-9.24	Horizontal
2	17433.6792	26.23	17.89	44.12	54.00	-9.88	Horizontal
3	17984.9981	27.01	17.81	44.82	54.00	-9.18	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

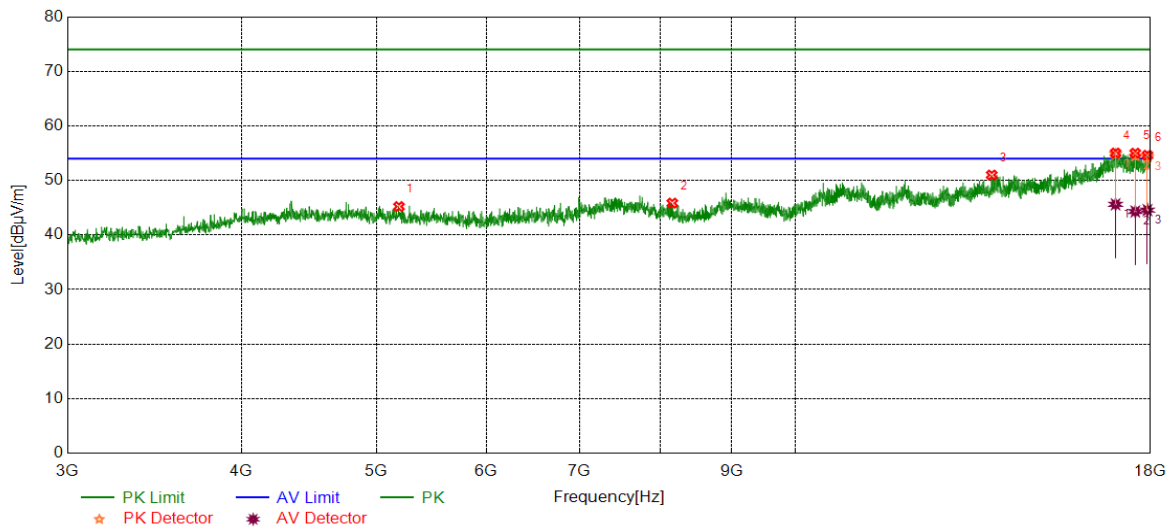

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5192.1490	40.04	5.17	45.21	74.00	-28.79	Vertical
2	8160.6451	38.66	7.18	45.84	74.00	-28.16	Vertical
3	13842.6053	37.45	13.55	51.00	74.00	-23.00	Vertical
4	16989.2487	36.24	18.78	55.02	74.00	-18.98	Vertical
5	17551.8190	36.95	18.05	55.00	74.00	-19.00	Vertical
6	17909.9887	36.34	18.28	54.62	74.00	-19.38	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16989.2487	26.84	18.78	45.62	54.00	-8.38	Vertical
2	17551.8190	26.26	18.05	44.31	54.00	-9.69	Vertical
3	17909.9887	26.28	18.28	44.56	54.00	-9.44	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

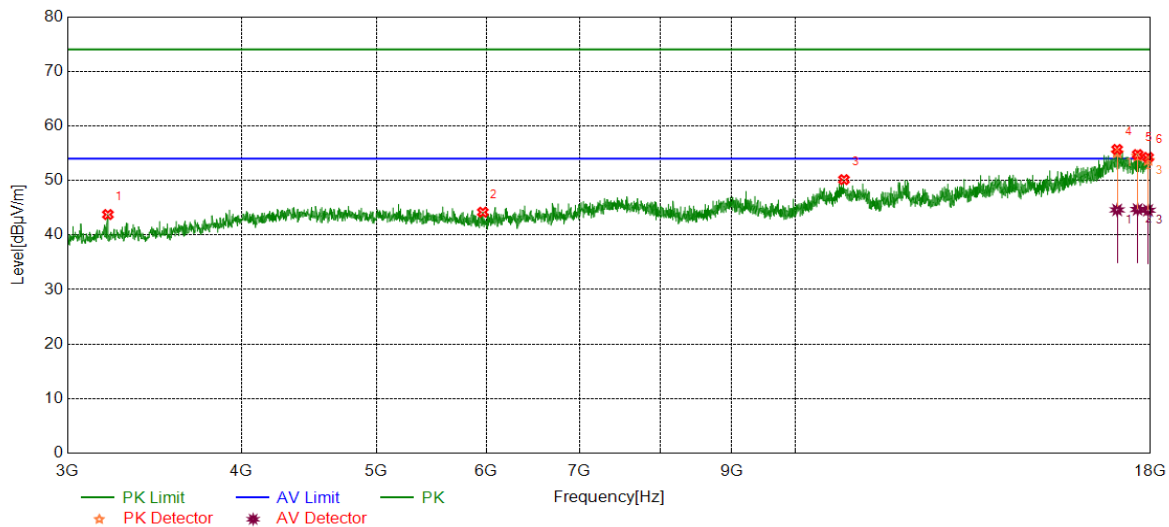

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3208.1510	42.84	0.91	43.75	74.00	-30.25	Horizontal
2	5964.7456	39.02	5.16	44.18	74.00	-29.82	Horizontal
3	10840.3550	38.00	12.15	50.15	74.00	-23.85	Horizontal
4	17034.2543	36.72	18.97	55.69	74.00	-18.31	Horizontal
5	17621.2027	37.18	17.57	54.75	74.00	-19.25	Horizontal
6	17928.7411	36.13	18.10	54.23	74.00	-19.77	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17034.2543	25.63	18.97	44.60	54.00	-9.40	Horizontal
2	17621.2027	27.11	17.57	44.68	54.00	-9.32	Horizontal
3	17928.7411	26.43	18.10	44.53	54.00	-9.47	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

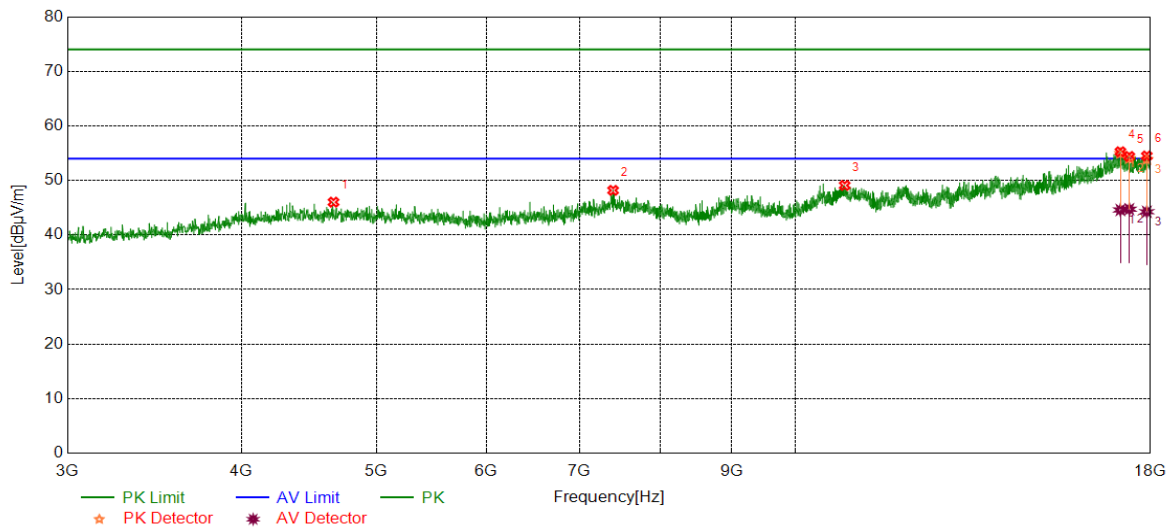

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4659.5824	40.47	5.55	46.02	74.00	-27.98	Vertical
2	7399.2999	39.50	8.68	48.18	74.00	-25.82	Vertical
3	10853.4817	36.75	12.34	49.09	74.00	-24.91	Vertical
4	17126.1408	37.28	17.98	55.26	74.00	-18.74	Vertical
5	17379.2974	35.80	18.60	54.40	74.00	-19.60	Vertical
6	17891.2364	35.96	18.53	54.49	74.00	-19.51	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17126.1408	26.61	17.98	44.59	54.00	-9.41	Vertical
2	17379.2974	26.13	18.60	44.73	54.00	-9.27	Vertical
3	17891.2364	25.73	18.53	44.26	54.00	-9.74	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

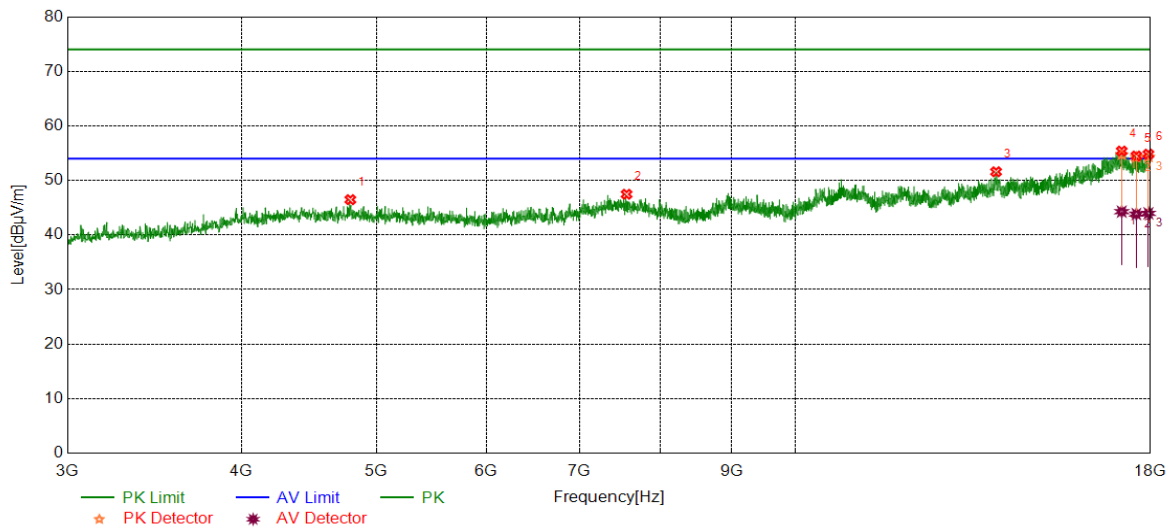

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4790.8489	40.38	6.10	46.48	74.00	-27.52	Horizontal
2	7566.1958	38.91	8.56	47.47	74.00	-26.53	Horizontal
3	13941.9927	37.23	14.36	51.59	74.00	-22.41	Horizontal
4	17163.6455	37.11	18.28	55.39	74.00	-18.61	Horizontal
5	17583.6980	37.04	17.44	54.48	74.00	-19.52	Horizontal
6	17938.1173	36.57	18.25	54.82	74.00	-19.18	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17163.6455	26.00	18.28	44.28	54.00	-9.72	Horizontal
2	17583.6980	26.40	17.44	43.84	54.00	-10.16	Horizontal
3	17938.1173	25.72	18.25	43.97	54.00	-10.03	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

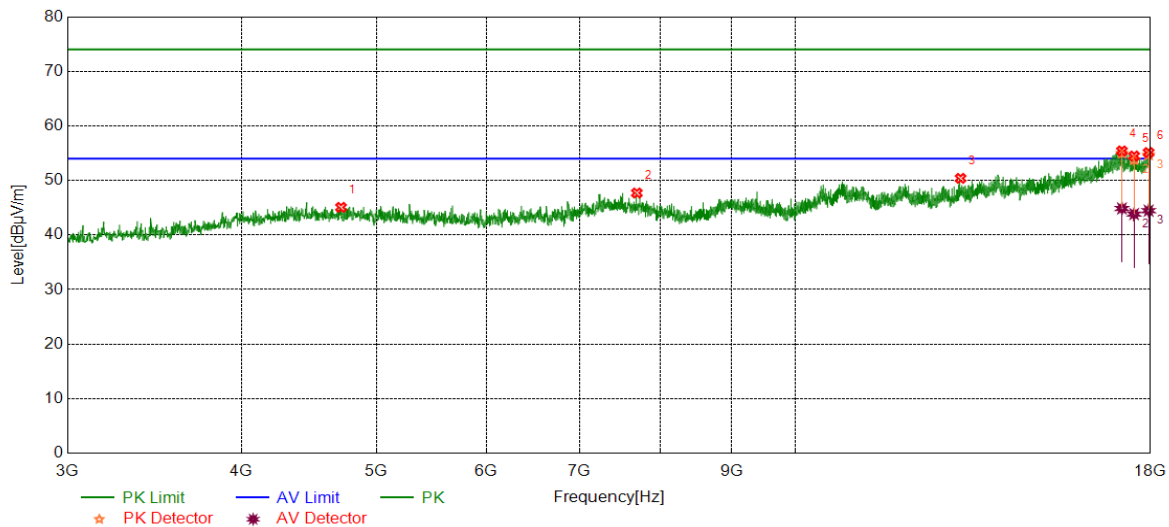

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4717.7147	39.51	5.56	45.07	74.00	-28.93	Vertical
2	7695.5869	39.12	8.58	47.70	74.00	-26.30	Vertical
3	13146.8934	38.09	12.29	50.38	74.00	-23.62	Vertical
4	17169.2712	37.05	18.36	55.41	74.00	-18.59	Vertical
5	17518.0648	36.75	17.73	54.48	74.00	-19.52	Vertical
6	17943.7430	36.73	18.38	55.11	74.00	-18.89	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17169.2712	26.50	18.36	44.86	54.00	-9.14	Vertical
2	17518.0648	26.11	17.73	43.84	54.00	-10.16	Vertical
3	17943.7430	26.08	18.38	44.46	54.00	-9.54	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

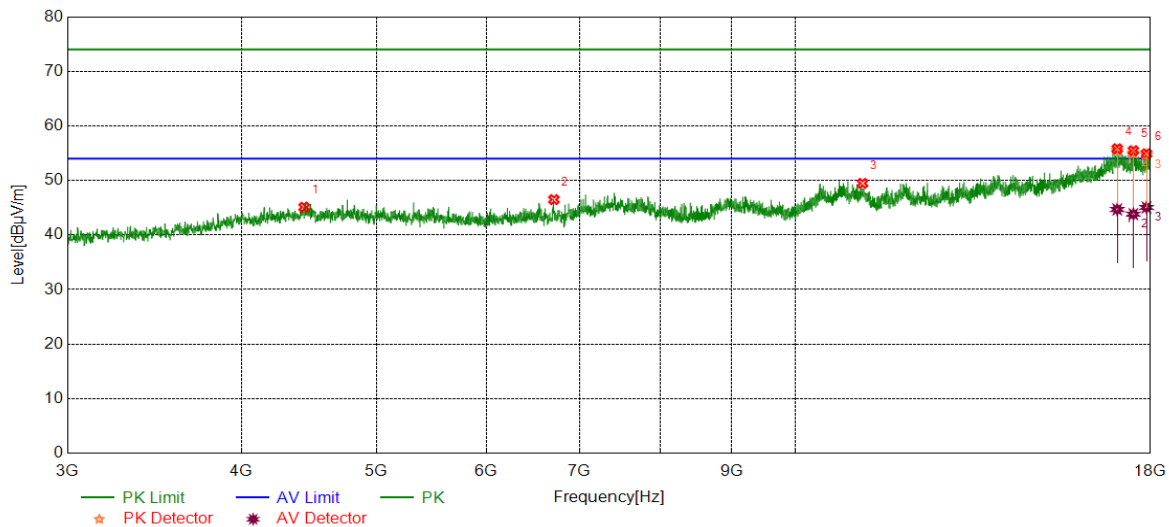

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4438.3048	40.00	5.10	45.10	74.00	-28.90	Horizontal
2	6709.2137	38.42	8.07	46.49	74.00	-27.51	Horizontal
3	11177.8972	37.53	11.94	49.47	74.00	-24.53	Horizontal
4	17036.1295	36.87	18.94	55.81	74.00	-18.19	Horizontal
5	17495.5619	37.74	17.72	55.46	74.00	-18.54	Horizontal
6	17881.8602	36.68	18.22	54.90	74.00	-19.10	Horizontal


AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17036.1295	25.74	18.94	44.68	54.00	-9.32	Horizontal
2	17495.5619	26.10	17.72	43.82	54.00	-10.18	Horizontal
3	17881.8602	26.83	18.22	45.05	54.00	-8.95	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

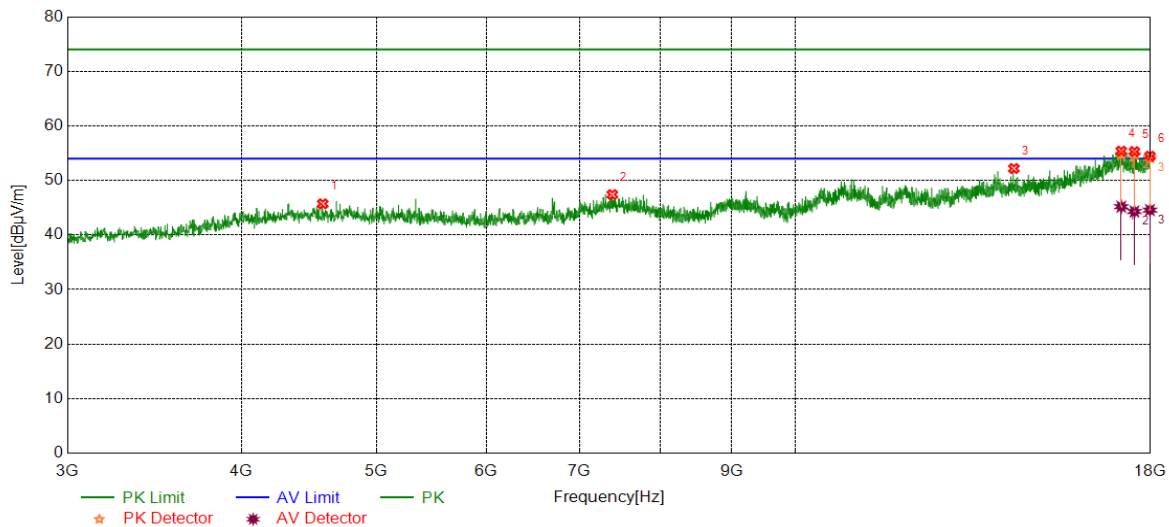

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4577.0721	40.33	5.39	45.72	74.00	-28.28	Vertical
2	7389.9237	38.82	8.59	47.41	74.00	-26.59	Vertical
3	14358.2948	38.47	13.72	52.19	74.00	-21.81	Vertical
4	17150.5188	37.11	18.27	55.38	74.00	-18.62	Vertical
5	17527.4409	37.42	17.87	55.29	74.00	-18.71	Vertical
6	17983.1229	36.53	17.92	54.45	74.00	-19.55	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17150.5188	26.92	18.27	45.19	54.00	-8.81	Vertical
2	17527.4409	26.44	17.87	44.31	54.00	-9.69	Vertical
3	17983.1229	26.65	17.92	44.57	54.00	-9.43	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

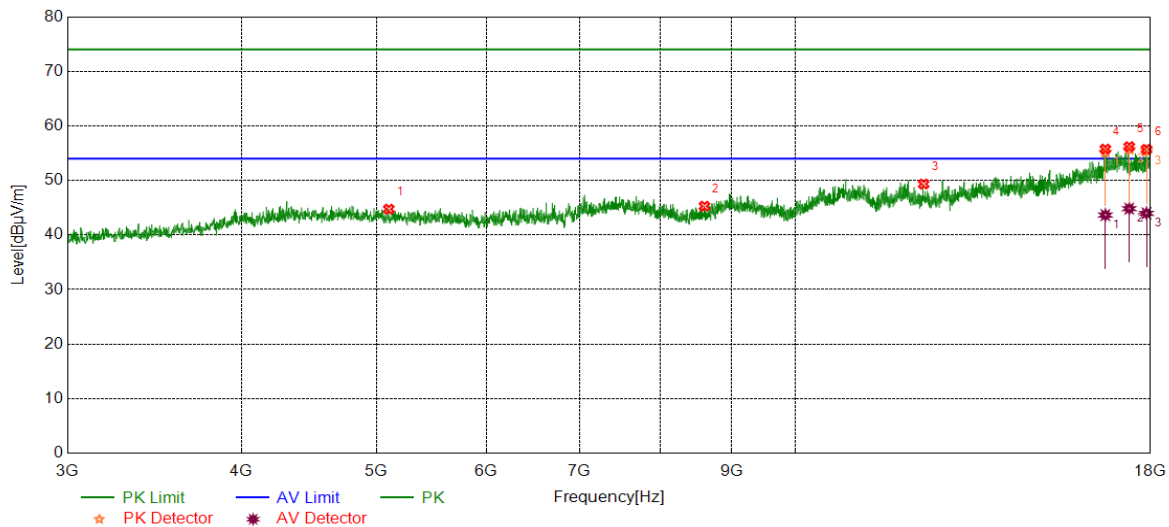

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5105.8882	39.42	5.32	44.74	74.00	-29.26	Horizontal
2	8606.9509	38.38	6.90	45.28	74.00	-28.72	Horizontal
3	12368.6711	37.52	11.82	49.34	74.00	-24.66	Horizontal
4	16704.2130	38.22	17.53	55.75	74.00	-18.25	Horizontal
5	17377.4222	37.61	18.58	56.19	74.00	-17.81	Horizontal
6	17881.8602	37.47	18.22	55.69	74.00	-18.31	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16704.2130	26.12	17.53	43.65	54.00	-10.35	Horizontal
2	17377.4222	26.25	18.58	44.83	54.00	-9.17	Horizontal
3	17881.8602	25.75	18.22	43.97	54.00	-10.03	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

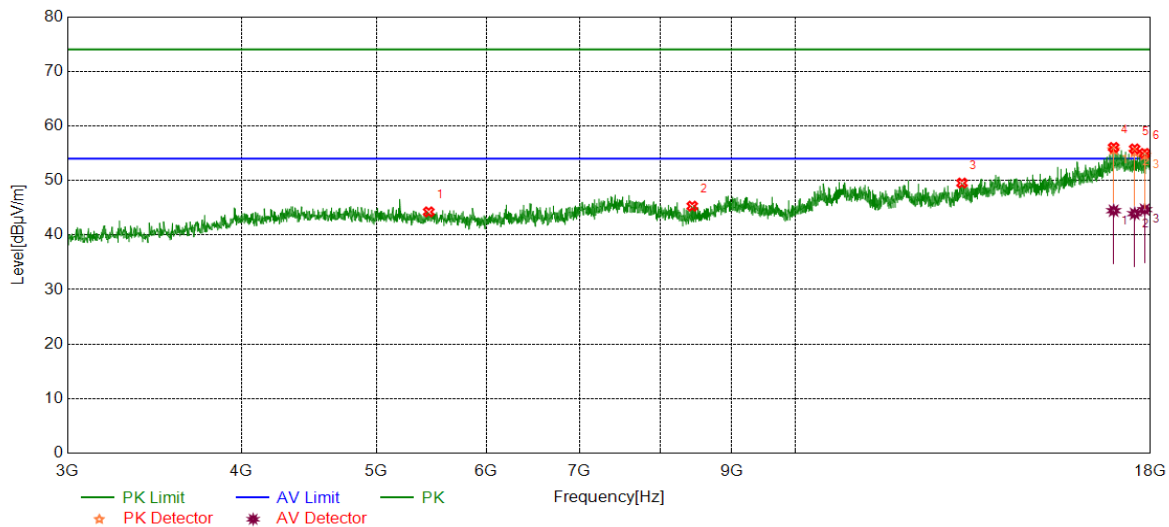

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5454.6818	38.50	5.74	44.24	74.00	-29.76	Vertical
2	8434.4293	38.67	6.62	45.29	74.00	-28.71	Vertical
3	13178.7723	36.95	12.58	49.53	74.00	-24.47	Vertical
4	16934.8669	37.64	18.41	56.05	74.00	-17.95	Vertical
5	17534.9419	38.13	17.65	55.78	74.00	-18.22	Vertical
6	17829.3537	36.86	18.10	54.96	74.00	-19.04	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16934.8669	26.04	18.41	44.45	54.00	-9.55	Vertical
2	17534.9419	26.26	17.65	43.91	54.00	-10.09	Vertical
3	17829.3537	26.56	18.10	44.66	54.00	-9.34	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

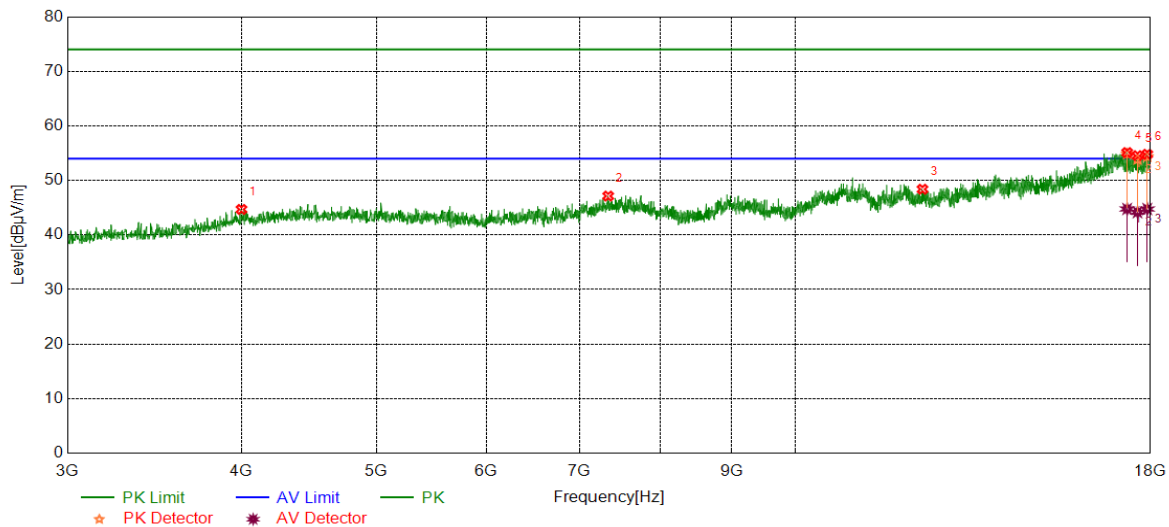

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4001.3752	40.36	4.33	44.69	74.00	-29.31	Horizontal
2	7339.2924	38.56	8.58	47.14	74.00	-26.86	Horizontal
3	12344.2930	36.65	11.74	48.39	74.00	-25.61	Horizontal
4	17317.4147	37.37	17.74	55.11	74.00	-18.89	Horizontal
5	17617.4522	36.86	17.68	54.54	74.00	-19.46	Horizontal
6	17904.3630	36.46	18.35	54.81	74.00	-19.19	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17317.4147	27.03	17.74	44.77	54.00	-9.23	Horizontal
2	17617.4522	26.50	17.68	44.18	54.00	-9.82	Horizontal
3	17904.3630	26.41	18.35	44.76	54.00	-9.24	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

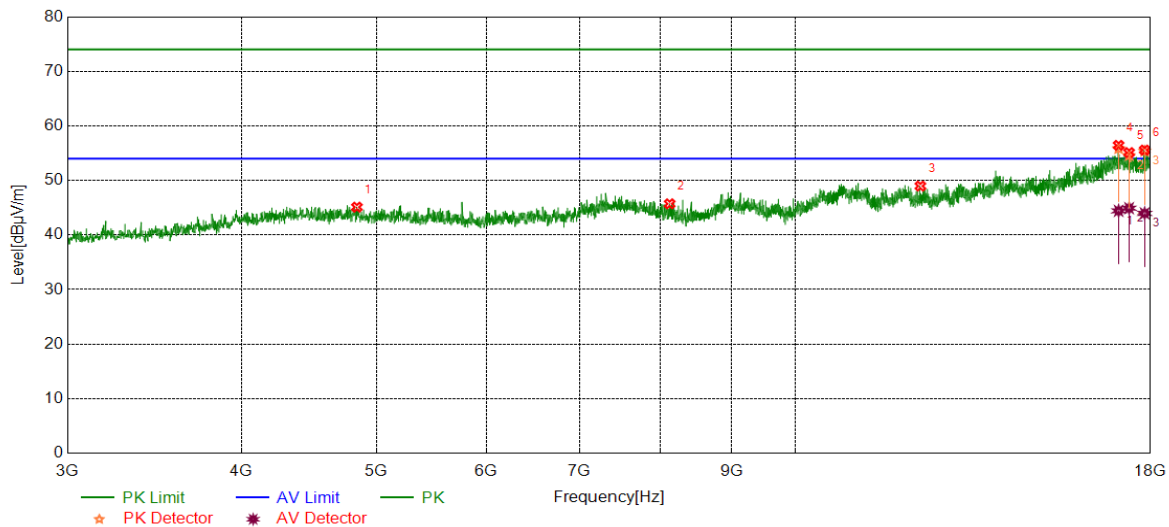

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4843.3554	39.66	5.45	45.11	74.00	-28.89	Vertical
2	8125.0156	38.35	7.37	45.72	74.00	-28.28	Vertical
3	12301.1626	37.13	11.84	48.97	74.00	-25.03	Vertical
4	17075.5094	37.51	18.93	56.44	74.00	-17.56	Vertical
5	17373.6717	36.57	18.54	55.11	74.00	-18.89	Vertical
6	17827.4784	37.55	18.02	55.57	74.00	-18.43	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17075.5094	25.50	18.93	44.43	54.00	-9.57	Vertical
2	17373.6717	26.38	18.54	44.92	54.00	-9.08	Vertical
3	17827.4784	25.94	18.02	43.96	54.00	-10.04	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

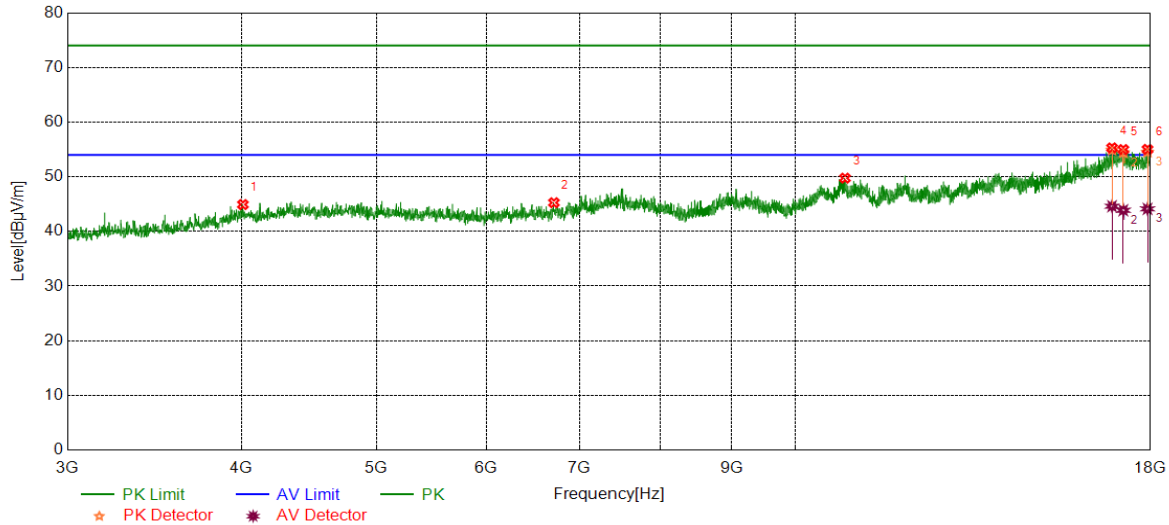

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4010.7513	40.30	4.62	44.92	74.00	-29.08	Horizontal
2	6709.2137	37.19	8.07	45.26	74.00	-28.74	Horizontal
3	10859.1074	37.56	12.19	49.75	74.00	-24.25	Horizontal
4	16889.8612	37.50	17.79	55.29	74.00	-18.71	Horizontal
5	17208.6511	37.08	17.90	54.98	74.00	-19.02	Horizontal
6	17911.8640	36.83	18.19	55.02	74.00	-18.98	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16889.8612	26.82	17.79	44.61	54.00	-9.39	Horizontal
2	17208.6511	25.97	17.90	43.87	54.00	-10.13	Horizontal
3	17911.8640	25.94	18.19	44.13	54.00	-9.87	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

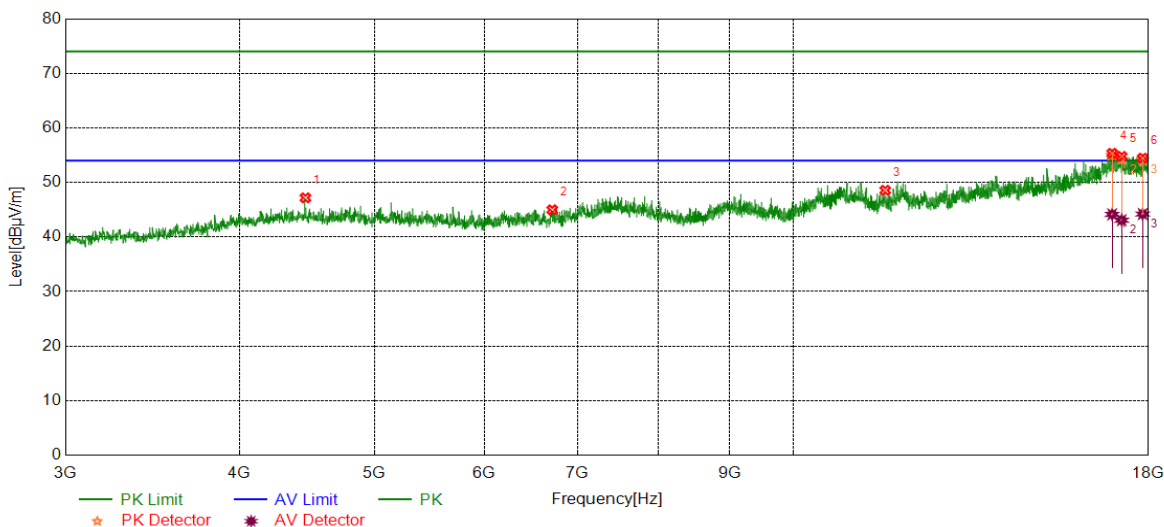

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4462.6828	41.46	5.72	47.18	74.00	-26.82	Vertical
2	6712.9641	37.00	7.98	44.98	74.00	-29.02	Vertical
3	11644.8306	36.97	11.59	48.56	74.00	-25.44	Vertical
4	16949.8687	36.99	18.35	55.34	74.00	-18.66	Vertical
5	17219.9025	37.16	17.62	54.78	74.00	-19.22	Vertical
6	17827.4784	36.43	18.02	54.45	74.00	-19.55	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16949.8687	25.80	18.35	44.15	54.00	-9.85	Vertical
2	17219.9025	25.46	17.62	43.08	54.00	-10.92	Vertical
3	17827.4784	26.19	18.02	44.21	54.00	-9.79	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

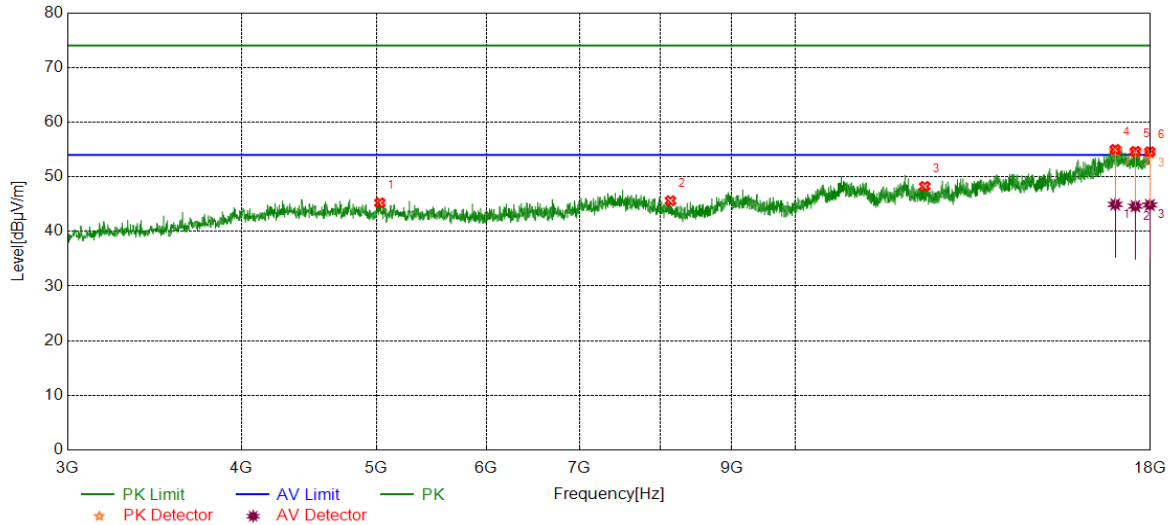

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5030.8789	39.64	5.59	45.23	74.00	-28.77	Horizontal
2	8136.2670	38.18	7.43	45.61	74.00	-28.39	Horizontal
3	12389.2987	36.62	11.62	48.24	74.00	-25.76	Horizontal
4	16979.8725	36.25	18.75	55.00	74.00	-19.00	Horizontal
5	17555.5694	36.66	17.98	54.64	74.00	-19.36	Horizontal
6	17981.2477	36.54	18.04	54.58	74.00	-19.42	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16979.8725	26.20	18.75	44.95	54.00	-9.05	Horizontal
2	17555.5694	26.64	17.98	44.62	54.00	-9.38	Horizontal
3	17981.2477	26.80	18.04	44.84	54.00	-9.16	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

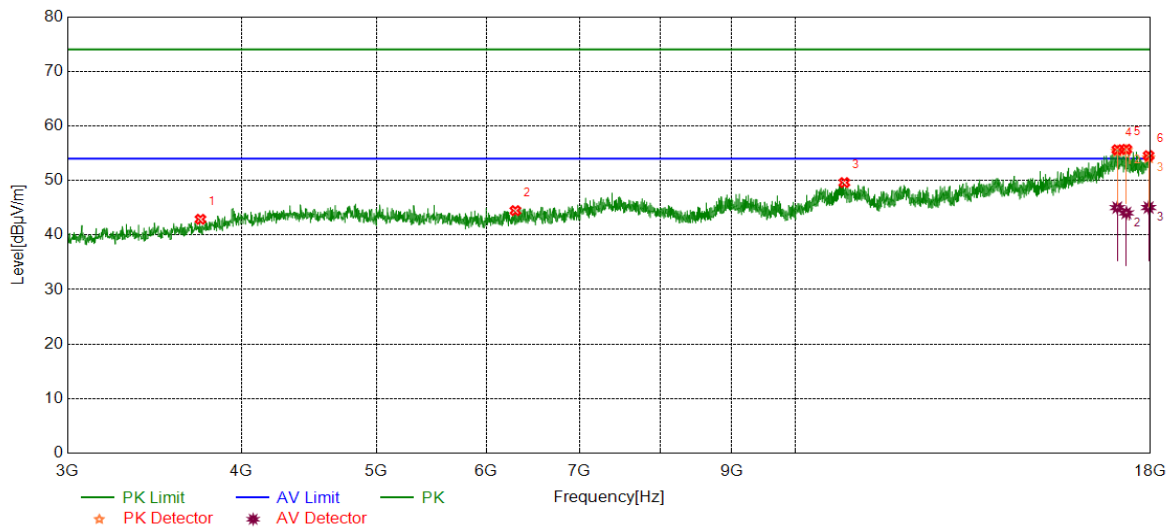

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3738.8424	40.04	2.84	42.88	74.00	-31.12	Vertical
2	6294.7868	38.22	6.25	44.47	74.00	-29.53	Vertical
3	10847.8560	37.24	12.37	49.61	74.00	-24.39	Vertical
4	17038.0048	36.71	18.92	55.63	74.00	-18.37	Vertical
5	17294.9119	37.88	17.83	55.71	74.00	-18.29	Vertical
6	17943.7430	36.16	18.38	54.54	74.00	-19.46	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17038.0048	26.10	18.92	45.02	54.00	-8.98	Vertical
2	17294.9119	26.21	17.83	44.04	54.00	-9.96	Vertical
3	17943.7430	26.66	18.38	45.04	54.00	-8.96	Vertical


- Note: 1. Measurement = Reading Level + Correct Factor;
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part III: 18GHz~26.5GHz

SPURIOUS EMISSIONS 18GHz TO 26.5GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

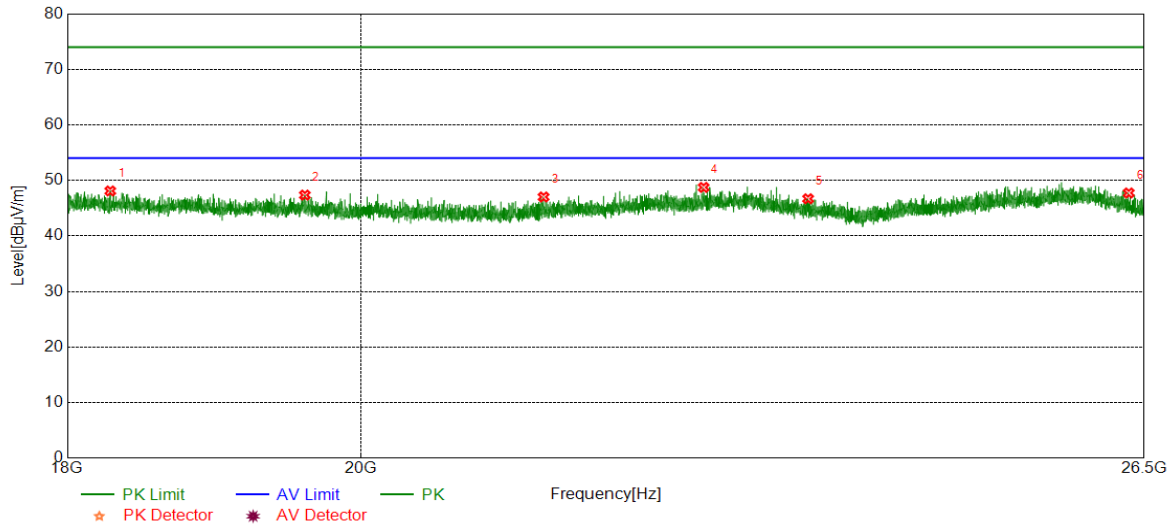


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	18279.6780	49.12	-1.02	48.10	74.00	-25.90	Horizontal
2	19603.2603	48.05	-0.69	47.36	74.00	-26.64	Horizontal
3	21358.6859	47.67	-0.65	47.02	74.00	-26.98	Horizontal
4	22622.7623	47.81	0.93	48.74	74.00	-25.26	Horizontal
5	23488.1488	46.79	-0.09	46.70	74.00	-27.30	Horizontal
6	26356.3356	46.79	0.95	47.74	74.00	-26.26	Horizontal

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

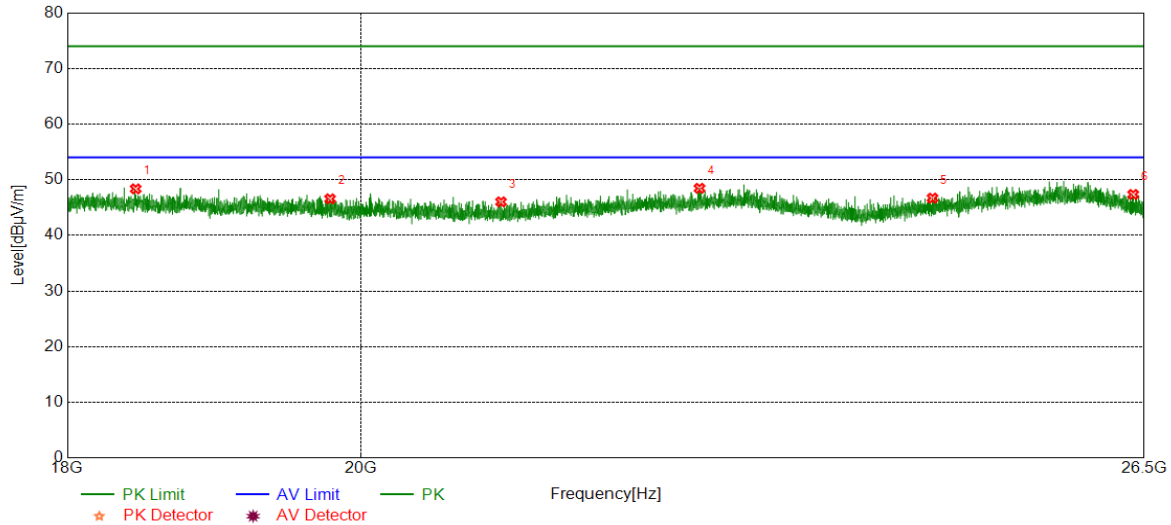

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	18447.1447	49.31	-0.95	48.36	74.00	-25.64	Vertical
2	19781.7782	47.20	-0.63	46.57	74.00	-27.43	Vertical
3	21034.8035	47.00	-0.97	46.03	74.00	-27.97	Vertical
4	22589.6090	47.56	0.90	48.46	74.00	-25.54	Vertical
5	24561.8062	47.19	-0.49	46.70	74.00	-27.30	Vertical
6	26397.9898	46.50	0.86	47.36	74.00	-26.64	Vertical


Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part IV: 30MHz~1GHz

SPURIOUS EMISSIONS 30M TO 1GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

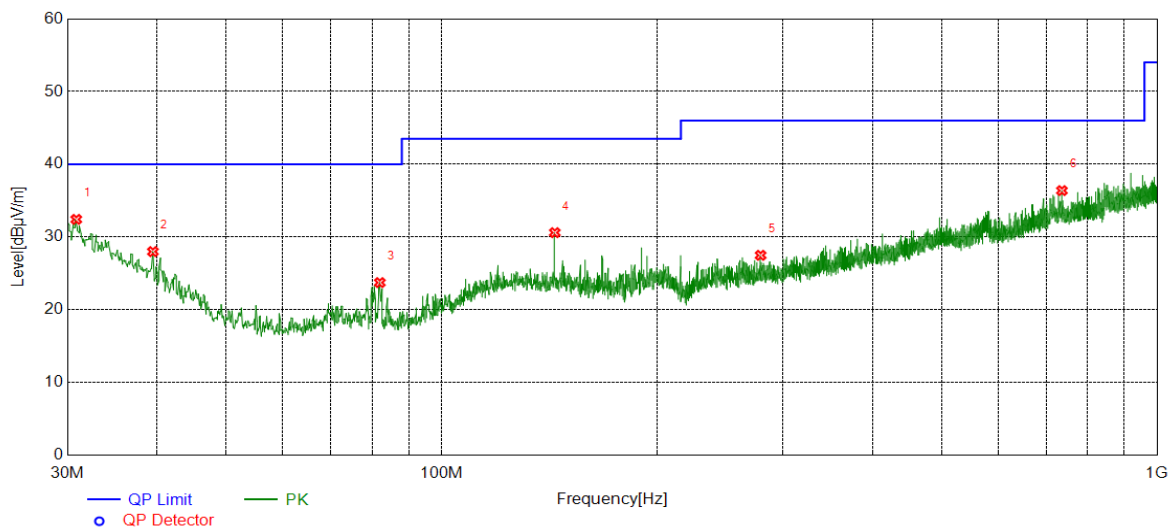


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	30.8731	5.93	26.49	32.42	40.00	-7.58	Horizontal
2	39.5070	7.01	20.98	27.99	40.00	-12.01	Horizontal
3	81.9972	9.33	14.40	23.73	40.00	-16.27	Horizontal
4	143.9864	10.86	19.74	30.60	43.50	-12.90	Horizontal
5	279.2179	7.07	20.41	27.48	46.00	-18.52	Horizontal
6	736.2306	7.41	28.97	36.38	46.00	-9.62	Horizontal

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

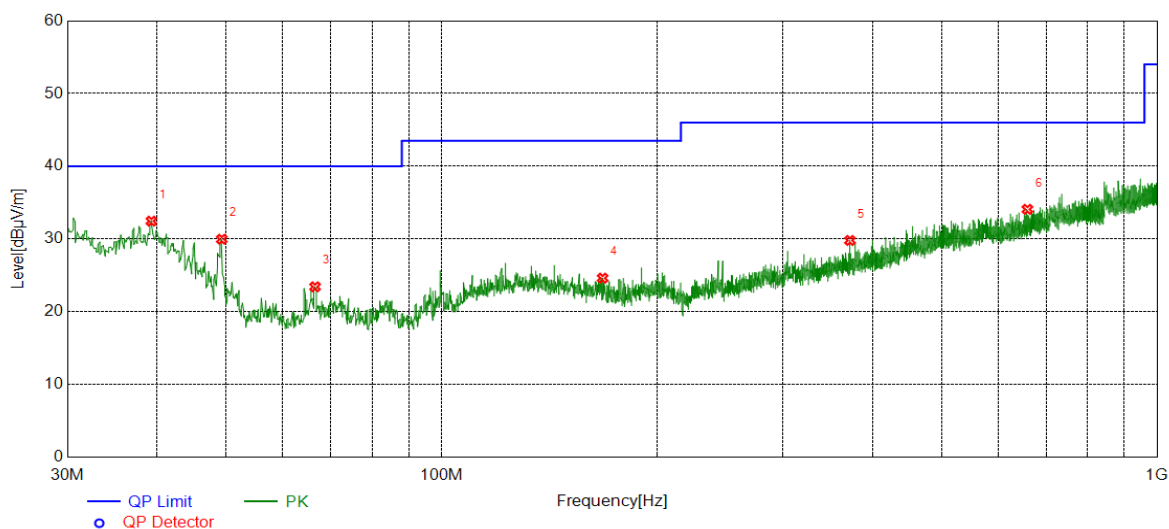

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	39.3129	11.36	21.10	32.46	40.00	-7.54	Vertical
2	49.3049	14.99	14.98	29.97	40.00	-10.03	Vertical
3	66.5727	8.89	14.54	23.43	40.00	-16.57	Vertical
4	167.9478	6.19	18.43	24.62	43.50	-18.88	Vertical
5	372.2502	7.56	22.24	29.80	46.00	-16.20	Vertical
6	658.8169	6.39	27.69	34.08	46.00	-11.92	Vertical


Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.



Part V: 9KHz~30MHz

SPURIOUS EMISSIONS Below 30MHz (WORST CASE CONFIGURATION-FACE ON)

Test Mode	Channel	Frequency Range	Verdict
11B	LCH	9kHz~150kHz	PASS

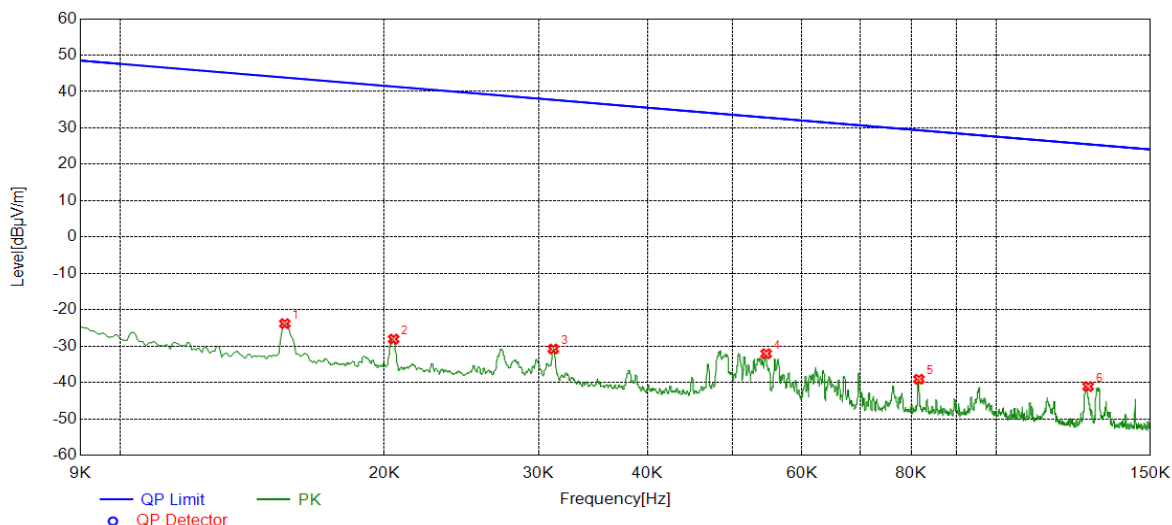


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.0154	37.15	-60.98	-23.83	43.83	-67.66	Horizontal
2	0.0205	32.77	-60.85	-28.08	41.38	-69.46	Horizontal
3	0.0312	30.13	-60.92	-30.79	37.71	-68.50	Horizontal
4	0.0546	29.02	-61.11	-32.09	32.86	-64.95	Horizontal
5	0.0816	22.12	-61.24	-39.12	29.37	-68.49	Horizontal
6	0.1273	19.93	-61.05	-41.12	25.51	-66.63	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



Test Mode	Channel	Frequency Range	Verdict
11B	LCH	150kHz~490kHz	PASS

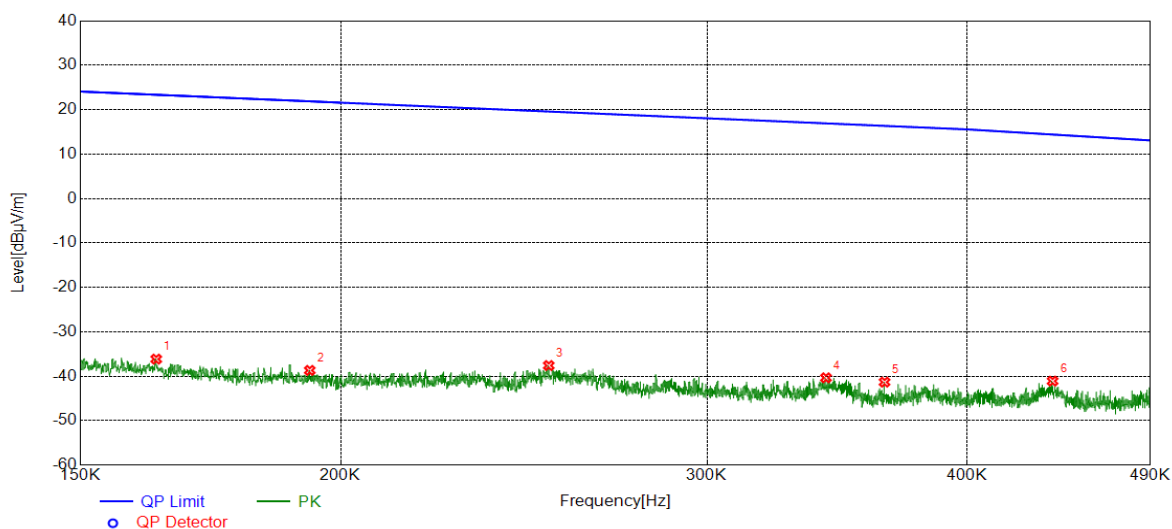


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.1631	25.11	-61.25	-36.14	23.36	-59.50	Vertical
2	0.1933	22.42	-61.10	-38.68	21.88	-60.56	Vertical
3	0.2518	23.21	-60.80	-37.59	19.58	-57.17	Vertical
4	0.3422	20.38	-60.73	-40.35	16.92	-57.27	Vertical
5	0.3651	19.38	-60.71	-41.33	16.35	-57.68	Vertical
6	0.4397	19.56	-60.65	-41.09	14.40	-55.49	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



Test Mode	Channel	Frequency Range	Verdict
11B	LCH	490kHz~30MHz	PASS

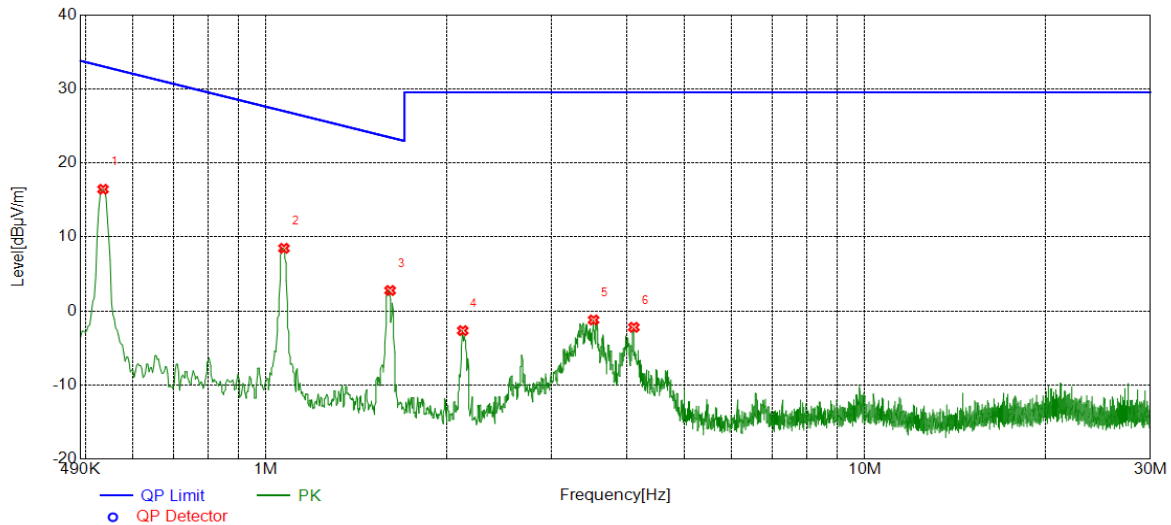

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.5343	37.04	-20.60	16.44	33.05	-16.61	Vertical
2	1.0714	28.82	-20.35	8.47	27.01	-18.54	Vertical
3	1.6115	23.04	-20.27	2.77	23.46	-20.69	Vertical
4	2.1309	17.59	-20.24	-2.65	29.54	-32.19	Vertical
5	3.5239	19.03	-20.24	-1.21	29.54	-30.75	Vertical
6	4.1142	17.86	-20.06	-2.20	29.54	-31.74	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a)

FREQUENCY (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST SETUP AND PROCEDURE

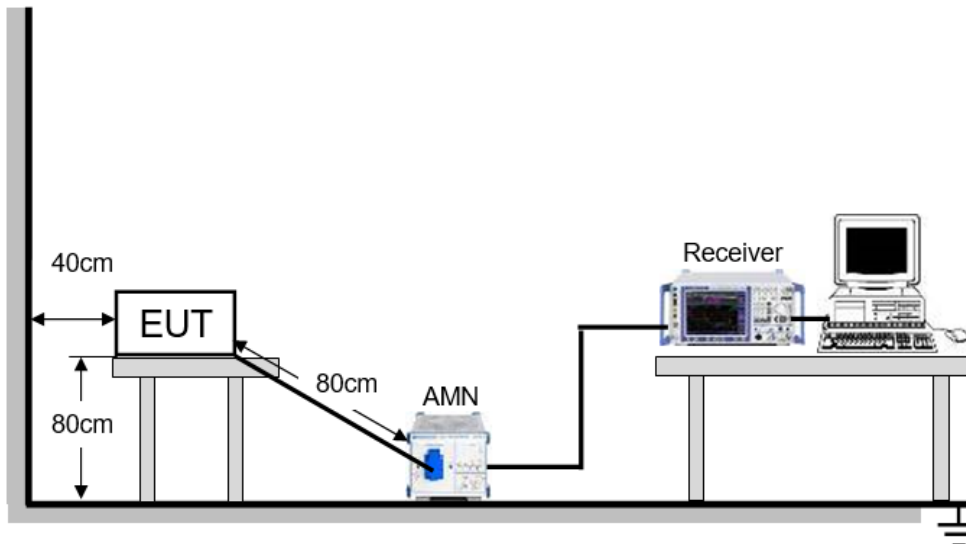

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

LINE L RESULTS (WORST-CASE CONFIGURATION)

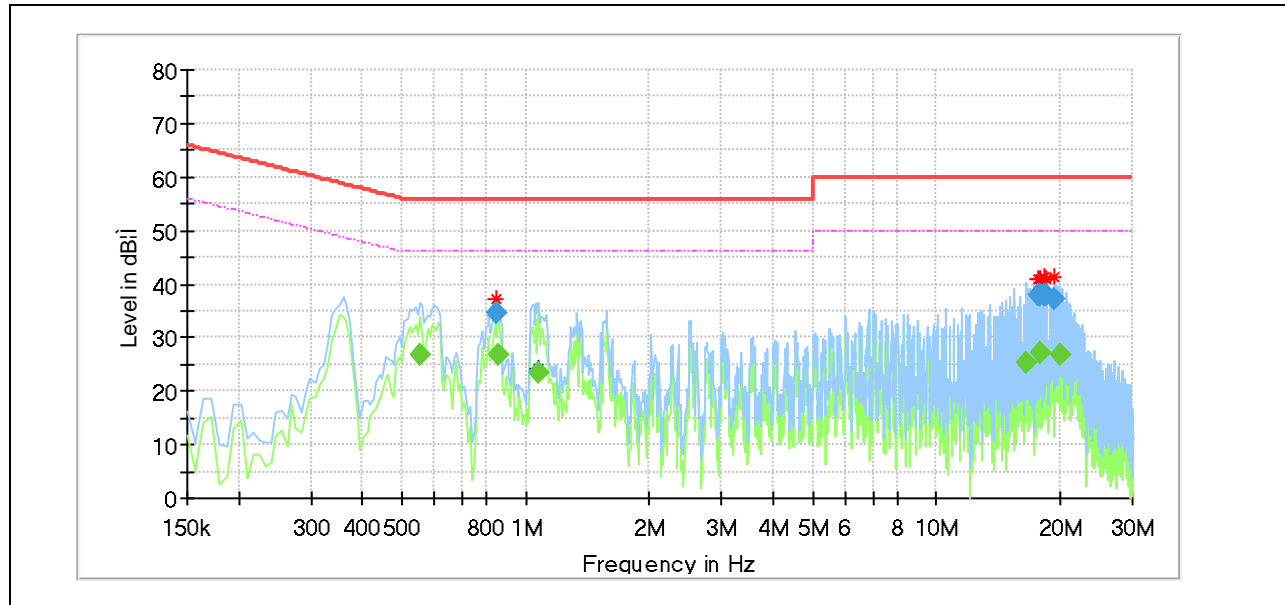


Final_Result

Frequency [MHz]	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	Filter	Corr. [dB]
0.552975	---	26.70	46.00	19.30	1000.0	9.000	L1	OFF	9.7
0.844013	34.66	---	56.00	21.34	1000.0	9.000	L1	OFF	9.6
0.858938	---	26.83	46.00	19.17	1000.0	9.000	L1	OFF	9.7
1.075350	---	23.61	46.00	22.39	1000.0	9.000	L1	OFF	9.6
16.492875	---	25.13	50.00	24.87	1000.0	9.000	L1	OFF	9.5
17.761500	37.82	---	60.00	22.18	1000.0	9.000	L1	OFF	9.6
17.791350	---	27.15	50.00	22.85	1000.0	9.000	L1	OFF	9.6
17.933138	37.79	---	60.00	22.21	1000.0	9.000	L1	OFF	9.6
18.276413	37.91	---	60.00	22.09	1000.0	9.000	L1	OFF	9.6
18.433125	37.79	---	60.00	22.21	1000.0	9.000	L1	OFF	9.6
19.403250	37.39	---	60.00	22.61	1000.0	9.000	L1	OFF	9.6
19.903238	---	26.87	50.00	23.13	1000.0	9.000	L1	OFF	9.6

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
5. Pre-testing all test modes and channels, and find the LCH of 11b which is the worst case, so only the worst case is included in this test report.

LINE N RESULTS (WORST-CASE CONFIGURATION)

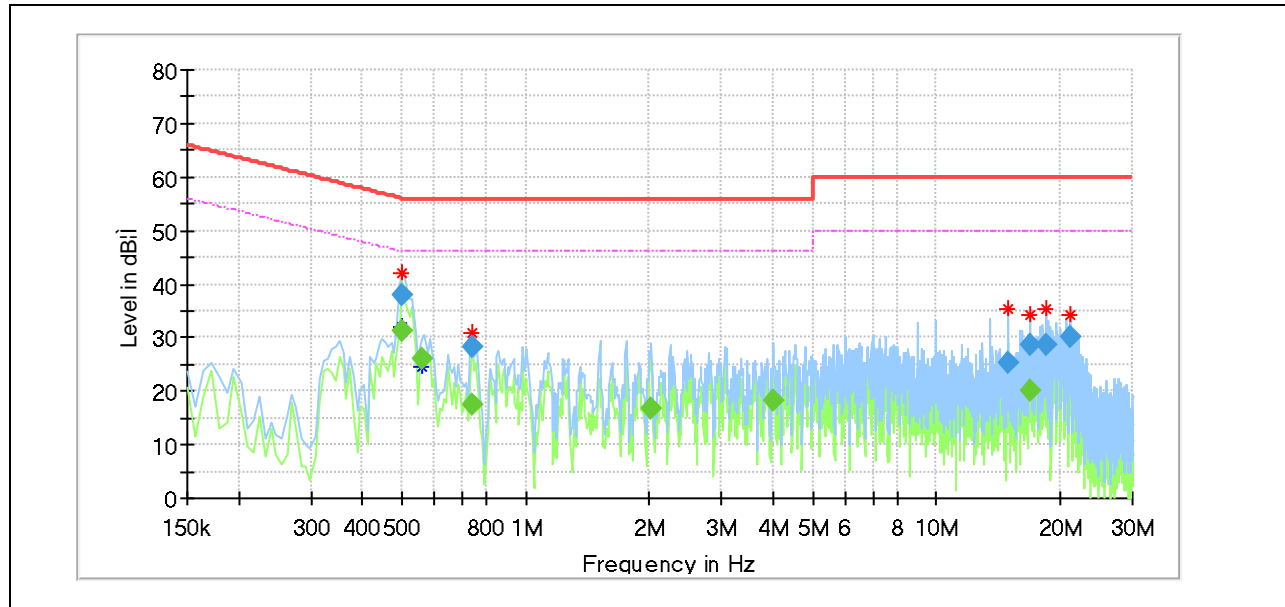

Final_Result

Frequency [MHz]	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	Filter	Corr. [dB]
0.500738	---	31.31	46.00	14.69	1000.0	9.000	N	OFF	9.6
0.500738	38.04	---	56.00	17.97	1000.0	9.000	N	OFF	9.6
0.560438	---	26.13	46.00	19.87	1000.0	9.000	N	OFF	9.6
0.739538	---	17.36	46.00	28.64	1000.0	9.000	N	OFF	9.5
0.739538	28.27	---	56.00	27.73	1000.0	9.000	N	OFF	9.5
2.023088	---	16.81	46.00	29.19	1000.0	9.000	N	OFF	9.7
4.008113	---	18.13	46.00	27.87	1000.0	9.000	N	OFF	9.6
14.955600	25.30	---	60.00	34.70	1000.0	9.000	N	OFF	9.5
16.948088	28.57	---	60.00	31.43	1000.0	9.000	N	OFF	9.6
16.948088	---	19.94	50.00	30.06	1000.0	9.000	N	OFF	9.6
18.440588	28.75	---	60.00	31.25	1000.0	9.000	N	OFF	9.6
21.082313	30.08	---	60.00	29.92	1000.0	9.000	N	OFF	9.7

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
5. Pre-testing all test modes and channels, and find the LCH of 11b which is the worst case, so only the worst case is included in this test report.



9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi

END OF REPORT