




Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

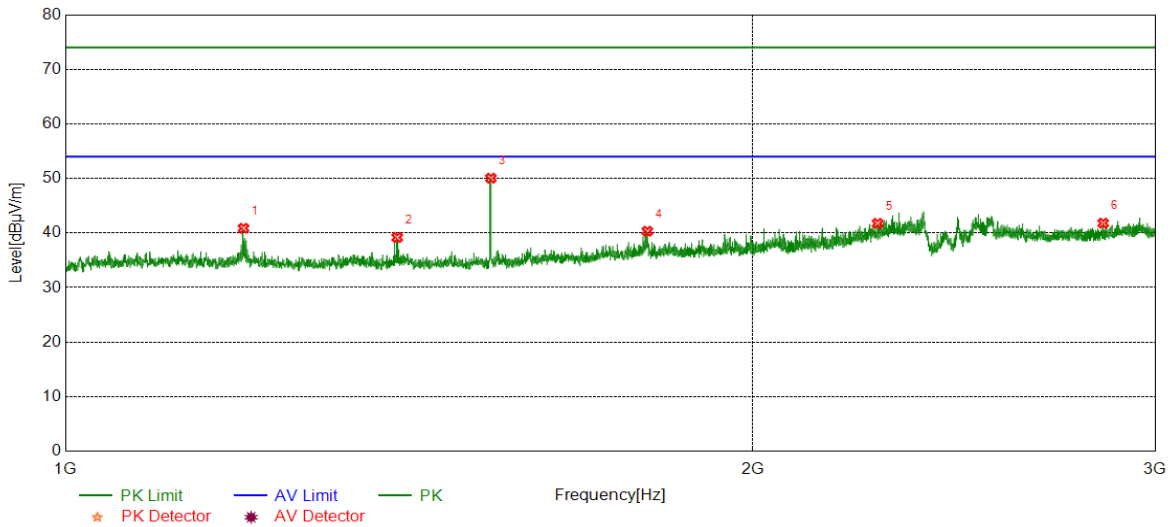


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.7746	46.42	-5.56	40.86	74.00	-33.14	Horizontal
2	1397.2997	44.87	-5.69	39.18	74.00	-34.82	Horizontal
3	1535.8170	55.80	-5.75	50.05	74.00	-23.95	Horizontal
4	1798.0998	44.16	-3.83	40.33	74.00	-33.67	Horizontal
5	2267.9085	43.87	-2.11	41.76	74.00	-32.24	Horizontal
6	2846.9809	41.69	0.12	41.81	74.00	-32.19	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

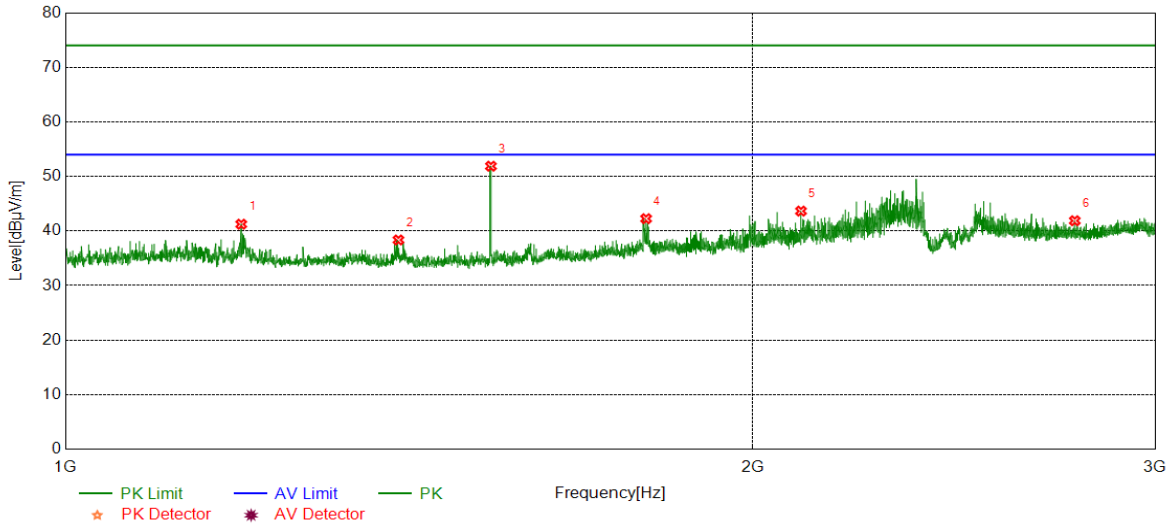


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1194.0243	46.82	-5.57	41.25	74.00	-32.75	Vertical
2	1399.0499	44.03	-5.67	38.36	74.00	-35.64	Vertical
3	1535.8170	57.63	-5.75	51.88	74.00	-22.12	Vertical
4	1795.8495	46.06	-3.80	42.26	74.00	-31.74	Vertical
5	2099.3874	46.16	-2.51	43.65	74.00	-30.35	Vertical
6	2766.7208	42.11	-0.23	41.88	74.00	-32.12	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

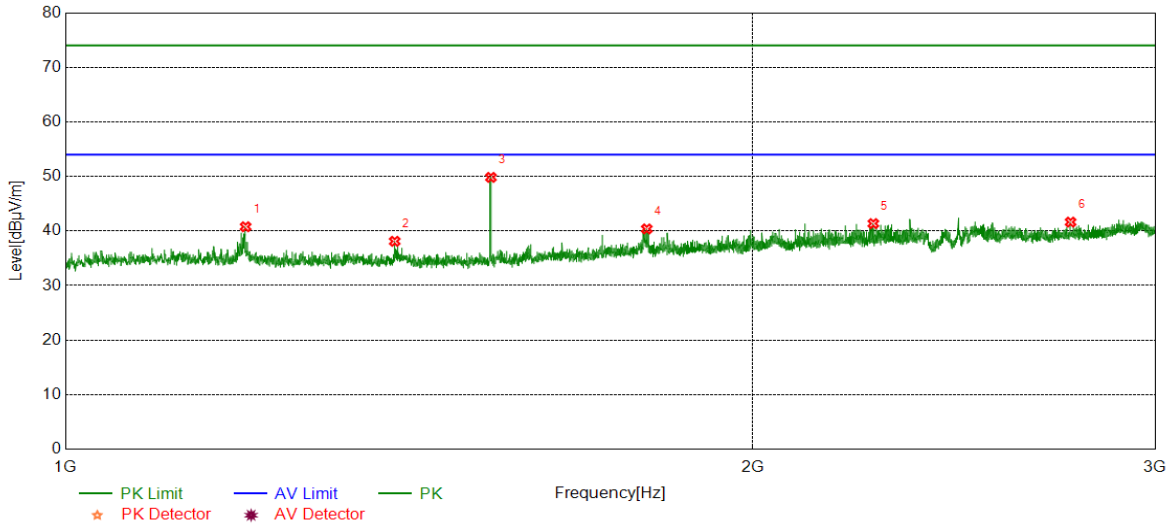


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1199.2749	46.34	-5.56	40.78	74.00	-33.22	Horizontal
2	1393.7992	43.84	-5.73	38.11	74.00	-35.89	Horizontal
3	1535.8170	55.58	-5.75	49.83	74.00	-24.17	Horizontal
4	1797.0996	44.19	-3.81	40.38	74.00	-33.62	Horizontal
5	2258.1573	43.47	-2.11	41.36	74.00	-32.64	Horizontal
6	2754.9694	41.99	-0.36	41.63	74.00	-32.37	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

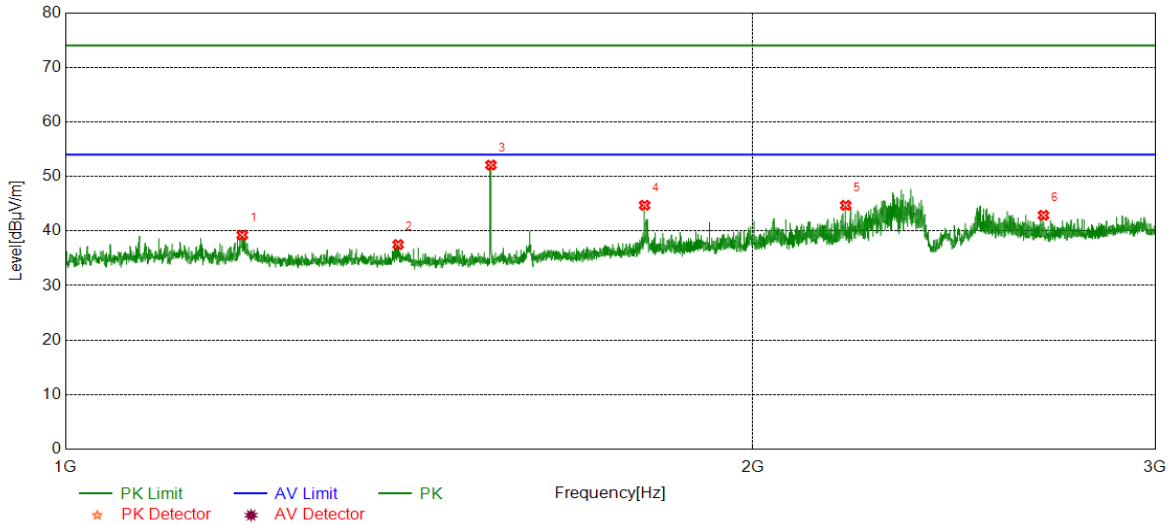


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1195.2744	44.82	-5.57	39.25	74.00	-34.75	Vertical
2	1398.5498	43.18	-5.67	37.51	74.00	-36.49	Vertical
3	1535.8170	57.84	-5.75	52.09	74.00	-21.91	Vertical
4	1793.0991	48.49	-3.77	44.72	74.00	-29.28	Vertical
5	2196.1495	47.03	-2.33	44.70	74.00	-29.30	Vertical
6	2680.7101	43.55	-0.66	42.89	74.00	-31.11	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

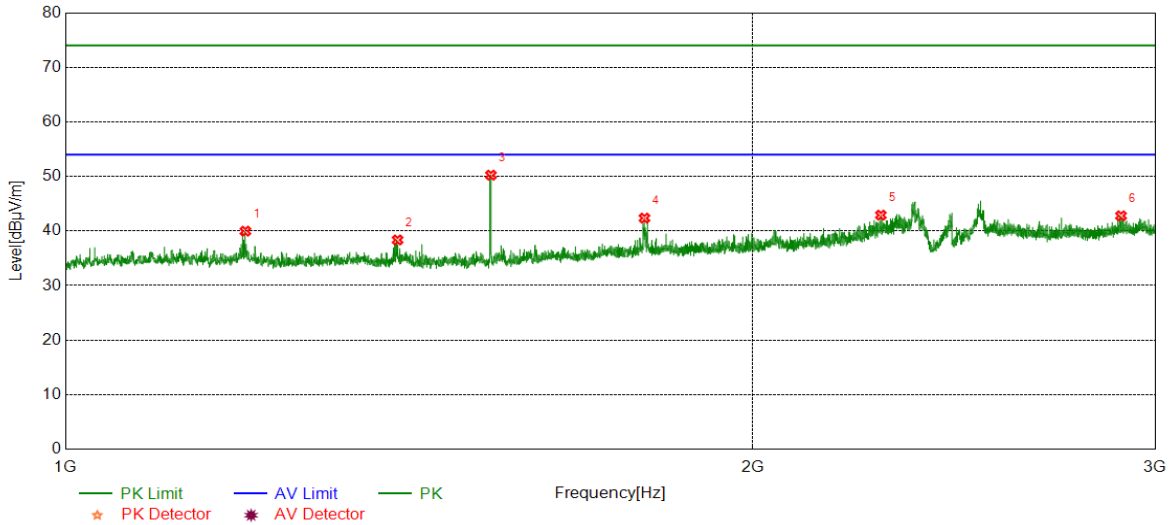


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1199.0249	45.53	-5.56	39.97	74.00	-34.03	Horizontal
2	1397.7997	44.04	-5.68	38.36	74.00	-35.64	Horizontal
3	1535.8170	55.99	-5.75	50.24	74.00	-23.76	Horizontal
4	1792.8491	46.13	-3.77	42.36	74.00	-31.64	Horizontal
5	2275.4094	44.93	-2.02	42.91	74.00	-31.09	Horizontal
6	2898.7373	42.42	0.36	42.78	74.00	-31.22	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

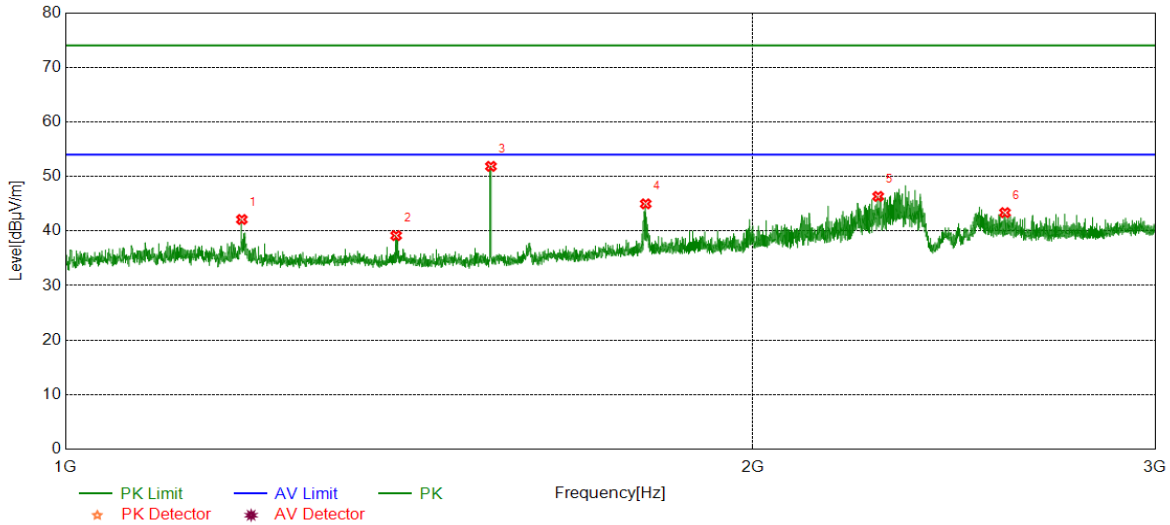


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1194.7743	47.68	-5.57	42.11	74.00	-31.89	Vertical
2	1395.7995	44.87	-5.71	39.16	74.00	-34.84	Vertical
3	1535.8170	57.60	-5.75	51.85	74.00	-22.15	Vertical
4	1795.0994	48.77	-3.79	44.98	74.00	-29.02	Vertical
5	2269.1586	48.44	-2.10	46.34	74.00	-27.66	Vertical
6	2578.6973	44.31	-0.95	43.36	74.00	-30.64	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

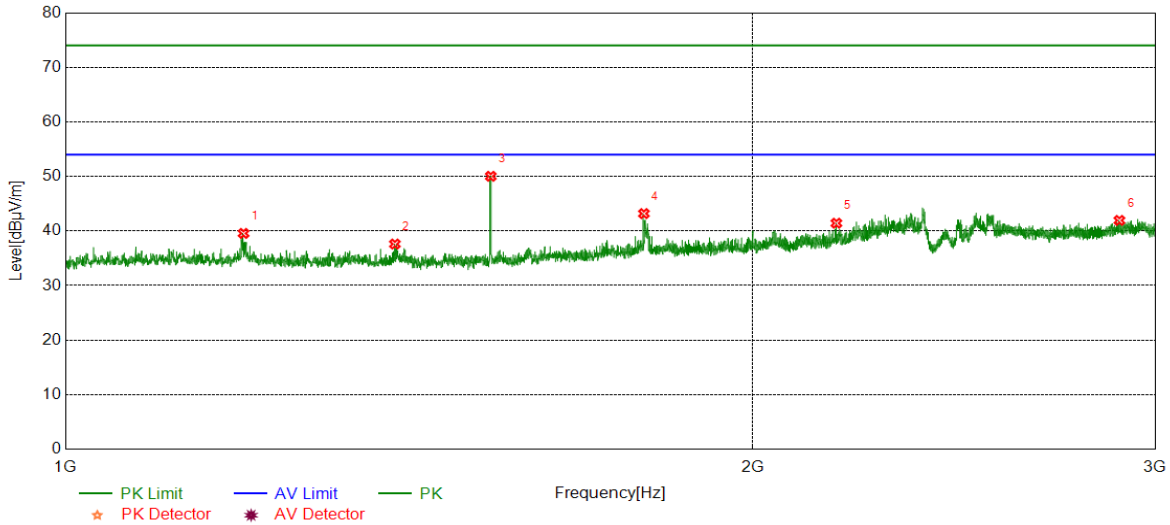


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.7746	45.12	-5.56	39.56	74.00	-34.44	Horizontal
2	1394.0493	43.34	-5.73	37.61	74.00	-36.39	Horizontal
3	1535.5669	55.78	-5.75	50.03	74.00	-23.97	Horizontal
4	1791.8490	46.95	-3.76	43.19	74.00	-30.81	Horizontal
5	2175.6470	43.76	-2.33	41.43	74.00	-32.57	Horizontal
6	2893.9867	41.48	0.46	41.94	74.00	-32.06	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

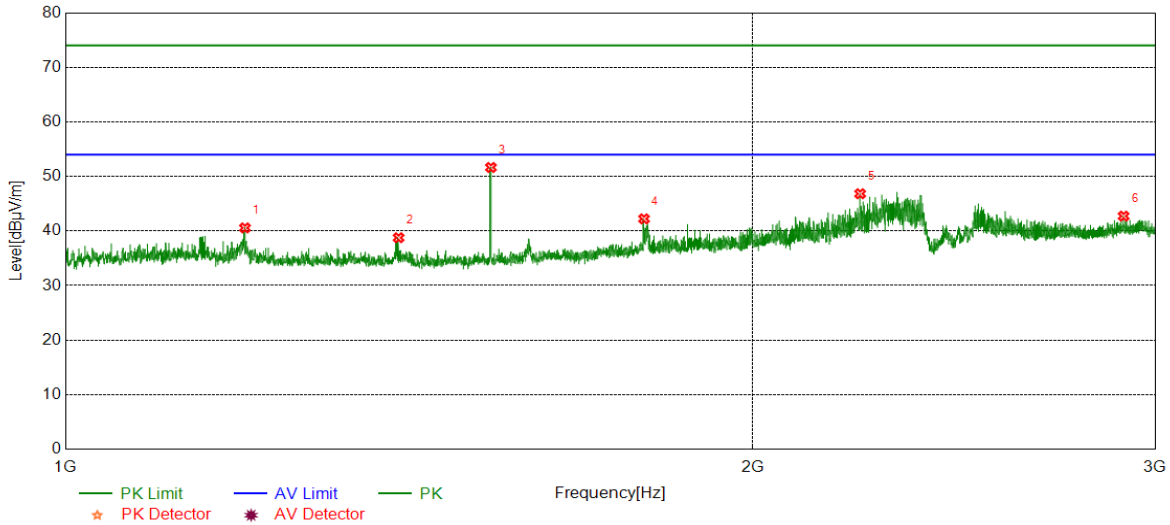


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1198.5248	46.13	-5.56	40.57	74.00	-33.43	Vertical
2	1399.2999	44.43	-5.66	38.77	74.00	-35.23	Vertical
3	1535.8170	57.40	-5.75	51.65	74.00	-22.35	Vertical
4	1792.0990	45.99	-3.76	42.23	74.00	-31.77	Vertical
5	2228.4036	49.00	-2.17	46.83	74.00	-27.17	Vertical
6	2906.2383	42.33	0.40	42.73	74.00	-31.27	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

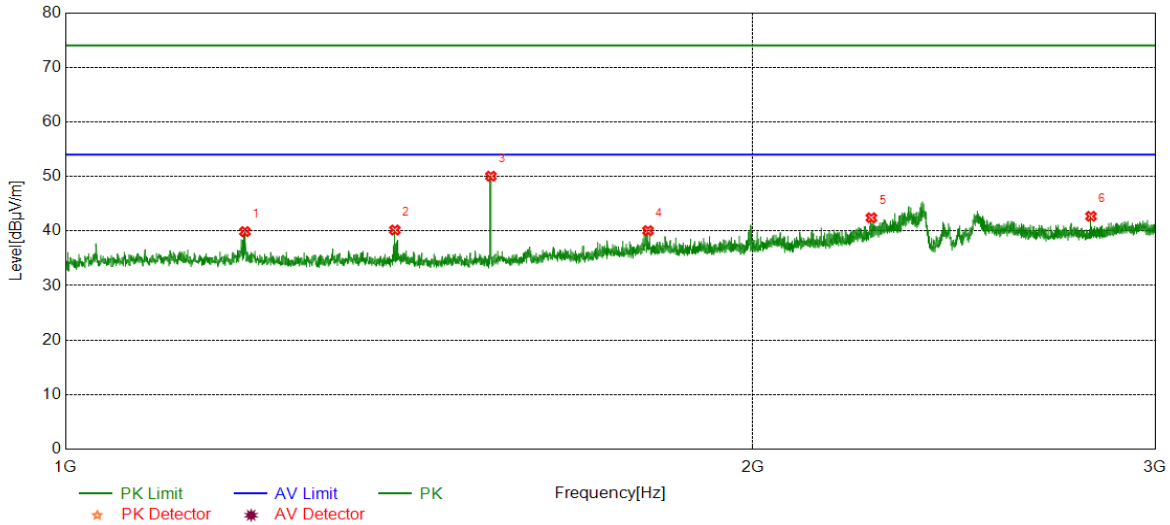


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1198.5248	45.45	-5.56	39.89	74.00	-34.11	Horizontal
2	1394.0493	45.91	-5.73	40.18	74.00	-33.82	Horizontal
3	1535.8170	55.80	-5.75	50.05	74.00	-23.95	Horizontal
4	1799.3499	43.90	-3.84	40.06	74.00	-33.94	Horizontal
5	2253.6567	44.51	-2.09	42.42	74.00	-31.58	Horizontal
6	2812.2265	42.92	-0.22	42.70	74.00	-31.30	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

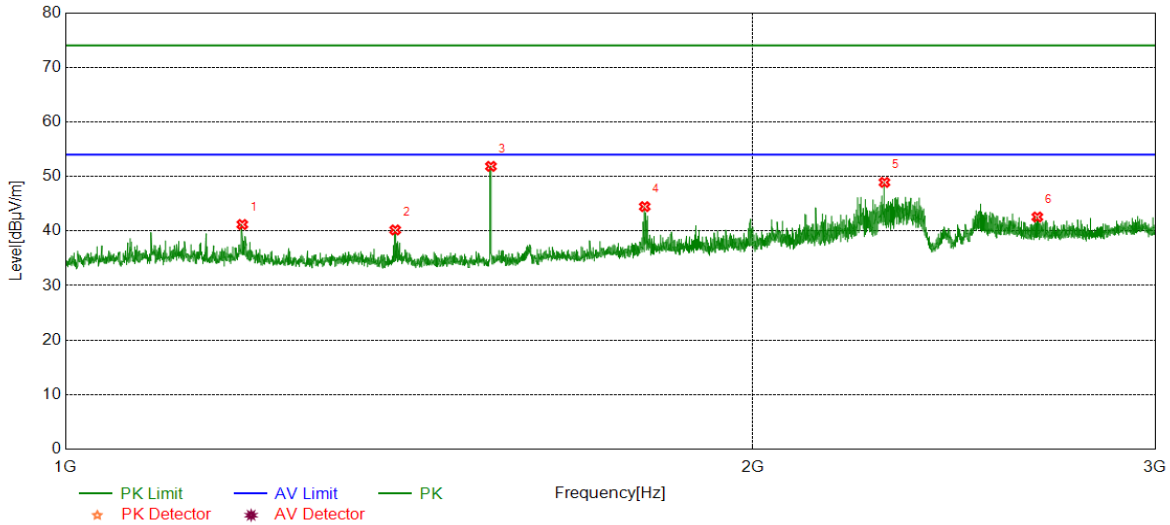


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1195.2744	46.76	-5.57	41.19	74.00	-32.81	Vertical
2	1394.5493	45.91	-5.72	40.19	74.00	-33.81	Vertical
3	1535.8170	57.60	-5.75	51.85	74.00	-22.15	Vertical
4	1793.3492	48.24	-3.77	44.47	74.00	-29.53	Vertical
5	2283.6605	50.85	-1.94	48.91	74.00	-25.09	Vertical
6	2664.2080	43.27	-0.70	42.57	74.00	-31.43	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

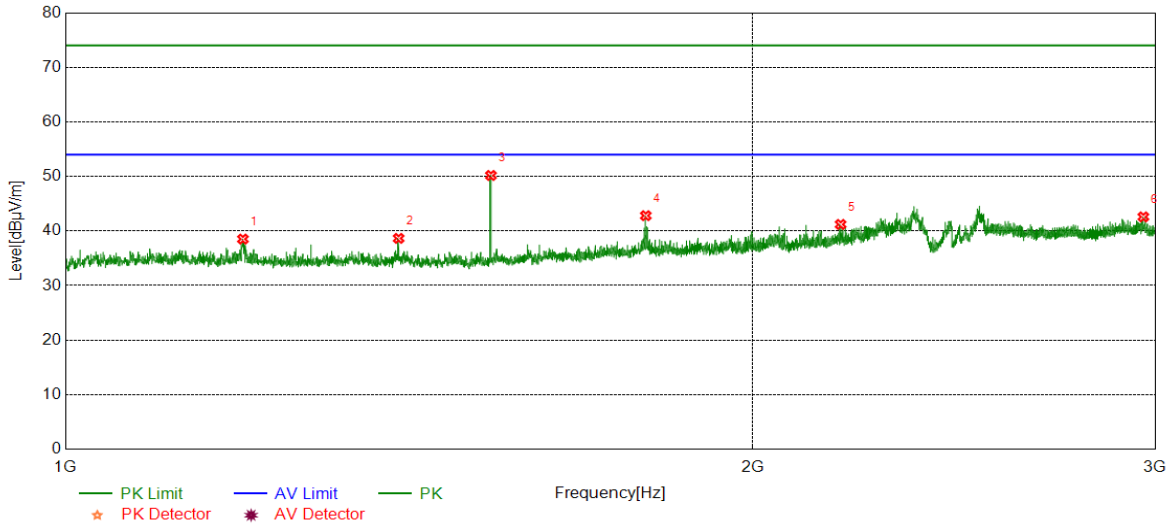


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.0245	44.08	-5.56	38.52	74.00	-35.48	Horizontal
2	1399.2999	44.31	-5.66	38.65	74.00	-35.35	Horizontal
3	1535.8170	55.93	-5.75	50.18	74.00	-23.82	Horizontal
4	1795.3494	46.60	-3.79	42.81	74.00	-31.19	Horizontal
5	2184.8981	43.54	-2.33	41.21	74.00	-32.79	Horizontal
6	2964.7456	41.55	1.04	42.59	74.00	-31.41	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

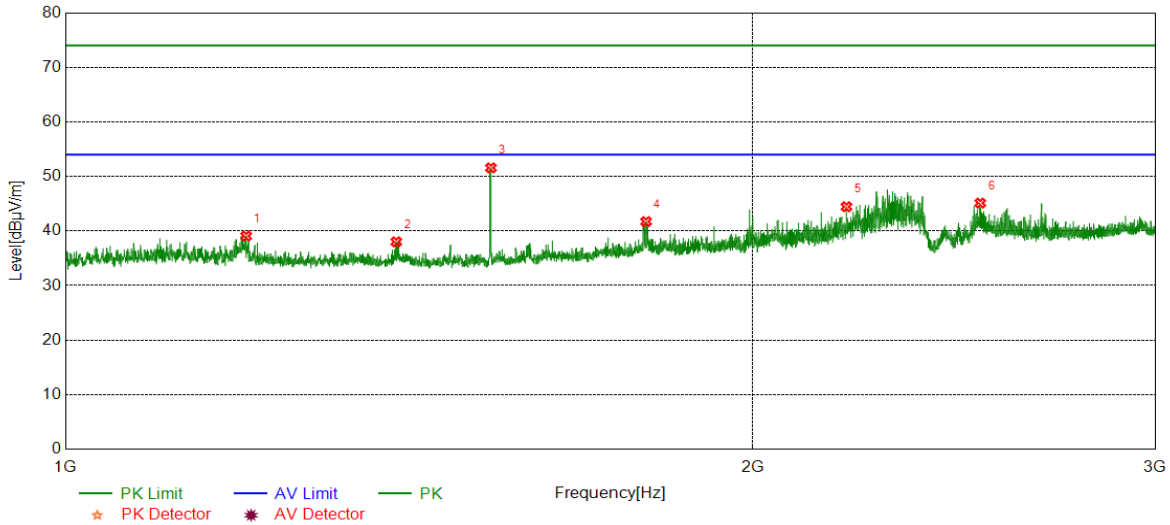


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1200.0250	44.63	-5.56	39.07	74.00	-34.93	Vertical
2	1396.0495	43.72	-5.70	38.02	74.00	-35.98	Vertical
3	1535.8170	57.33	-5.75	51.58	74.00	-22.42	Vertical
4	1795.8495	45.53	-3.80	41.73	74.00	-32.27	Vertical
5	2197.8997	46.78	-2.33	44.45	74.00	-29.55	Vertical
6	2515.1894	45.47	-0.35	45.12	74.00	-28.88	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

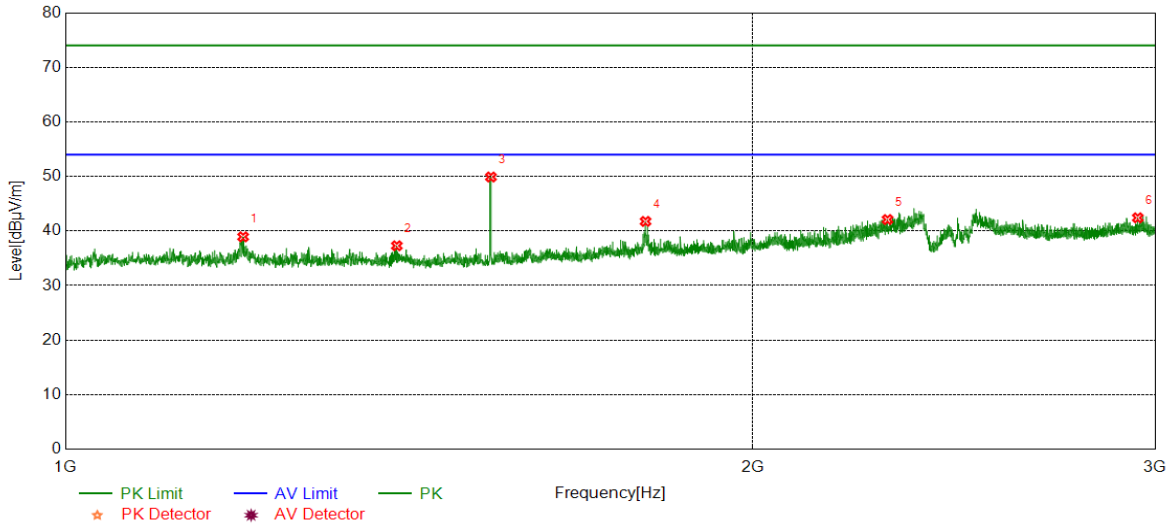


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.2745	44.49	-5.56	38.93	74.00	-35.07	Horizontal
2	1396.7996	42.98	-5.69	37.29	74.00	-36.71	Horizontal
3	1535.8170	55.65	-5.75	49.90	74.00	-24.10	Horizontal
4	1794.8494	45.55	-3.79	41.76	74.00	-32.24	Horizontal
5	2290.6613	44.03	-1.93	42.10	74.00	-31.90	Horizontal
6	2947.9935	41.73	0.69	42.42	74.00	-31.58	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

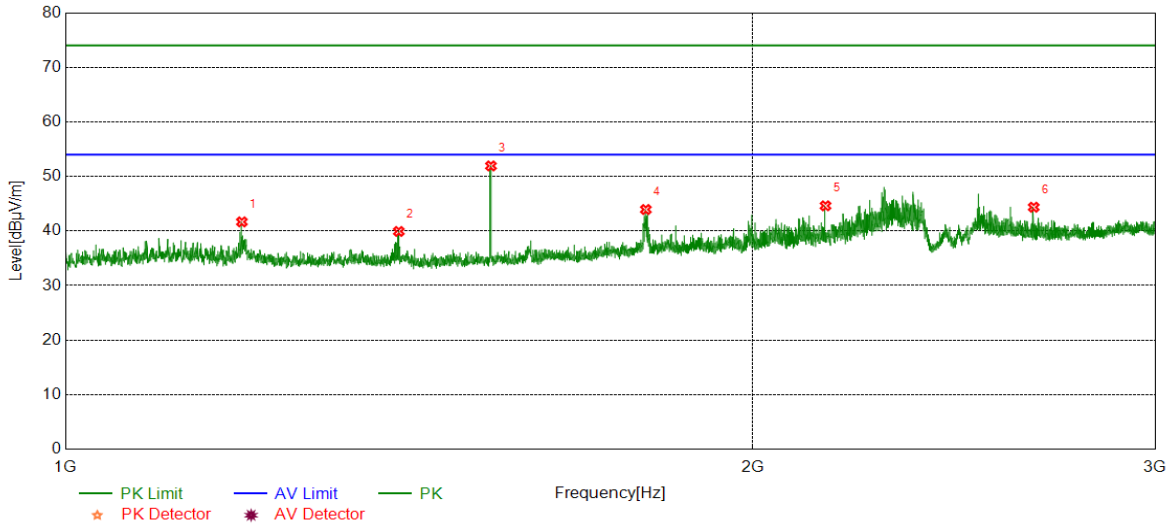

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1194.7743	47.24	-5.57	41.67	74.00	-32.33	Vertical
2	1399.5499	45.58	-5.66	39.92	74.00	-34.08	Vertical
3	1535.8170	57.68	-5.75	51.93	74.00	-22.07	Vertical
4	1795.3494	47.73	-3.79	43.94	74.00	-30.06	Vertical
5	2151.8940	47.02	-2.40	44.62	74.00	-29.38	Vertical
6	2654.4568	45.10	-0.74	44.36	74.00	-29.64	Vertical


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part II: 3GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

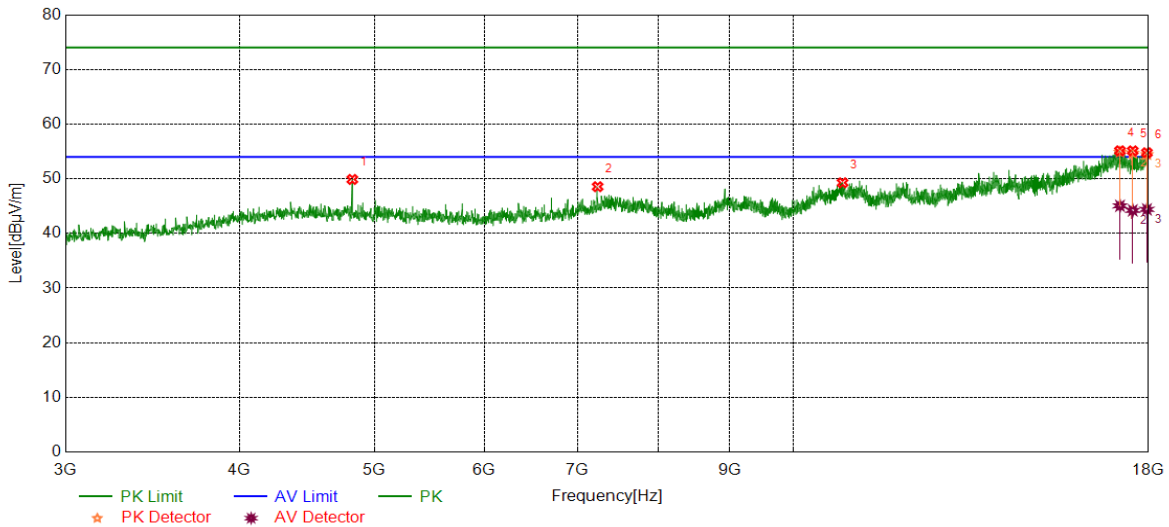

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4822.7278	44.53	5.35	49.88	74.00	-24.12	Horizontal
2	7236.1545	39.99	8.56	48.55	74.00	-25.45	Horizontal
3	10851.6065	36.88	12.39	49.27	74.00	-24.73	Horizontal
4	17171.1464	36.79	18.33	55.12	74.00	-18.88	Horizontal
5	17536.8171	37.56	17.55	55.11	74.00	-18.89	Horizontal
6	17953.1191	36.23	18.54	54.77	74.00	-19.23	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17171.1464	26.72	18.33	45.05	54.00	-8.95	Horizontal
2	17536.8171	26.67	17.55	44.22	54.00	-9.78	Horizontal
3	17953.1191	25.86	18.54	44.40	54.00	-9.60	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

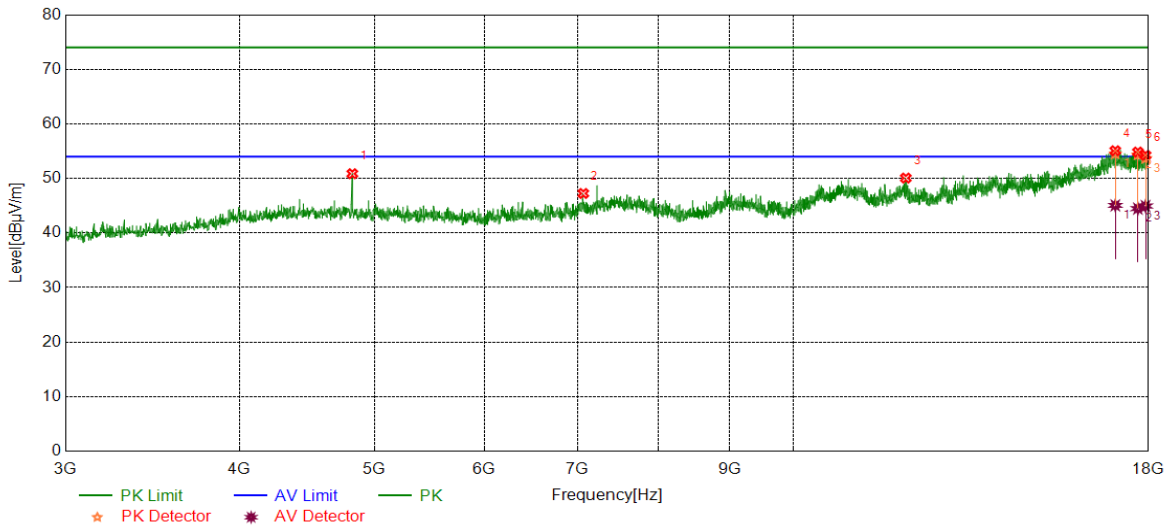

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4822.7278	45.52	5.35	50.87	74.00	-23.13	Vertical
2	7067.3834	39.02	8.23	47.25	74.00	-26.75	Vertical
3	12048.0060	37.49	12.58	50.07	74.00	-23.93	Vertical
4	17038.0048	36.16	18.92	55.08	74.00	-18.92	Vertical
5	17686.8359	36.88	17.96	54.84	74.00	-19.16	Vertical
6	17911.8640	36.06	18.19	54.25	74.00	-19.75	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17038.0048	26.14	18.92	45.06	54.00	-8.94	Vertical
2	17686.8359	26.51	17.96	44.47	54.00	-9.53	Vertical
3	17911.8640	26.75	18.19	44.94	54.00	-9.06	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

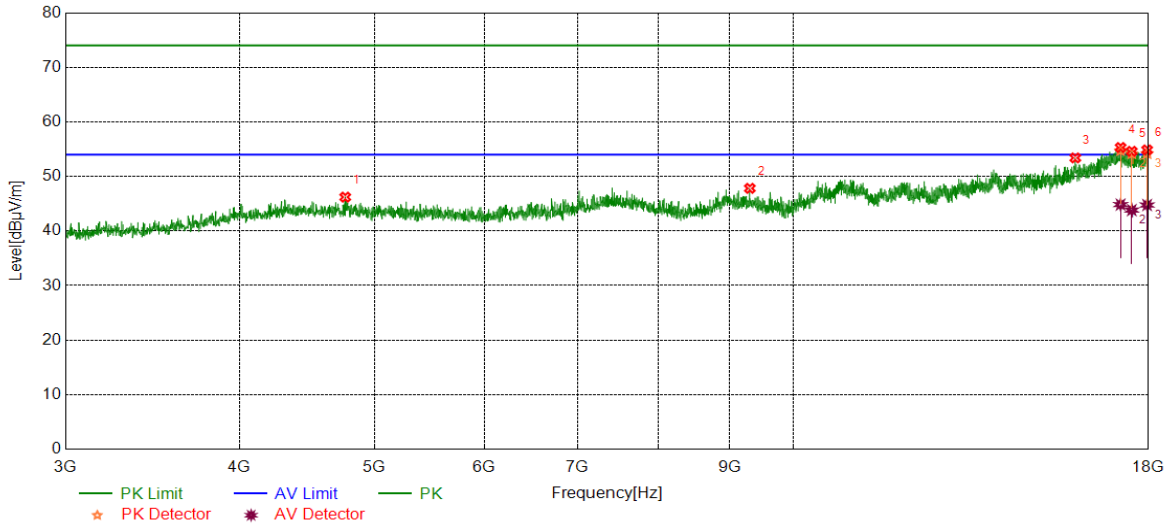

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4766.4708	40.76	5.45	46.21	74.00	-27.79	Horizontal
2	9308.2885	39.38	8.44	47.82	74.00	-26.18	Horizontal
3	15946.6183	37.36	16.04	53.40	74.00	-20.60	Horizontal
4	17188.0235	37.16	18.15	55.31	74.00	-18.69	Horizontal
5	17508.6886	36.80	17.81	54.61	74.00	-19.39	Horizontal
6	17958.7448	36.39	18.48	54.87	74.00	-19.13	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17188.0235	26.69	18.15	44.84	54.00	-9.16	Horizontal
2	17508.6886	26.02	17.81	43.83	54.00	-10.17	Horizontal
3	17958.7448	26.28	18.48	44.76	54.00	-9.24	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

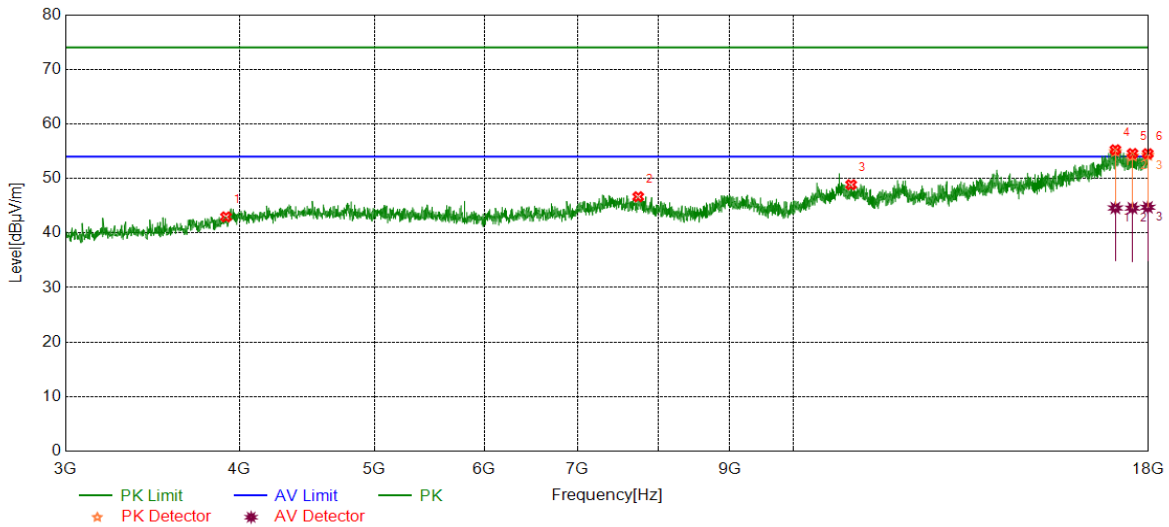

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3913.2392	39.33	3.63	42.96	74.00	-31.04	Vertical
2	7738.7173	38.49	8.16	46.65	74.00	-27.35	Vertical
3	11005.3757	36.46	12.39	48.85	74.00	-25.15	Vertical
4	17039.8800	36.37	18.89	55.26	74.00	-18.74	Vertical
5	17529.3162	36.66	17.91	54.57	74.00	-19.43	Vertical
6	17979.3724	36.45	18.09	54.54	74.00	-19.46	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17039.8800	25.69	18.89	44.58	54.00	-9.42	Vertical
2	17529.3162	26.65	17.91	44.56	54.00	-9.44	Vertical
3	17979.3724	26.62	18.09	44.71	54.00	-9.29	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

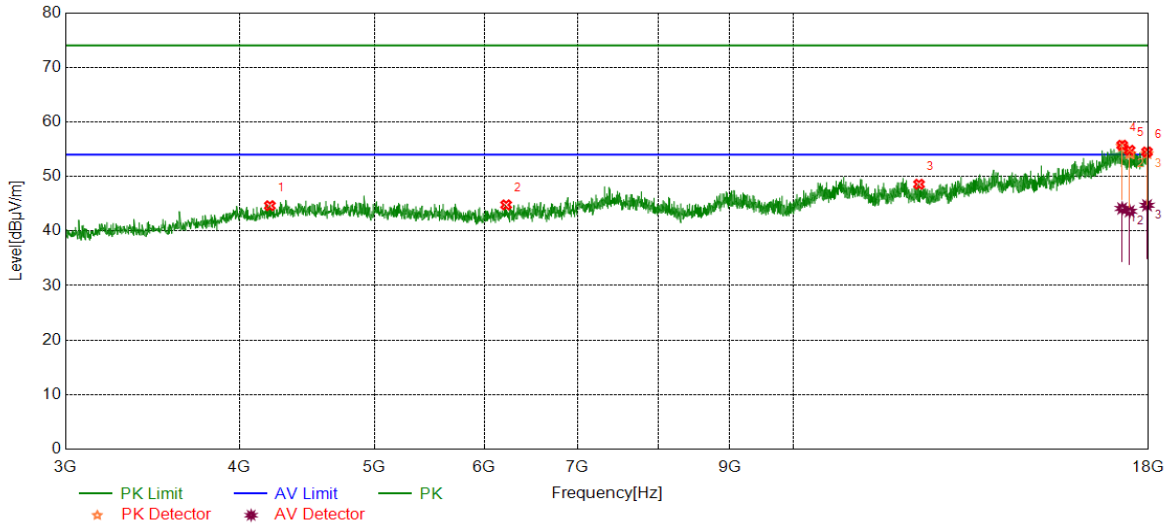

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4207.6510	39.63	5.01	44.64	74.00	-29.36	Horizontal
2	6219.7775	38.77	6.02	44.79	74.00	-29.21	Horizontal
3	12314.2893	37.01	11.56	48.57	74.00	-25.43	Horizontal
4	17233.0291	38.26	17.47	55.73	74.00	-18.27	Horizontal
5	17446.8059	36.91	17.89	54.80	74.00	-19.20	Horizontal
6	17956.8696	35.99	18.50	54.49	74.00	-19.51	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17233.0291	26.66	17.47	44.13	54.00	-9.87	Horizontal
2	17446.8059	25.74	17.89	43.63	54.00	-10.37	Horizontal
3	17956.8696	26.21	18.50	44.71	54.00	-9.29	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

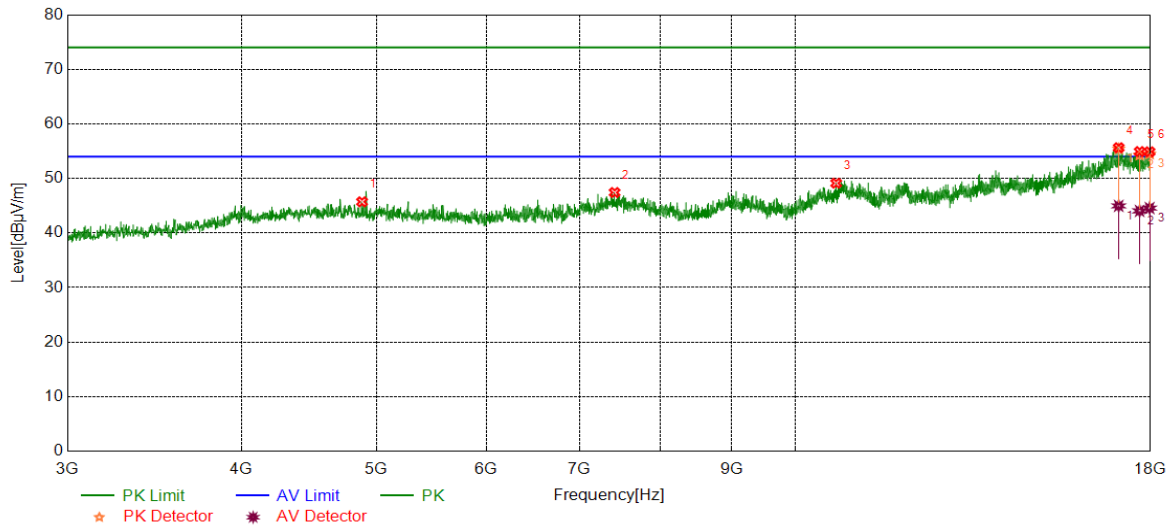

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4884.6106	40.39	5.33	45.72	74.00	-28.28	Vertical
2	7418.0523	38.81	8.61	47.42	74.00	-26.58	Vertical
3	10701.5877	37.25	11.88	49.13	74.00	-24.87	Vertical
4	17077.3847	36.80	18.84	55.64	74.00	-18.36	Vertical
5	17679.3349	36.98	17.95	54.93	74.00	-19.07	Vertical
6	17973.7467	37.06	17.83	54.89	74.00	-19.11	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17077.3847	26.13	18.84	44.97	54.00	-9.03	Vertical
2	17679.3349	26.10	17.95	44.05	54.00	-9.95	Vertical
3	17973.7467	26.74	17.83	44.57	54.00	-9.43	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

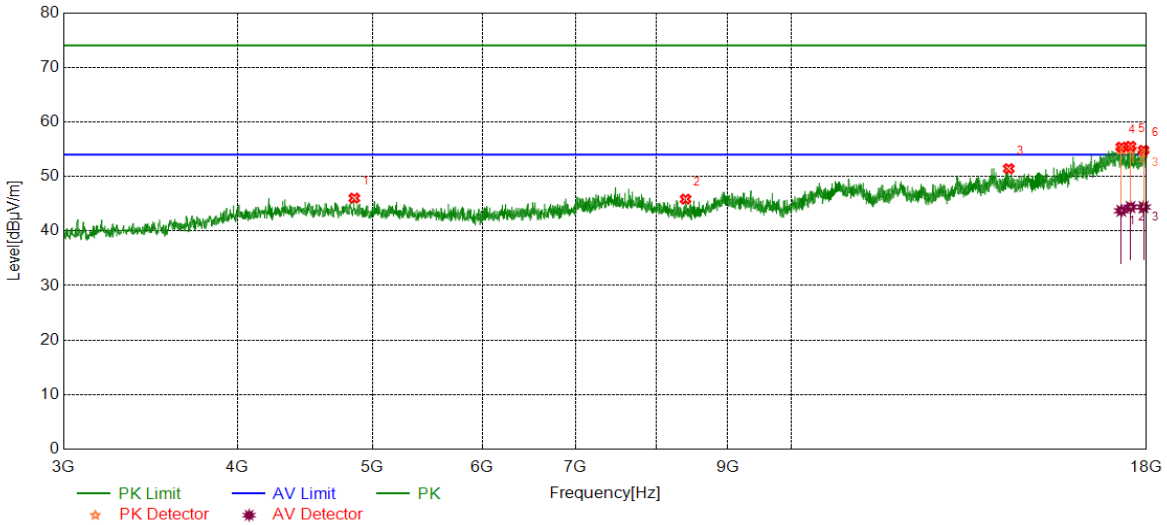

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4854.6068	40.60	5.42	46.02	74.00	-27.98	Horizontal
2	8396.9246	39.04	6.81	45.85	74.00	-28.15	Horizontal
3	14332.0415	37.30	14.12	51.42	74.00	-22.58	Horizontal
4	17264.9081	37.88	17.50	55.38	74.00	-18.62	Horizontal
5	17531.1914	37.67	17.86	55.53	74.00	-18.47	Horizontal
6	17911.8640	36.62	18.19	54.81	74.00	-19.19	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17264.9081	26.21	17.50	43.71	54.00	-10.29	Horizontal
2	17531.1914	26.53	17.86	44.39	54.00	-9.61	Horizontal
3	17911.8640	26.21	18.19	44.40	54.00	-9.60	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

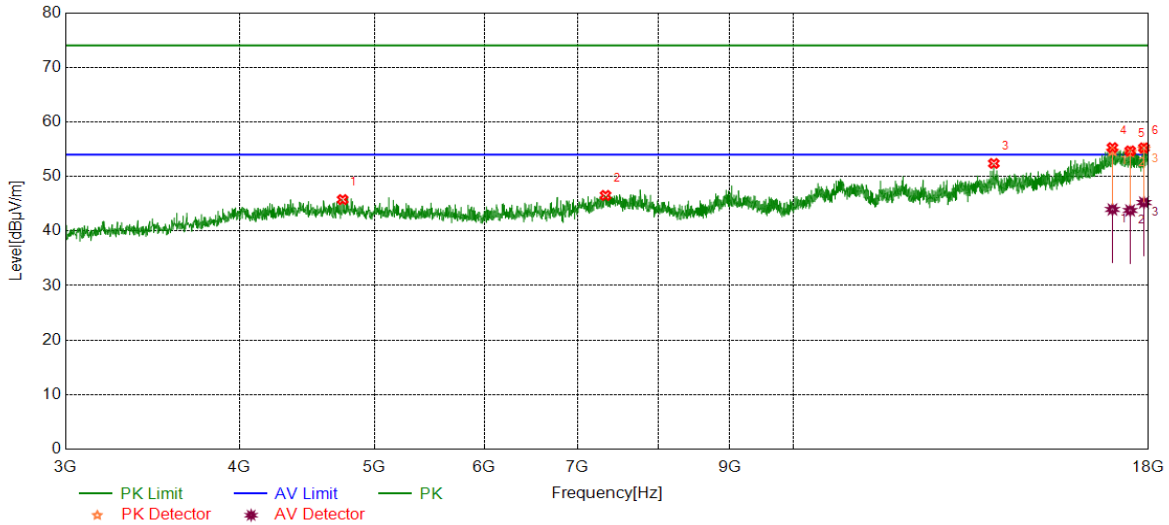

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4745.8432	40.54	5.22	45.76	74.00	-28.24	Vertical
2	7331.7915	37.91	8.61	46.52	74.00	-27.48	Vertical
3	13936.3670	37.97	14.41	52.38	74.00	-21.62	Vertical
4	16957.3697	36.70	18.58	55.28	74.00	-18.72	Vertical
5	17461.8077	36.96	17.73	54.69	74.00	-19.31	Vertical
6	17864.9831	36.82	18.42	55.24	74.00	-18.76	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16957.3697	25.37	18.58	43.95	54.00	-10.05	Vertical
2	17461.8077	26.04	17.73	43.77	54.00	-10.23	Vertical
3	17864.9831	26.80	18.42	45.22	54.00	-8.78	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

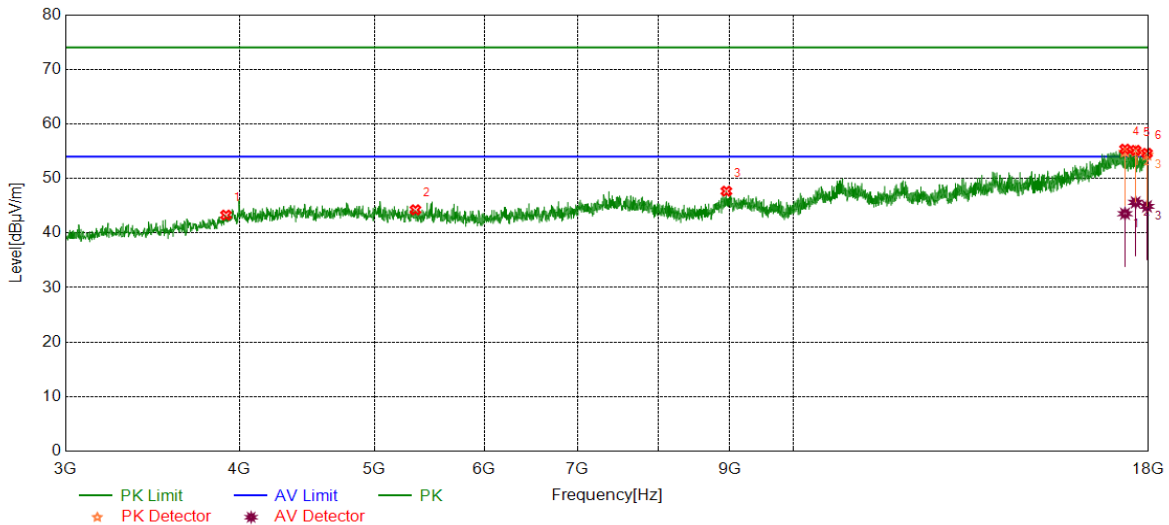

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3913.2392	39.66	3.63	43.29	74.00	-30.71	Horizontal
2	5353.4192	39.02	5.23	44.25	74.00	-29.75	Horizontal
3	8953.8692	38.61	9.06	47.67	74.00	-26.33	Horizontal
4	17313.6642	37.77	17.61	55.38	74.00	-18.62	Horizontal
5	17621.2027	37.58	17.57	55.15	74.00	-18.85	Horizontal
6	17954.9944	36.09	18.52	54.61	74.00	-19.39	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17313.6642	25.93	17.61	43.54	54.00	-10.46	Horizontal
2	17621.2027	28.04	17.57	45.61	54.00	-8.39	Horizontal
3	17954.9944	26.36	18.52	44.88	54.00	-9.12	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

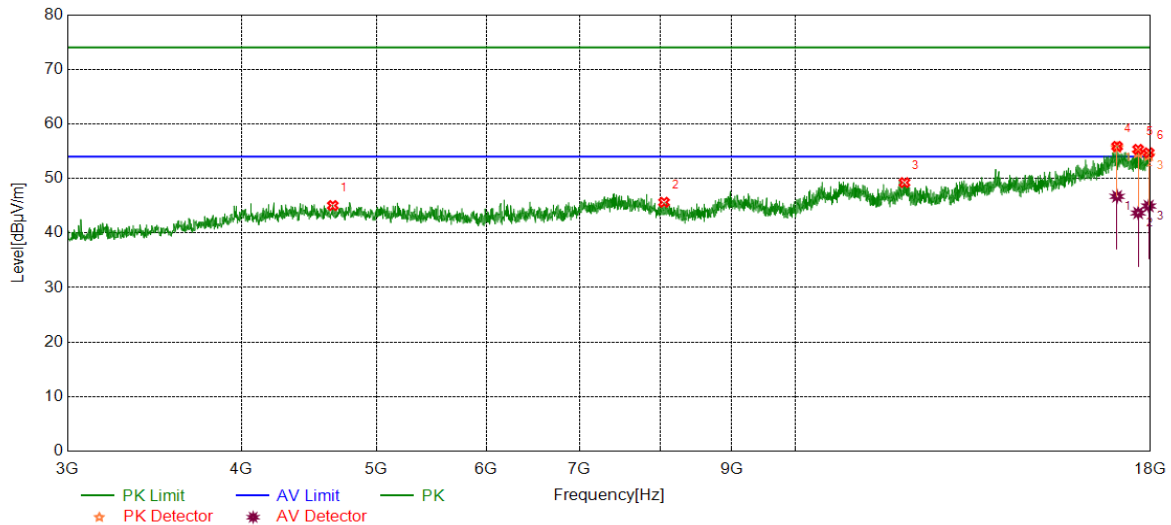

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4653.9567	39.49	5.54	45.03	74.00	-28.97	Vertical
2	8050.0063	38.24	7.39	45.63	74.00	-28.37	Vertical
3	11982.3728	36.41	12.83	49.24	74.00	-24.76	Vertical
4	17032.3790	36.88	19.00	55.88	74.00	-18.12	Vertical
5	17636.2045	37.82	17.51	55.33	74.00	-18.67	Vertical
6	17945.6182	36.26	18.44	54.70	74.00	-19.30	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17032.3790	27.71	19.00	46.71	54.00	-7.29	Vertical
2	17636.2045	26.16	17.51	43.67	54.00	-10.33	Vertical
3	17945.6182	26.51	18.44	44.95	54.00	-9.05	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

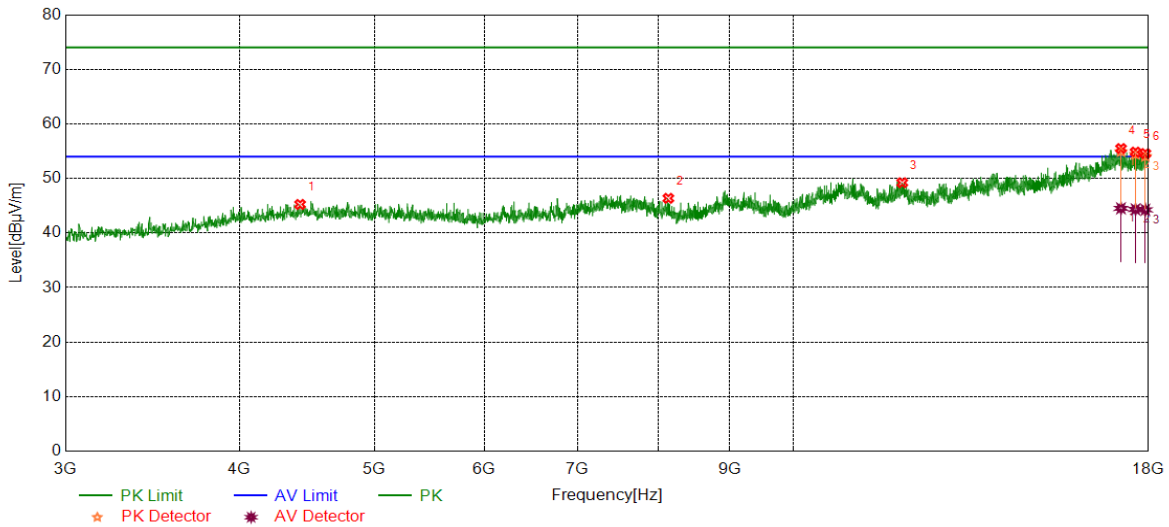

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4423.3029	40.03	5.21	45.24	74.00	-28.76	Horizontal
2	8134.3918	38.94	7.42	46.36	74.00	-27.64	Horizontal
3	11976.7471	36.51	12.71	49.22	74.00	-24.78	Horizontal
4	17199.2749	37.14	18.35	55.49	74.00	-18.51	Horizontal
5	17617.4522	37.15	17.68	54.83	74.00	-19.17	Horizontal
6	17906.2383	36.24	18.33	54.57	74.00	-19.43	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17199.2749	26.17	18.35	44.52	54.00	-9.48	Horizontal
2	17617.4522	26.65	17.68	44.33	54.00	-9.67	Horizontal
3	17906.2383	25.92	18.33	44.25	54.00	-9.75	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

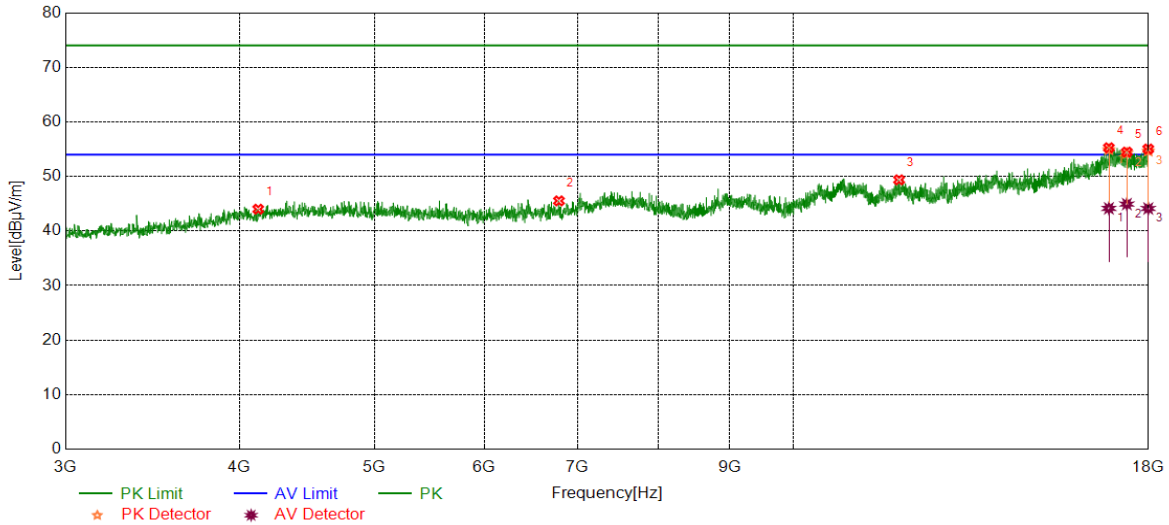

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4127.0159	39.48	4.52	44.00	74.00	-30.00	Vertical
2	6787.9735	37.70	7.82	45.52	74.00	-28.48	Vertical
3	11914.8644	36.96	12.42	49.38	74.00	-24.62	Vertical
4	16857.9822	37.39	17.87	55.26	74.00	-18.74	Vertical
5	17366.1708	36.16	18.31	54.47	74.00	-19.53	Vertical
6	17992.4991	37.38	17.65	55.03	74.00	-18.97	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16857.9822	26.28	17.87	44.15	54.00	-9.85	Vertical
2	17366.1708	26.62	18.31	44.93	54.00	-9.07	Vertical
3	17992.4991	26.48	17.65	44.13	54.00	-9.87	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

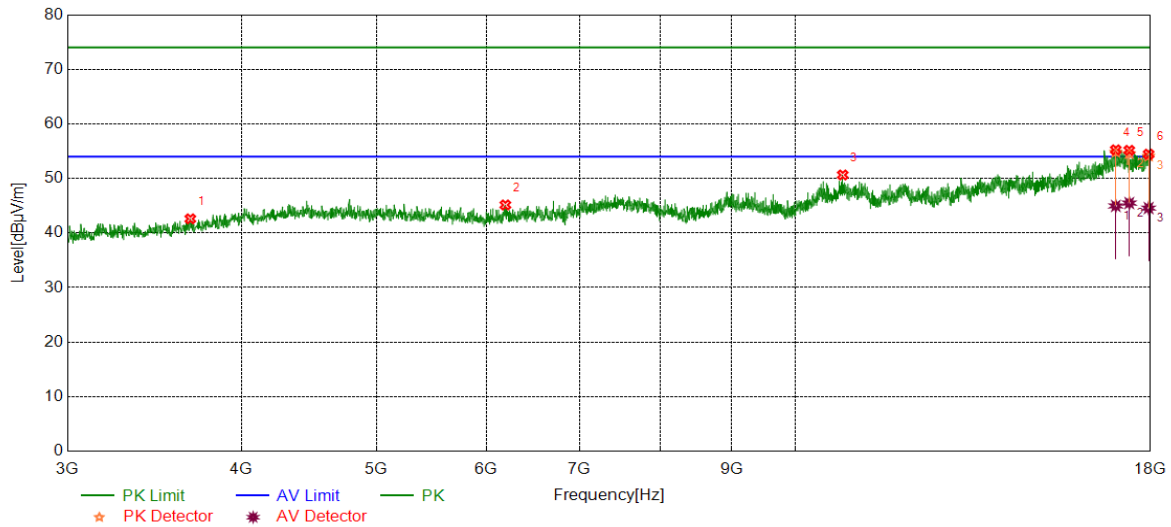

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3676.9596	39.78	2.82	42.60	74.00	-31.40	Horizontal
2	6191.6490	38.92	6.22	45.14	74.00	-28.86	Horizontal
3	10817.8522	38.42	12.22	50.64	74.00	-23.36	Horizontal
4	16994.8744	36.57	18.68	55.25	74.00	-18.75	Horizontal
5	17379.2974	36.56	18.60	55.16	74.00	-18.84	Horizontal
6	17943.7430	36.07	18.38	54.45	74.00	-19.55	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16994.8744	26.28	18.68	44.96	54.00	-9.04	Horizontal
2	17379.2974	26.89	18.60	45.49	54.00	-8.51	Horizontal
3	17943.7430	26.19	18.38	44.57	54.00	-9.43	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

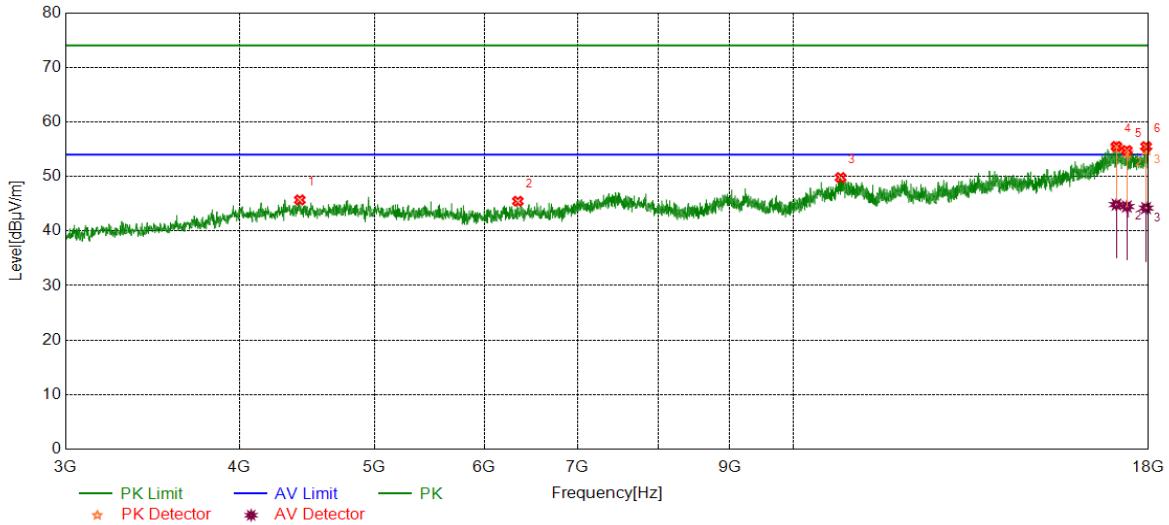

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4421.4277	40.45	5.25	45.70	74.00	-28.30	Vertical
2	6341.6677	39.02	6.44	45.46	74.00	-28.54	Vertical
3	10815.9770	37.59	12.21	49.80	74.00	-24.20	Vertical
4	17069.8837	36.31	19.19	55.50	74.00	-18.50	Vertical
5	17368.0460	36.36	18.40	54.76	74.00	-19.24	Vertical
6	17928.7411	37.38	18.10	55.48	74.00	-18.52	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17069.8837	25.65	19.19	44.84	54.00	-9.16	Vertical
2	17368.0460	26.09	18.40	44.49	54.00	-9.51	Vertical
3	17928.7411	26.11	18.10	44.21	54.00	-9.79	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

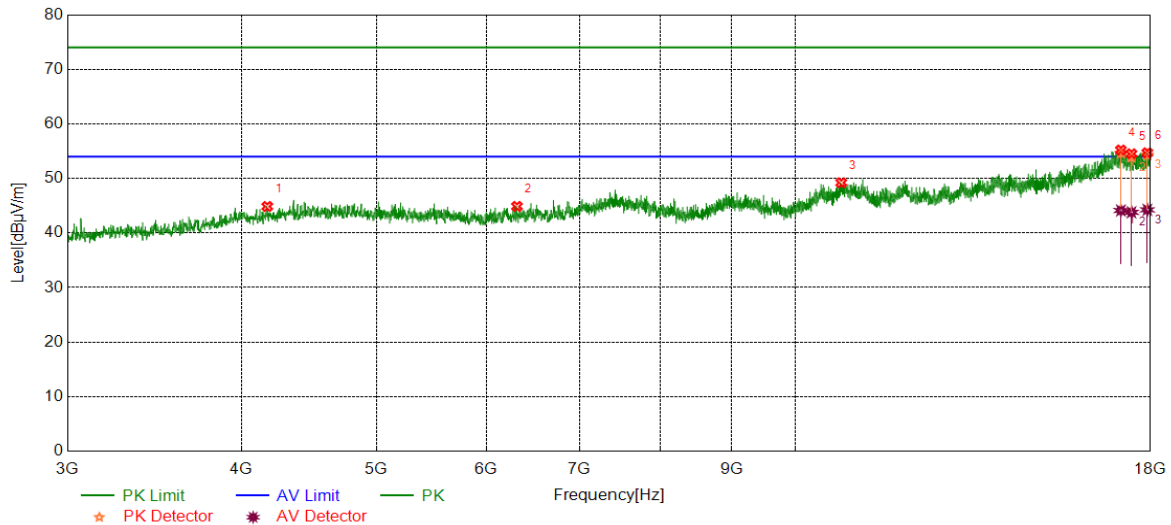

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4175.7720	40.33	4.53	44.86	74.00	-29.14	Horizontal
2	6311.6640	38.68	6.20	44.88	74.00	-29.12	Horizontal
3	10791.5990	37.13	12.09	49.22	74.00	-24.78	Horizontal
4	17139.2674	36.95	18.26	55.21	74.00	-18.79	Horizontal
5	17443.0554	36.64	17.88	54.52	74.00	-19.48	Horizontal
6	17906.2383	36.37	18.33	54.70	74.00	-19.30	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17139.2674	25.87	18.26	44.13	54.00	-9.87	Horizontal
2	17443.0554	25.92	17.88	43.80	54.00	-10.20	Horizontal
3	17906.2383	25.92	18.33	44.25	54.00	-9.75	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

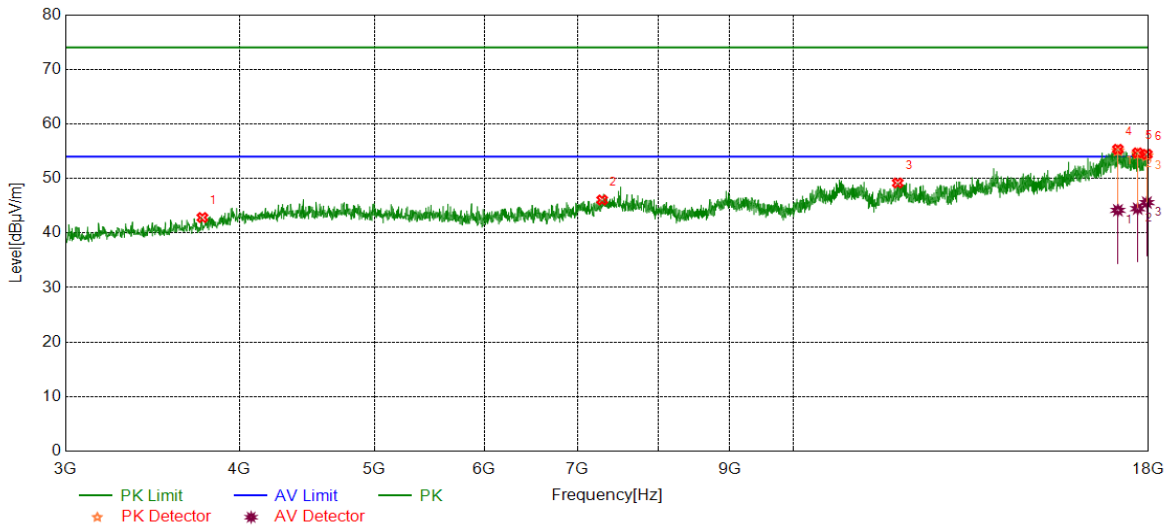

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3763.2204	39.81	3.02	42.83	74.00	-31.17	Vertical
2	7290.5363	37.37	8.68	46.05	74.00	-27.95	Vertical
3	11888.6111	36.81	12.36	49.17	74.00	-24.83	Vertical
4	17111.1389	37.33	18.02	55.35	74.00	-18.65	Vertical
5	17681.2102	36.72	17.97	54.69	74.00	-19.31	Vertical
6	17951.2439	35.86	18.56	54.42	74.00	-19.58	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17111.1389	26.14	18.02	44.16	54.00	-9.84	Vertical
2	17681.2102	26.49	17.97	44.46	54.00	-9.54	Vertical
3	17951.2439	27.02	18.56	45.58	54.00	-8.42	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

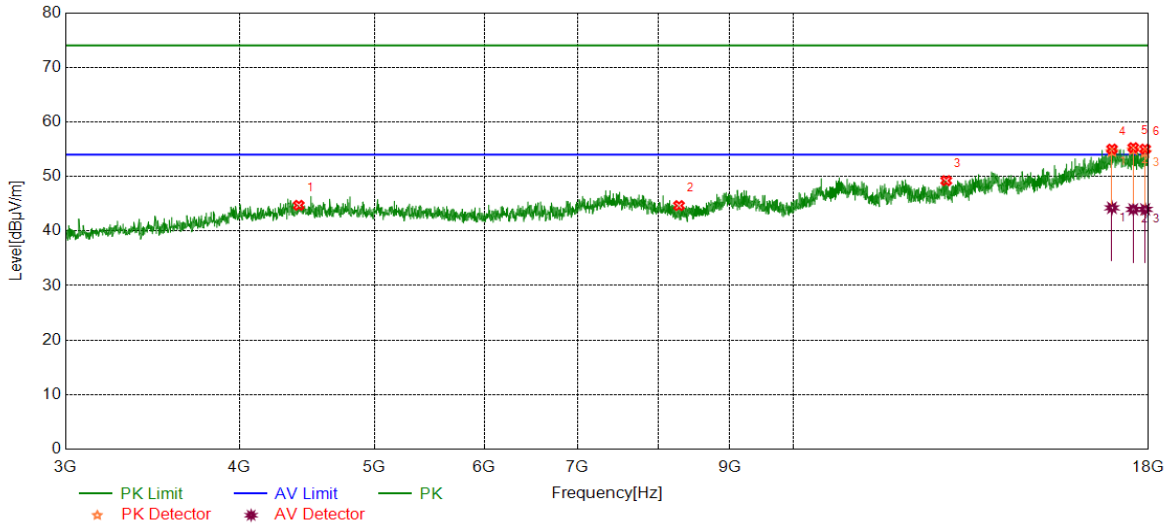

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4413.9267	39.48	5.23	44.71	74.00	-29.29	Horizontal
2	8278.7848	37.64	7.01	44.65	74.00	-29.35	Horizontal
3	12880.6101	37.11	12.12	49.23	74.00	-24.77	Horizontal
4	16944.2430	36.61	18.41	55.02	74.00	-18.98	Horizontal
5	17551.8190	37.23	18.05	55.28	74.00	-18.72	Horizontal
6	17900.6126	36.63	18.40	55.03	74.00	-18.97	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16944.2430	25.84	18.41	44.25	54.00	-9.75	Horizontal
2	17551.8190	25.91	18.05	43.96	54.00	-10.04	Horizontal
3	17900.6126	25.57	18.40	43.97	54.00	-10.03	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

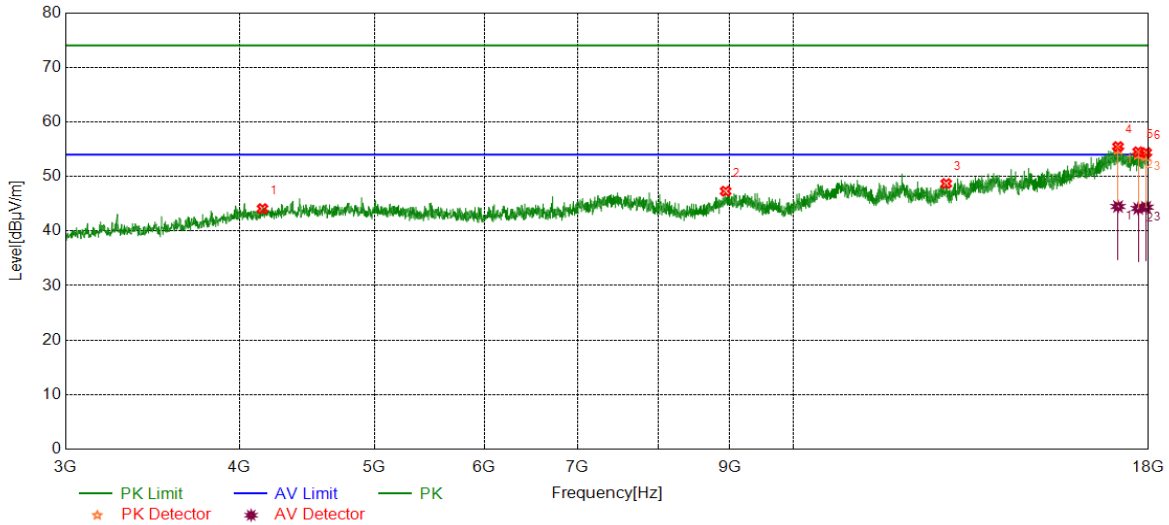

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4157.0196	39.30	4.79	44.09	74.00	-29.91	Vertical
2	8942.6178	38.41	8.89	47.30	74.00	-26.70	Vertical
3	12880.6101	36.57	12.12	48.69	74.00	-25.31	Vertical
4	17114.8894	37.46	18.01	55.47	74.00	-18.53	Vertical
5	17696.2120	36.68	17.83	54.51	74.00	-19.49	Vertical
6	17928.7411	36.27	18.10	54.37	74.00	-19.63	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17114.8894	26.48	18.01	44.49	54.00	-9.51	Vertical
2	17696.2120	26.30	17.83	44.13	54.00	-9.87	Vertical
3	17928.7411	26.26	18.10	44.36	54.00	-9.64	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

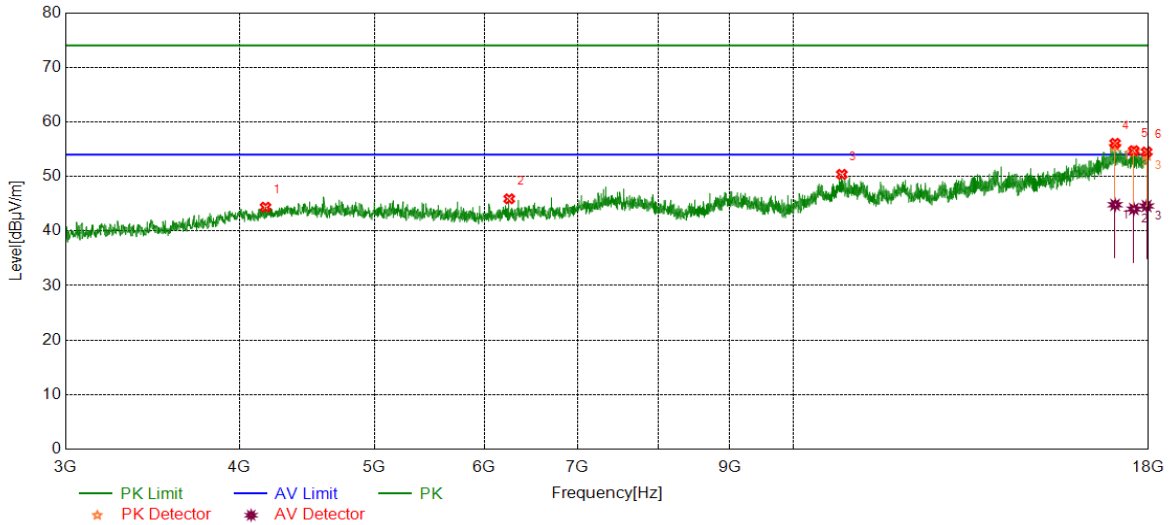

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4177.6472	39.86	4.50	44.36	74.00	-29.64	Horizontal
2	6251.6565	39.62	6.28	45.90	74.00	-28.10	Horizontal
3	10838.4798	38.25	12.13	50.38	74.00	-23.62	Horizontal
4	17032.3790	37.08	19.00	56.08	74.00	-17.92	Horizontal
5	17568.6961	36.62	18.10	54.72	74.00	-19.28	Horizontal
6	17943.7430	36.11	18.38	54.49	74.00	-19.51	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17032.3790	25.81	19.00	44.81	54.00	-9.19	Horizontal
2	17568.6961	25.93	18.10	44.03	54.00	-9.97	Horizontal
3	17943.7430	26.20	18.38	44.58	54.00	-9.42	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

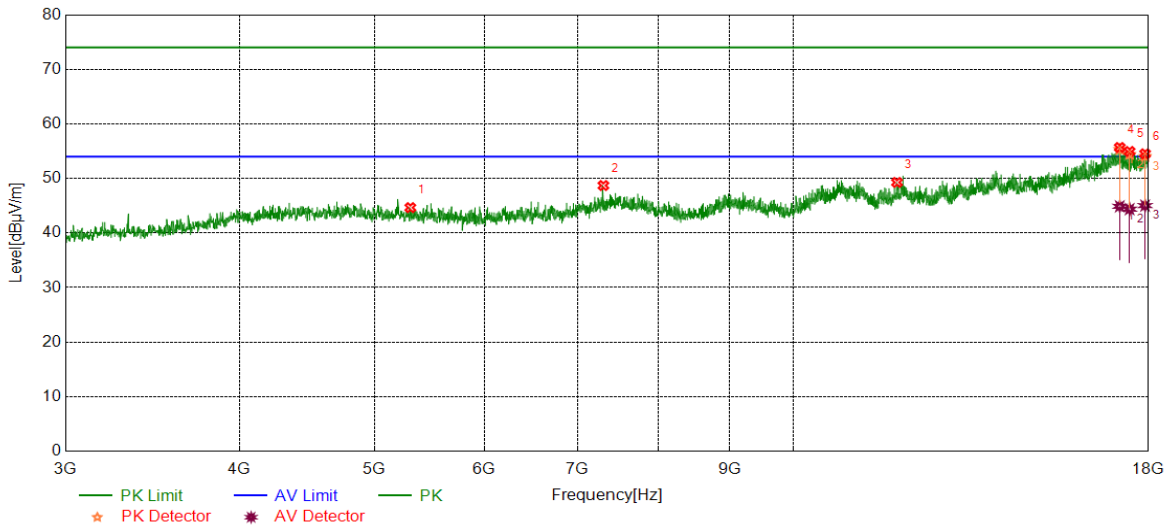

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5308.4136	39.22	5.43	44.65	74.00	-29.35	Vertical
2	7305.5382	40.22	8.48	48.70	74.00	-25.30	Vertical
3	11873.6092	36.91	12.36	49.27	74.00	-24.73	Vertical
4	17163.6455	37.40	18.28	55.68	74.00	-18.32	Vertical
5	17446.8059	37.06	17.89	54.95	74.00	-19.05	Vertical
6	17898.7373	36.10	18.42	54.52	74.00	-19.48	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17163.6455	26.61	18.28	44.89	54.00	-9.11	Vertical
2	17446.8059	26.48	17.89	44.37	54.00	-9.63	Vertical
3	17898.7373	26.60	18.42	45.02	54.00	-8.98	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

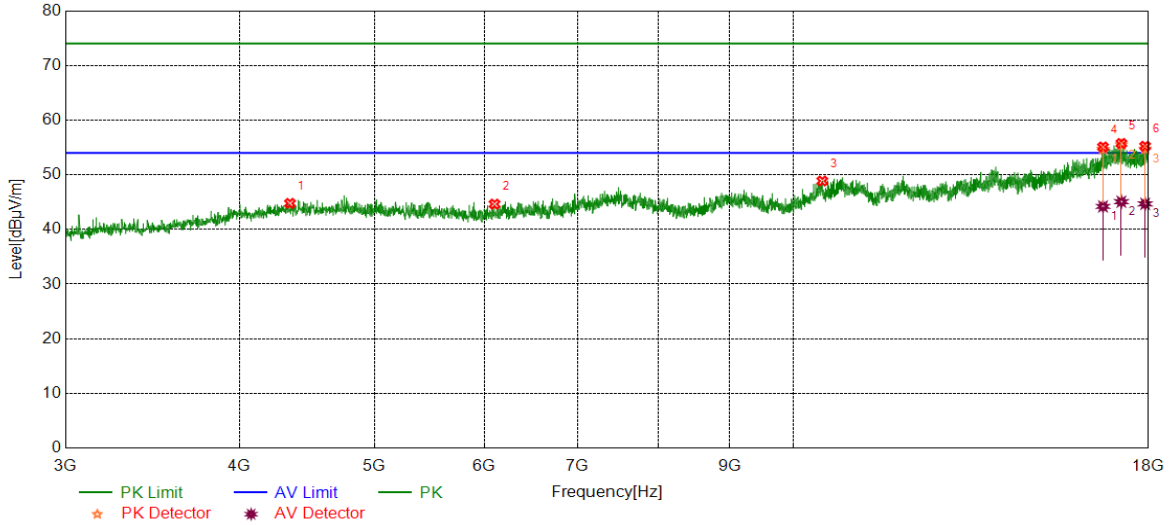

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4350.1688	39.51	5.26	44.77	74.00	-29.23	Horizontal
2	6101.6377	38.93	5.70	44.63	74.00	-29.37	Horizontal
3	10493.4367	37.23	11.63	48.86	74.00	-25.14	Horizontal
4	16694.8369	37.03	18.06	55.09	74.00	-18.91	Horizontal
5	17210.5263	37.91	17.82	55.73	74.00	-18.27	Horizontal
6	17900.6126	36.82	18.40	55.22	74.00	-18.78	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16694.8369	26.15	18.06	44.21	54.00	-9.79	Horizontal
2	17210.5263	27.25	17.82	45.07	54.00	-8.93	Horizontal
3	17900.6126	26.28	18.40	44.68	54.00	-9.32	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

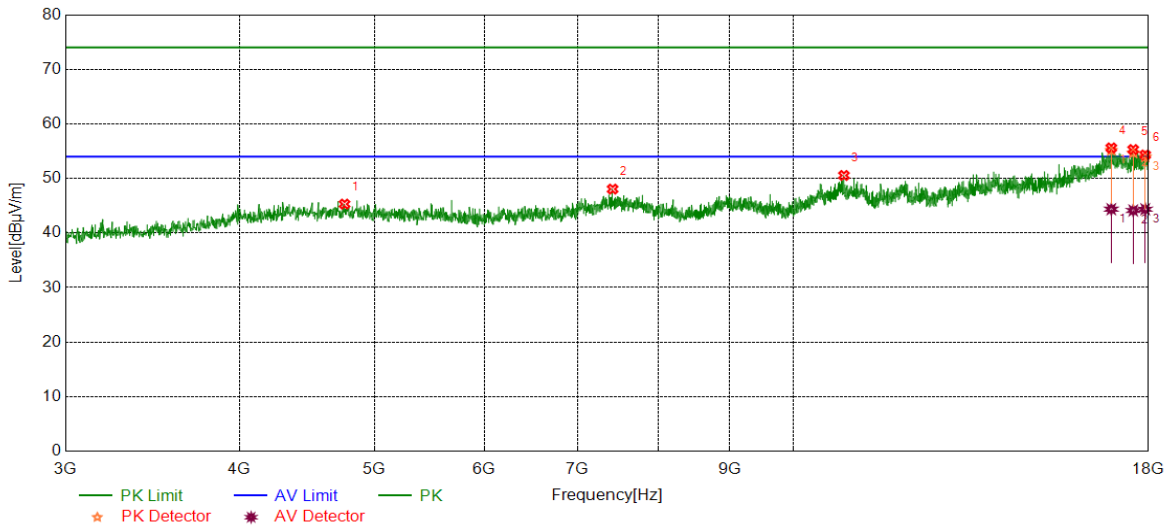

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4760.8451	39.76	5.54	45.30	74.00	-28.70	Vertical
2	7418.0523	39.44	8.61	48.05	74.00	-25.95	Vertical
3	10875.9845	38.34	12.21	50.55	74.00	-23.45	Vertical
4	16925.4907	37.56	18.04	55.60	74.00	-18.40	Vertical
5	17549.9437	37.22	18.08	55.30	74.00	-18.70	Vertical
6	17902.4878	35.94	18.37	54.31	74.00	-19.69	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16925.4907	26.32	18.04	44.36	54.00	-9.64	Vertical
2	17549.9437	26.05	18.08	44.13	54.00	-9.87	Vertical
3	17902.4878	25.98	18.37	44.35	54.00	-9.65	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

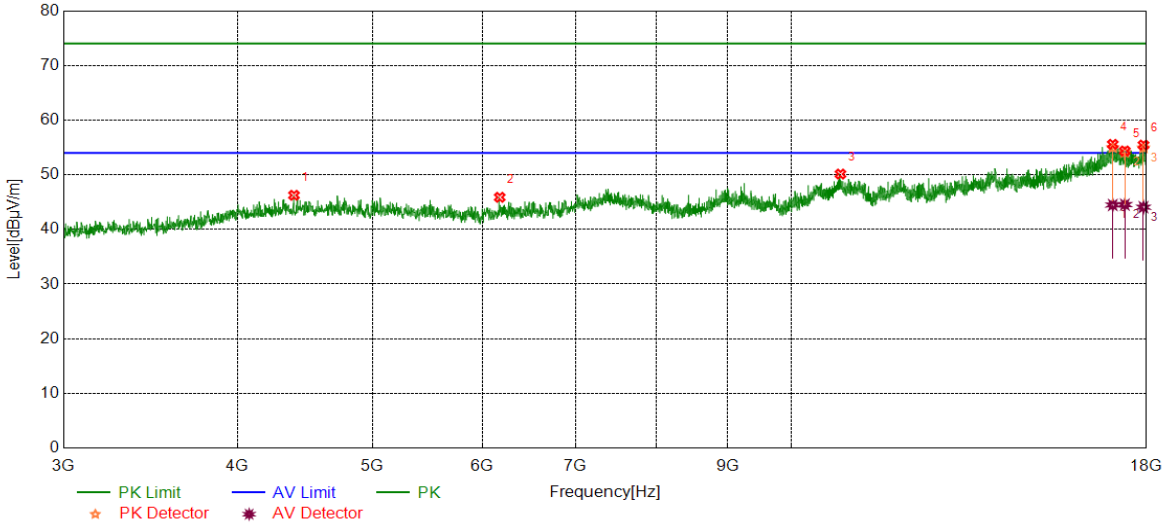

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4393.2992	41.15	5.10	46.25	74.00	-27.75	Horizontal
2	6174.7718	40.04	5.84	45.88	74.00	-28.12	Horizontal
3	10849.7312	37.70	12.43	50.13	74.00	-23.87	Horizontal
4	17023.0029	37.02	18.55	55.57	74.00	-18.43	Horizontal
5	17366.1708	36.05	18.31	54.36	74.00	-19.64	Horizontal
6	17909.9887	37.16	18.28	55.44	74.00	-18.56	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17023.0029	25.92	18.55	44.47	54.00	-9.53	Horizontal
2	17366.1708	26.23	18.31	44.54	54.00	-9.46	Horizontal
3	17909.9887	25.79	18.28	44.07	54.00	-9.93	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

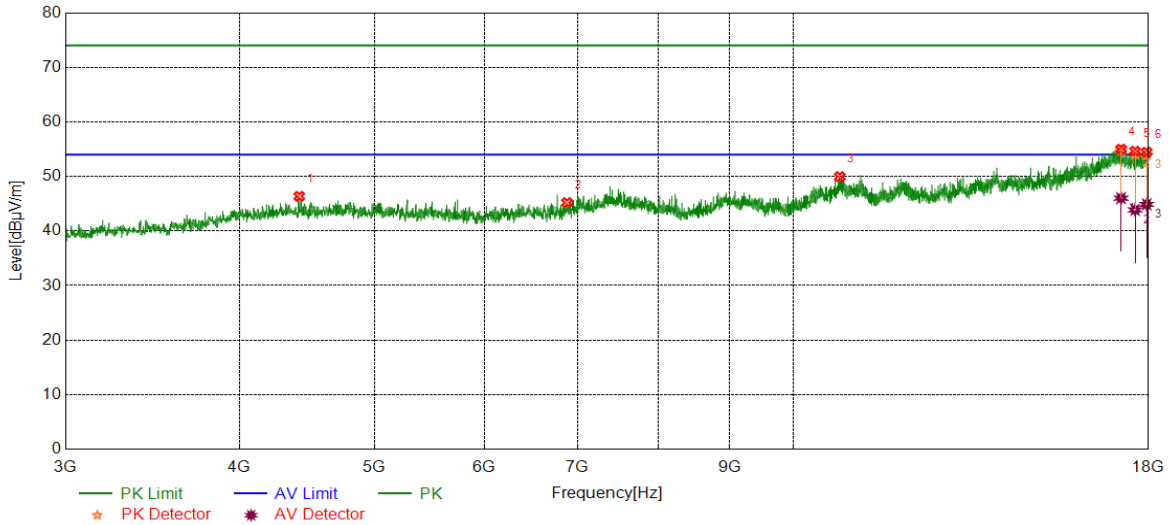

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4417.6772	41.10	5.26	46.36	74.00	-27.64	Vertical
2	6877.9847	37.01	8.20	45.21	74.00	-28.79	Vertical
3	10800.9751	37.91	12.06	49.97	74.00	-24.03	Vertical
4	17201.1501	36.71	18.30	55.01	74.00	-18.99	Vertical
5	17604.3255	36.99	17.64	54.63	74.00	-19.37	Vertical
6	17945.6182	36.01	18.44	54.45	74.00	-19.55	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17201.1501	27.72	18.30	46.02	54.00	-7.98	Vertical
2	17604.3255	26.23	17.64	43.87	54.00	-10.13	Vertical
3	17945.6182	26.44	18.44	44.88	54.00	-9.12	Vertical


- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part III: 18GHz~26.5GHz

SPURIOUS EMISSIONS 18GHz TO 26.5GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

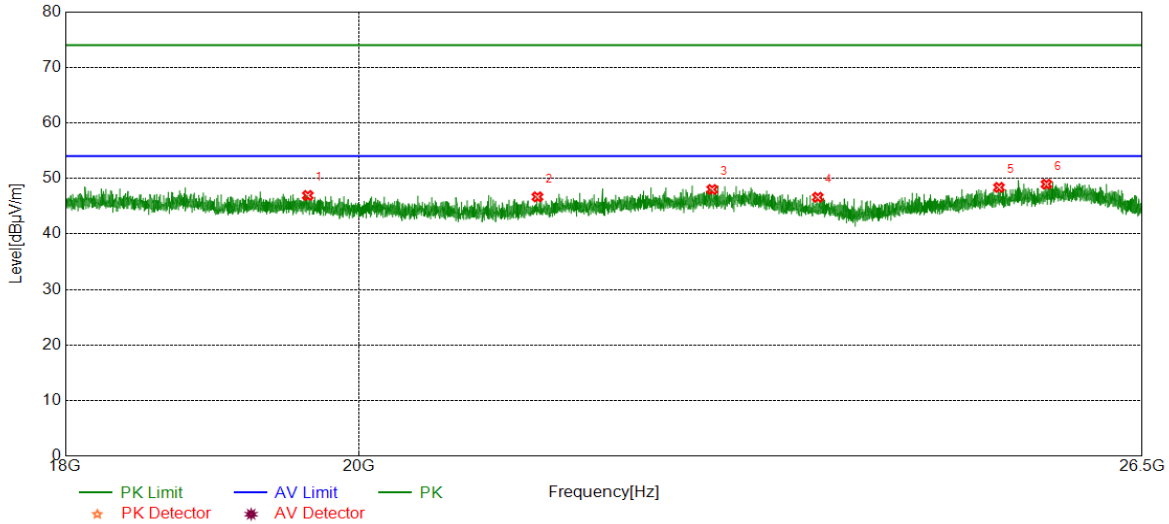


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	19638.1138	47.61	-0.68	46.93	74.00	-27.07	Horizontal
2	21327.2327	47.36	-0.68	46.68	74.00	-27.32	Horizontal
3	22708.6209	47.01	1.00	48.01	74.00	-25.99	Horizontal
4	23586.7587	46.94	-0.33	46.61	74.00	-27.39	Horizontal
5	25173.8674	48.07	0.31	48.38	74.00	-25.62	Horizontal
6	25606.5607	47.93	1.03	48.96	74.00	-25.04	Horizontal

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

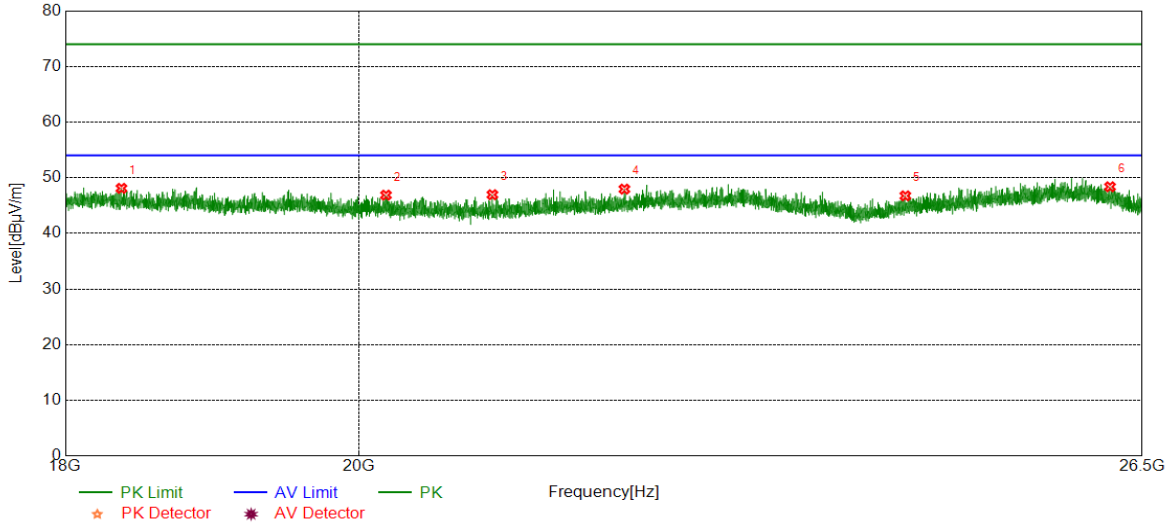

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	18366.3866	49.09	-0.99	48.10	74.00	-25.90	Vertical
2	20197.4697	47.48	-0.60	46.88	74.00	-27.12	Vertical
3	20984.6485	47.94	-0.99	46.95	74.00	-27.05	Vertical
4	22003.9004	47.79	0.17	47.96	74.00	-26.04	Vertical
5	24340.7841	47.53	-0.78	46.75	74.00	-27.25	Vertical
6	26198.2198	47.09	1.29	48.38	74.00	-25.62	Vertical


- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part IV: 30MHz~1GHz

SPURIOUS EMISSIONS 30M TO 1GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

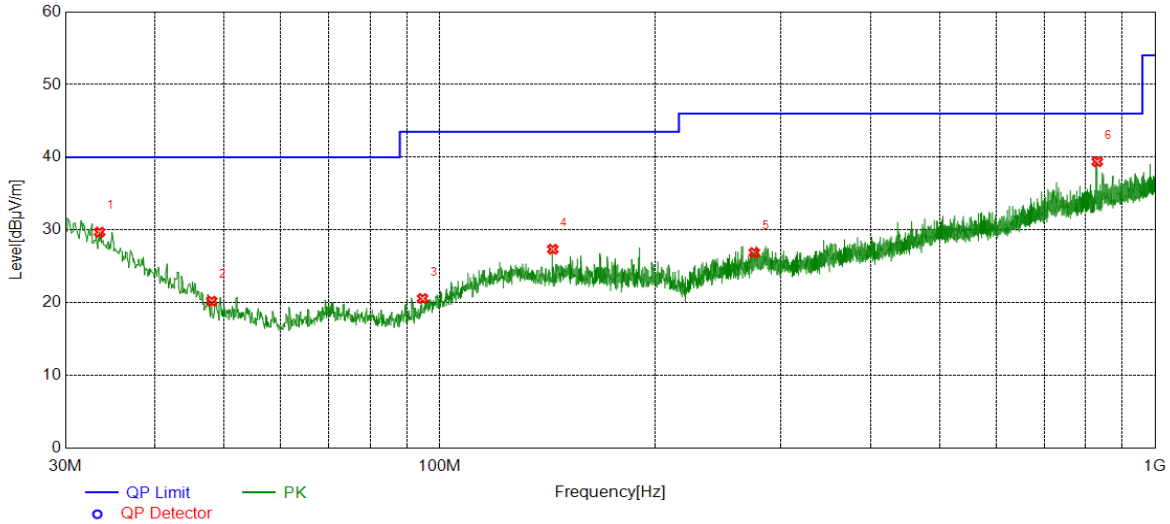


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	33.4923	4.89	24.82	29.71	40.00	-10.29	Horizontal
2	48.0438	4.46	15.75	20.21	40.00	-19.79	Horizontal
3	94.7055	4.99	15.59	20.58	43.50	-22.92	Horizontal
4	143.9864	7.62	19.74	27.36	43.50	-16.14	Horizontal
5	275.3375	6.73	20.16	26.89	46.00	-19.11	Horizontal
6	830.2330	9.19	30.20	39.39	46.00	-6.61	Horizontal

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

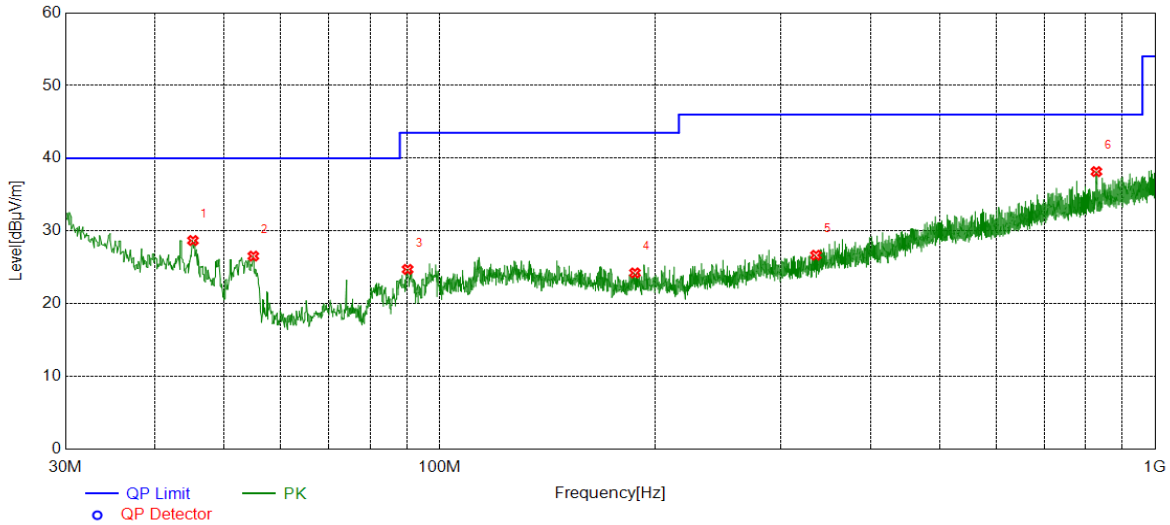

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	45.2305	11.22	17.47	28.69	40.00	-11.31	Vertical
2	54.9315	12.25	14.30	26.55	40.00	-13.45	Vertical
3	90.2430	10.24	14.48	24.72	43.50	-18.78	Vertical
4	187.5438	5.87	18.37	24.24	43.50	-19.26	Vertical
5	335.7746	5.33	21.34	26.67	46.00	-19.33	Vertical
6	827.9048	7.99	30.18	38.17	46.00	-7.83	Vertical


Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.



Part V: 9KHz~30MHz

SPURIOUS EMISSIONS Below 30MHz (WORST CASE CONFIGURATION-FACE ON)

Test Mode	Channel	Frequency Range	Verdict
11B	LCH	9kHz~150kHz	PASS

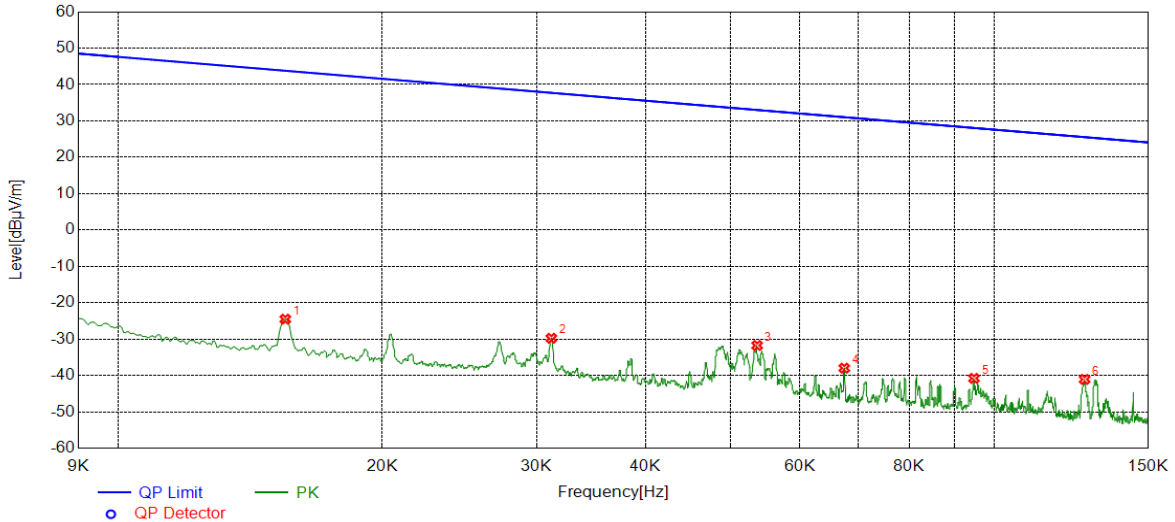


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.0155	36.46	-60.98	-24.52	43.77	-68.29	Horizontal
2	0.0312	31.15	-60.92	-29.77	37.71	-67.48	Horizontal
3	0.0536	29.34	-61.09	-31.75	33.02	-64.77	Horizontal
4	0.0674	23.32	-61.31	-37.99	31.02	-69.01	Horizontal
5	0.0948	20.08	-60.87	-40.79	28.07	-68.86	Horizontal
6	0.1268	19.97	-61.04	-41.07	25.54	-66.61	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



Test Mode	Channel	Frequency Range	Verdict
11B	LCH	150kHz~490kHz	PASS

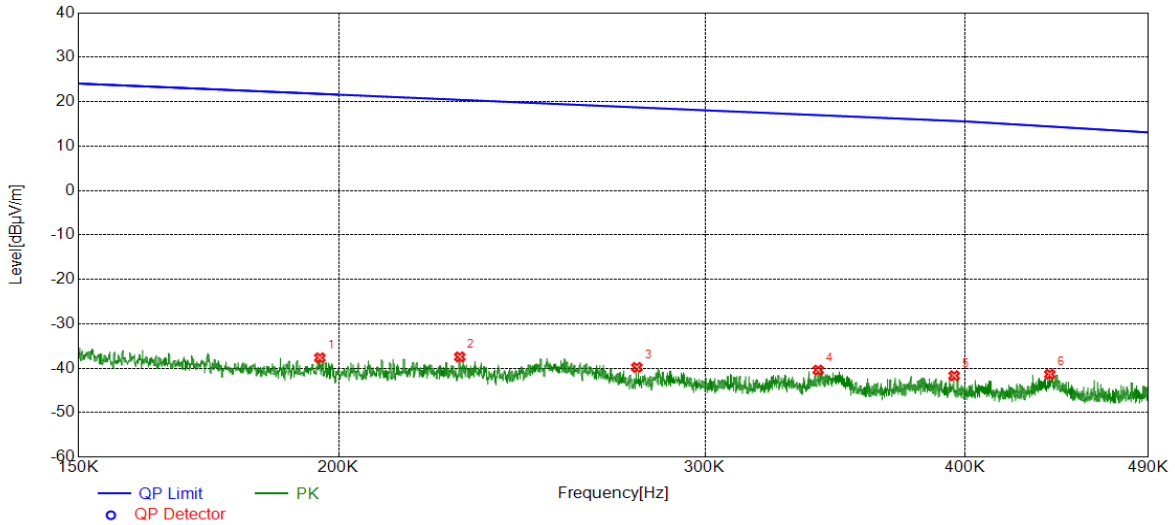


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.1959	23.44	-61.08	-37.64	21.76	-59.40	Vertical
2	0.2287	23.46	-60.91	-37.45	20.42	-57.87	Vertical
3	0.2782	20.97	-60.78	-39.81	18.72	-58.53	Vertical
4	0.3400	20.30	-60.73	-40.43	16.97	-57.40	Vertical
5	0.3952	18.99	-60.68	-41.69	15.66	-57.35	Vertical
6	0.4393	19.30	-60.65	-41.35	14.41	-55.76	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



Test Mode	Channel	Frequency Range	Verdict
11B	LCH	490kHz~30MHz	PASS

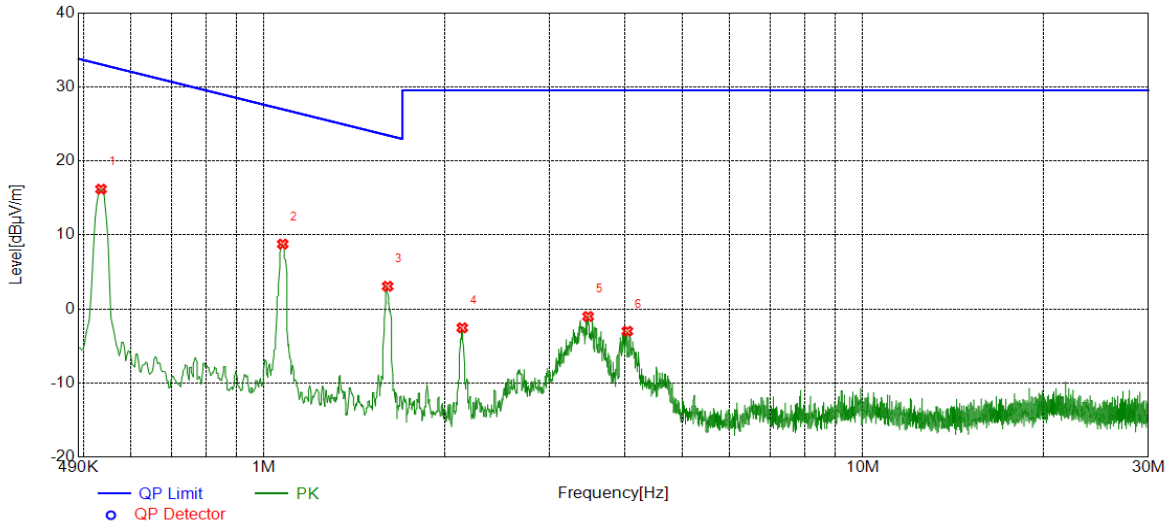

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.5343	36.78	-20.60	16.18	33.05	-16.87	Vertical
2	1.0744	29.12	-20.35	8.77	26.98	-18.21	Vertical
3	1.6085	23.34	-20.27	3.07	23.47	-20.40	Vertical
4	2.1427	17.70	-20.24	-2.54	29.54	-32.08	Vertical
5	3.4767	19.25	-20.26	-1.01	29.54	-30.55	Vertical
6	4.0434	17.05	-20.05	-3.00	29.54	-32.54	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a)

FREQUENCY (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

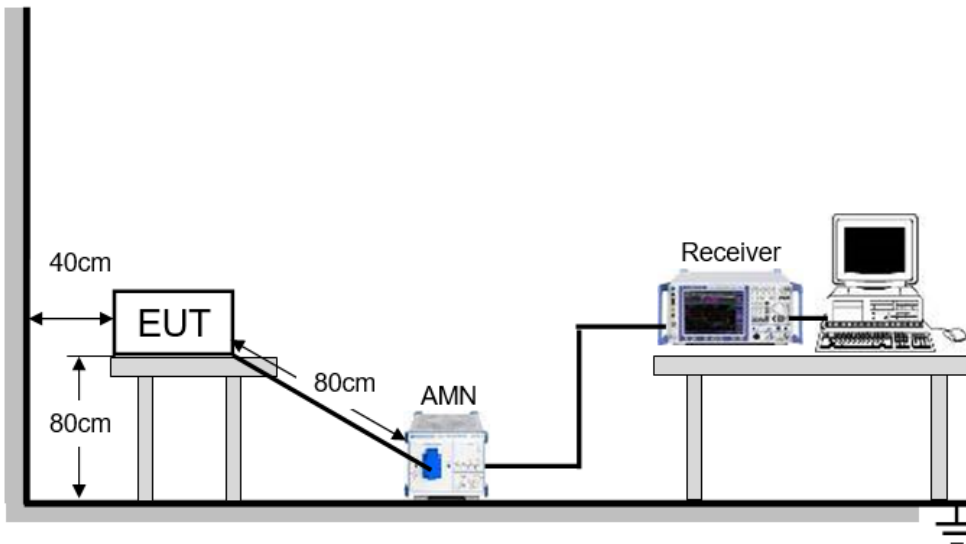


The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.



LINE L RESULTS (WORST-CASE CONFIGURATION)

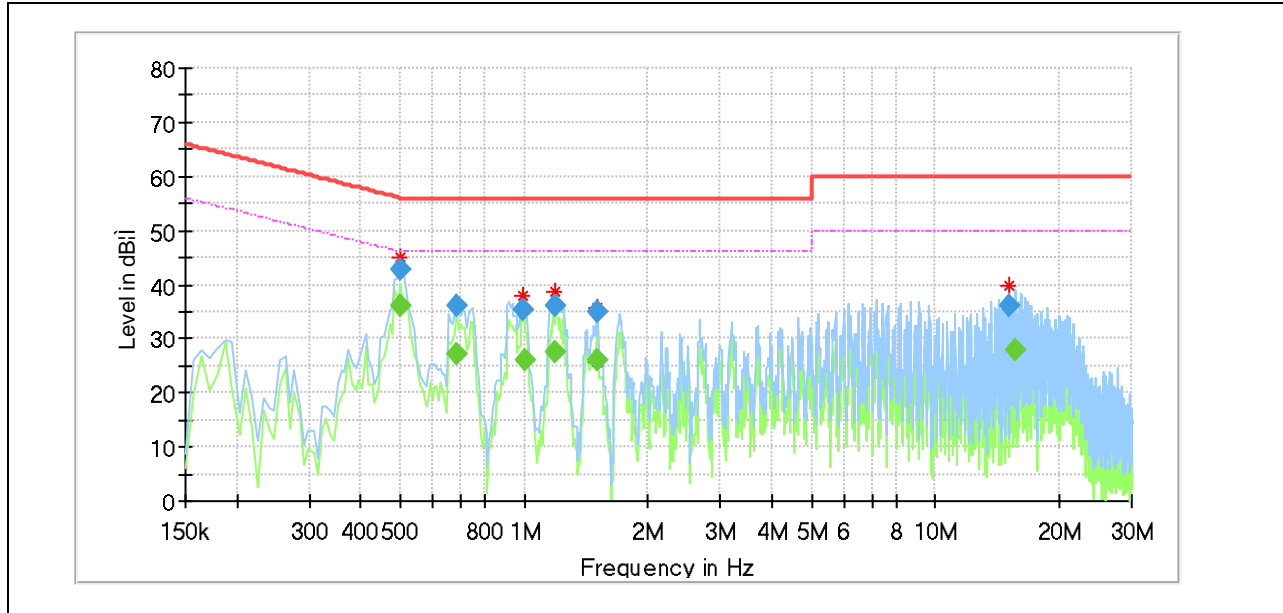


Final Result

Frequency [MHz]	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	Filter	Corr. [dB]
0.500738	---	35.95	46.00	10.05	1000.0	9.000	L1	OFF	9.7
0.500738	42.96	---	56.00	13.04	1000.0	9.000	L1	OFF	9.7
0.687300	---	27.18	46.00	18.82	1000.0	9.000	L1	OFF	9.6
0.687300	36.04	---	56.00	19.96	1000.0	9.000	L1	OFF	9.6
0.993263	35.33	---	56.00	20.67	1000.0	9.000	L1	OFF	9.7
1.000725	---	26.19	46.00	19.81	1000.0	9.000	L1	OFF	9.7
1.194750	35.92	---	56.00	20.08	1000.0	9.000	L1	OFF	9.4
1.194750	---	27.60	46.00	18.40	1000.0	9.000	L1	OFF	9.4
1.500713	34.81	---	56.00	21.19	1000.0	9.000	L1	OFF	9.6
1.508175	---	25.90	46.00	20.10	1000.0	9.000	L1	OFF	9.6
15.112313	36.19	---	60.00	23.81	1000.0	9.000	L1	OFF	9.5
15.679463	---	28.06	50.00	21.94	1000.0	9.000	L1	OFF	9.5

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
 4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
 5. Pre-testing all test modes and channels, and find the LCH of 11b which is the worst case, so only the worst case is included in this test report.



LINE N RESULTS (WORST-CASE CONFIGURATION)

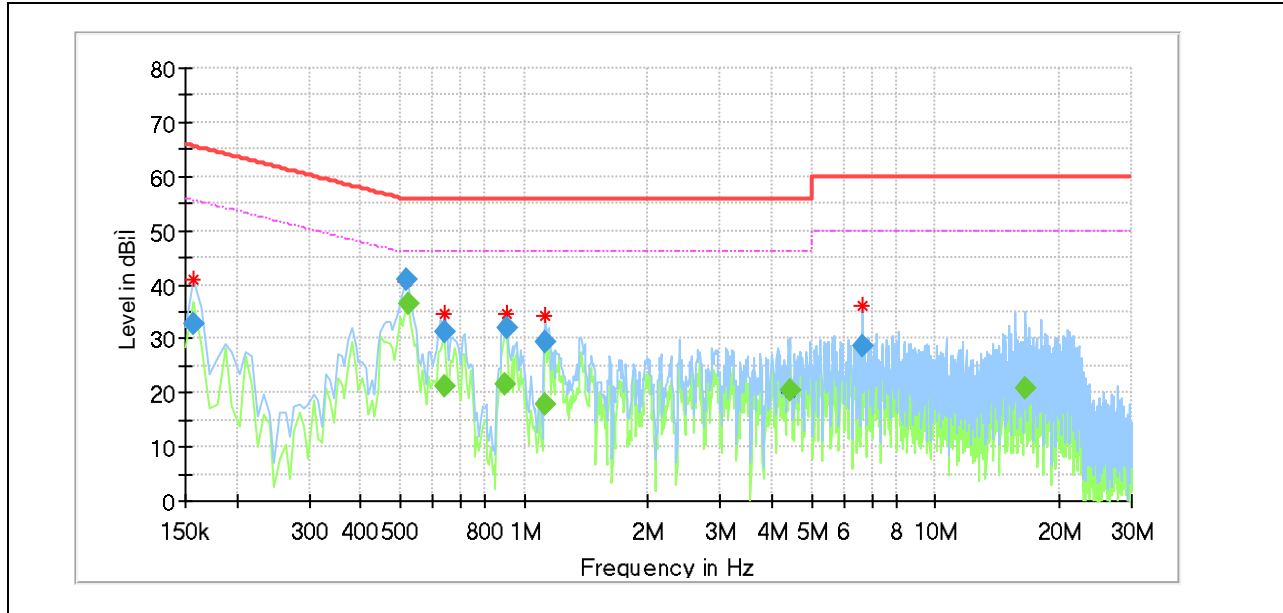

Final_Result

Frequency [MHz]	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	Filter	Corr. [dB]
0.157463	32.91	---	65.60	32.68	1000.0	9.000	N	OFF	9.5
0.515663	40.78	---	56.00	15.22	1000.0	9.000	N	OFF	9.6
0.523125	---	36.54	46.00	9.46	1000.0	9.000	N	OFF	9.6
0.642525	---	21.37	46.00	24.63	1000.0	9.000	N	OFF	9.5
0.642525	31.37	---	56.00	24.63	1000.0	9.000	N	OFF	9.5
0.896250	---	21.69	46.00	24.31	1000.0	9.000	N	OFF	9.7
0.903713	32.03	---	56.00	23.97	1000.0	9.000	N	OFF	9.7
1.120125	---	17.94	46.00	28.06	1000.0	9.000	N	OFF	9.7
1.120125	29.30	---	56.00	26.70	1000.0	9.000	N	OFF	9.7
4.426013	---	20.30	46.00	25.70	1000.0	9.000	N	OFF	9.6
6.627450	28.47	---	60.00	31.53	1000.0	9.000	N	OFF	9.8
16.597350	---	20.80	50.00	29.20	1000.0	9.000	N	OFF	9.5

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
 4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
 5. Pre-testing all test modes and channels, and find the LCH of 11b which is the worst case, so only the worst case is included in this test report.



9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi

END OF REPORT