



**CFR 47 FCC PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

*For*

**CONSUMER CAMERA**

**MODEL NUMBER: IPC-F26FP-C, IPC-F26FP-C-0360B-imou, IPC-F26FP-C-0360B,  
IPC-F26FP-C-0600B-imou, IPC-F26FP-C-0600B, IPC-F26FP-C-imou,  
IPC-F26FN-C, IPC-F26FN-C-0360B-imou, IPC-F26FN-C-0360B,  
IPC-F26FN-C-0600B-imou, IPC-F26FN-C-0600B, IPC-F26FN-C-imou,  
LC-K36F-C**

**FCC ID: 2AVYF-IPC-FX6F-C**

**REPORT NUMBER: 4789973747-19**

**ISSUE DATE: June 12, 2021**

*Prepared for*

**Hangzhou Huacheng Network Technology Co.,Ltd.  
No.2930, Nanhuan Road, Binjiang District, Hangzhou, China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	06/12/2021	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6dB Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test for AC Power Port	FCC Part 15.207	Pass
7	Antenna Requirement	FCC Part 15.203	Pass

Note:  
1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.  
2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >< ISED RSS-247 > when <Accuracy Method> decision rule is applied.



## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>6</b>
<b>2. TEST METHODOLOGY</b> .....	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	8
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	8
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>9</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	9
5.2. <i>CHANNEL LIST</i> .....	9
5.3. <i>MAXIMUM OUTPUT POWER</i> .....	10
5.4. <i>TEST CHANNEL CONFIGURATION</i> .....	10
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i> .....	10
5.6. <i>THE WORSE CASE CONFIGURATIONS</i> .....	11
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	12
5.8. <i>DESCRIPTION OF TEST SETUP</i> .....	13
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED</b> .....	<b>14</b>
<b>7. ANTENNA PORT TEST RESULTS</b> .....	<b>16</b>
7.1. <i>ON TIME AND DUTY CYCLE</i> .....	16
7.2. <i>6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH</i> .....	17
7.3. <i>CONDUCTED OUTPUT POWER</i> .....	19
7.4. <i>POWER SPECTRAL DENSITY</i> .....	20
7.5. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS</i> .....	21
<b>8. RADIATED TEST RESULTS</b> .....	<b>23</b>
8.1. <i>RESTRICTED BANDEDGE</i> .....	28
8.1.1. <i>802.11b SISO MODE</i> .....	28
8.1.2. <i>802.11g SISO MODE</i> .....	33
8.1.3. <i>802.11n HT20 MIMO MODE</i> .....	37
8.1.4. <i>802.11n HT40 MIMO MODE</i> .....	41
8.2. <i>SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)</i> .....	45
8.2.1. <i>802.11g SISO MODE</i> .....	45
8.3. <i>SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)</i> .....	51
8.3.1. <i>802.11b SISO MODE</i> .....	51
8.3.2. <i>802.11g SISO MODE</i> .....	57
8.3.3. <i>802.11n HT20 MIMO MODE</i> .....	63
8.3.4. <i>802.11n HT40 MIMO MODE</i> .....	69



8.4.	SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)	75
8.4.1.	802.11n H40 MIMO MODE	75
8.5.	SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)	77
8.5.1.	802.11n HT40 MIMO MODE	77
8.6.	SPURIOUS EMISSIONS BELOW 30 MHz	79
8.6.1.	802.11n H40 MIMO MODE	79
<b>9.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS</b>	<b>82</b>
9.1.	802.11n HT40 MIMO MODE	84
<b>10.</b>	<b>ANTENNA REQUIREMENTS</b>	<b>86</b>
<b>11.</b>	<b>Appendix A</b>	<b>87</b>
11.1.	Appendix A: DTS Bandwidth	87
11.1.1.	Test Result	87
11.1.2.	Test Graphs	88
11.2.	Appendix B: Occupied Channel Bandwidth	96
11.2.1.	Test Result	96
11.2.2.	Test Graphs	97
11.3.	Appendix C: Maximum conducted AVG output power	105
11.3.1.	Test Result	105
11.4.	Appendix D: Maximum power spectral density	106
11.4.1.	Test Result	106
11.4.2.	Test Graphs	107
11.5.	Appendix E: Band edge measurements	113
11.5.1.	Test Result	113
11.5.2.	Test Graphs	114
11.6.	Appendix F: Conducted Spurious Emission	118
11.6.1.	Test Result	118
11.6.2.	Test Graphs	119
11.7.	Appendix G: Duty Cycle	136
11.7.1.	Test Result	136
11.7.2.	Test Graphs	137



# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: Hangzhou Huacheng Network Technology Co.,Ltd.  
Address: No.2930, Nanhuan Road, Binjiang District, Hangzhou, China

## Manufacturer Information

Company Name: Hangzhou Huacheng Network Technology Co.,Ltd.  
Address: No.2930, Nanhuan Road, Binjiang District, Hangzhou, China

## EUT Information

EUT Name: CONSUMER CAMERA  
Model Name: IPC-F26FP-C  
Series Model: IPC-F26FP-C-0360B-imou, IPC-F26FP-C-0360B, IPC-F26FP-C-0600B-imou, IPC-F26FP-C-0600B, IPC-F26FP-C-imou, IPC-F26FN-C, IPC-F26FN-C-0360B-imou, IPC-F26FN-C-0360B, IPC-F26FN-C-0600B-imou, IPC-F26FN-C-0600B, IPC-F26FN-C-imou, LC-K36F-C  
Model difference: Only the model name is different.  
Sample Received Date: June 7, 2021  
Sample Status: Normal  
Sample ID: 3967062  
Date of Tested: June 7, 2021~ June 8, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:

Kebo Zhang  
Project Engineer

Checked By:

Shawn Wen  
Laboratory Leader

Approved By:

Stephen Guo  
Laboratory Manager



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15 and ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.





## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	CONSUMER CAMERA
Model Name	IPC-F26FP-C
Series Model	IPC-F26FP-C-0360B-imou, IPC-F26FP-C-0360B, IPC-F26FP-C-0600B-imou, IPC-F26FP-C-0600B, IPC-F26FP-C-imou, IPC-F26FN-C, IPC-F26FN-C-0360B-imou, IPC-F26FN-C-0360B, IPC-F26FN-C-0600B-imou, IPC-F26FN-C-0600B, IPC-F26FN-C-imou, LC-K36F-C
Model difference	Only the model name is different.
Radio Technology	IEEE802.11b/g/n HT20/HT40
Operation frequency	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz
Modulation	IEEE 802.11b: DSSS(CCK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Rating	12Vdc, 1A

### 5.2. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/



### 5.3. MAXIMUM OUTPUT POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2462	1-11[11]	17.06
g	2412 ~ 2462	1-11[11]	15.36
n HT20	2412 ~ 2462	1-11[11]	17.00
n HT40	2422 ~ 2452	3-9[7]	17.40

### 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
WiFi TX(802.11b)	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11g)	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11n HT20)	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11n HT40)	CH 1, CH 6, CH 11/ Low, Middle, High	2422MHz, 2437MHz, 2452MHz

### 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band										
Test Software		SecureCRT								
Modulation Mode	Transmit Antenna Number	Test Software setting value								
		NCB: 20MHz			NCB: 40MHz					
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9			
802.11b	1	30	30	30	/					
	2	33	33	33						
802.11g	1	37	38	38						
	2	39	40	40						
802.11n HT20	1	37	38	38						
	2	39	40	40						
802.11n HT40	1	/						37	38	38
	2							39	40	40

Note: Antenna 1 and antenna 2 use the same power setting for both SISO and MIMO modes.

## 5.6. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst case Data Rates declared by the customer:

802.11b mode: 1 Mbps

802.11b mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 0 and Core 1 correspond to antenna 1 and antenna 2 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

Duty cycle and 6dB DTS bandwidth/occupied channel bandwidth tests, only SISO mode and one chain were tested since the duty cycle and bandwidth does not change depending on chains used.

Conducted bandedge and spurious emissions tests were performed with SISO mode, as this port was found to have the worst case in terms of power settings amongst all supported possible SISO & MIMO port combinations.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations.



### 5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)	Directional gain (dBi)
1	2412-2462	Monopole	1.79	4.8
2	2412-2462	Monopole	1.79	

Note: Directional gain=  $G_{ANT} + 10 \log(N_{ANT})$   
 $G_{ANT}$ : Average of the Antenna Gain  
 $N_{ANT}$ : Antenna numbers

Note: The value of the antenna gain was declared by customer.

IEEE Std. 802.11	Transmit and Receive Mode	Description
b	1TX, 1RX	Antenna 1, 2 can be used as transmitting/receiving antenna.
g	1TX, 1RX	Antenna 1, 2 can be used as transmitting/receiving antenna.
n HT20	2TX, 2RX	Antenna 1, 2 can be used as transmitting/receiving antenna.
n HT40	2TX, 2RX	Antenna 1, 2 can be used as transmitting/receiving antenna.

Note: Only 802.11n HT20/HT40 support MIMO mode

## 5.8. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	laptop	Lenovo	TP00094A	/
2	UART	/	/	/
3	RJ45 Terminal load	/	/	/
4	micro SD card	Kingston	/	32GB

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0 m	/
2	RJ 45 Cable	/	/	1.0 m	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	Switching Power Supply	/	ADS-12AM-12 12012EPCU	Input: AC100~240V,50/60Hz,0.3A Output: 12Vdc,1A, 12W

### TEST SETUP

The EUT can work in engineering mode with a software through a laptop.

### SETUP DIAGRAM FOR TESTS

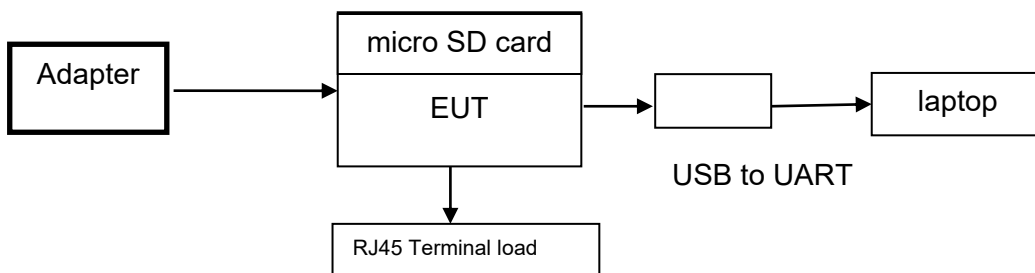



## 6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Nov. 12, 2020	Nov. 11, 2021
Two-Line V-Network	R&S	ENV216	101983	Nov. 12, 2020	Nov. 11, 2021
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Nov. 12, 2020	Nov. 11, 2021
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Nov. 12, 2020	Nov. 11, 2021
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Aug. 11, 2018	Aug. 10, 2021
Preamplifier	HP	8447D	2944A09099	Nov. 12, 2020	Nov. 11, 2021
EMI Measurement Receiver	R&S	ESR26	101377	Nov. 12, 2020	Nov. 11, 2021
Horn Antenna	TDK	HRN-0118	130939	Sept. 17, 2018	Sept. 17, 2021
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Nov. 20, 2020	Nov. 19, 2021
Horn Antenna	Schwarzbeck	BBHA9170	#691	Aug. 11, 2018	Aug. 11, 2021
Preamplifier	TDK	PA-02-2	TRS-307-00003	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	TDK	PA-02-3	TRS-308-00002	Nov. 12, 2020	Nov. 11, 2021
Loop antenna	Schwarzbeck	1519B	00008	Jan.17, 2019	Jan.17,2022
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Nov. 20, 2020	Nov. 19, 2021
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Nov. 12, 2020	Nov. 11, 2021
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Nov. 12, 2020	Nov. 11, 2021



Software			
Description	Manufacturer	Name	Version
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1

Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Nov.20,2020	Nov.19,2021
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Nov.20,2020	Nov.19,2021
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Nov.20,2020	Nov.19,2021
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Nov.20,2020	Nov.19,2021
DC power supply	Keysight	E3642A	MY55159130	Nov.24,2020	Nov.23,2021
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		2.6.77.0518	

Other Instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Nov. 20, 2020	Nov. 19, 2021
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Nov. 20, 2020	Nov. 19, 2021

## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only

#### PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

#### TEST SETUP

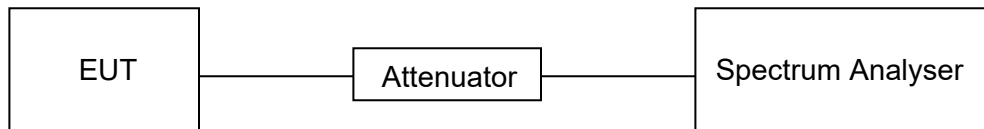

#### TEST ENVIRONMENT

Temperature	25.8 °C	Relative Humidity	57.7 %
Atmosphere Pressure	101 kPa	Test Voltage	AC120 V,60 Hz

#### RESULTS

Please refer to appendix G.





## 7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:


Center Frequency	The center frequency of the channel under test
Frequency Span	Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



**TEST SETUP**

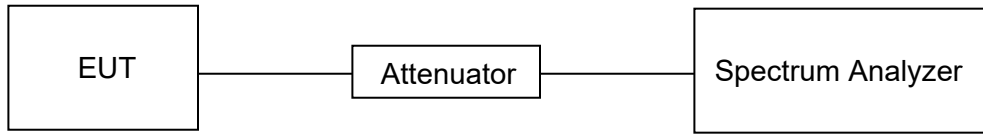

**TEST ENVIRONMENT**

Temperature	25.8 °C	Relative Humidity	57.7 %
Atmosphere Pressure	101 kPa	Test Voltage	AC120 V,60 Hz

**RESULTS**

Please refer to appendix A & B.

### 7.3. CONDUCTED OUTPUT POWER


#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	Output Power	1 watt or 30 dBm	2400-2483.5

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth). Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

#### TEST SETUP

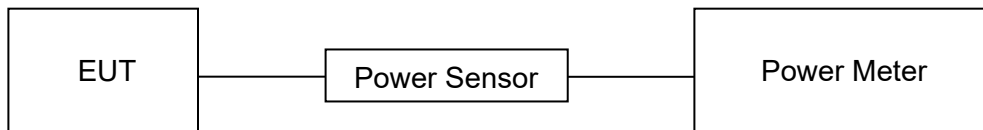

#### TEST ENVIRONMENT

Temperature	25.8 °C	Relative Humidity	57.7 %
Atmosphere Pressure	101 kPa	Test Voltage	AC120 V,60 Hz

#### RESULTS

Please refer to appendix C.

## 7.4. POWER SPECTRAL DENSITY

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

### TEST PROCEDURE


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST SETUP

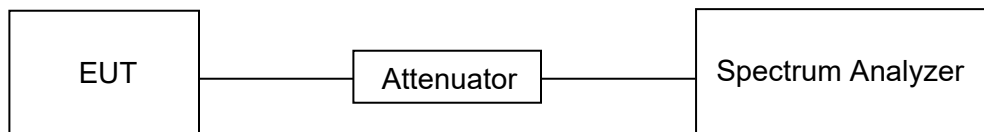

### TEST ENVIRONMENT

Temperature	25.8 °C	Relative Humidity	57.7 %
Atmosphere Pressure	101 kPa	Test Voltage	AC120 V,60 Hz

### RESULTS

Please refer to appendix D.



## 7.5. CONDUCTED BANDEGE AND SPURIOUS EMISSIONS

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

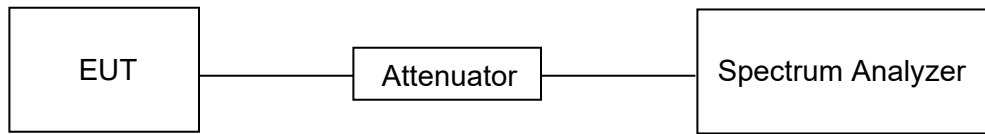**TEST SETUP****TEST ENVIRONMENT**

Temperature	25.8 °C	Relative Humidity	57.7 %
Atmosphere Pressure	101 kPa	Test Voltage	AC120 V,60 Hz

**RESULTS**

Please refer to appendix E & F.



## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

**TEST SETUP AND PROCEDURE**

Below 30 MHz

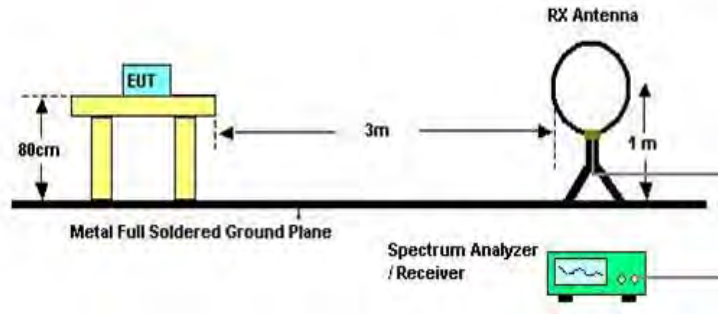


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.



Below 1 GHz and above 30 MHz

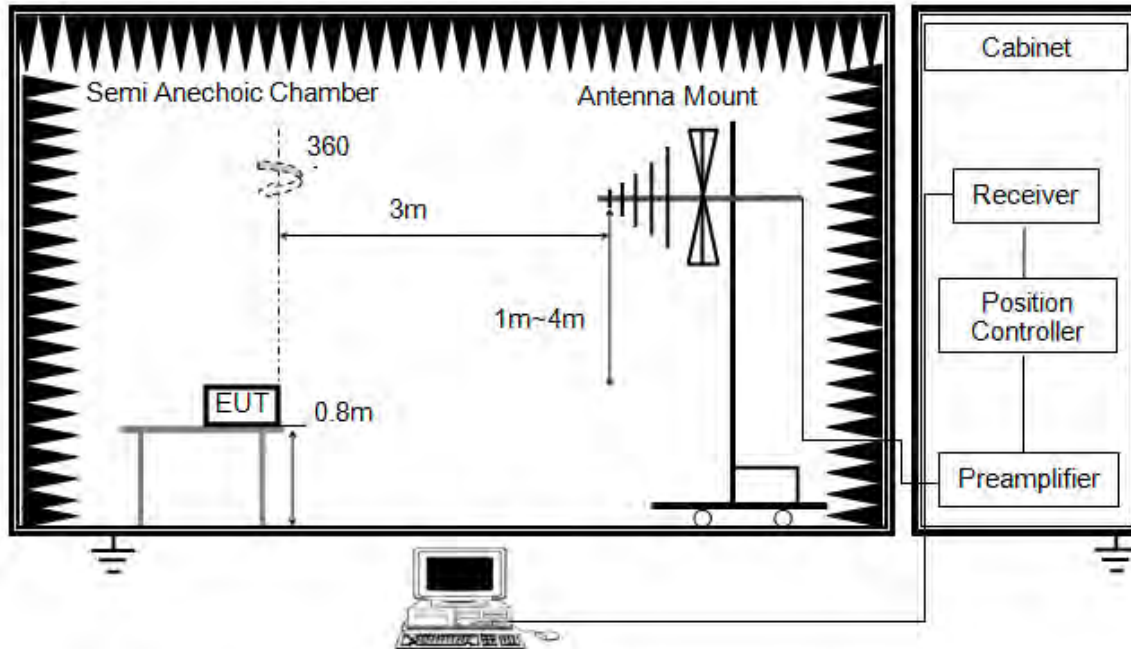


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

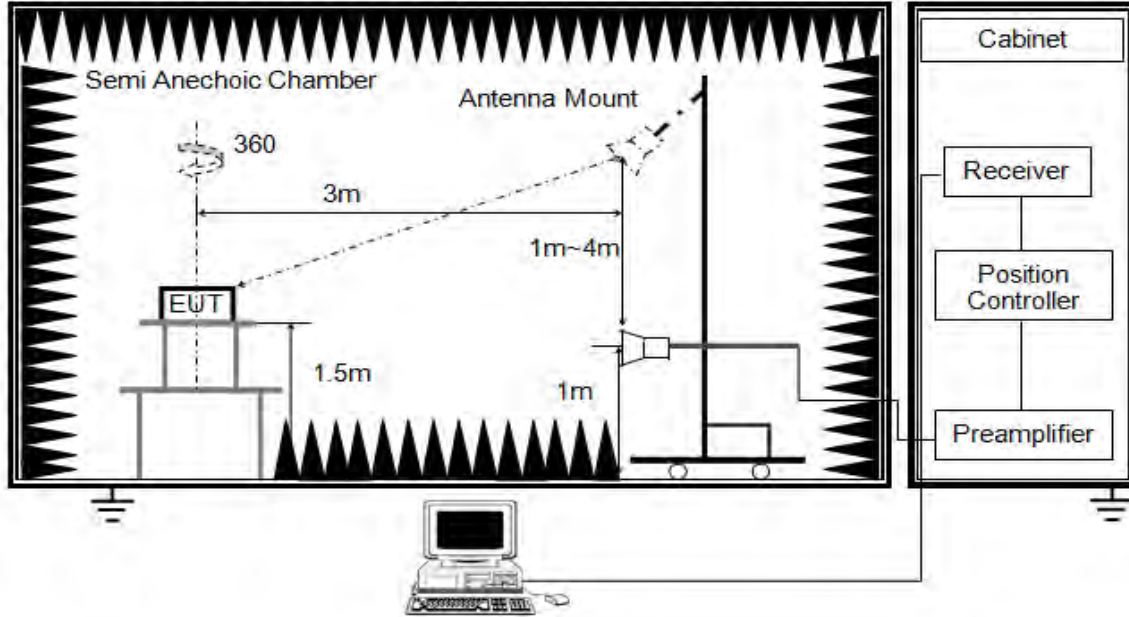


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

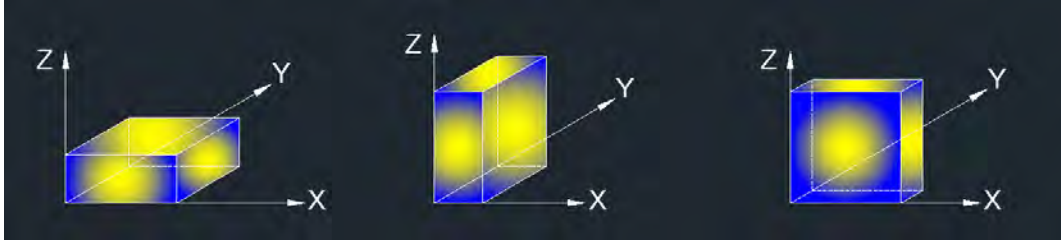

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

### **TEST ENVIRONMENT**

Temperature	23.5 °C	Relative Humidity	62 %
Atmosphere Pressure	101 kPa	Test Voltage	AC120 V,60 Hz

### **RESULTS**




## 8.1. RESTRICTED BANDEDGE

### 8.1.1. 802.11b SISO MODE

#### ANTENNA 1 TEST RESULTS (WORST CASE)

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

#### PEAK

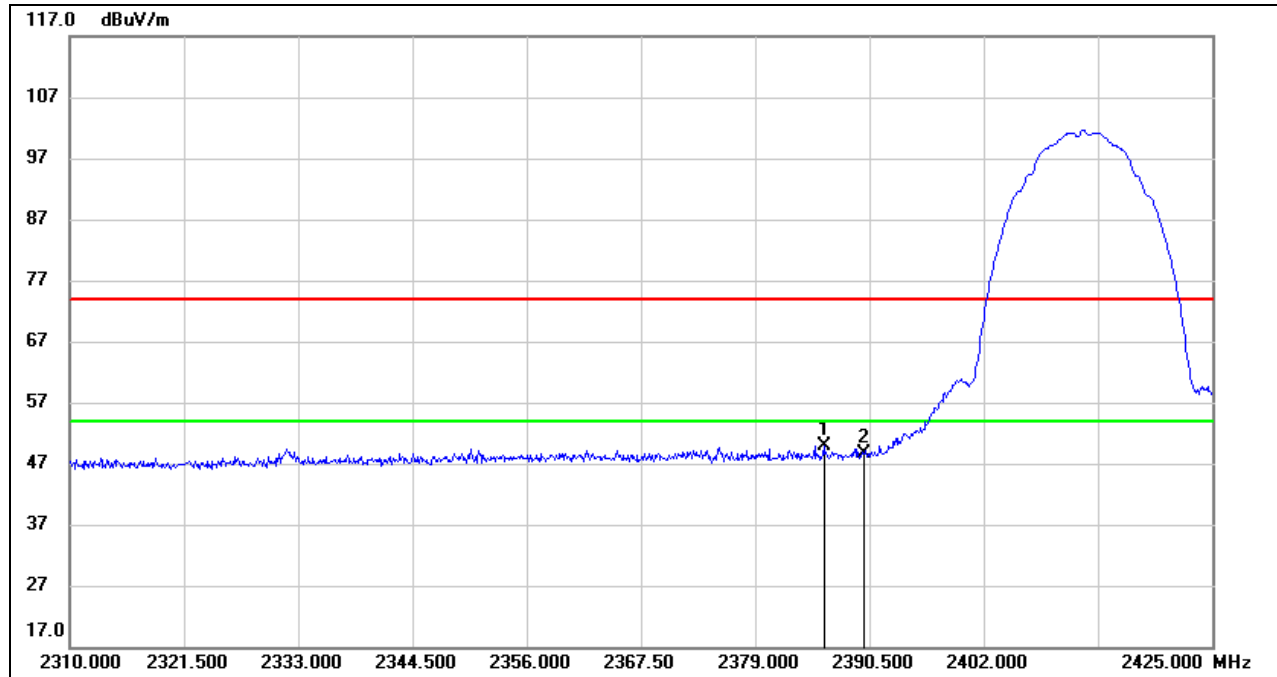


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.900	16.65	33.32	49.97	74.00	-24.03	peak
2	2390.000	15.27	33.35	48.62	74.00	-25.38	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (LOW CHANNEL, Vertical)**

**PEAK**

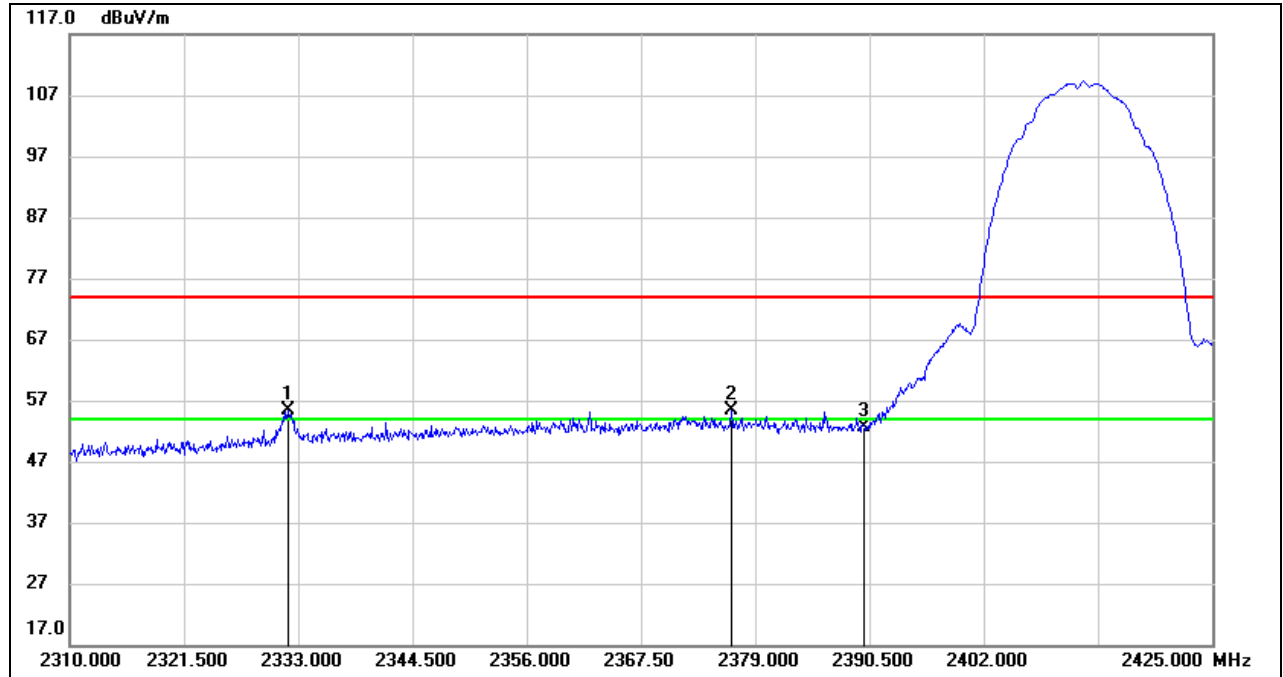


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2331.965	22.36	32.91	55.27	74.00	-18.73	peak
2	2376.585	22.23	33.25	55.48	74.00	-18.52	peak
3	2390.000	19.31	33.35	52.66	74.00	-21.34	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

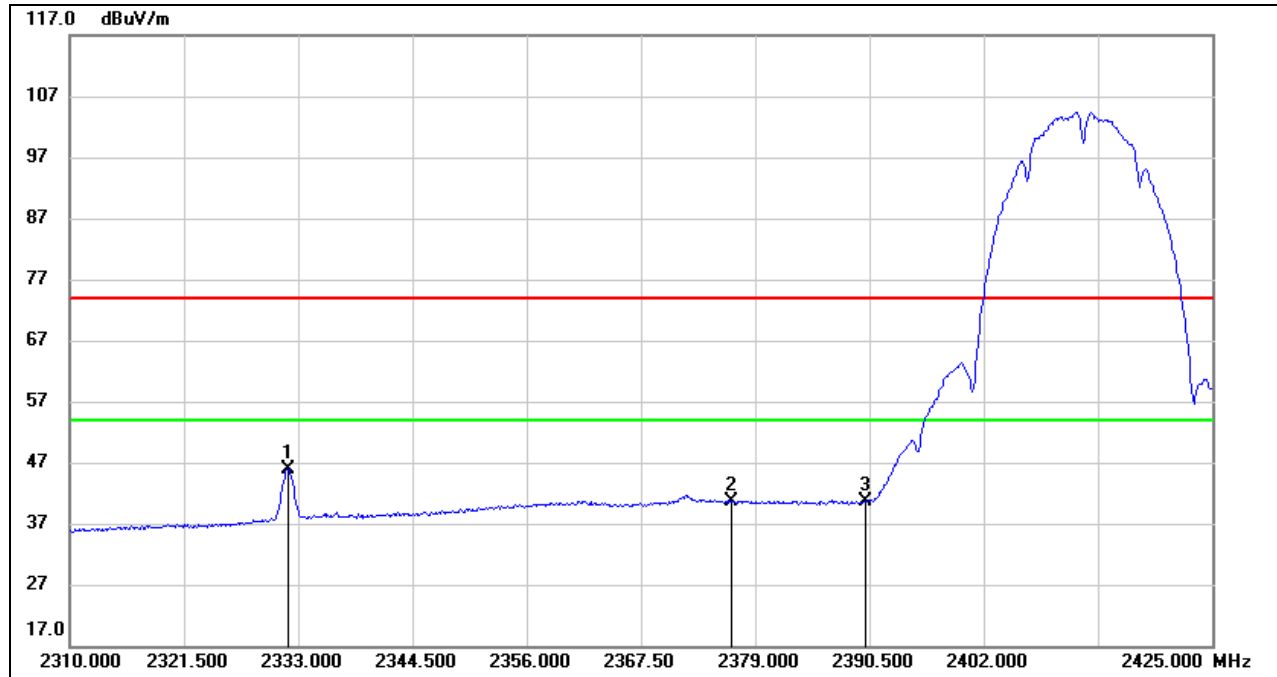


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2331.965	13.02	32.91	45.93	54.00	-8.07	AVG
2	2376.585	7.27	33.25	40.52	54.00	-13.48	AVG
3	2390.000	7.34	33.35	40.69	54.00	-13.31	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, Vertical)  
PEAK**

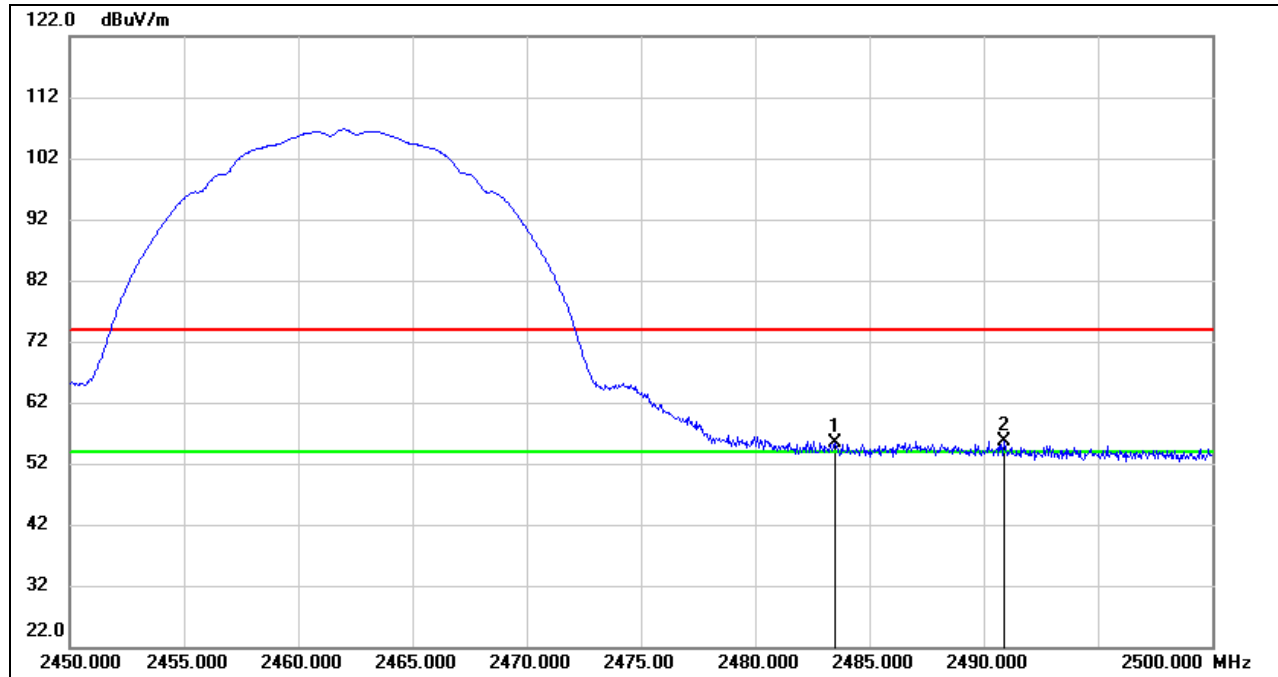


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	21.59	33.71	55.30	74.00	-18.70	peak
2	2490.900	21.97	33.73	55.70	74.00	-18.30	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

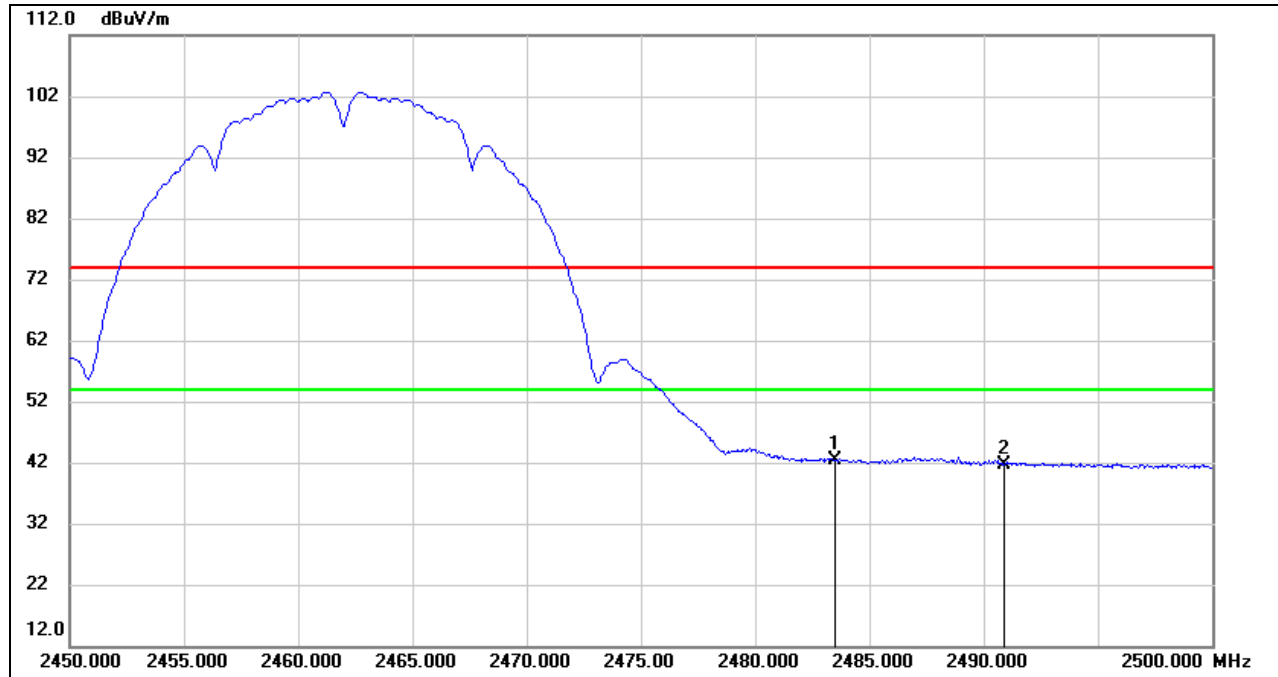

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	8.78	33.71	42.49	54.00	-11.51	AVG
2	2490.900	7.90	33.73	41.63	54.00	-12.37	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 4. For the transmitting duration, please refer to clause 7.1.  
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.  
 Note: Both antennas have been tested, only the worst data was recorded in the report.




### 8.1.2. 802.11g SISO MODE

#### ANTENNA 1 TEST RESULTS (WORST CASE)

#### RESTRICTED BANDEDGE (LOW CHANNEL, Vertical)

#### PEAK

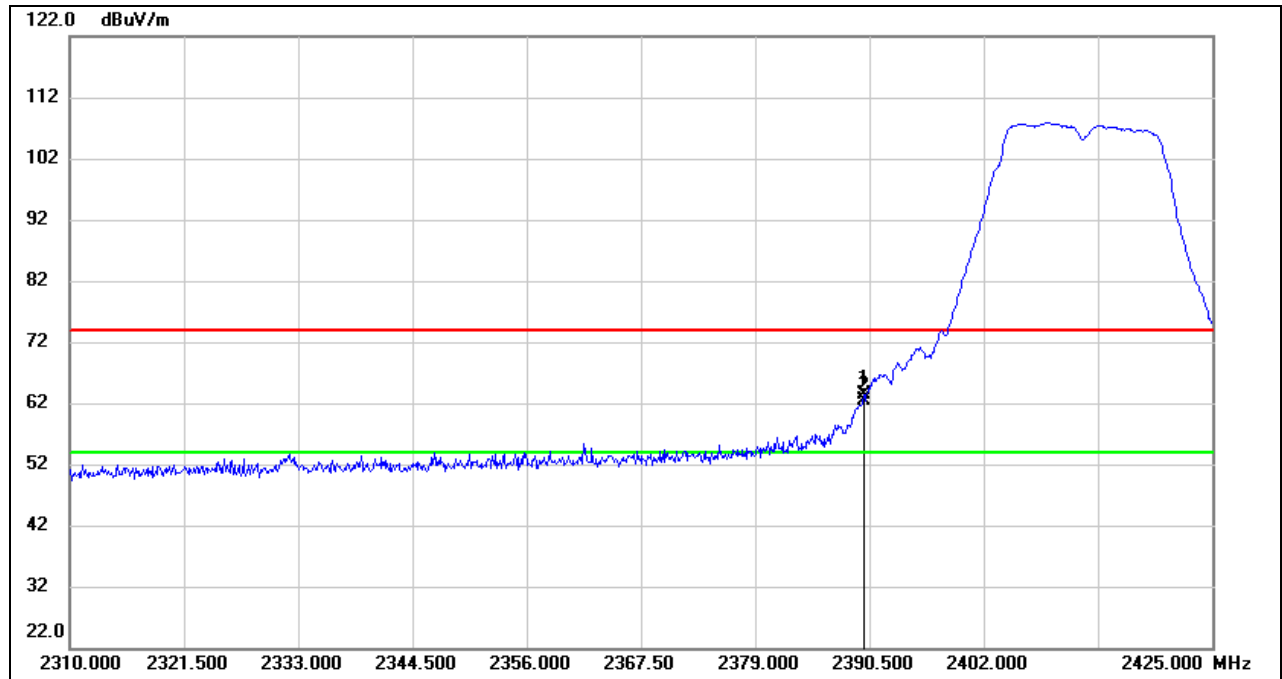

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.925	29.98	33.35	63.33	74.00	-10.67	peak
2	2390.000	29.03	33.35	62.38	74.00	-11.62	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

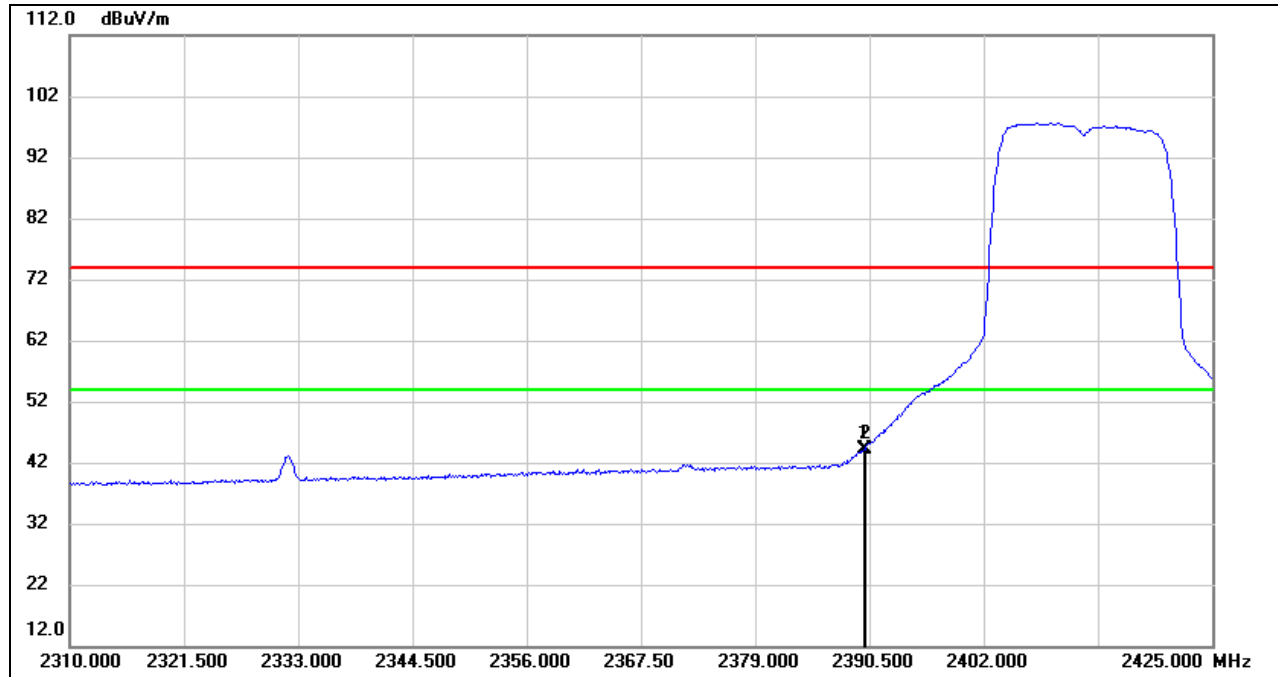


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.925	10.75	33.35	44.10	54.00	-9.90	AVG
2	2390.000	10.84	33.35	44.19	54.00	-9.81	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




**RESTRICTED BANDEDGE (HIGH CHANNEL, Vertical)**  
**PEAK**

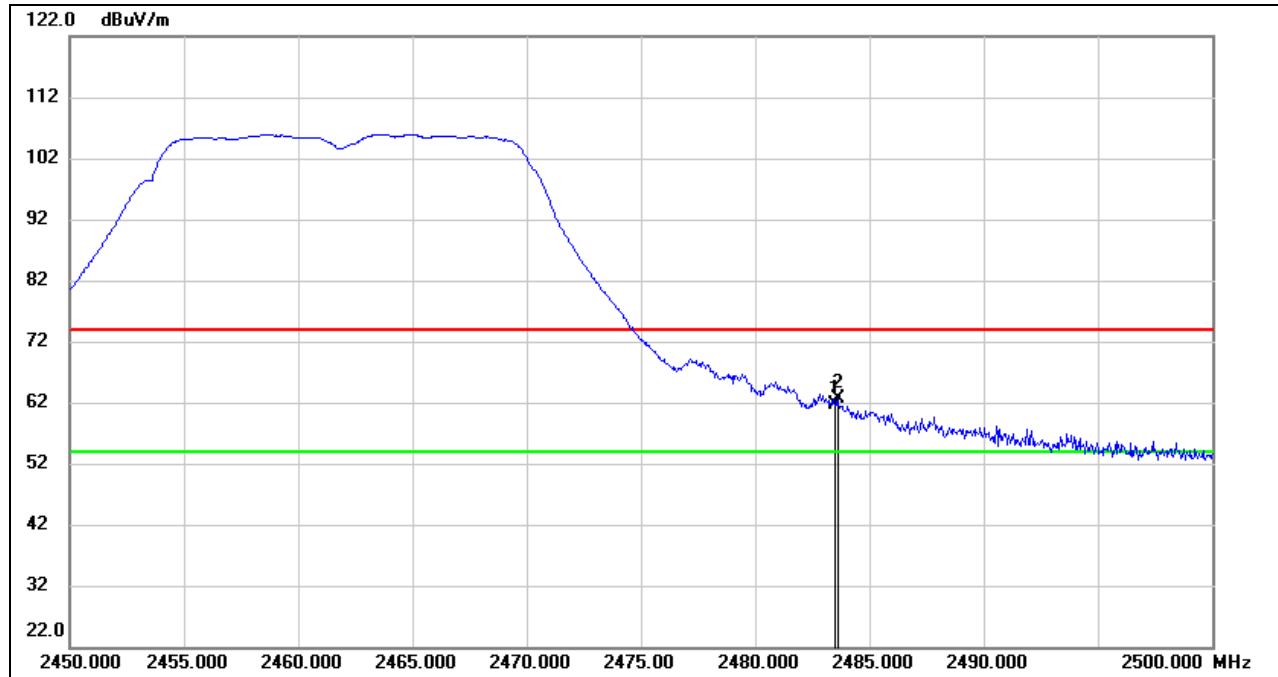

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	27.92	33.71	61.63	74.00	-12.37	peak
2	2483.600	28.98	33.71	62.69	74.00	-11.31	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

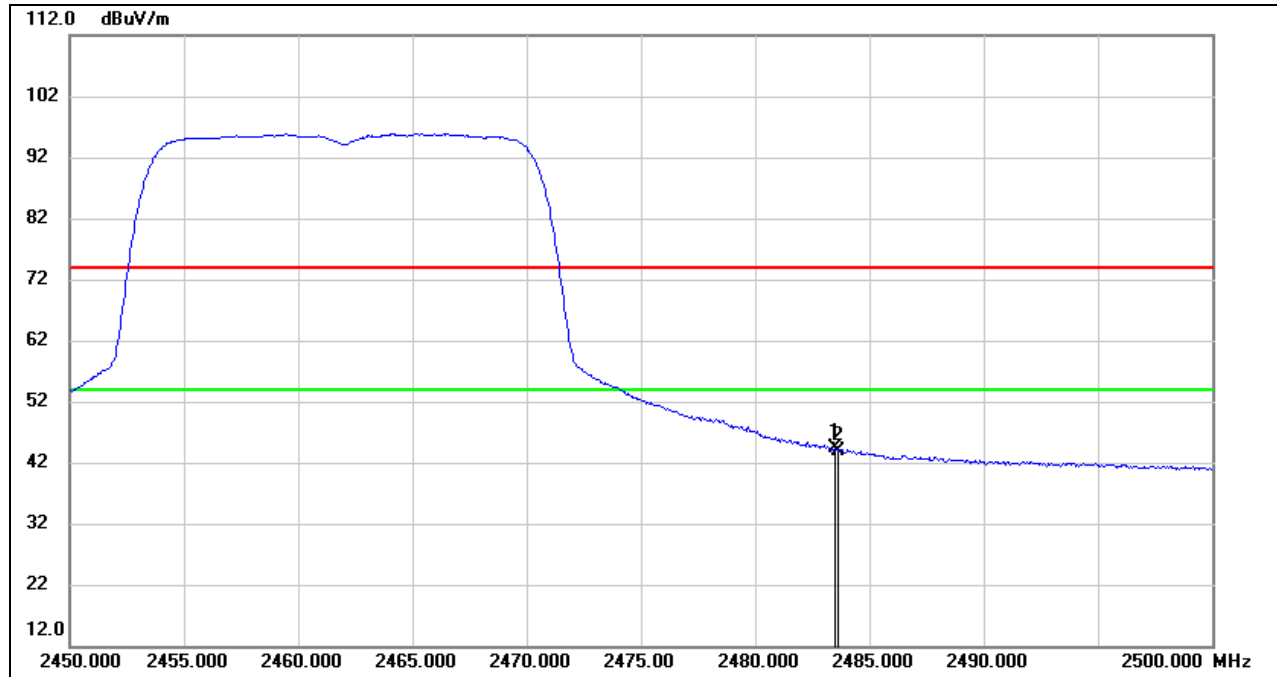

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	10.61	33.71	44.32	54.00	-9.68	AVG
2	2483.600	10.29	33.71	44.00	54.00	-10.00	AVG


- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 4. For the transmitting duration, please refer to clause 7.1.  
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.  
 Note: Both antennas have been tested, only the worst data was recorded in the report.

**8.1.3. 802.11n HT20 MIMO MODE**

**RESTRICTED BANDEDGE (LOW CHANNEL, Vertical)**

**PEAK**

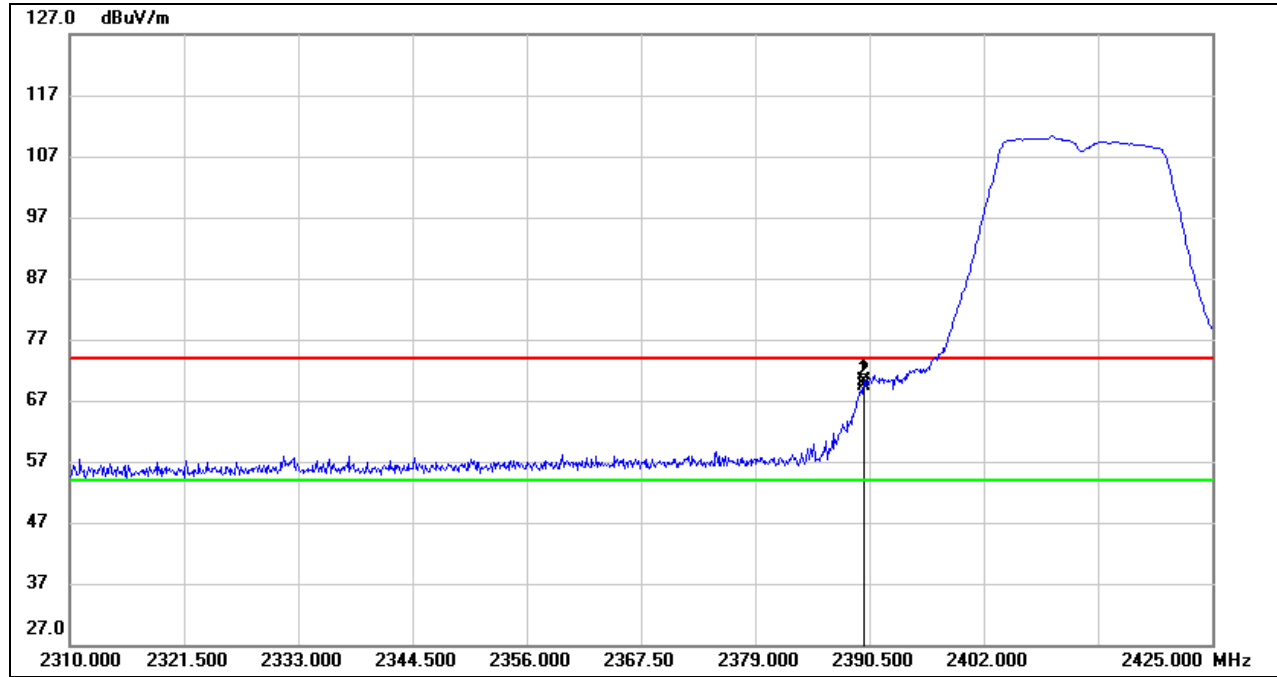


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.925	36.69	33.35	70.04	74.00	-3.96	peak
2	2390.000	36.11	33.35	69.46	74.00	-4.54	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

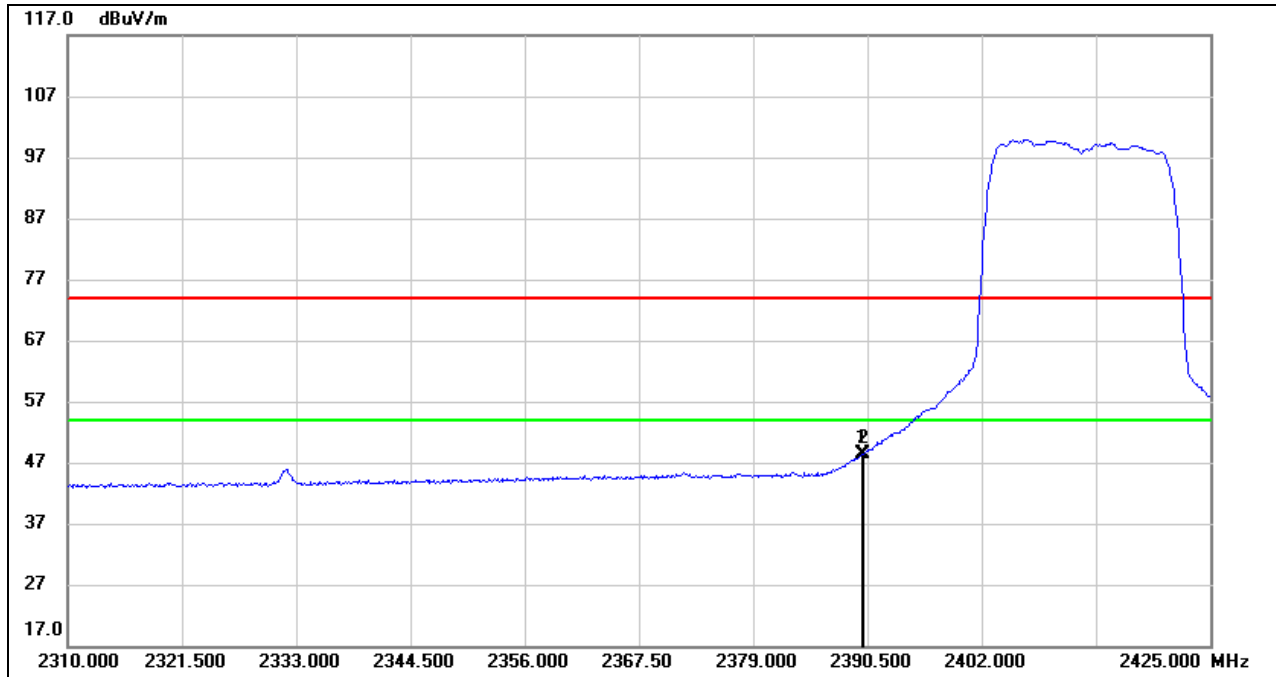


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.925	15.01	33.35	48.36	54.00	-5.64	AVG
2	2390.000	15.08	33.35	48.43	54.00	-5.57	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, Vertical)  
PEAK**

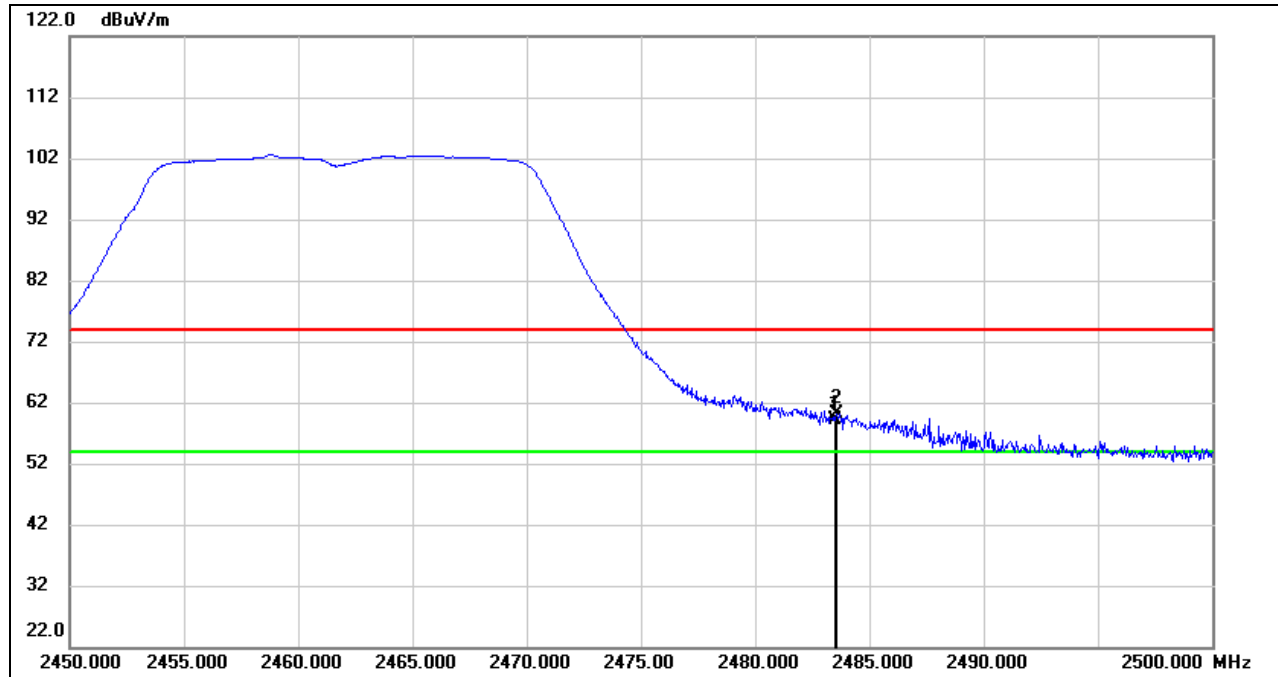


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	25.46	33.71	59.17	74.00	-14.83	peak
2	2483.550	26.41	33.71	60.12	74.00	-13.88	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

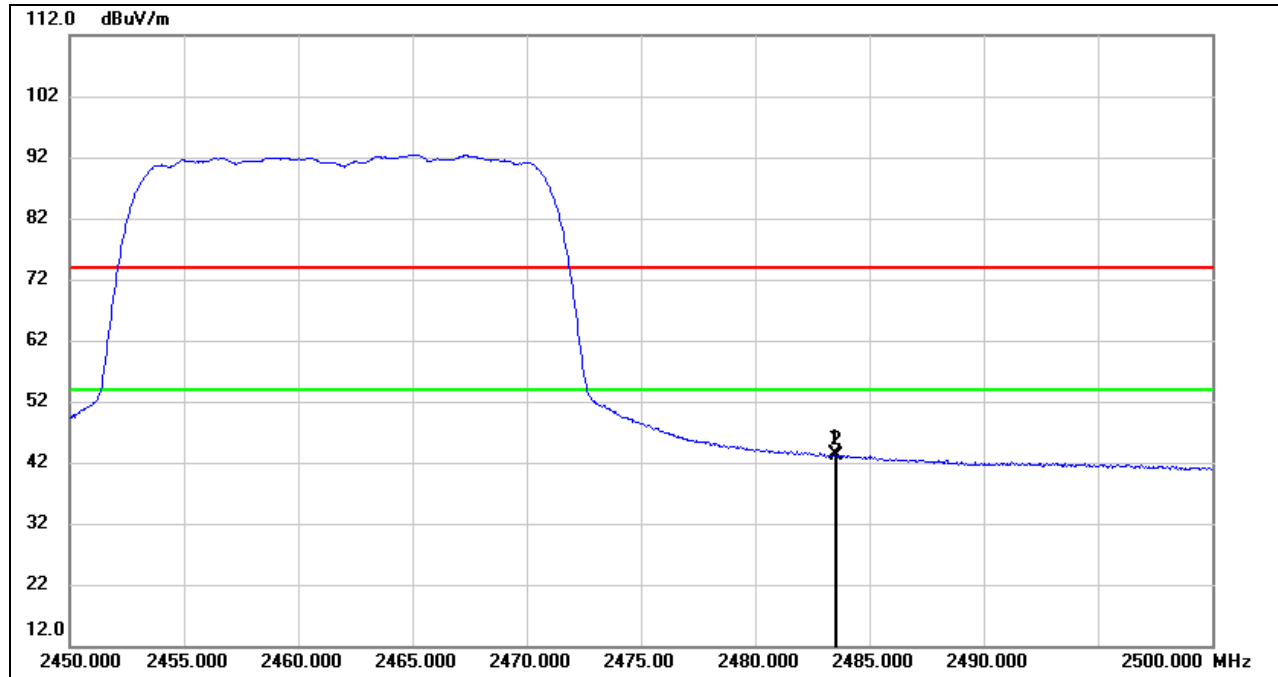

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	9.75	33.71	43.46	54.00	-10.54	AVG
2	2483.550	9.34	33.71	43.05	54.00	-10.95	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 4. For the transmitting duration, please refer to clause 7.1.  
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.  
 Note: Both antennas have been tested, only the worst data was recorded in the report.






8.1.4. 802.11n HT40 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, Vertical)

PEAK

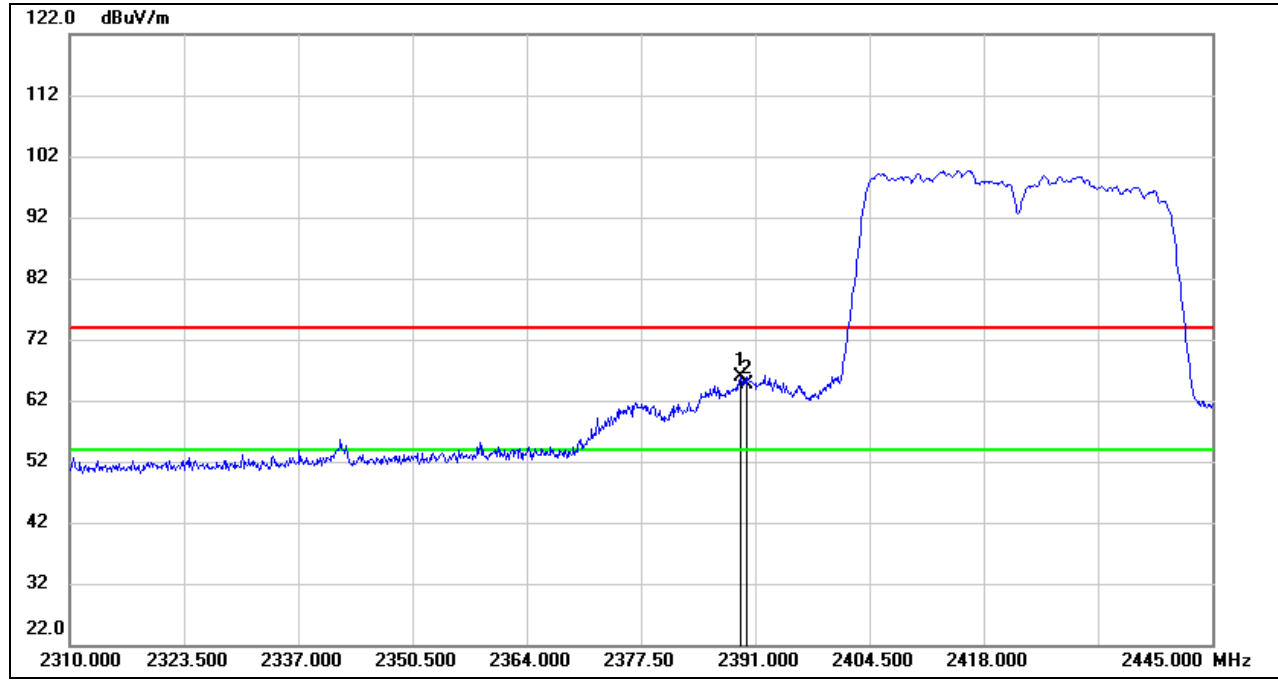


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.245	32.48	33.35	65.83	74.00	-8.17	peak
2	2390.000	31.24	33.35	64.59	74.00	-9.41	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

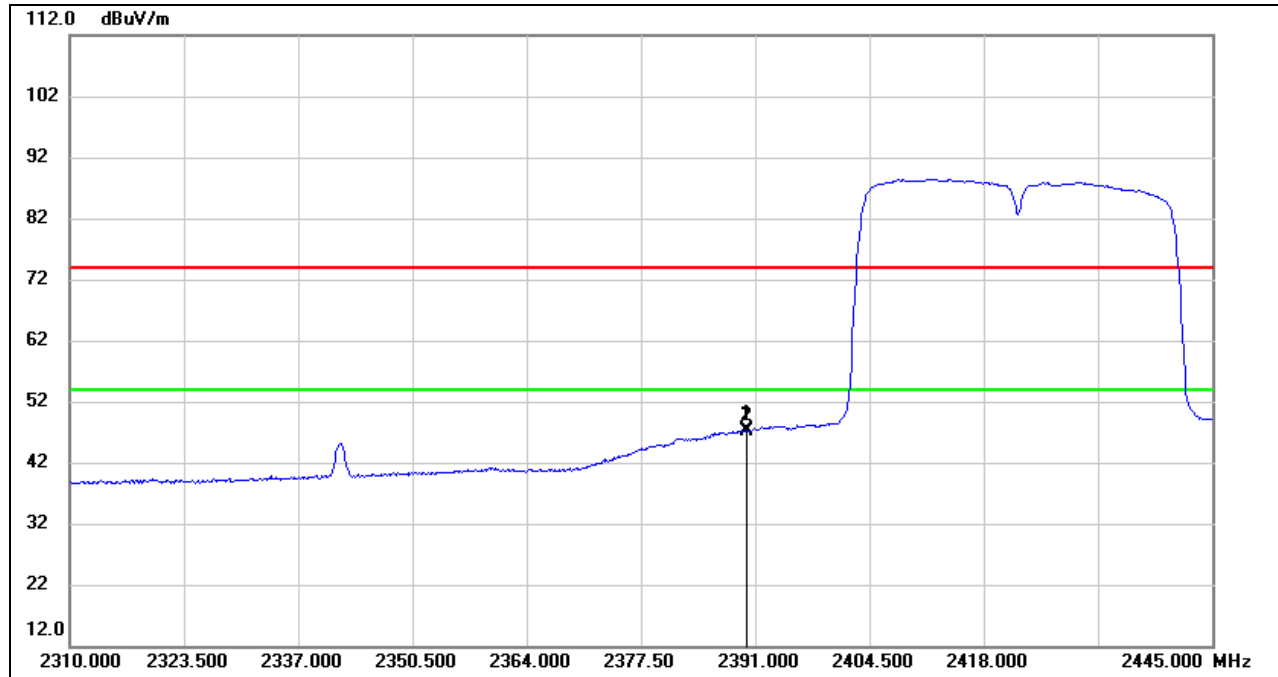


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.925	13.91	33.35	47.26	54.00	-6.74	AVG
2	2390.000	13.70	33.35	47.05	54.00	-6.95	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, Vertical)**  
**PEAK**

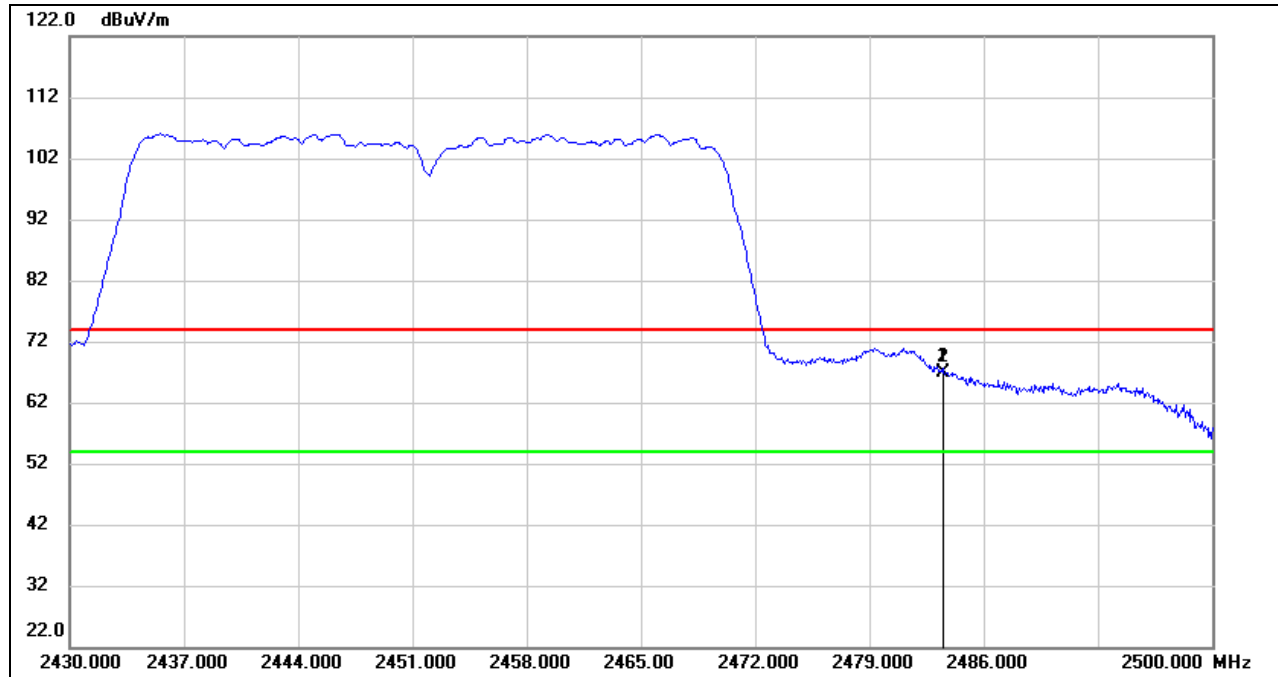


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	33.27	33.71	66.98	74.00	-7.02	peak
2	2483.550	33.27	33.71	66.98	74.00	-7.02	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

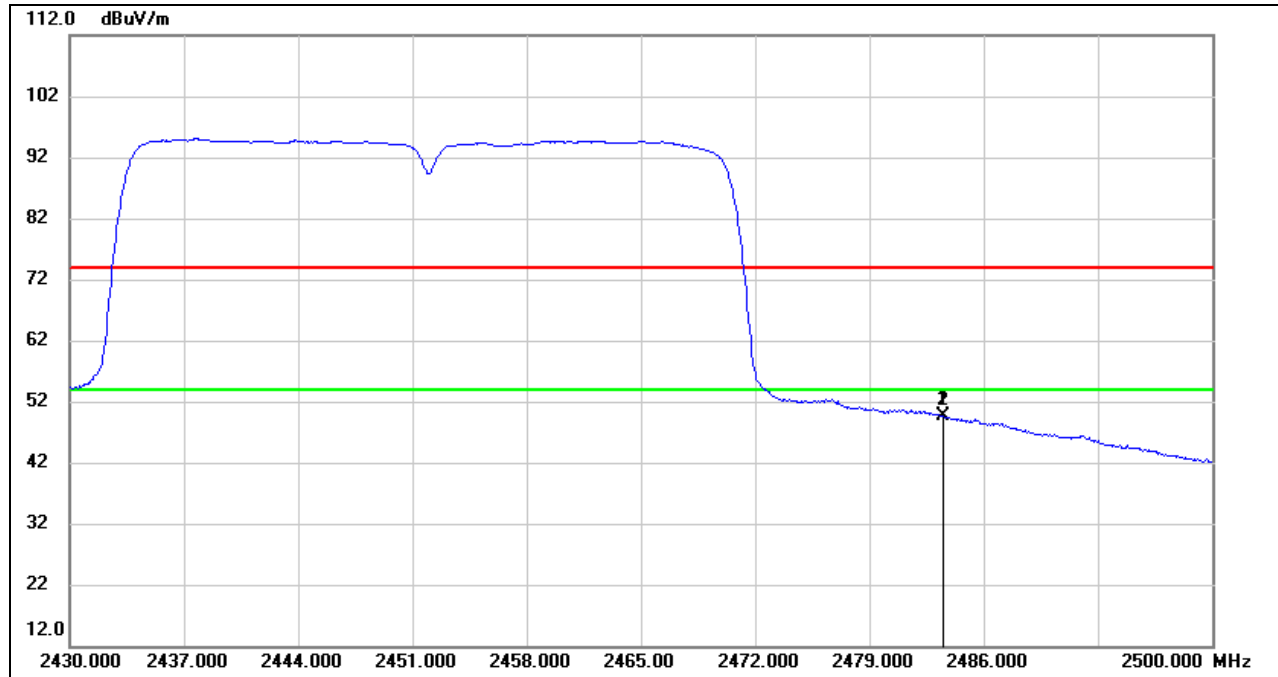

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.94	33.71	49.65	54.00	-4.35	AVG
2	2483.550	15.94	33.71	49.65	54.00	-4.35	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 4. For the transmitting duration, please refer to clause 7.1.  
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.  
 Note: Both antennas have been tested, only the worst data was recorded in the report.



## 8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

### 8.2.1. 802.11g SISO MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

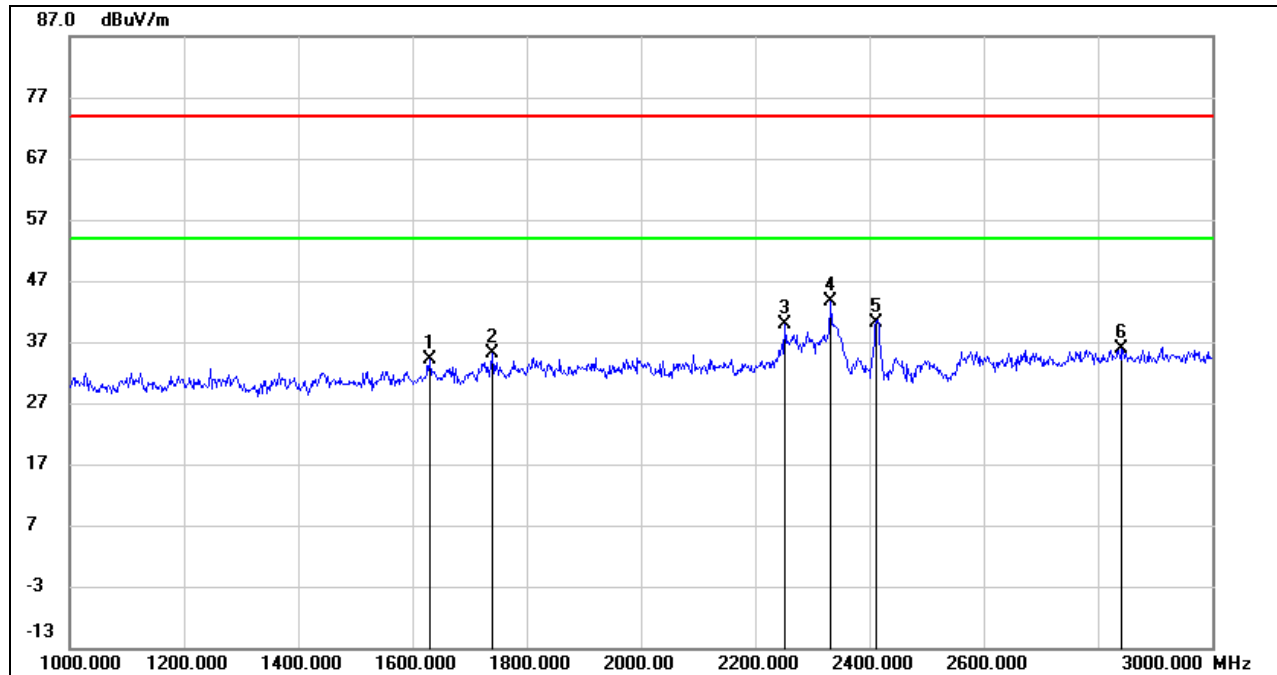

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1630.000	45.35	-11.33	34.02	74.00	-39.98	peak
2	1740.000	45.52	-10.51	35.01	74.00	-38.99	peak
3	2252.000	48.83	-8.88	39.95	74.00	-34.05	peak
4	2332.000	52.16	-8.61	43.55	74.00	-30.45	peak
5	2412.000	48.59	-8.37	40.22	/	/	fundamental
6	2842.000	42.13	-6.35	35.78	74.00	-38.22	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

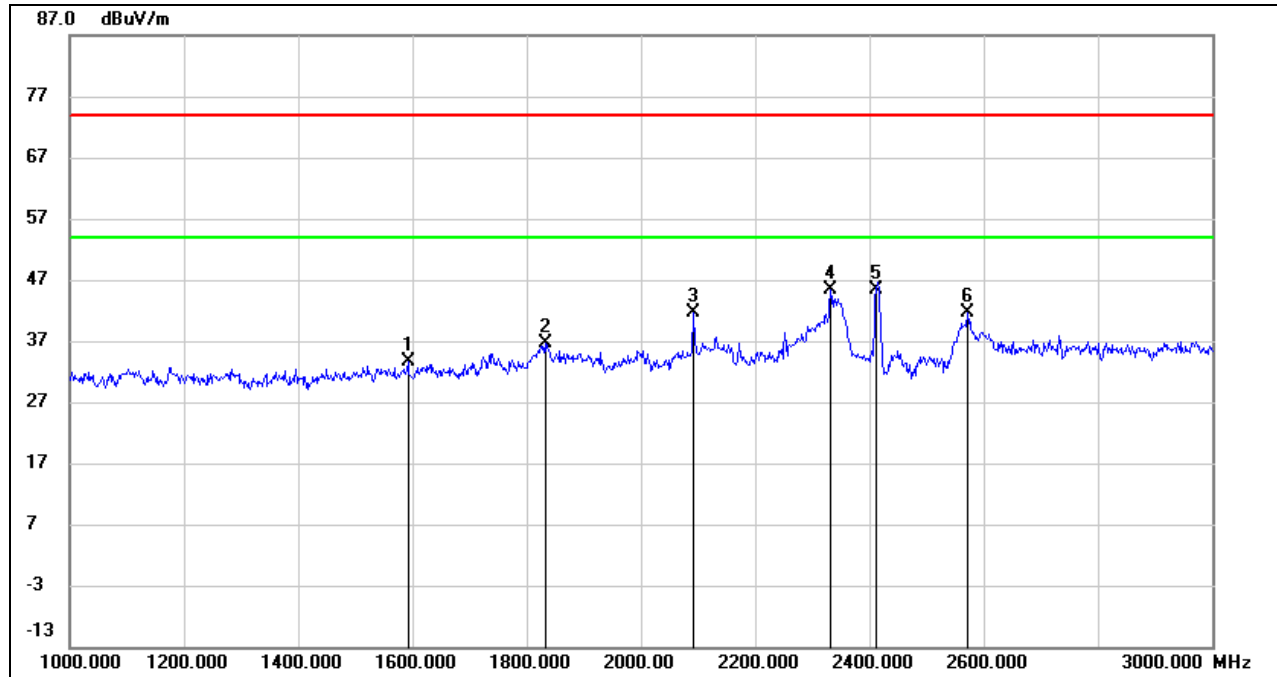**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1592.000	45.17	-11.61	33.56	74.00	-40.44	peak
2	1832.000	46.59	-10.07	36.52	74.00	-37.48	peak
3	2092.000	51.17	-9.66	41.51	74.00	-32.49	peak
4	2332.000	54.02	-8.61	45.41	74.00	-28.59	peak
5	2412.000	53.67	-8.37	45.30	/	/	fundamental
6	2572.000	49.55	-7.96	41.59	74.00	-32.41	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

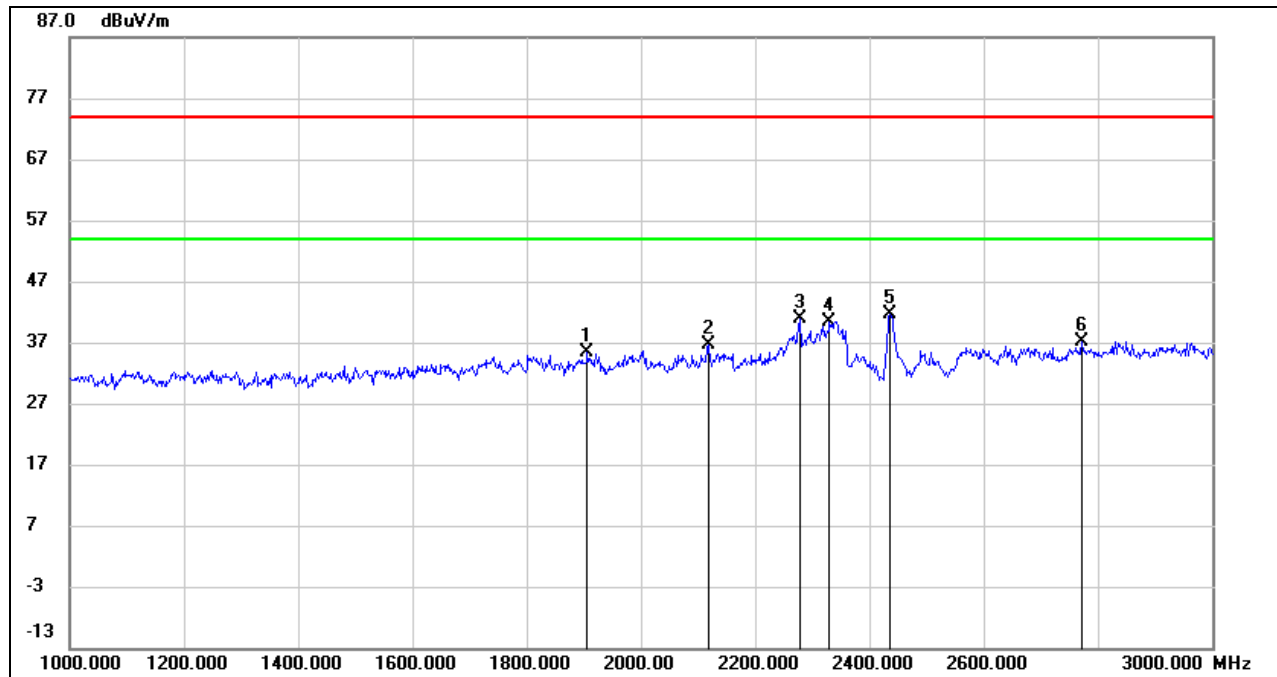

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1906.000	45.47	-10.13	35.34	74.00	-38.66	peak
2	2118.000	46.09	-9.52	36.57	74.00	-37.43	peak
3	2278.000	49.70	-8.79	40.91	74.00	-33.09	peak
4	2330.000	49.06	-8.63	40.43	74.00	-33.57	peak
5	2437.000	50.04	-8.33	41.71	/	/	fundamental
6	2772.000	43.94	-6.74	37.20	74.00	-36.80	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

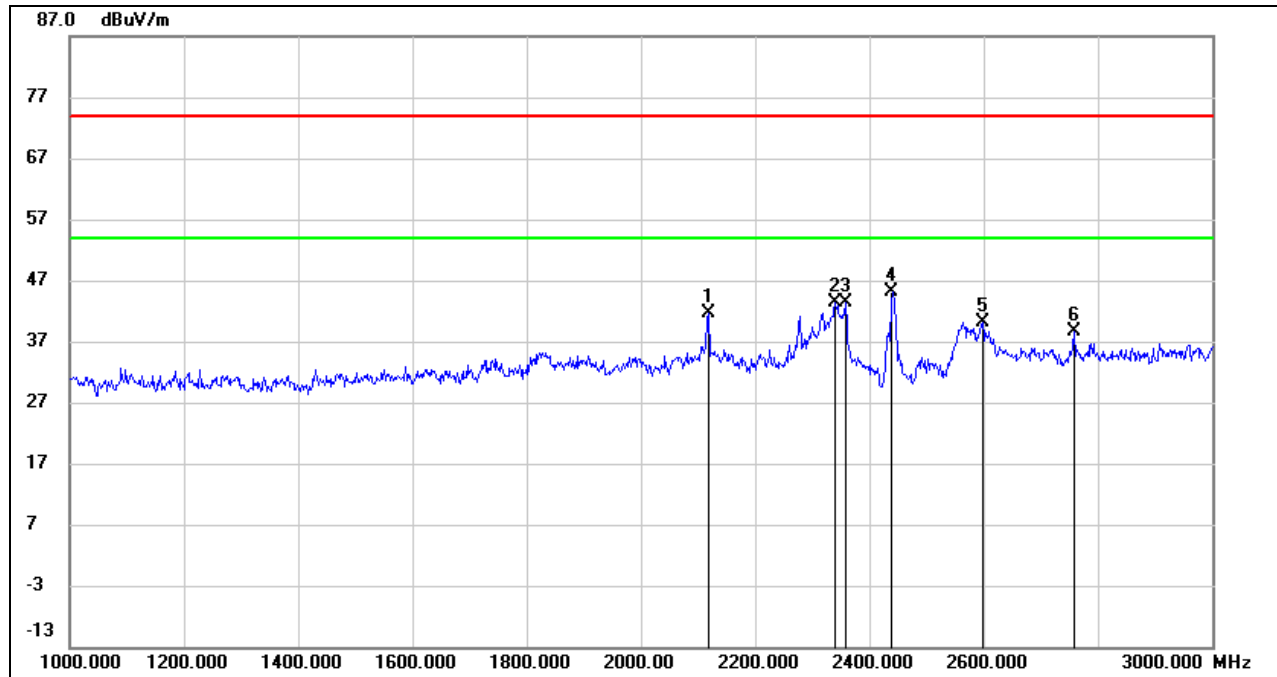**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2118.000	51.24	-9.52	41.72	74.00	-32.28	peak
2	2340.000	51.95	-8.59	43.36	74.00	-30.64	peak
3	2358.000	51.95	-8.54	43.41	74.00	-30.59	peak
4	2437.000	53.48	-8.33	45.15	/	/	fundamental
5	2598.000	48.01	-7.88	40.13	74.00	-33.87	peak
6	2758.000	45.36	-6.82	38.54	74.00	-35.46	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

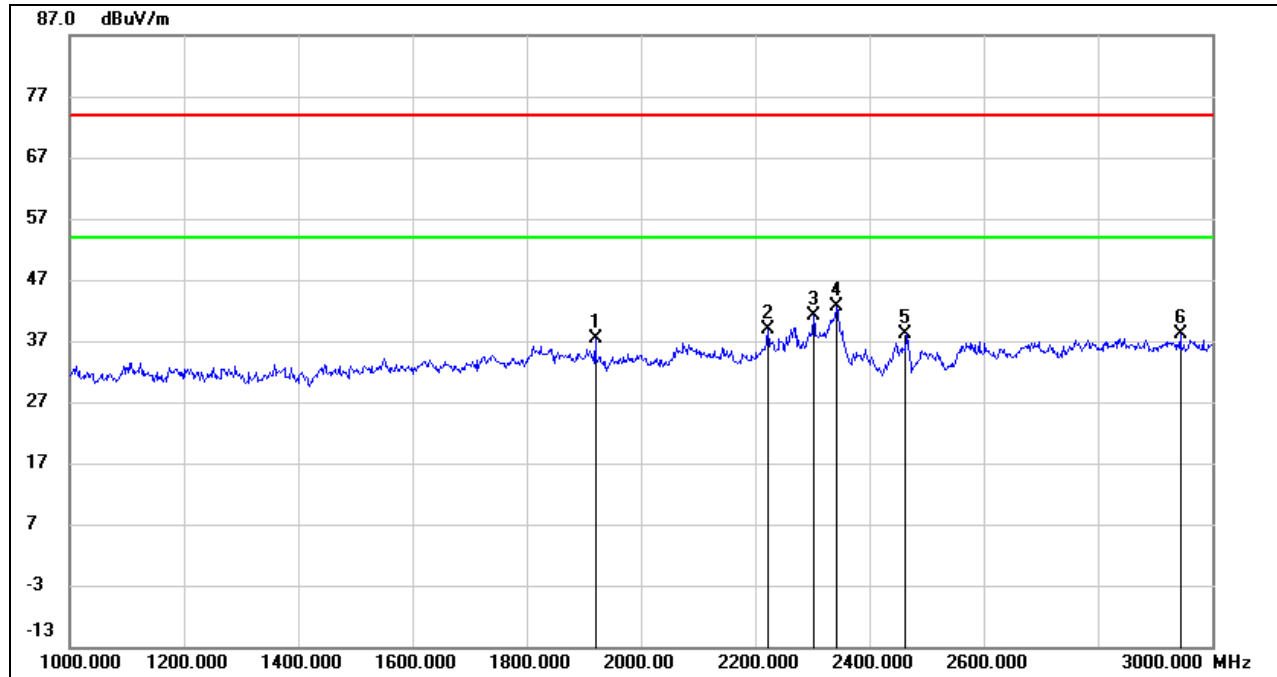

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1920.000	47.46	-10.13	37.33	74.00	-36.67	peak
2	2222.000	47.93	-8.98	38.95	74.00	-35.05	peak
3	2302.000	49.91	-8.72	41.19	74.00	-32.81	peak
4	2342.000	51.24	-8.58	42.66	74.00	-31.34	peak
5	2462.000	46.42	-8.29	38.13	/	/	fundamental
6	2944.000	43.86	-5.85	38.01	74.00	-35.99	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

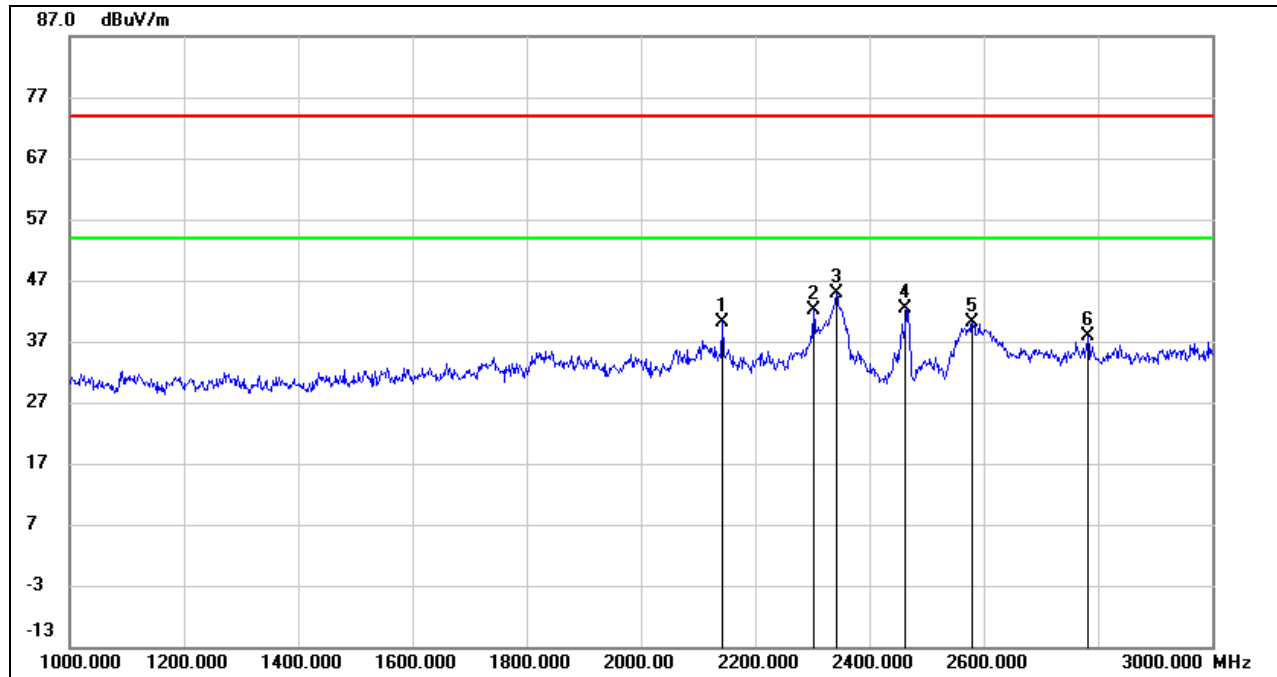**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2142.000	49.46	-9.37	40.09	74.00	-33.91	peak
2	2302.000	50.97	-8.72	42.25	74.00	-31.75	peak
3	2342.000	53.42	-8.58	44.84	74.00	-29.16	peak
4	2462.000	50.63	-8.29	42.34	/	/	fundamental
5	2580.000	48.12	-7.93	40.19	74.00	-33.81	peak
6	2782.000	44.63	-6.67	37.96	74.00	-36.04	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

### 8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

#### 8.3.1. 802.11b SISO MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

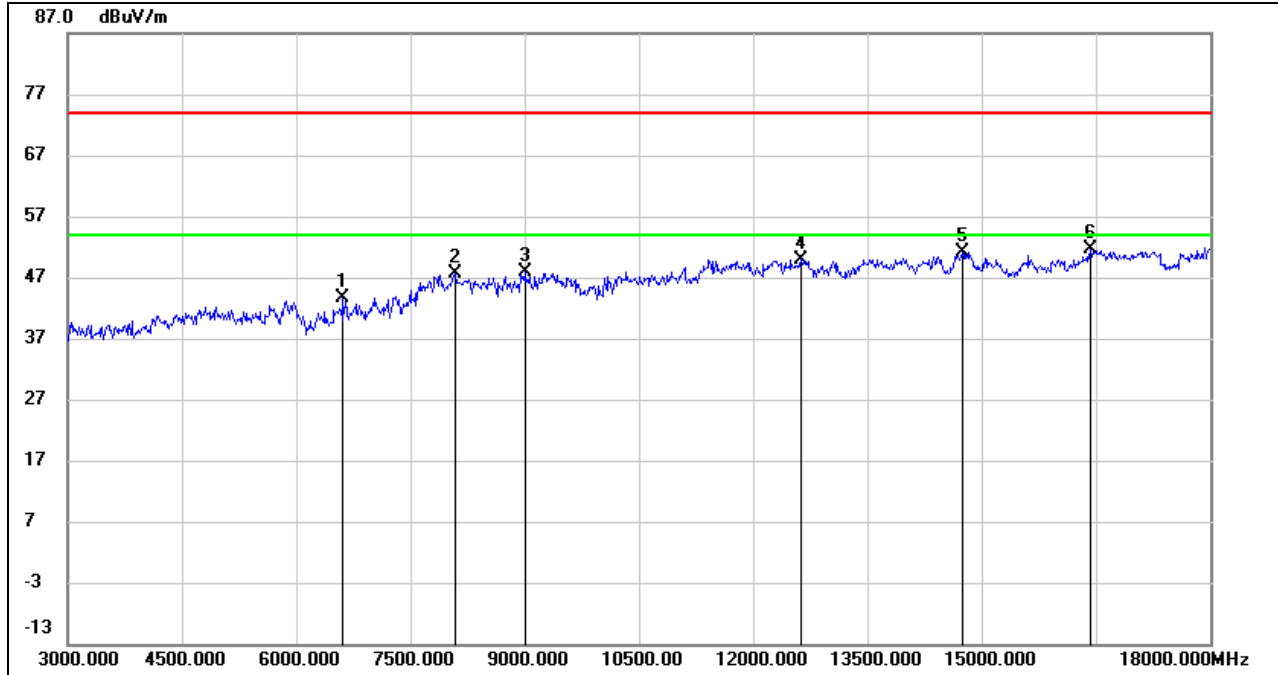


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6615.000	37.61	5.95	43.56	74.00	-30.44	peak
2	8085.000	37.65	9.94	47.59	74.00	-26.41	peak
3	9000.000	36.57	11.27	47.84	74.00	-26.16	peak
4	12630.000	34.28	15.72	50.00	74.00	-24.00	peak
5	14745.000	33.36	17.84	51.20	74.00	-22.80	peak
6	16425.000	31.86	19.68	51.54	74.00	-22.46	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

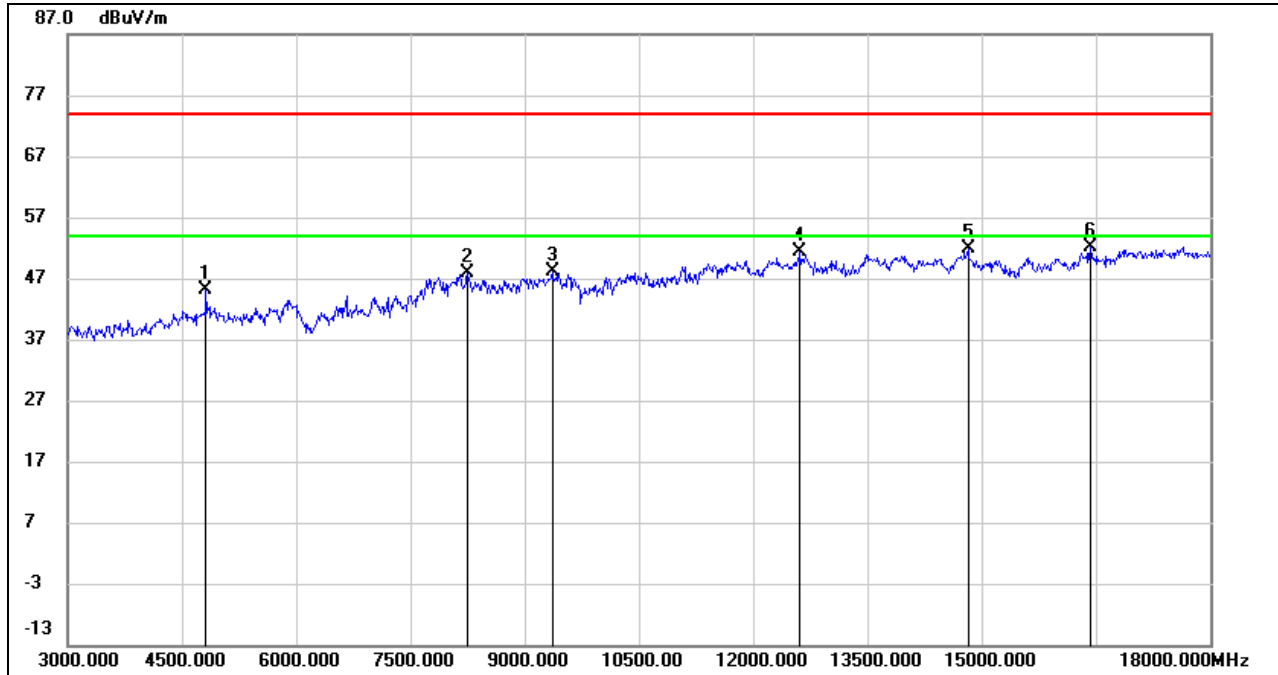


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	43.79	1.38	45.17	74.00	-28.83	peak
2	8250.000	38.11	9.75	47.86	74.00	-26.14	peak
3	9360.000	37.28	10.75	48.03	74.00	-25.97	peak
4	12615.000	35.59	15.75	51.34	74.00	-22.66	peak
5	14820.000	33.99	17.91	51.90	74.00	-22.10	peak
6	16425.000	32.34	19.68	52.02	74.00	-21.98	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

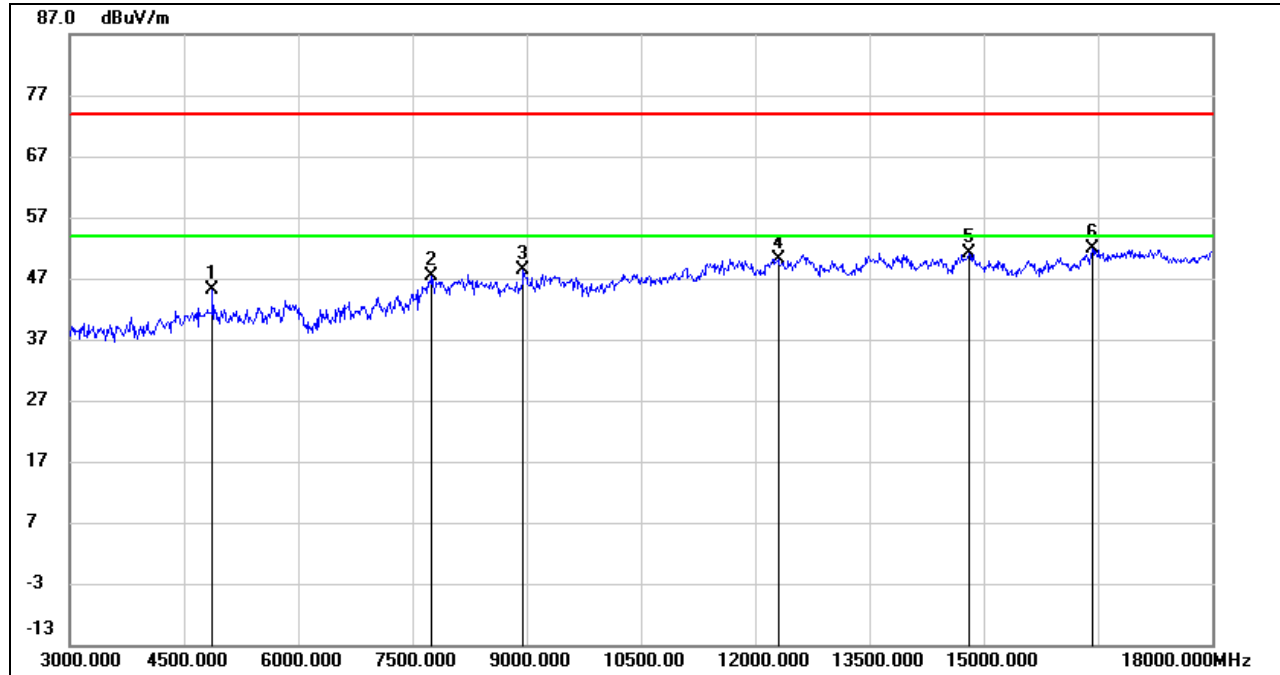

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.76	1.32	45.08	74.00	-28.92	peak
2	7755.000	38.35	8.94	47.29	74.00	-26.71	peak
3	8955.000	37.98	10.41	48.39	74.00	-25.61	peak
4	12300.000	34.13	16.09	50.22	74.00	-23.78	peak
5	14805.000	33.10	18.00	51.10	74.00	-22.90	peak
6	16425.000	32.24	19.68	51.92	74.00	-22.08	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

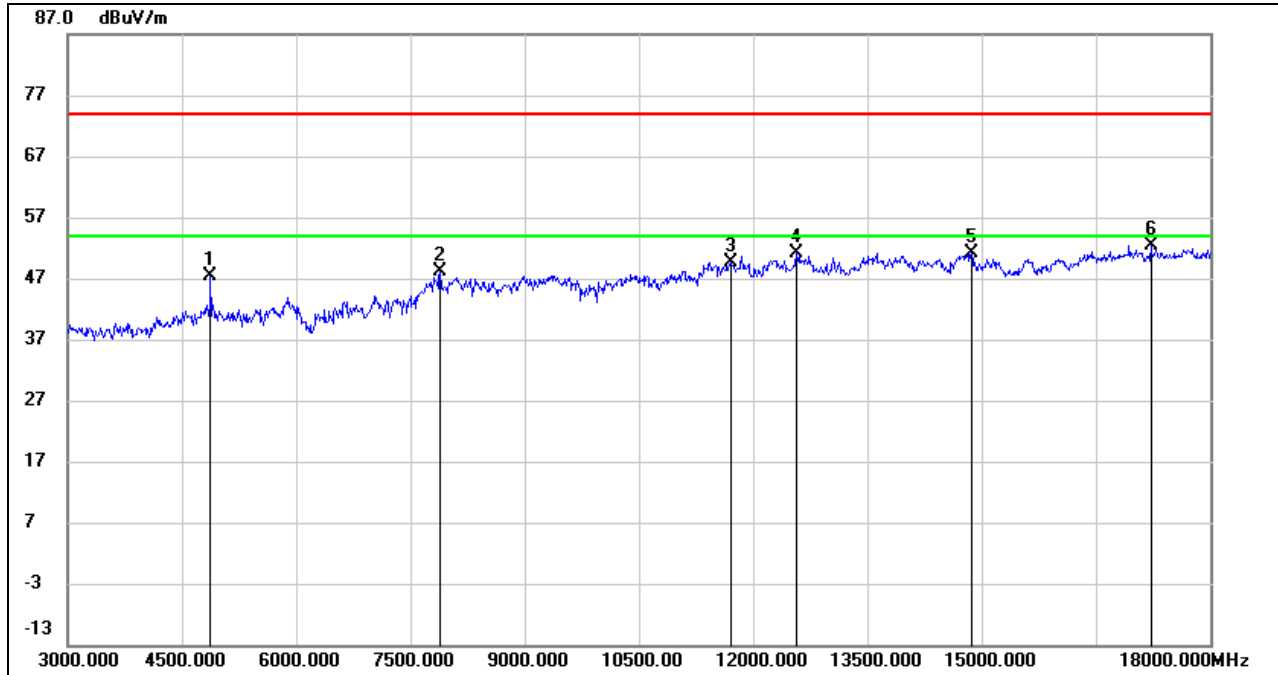

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	45.99	1.32	47.31	74.00	-26.69	peak
2	7890.000	39.29	8.91	48.20	74.00	-25.80	peak
3	11715.000	34.28	15.34	49.62	74.00	-24.38	peak
4	12570.000	35.50	15.75	51.25	74.00	-22.75	peak
5	14865.000	33.56	17.61	51.17	74.00	-22.83	peak
6	17220.000	30.21	22.12	52.33	74.00	-21.67	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

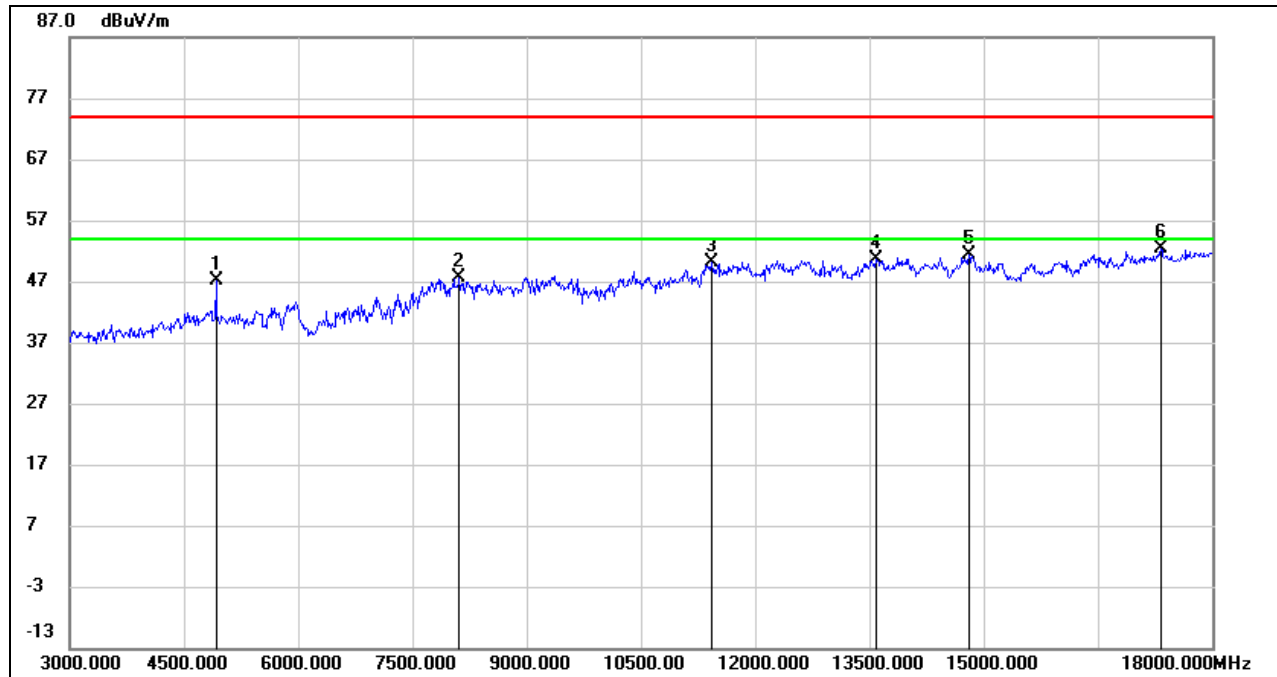**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	45.70	1.45	47.15	74.00	-26.85	peak
2	8115.000	37.43	10.13	47.56	74.00	-26.44	peak
3	11430.000	35.51	14.72	50.23	74.00	-23.77	peak
4	13590.000	33.57	17.11	50.68	74.00	-23.32	peak
5	14805.000	33.33	18.00	51.33	74.00	-22.67	peak
6	17325.000	29.87	22.42	52.29	74.00	-21.71	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

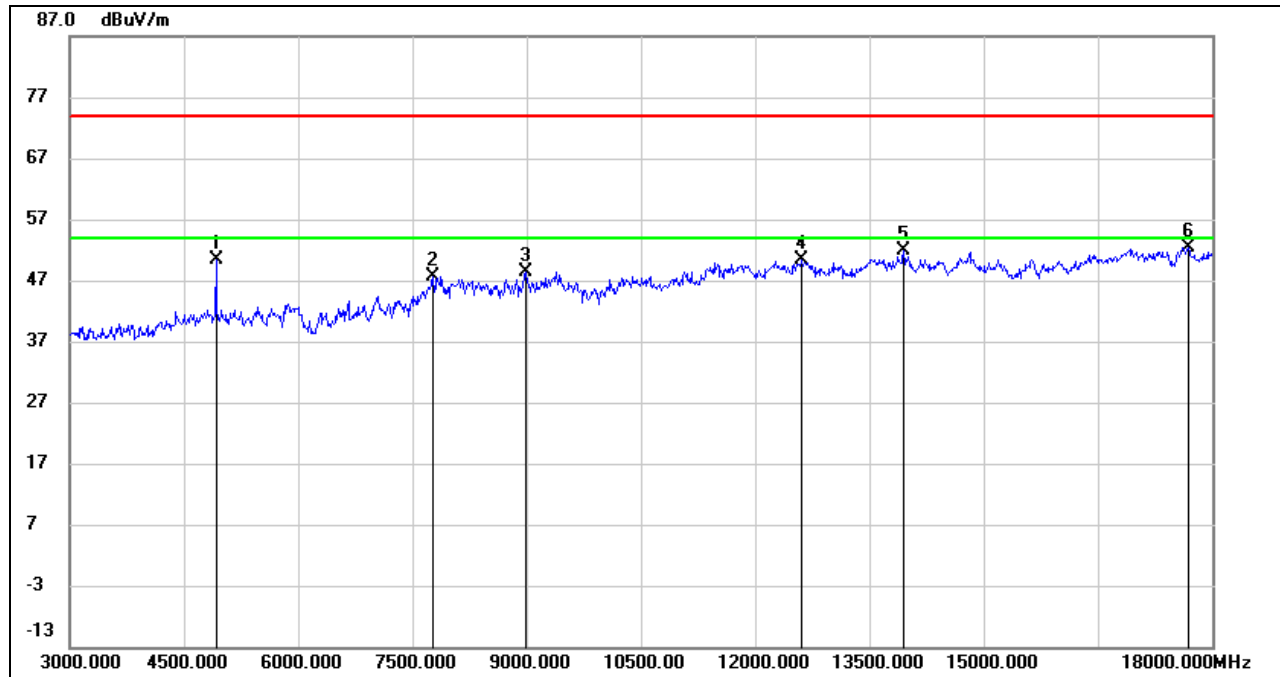


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	49.05	1.45	50.50	74.00	-23.50	peak
2	7770.000	38.61	9.09	47.70	74.00	-26.30	peak
3	8985.000	37.44	10.99	48.43	74.00	-25.57	peak
4	12615.000	34.60	15.75	50.35	74.00	-23.65	peak
5	13950.000	34.36	17.60	51.96	74.00	-22.04	peak
6	17685.000	29.11	23.36	52.47	74.00	-21.53	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 8.3.2. 802.11g SISO MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

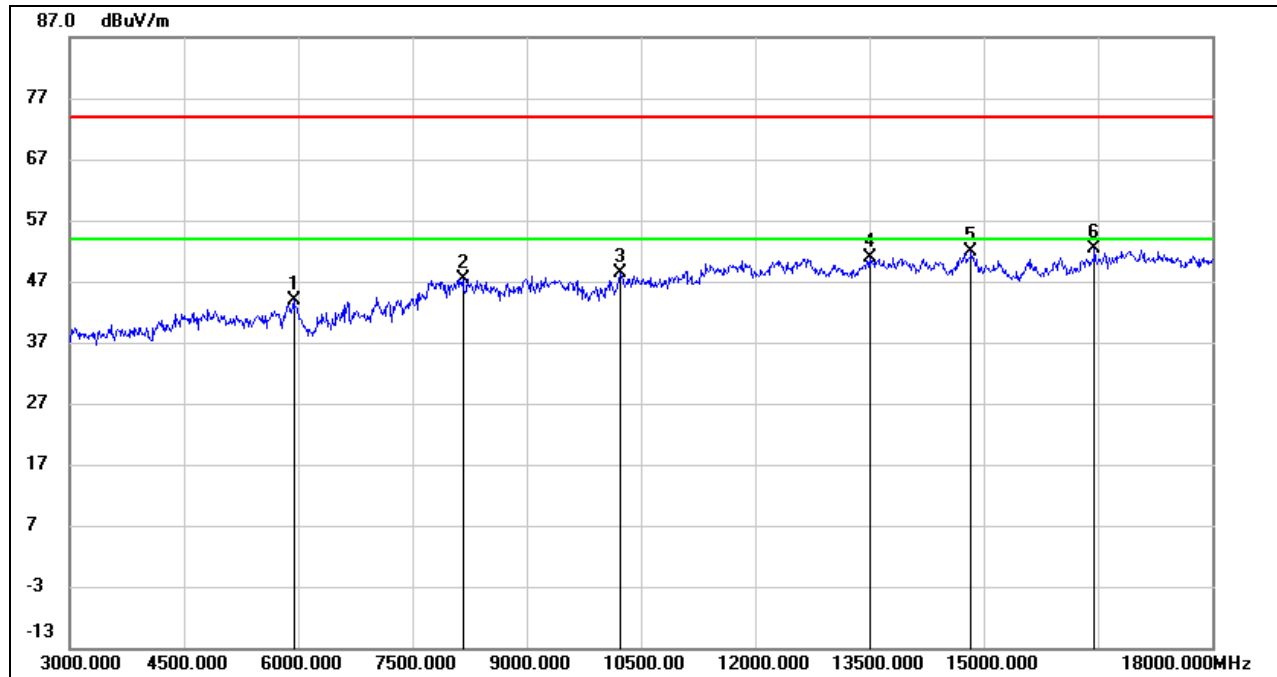

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5940.000	39.52	4.31	43.83	74.00	-30.17	peak
2	8160.000	37.47	9.96	47.43	74.00	-26.57	peak
3	10230.000	36.68	11.58	48.26	74.00	-25.74	peak
4	13500.000	33.56	17.22	50.78	74.00	-23.22	peak
5	14835.000	33.96	17.80	51.76	74.00	-22.24	peak
6	16455.000	32.62	19.68	52.30	74.00	-21.70	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

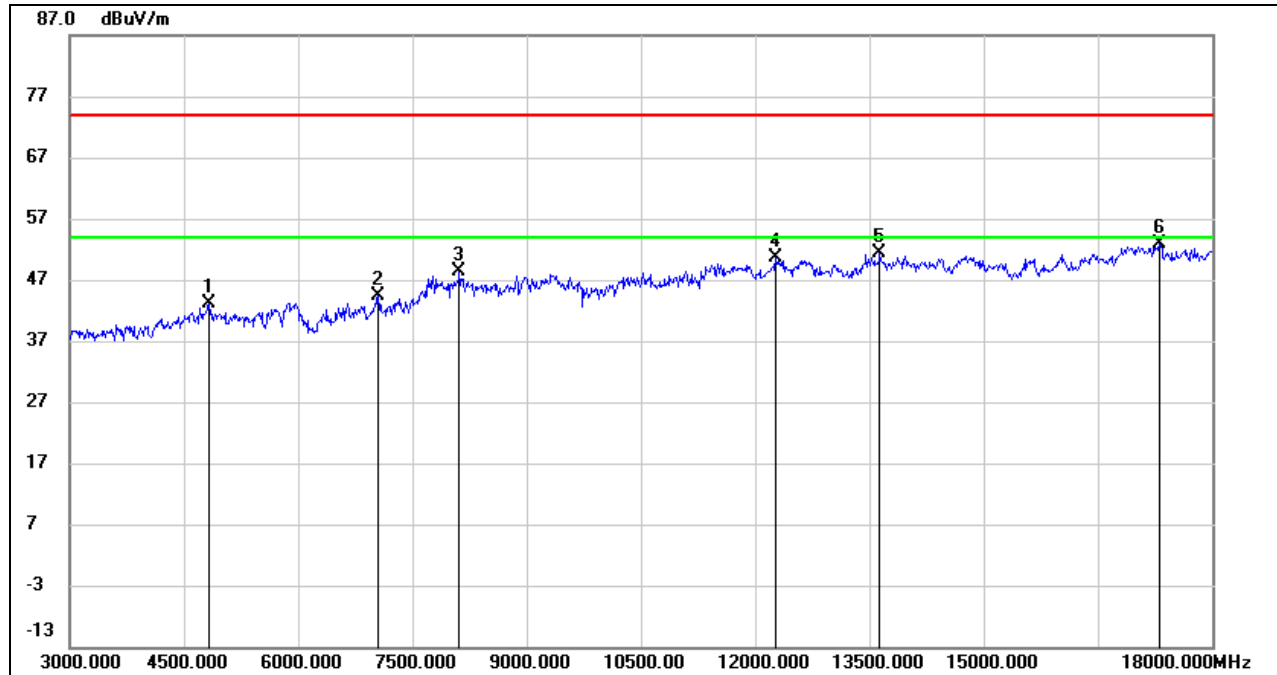**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	41.81	1.37	43.18	74.00	-30.82	peak
2	7050.000	36.69	7.63	44.32	74.00	-29.68	peak
3	8115.000	38.19	10.13	48.32	74.00	-25.68	peak
4	12270.000	34.64	16.04	50.68	74.00	-23.32	peak
5	13635.000	33.98	17.28	51.26	74.00	-22.74	peak
6	17310.000	30.42	22.54	52.96	74.00	-21.04	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

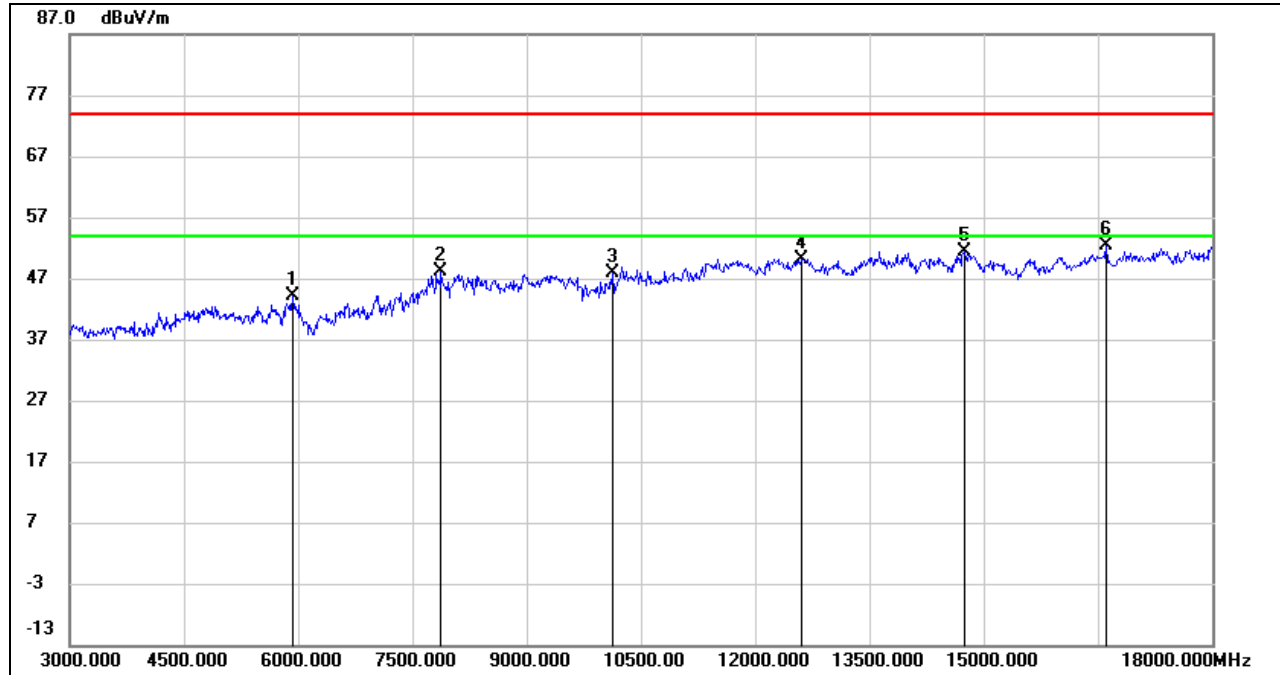

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5925.000	39.74	4.38	44.12	74.00	-29.88	peak
2	7875.000	39.22	8.98	48.20	74.00	-25.80	peak
3	10125.000	36.71	11.19	47.90	74.00	-26.10	peak
4	12615.000	34.44	15.75	50.19	74.00	-23.81	peak
5	14745.000	33.44	17.84	51.28	74.00	-22.72	peak
6	16605.000	32.47	20.00	52.47	74.00	-21.53	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

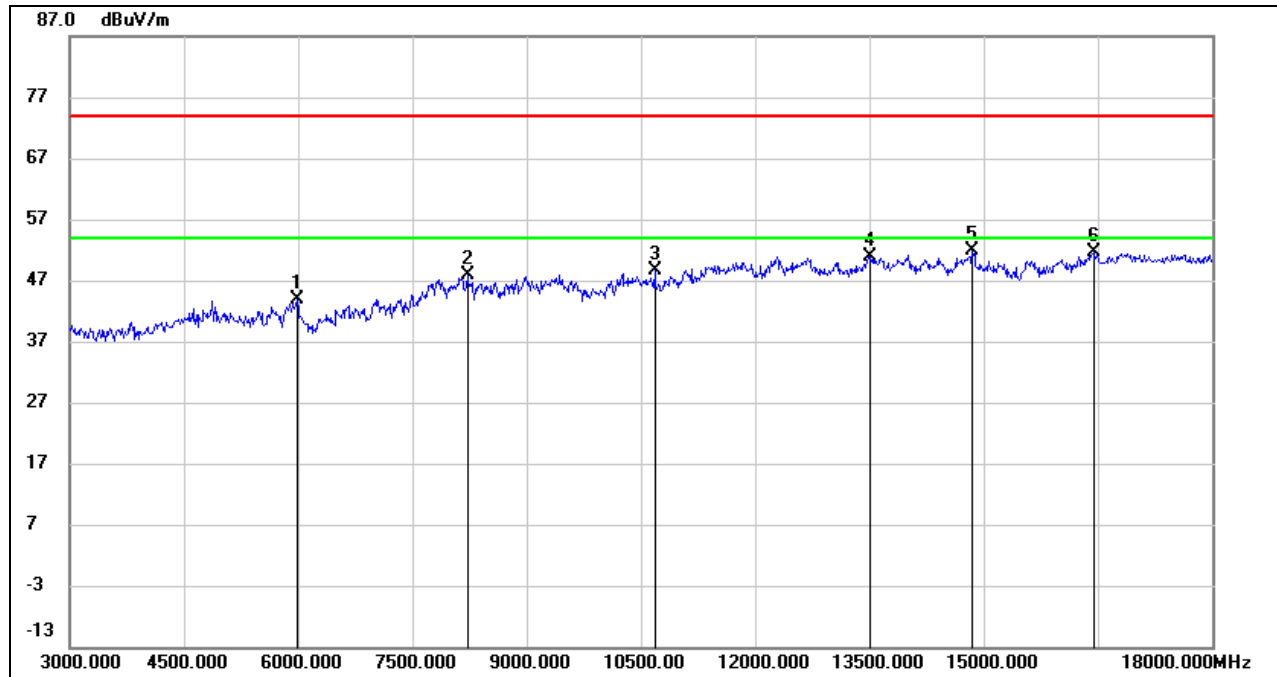
**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5985.000	39.89	4.08	43.97	74.00	-30.03	peak
2	8220.000	38.04	9.79	47.83	74.00	-26.17	peak
3	10680.000	35.81	12.87	48.68	74.00	-25.32	peak
4	13515.000	33.80	17.19	50.99	74.00	-23.01	peak
5	14850.000	34.05	17.71	51.76	74.00	-22.24	peak
6	16440.000	31.93	19.68	51.61	74.00	-22.39	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

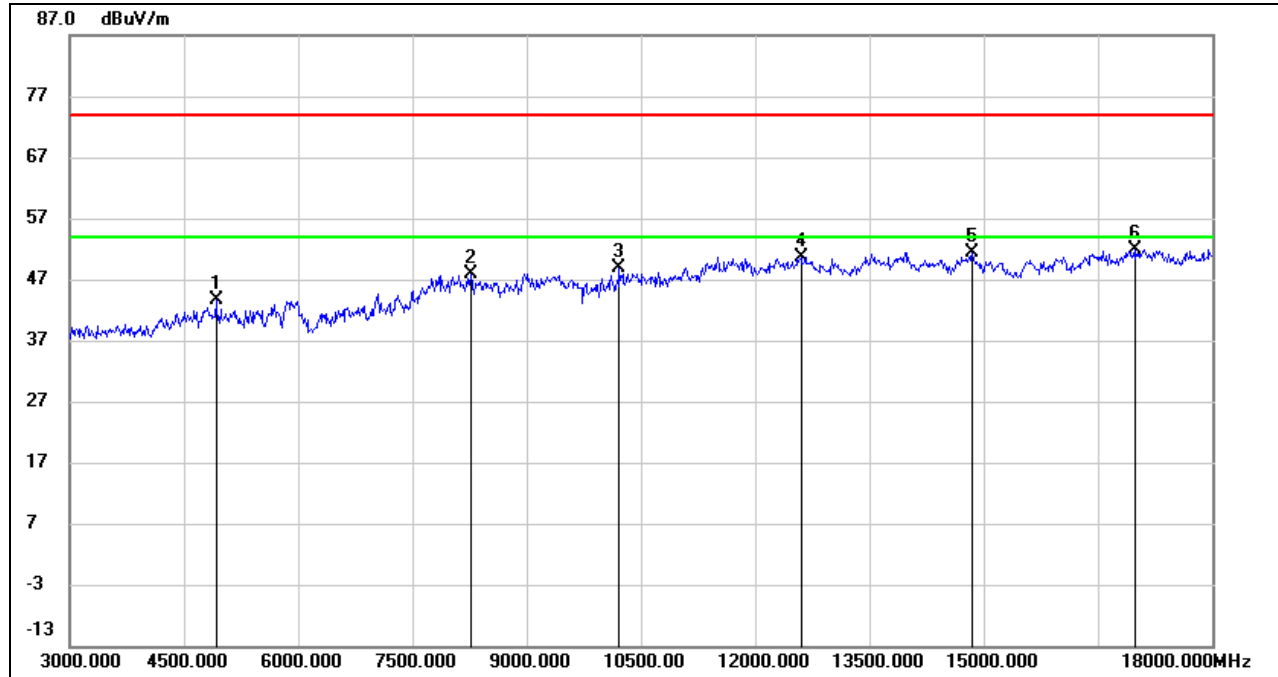

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	42.08	1.45	43.53	74.00	-30.47	peak
2	8265.000	38.15	9.73	47.88	74.00	-26.12	peak
3	10215.000	37.37	11.54	48.91	74.00	-25.09	peak
4	12600.000	34.94	15.78	50.72	74.00	-23.28	peak
5	14850.000	33.74	17.71	51.45	74.00	-22.55	peak
6	16995.000	30.73	21.26	51.99	74.00	-22.01	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

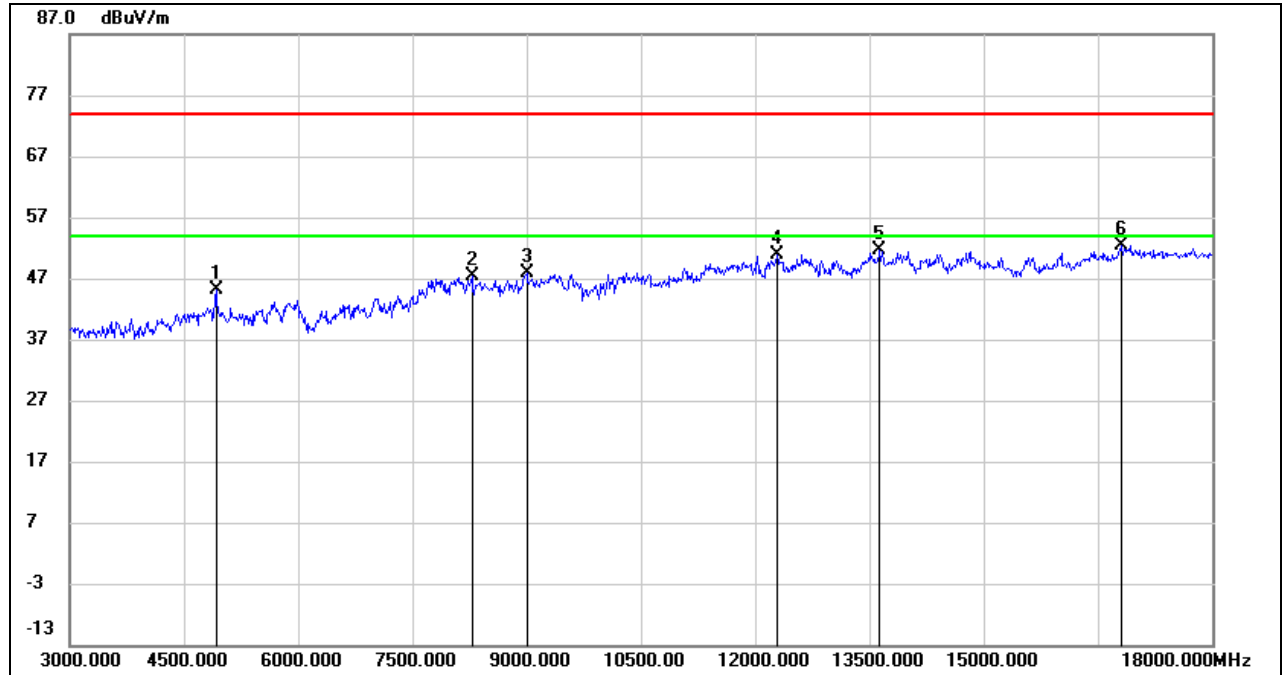


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	43.57	1.45	45.02	74.00	-28.98	peak
2	8280.000	37.56	9.71	47.27	74.00	-26.73	peak
3	9000.000	36.54	11.27	47.81	74.00	-26.19	peak
4	12285.000	34.69	16.08	50.77	74.00	-23.23	peak
5	13635.000	34.35	17.28	51.63	74.00	-22.37	peak
6	16815.000	31.62	20.84	52.46	74.00	-21.54	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### 8.3.3. 802.11n HT20 MIMO MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

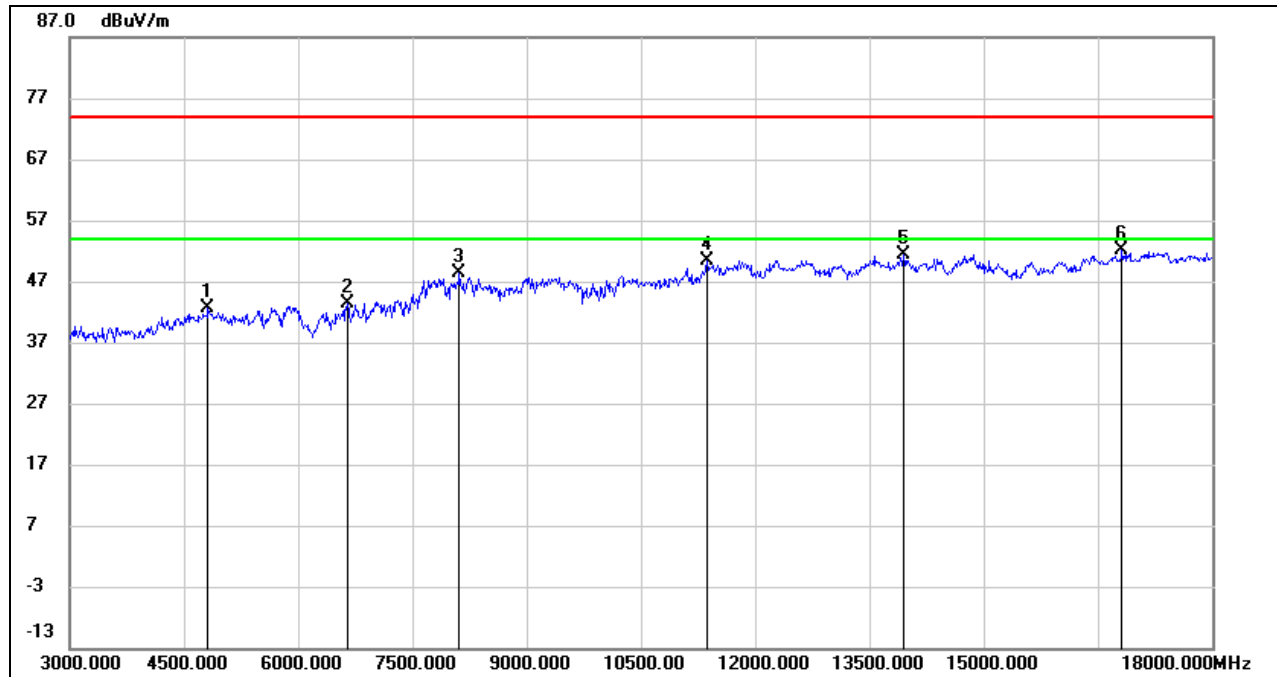

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	41.18	1.38	42.56	74.00	-31.44	peak
2	6645.000	37.42	5.95	43.37	74.00	-30.63	peak
3	8115.000	38.19	10.13	48.32	74.00	-25.68	peak
4	11370.000	35.99	14.49	50.48	74.00	-23.52	peak
5	13950.000	33.78	17.60	51.38	74.00	-22.62	peak
6	16815.000	31.28	20.84	52.12	74.00	-21.88	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

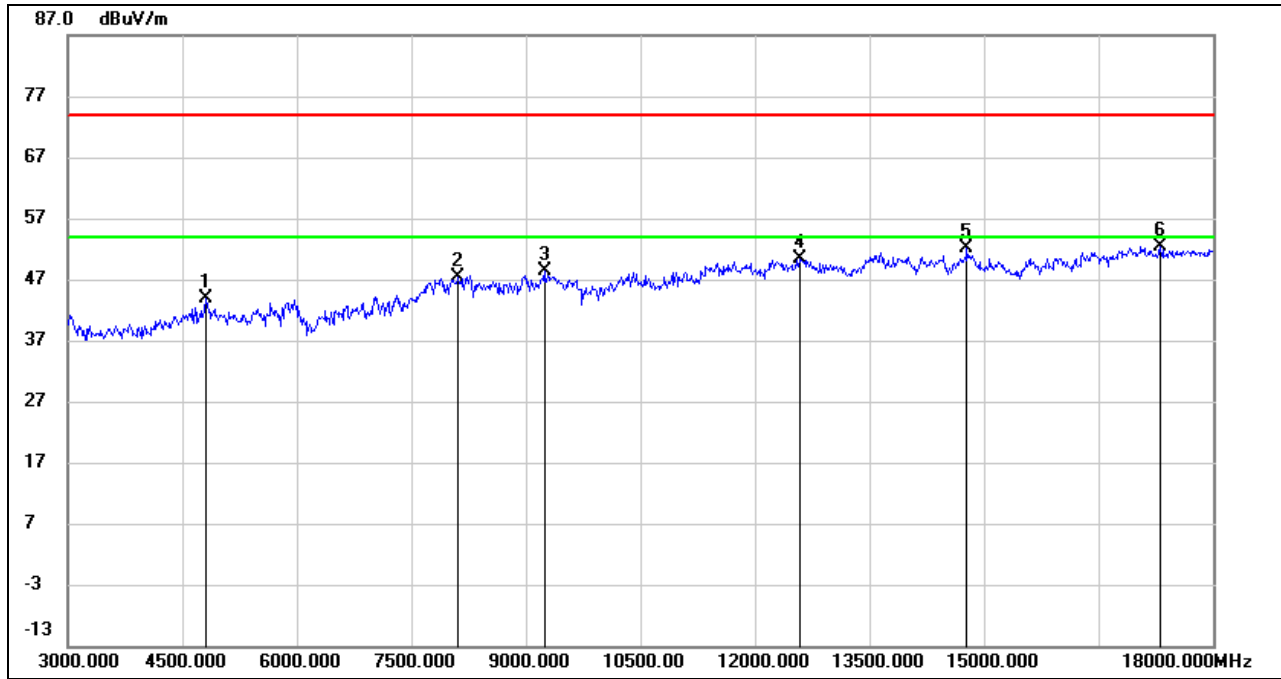

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	42.49	1.40	43.89	74.00	-30.11	peak
2	8115.000	37.31	10.13	47.44	74.00	-26.56	peak
3	9240.000	38.37	10.10	48.47	74.00	-25.53	peak
4	12585.000	34.51	15.77	50.28	74.00	-23.72	peak
5	14775.000	34.30	17.95	52.25	74.00	-21.75	peak
6	17310.000	29.92	22.54	52.46	74.00	-21.54	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

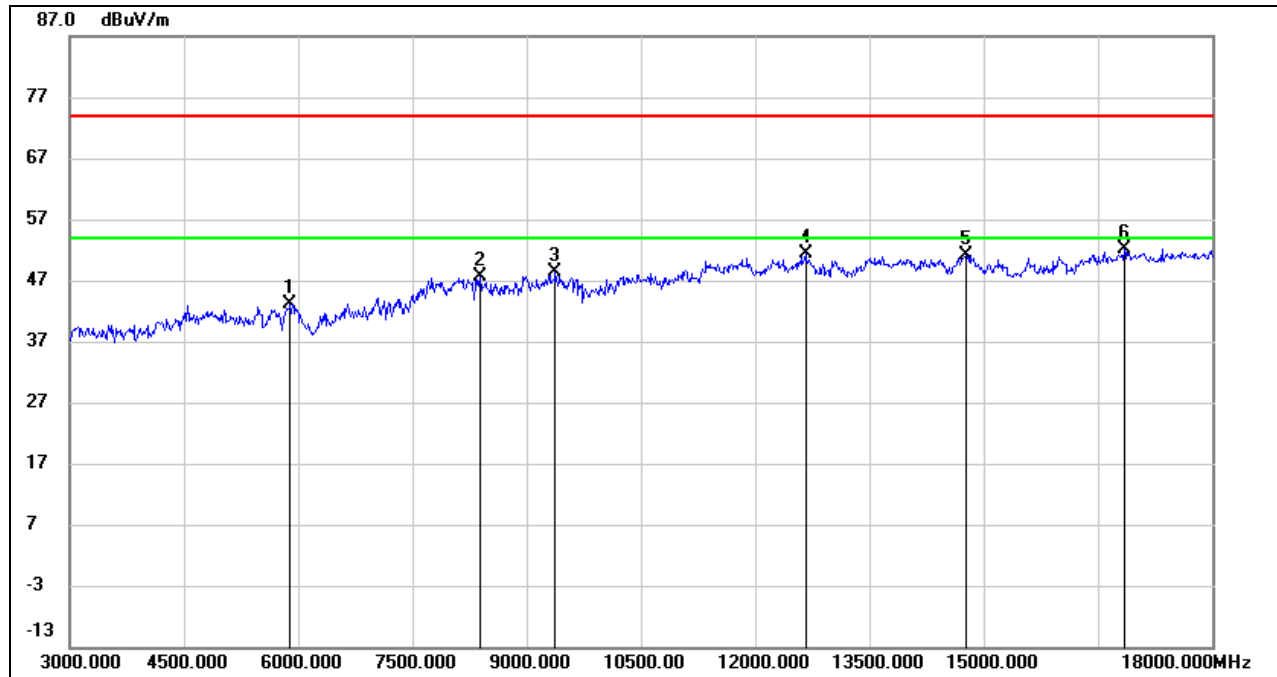

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5895.000	38.65	4.46	43.11	74.00	-30.89	peak
2	8385.000	38.30	9.39	47.69	74.00	-26.31	peak
3	9375.000	37.51	10.83	48.34	74.00	-25.66	peak
4	12660.000	35.59	15.69	51.28	74.00	-22.72	peak
5	14760.000	33.20	17.90	51.10	74.00	-22.90	peak
6	16845.000	30.94	21.10	52.04	74.00	-21.96	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

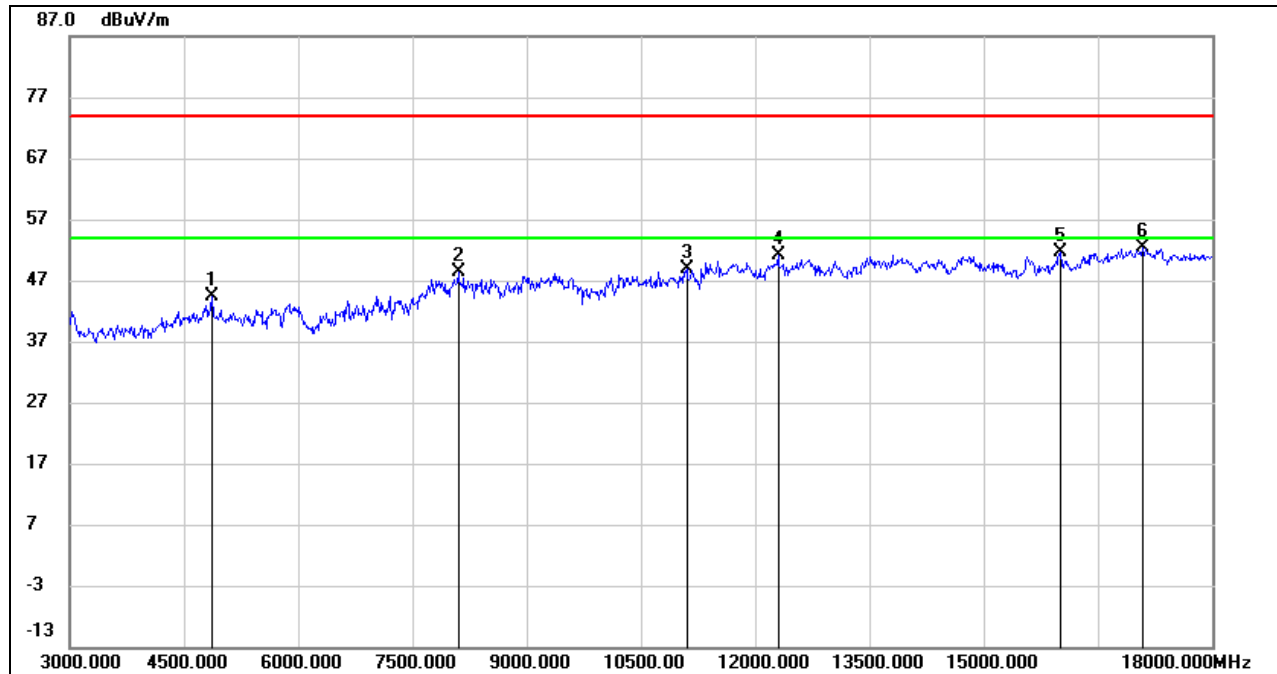**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.12	1.32	44.44	74.00	-29.56	peak
2	8100.000	38.12	10.18	48.30	74.00	-25.70	peak
3	11100.000	35.09	13.79	48.88	74.00	-25.12	peak
4	12300.000	35.14	16.09	51.23	74.00	-22.77	peak
5	16005.000	33.17	18.42	51.59	74.00	-22.41	peak
6	17085.000	30.47	21.80	52.27	74.00	-21.73	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

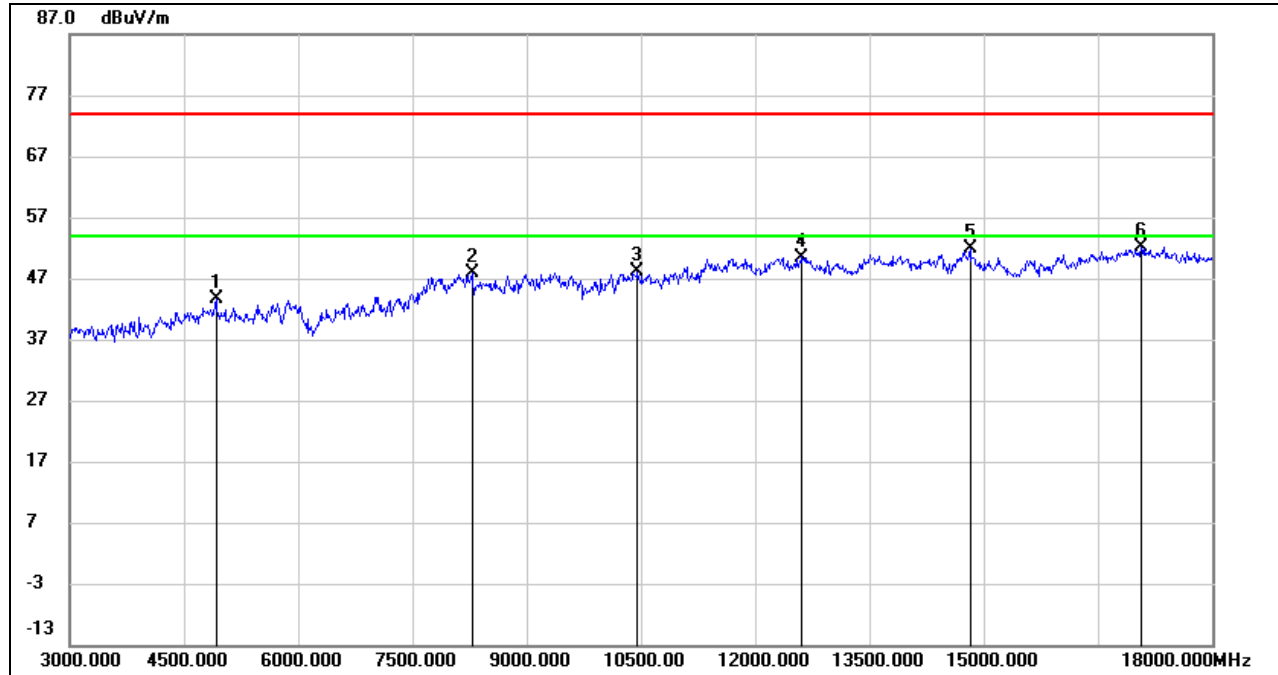

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	42.07	1.45	43.52	74.00	-30.48	peak
2	8280.000	38.29	9.71	48.00	74.00	-26.00	peak
3	10455.000	35.84	12.31	48.15	74.00	-25.85	peak
4	12615.000	34.75	15.75	50.50	74.00	-23.50	peak
5	14820.000	34.08	17.91	51.99	74.00	-22.01	peak
6	17070.000	30.41	21.71	52.12	74.00	-21.88	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

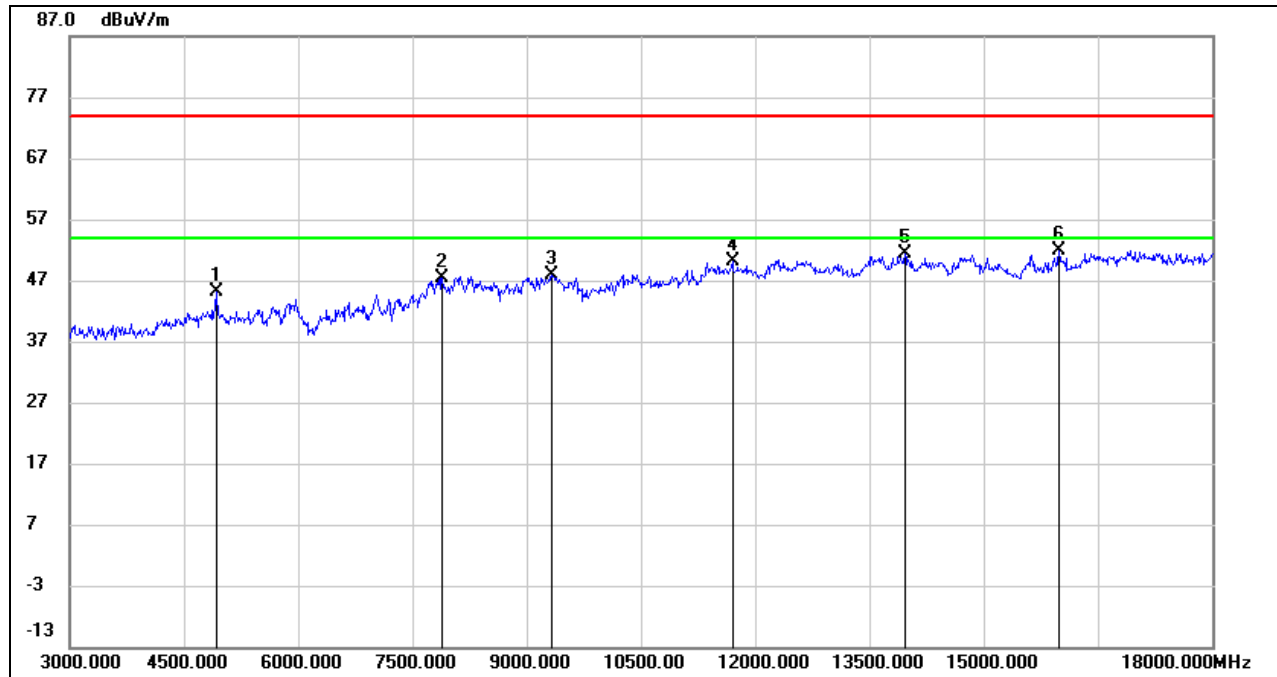**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**


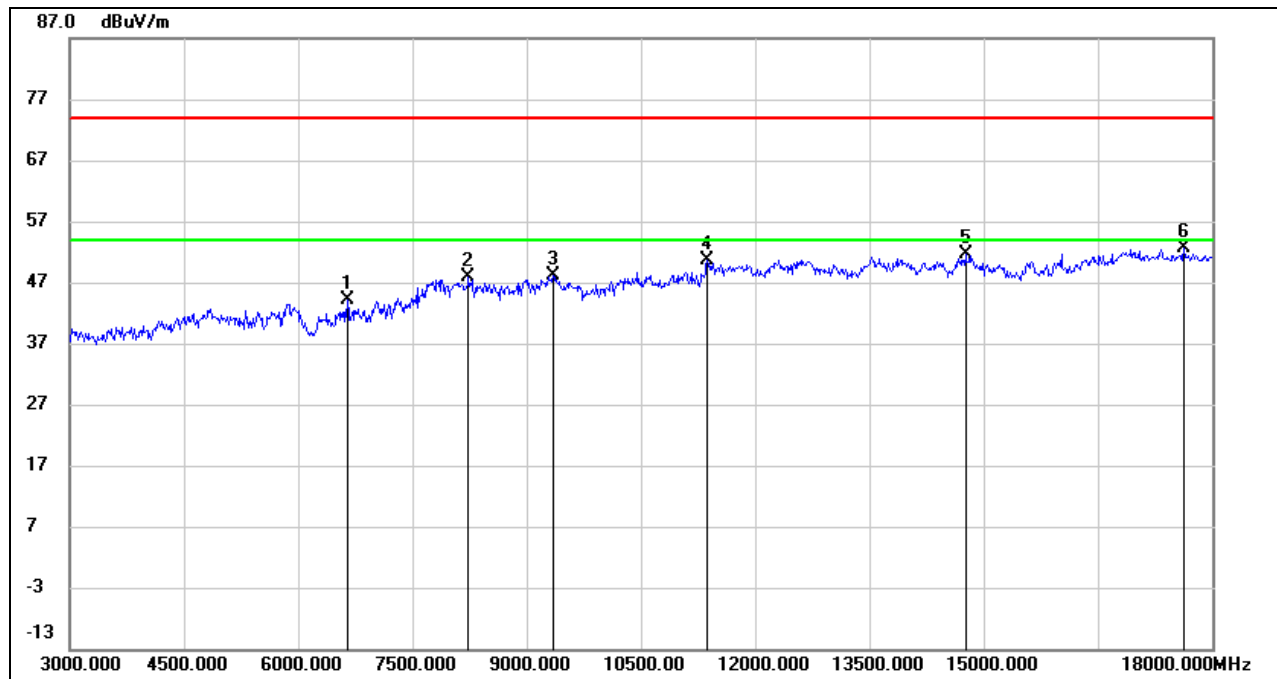
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	43.65	1.45	45.10	74.00	-28.90	peak
2	7890.000	38.51	8.91	47.42	74.00	-26.58	peak
3	9330.000	37.30	10.57	47.87	74.00	-26.13	peak
4	11700.000	34.82	15.35	50.17	74.00	-23.83	peak
5	13965.000	33.69	17.62	51.31	74.00	-22.69	peak
6	15990.000	33.56	18.39	51.95	74.00	-22.05	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**8.3.4. 802.11n HT40 MIMO MODE**


**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)**



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6645.000	38.30	5.95	44.25	74.00	-29.75	peak
2	8235.000	38.12	9.76	47.88	74.00	-26.12	peak
3	9345.000	37.58	10.66	48.24	74.00	-25.76	peak
4	11370.000	36.23	14.49	50.72	74.00	-23.28	peak
5	14760.000	33.62	17.90	51.52	74.00	-22.48	peak
6	17625.000	29.74	22.92	52.66	74.00	-21.34	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

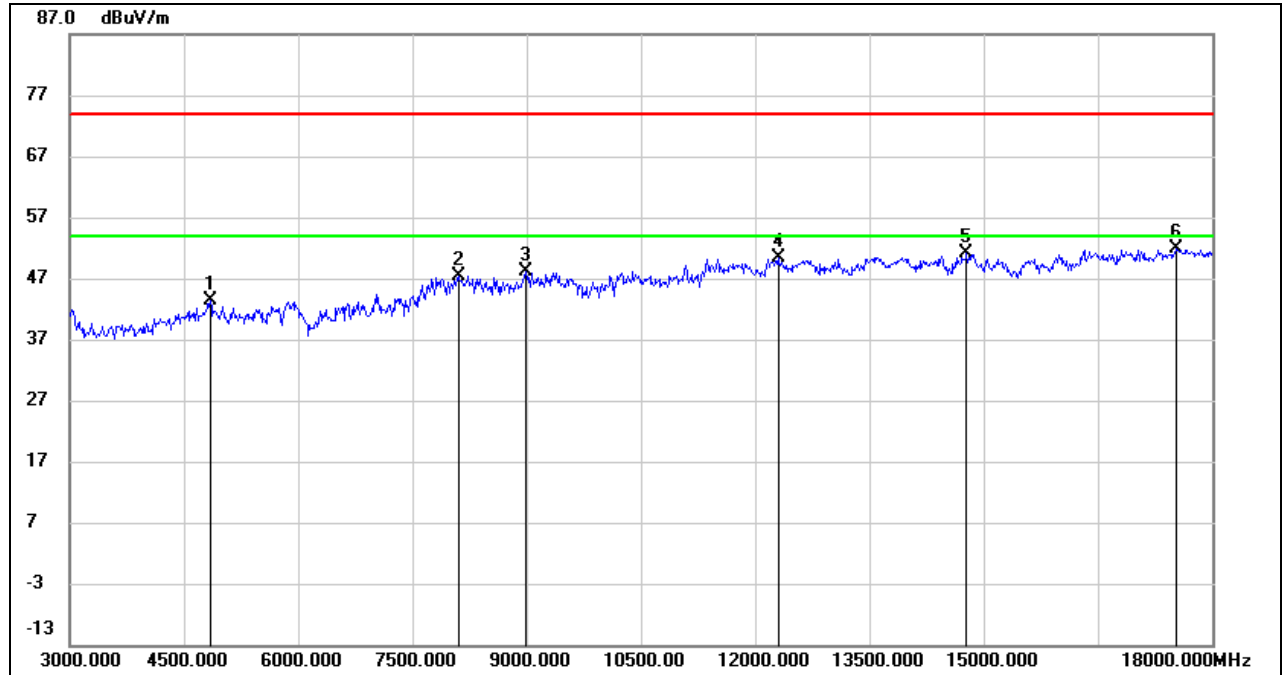


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	42.12	1.35	43.47	74.00	-30.53	peak
2	8100.000	37.27	10.18	47.45	74.00	-26.55	peak
3	8985.000	37.23	10.99	48.22	74.00	-25.78	peak
4	12300.000	34.19	16.09	50.28	74.00	-23.72	peak
5	14775.000	33.12	17.95	51.07	74.00	-22.93	peak
6	17520.000	29.74	22.17	51.91	74.00	-22.09	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

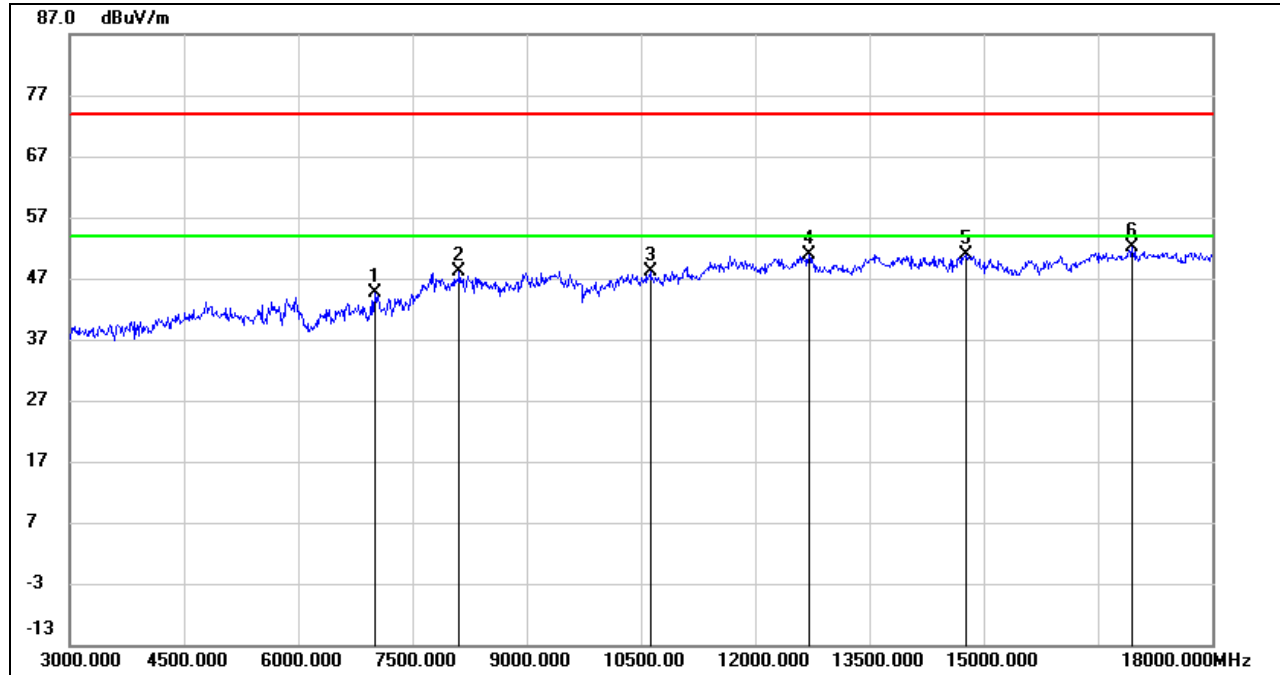


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7005.000	37.03	7.60	44.63	74.00	-29.37	peak
2	8115.000	38.03	10.13	48.16	74.00	-25.84	peak
3	10620.000	35.37	12.72	48.09	74.00	-25.91	peak
4	12705.000	35.15	15.64	50.79	74.00	-23.21	peak
5	14775.000	32.83	17.95	50.78	74.00	-23.22	peak
6	16950.000	30.68	21.41	52.09	74.00	-21.91	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

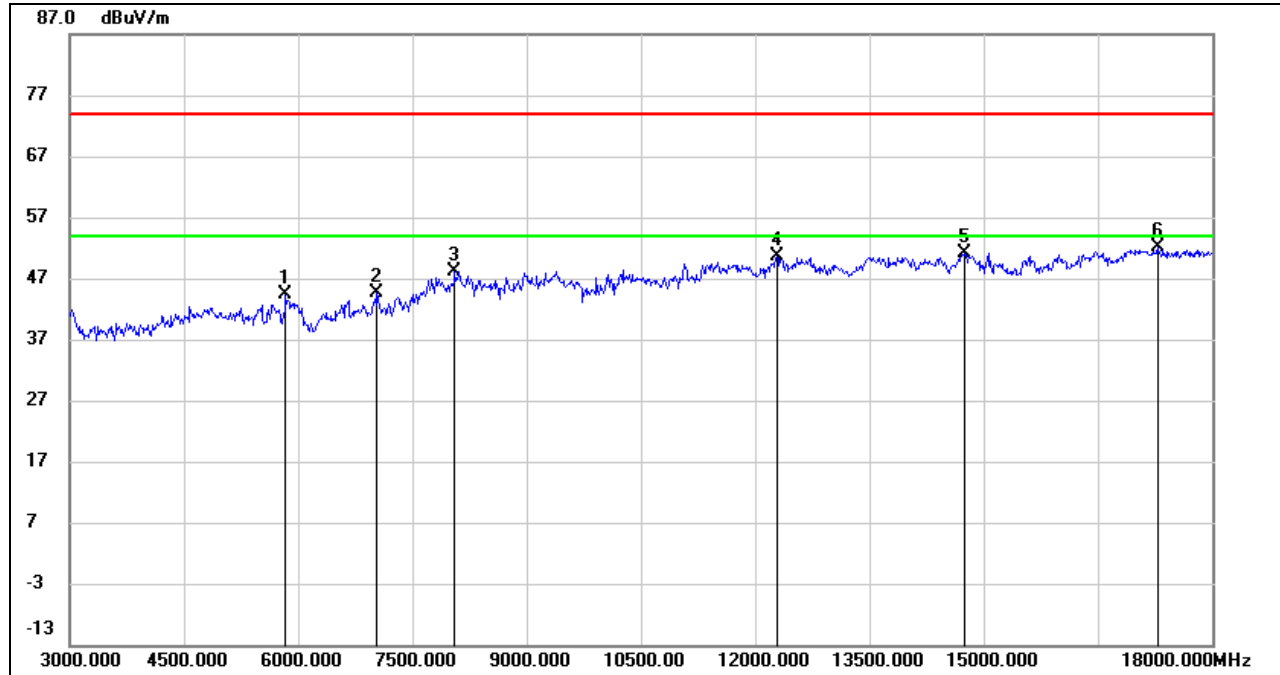


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5835.000	40.62	3.86	44.48	74.00	-29.52	peak
2	7035.000	36.90	7.62	44.52	74.00	-29.48	peak
3	8055.000	38.77	9.48	48.25	74.00	-25.75	peak
4	12285.000	34.64	16.08	50.72	74.00	-23.28	peak
5	14745.000	33.31	17.84	51.15	74.00	-22.85	peak
6	17280.000	29.55	22.48	52.03	74.00	-21.97	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.






**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

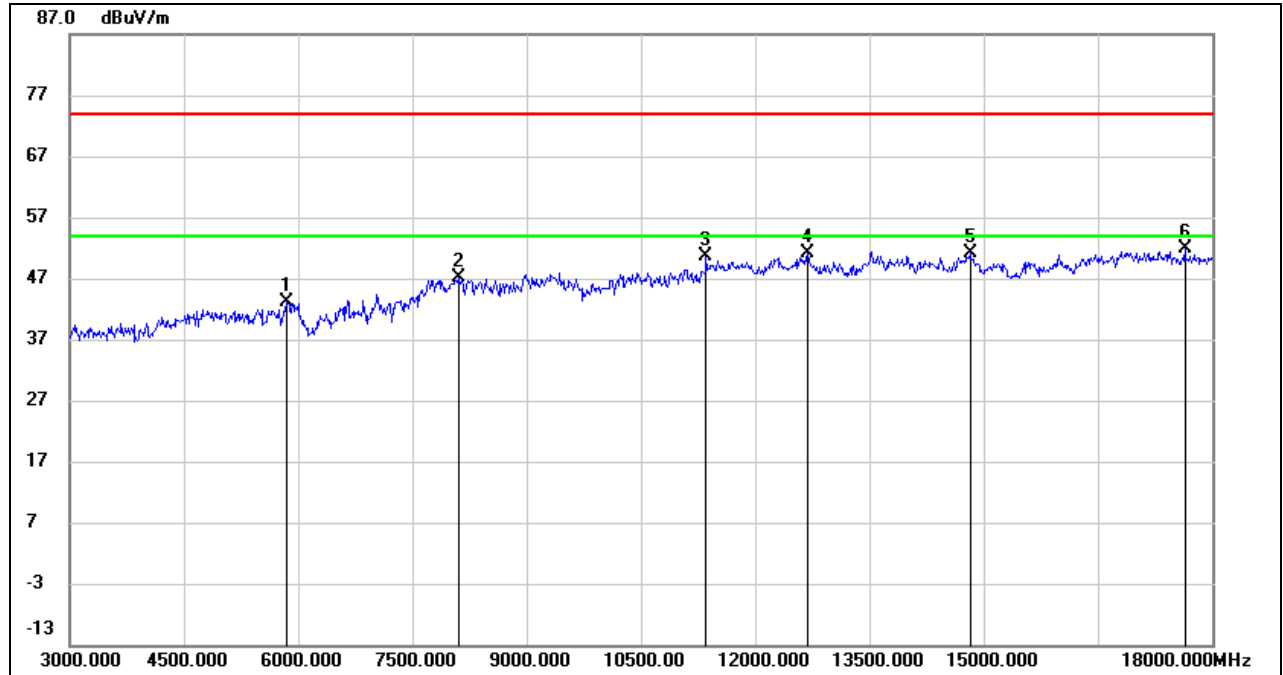

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	39.04	4.00	43.04	74.00	-30.96	peak
2	8115.000	37.06	10.13	47.19	74.00	-26.81	peak
3	11355.000	36.27	14.34	50.61	74.00	-23.39	peak
4	12690.000	35.38	15.64	51.02	74.00	-22.98	peak
5	14820.000	33.21	17.91	51.12	74.00	-22.88	peak
6	17640.000	28.86	23.03	51.89	74.00	-22.11	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

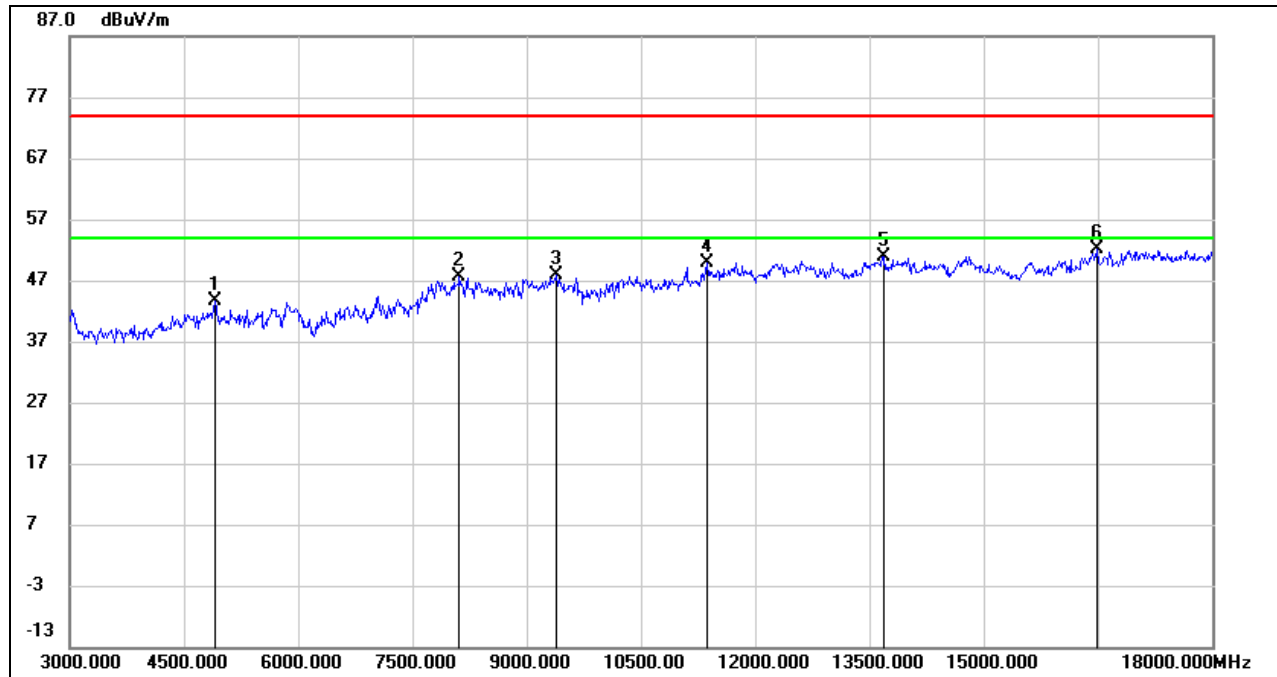**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	42.37	1.33	43.70	74.00	-30.30	peak
2	8115.000	37.40	10.13	47.53	74.00	-26.47	peak
3	9390.000	37.00	10.92	47.92	74.00	-26.08	peak
4	11370.000	35.44	14.49	49.93	74.00	-24.07	peak
5	13695.000	33.33	17.59	50.92	74.00	-23.08	peak
6	16485.000	32.42	19.69	52.11	74.00	-21.89	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

## 8.4. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)


### 8.4.1. 802.11n H40 MIMO MODE

#### SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

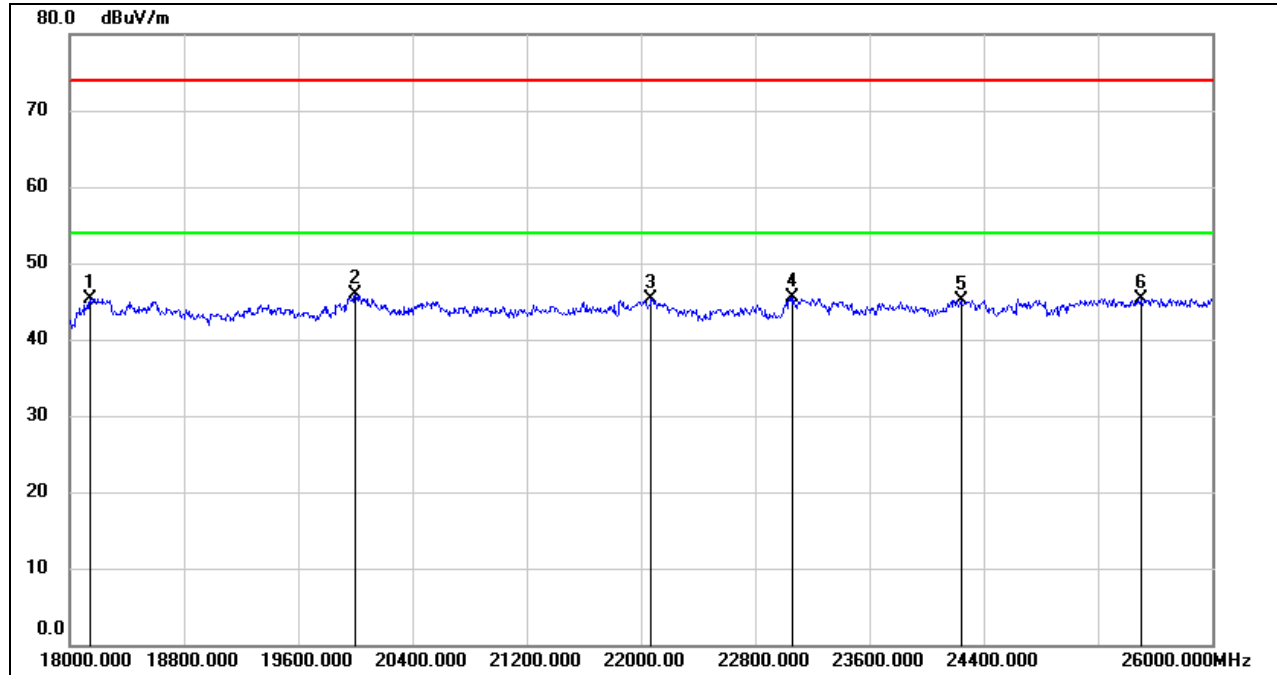

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	50.77	-5.48	45.29	74.00	-28.71	peak
2	20000.000	51.31	-5.45	45.86	74.00	-28.14	peak
3	22072.000	49.77	-4.41	45.36	74.00	-28.64	peak
4	23064.000	48.99	-3.42	45.57	74.00	-28.43	peak
5	24240.000	48.02	-2.83	45.19	74.00	-28.81	peak
6	25504.000	47.07	-1.77	45.30	74.00	-28.70	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.

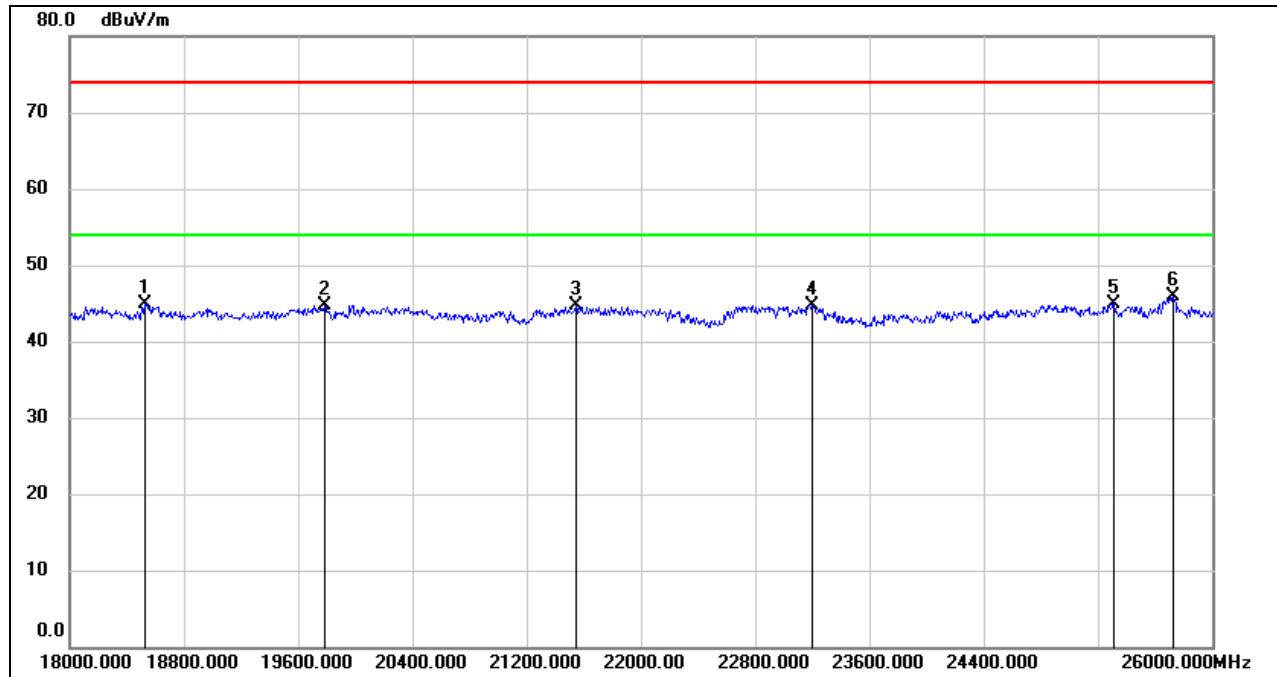**SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18528.000	50.11	-5.26	44.85	74.00	-29.15	peak
2	19784.000	50.07	-5.28	44.79	74.00	-29.21	peak
3	21544.000	49.26	-4.63	44.63	74.00	-29.37	peak
4	23200.000	48.03	-3.38	44.65	74.00	-29.35	peak
5	25312.000	46.70	-1.70	45.00	74.00	-29.00	peak
6	25728.000	46.61	-0.72	45.89	74.00	-28.11	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.


Note: All the modes and channels have been tested, but only the worst data was recorded in the report.



## 8.5. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

### 8.5.1. 802.11n HT40 MIMO MODE

#### SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

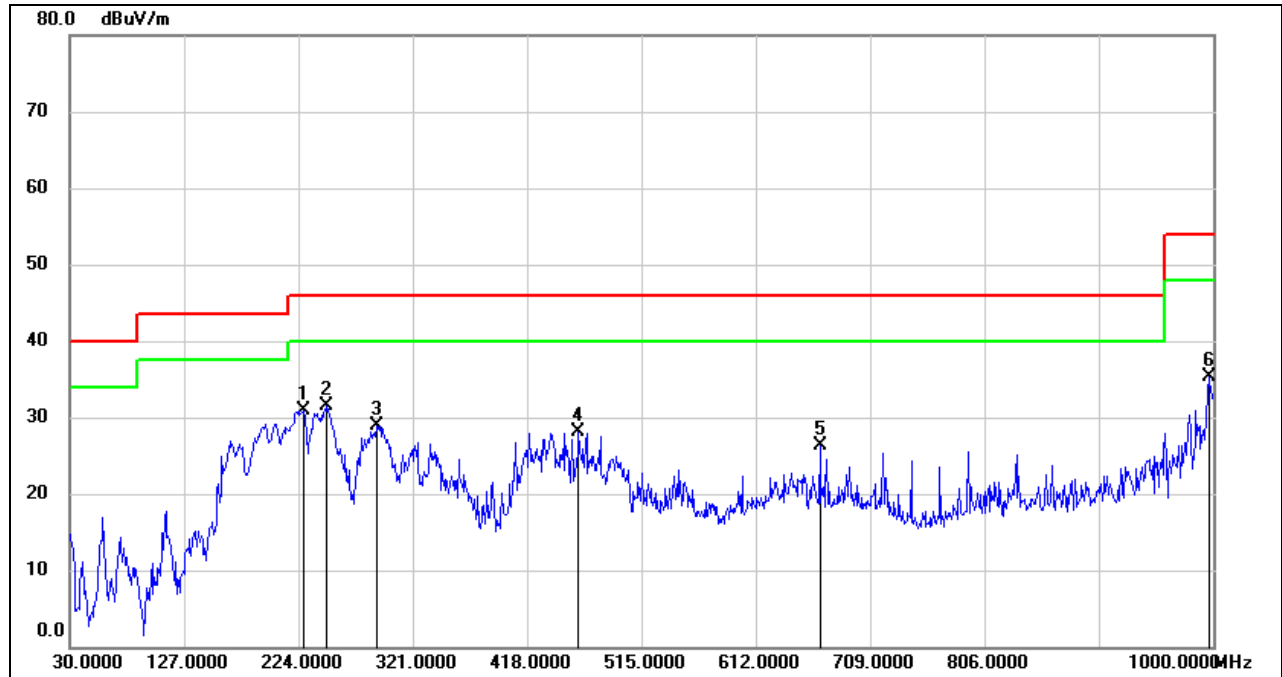

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	227.8800	49.48	-18.55	30.93	46.00	-15.07	QP
2	248.2500	50.48	-18.96	31.52	46.00	-14.48	QP
3	289.9600	44.88	-15.91	28.97	46.00	-17.03	QP
4	461.6500	40.16	-12.10	28.06	46.00	-17.94	QP
5	666.3200	34.95	-8.65	26.30	46.00	-19.70	QP
6	996.1200	39.48	-4.20	35.28	54.00	-18.72	QP


Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



**SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

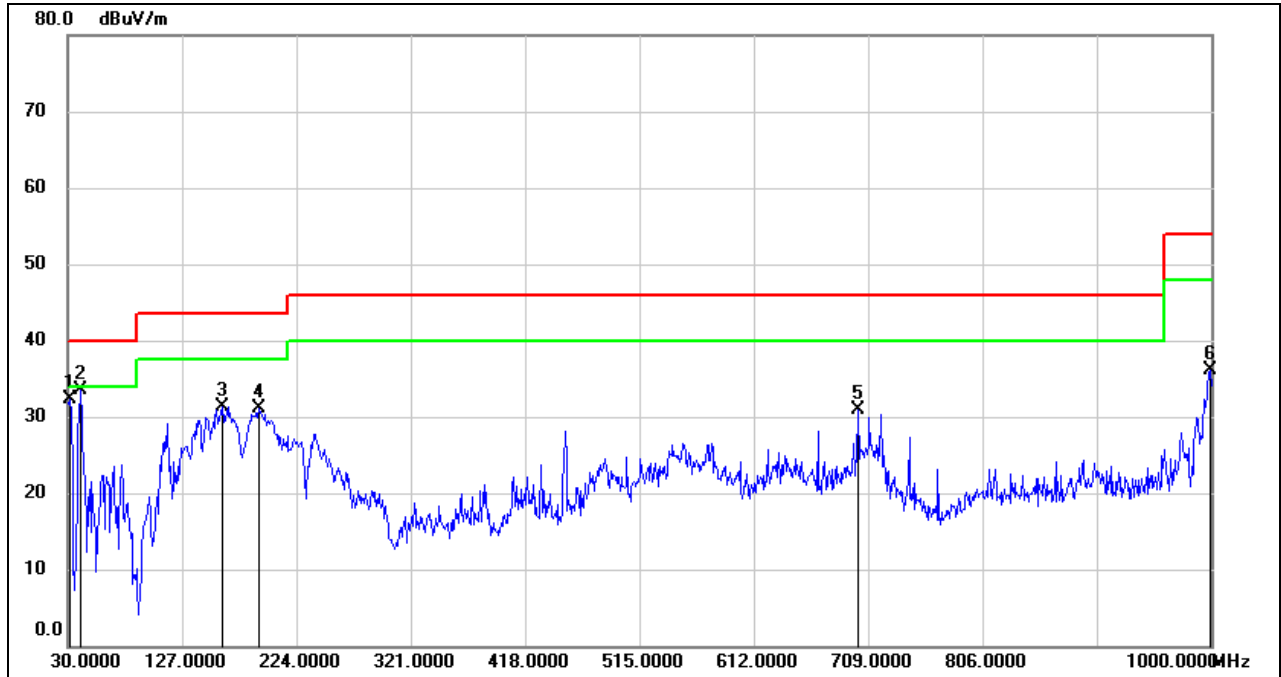

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9400	51.40	-19.13	32.27	40.00	-7.73	QP
2	40.6699	53.61	-20.05	33.56	40.00	-6.44	QP
3	160.9500	49.09	-17.71	31.38	43.50	-12.12	QP
4	191.9900	47.74	-16.56	31.18	43.50	-12.32	QP
5	700.2700	39.25	-8.31	30.94	46.00	-15.06	QP
6	999.0300	40.35	-4.15	36.20	54.00	-17.80	QP

- Note: 1. Result Level = Read Level + Correct Factor.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes and channels have been tested, but only the worst data was recorded in the report.

## 8.6. SPURIOUS EMISSIONS BELOW 30 MHz

### 8.6.1. 802.11n H40 MIMO MODE

#### SPURIOUS EMISSIONS (HIGH CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz~ 150 kHz

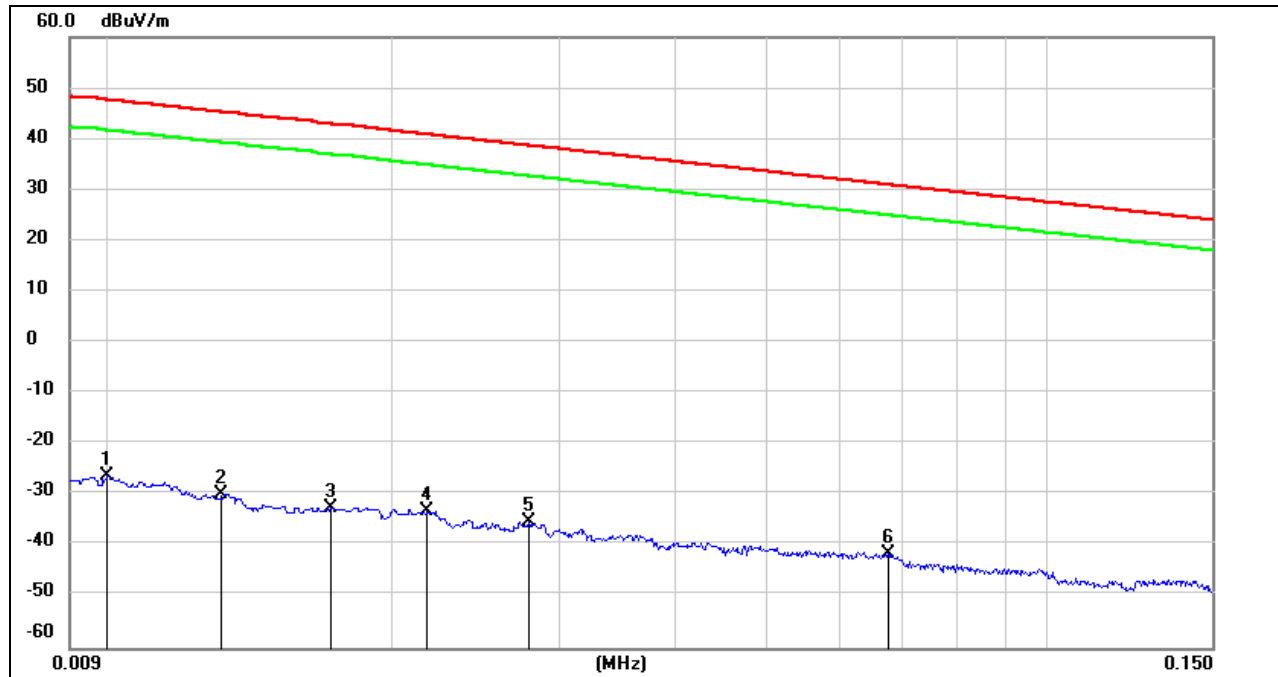


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	75.22	-101.40	-26.18	47.60	-73.78	peak
2	0.0131	71.47	-101.38	-29.91	45.25	-75.16	peak
3	0.0171	68.88	-101.36	-32.48	42.94	-75.42	peak
4	0.0217	68.19	-101.35	-33.16	40.87	-74.03	peak
5	0.0279	66.17	-101.38	-35.21	38.69	-73.90	peak
6	0.0675	60.14	-101.56	-41.42	31.02	-72.44	peak

Note: 1. Measurement = Reading Level + Correct Factor

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

**150 kHz ~ 490 kHz**

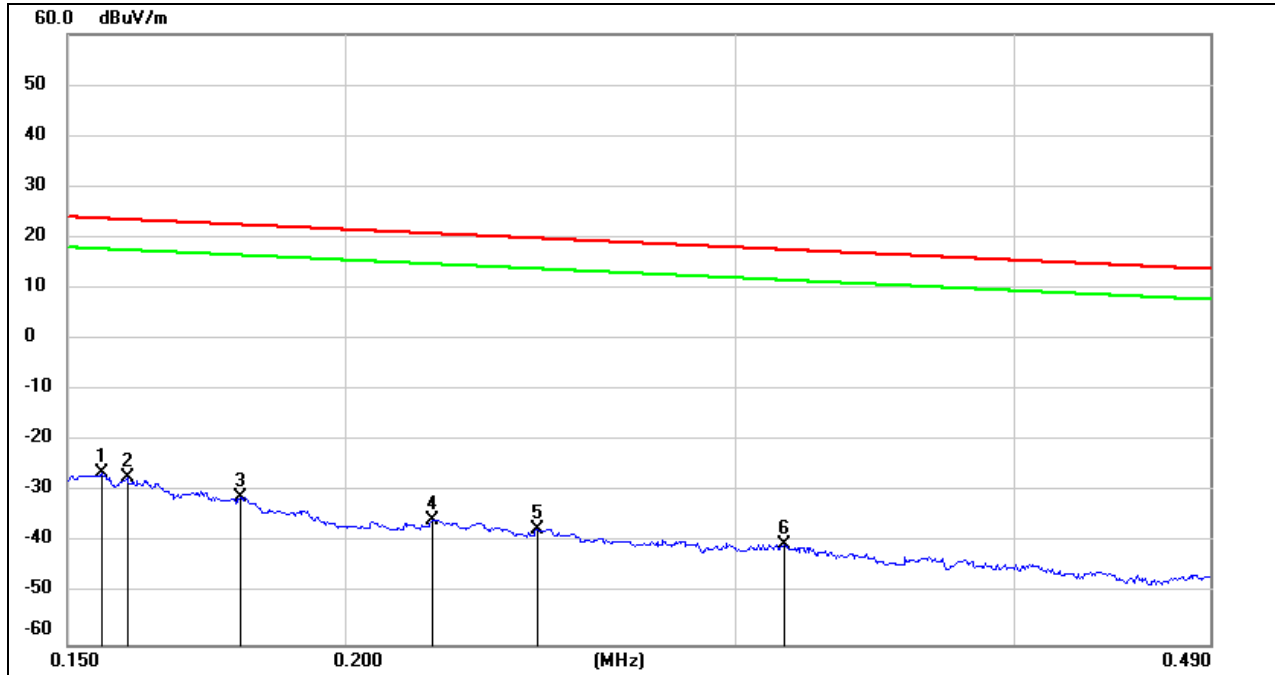


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1554	75.27	-101.65	-26.38	23.77	-50.15	peak
2	0.1595	74.36	-101.65	-27.29	23.55	-50.84	peak
3	0.1794	70.77	-101.68	-30.91	22.53	-53.44	peak
4	0.2190	66.27	-101.75	-35.48	20.79	-56.27	peak
5	0.2442	64.53	-101.79	-37.26	19.85	-57.11	peak
6	0.3150	61.63	-101.87	-40.24	17.64	-57.88	peak

Note: 1. Measurement = Reading Level + Correct Factor  
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.  
 3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



**490 kHz ~ 30 MHz**

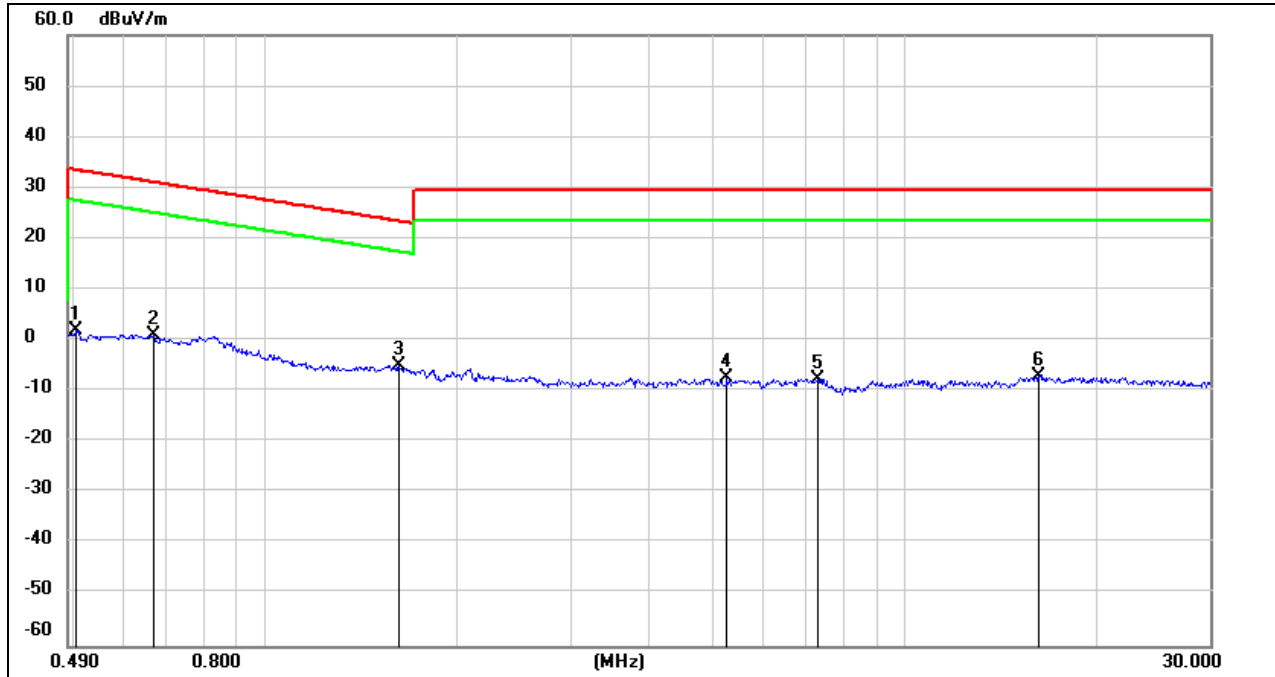

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5039	63.93	-62.07	1.86	33.56	-31.70	peak
2	0.6671	63.25	-62.10	1.15	31.12	-29.97	peak
3	1.6149	57.12	-62.00	-4.88	23.44	-28.32	peak
4	5.2705	54.04	-61.45	-7.41	29.54	-36.95	peak
5	7.3361	53.58	-61.17	-7.59	29.54	-37.13	peak
6	16.1890	53.95	-60.97	-7.02	29.54	-36.56	peak

- Note: 1. Measurement = Reading Level + Correct Factor  
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.  
 3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

## 9. AC POWER LINE CONDUCTED EMISSIONS


### LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

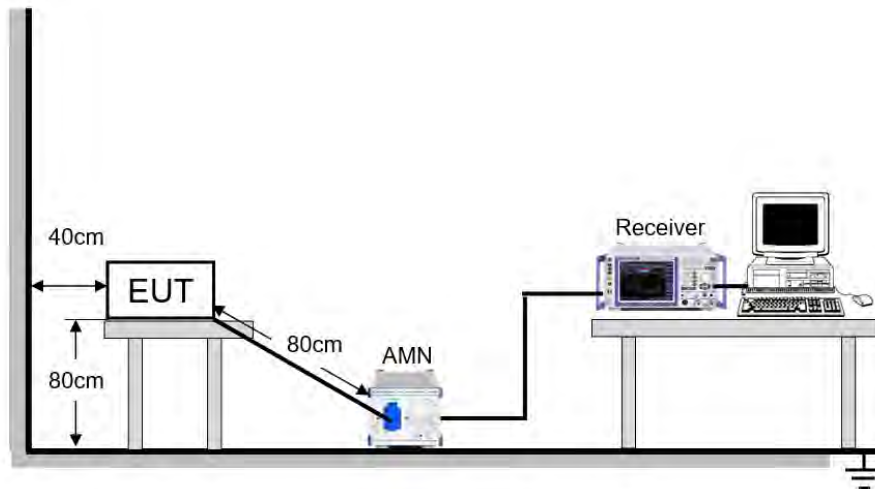

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.


**TEST ENVIRONMENT**

Temperature	21.6 °C	Relative Humidity	59.5 %
Atmosphere Pressure	101 kPa	Test Voltage	AC120 V,60 Hz

**RESULTS**

### 9.1. 802.11n HT40 MIMO MODE

#### LINE L RESULTS (HIGH CHANNEL, WORST-CASE CONFIGURATION)

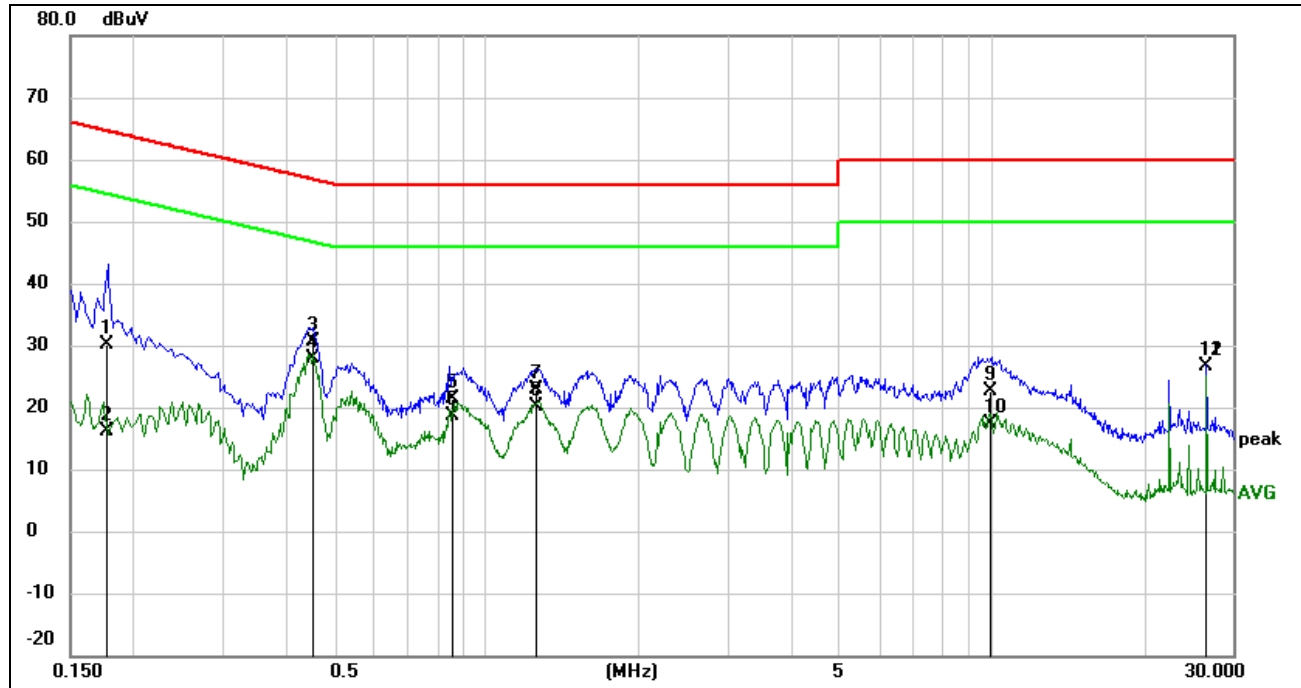

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1765	20.43	9.59	30.02	64.65	-34.63	QP
2	0.1765	6.64	9.59	16.23	54.65	-38.42	AVG
3	0.4532	20.94	9.60	30.54	56.82	-26.28	QP
4	0.4532	18.19	9.60	27.79	46.82	-19.03	AVG
5	0.8565	11.75	9.60	21.35	56.00	-34.65	QP
6	0.8565	9.10	9.60	18.70	46.00	-27.30	AVG
7	1.2547	13.27	9.61	22.88	56.00	-33.12	QP
8	1.2547	10.53	9.61	20.14	46.00	-25.86	AVG
9	9.9240	13.05	9.62	22.67	60.00	-37.33	QP
10	9.9240	7.88	9.62	17.50	50.00	-32.50	AVG
11	26.6238	16.71	9.87	26.58	60.00	-33.42	QP
12	26.6238	16.78	9.87	26.65	50.00	-23.35	AVG


Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

**LINE N RESULTS (HIGH CHANNEL, WORST-CASE CONFIGURATION)**

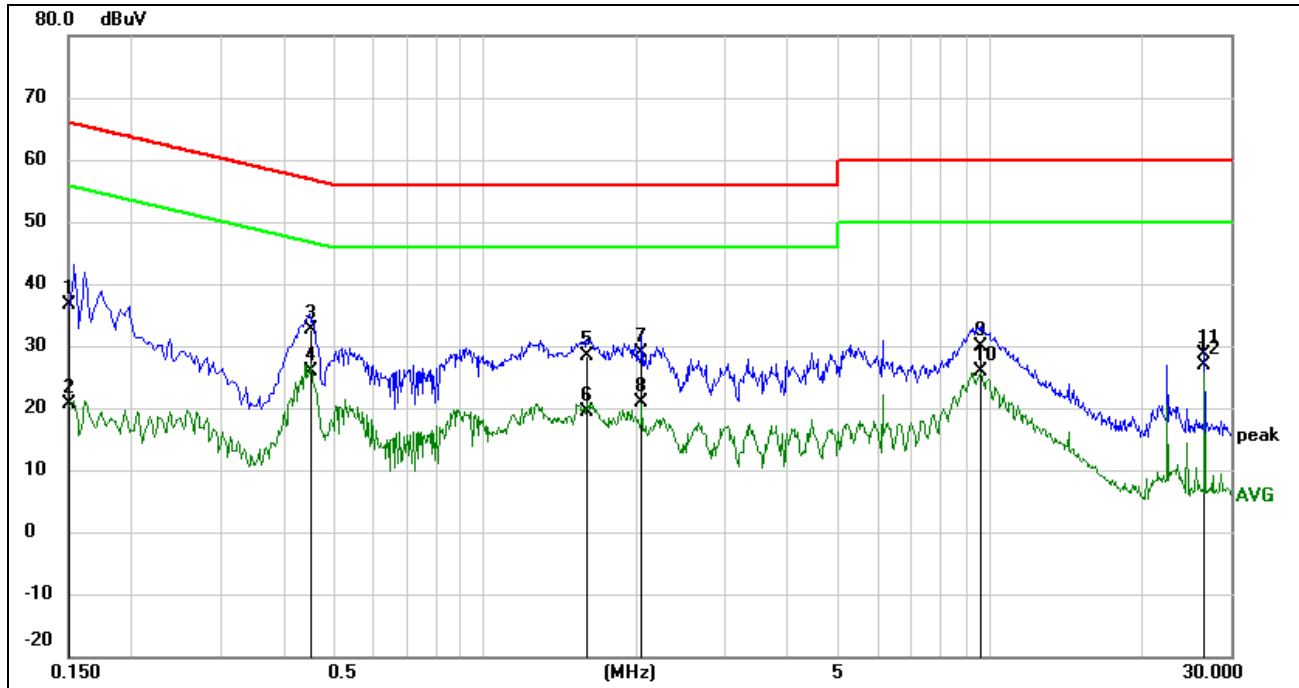

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1504	27.05	9.59	36.64	65.98	-29.34	QP
2	0.1504	11.15	9.59	20.74	55.98	-35.24	AVG
3	0.4533	23.07	9.60	32.67	56.81	-24.14	QP
4	0.4533	16.31	9.60	25.91	46.81	-20.90	AVG
5	1.5984	18.85	9.62	28.47	56.00	-27.53	QP
6	1.5984	9.70	9.62	19.32	46.00	-26.68	AVG
7	2.0480	19.27	9.63	28.90	56.00	-27.10	QP
8	2.0480	11.35	9.63	20.98	46.00	-25.02	AVG
9	9.5717	20.33	9.62	29.95	60.00	-30.05	QP
10	9.5717	16.14	9.62	25.76	50.00	-24.24	AVG
11	26.6238	18.83	9.77	28.60	60.00	-31.40	QP
12	26.6238	17.19	9.77	26.96	50.00	-23.04	AVG

- Note: 1. Result = Reading +Correct Factor.  
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).  
 4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes and channels have been tested, but only the worst data was recorded in the report.



## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies



## 11. Appendix A

### 11.1. Appendix A: DTS Bandwidth

#### 11.1.1. Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.160	2406.920	2417.080	0.5	PASS
	Ant2	2412	10.160	2406.920	2417.080	0.5	PASS
	Ant1	2437	10.160	2431.920	2442.080	0.5	PASS
	Ant2	2437	10.160	2431.920	2442.080	0.5	PASS
	Ant1	2462	10.160	2456.920	2467.080	0.5	PASS
	Ant2	2462	10.160	2456.920	2467.080	0.5	PASS
11G	Ant1	2412	16.640	2403.680	2420.320	0.5	PASS
	Ant2	2412	16.640	2403.680	2420.320	0.5	PASS
	Ant1	2437	16.640	2428.680	2445.320	0.5	PASS
	Ant2	2437	16.640	2428.680	2445.320	0.5	PASS
	Ant1	2462	16.640	2453.680	2470.320	0.5	PASS
	Ant2	2462	16.640	2453.680	2470.320	0.5	PASS
11N20MIMO	Ant1	2412	17.800	2403.080	2420.880	0.5	PASS
	Ant2	2412	17.800	2403.080	2420.880	0.5	PASS
	Ant1	2437	17.840	2428.080	2445.920	0.5	PASS
	Ant2	2437	17.760	2428.120	2445.880	0.5	PASS
	Ant1	2462	17.840	2453.080	2470.920	0.5	PASS
	Ant2	2462	17.800	2453.080	2470.880	0.5	PASS
11N40MIMO	Ant1	2422	36.560	2403.760	2440.320	0.5	PASS
	Ant2	2422	36.640	2403.680	2440.320	0.5	PASS
	Ant1	2437	36.560	2418.760	2455.320	0.5	PASS
	Ant2	2437	36.560	2418.760	2455.320	0.5	PASS
	Ant1	2452	36.560	2433.760	2470.320	0.5	PASS
	Ant2	2452	36.560	2433.760	2470.320	0.5	PASS

### 11.1.2. Test Graphs








11B Ant2 2437




11B Ant1 2462

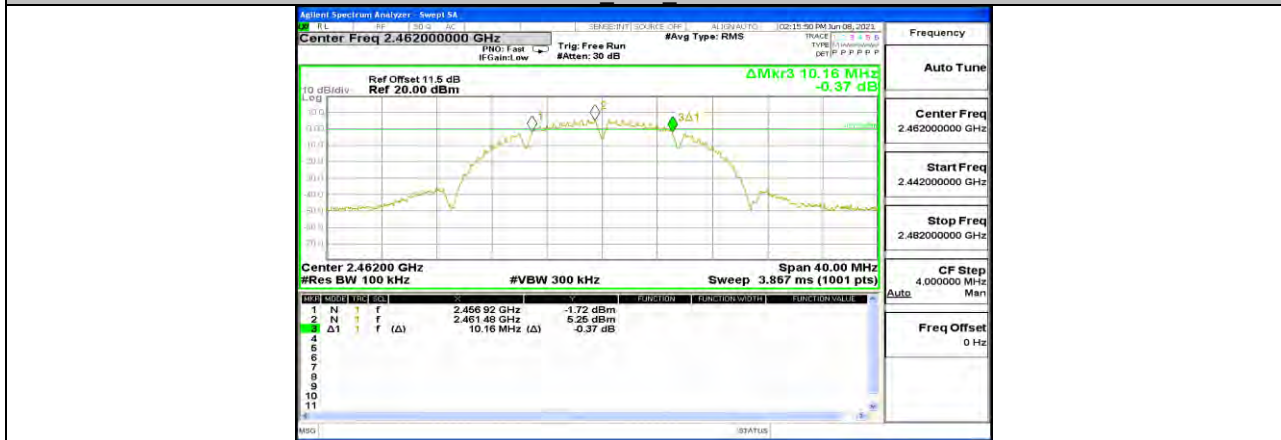

11B Ant2 2462



11G Ant1 2412

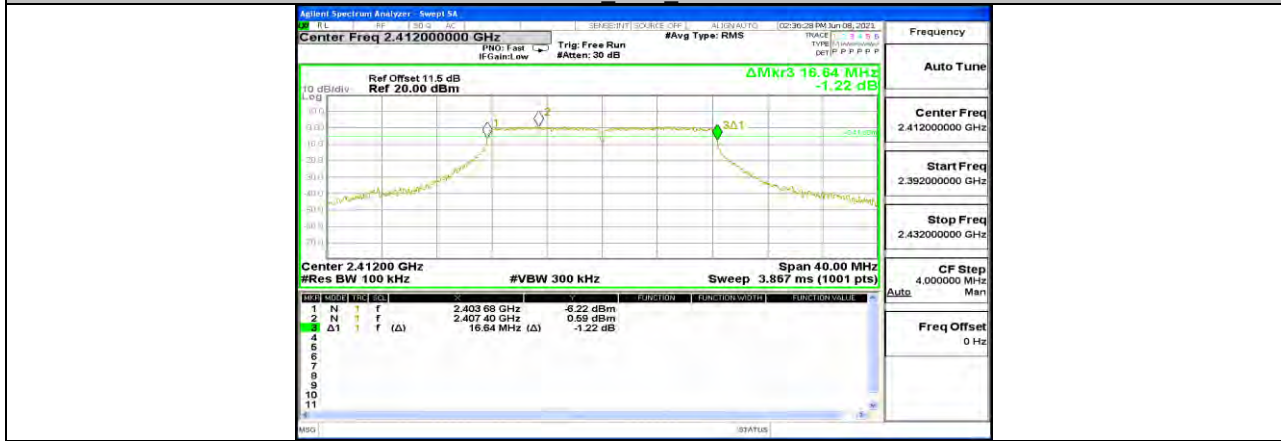


11G Ant2 2412



11G Ant1 2437



11G Ant2 2437

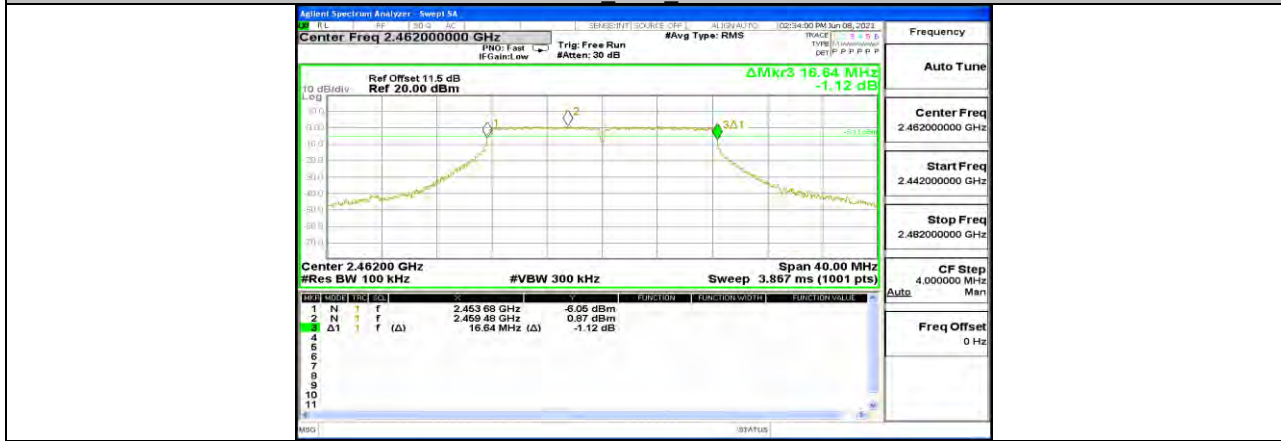


11G Ant1 2462




11G Ant2 2462



11N20MIMO Ant1 2412

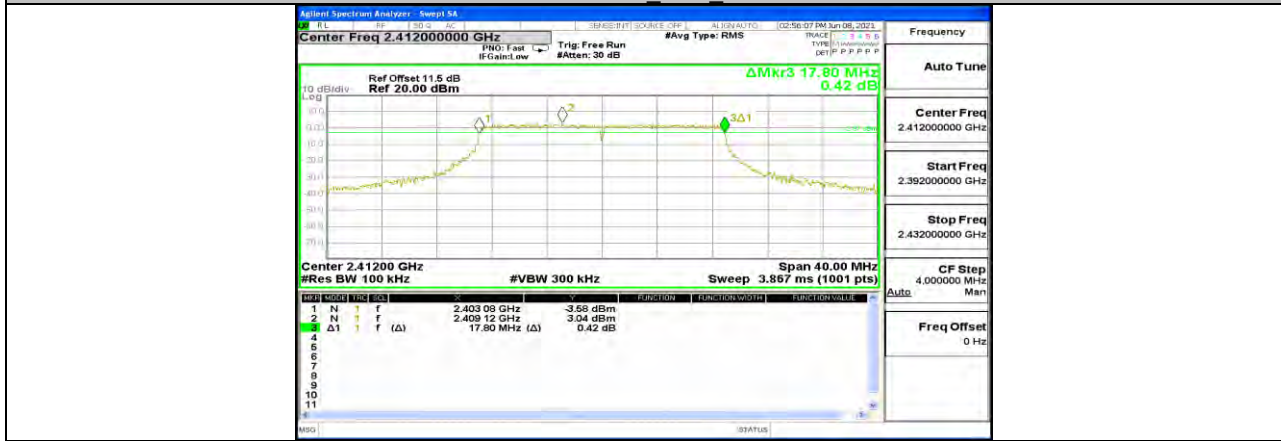

11N20MIMO Ant2 2412

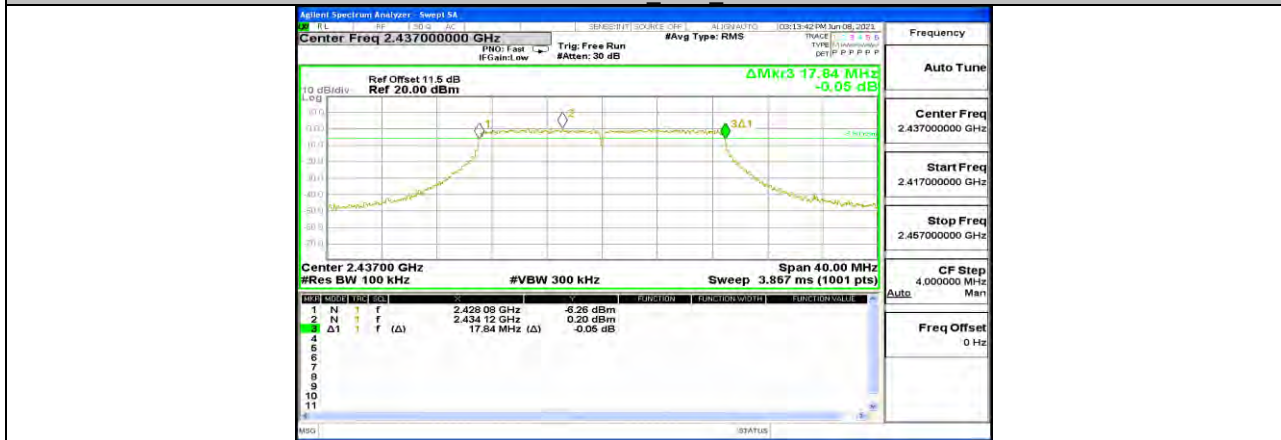


11N20MIMO Ant1 2437



11N20MIMO Ant2 2437



11N20MIMO Ant1 2462

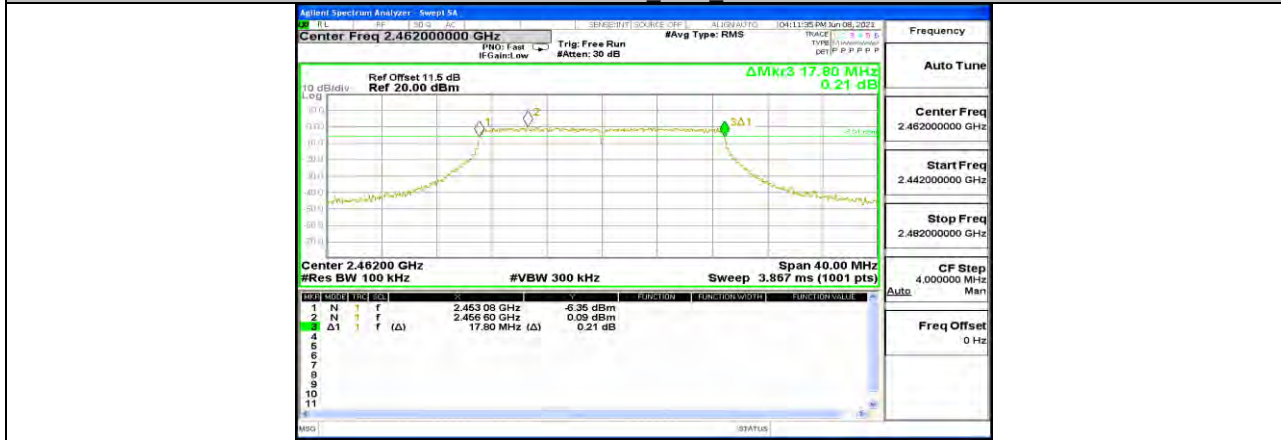


11N20MIMO Ant2 2462



11N40MIMO Ant1 2422



11N40MIMO Ant2 2422

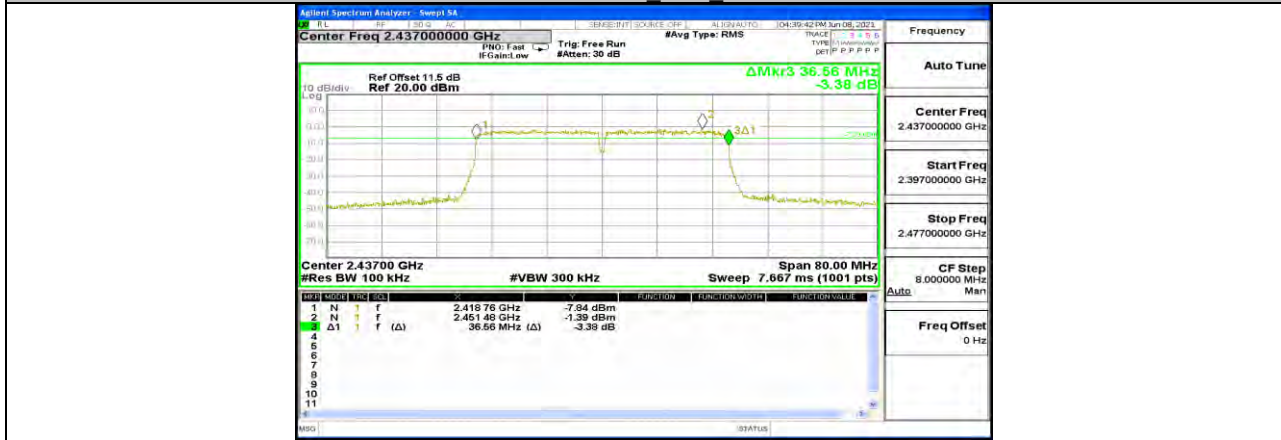

11N40MIMO Ant1 2437



11N40MIMO Ant2 2437



11N40MIMO Ant1 2452



11N40MIMO Ant2 2452

**11.2. Appendix B: Occupied Channel Bandwidth****11.2.1. Test Result**


Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	14.973	2404.479	2419.452	PASS
	Ant2	2412	14.919	2404.497	2419.416	PASS
	Ant1	2437	14.967	2429.474	2444.441	PASS
	Ant2	2437	14.912	2429.514	2444.426	PASS
	Ant1	2462	14.975	2454.460	2469.435	PASS
	Ant2	2462	14.918	2454.505	2469.423	PASS
11G	Ant1	2412	17.157	2403.271	2420.428	PASS
	Ant2	2412	17.152	2403.259	2420.411	PASS
	Ant1	2437	17.153	2428.263	2445.416	PASS
	Ant2	2437	17.143	2428.271	2445.414	PASS
	Ant1	2462	17.147	2453.261	2470.408	PASS
	Ant2	2462	17.071	2453.341	2470.412	PASS
11N20MIMO	Ant1	2412	18.075	2402.935	2421.010	PASS
	Ant2	2412	18.126	2402.890	2421.016	PASS
	Ant1	2437	18.049	2427.936	2445.985	PASS
	Ant2	2437	18.088	2427.911	2445.999	PASS
	Ant1	2462	18.054	2452.920	2470.974	PASS
	Ant2	2462	18.073	2452.913	2470.986	PASS
11N40MIMO	Ant1	2422	36.147	2403.966	2440.113	PASS
	Ant2	2422	36.159	2403.946	2440.105	PASS
	Ant1	2437	36.115	2418.958	2455.073	PASS
	Ant2	2437	36.132	2418.958	2455.090	PASS
	Ant1	2452	36.099	2433.965	2470.064	PASS
	Ant2	2452	36.152	2433.950	2470.102	PASS






### 11.2.2. Test Graphs




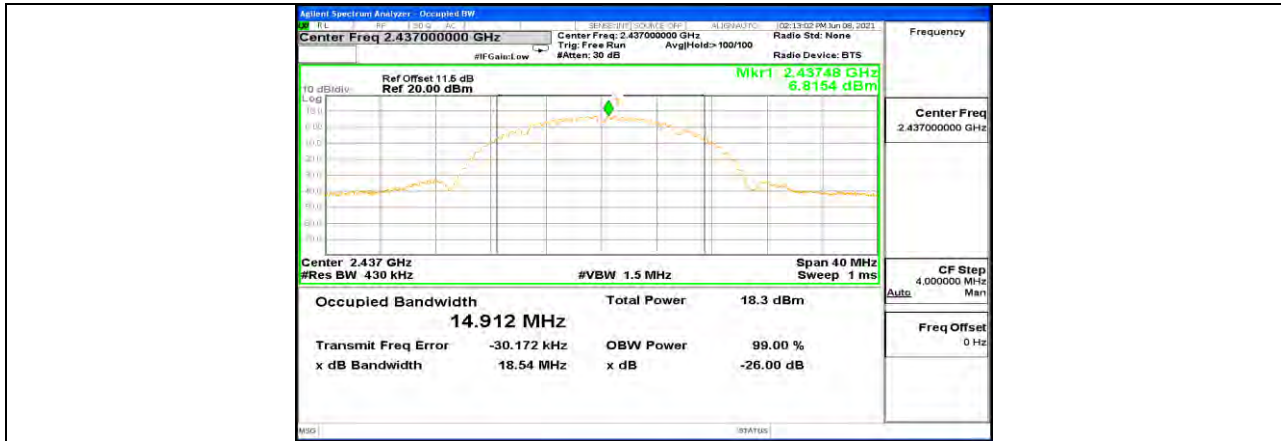




11B Ant2 2437



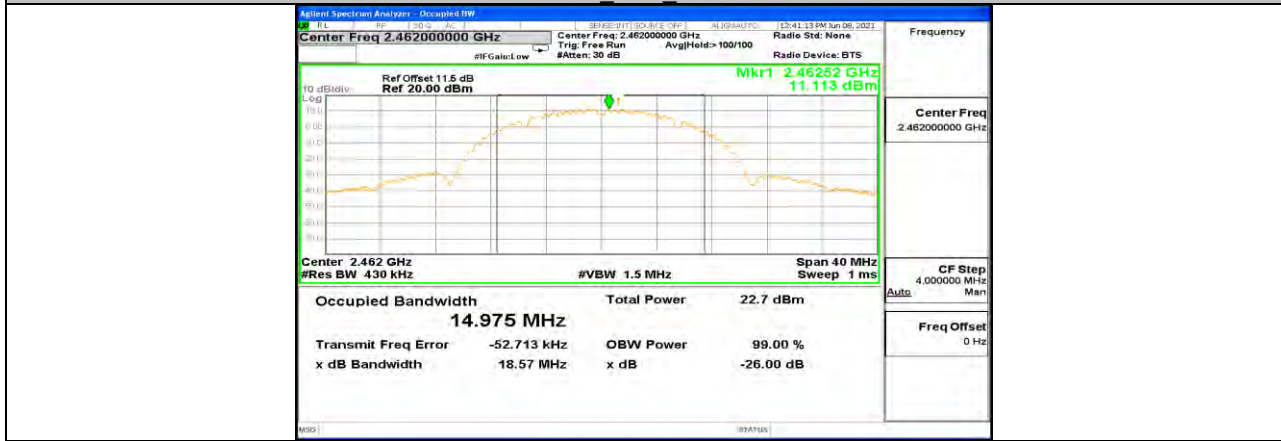



11B Ant1 2462

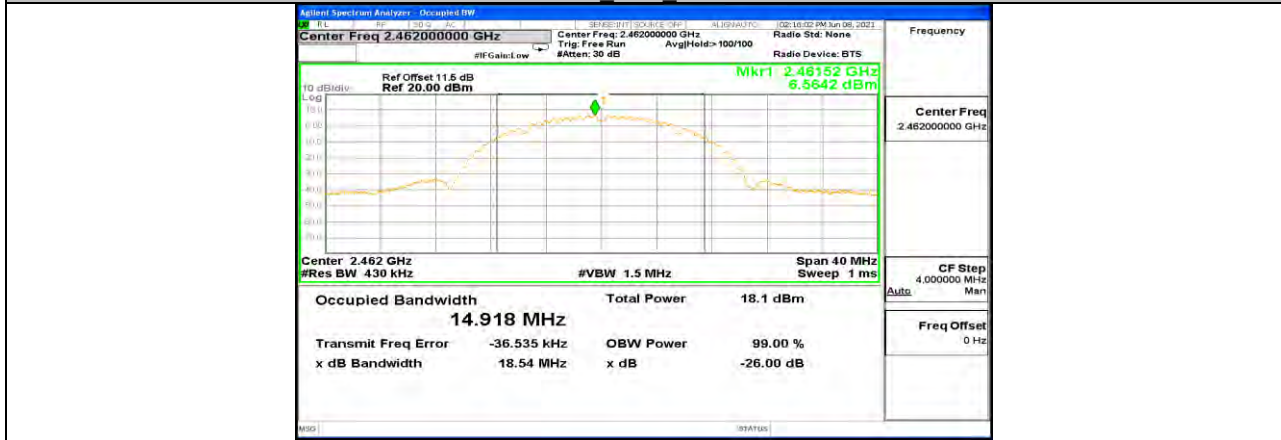


11B Ant2 2462

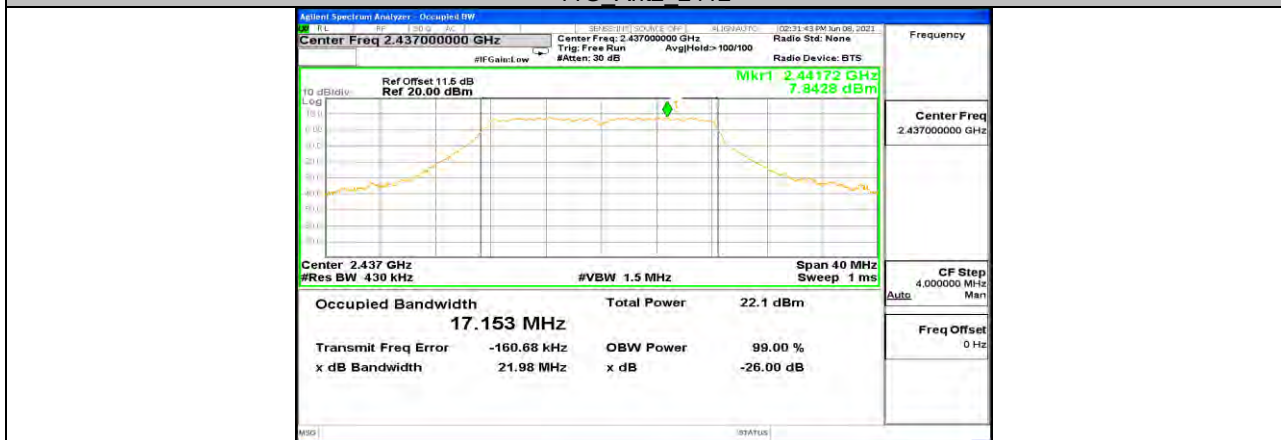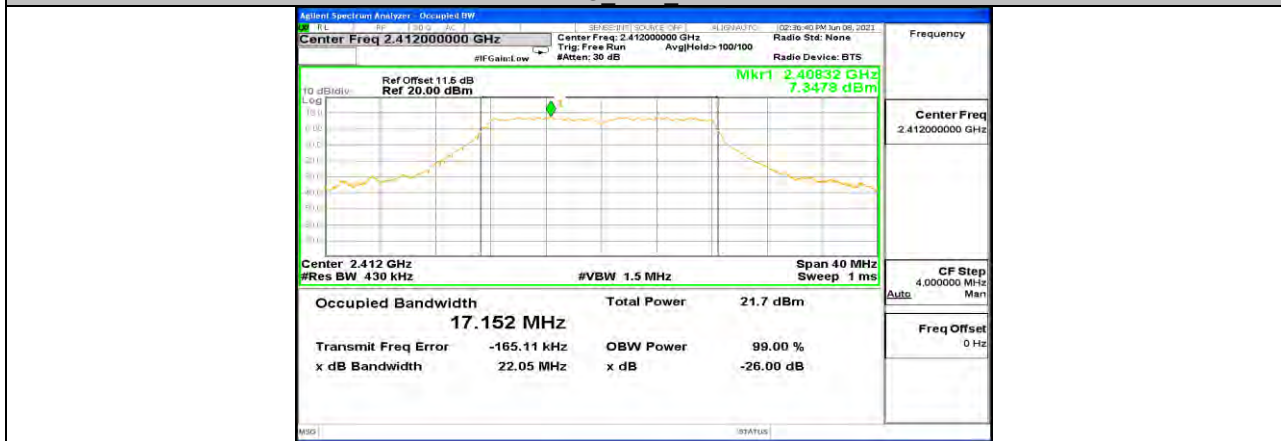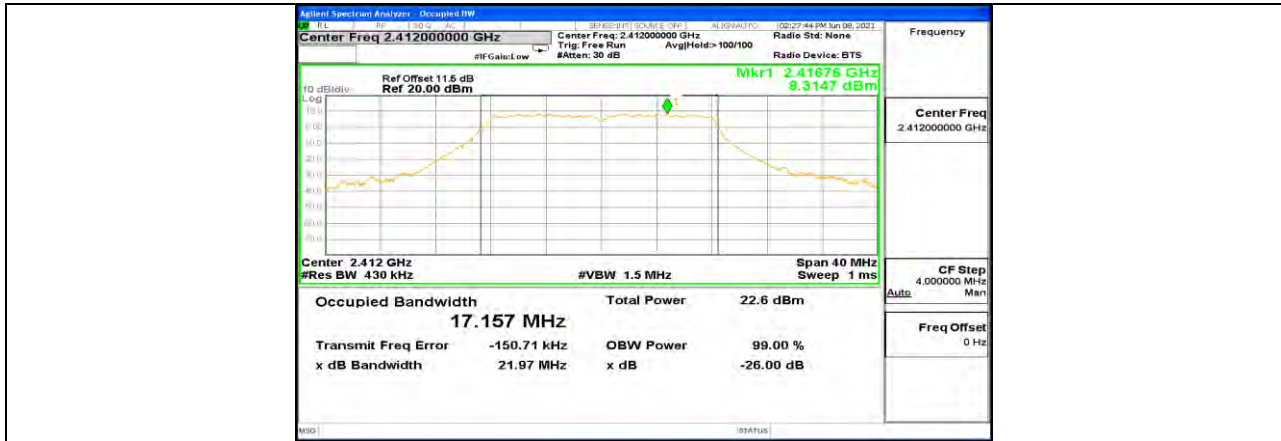

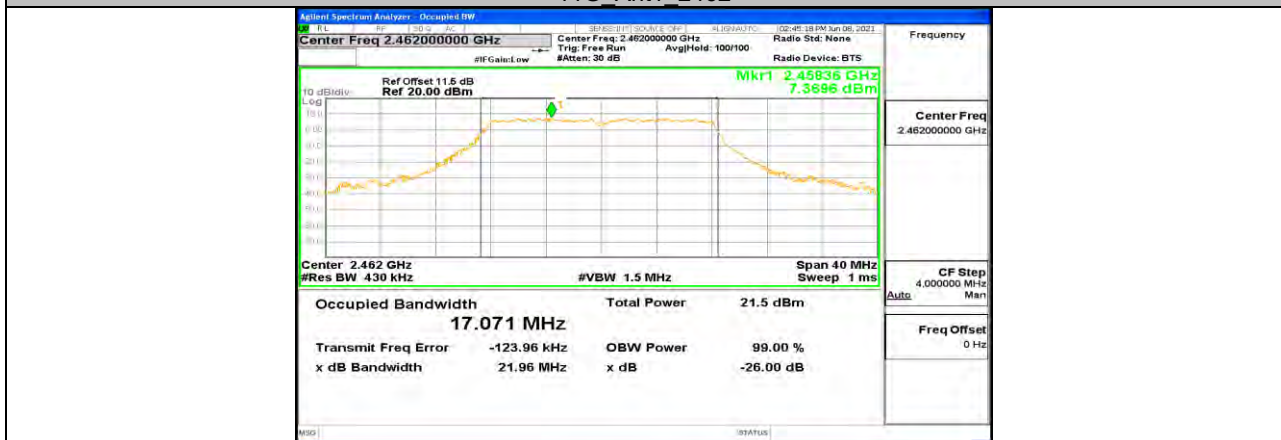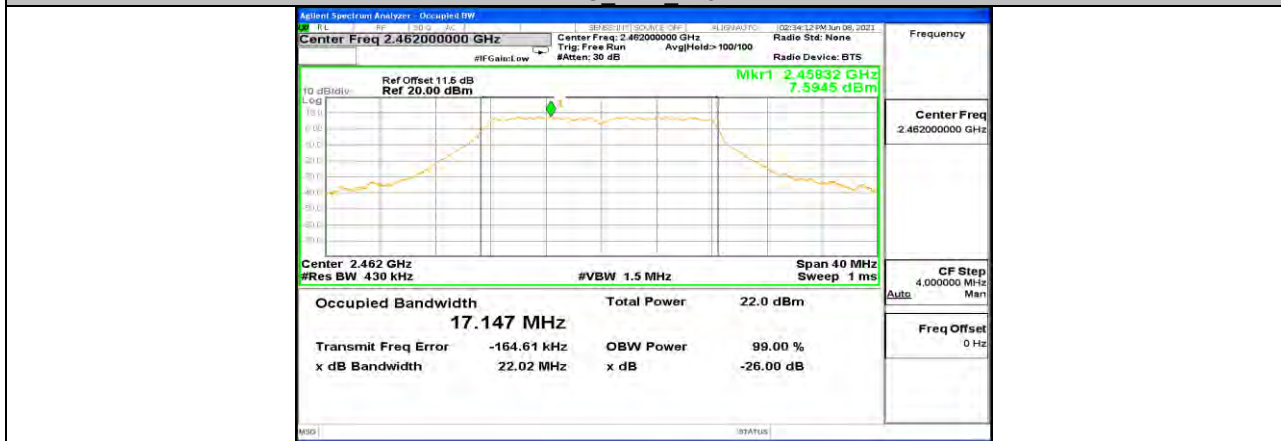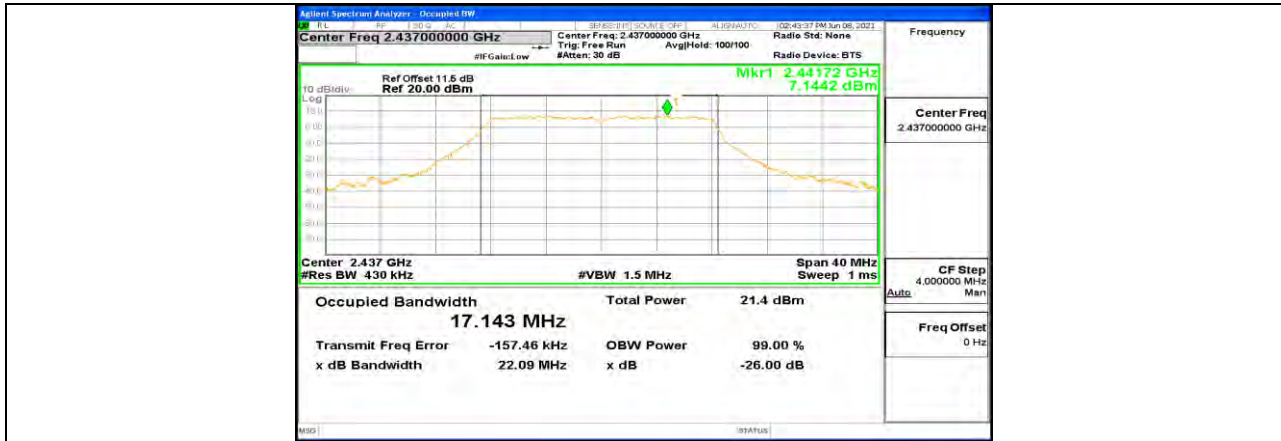


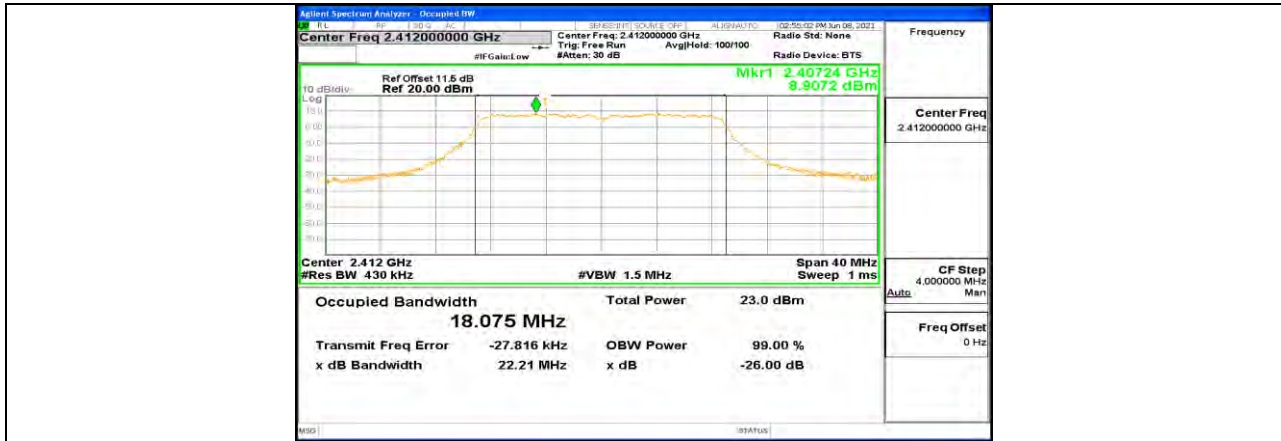




11N20MIMO Ant1 2412

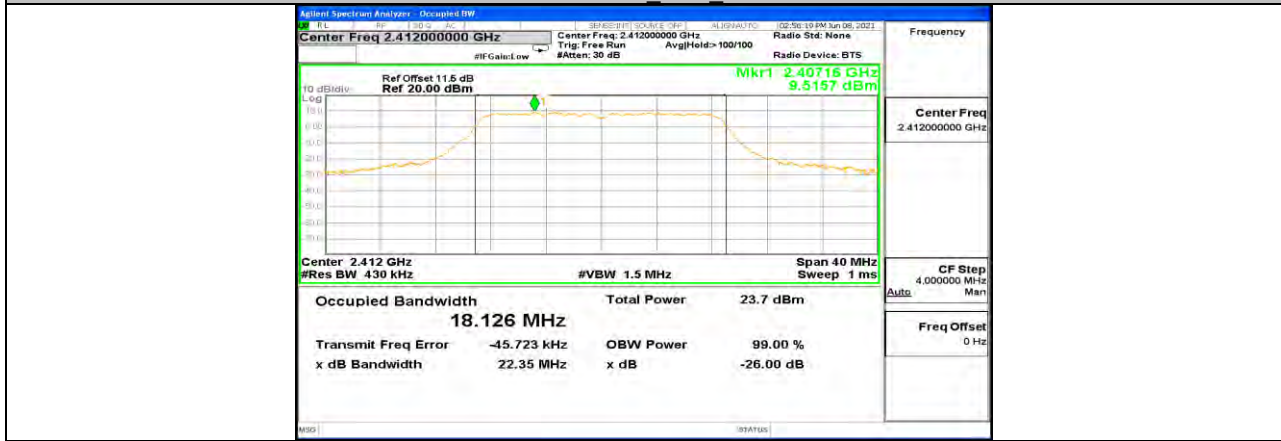


11N20MIMO Ant2 2412

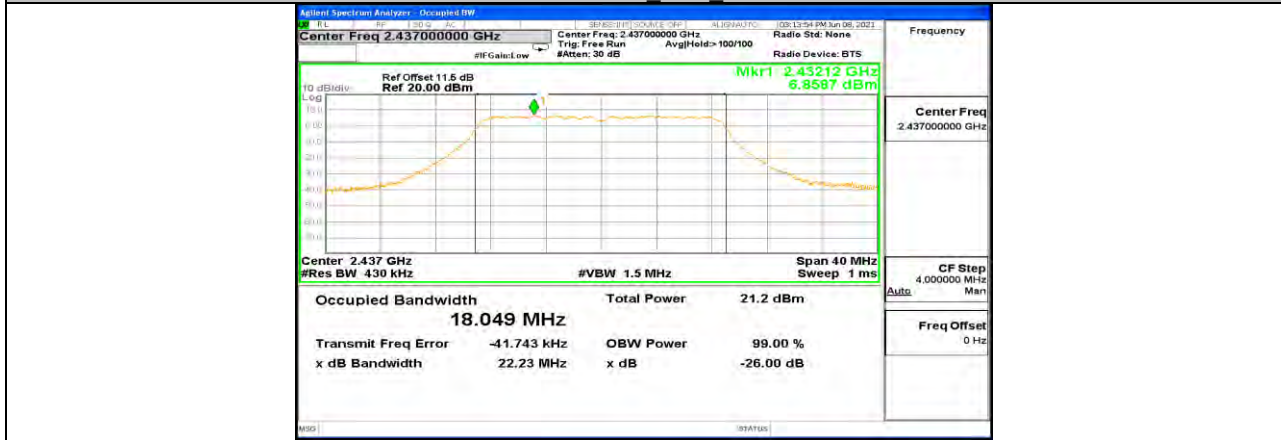


11N20MIMO Ant1 2437

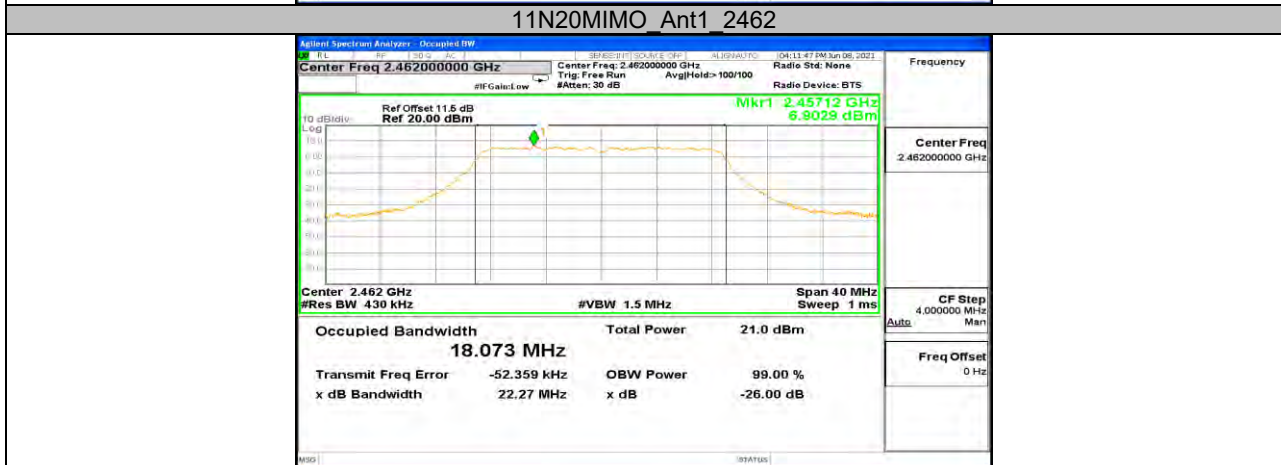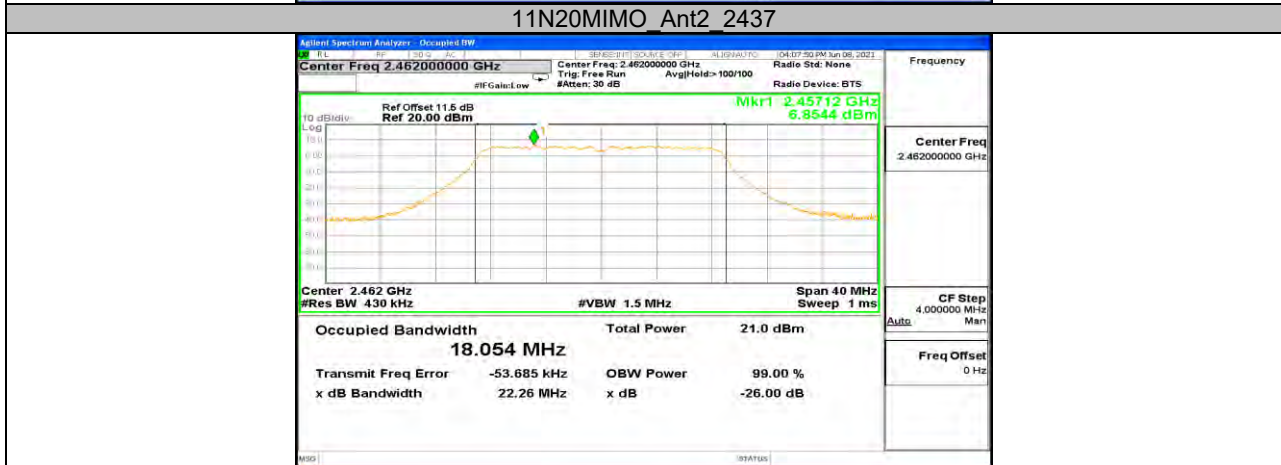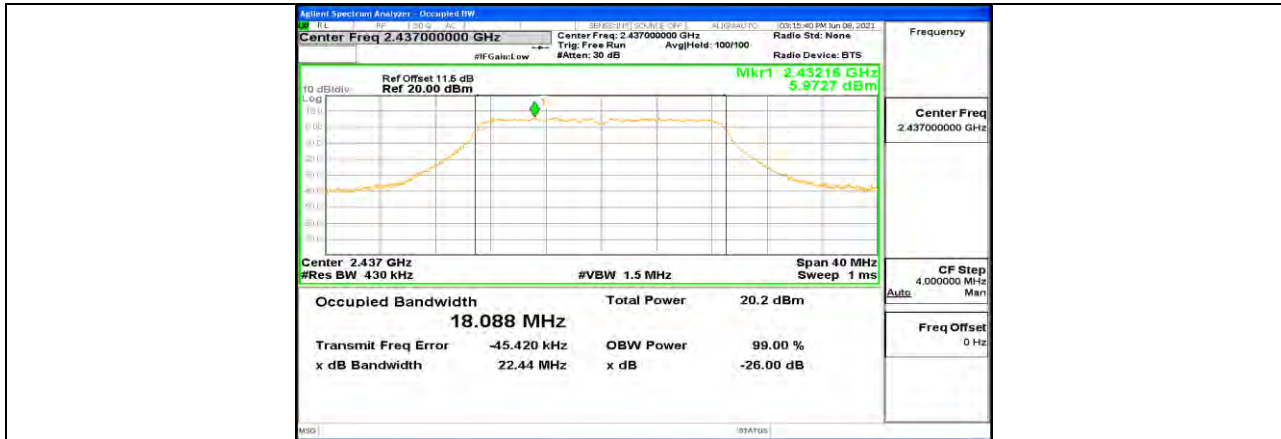


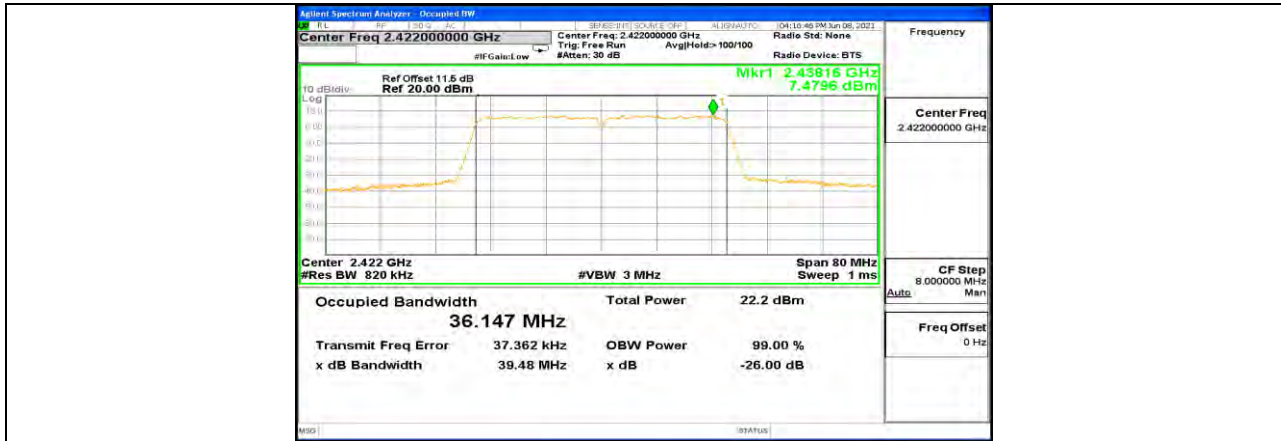


11N40MIMO Ant1 2422

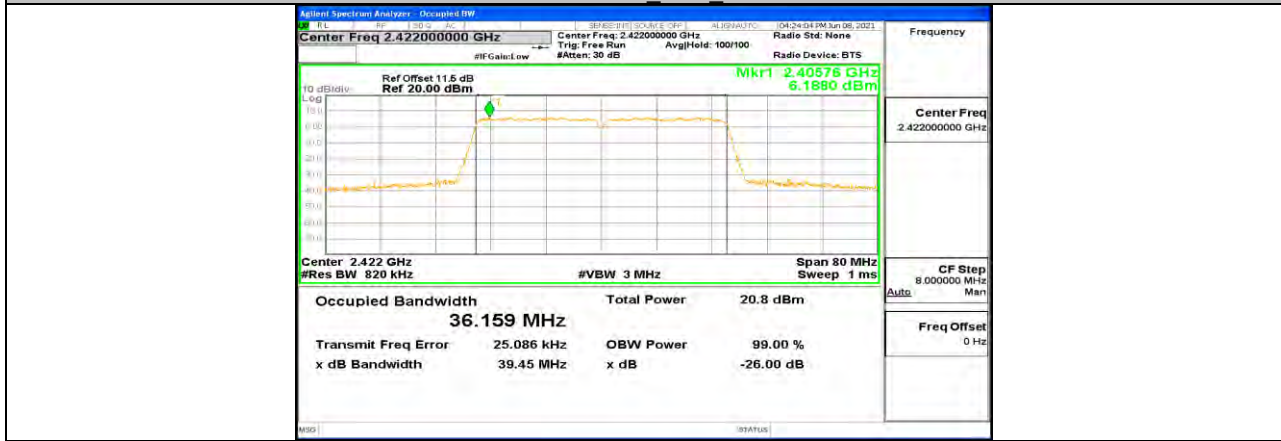


11N40MIMO Ant2 2422

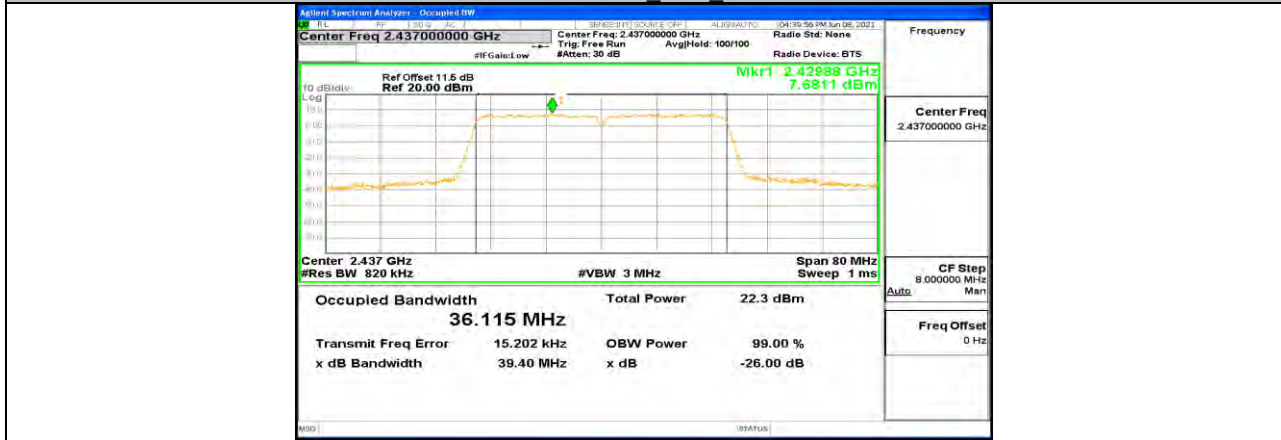


11N40MIMO Ant1 2437

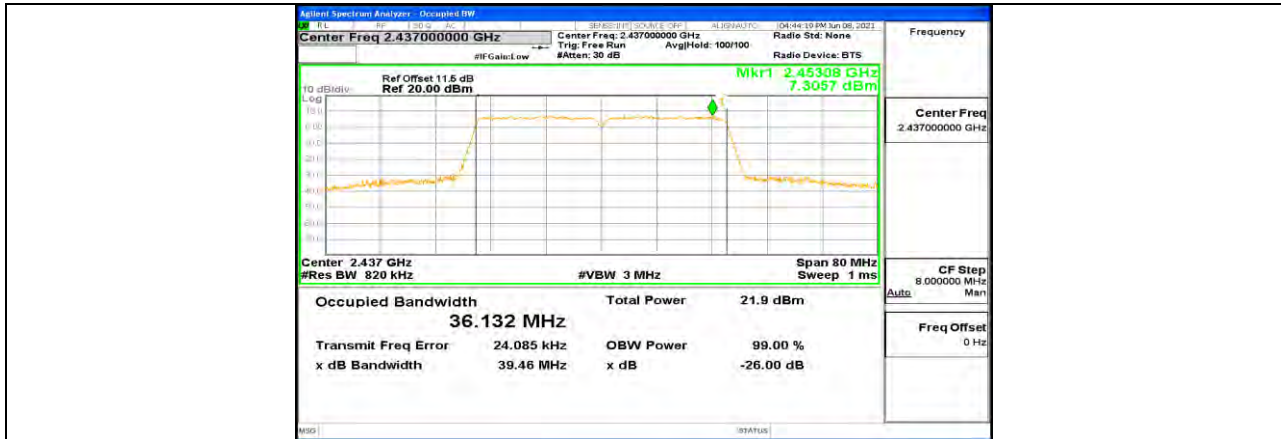

11N40MIMO Ant2 2437

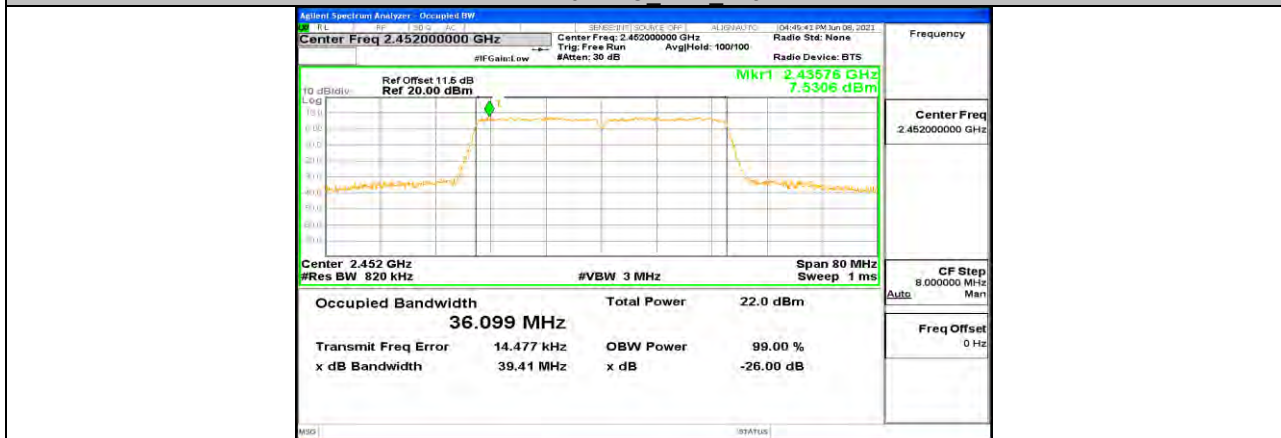

11N40MIMO Ant1 2452

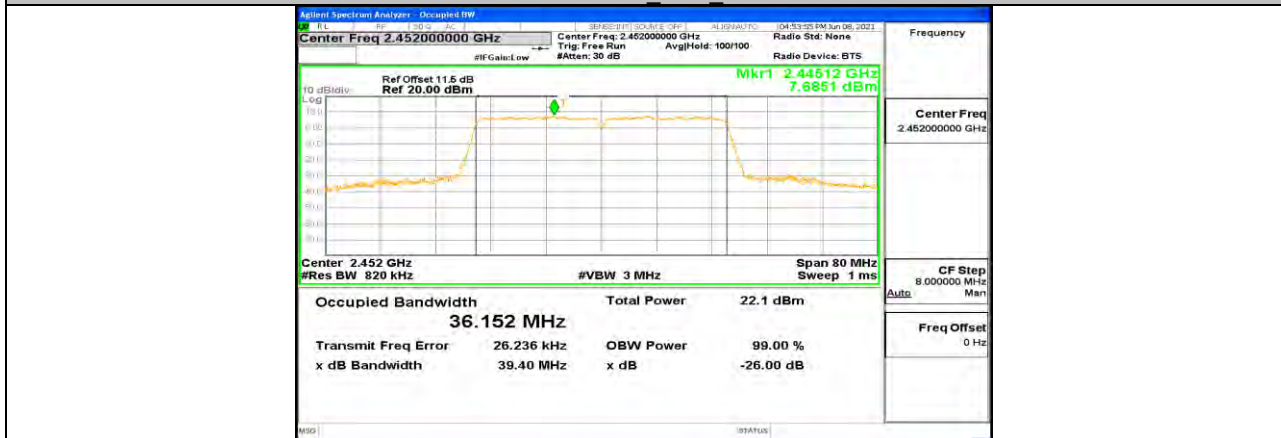

11N40MIMO Ant2 2452



**11.3. Appendix C: Maximum conducted AVG output power****11.3.1. Test Result**

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	16.99	<=30	PASS
	Ant2	2412	16.26	<=30	PASS
	Ant1	2437	<b>17.06</b>	<=30	PASS
	Ant2	2437	16.06	<=30	PASS
	Ant1	2462	16.84	<=30	PASS
	Ant2	2462	15.82	<=30	PASS
11G	Ant1	2412	14.91	<=30	PASS
	Ant2	2412	14.05	<=30	PASS
	Ant1	2437	<b>15.36</b>	<=30	PASS
	Ant2	2437	14.70	<=30	PASS
	Ant1	2462	15.13	<=30	PASS
	Ant2	2462	14.91	<=30	PASS
11N20MIMO	Ant1	2412	13.97	<=30	PASS
	Ant2	2412	13.10	<=30	PASS
	total	2412	16.6	<=30	PASS
	Ant1	2437	14.26	<=30	PASS
	Ant2	2437	13.50	<=30	PASS
	total	2437	16.9	<=30	PASS
	Ant1	2462	14.01	<=30	PASS
	Ant2	2462	14.05	<=30	PASS
total	2462	<b>17.0</b>	<=30	PASS	
11N40MIMO	Ant1	2422	14.16	<=30	PASS
	Ant2	2422	13.05	<=30	PASS
	total	2422	16.7	<=30	PASS
	Ant1	2437	14.54	<=30	PASS
	Ant2	2437	14.12	<=30	PASS
	total	2437	17.3	<=30	PASS
	Ant1	2452	14.39	<=30	PASS
	Ant2	2452	14.46	<=30	PASS
total	2452	<b>17.4</b>	<=30	PASS	

Note: 1. Conducted Power=Meas. Level+ Correction Factor

2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.




**11.4. Appendix D: Maximum power spectral density**  
**11.4.1. Test Result**




Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-13.29	<=8	PASS
		2437	-13.11	<=8	PASS
		2462	-13.32	<=8	PASS
11G	Ant1	2412	-13.8	<=8	PASS
		2437	-13.33	<=8	PASS
		2462	-13.5	<=8	PASS
11N20MIMO	Ant1	2412	-13.92	<=8	PASS
	Ant2	2412	-14.72	<=8	PASS
	total	2412	-11.29	<=8	PASS
	Ant1	2437	-13.59	<=8	PASS
	Ant2	2437	-14.27	<=8	PASS
	total	2437	-10.91	<=8	PASS
	Ant1	2462	-13.68	<=8	PASS
	Ant2	2462	-13.75	<=8	PASS
	total	2462	-10.70	<=8	PASS
11N40MIMO	Ant1	2422	-14.72	<=8	PASS
	Ant2	2422	-15.86	<=8	PASS
	total	2422	-12.24	<=8	PASS
	Ant1	2437	-14.43	<=8	PASS
	Ant2	2437	-14.71	<=8	PASS
	total	2437	-11.56	<=8	PASS
	Ant1	2452	-14.55	<=8	PASS
	Ant2	2452	-14.37	<=8	PASS
	total	2452	-11.45	<=8	PASS


Note: For 802.11b & g modes, both antennas had been tested, only the worst data was recorded in the report.




### 11.4.2. Test Graphs

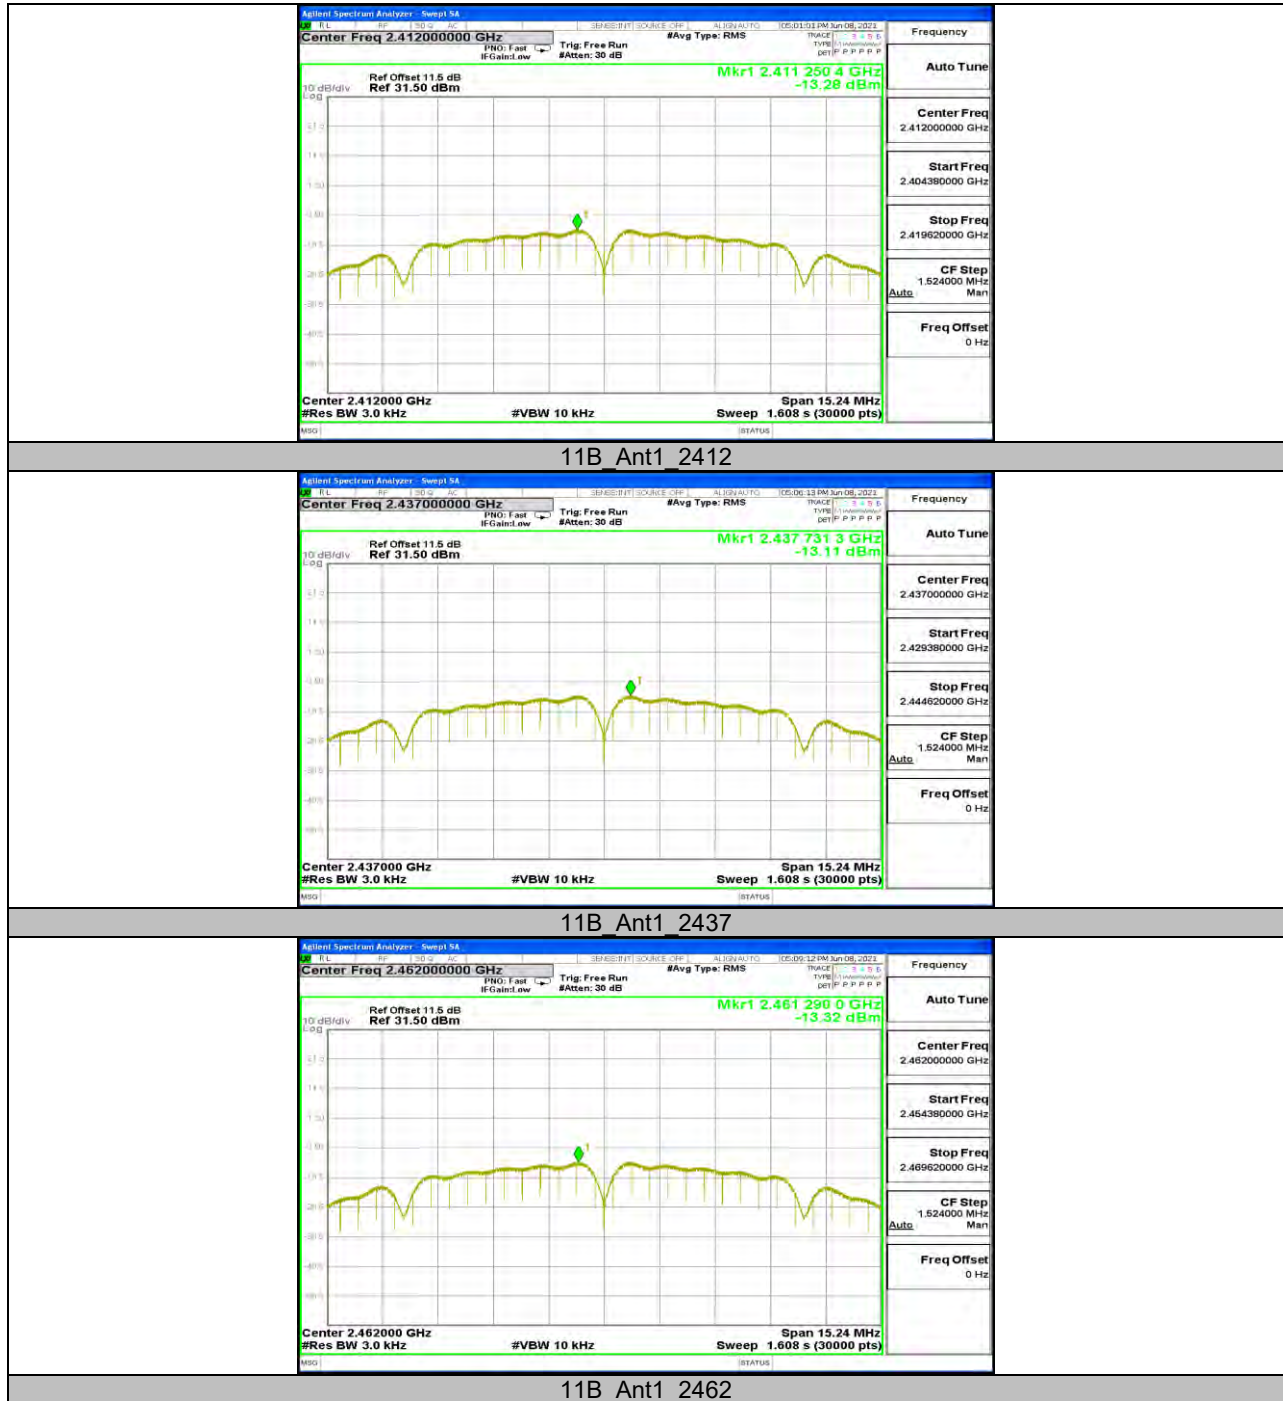

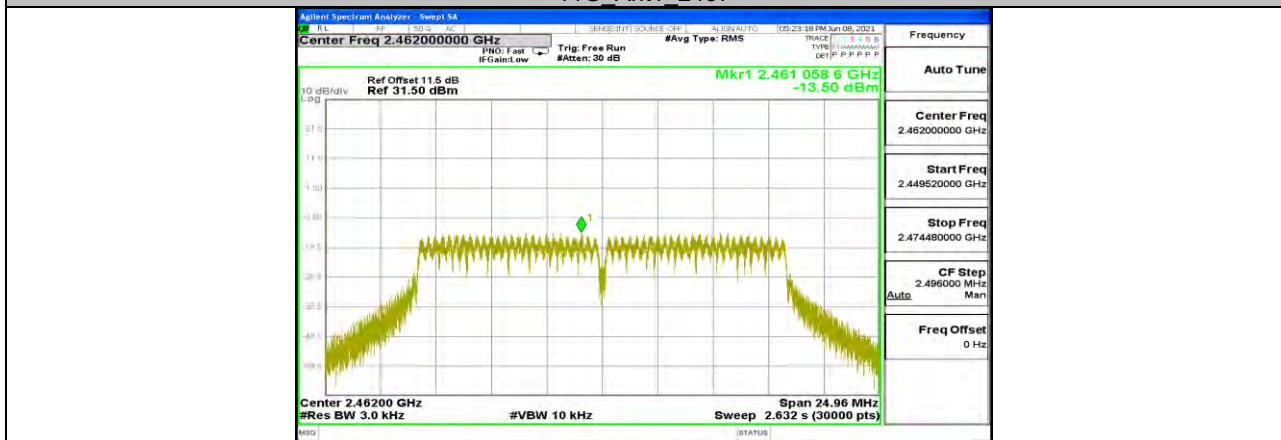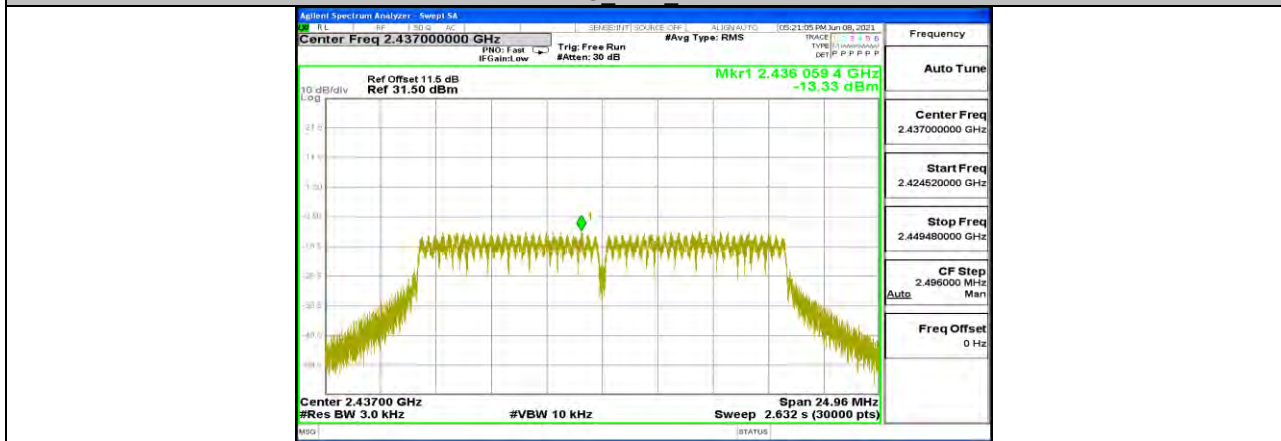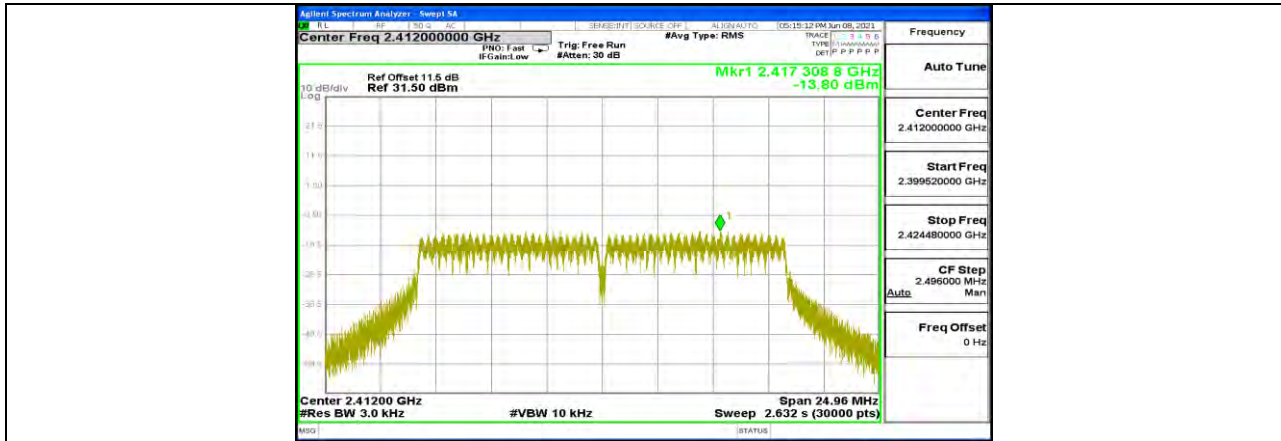


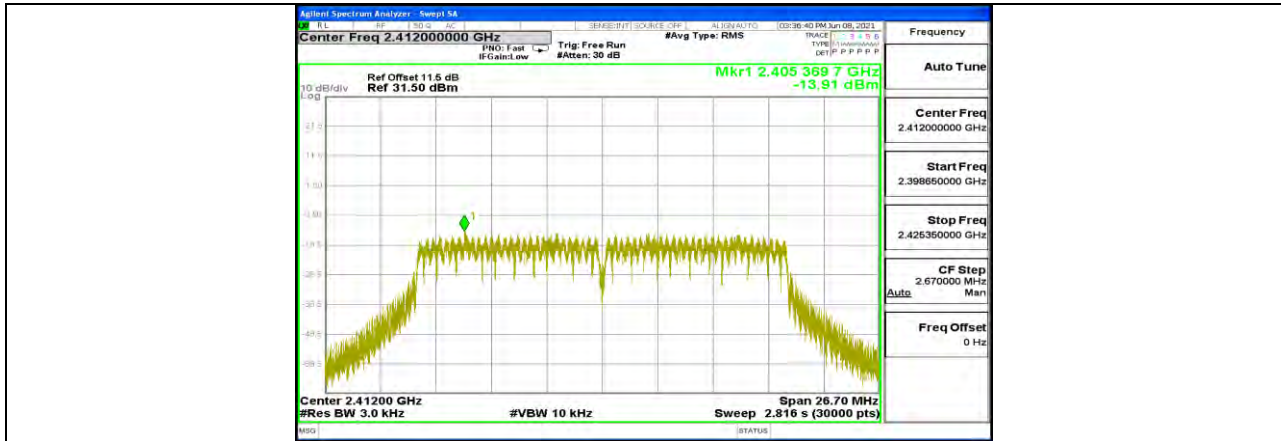


11N20MIMO Ant1 2412

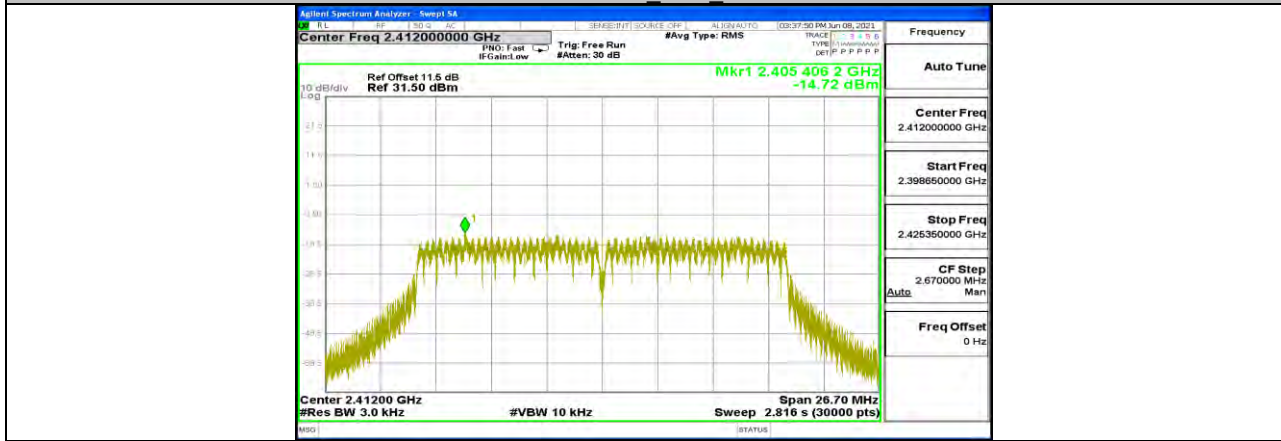


11N20MIMO Ant2 2412

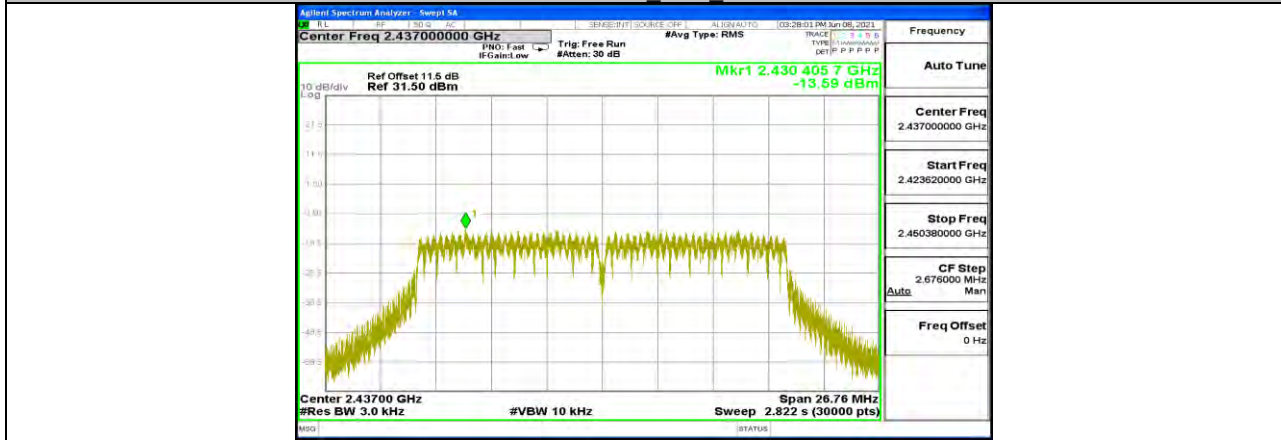


11N20MIMO Ant1 2437

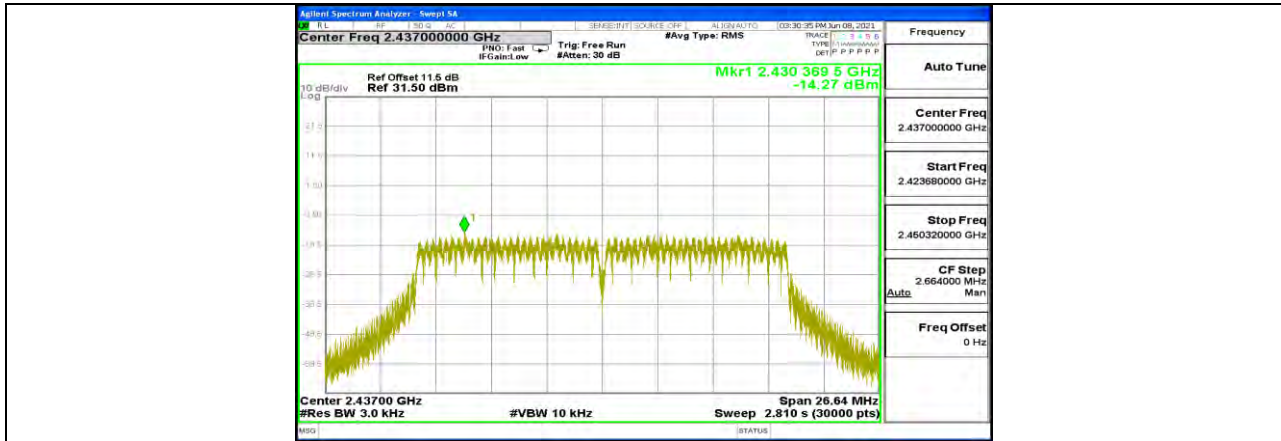


11N20MIMO Ant2 2437

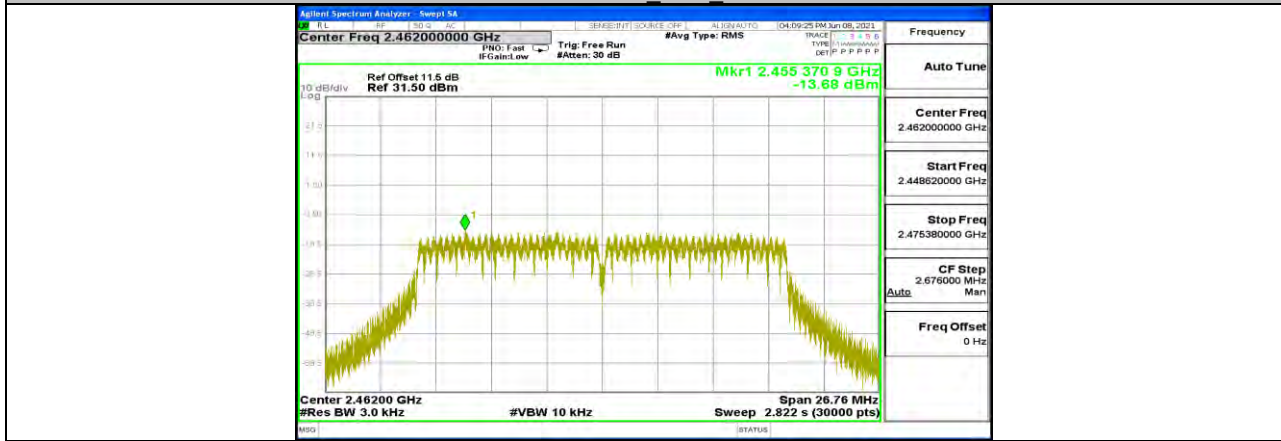


11N20MIMO Ant1 2462

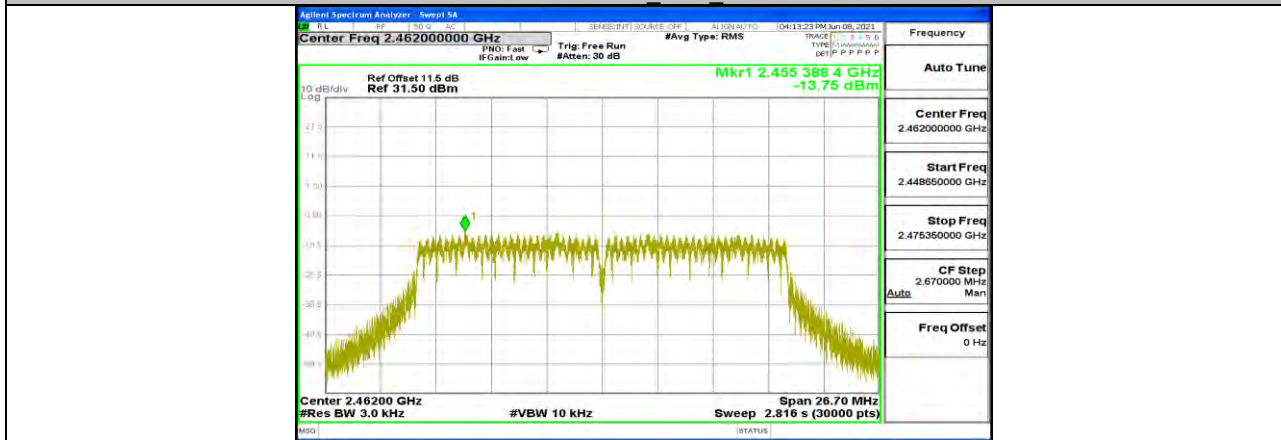


11N20MIMO Ant2 2462

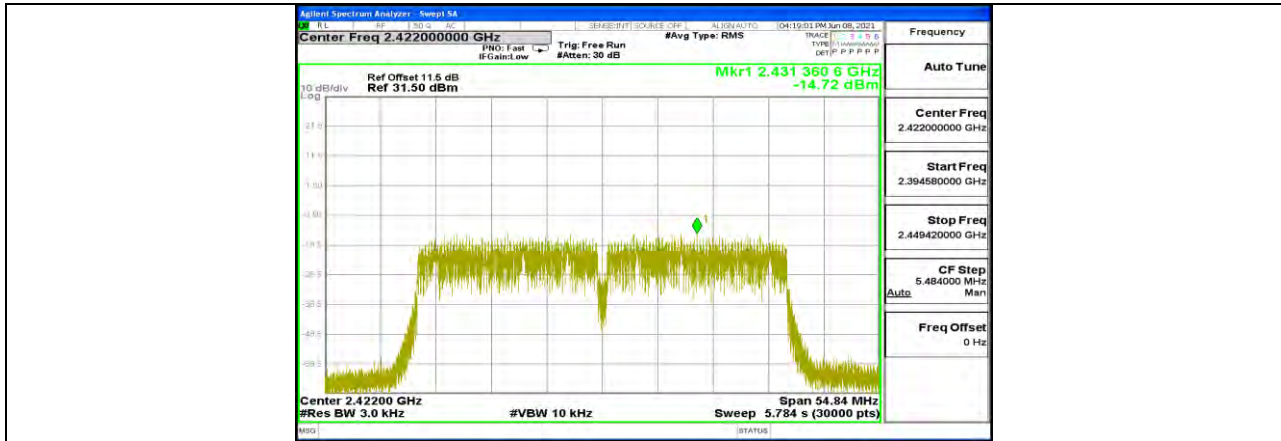


11N40MIMO Ant1 2422

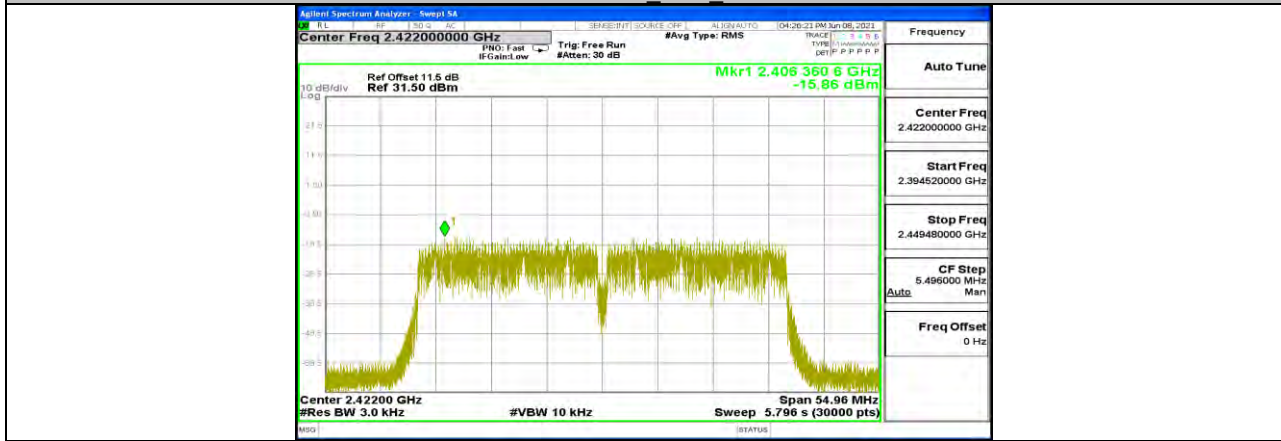


11N40MIMO Ant2 2422

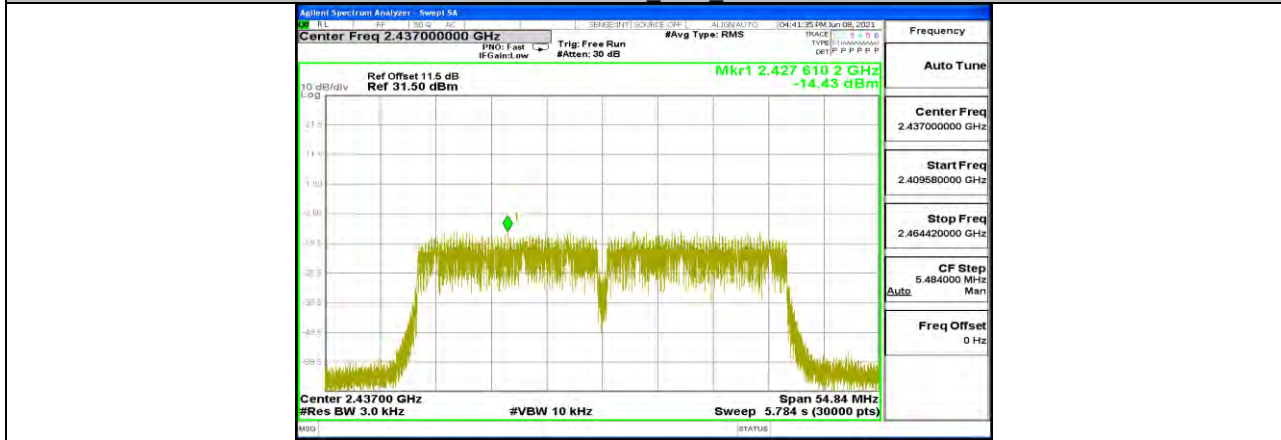


11N40MIMO Ant1 2437

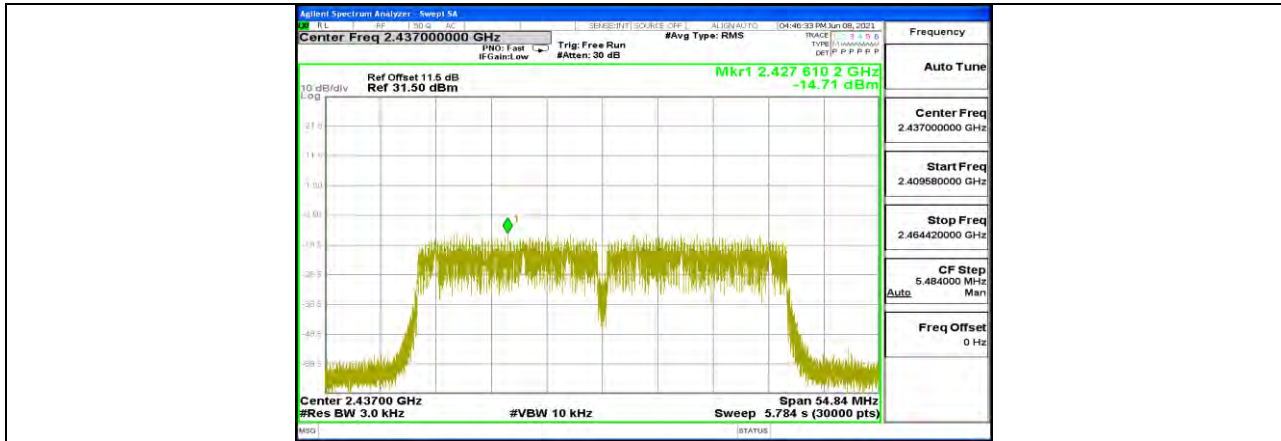

11N40MIMO Ant2 2437

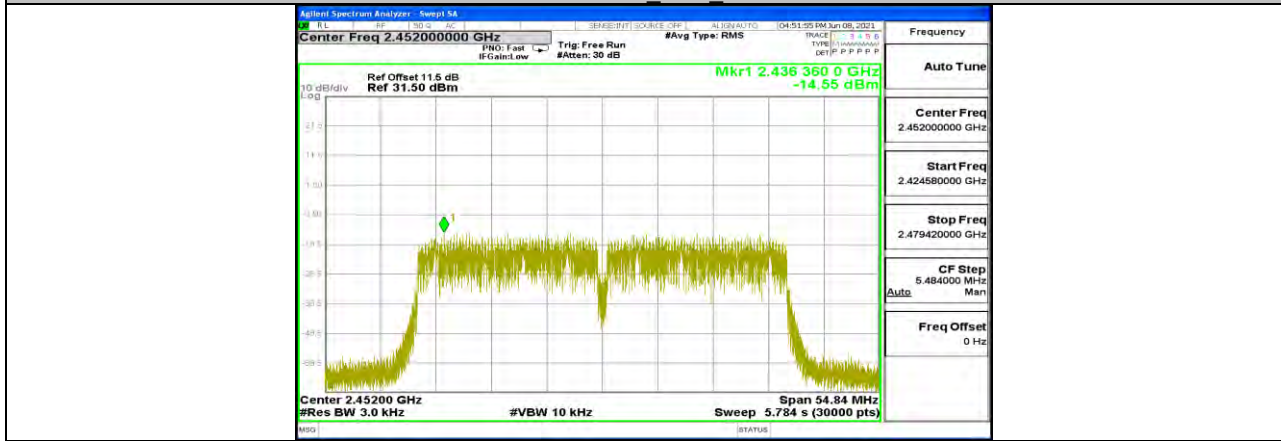

11N40MIMO Ant1 2452

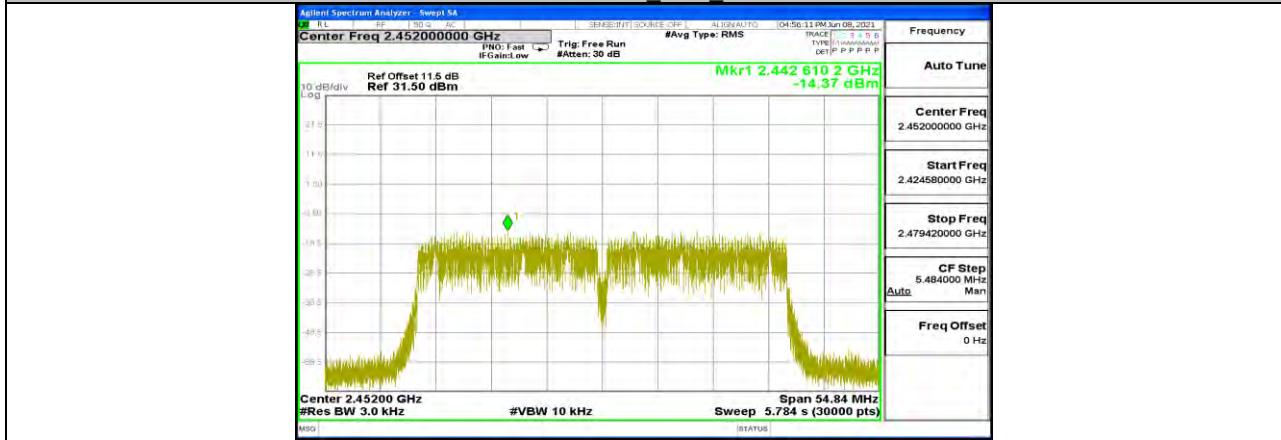

11N40MIMO Ant2 2452





## 11.5. Appendix E: Band edge measurements

### 11.5.1. Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	6.83	-34.59	<=-23.17	PASS
		High	2462	6.77	-46.34	<=-23.23	PASS
11G	Ant1	Low	2412	0.45	-32.54	<=-29.55	PASS
		High	2462	0.81	-45.36	<=-29.19	PASS
11N20MIMO	Ant1	Low	2412	0.21	-34.08	<=-29.79	PASS
	Ant2	Low	2412	-0.80	-33.23	<=-30.8	PASS
	Ant1	High	2462	0.22	-46.63	<=-29.78	PASS
	Ant2	High	2462	0.22	-46.08	<=-29.78	PASS
11N40MIMO	Ant1	Low	2422	-1.74	-43.39	<=-31.74	PASS
	Ant2	Low	2422	-2.96	-43.5	<=-32.96	PASS
	Ant1	High	2452	-1.61	-44.5	<=-31.62	PASS
	Ant2	High	2452	-1.37	-43.23	<=-31.37	PASS




### 11.5.2. Test Graphs



11B Ant1 Low 2412




11B Ant1 High 2462

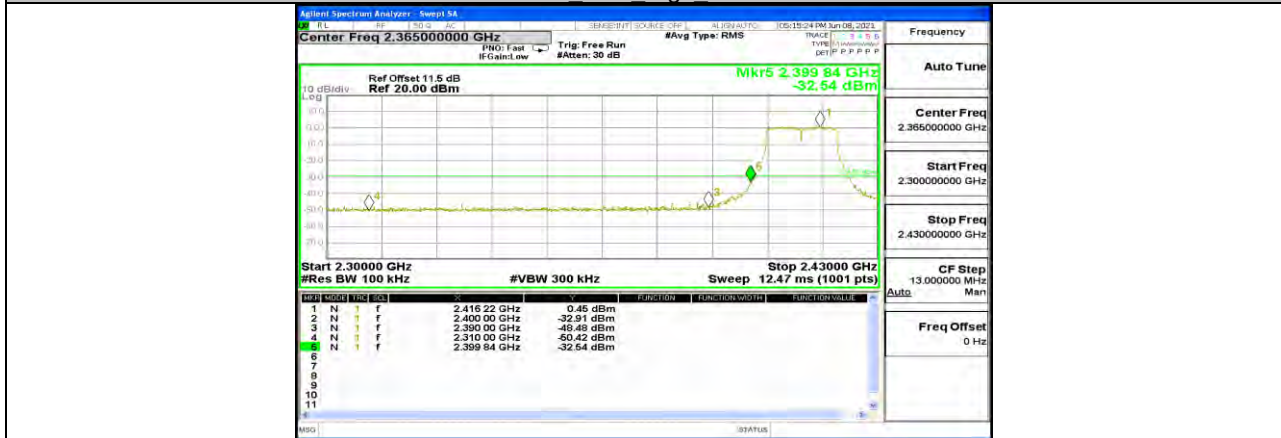

11G Ant1 Low 2412



11G Ant1 High 2462

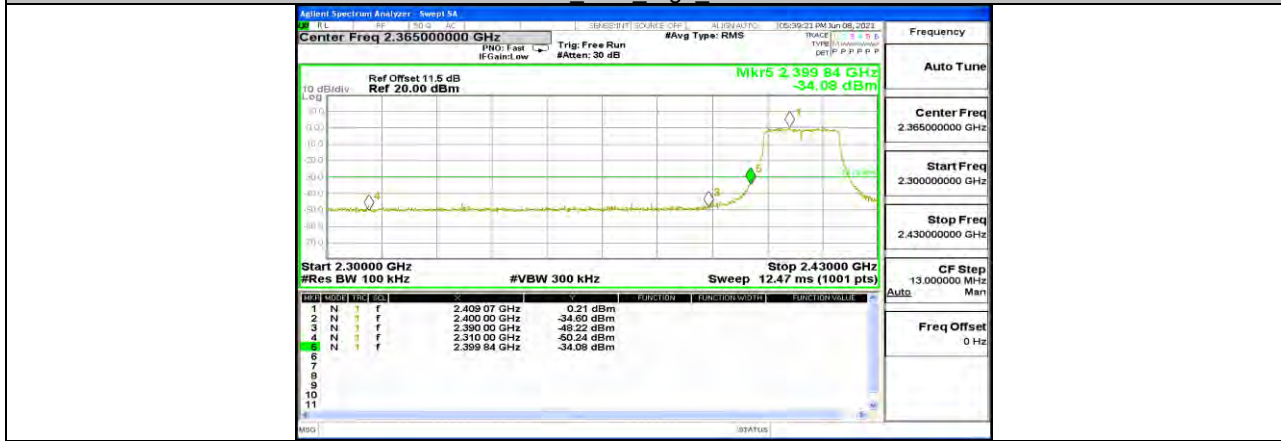

11N20MIMO Ant1 Low 2412



11N20MIMO Ant2 Low 2412



11N20MIMO Ant1 High 2462



11N20MIMO Ant2 High 2462




11N40MIMO Ant1 Low 2422



11N40MIMO Ant2 Low 2422



11N40MIMO Ant1 High 2452

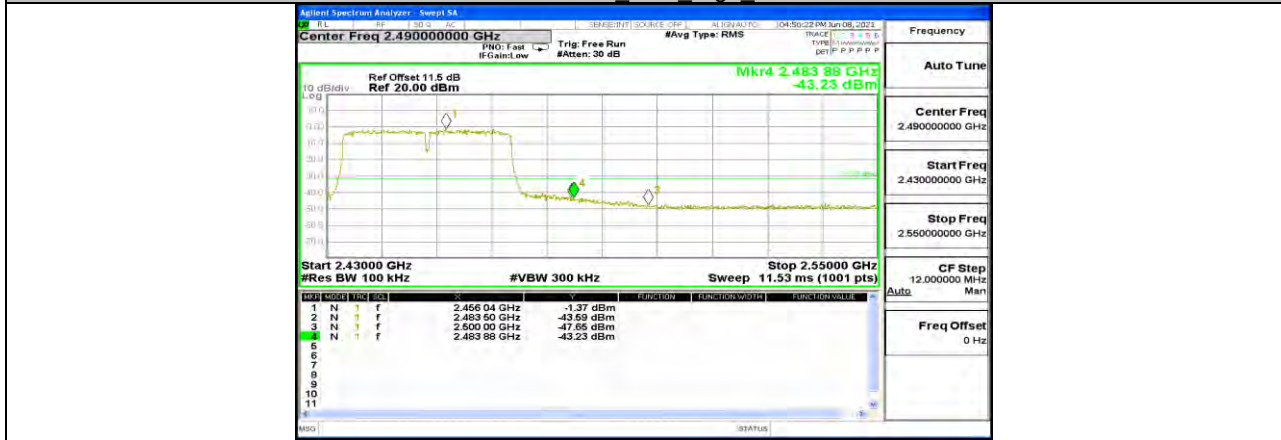


11N40MIMO Ant2 High 2452

**11.6. Appendix F: Conducted Spurious Emission**  
**11.6.1. Test Result**


Test Mode	Antenna	Channel	FreqRange [Mhz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	6.82	---	PASS
			30~1000	-48.64	<=-23.18	PASS
			1000~26500	-46.42	<=-23.18	PASS
		2437	Reference	6.96	---	PASS
			30~1000	-48.32	<=-23.04	PASS
			1000~26500	-46.01	<=-23.04	PASS
		2462	Reference	6.79	---	PASS
			30~1000	-48.99	<=-23.21	PASS
			1000~26500	-45.55	<=-23.21	PASS
11G	Ant1	2412	Reference	0.49	---	PASS
			30~1000	-47.77	<=-29.51	PASS
			1000~26500	-46.58	<=-29.51	PASS
		2437	Reference	0.87	---	PASS
			30~1000	-48.99	<=-29.13	PASS
			1000~26500	-46.19	<=-29.13	PASS
		2462	Reference	0.80	---	PASS
			30~1000	-49.63	<=-29.2	PASS
			1000~26500	-46.79	<=-29.2	PASS
11N20MIMO	Ant1	2412	Reference	-0.12	---	PASS
			30~1000	-47.3	<=-30.12	PASS
			1000~26500	-46	<=-30.12	PASS
	Ant2	2412	Reference	-0.94	---	PASS
			30~1000	-52.61	<=-30.94	PASS
			1000~26500	-46.14	<=-30.94	PASS
	Ant1	2437	Reference	0.46	---	PASS
			30~1000	-46.63	<=-29.55	PASS
			1000~26500	-45.93	<=-29.55	PASS
	Ant2	2437	Reference	-0.30	---	PASS
			30~1000	-54.74	<=-30.3	PASS
			1000~26500	-46.32	<=-30.3	PASS
	Ant1	2462	Reference	-0.03	---	PASS
			30~1000	-46.8	<=-30.03	PASS
			1000~26500	-45.97	<=-30.03	PASS
	Ant2	2462	Reference	0.43	---	PASS
			30~1000	-54.47	<=-29.57	PASS
			1000~26500	-46.4	<=-29.57	PASS
11N40MIMO	Ant1	2422	Reference	-1.73	---	PASS
			30~1000	-46.25	<=-31.73	PASS
			1000~26500	-46.68	<=-31.73	PASS
	Ant2	2422	Reference	-3.01	---	PASS
			30~1000	-54.51	<=-33.01	PASS
			1000~26500	-46.6	<=-33.01	PASS
	Ant1	2437	Reference	-1.38	---	PASS
			30~1000	-47.38	<=-31.38	PASS
			1000~26500	-46.49	<=-31.38	PASS
	Ant2	2437	Reference	-2.00	---	PASS
			30~1000	-53.86	<=-32	PASS
			1000~26500	-46.6	<=-32	PASS
	Ant1	2452	Reference	-1.65	---	PASS
			30~1000	-46.36	<=-31.65	PASS
			1000~26500	-47	<=-31.65	PASS

### 11.6.2. Test Graphs

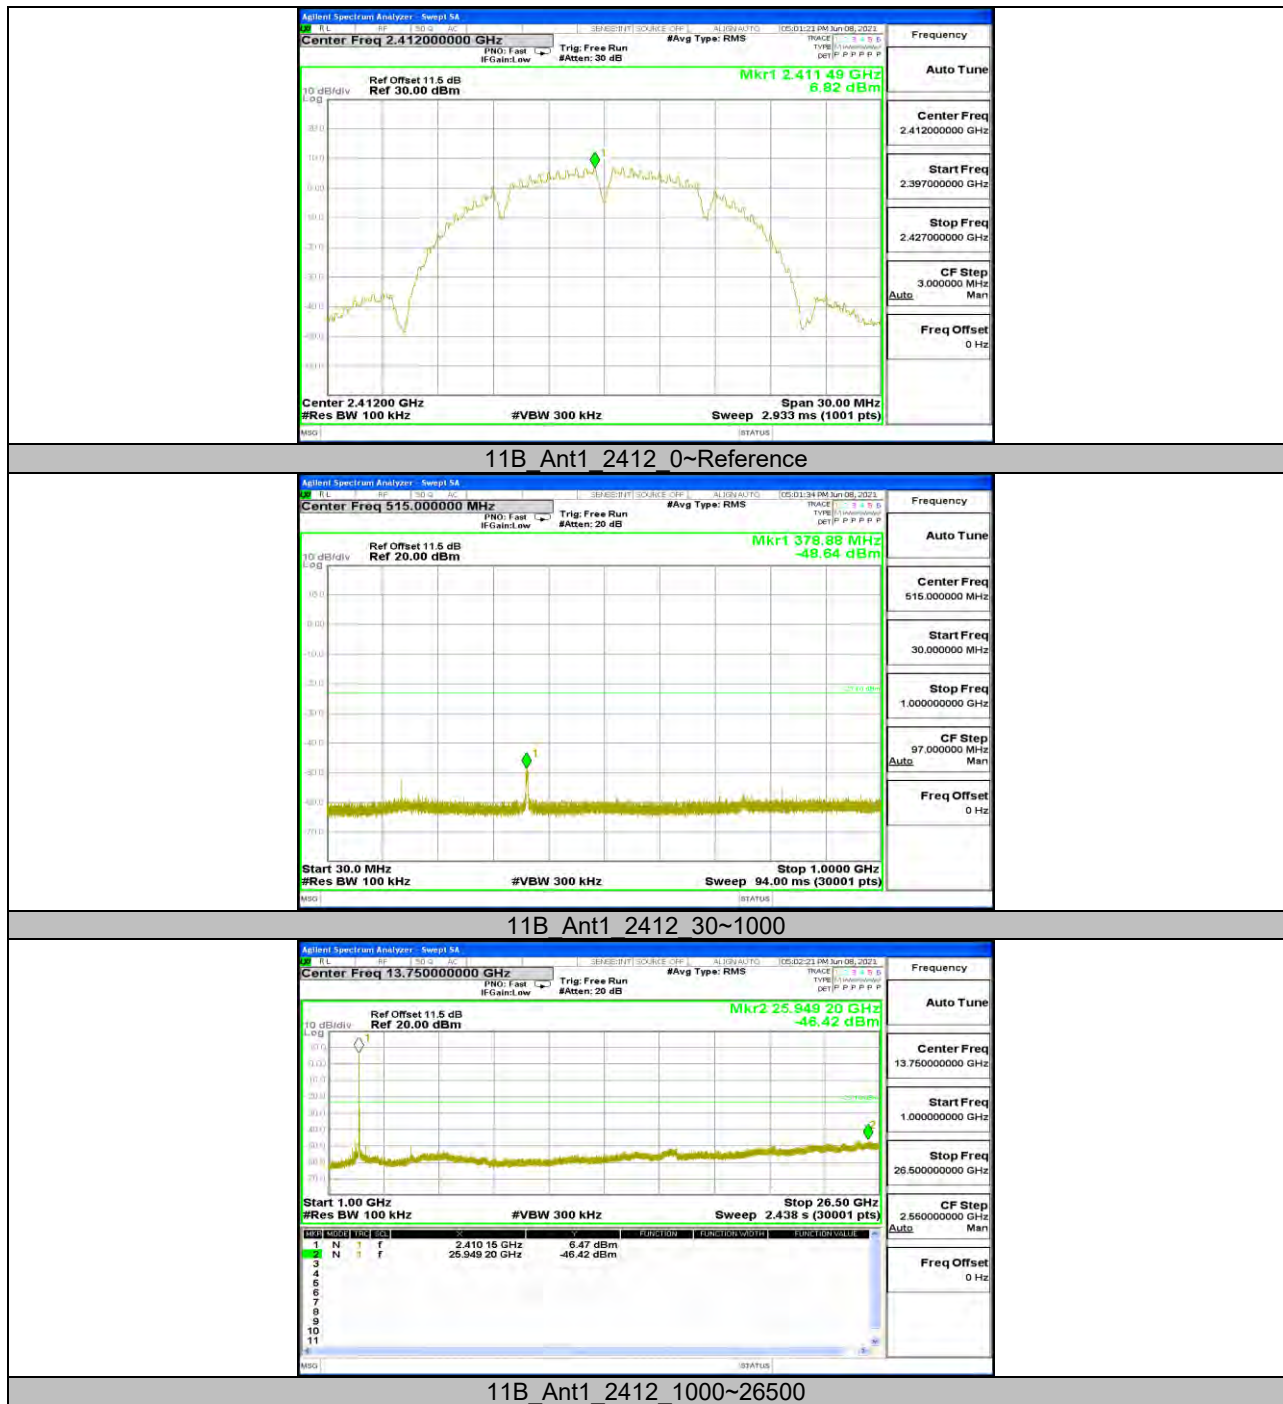




11B Ant1 2437 0~Reference

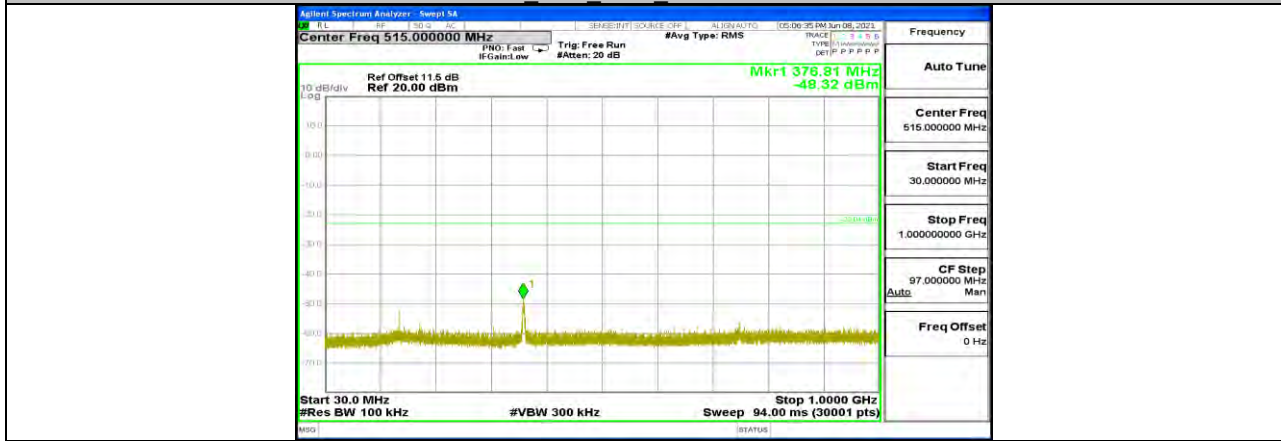

11B Ant1 2437 30~1000

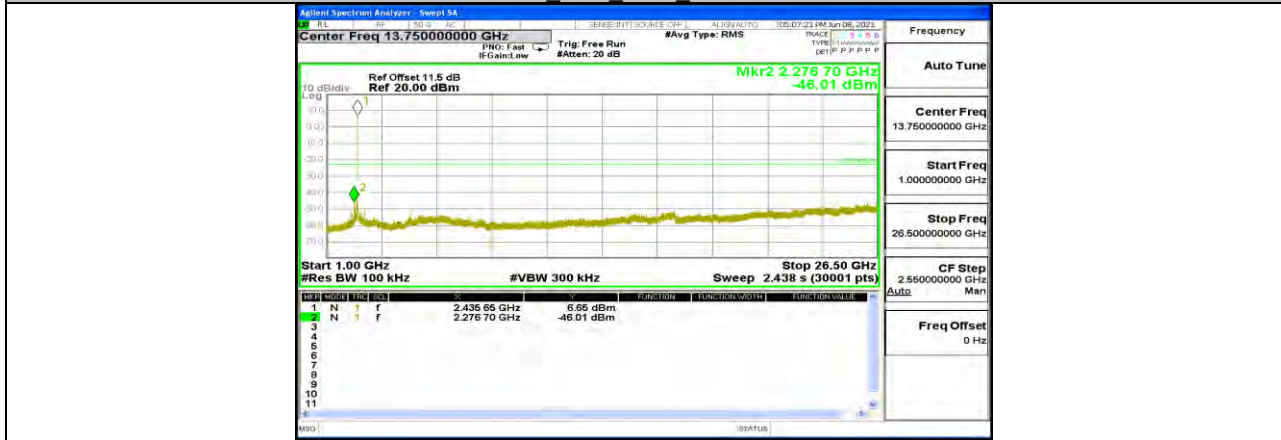


11B Ant1 2437 1000~26500







11B\_Ant1\_2462\_0~Reference

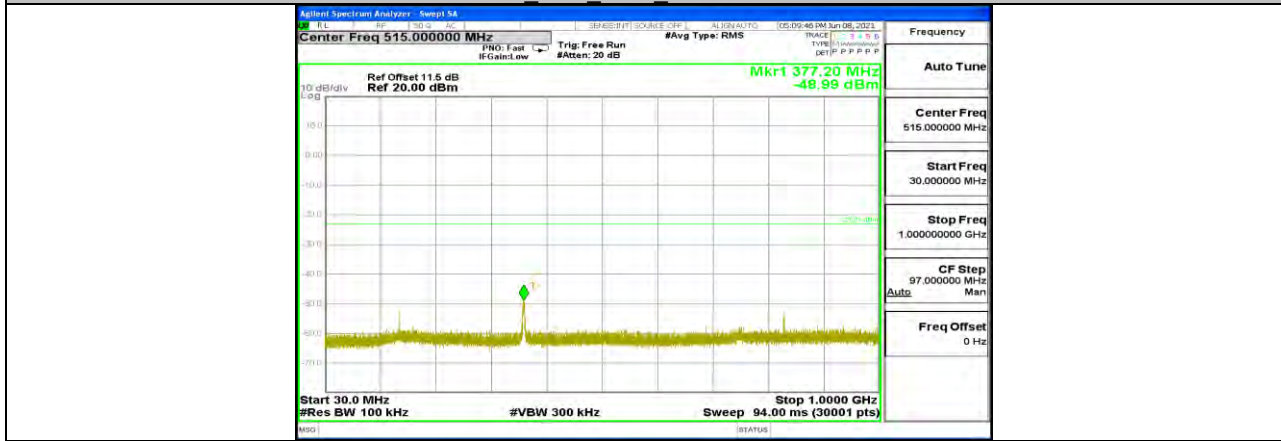


11B\_Ant1\_2462\_30~1000

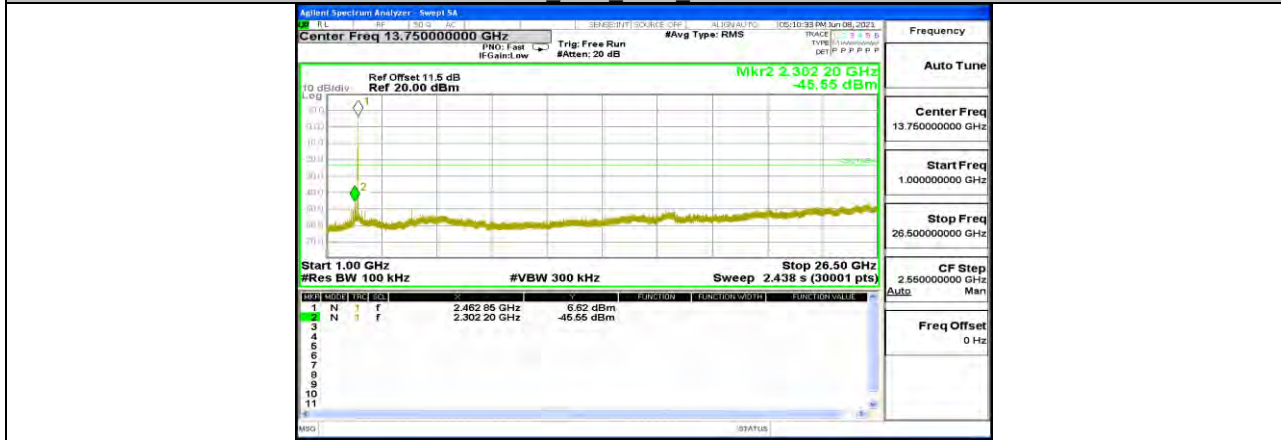


11B\_Ant1\_2462\_1000~26500

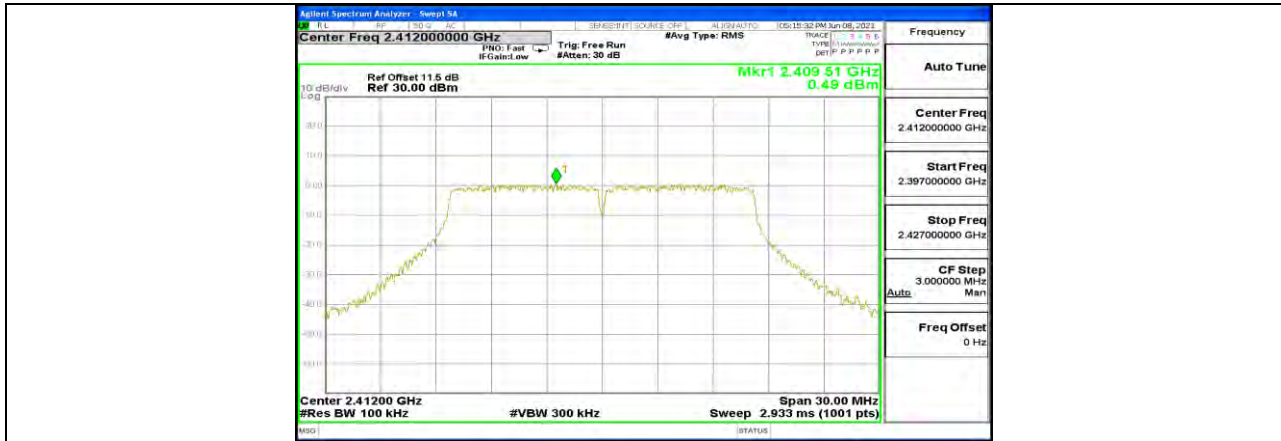

11G Ant1\_2412\_0~Reference

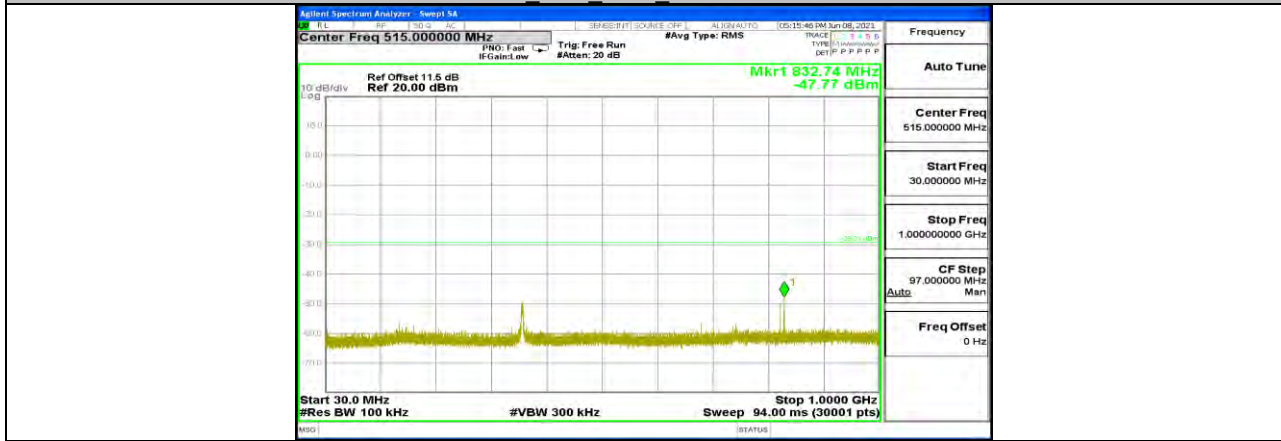


11G Ant1\_2412\_30~1000

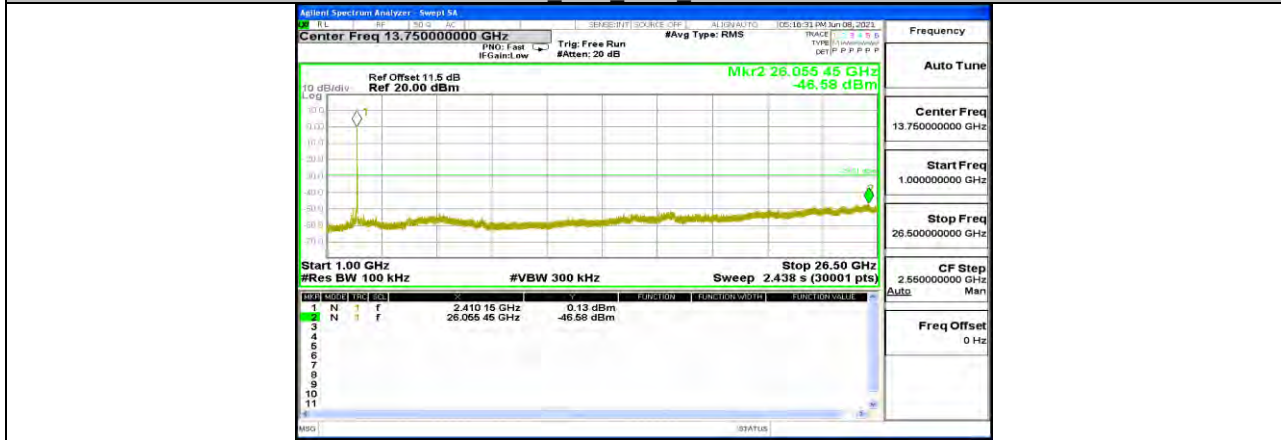


11G Ant1\_2412\_1000~26500



11G Ant1 2437 0~Reference

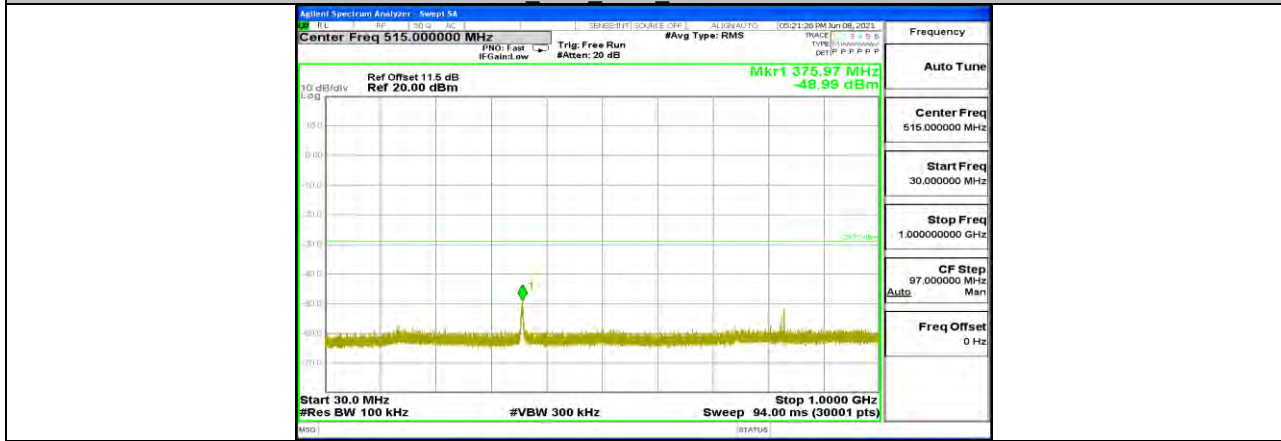


11G Ant1 2437 30~1000

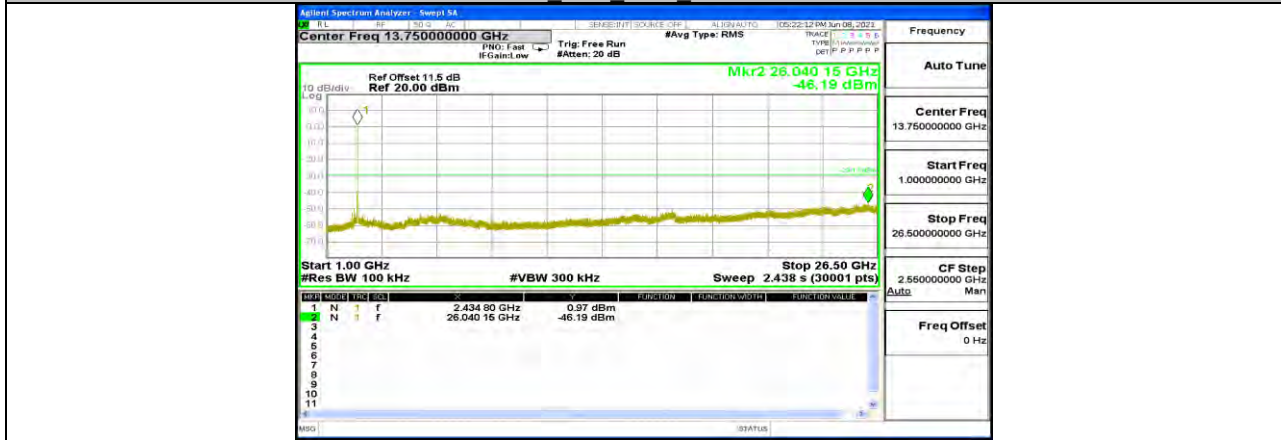


11G Ant1 2437 1000~26500




11G Ant1\_2462\_0~Reference

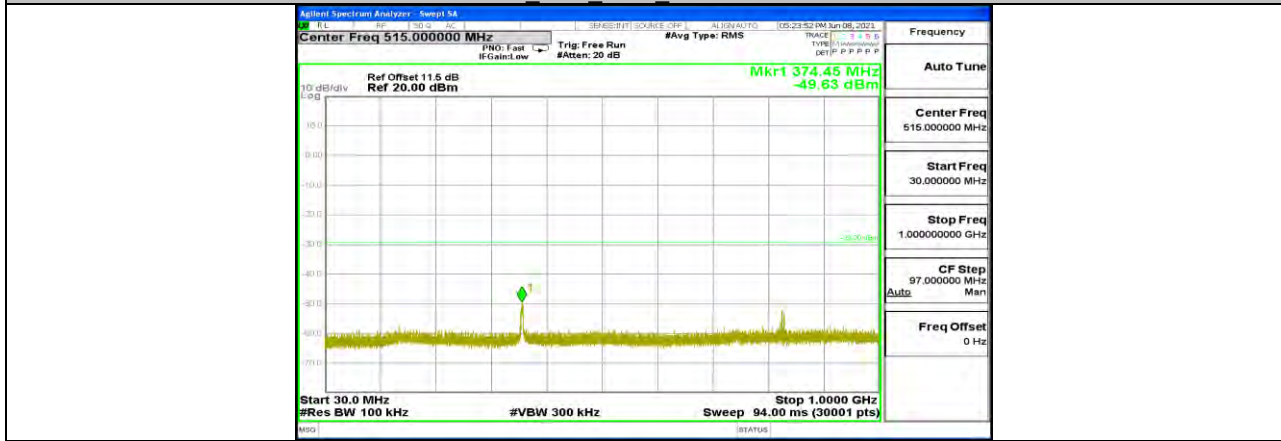


11G Ant1\_2462\_30~1000

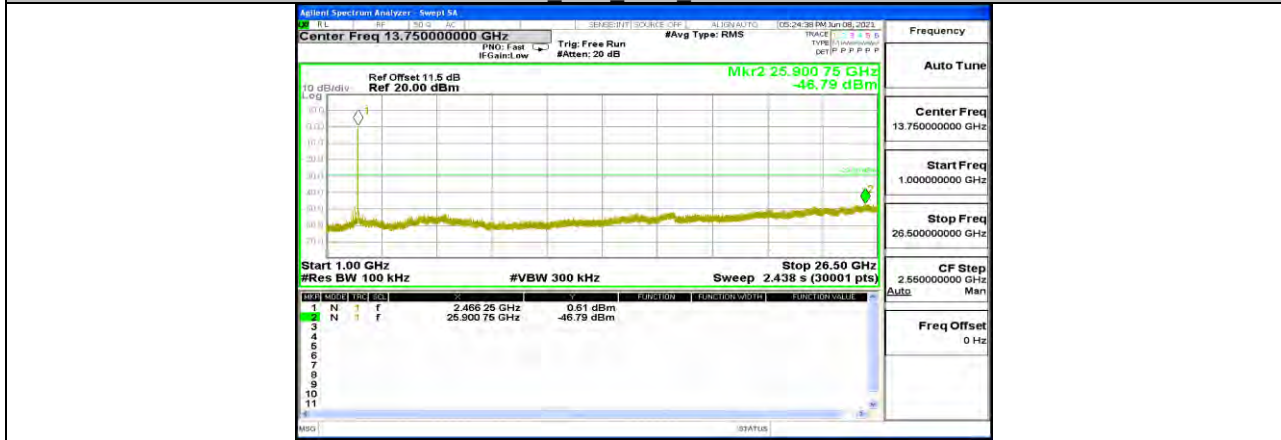


11G Ant1\_2462\_1000~26500

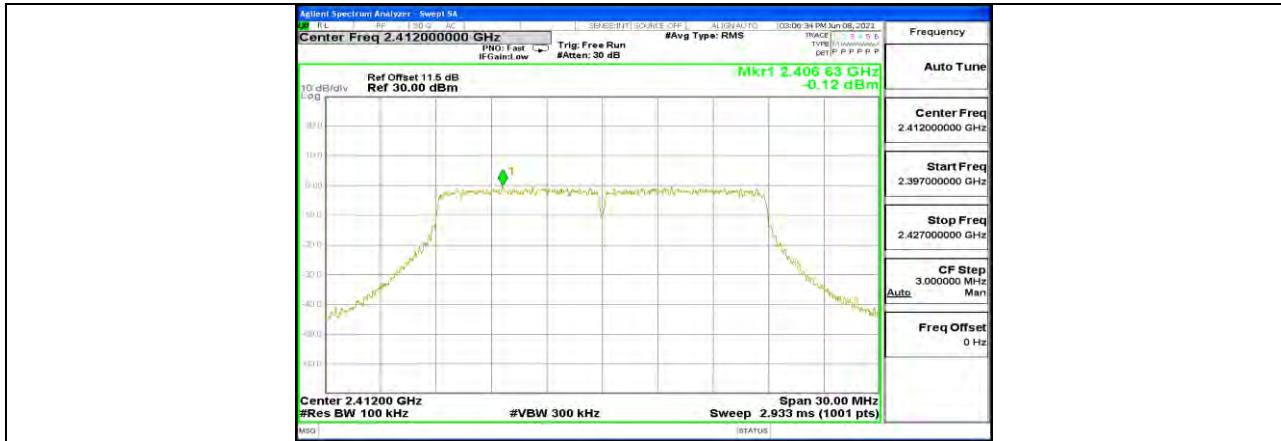

11N20MIMO Ant1 2412\_0~Reference

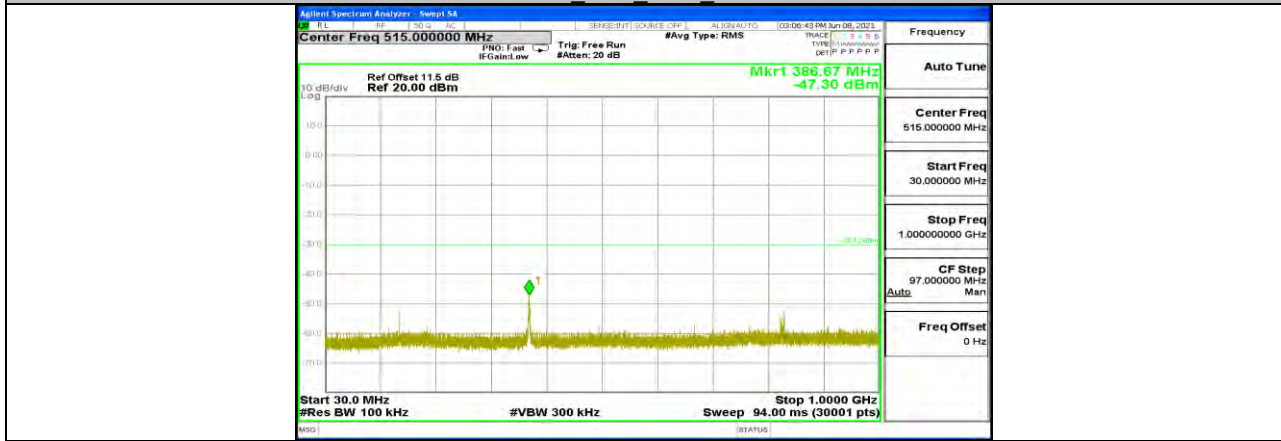


11N20MIMO Ant1 2412\_30~1000

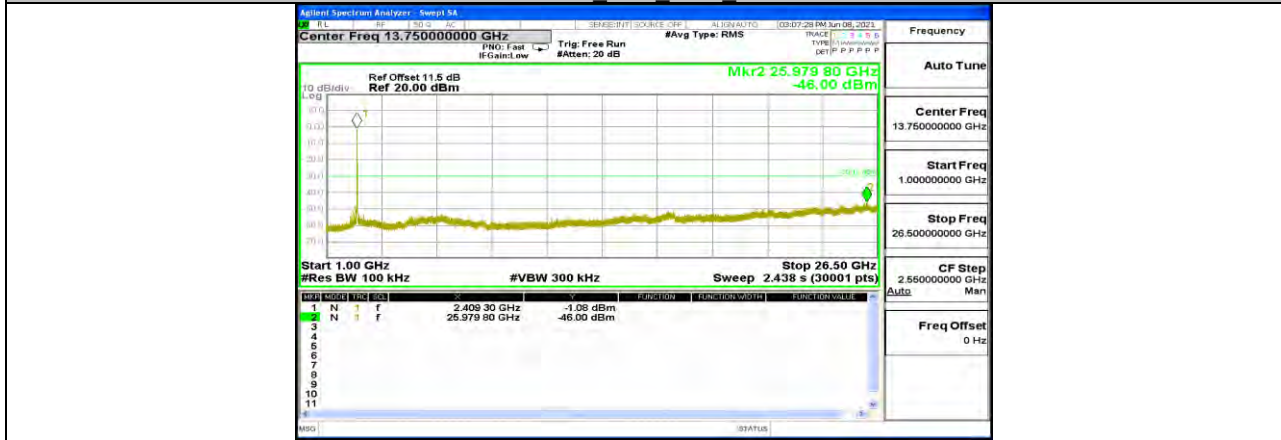


11N20MIMO Ant1 2412\_1000~26500




11N20MIMO Ant2\_2412\_0~Reference

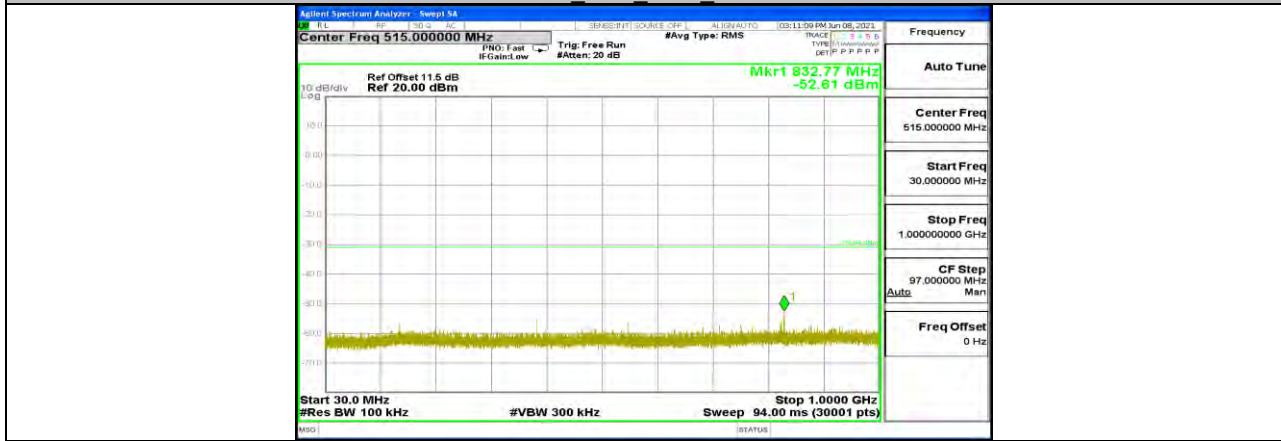


11N20MIMO Ant2\_2412\_30~1000

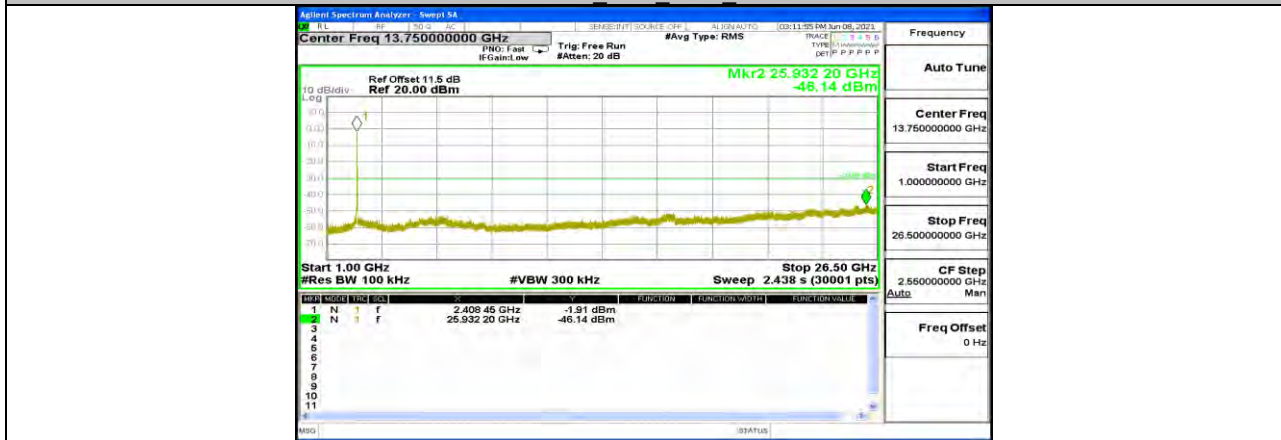


11N20MIMO Ant2\_2412\_1000~26500

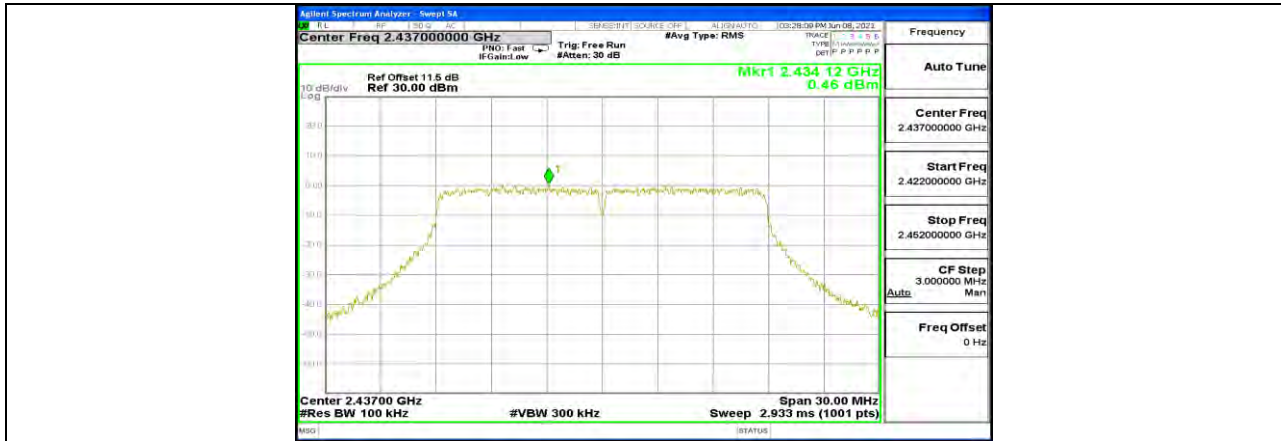


11N20MIMO Ant1 2437 0~Reference

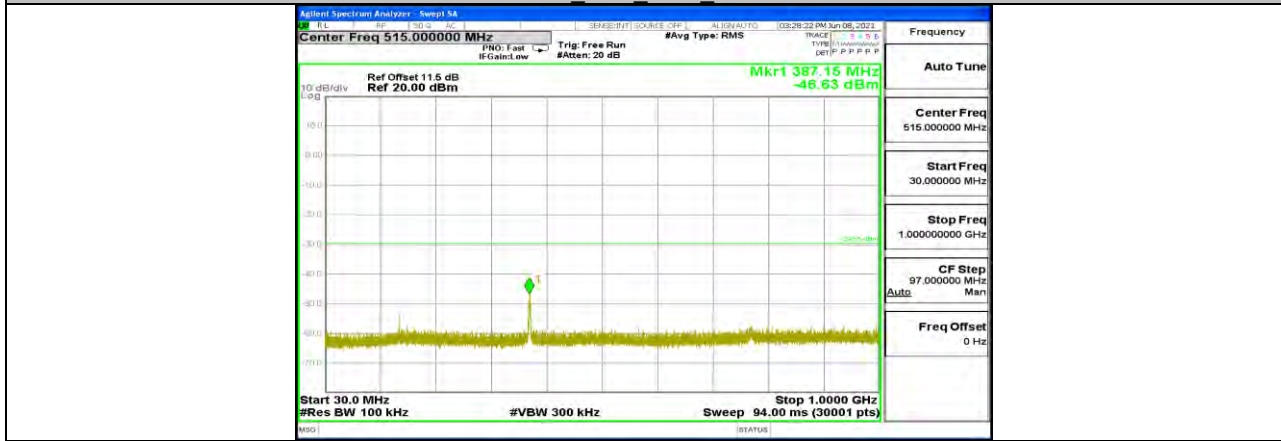


11N20MIMO Ant1 2437 30~1000

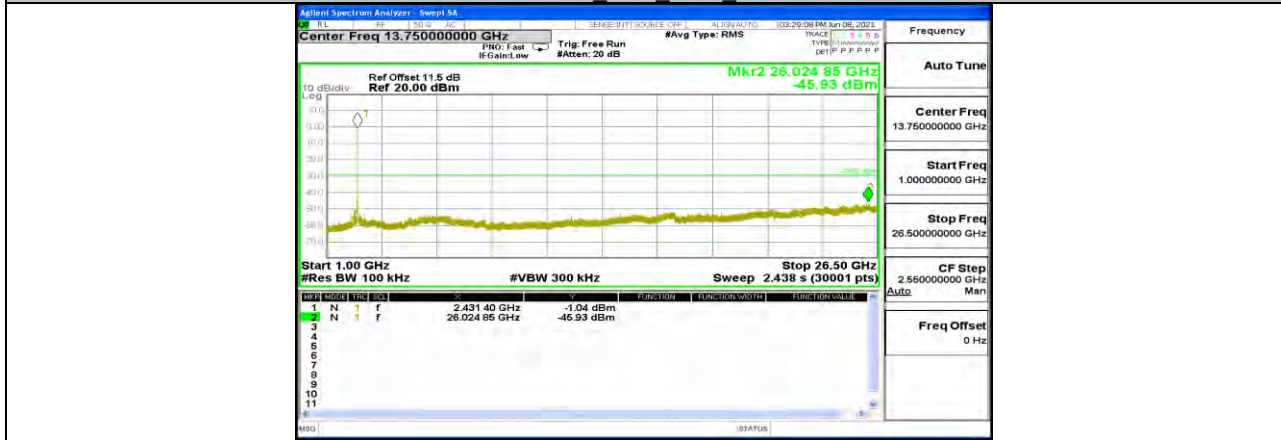


11N20MIMO Ant1 2437 1000~26500

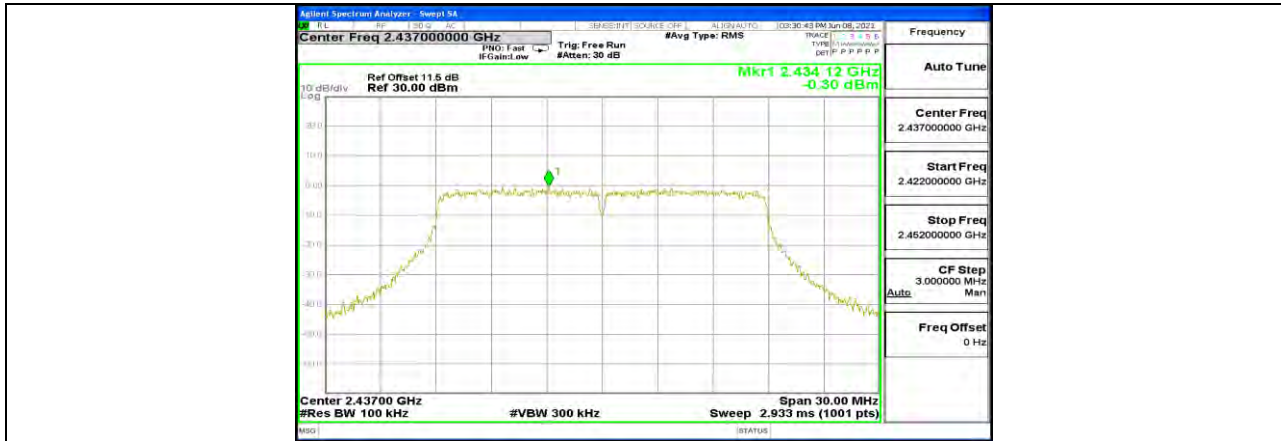

11N20MIMO Ant2 2437 0~Reference

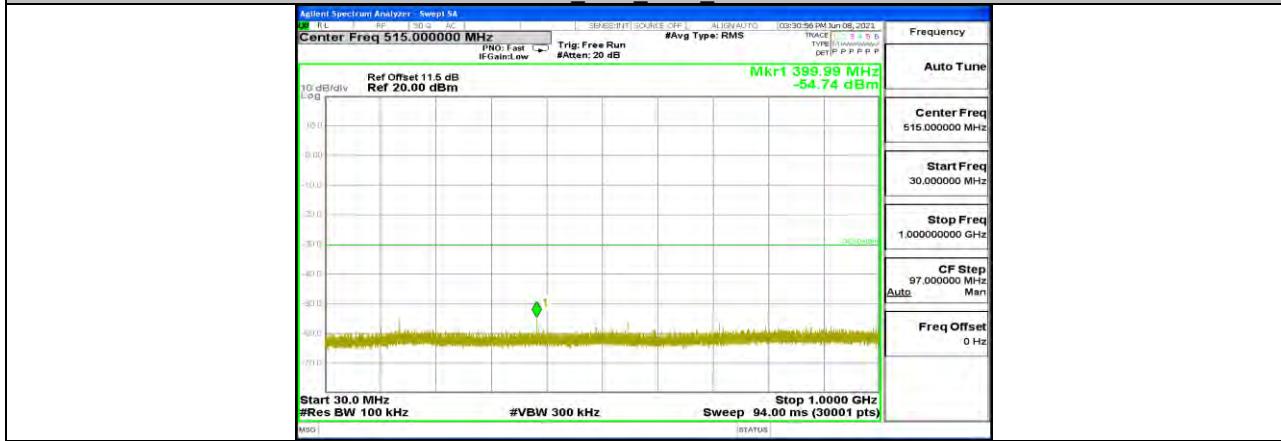


11N20MIMO Ant2 2437 30~1000

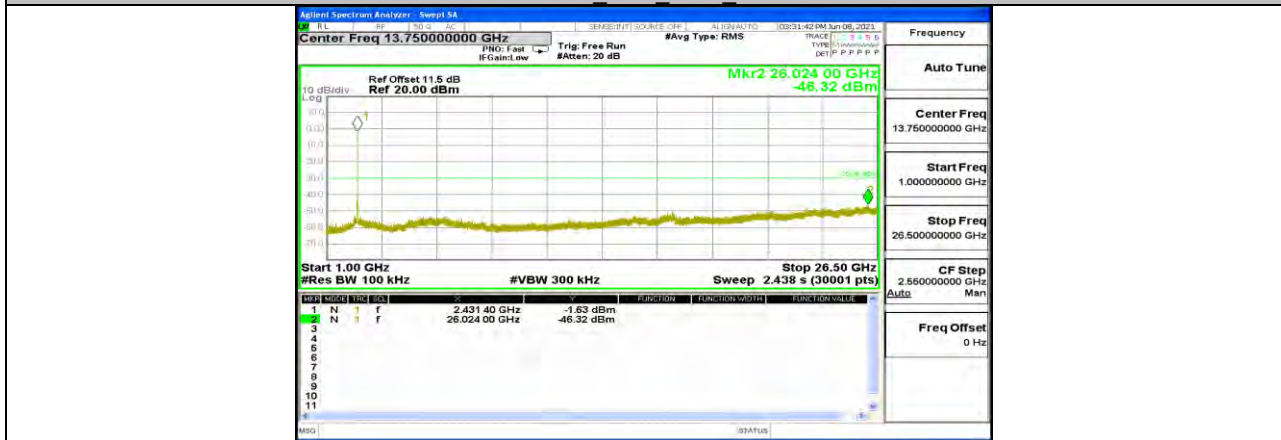


11N20MIMO Ant2 2437 1000~26500




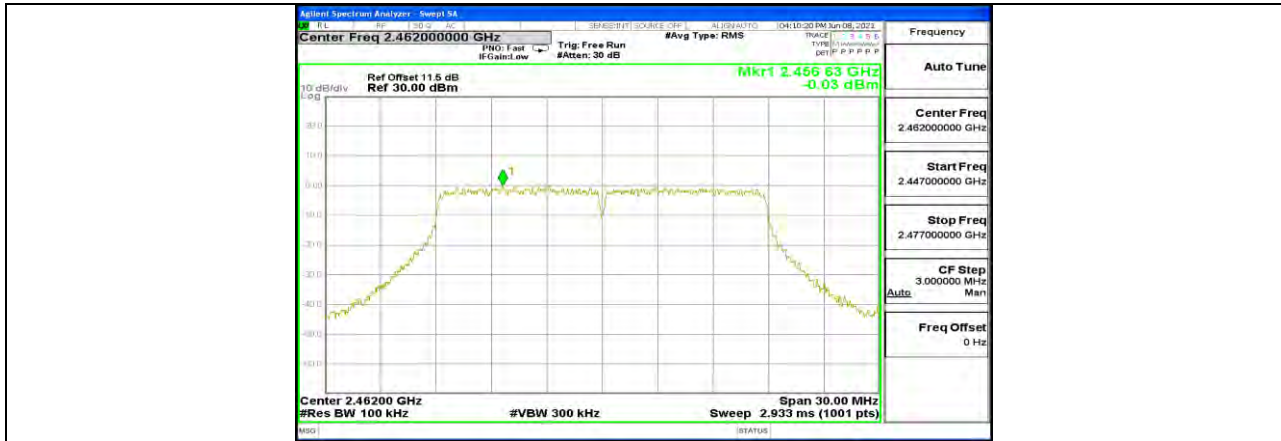


11N20MIMO Ant1\_2462\_0~Reference

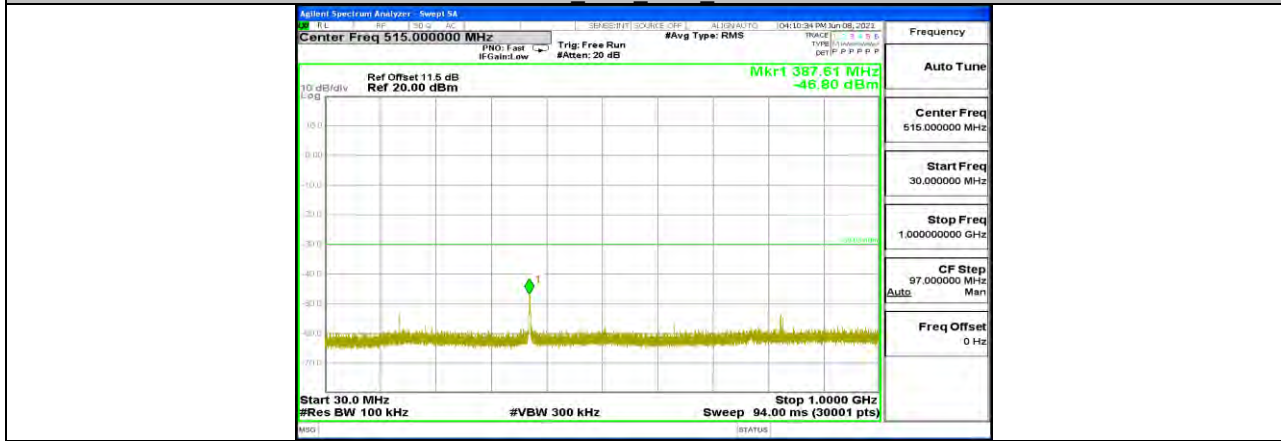


11N20MIMO Ant1\_2462\_30~1000

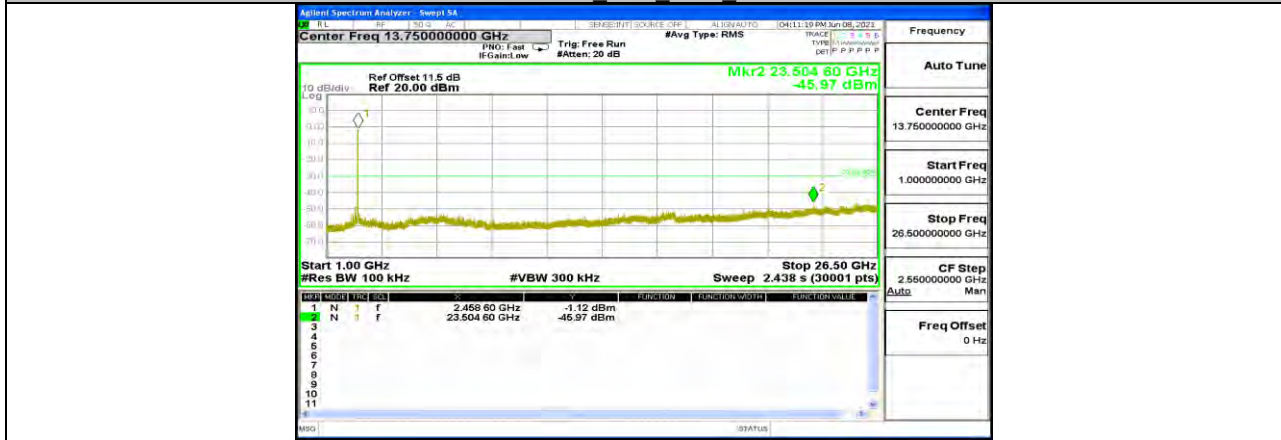


11N20MIMO Ant1\_2462\_1000~26500

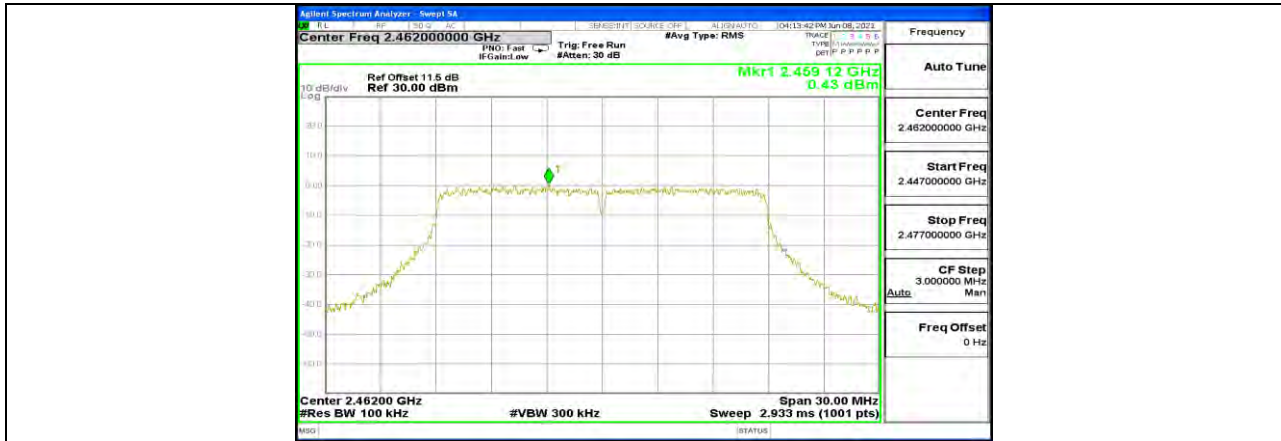


11N20MIMO Ant2\_2462\_0~Reference

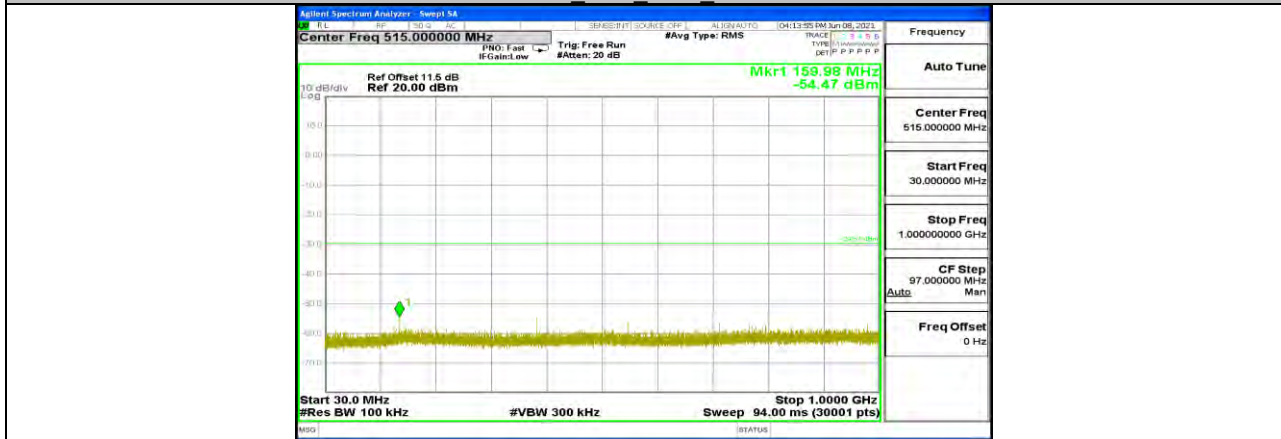


11N20MIMO Ant2\_2462\_30~1000

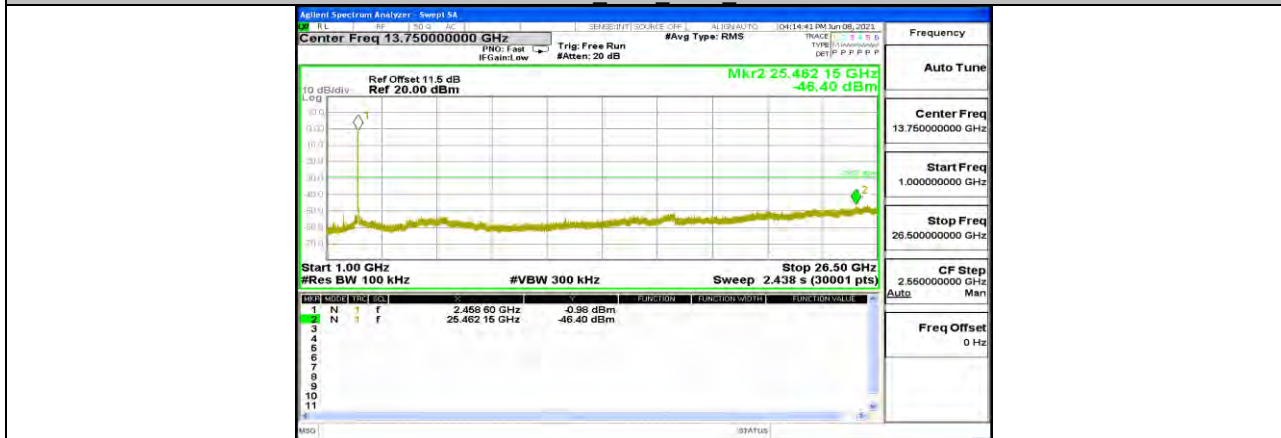


11N20MIMO Ant2\_2462\_1000~26500

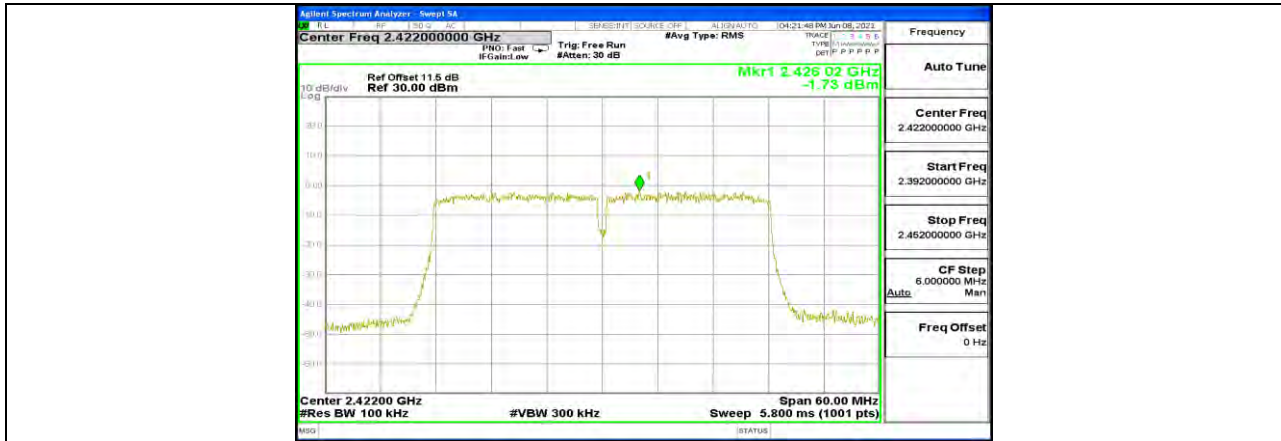

11N40MIMO Ant1\_2422\_0~Reference

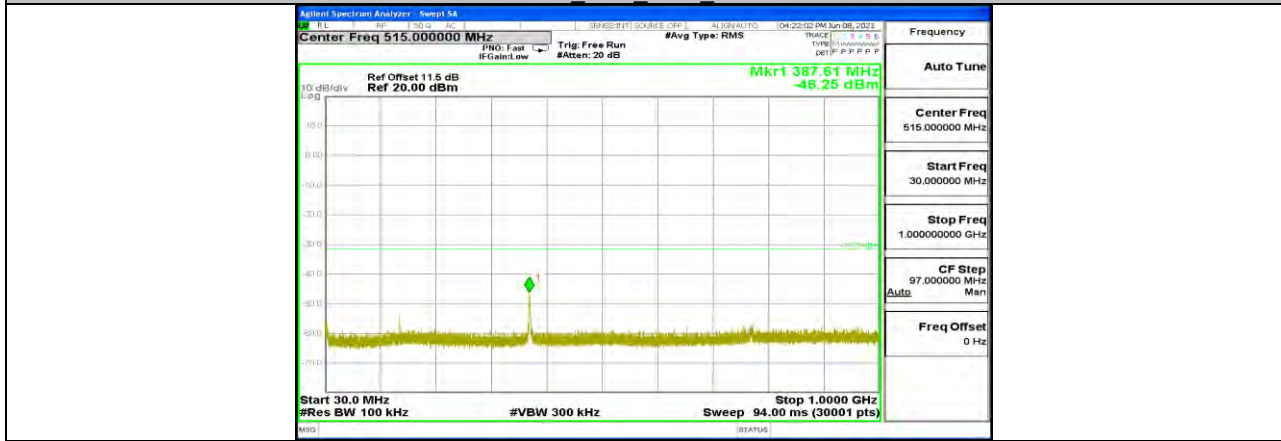


11N40MIMO Ant1\_2422\_30~1000

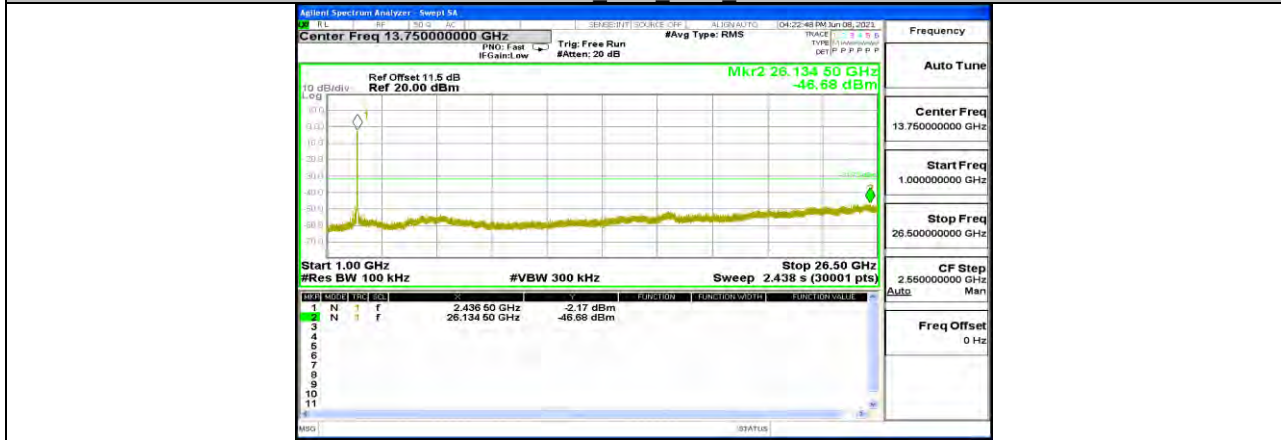


11N40MIMO Ant1\_2422\_1000~26500




11N40MIMO Ant2\_2422\_0~Reference

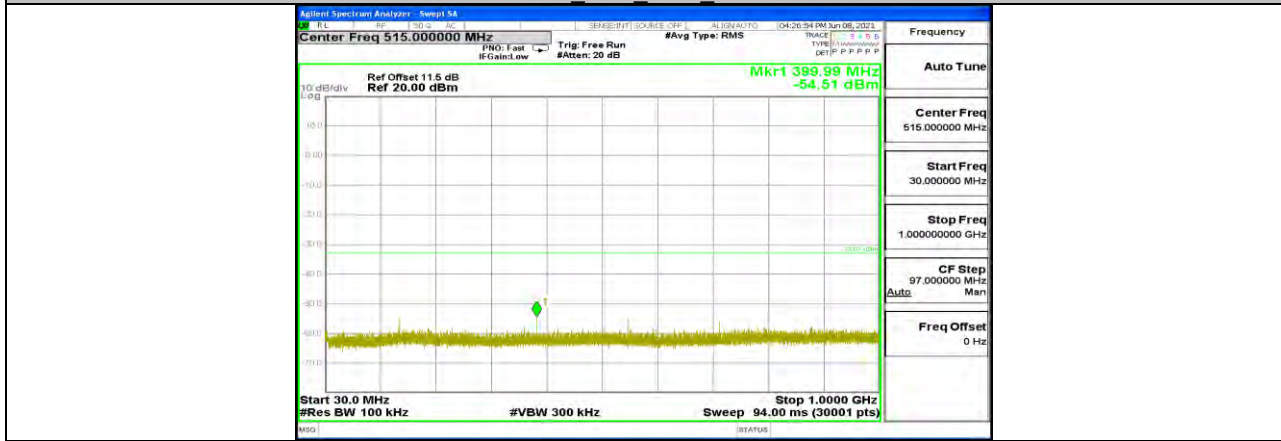


11N40MIMO Ant2\_2422\_30~1000

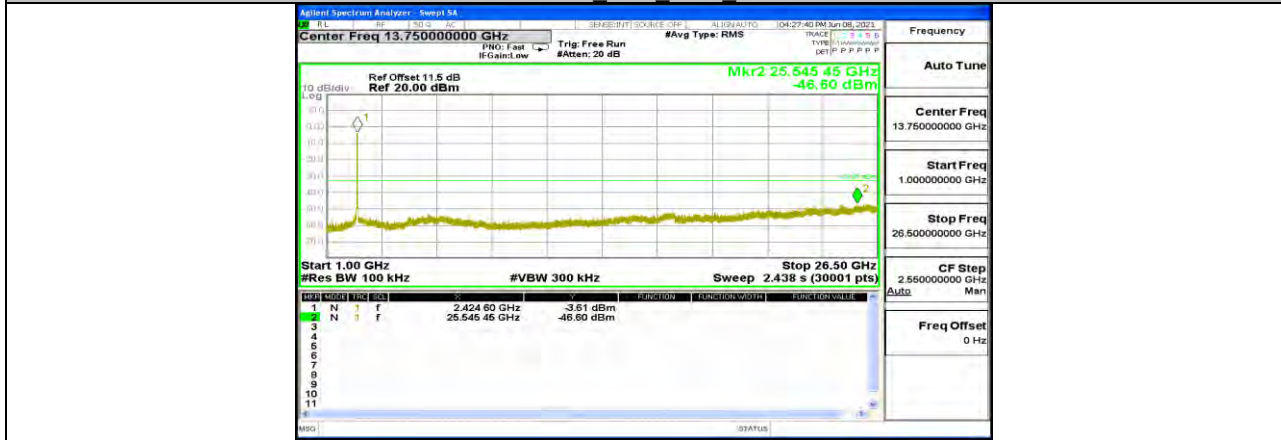


11N40MIMO Ant2\_2422\_1000~26500

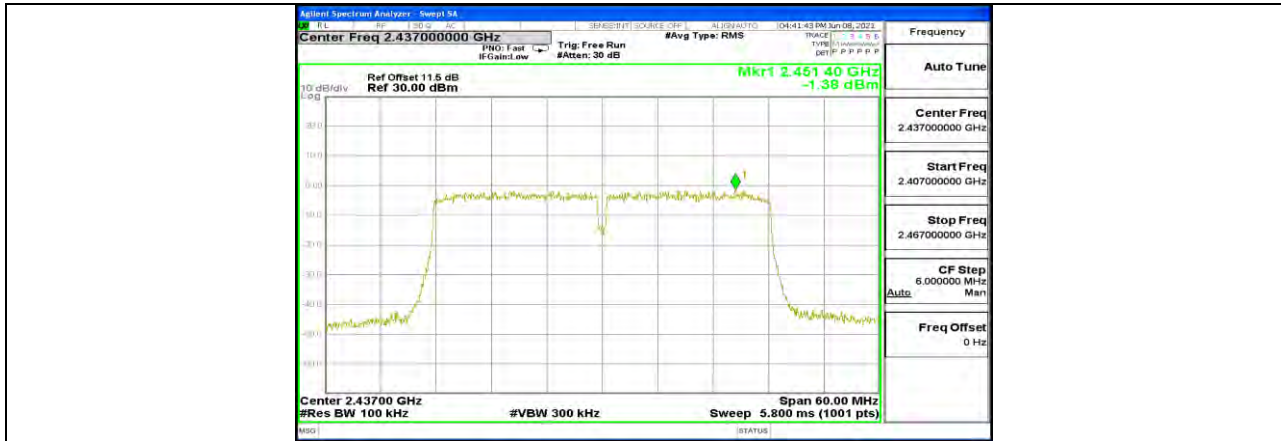

11N40MIMO Ant1 2437 0~Reference

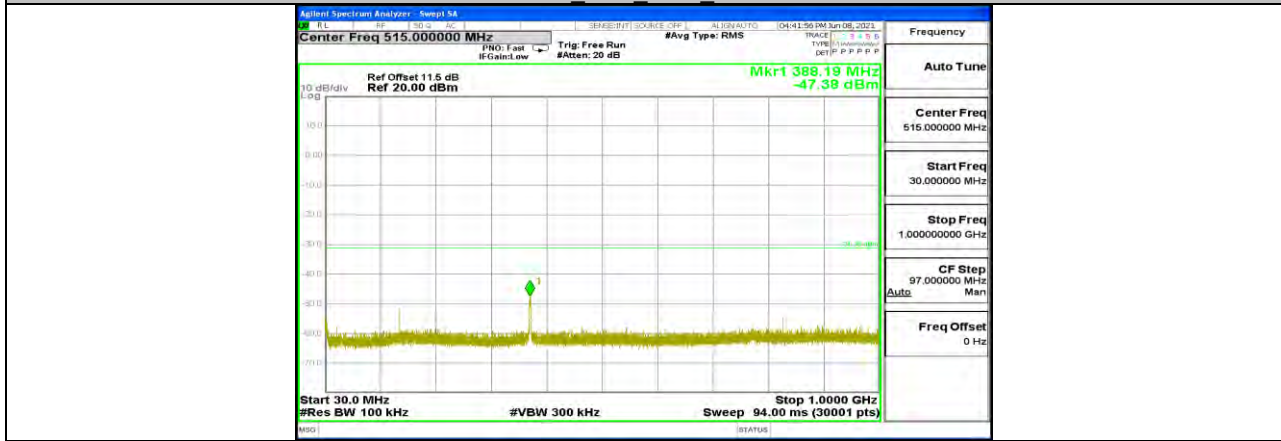


11N40MIMO Ant1 2437 30~1000

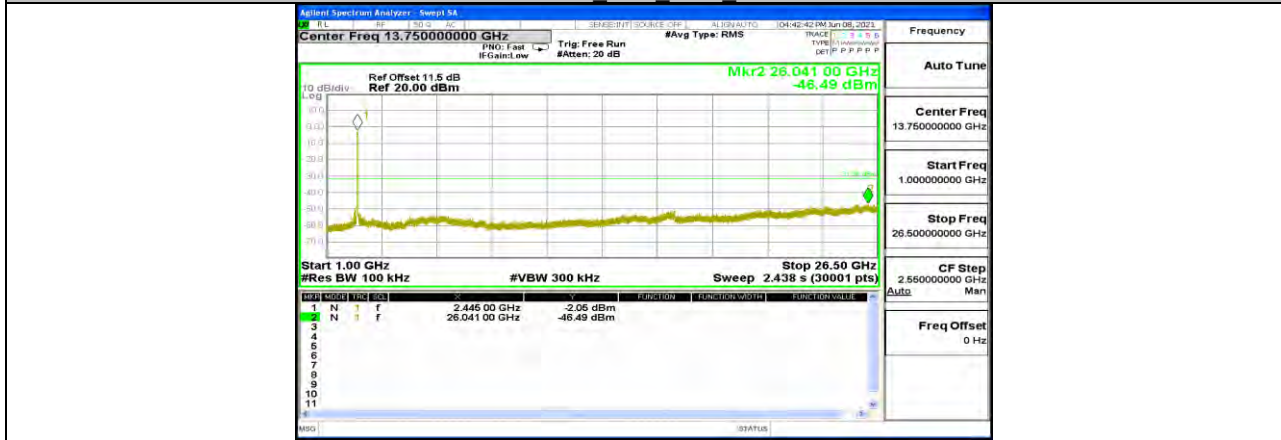


11N40MIMO Ant1 2437 1000~26500






11N40MIMO Ant2\_2437\_0~Reference

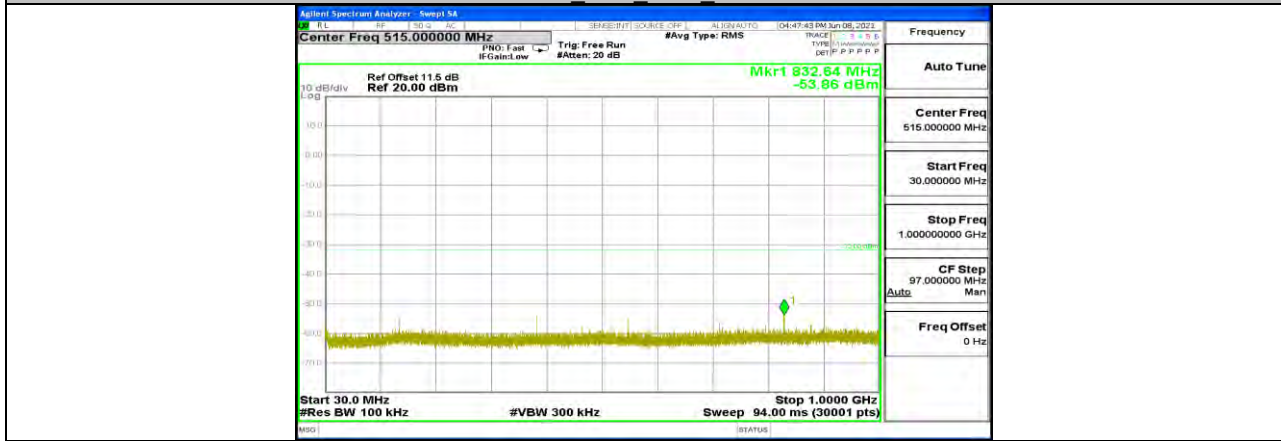

11N40MIMO Ant2\_2437\_30~1000

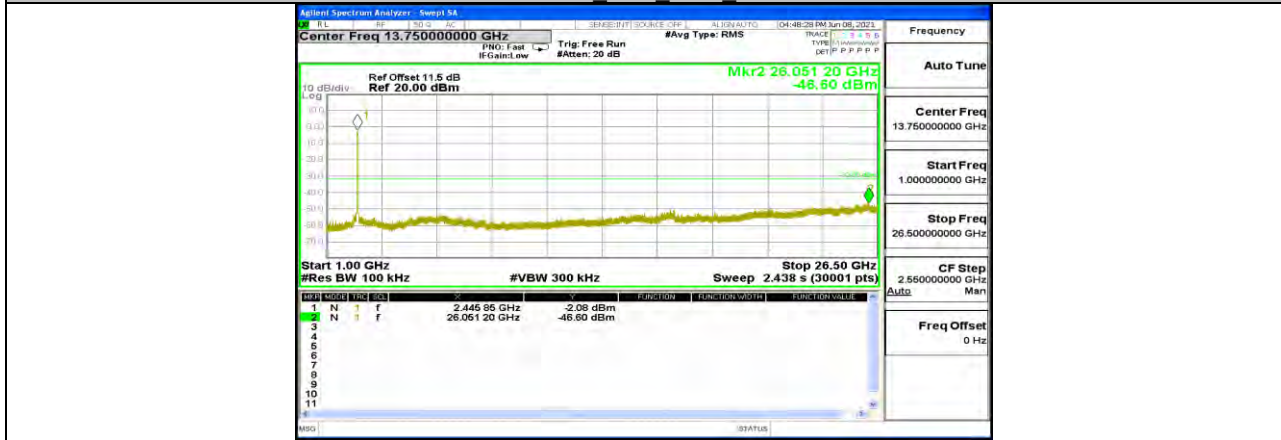

11N40MIMO Ant2\_2437\_1000~26500

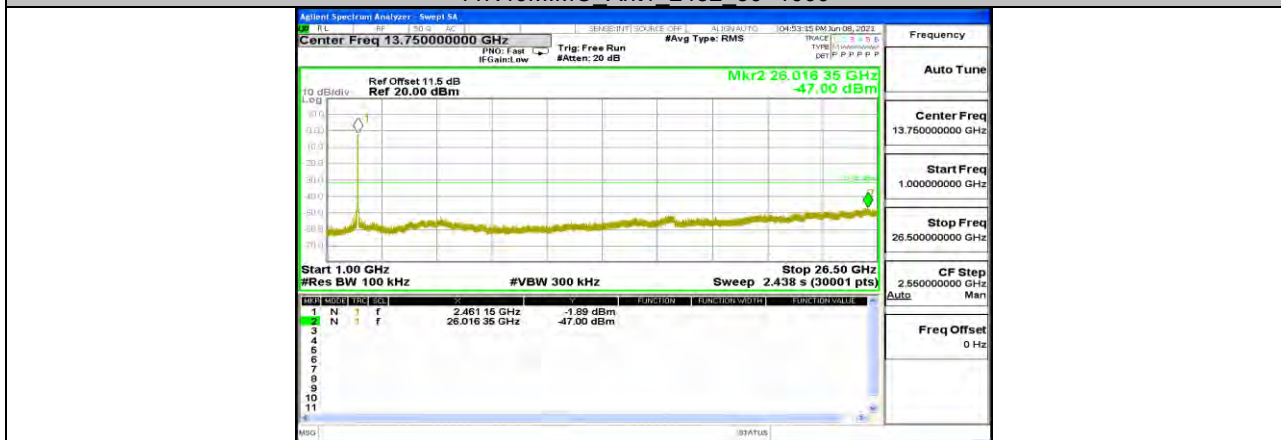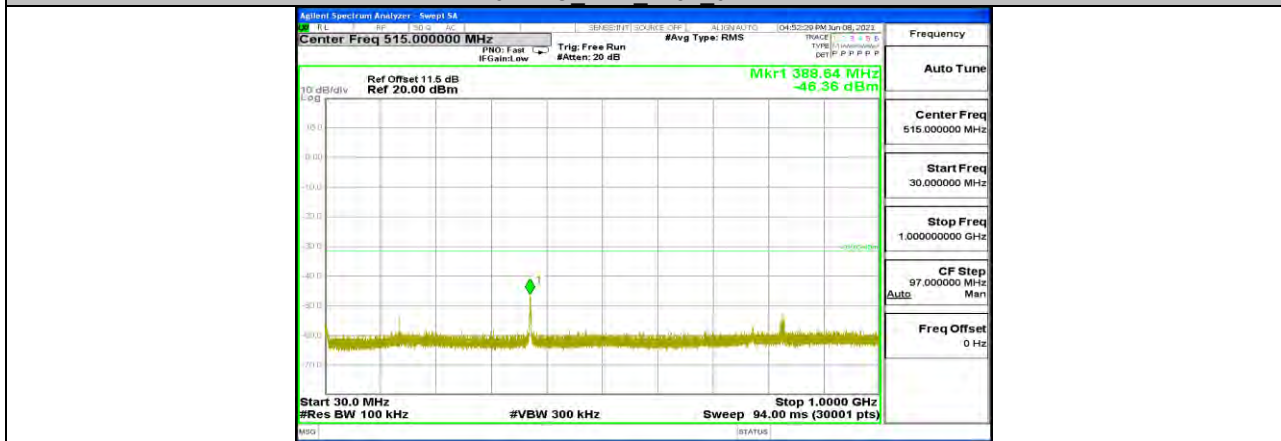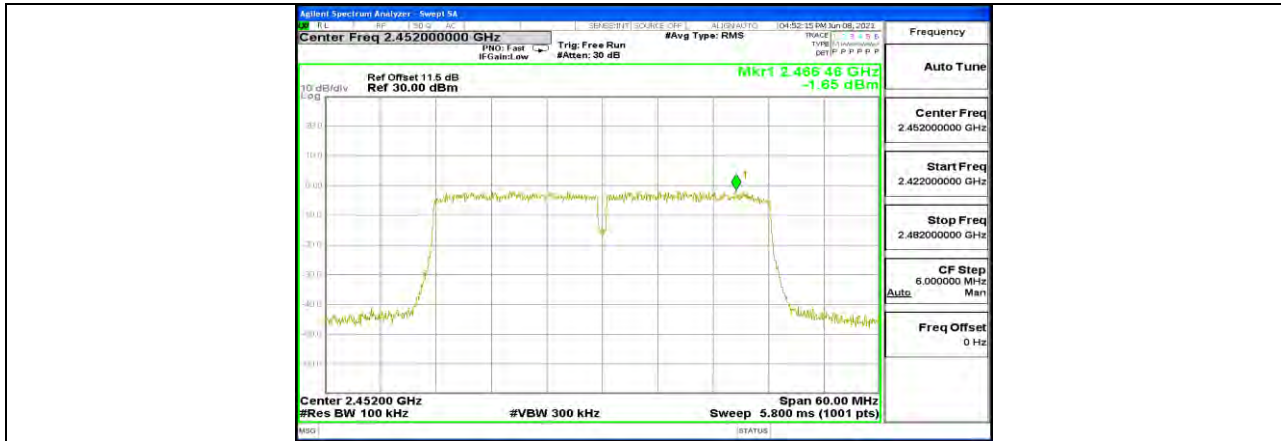



**11.7. Appendix G: Duty Cycle**  
**11.7.1. Test Result**

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	100	100	1.0000	100.00	0.00	0.01	0.01
11G	100	100	1.0000	100.00	0.00	0.01	0.01
11N20MIMO	100	100	1.0000	100.00	0.00	0.01	0.01
11N40MIMO	100	100	1.0000	100.00	0.00	0.01	0.01

Note:

Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time


If that calculated VBW is not available on the analyzer then the next higher value should be used.





### 11.7.2. Test Graphs



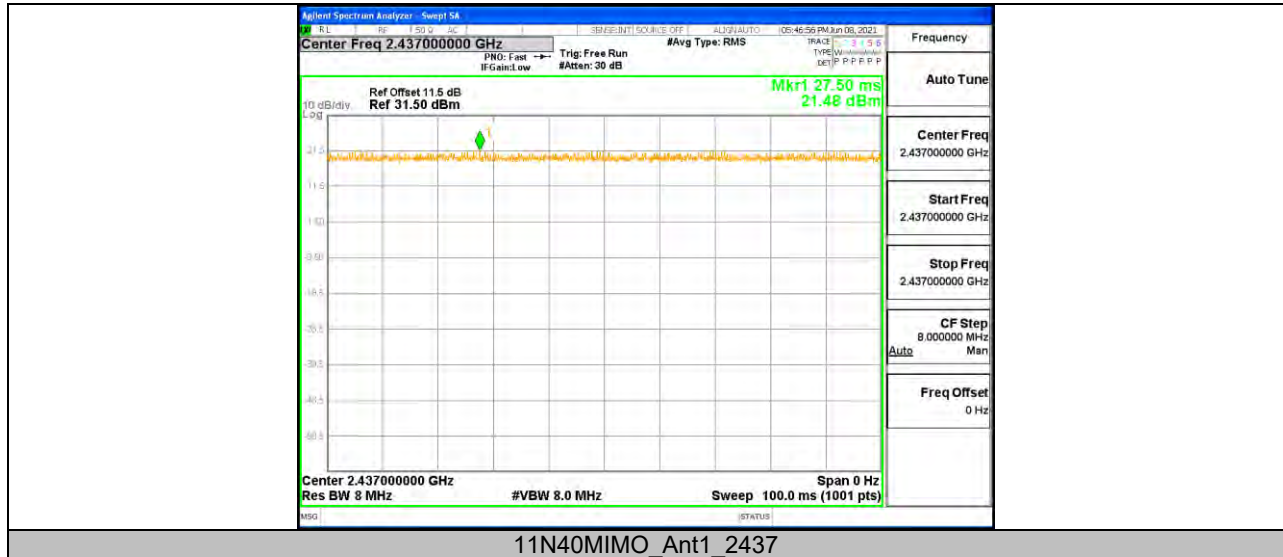

11N40MIMO\_Ant1\_2437

**END OF REPORT**