

TEST REPORT

KOSTEC CO., Ltd. 28(175-20, Anyeong-dong) 406-gil sejaro, Hwaseong-si, Gyeonggi-do, Korea Tel:031-222-4251, Fax:031-222-4252	Report No.: KST-FCR-200006	 KOSTEC Co., Ltd. http://www.kostec.org
1. Applicant • Name : GAUSYS • Address : 4 floor #401, 606 Seobusaet-gil, Geumcheon-gu, Seoul, Korea 2. Test Item • Product Name: Compact KIOSK • Model Name: HS101 • Brand: None • FCC ID: 2AVYI-HS101 3. Manufacturer • Name : GAUSYS • Address : 4 floor #401, 606 Seobusaet-gil, Geumcheon-gu, Seoul, Korea 4. Date of Test : 2020. 03. 09. ~ 2020. 03. 11. 5. Test Method Used : FCC CFR 47, Part 15. Subpart C-15.225 6. Test Result : Compliance 7. Note: -		
Supplementary Information The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in <u>ANSI C 63.10-2013</u>. We attest to the accuracy of data and all measurements reported herein were performed by KOSTEC Co., Ltd. and were made under Chief Engineer's supervision. We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.		
The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report is not related to KOLAS accreditation.		
Affirmation	Tested by Name : Jung, Ho-Cheol (Signature)	Technical Manager Name : Park, Gyeong-Hyeon (Signature)
2020. 03. 20.		
KOSTEC Co., Ltd.		

Table of Contents

1. GENERAL INFORMATION	3
1.1 Test Facility	3
1.2 Location	3
1.3 Revision History of test report	4
2. EQUIPMENT DESCRIPTION	5
3. SYSTEM CONFIGURATION FOR TEST	6
3.1 Characteristics of equipment	6
3.2 Used peripherals list	6
3.3 Product Modification	6
3.4 Operating Mode	6
3.5 Test Setup of EUT	6
3.6 Used Test Equipment List	7
4. SUMMARY TEST RESULTS	9
5. MEASUREMENT RESULTS	10
5.1 Carrier Frequency tolerance	10
5.2 Field strength of radiated emissions	11
5.3 Antenna requirement	17
5.4 AC Power Conducted emissions	18
5.5 20 dB bandwidth measurement	21

1. GENERAL INFORMATION

1.1 Test Facility

Test laboratory and address

KOSTEC Co., Ltd.

28(175-20,Annyeong-dong)406-gil sejaro, Hwaseong-si Gyeonggi-do, Korea

Telephone Number: 82-31-222-4251

Facsimile Number: 82-31-222-4252

Registration information

KOLAS No.: KT232


RRA (National Radio Research Agency): KR0041

FCC Designation No.: KR0041

IC Designation No.: KR0041

VCCI Membership No.: 2005

1.2 Location

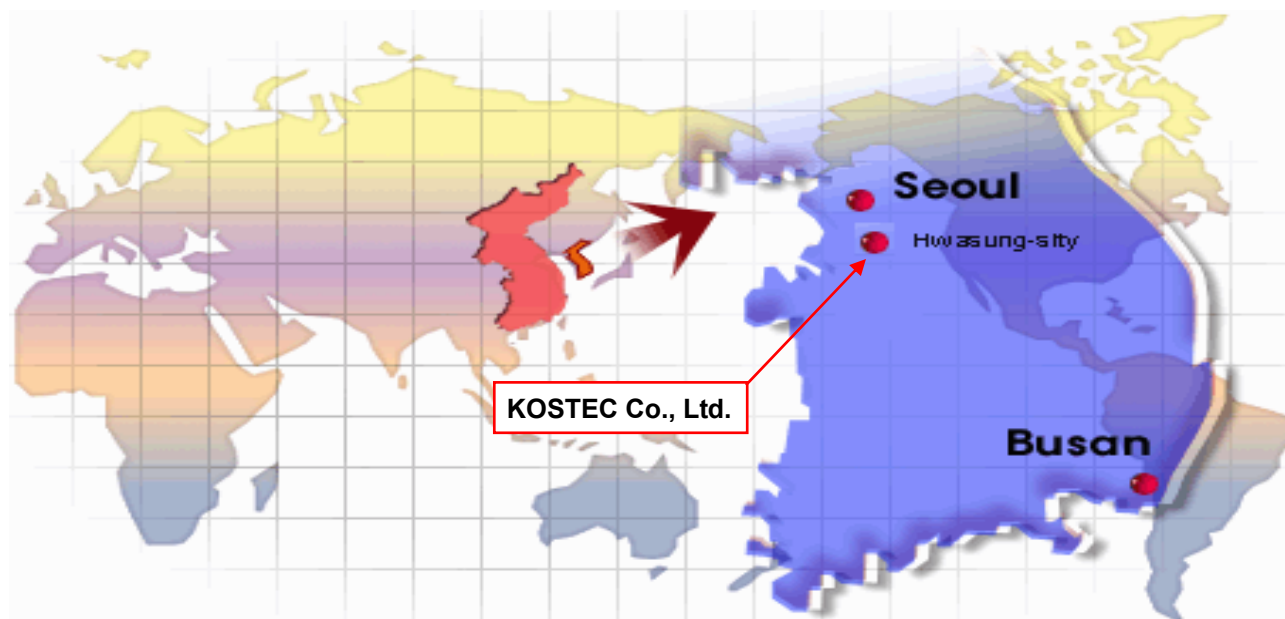

1.3 Revision History of test report

Rev.	Revisions	Effect page	Reviewed	Date
-	Initial issue	All	Gyeong Hyeon, Park	2020. 03. 20.

2. EQUIPMENT DESCRIPTION

The product specification described herein was declared by manufacturer. And refer to user's manual for the details.

Equipment Name	Compact KIOSK
Model No	HS101
Usage	Compact KIOSK
Serial Number	Proto type
Modulation type	ASK
Oscillation Type	X-tal
Maximum output power	13.26 dB μ W/m @ 30 meter
Operated Frequency	13.56 Mhz
Channel Number	1
Operation temperature	-10 °C - 55 °C
Power Source	AC/DC Adaptor, output: DC 12 V
Antenna Description	Internal PCB antenna
Remark	1. The device was operating at its maximum output power for all measurements. 2. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case (Y) is shown in the report. 3. The above DUT's information was declared by manufacturer. Please refer to the specifications or user manual for more detailed description.
FCC ID	2AVYI--HS101

3. SYSTEM CONFIGURATION FOR TEST

3.1 Characteristics of equipment

The Equipment Under Test (EUT) contains the following capabilities: This equipment is e-Passport Reader. The detailed explanation is refer as user manual.

3.2 Used peripherals list

Description	Model No.	Serial No.	Manufacture	Remark
Notebook	BCM-1063	2Z7S1Z1	Dell Inc	-
Adapter	DA65NM111-00	None	Dell Inc	-

3.3 Product Modification

N/A

3.4 Operating Mode

Constantly transmitting with a modulated carrier at maximum power.

3.5 Test Setup of EUT

EUT
(stand-alone)

3.6 Used Test Equipment List

No.	Instrument	Model	S/N	Manufacturer	Next Cal Date	Cal interval	used
1	T & H Chamber	PL-3J	15003623	ESPEC	2020.11.07	1 year	☐
2	T & H Chamber	SH-662	93000067	ESPEC CORP	2020.09.04	1 year	☐
3	Spectrum Analyzer	8563EC	3046A00527	Agilent Technology	2021.01.21	1 year	☐
4	Spectrum Analyzer	FSV30	104029	Rohde & Schwarz	2020.09.24	1 year	☐
5	Spectrum Analyzer	FSV30	20-353063	Rohde & Schwarz	2021.01.21	1 year	☐
6	Signal Analyzer	N9010A	MY56070441	Agilent Technologies	2020.05.29	1 year	☒
7	EMI Test Receiver	ESCI7	100823	Rohde & Schwarz	2021.01.21	1 year	☐
8	EMI Test Receiver	ESI	837514/004	Rohde & Schwarz	2020.09.03	1 year	☒
9	Vector Signal Analyzer	89441A	3416A02620	Agilent Technology	2021.01.22	1 year	☐
10	Network Analyzer	8753ES	US39172348	AGILENT	2020.09.04	1 year	☐
11	EPM Series Power meter	E4418B	GB39512547	Agilent Technology	2021.01.22	1 year	☐
12	RF Power Sensor	E9300A	MY41496631	Agilent Technology	2021.01.22	1 year	☐
13	Microwave Frequency Counter	5352B	2908A00480	Agilent Technology	2021.01.22	1 year	☐
14	Audio Analyzer	8903B	3514A16919	Agilent Technology	2021.01.20	1 year	☐
15	Audio Telephone Analyzer	DD-5601CID	520010281	CREDIX	2020.01.23	1 year	☐
16	Modulation Analyzer	8901A	3041A0576	H.P	2021.01.22	1 year	☐
17	Digital storage Oscilloscope	TDS3052	B015962	Tektronix	2020.09.03	1 year	☐
18	ESG-D Series Signal Generator	E4436B	US39260458	Agilent Technology	2021.01.20	1 year	☐
19	Vector Signal Generator	SMBV100A	257557	Rohde & Schwarz	2021.01.20	1 year	☒
20	GNSS Signal Generator	TC-2800A	2800A000494	TESCOM CO., LTD.	2021.01.22	1 year	☐
21	Signal Generator	SMB100A	179628	Rohde & Schwarz	2020.05.14	1 year	☒
22	SLIDAC	None	0207-4	Myoung sung Ele.	2021.01.20	1 year	☐
23	DC Power supply	DRP-5030	9028029	Digital Electronic Co.,Ltd	2021.01.20	1 year	☐
24	DC Power supply	E3610A	KR24104505	Agilent Technology	2021.01.20	1 year	☐
25	DC Power supply	UP-3005T	68	Unicon Co.,Ltd	2021.01.20	1 year	☐
26	DC Power Supply	SM 3400-D	114701000117	DELTAELEKTRONIKA	2021.01.20	1 year	☐
27	DC Power supply	6632B	MY43004005	Agilent Technology	2021.01.20	1 year	☐
28	DC Power Supply	6632B	MY43004137	Agilent Technology	2021.01.20	1 year	☒
29	Termination	1433-3	LM718	WEINSCHHEL	2020.07.11	1 year	☐
30	Termination	1432-3	QR946	AEROFLEX/WEINSCHHEL	2020.07.11	1 year	☐
31	Attenuator	24-30-34	BX5630	Aeroflex / Weinschel	2020.12.17	1 year	☐
32	Attenuator	8498A	3318A09485	HP	2021.01.22	1 year	☐
33	Step Attenuator	8494B	3308A32809	HP	2021.01.21	1 year	☐
34	RF Step Attenuator	RSP	100091	Rohde & Schwarz	2021.01.21	1 year	☐
35	Attenuator	18B50W-20F	64671	INMET	2021.01.22	1 year	☒
36	Attenuator	10 dB	1	Rohde & Schwarz	2020.05.14	1 year	☐
37	Attenuator	10 dB	2	Rohde & Schwarz	2020.05.14	1 year	☐
38	Attenuator	10 dB	3	Rohde & Schwarz	2020.05.14	1 year	☐
39	Attenuator	10 dB	4	Rohde & Schwarz	2020.05.14	1 year	☐
40	Attenuator	54A-10	74564	WEINSCHHEL	2020.09.05	1 year	☐
41	Attenuator	56-10	66920	WEINSCHHEL	2020.05.14	1 year	☐
42	Attenuator	48-20-11	BV2658	Aeroflex/Weinschel	2020.07.11	1 year	☐
43	Attenuator	48-30-33-LIM	BL5350	Weinschel Corp.	2020.07.11	1 year	☐
44	Power divider	11636B	51212	HP	2021.01.23	1 year	☐
45	3Way Power divider	KPDSU3W	00070365	KMW	2020.09.03	1 year	☐
46	4Way Power divider	70052651	173834	KRYTAR	2021.01.23	1 year	☐
47	3Way Power divider	1580	SQ361	WEINSCHHEL	2020.05.14	1 year	☐
48	OSP	OSP120	101577	Rohde & Schwarz	2020.05.14	1 year	☐
49	White noise audio filter	ST31EQ	101902	SoundTech	2020.09.04	1 year	☐

No.	Instrument	Model	S/N	Manufacturer	Next Cal Date	Cal interval	used
50	Dual directional coupler	778D	17693	HEWLETT PACKARD	2021.01.21	1 year	☐
51	Dual directional coupler	772D	2839A00924	HEWLETT PACKARD	2021.01.21	1 year	☐
52	Band rejection filter	3TNF-0006	26	DOVER Tech	2021.01.22	1 year	☐
53	Band rejection filter	3TNF-0007	311	DOVER Tech	2021.01.22	1 year	☐
54	Band rejection filter	WTR-BRF2442-84NN	09020001	WAVE TECH Co.,LTD	2021.01.22	1 year	☒
55	Band rejection filter	WRCJV12-5695-5725-5825-5855-50SS	1	Wainwright Instruments GmbH	2020.05.14	1 year	☐
56	Band rejection filter	WRCJV12-5120-5150-5350-5380-40SS	4	Wainwright Instruments GmbH	2020.05.14	1 year	☐
57	Band rejection filter	WRCGV10-2360-2400-2500-2540-50SS	2	Wainwright Instruments GmbH	2020.05.14	1 year	☐
58	Band rejection filter	CTF-155M-S1	001	RF One Electronics	2020.09.02	1 year	☐
59	Band rejection filter	CTF-435M-S1	001	RF One Electronics	2020.09.02	1 year	☐
60	Highpass Filter	WHJS1100-10EF	1	WAINWRIGHT	2021.01.22	1 year	☐
61	Highpass Filter	WHJS3000-10EF	1	WAINWRIGHT	2021.01.22	1 year	☐
62	Highpass Filter	WHNX6-5530-7000-26500-40CC	2	Wainwright Instruments GmbH	2020.05.14	1 year	☐
63	Highpass Filter	WHNX6-2370-3000-26500-40CC	4	Wainwright Instruments GmbH	2020.05.14	1 year	☐
64	WideBand Radio Communication Tester	CMW500	102276	Rohde & Schwarz	2021.01.21	1 year	☐
65	Bluetooth Tester	TC-3000B	3000B6A0166	TESCOM CO., LTD.	2021.01.22	1 year	☐
66	Loop Antenna	6502	9203-0493	EMCO	2021.05.27	2 year	☐
67	BiconiLog Antenna	3142B	1745	EMCO	2020.05.10	2 year	☐
68	Trilog-Broadband Antenna	VULB 9168	9168-606	SCHWARZBECK	2020.09.14	2 year	☒
69	Horn Antenna	3115	2996	EMCO	2022.02.14	2 year	☒
70	Horn Antenna	3115	9605-4834	EMCO	2022.03.06	2 year	☐
71	Horn Antenna	BBHA9170	743	SCHWARZBECK	2021.01.22	2 year	☒
72	PREAMPLIFIER(3)	8449B	3008A00149	Agilent	2020.09.02	1 year	☒
73	AMPLIFIER(10)	TK-PA6S	120009	TESTEK	2021.01.21	1 year	☐
74	AMPLIFIER	TK-PA18	150003	TESTEK	2021.01.21	1 year	☐
75	AMPLIFIER	TK-PA1840H	160010-L	TESTEK	2021.01.28	1 year	☐
76	AMPLIFIER	8447D	2944A07881	H.P	2021.01.21	1 year	☒

4. SUMMARY TEST RESULTS

Description of Test	FCC Rule	Reference Clause	Used	Test Result
Carrier frequency tolerance	15.225(e)	Clause 5.1	☒	Compliance
Field strength of radiated emission	15.225(a) ~ (d)	Clause 5.2	☒	Compliance
AC Conducted emission	15.207	Clause 5.3	☒	Compliance
Antenna requirement	15.203, 15.247	Clause 5.4	☒	Compliance
20 dB bandwidth measurement	2.1049	Clause 5.5	☒	Compliance
Compliance/pass : The EUT complies with the essential requirements in the standard. Not Compliance : The EUT does not comply with the essential requirements in the standard. N/A : The test was not applicable in the standard.				

Procedure Reference

FCC CFR 47, Part 15. Subpart C-15.225

ANSI C 63.10-2013

5. MEASUREMENT RESULTS

5.1 Carrier Frequency tolerance

5.1.1 Standard Applicable [FCC §15.225(e)]

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency Over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply from 85 % to 115 % of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


5.1.2 Test Environment conditions

- Ambient temperature : $(20 - 27) ^\circ\text{C}$ • Relative Humidity : $(53 - 59) \% \text{ R.H.}$

5.1.3 Measurement Procedure

Before measurements are made the equipment shall have reached thermal balance in the Test chamber period. and then it is normal operating for about 15 minutes after thermal balance has been reached. For tests at the extreme temperature, the equipment shall be left in the test chamber until thermal balance is attained, then the standby or receive condition for a period of a few minute after which the equipment shall meet the specified requirements. The test data sheet recorded measured value by frequency counter.

5.1.4 Test setup

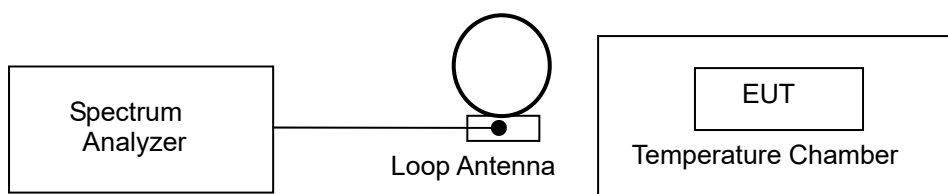

5.1.5 Measurement Result

Frequency (13.56 MHz)			Measured frequency [Hz]	Frequency Tolerance	
				%	Hz
T _{NOM} + 22 °C	V _{NOM}	12.0 Vdc	13.560 423	0.0030	423
	V _{MIN}	10.8 Vdc	13.560 421	0.0030	421
	V _{MAX}	13.2 Vdc	13.560 417	0.0030	417
T _{MIN} - 10 °C	V _{NOM}	12.0 Vdc	13.560 413	0.0030	413
T _{MAX} + 50 °C	V _{NOM}	12.0 Vdc	13.560 422	0.0030	422
Limit			Within in (±) 0.01 % or (±) 1 356 Hz		
Max. Tolerance			0.0032 %, (±)435 Hz		
Result			Compliance		

5.2 Field strength of radiated emissions

5.2.1 Standard Applicable [FCC §15.225 (a) ~ (d)]

(a) The Field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 $\mu\text{V}/\text{m}$ at 30 meter

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 micro volts/meter at 30 meter

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz, the field strength of any emissions shall not exceed 106 micro volts/meter at 30 meter

(d) The Field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed The general radiated emission limits in §15.209

Above required standard (a ~ c) and (d) is brief describe table as follows

§ 15.225 [(a) ~ (c)] : Limit for in-band field strength

Frequency Band (MHz)	Limit		Measurement distance (meter)
	($\mu\text{V}/\text{m}$)	(dB $\mu\text{V}/\text{m}$)	
13.553 – 13.567	15,848	84.00	30
13.410 – 13.553 13.567 – 13.710	334	50.47	30
13.110 – 13.410 13.710 – 14.010	106	40.50	30

§15.209. limits for radiated emissions measurements

Frequency Band	Limit [$\mu\text{V}/\text{m}$]	Limit [dB $\mu\text{V}/\text{m}$]	Measurement distance (meter)	Detector
0.009 – 0.490	2 400/F (kHz)	-	300	
0.490 – 1.705	2 4000/F (kHz)	-	30	
1.705 – 30.0	30	29.54	30	Quasi peak
30 - 88	100 **	40.0	3	Quasi peak
88 - 216	150 **	43.5	3	Quasi peak
216 - 960	200 **	46.0	3	Quasi peak
Above 960	500	54.0	3	Peak & Average

** fundamental emissions from intentional radiators operation under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz, or 470-806 MHz. However, operation within these Frequency bands is permitted under other sections of this Part Section 15.231 and 15.241

§15.205. Restrict Band of Operation

Only spurious emissions are permitted in any of the frequency bands listed below ;

[MHz]	[MHz]	[MHz]	[GHz]
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505**	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	Above 38.6

** Until February 1, 1999, this restricted band shall be 0.490-0.510

5.2.2 Test Environment conditions

- Ambient temperature : (20 - 27) °C • Relative Humidity : (53 - 59) % R.H.

5.2.3 Measurement Procedure

The measurements procedure of the transmitter radiated E-field is as following describe method.

The test is performed in a Shield chamber to determine the accurate frequencies, after maximum emissions level will be checked on a test chamber and measuring distance is 3 m from EUT to test antenna.

(The chamber is ensured that comply with at least 6 dB above the ambient noise level)

- ① The EUT was powered ON with continuously operating mode and placed on a 0.8 meter high non-conductive table on the reference ground plane.
- ② The test antenna was used on Horn antenna for above 1 GHz, and if the below 1 GHz, broad-band antenna and Loop antenna were used for below 30 MHz and it's antenna positioned in both the horizontal and vertical plane was location at EUT during the test for maximized the emission measurement.
- ③ The output of the test antenna will be connected to a measuring receiver, and it is set to tuned over the frequency range according to required standard
- ④ The measuring detector type of the measurement receiver is based on average value of measurement instrumentation employing a CISPR Quasi Peak detector according to required standard and for above 1 GHz, set the spectrum analyzer on a average and peak detector for the provisions in §15.35 and investigated frequency range is set the spectrum analyzer according to §15.33.
- ⑤ The fundamental frequency at which a relevant radiated signal component is detected, the test antenna will be raised and lowered through the specified range of heights in horizontal and vertical polarized orientation, until an maximum signal level is detected on the measuring receiver.
- ⑥ The transmitter is position x,y,z axis on rotating through 360 degrees, until the maximum signal level is detected by the measuring receiver.
- ⑦ The receiver is scanned from requested measuring frequency band and then the maximum meter reading

is recorded. The radiated emissions were measured with required standard.

- The measurement results are obtained as described below:

$$\text{Result(dB } \mu\text{V/m)} = \text{Reading(dB } \mu\text{V)} + \text{Antenna factor(dB/m)} + \text{CL(dB)} + \text{other applicable factor (dB)}$$
- According to §15.33 (a)(1), Frequency range of radiated measurement is performed the tenth harmonic.
- ※ if necessary, additionally receiver is adopted high-pass filter and preamp because lower radiated signal
- ※ The transmitter radiated spectrum was investigated from 9 kHz to 1 GHz


5.2.4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the UCISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.


Radiated Emission measurement: Below 1 GHz: 3.62 dB (CL: Approx 95 %, $k=2$)
 Above 1 GHz: 4.06 dB (CL: Approx 95 %, $k=2$)

5.2.5 Test Configuration

Radiated emission setup, Below 30 MHz

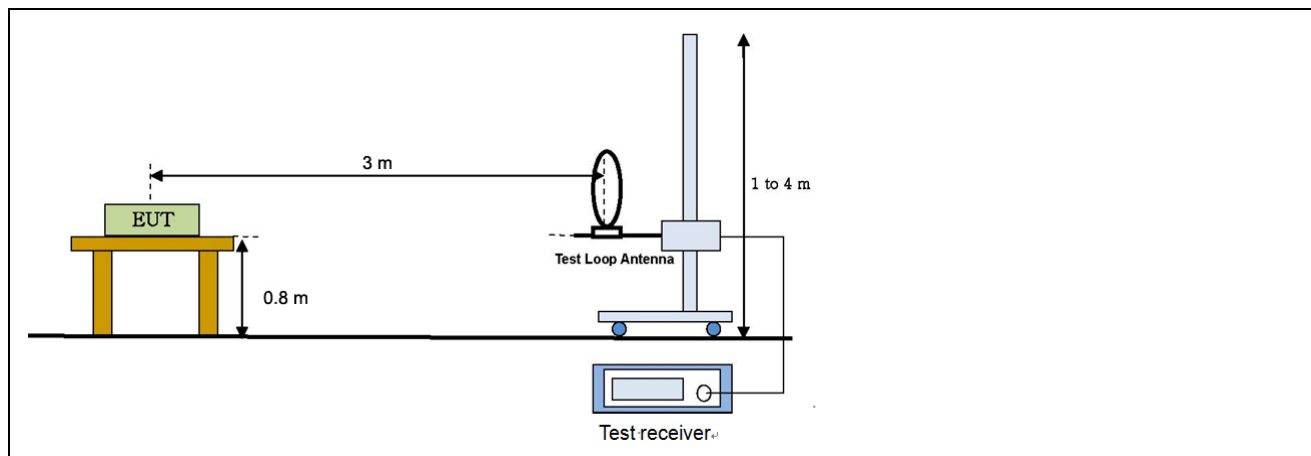

Radiated emission setup, Below 1 000 MHz

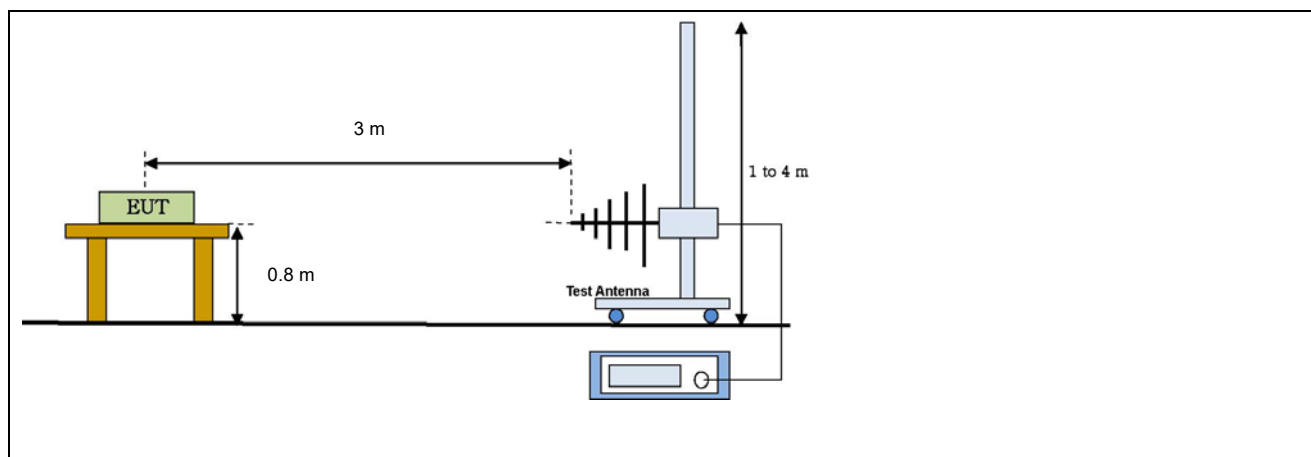

5.2.6 Measurement Result

■ IN-BAND

Freq. (MHz)	Reading (dB μ V/m)	Table (Deg)	Pstn (axis)	Antenna			CL (dB)	Pre AMP (dB)	Distn factor (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn (dB)	Result
				Height (m)	Pol. (H/V)	Fctr. (dB/m)							
13.561*	43.25	0	X	1	-	9.39	0.62	-	-40	13.26	84.00	70.74	Compliance
13.142	22.32	0	X	1	-	9.41	0.61	-	-40	-7.66	40.50	48.16	Compliance
13.539	26.38	0	X	1	-	9.39	0.62	-	-40	-3.61	50.47	54.08	Compliance
13.577	26.15	0	X	1	-	9.39	0.62	-	-40	-3.84	50.47	54.31	Compliance
13.792	21.07	0	X	1	-	9.37	0.63	-	-40	-8.93	40.50	49.43	Compliance

*It is fundamental frequency

Note1. above measured frequency have been done at 3 m distance and corrected according to required FCC 15.209. e)
 $\therefore$ Extrapolation distance factor : $40\log(3/30) = -40$ dB If Measurement distance is 3 m and Mandatory requirement distance is 30 m at 30 MHz or less, extrapolation distance factor(dB) is $40 / \text{decade} = 40 \log_{10}^{(MRD/MD)}$
MRD is Mandatory requirement distance and MD is Measured distance

Note2. above measured frequencies is apply required standard FCC Part 15.225

Note3. All measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded.

Note4. All measurements were recorded using a quasi-peak detector.

Freq.(MHz) : Measurement frequency, Reading(dB μ V/m) : Indicated value for test receiver,
Table (Deg) : Directional degree of Turn table, Pstn(axis) : Location axis of EUT
Antenna (Height, Pol, Fctr) : Antenna Height, Polarization and Factor
Cbl(dB) : Cable loss, Distn factor(dB) : distance correction factor [40 dB/decade as per § 15.31f (2)]
Meas Result (dB μ V/m) : Reading(dB μ V/m)+ Antenna factor.(dB/m) + CL(dB) + Distn factor(dB)
Limit(dB μ V/m): Limit value specified with FCC Rule, Mgn(dB) : FCC Limit (dB μ V/m) – Meas Result(dB μ V/m)


■ OUT- BAND

Freq. (MHz)	Reading (dB μ V/m)	Table (Deg)	Antenna			CL (dB)	Pre AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn (dB)	Result
			Height (m)	Pol. (H/V)	Fctr. (dB/m)						
40.58	49.86	0	4.0	H	13.35	0.80	-28.42	35.59	40.00	4.41	Compliance
231.85	51.99	0	3.6	H	11.32	2.10	-27.51	37.90	43.50	5.60	Compliance
474.79	46.40	15	2.5	H	14.69	2.58	-27.60	36.07	43.50	7.43	Compliance

Freq.(MHz) : Measurement frequency, Reading(dB μ V/m) : Indicated value for test receiver,
 Table (Deg) : Directional degree of Turn table,
 Antenna (Height, Pol, Fctr) : Antenna Height, Polarization and Factor
 Cbl(dB) : Cable loss, Pre AMP(dB) : Preamplifier gain(dB)
 Meas Result (dB μ V/m) : Reading(dB μ V/m)+ Antenna factor.(dB/m)+ CL(dB) - Pre AMP(dB)
 Limit(dB μ V/m): Limit value specified with FCC Rule, Mgn(dB) : FCC Limit (dB μ V/m) – Meas Result(dB μ V/m)

5.2.7 Test plot



■ Fundamental frequency level & ≤ 30 MHz spectrum mask

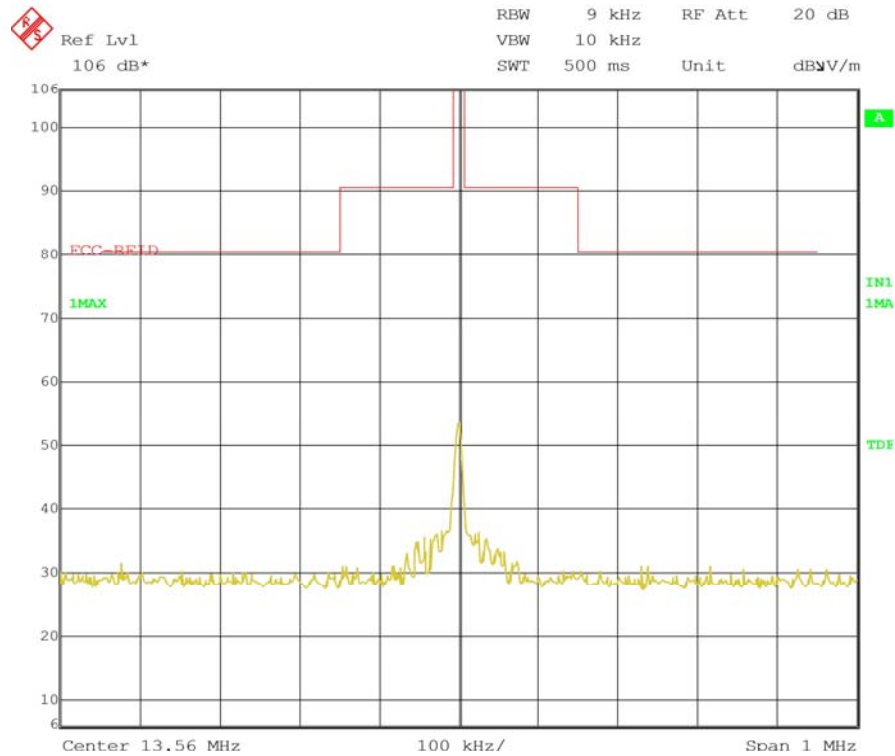

■ OUT- BAND Spurious

Horizontal

Vertical

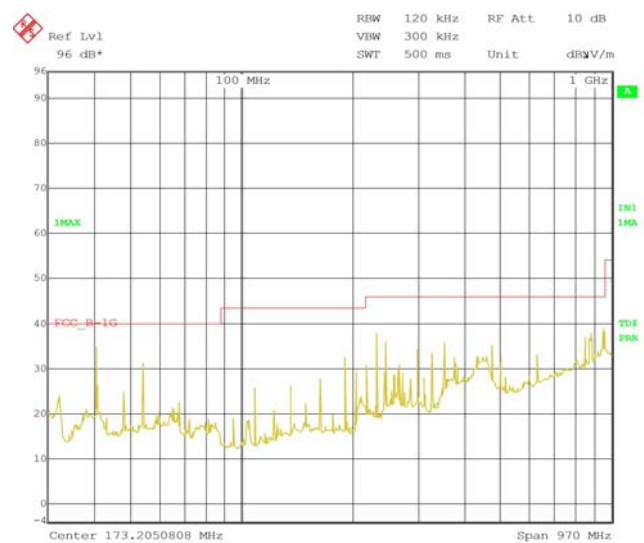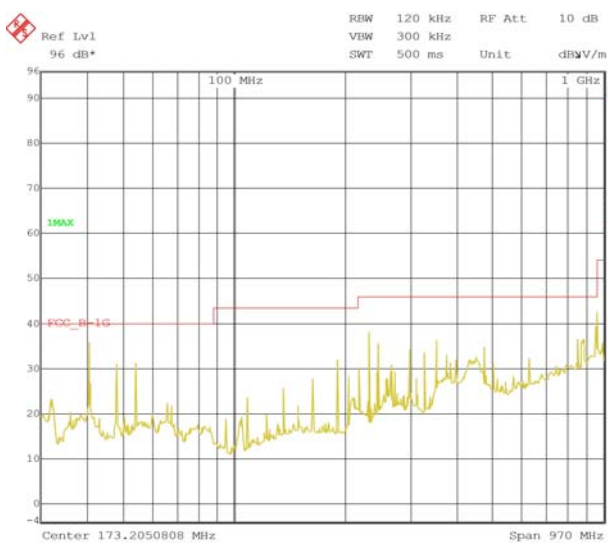

* Worst case only

5.3 Antenna requirement

5.3.1 Standard applicable [FCC §15.203]

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that user a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The manufacturer may design the unit so that broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.3.2 Antenna details

Frequency Band	Antenna Type	Gain [dBi]	Results
13.56 MHz	Internal PCB antenna	N/A	Compliance

5.4 AC Power Conducted emissions

5.4.1 Standard Applicable [FCC §15.207(a)]

For intentional radiator that is designed to be connected to the public utility(AC)power line, the radio frequency. Voltage that is conducted back onto the AC power line on any frequencies hopping mode within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line Impedance stabilization network(LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

§15.207 limits for AC line conducted emissions;

Frequency of Emission(MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

5.4.2 Test Environment conditions

• Ambient temperature : (24 ~ 28) °C • Relative Humidity : (54 ~ 60) % R.H.

5.4.3 Measurement Procedure

EUT was placed on a non- metallic table height of 0.8 m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the Maximum signal strength.

5.4.4 Used equipment

Equipment	Model No.	Serial No.	Manufacturer	Next cal date	Cal interval	Used
Test receiver	ESCS30	100111	Rohde & Schwarz	2021. 01. 21	1 year	☒
Pulse Limiter	ESH3-Z2	100097	Rohde & Schwarz	2021. 01. 21	1 year	☒
LISN	ESH2-Z5	100044	R&S	2021. 01. 21	1 year	☒
	ESH3-Z5	100147	R&S	2021. 01. 22	1 year	☒

*Test Program: " ESXS-K1 V2.2"

Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

0.009 ~ 0.15 MHz : 3.94 dB(CL: Approx 95 %, $k=2$)


0.15 ~ 30 MHz : 3.32 dB(CL: Approx 95 %, $k=2$)

5.4.5 Measurement Result


Freq. [MHz]	Factor [dB]		POL	QP			CISPR AV		
				Limit [dB/μV]	Reading [dB/μV]	Result [dB/μV]	Limit [dB/μV]	Reading [dB/μV]	Result [dB/μV]
	LISN	CABLE +P/L							
0.162	0.13	9.98	L	65.38	47.00	47.13	55.38	34.65	34.78
0.177	0.12	10.01	L	64.61	44.44	44.56	54.61	34.57	34.69
0.318	0.12	10.06	L	59.76	43.26	43.38	49.76	38.89	39.01
3.970	0.20	10.23	L	56.00	39.89	40.09	46.00	34.66	34.86
27.119	0.75	10.68	L	60.00	41.67	42.42	50.00	37.92	38.67
0.158	0.12	9.98	N	65.58	48.51	48.63	55.58	36.78	36.90
0.193	0.12	10.05	N	63.91	44.09	44.21	53.91	34.99	35.11
0.302	0.12	10.06	N	60.18	39.27	39.39	50.18	33.81	33.93
3.783	0.20	10.23	N	56.00	36.47	36.67	46.00	31.07	31.27
27.123	0.68	10.68	N	60.00	42.09	42.77	50.00	38.73	39.41

- * LISN: LISN insertion Loss, Cable: Cable Loss, P/L: pulse limiter factor
- * L: Line. Live, N: Line. Neutral
- * Reading: test receiver reading value (with cable loss & pulse limiter factor)
- * Result = LISN + Reading

Line. Live

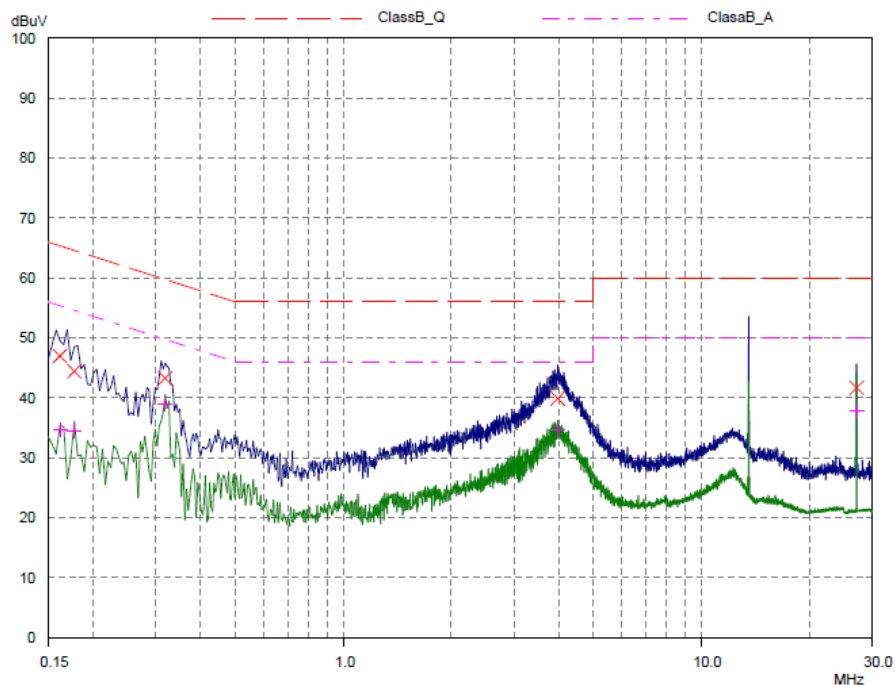

Line. Neutral

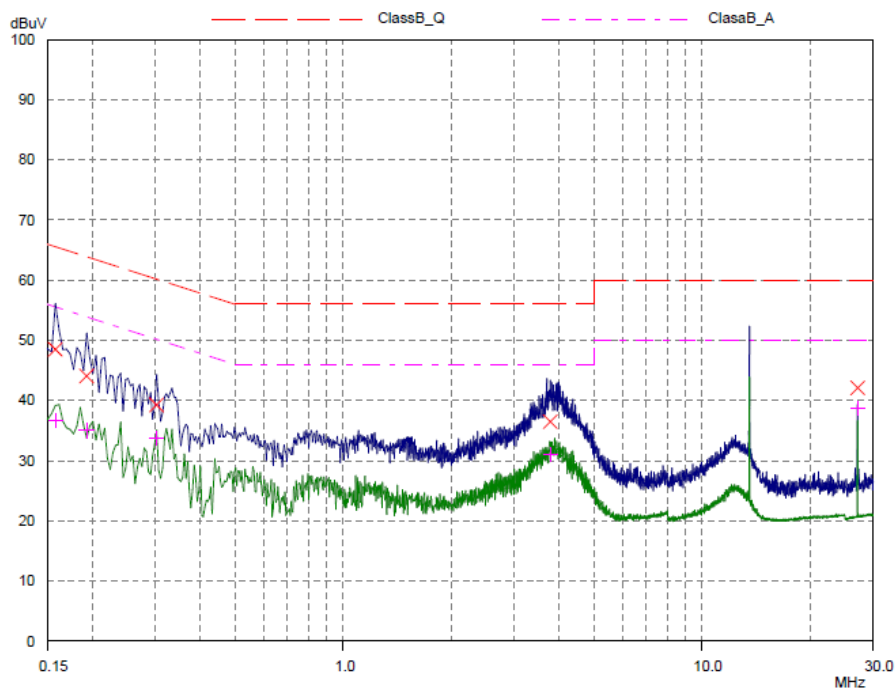

5.5 20 dB bandwidth measurement

5.5.1 Standard applicable [FCC §2.1049]

The 20 dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


5.5.2 Test Environment conditions

- Ambient Temperature : (21 - 24) °C • Relative Humidity : (50 - 57) % R.H.

5.5.3 Measurement Procedure

Please refer 5.5.1

5.5.4 Test setup

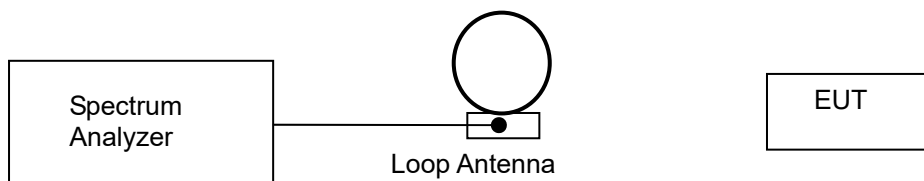

5.5.5 Measurement Result

Frequency	20 dB bandwidth
13.56 MHz	4.46 kHz

5.5.6 Test plot

