



Test Result:


11A_Ant1_Low_5180

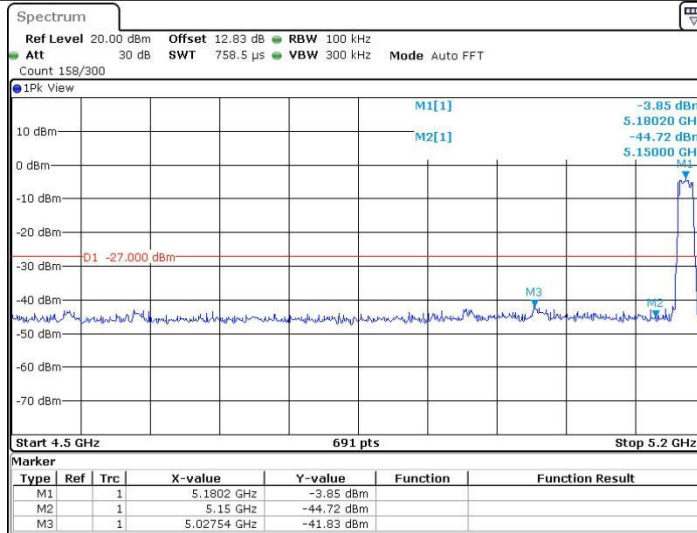

11A_Ant1_High_5240

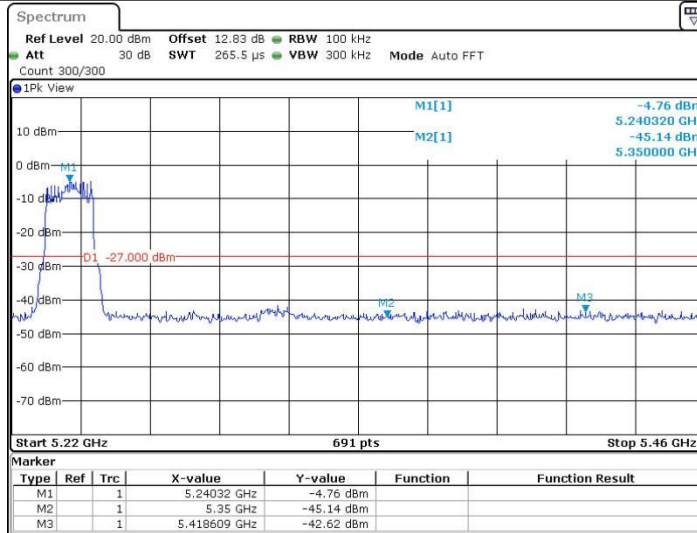


11N20SISO_Ant1_Low_5180

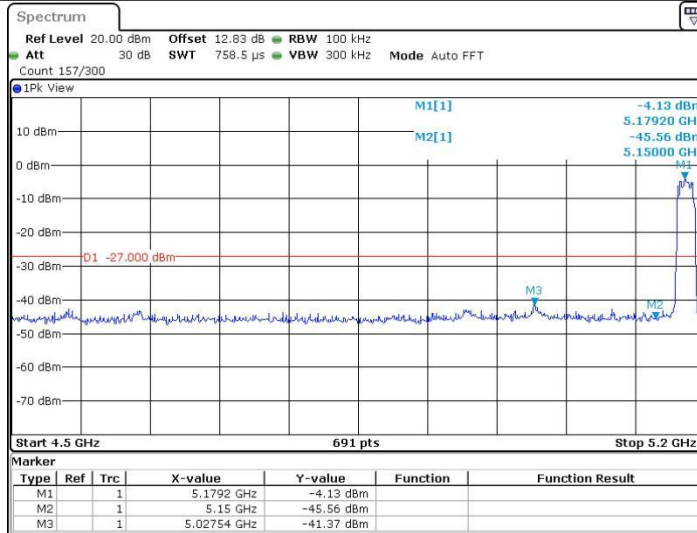


Date: 20.OCT.2023 14:53:06

11N20SISO_Ant1_High_5240

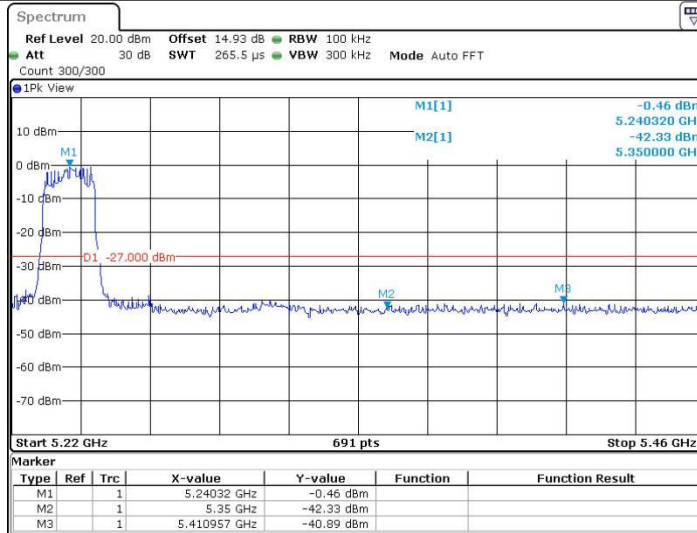


Date: 24.OCT.2023 15:08:48

11N40SISO_Ant1_Low_5190

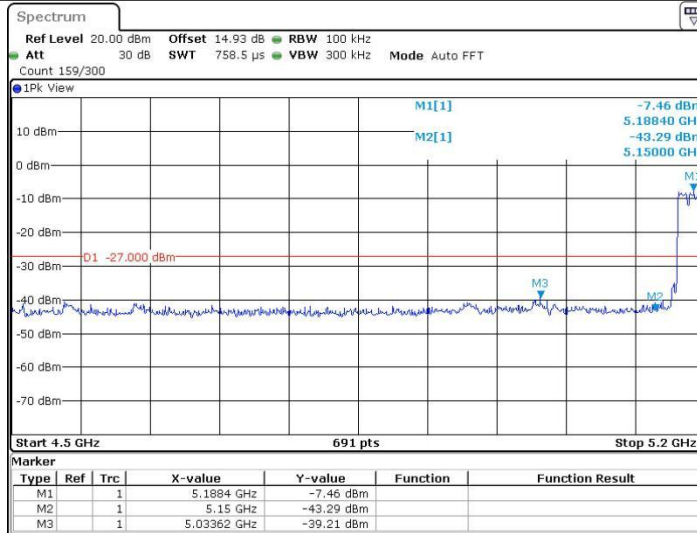


Date: 27.OCT.2023 15:43:11

11N40SISO_Ant1_High_5230

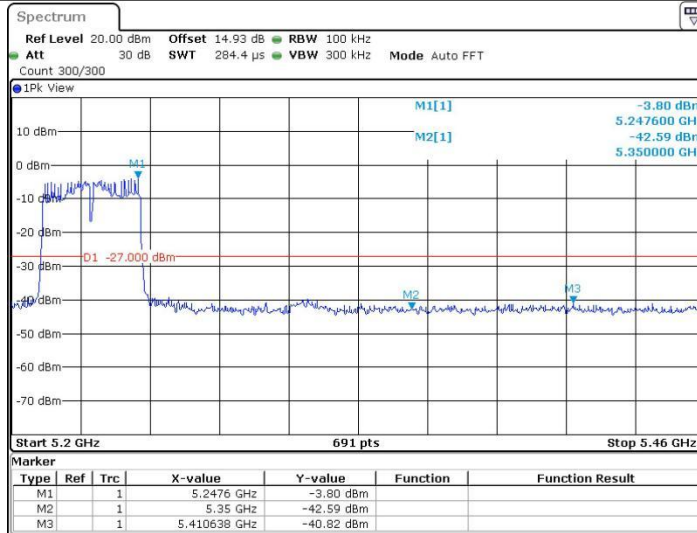


Date: 24.OCT.2023 15:23:45

11AC20SISO_Ant1_Low_5180

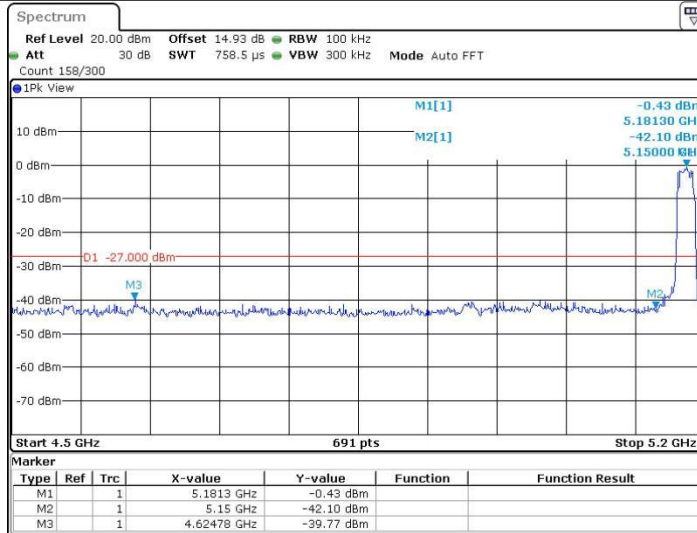


Date: 24 OCT.2023 15:37:34

11AC20SISO_Ant1_High_5240

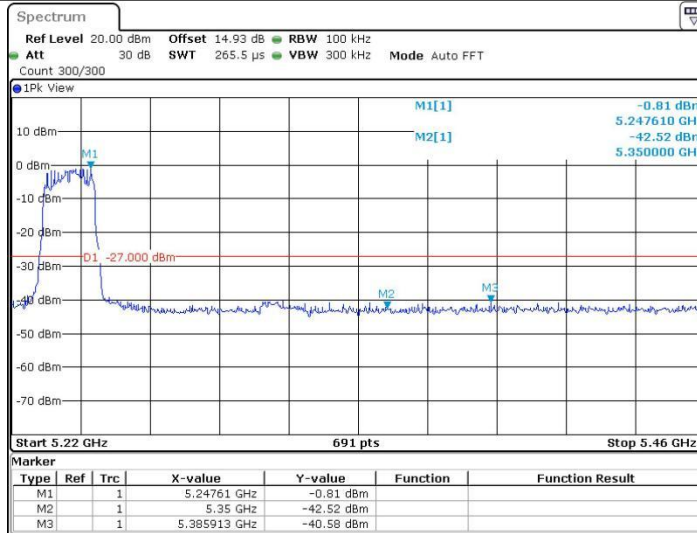


Date: 24 OCT.2023 15:45:45

11AC40SISO_Ant1_Low_5190

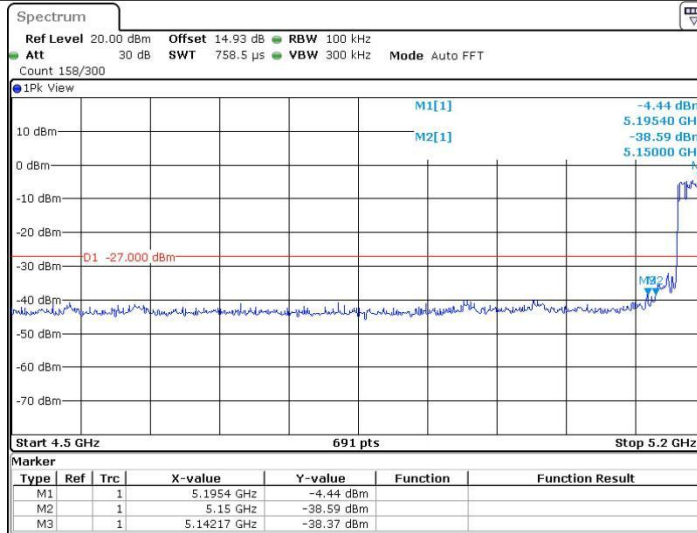


Date: 24.OCT.2023 17:23:16

11AC40SISO_Ant1_High_5230

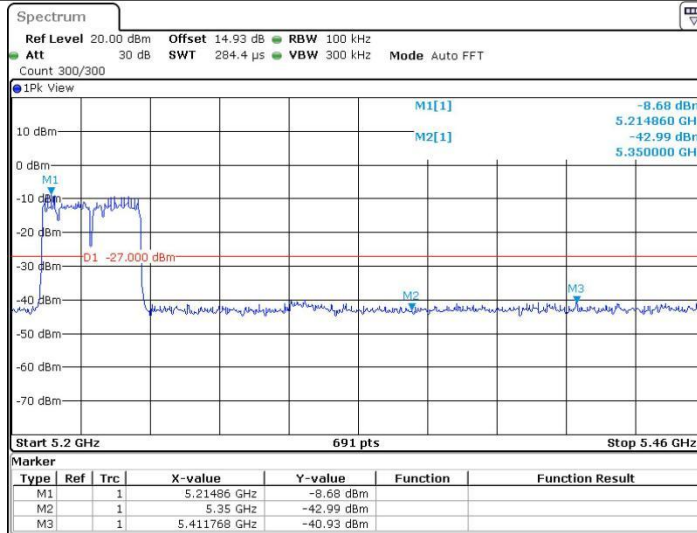


Date: 27.OCT.2023 15:48:24

11AC80SISO_Ant1_Low_5210

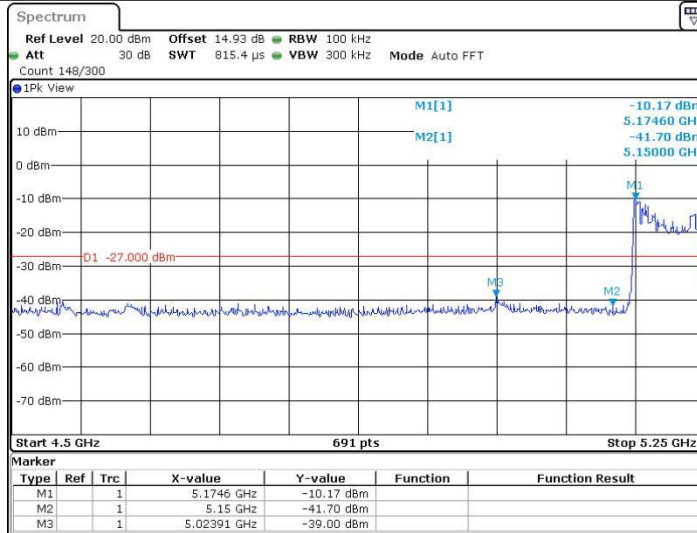


Date: 25 OCT.2023 15:27:16

11AC80SISO_Ant1_High_5210

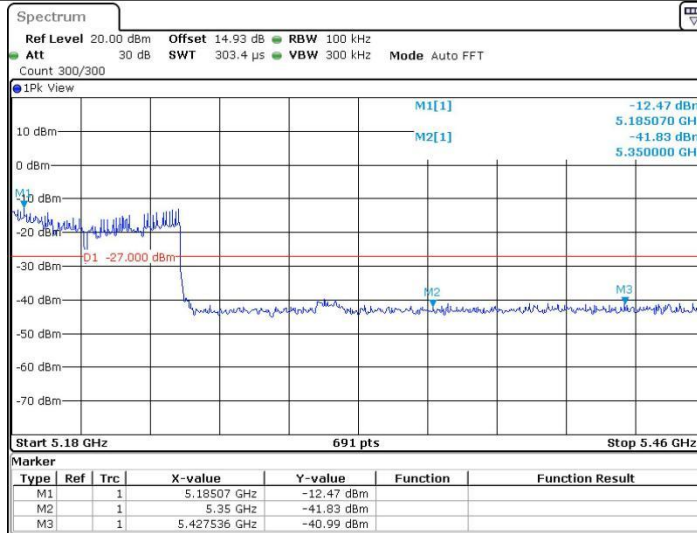


Date: 25 OCT.2023 15:27:31

11A_Ant1_Low_5745

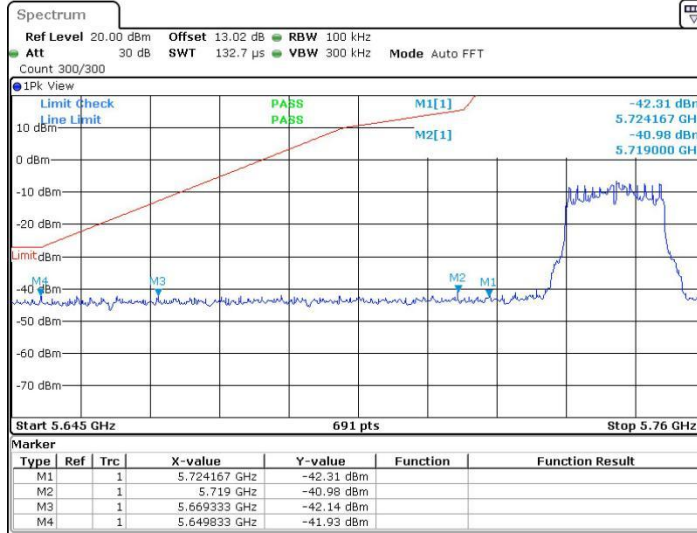


Date: 20.OCT.2023 14:34:16

11A_Ant1_High_5825

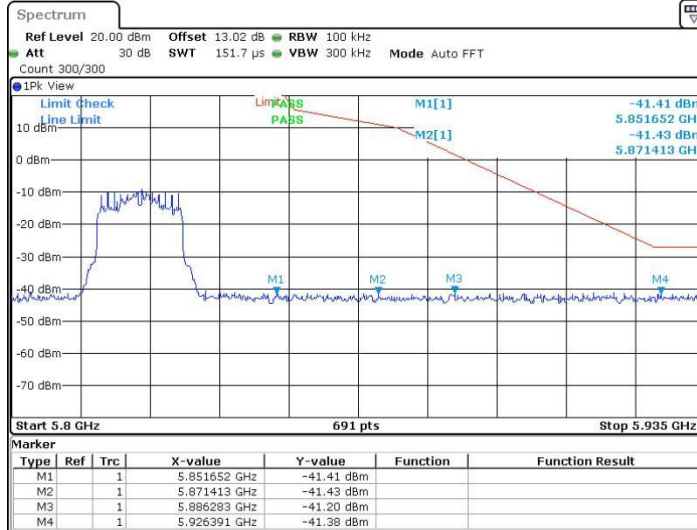


Date: 20.OCT.2023 14:42:54

11N20SISO_Ant1_Low_5745

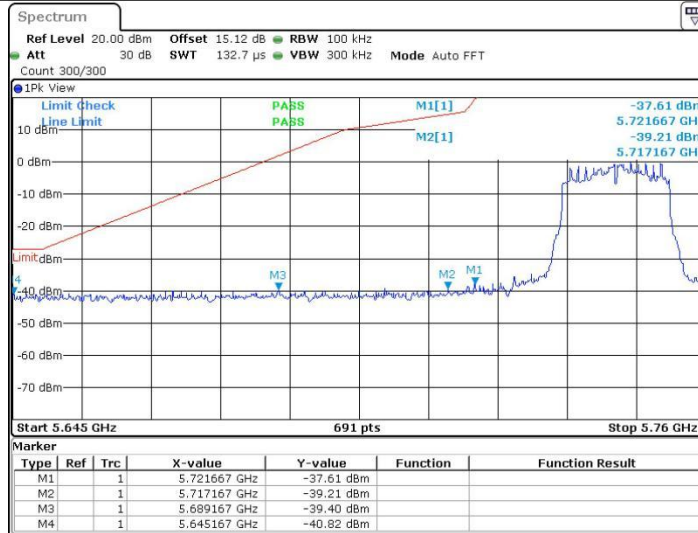

Date: 24.OCT.2023 15:12:14

11N20SISO_Ant1_High_5825

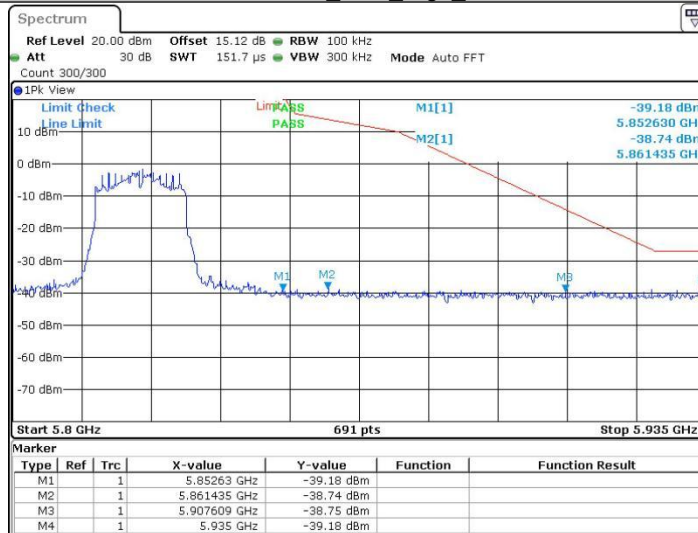


Date: 24.OCT.2023 15:17:06

11N40SISO_Ant1_Low_5755




Date: 24 OCT 2023 15:27:58

11N40SISO_Ant1_High_5795

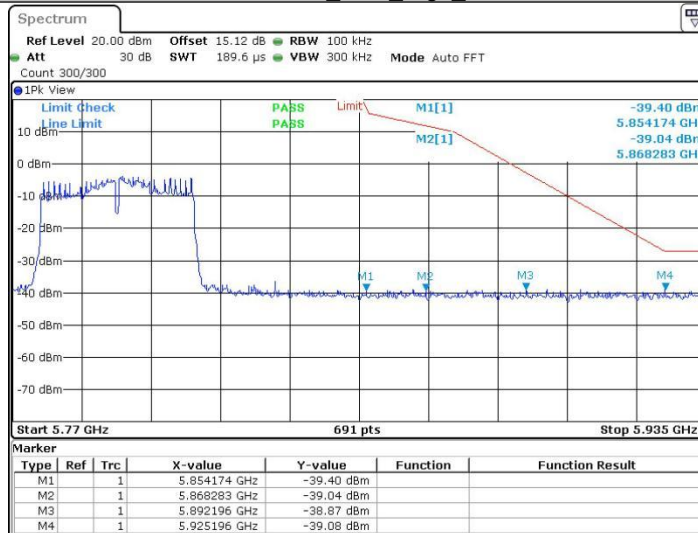


Date: 24 OCT 2023 15:33:48

11AC20SISO_Ant1_Low_5745

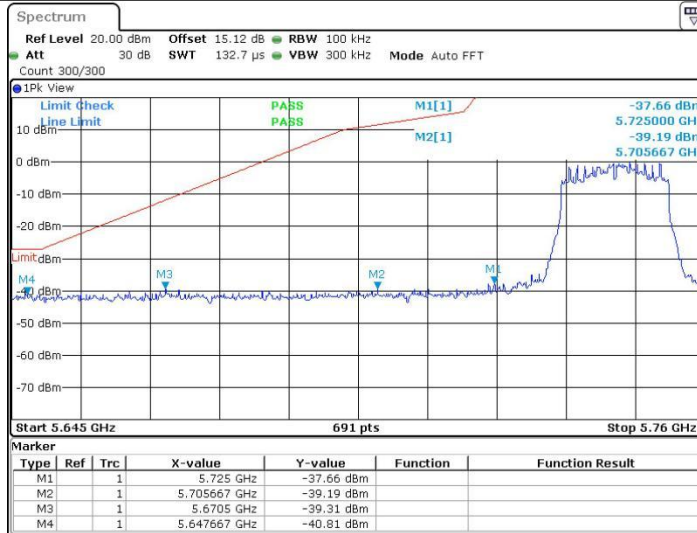


Date: 24 OCT.2023 15:50:15

11AC20SISO_Ant1_High_5825

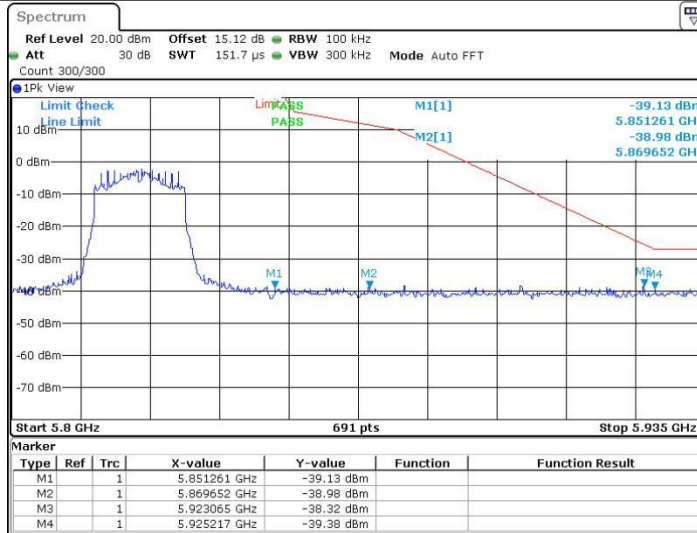


Date: 24 OCT.2023 16:15:11

11AC40SISO_Ant1_Low_5755

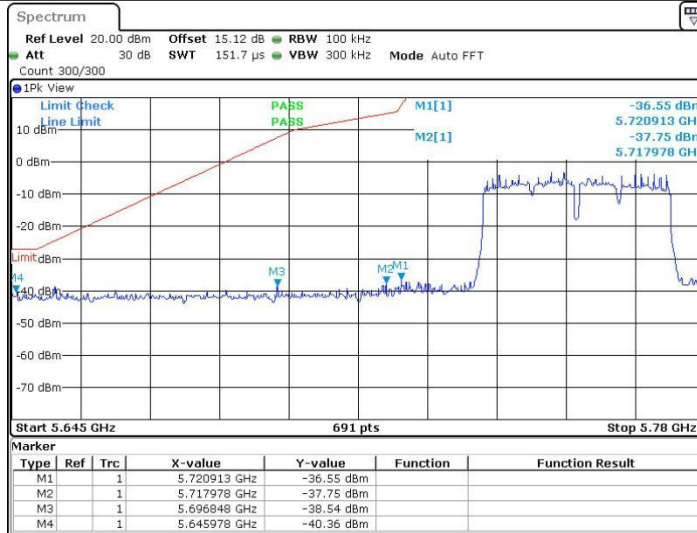


Date: 25 OCT 2023 15:16:39

11AC40SISO_Ant1_High_5795

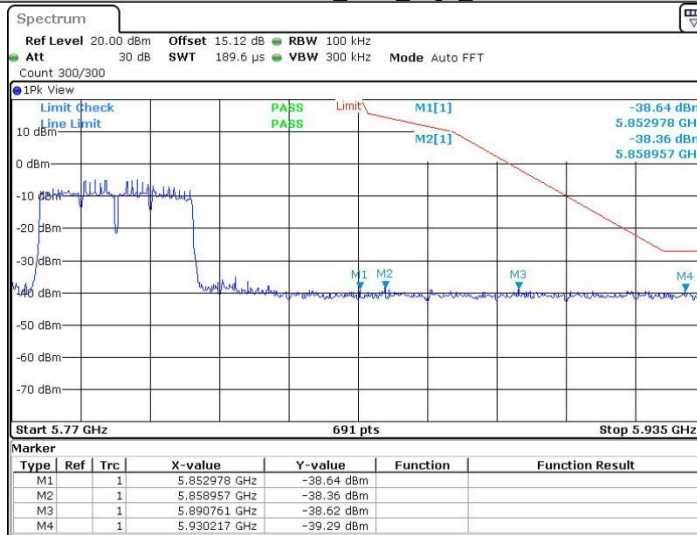


Date: 25 OCT 2023 15:24:21

11AC80SISO_Ant1_Low_5775

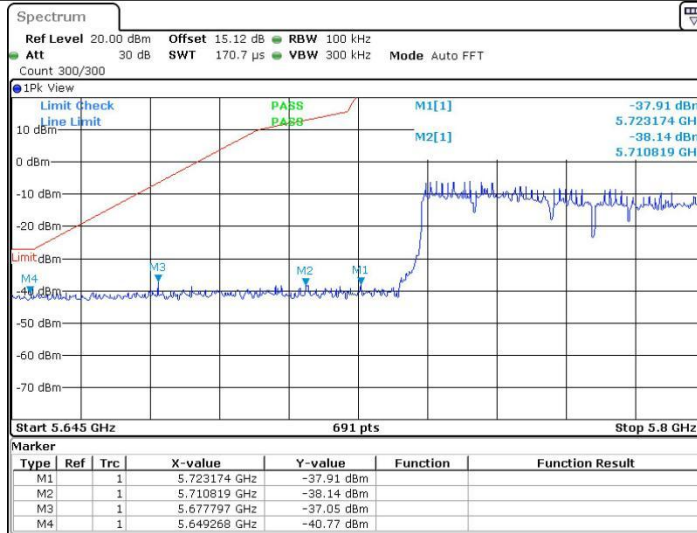

Date: 25 OCT 2023 15:31:36

11AC80SISO_Ant1_High_5775

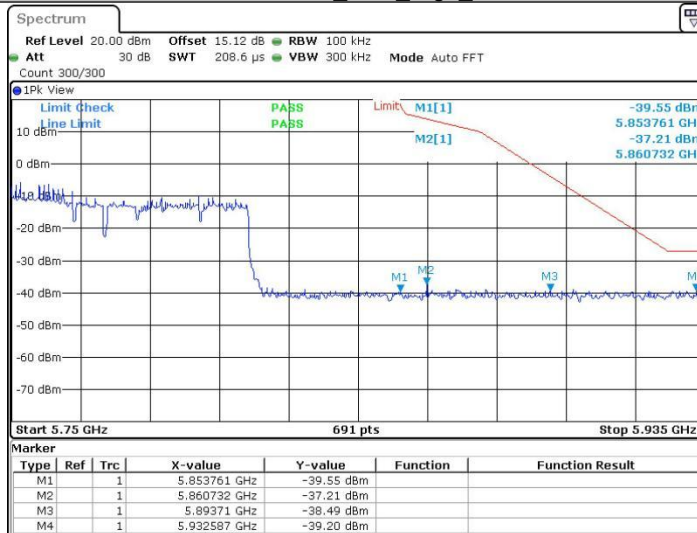

Date: 25 OCT 2023 15:31:55


Appendix E): Frequency Stability

Test Requirement 47 CFR Part 15, Subpart C 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

Limit: The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

Test Setup Diagram

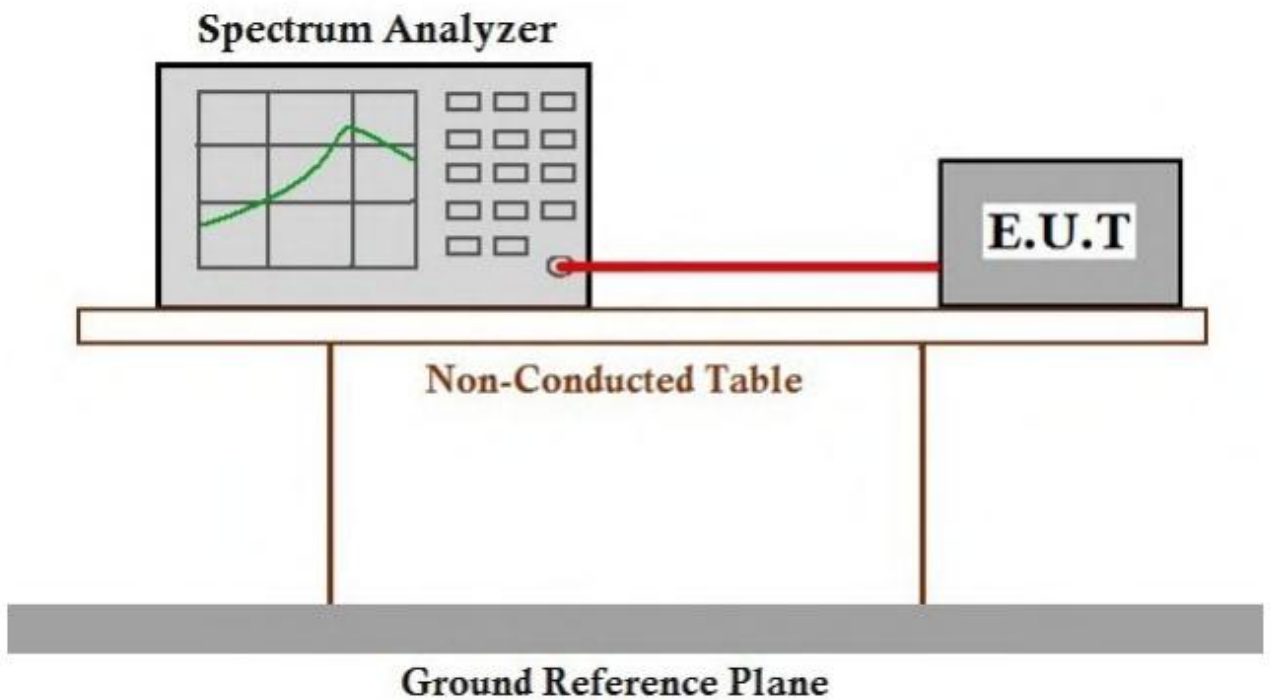

Measurement Data

Frequency Stability Versus Temp.			
Operating Frequency: 5240 MHz			
Temp (°C)	Volta ge	Deviation (Hz)	Frequency Drift (ppm)
50	VN	-40000.00	-7.633588
40		-40000.00	-7.633588
30		-40000.00	-7.633588
20		-40000.00	-7.633588
10		-40000.00	-7.633588
0		-40000.00	-7.633588
-10		-40000.00	-7.633588
-20		-40000.00	-7.633588

Frequency Stability Versus Temp.			
Operating Frequency: 5210 MHz			
Temp.	Volta ge	Deviation (Hz)	Frequency Drift (ppm)
TN	VL	-40000.00	-7.677543
	VN	-39000.00	-7.485605
	VH	-39000.00	-7.485605

Note: All the modulation and channels had been tested, but only the worst data recorded in the report.

Appendix F): Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.407(a)(1) (2) requirement:

The conducted output power limit specified in paragraph (a) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (a) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power and the peak power spectral density shall be reduced by the by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:



The antenna is internal antenna with ipex connector. The best case gain of the 5G WiFi antenna is 1.39dBi@Band 1, 3.31dBi@Band 4.

Appendix G): Operation in the absence of information to the transmit

15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

Operation in the absence of information to the transmit

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare)

Appendix H): AC Power Line Conducted Emission


<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 														
<p>Limit:</p>	<table border="1" data-bbox="499 1037 1366 1256"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

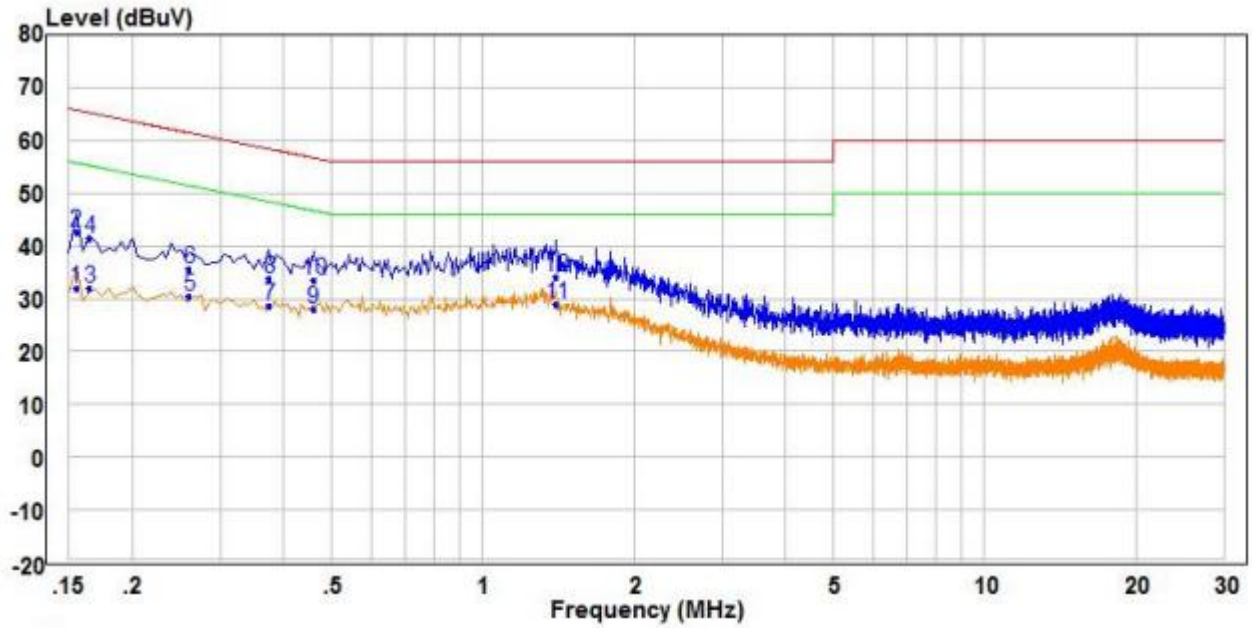

	Read			Limit	Over			
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase	
MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.155	22.41	9.69	32.10	55.73	-23.63	Average	Line
2	0.155	32.91	9.69	42.60	65.73	-23.13	QP	Line
3	0.165	22.43	9.67	32.10	55.21	-23.11	Average	Line
4	0.165	31.85	9.67	41.52	65.21	-23.69	QP	Line
5	0.260	20.93	9.53	30.46	51.43	-20.97	Average	Line
6	0.260	26.12	9.53	35.65	61.43	-25.78	QP	Line
7	0.375	19.14	9.58	28.72	48.39	-19.67	Average	Line
8	0.375	24.34	9.58	33.92	58.39	-24.47	QP	Line
9	0.460	18.38	9.67	28.05	46.69	-18.64	Average	Line
10	0.460	23.75	9.67	33.42	56.69	-23.27	QP	Line
11 PP	1.400	18.36	10.64	29.00	46.00	-17.00	Average	Line
12 QP	1.400	23.35	10.64	33.99	56.00	-22.01	QP	Line

Neutral line:

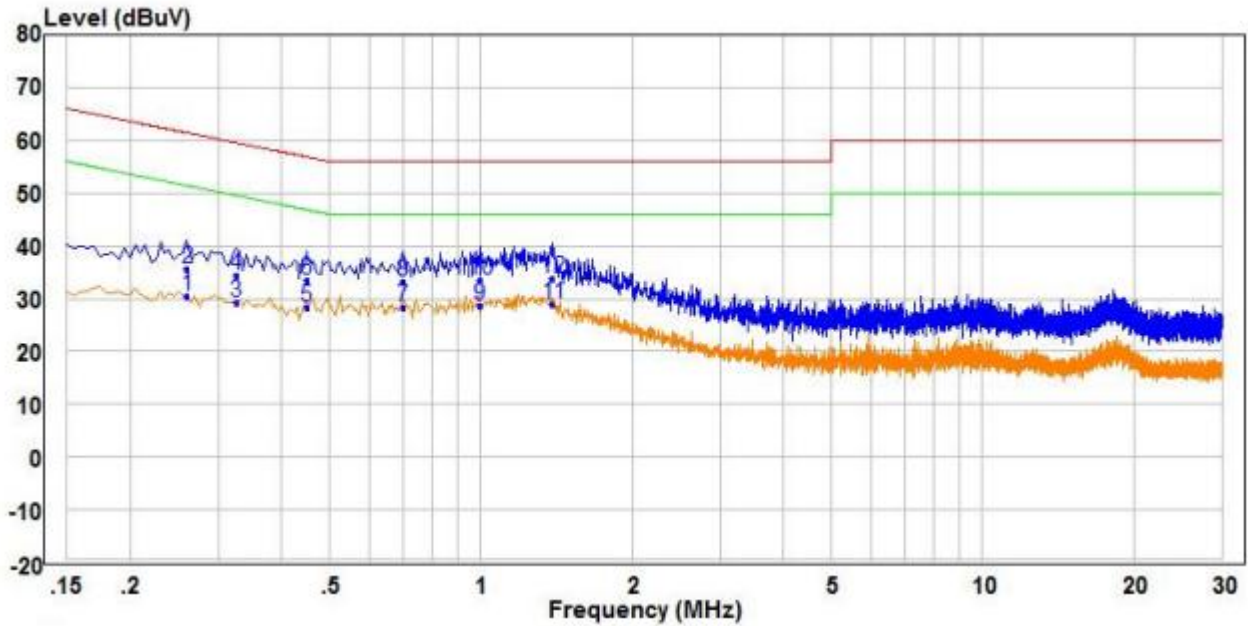

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.260	20.85	9.53	30.38	51.43	-21.05	Average	Neutral
2	0.260	26.10	9.53	35.63	61.43	-25.80	QP	Neutral
3	0.325	19.81	9.51	29.32	49.58	-20.26	Average	Neutral
4	0.325	24.96	9.51	34.47	59.58	-25.11	QP	Neutral
5	0.450	18.56	9.65	28.21	46.88	-18.67	Average	Neutral
6	0.450	23.83	9.65	33.48	56.88	-23.40	QP	Neutral
7	0.700	18.44	9.90	28.34	46.00	-17.66	Average	Neutral
8	0.700	23.30	9.90	33.20	56.00	-22.80	QP	Neutral
9	0.995	19.06	9.70	28.76	46.00	-17.24	Average	Neutral
10	0.995	23.88	9.70	33.58	56.00	-22.42	QP	Neutral
11 PP	1.390	19.09	9.72	28.81	46.00	-17.19	Average	Neutral
12 QP	1.390	24.11	9.72	33.83	56.00	-22.17	QP	Neutral

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. The 6Mbps of rate of 802.11A_5240 is the worst case, only the worst data recorded in the report.

Appendix I): Restricted bands around fundamental frequency (Radiated Emission)

Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																	
Above 1GHz	Peak	1MHz	3MHz	Peak																	
	Peak	1MHz	10Hz	Average																	
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBμV/m @3cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dB μ V/m @3cm)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3cm)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	74.0	Peak Value																			

Test plot as follows:

Worse case mode:		802.11a(6Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150.00	54.00	-3.63	50.37	74	-23.63	peak	H
5150.00	36.89	-3.63	33.26	54	-20.74	AVG	H
5150.00	54.82	-3.63	51.19	74	-22.81	peak	V
5150.00	39.40	-3.63	35.77	54	-18.23	AVG	V

Worse case mode:		802.11a(6Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350.00	51.43	-3.59	47.84	74	-26.16	peak	H
5350.00	37.71	-3.59	34.12	54	-19.88	AVG	H
5350.00	52.19	-3.59	48.60	74	-25.40	peak	V
5350.00	35.01	-3.59	31.42	54	-22.58	AVG	V

Worse case mode:		802.11a(6Mbps)		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	51.60	-3.44	48.16	74	-25.84	peak	H
5725	36.84	-3.44	33.40	54	-20.60	AV	H
5725	53.53	-3.44	50.09	74	-23.91	peak	V
5725	37.41	-3.44	33.97	54	-20.03	AV	V

Worse case mode:		802.11a(6Mbps)		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	48.37	-3.42	44.95	74	-29.05	peak	H
5850	36.03	-3.42	32.61	54	-21.39	AV	H
5850	50.24	-3.42	46.82	74	-27.18	peak	V
5850	36.56	-3.42	33.14	54	-20.86	AV	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150.00	52.86	-3.63	49.23	74	-24.77	peak	H
5150.00	36.84	-3.63	33.21	54	-20.79	AVG	H
5150.00	54.57	-3.63	50.94	74	-23.06	peak	V
5150.00	39.19	-3.63	35.56	54	-18.44	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350.00	51.33	-3.59	47.74	74	-26.26	peak	H
5350.00	37.20	-3.59	33.61	54	-20.39	AVG	H
5350.00	50.77	-3.59	47.18	74	-26.82	peak	V
5350.00	35.37	-3.59	31.78	54	-22.22	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	52.25	-3.44	48.81	74	-25.19	peak	H
5725	36.69	-3.44	33.25	54	-20.75	AV	H
5725	53.77	-3.44	50.33	74	-23.67	peak	V
5725	36.05	-3.44	32.61	54	-21.39	AV	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	49.15	-3.42	45.73	74	-28.27	peak	H
5850	35.28	-3.42	31.86	54	-22.14	AV	H
5850	48.82	-3.42	45.40	74	-28.60	peak	V
5850	36.21	-3.42	32.79	54	-21.21	AV	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	52.27	-3.63	48.64	74	52.27	peak	H
5150	37.76	-3.63	34.13	54	37.76	AVG	H
5150	51.15	-3.63	47.52	74	51.15	peak	V
5150	38.20	-3.63	34.57	54	38.20	AVG	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350.00	55.58	-3.59	51.99	74	-22.01	peak	H
5350.00	38.27	-3.59	34.68	54	-19.32	AVG	H
5350.00	51.29	-3.59	47.70	74	-26.30	peak	V
5350.00	36.69	-3.59	33.10	54	-20.90	AVG	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	52.37	-3.44	48.93	74	-25.07	peak	H
5725	37.80	-3.44	34.36	54	-19.64	AV	H
5725	48.77	-3.44	45.33	74	-28.67	peak	V
5725	35.47	-3.44	32.03	54	-21.97	AV	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	53.92	-3.42	50.50	74	-23.50	peak	H
5850	36.08	-3.42	32.66	54	-21.34	AV	H
5850	48.69	-3.42	45.27	74	-28.73	peak	V
5850	35.51	-3.42	32.09	54	-21.91	AV	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150.00	52.80	-3.63	49.17	74	-24.83	peak	H
5150.00	37.66	-3.63	34.03	54	-19.97	AVG	H
5150.00	50.77	-3.63	47.14	74	-26.86	peak	V
5150.00	37.77	-3.63	34.14	54	-19.86	AVG	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350.00	56.11	-3.59	52.52	74	-21.48	peak	H
5350.00	38.35	-3.59	34.76	54	-19.24	AVG	H
5350.00	50.71	-3.59	47.12	74	-26.88	peak	V
5350.00	36.48	-3.59	32.89	54	-21.11	AVG	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	52.37	-3.44	48.93	74	-25.07	peak	H
5725	37.80	-3.44	34.36	54	-19.64	AV	H
5725	48.77	-3.44	45.33	74	-28.67	peak	V
5725	35.47	-3.44	32.03	54	-21.97	AV	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	53.92	-3.42	50.50	74	-23.50	peak	H
5850	36.08	-3.42	32.66	54	-21.34	AV	H
5850	48.69	-3.42	45.27	74	-28.73	peak	V
5850	35.51	-3.42	32.09	54	-21.91	AV	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150.00	52.64	-3.63	49.01	74	-24.99	peak	H
5150.00	36.88	-3.63	33.25	54	-20.75	AVG	H
5150.00	51.92	-3.63	48.29	74	-25.71	peak	V
5150.00	37.50	-3.63	33.87	54	-20.13	AVG	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350.00	54.39	-3.59	50.80	74	-23.20	peak	H
5350.00	38.90	-3.59	35.31	54	-18.69	AVG	H
5350.00	50.75	-3.59	47.16	74	-26.84	peak	V
5350.00	35.44	-3.59	31.85	54	-22.15	AVG	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	52.10	-3.44	48.66	74	-25.34	peak	H
5725	37.34	-3.44	33.90	54	-20.10	AV	H
5725	49.11	-3.44	45.67	74	-28.33	peak	V
5725	35.58	-3.44	32.14	54	-21.86	AV	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	54.23	-3.42	50.81	74	-23.19	peak	H
5850	37.64	-3.42	34.22	54	-19.78	AV	H
5850	49.55	-3.42	46.13	74	-27.87	peak	V
5850	35.78	-3.42	32.36	54	-21.64	AV	V

Worse case mode:		802.11ac(VHT80)(29.3Mbps)		Test channel:		42	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150.00	53.67	-3.63	50.04	74	-23.96	peak	H
5150.00	36.63	-3.63	33.00	54	-21.00	AVG	H
5150.00	51.11	-3.63	47.48	74	-26.52	peak	V
5150.00	38.37	-3.63	34.74	54	-19.26	AVG	V
5350.00	56.08	-3.59	52.49	74	-21.51	peak	H
5350.00	39.77	-3.59	36.18	54	-17.82	AVG	H
5350.00	50.73	-3.59	47.14	74	-26.86	peak	V
5350.00	35.73	-3.59	32.14	54	-21.86	AVG	V

Worse case mode:		802.11ac(VHT80)(29.3Mbps)		Test channel:		155	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	51.50	-3.44	48.06	74	-25.94	peak	H
5725	36.51	-3.44	33.07	54	-20.93	AV	H
5725	48.90	-3.44	45.46	74	-28.54	peak	V
5725	36.70	-3.44	33.26	54	-20.74	AV	V
5850	53.37	-3.42	49.95	74	-24.05	peak	H
5850	37.56	-3.42	34.14	54	-19.86	AV	H
5850	49.09	-3.42	45.67	74	-28.33	peak	V
5850	36.67	-3.42	33.25	54	-20.75	AV	V

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix J): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre) Test the EUT in the lowest channel ,the middle channel ,the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/cm)	Remark	Measurement distance (cm)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Test result:	PASS				


Test Data:
Radiated Emission below 1GHz

30MHz~1GHz		
Test mode:	Transmitting (802.11a 36CH)	Vertical

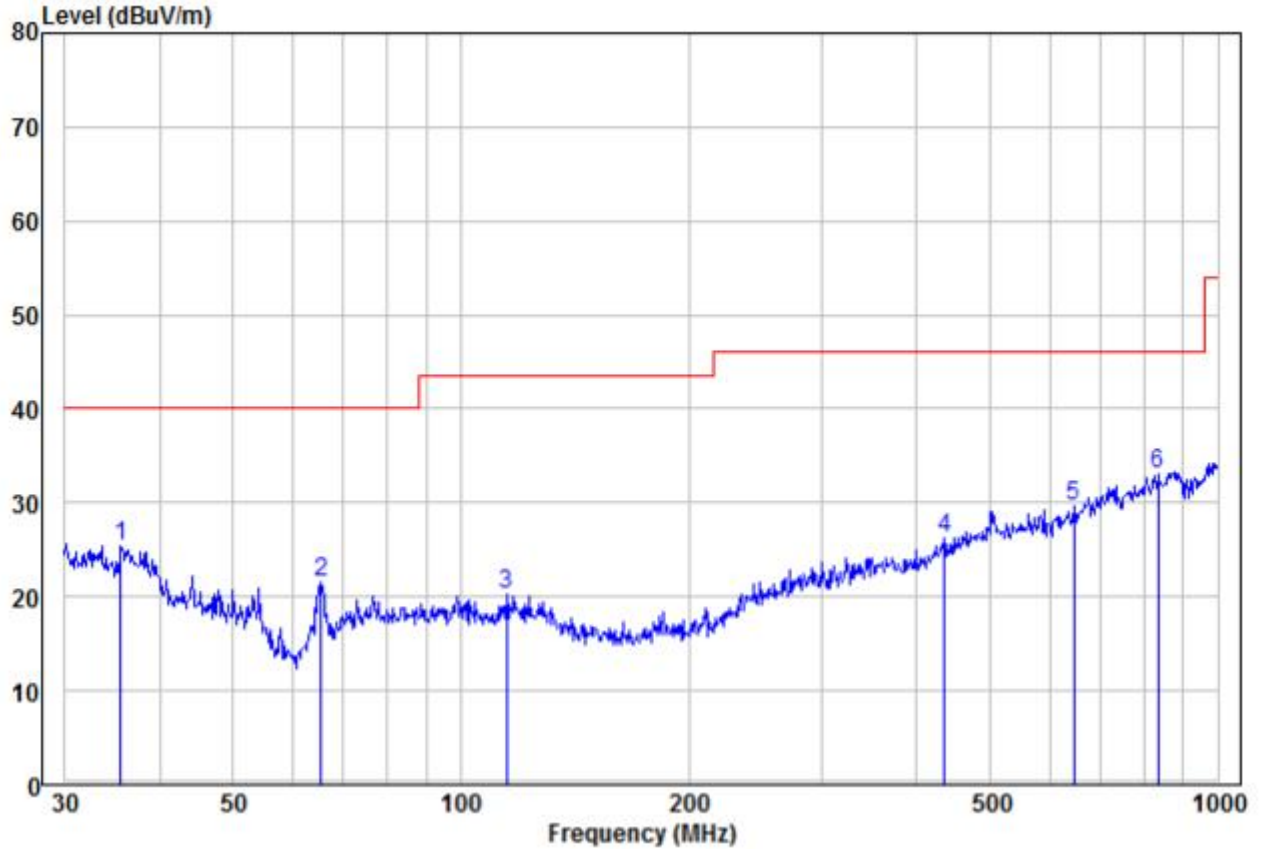


	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	35.50	10.92	14.42	25.34	40.00	-14.66 Peak	VERTICAL
2	65.34	14.77	6.70	21.47	40.00	-18.53 Peak	VERTICAL
3	114.92	9.81	10.44	20.25	43.50	-23.25 Peak	VERTICAL
4	435.59	9.99	16.27	26.26	46.00	-19.74 Peak	VERTICAL
5	645.12	10.02	19.60	29.62	46.00	-16.38 Peak	VERTICAL
6 pp	833.32	9.10	23.97	33.07	46.00	-12.93 Peak	VERTICAL

Test mode:	Transmitting (802.11a 36CH)	Horizontal
------------	-----------------------------	------------

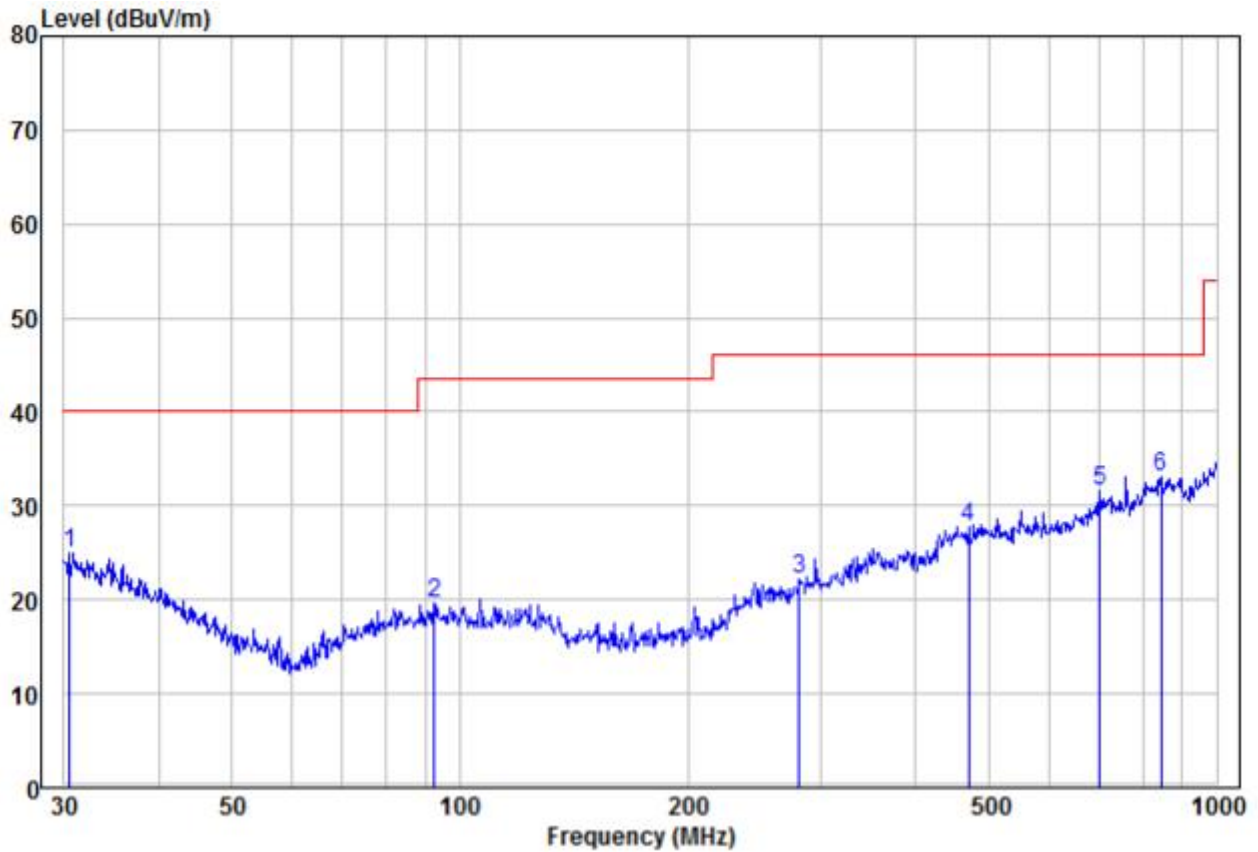


	Read Freq	Read Level	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	30.53	9.17	15.77	24.94	40.00	-15.06	Peak	HORIZONTAL
2	92.46	9.41	10.18	19.59	43.50	-23.91	Peak	HORIZONTAL
3	281.01	8.98	13.10	22.08	46.00	-23.92	Peak	HORIZONTAL
4	470.52	10.41	17.37	27.78	46.00	-18.22	Peak	HORIZONTAL
5	701.76	10.55	21.10	31.65	46.00	-14.35	Peak	HORIZONTAL
6 pp	845.09	8.99	24.08	33.07	46.00	-12.93	Peak	HORIZONTAL

30MHz~1GHz		
Test mode:	Transmitting (802.11a 149CH)	Vertical

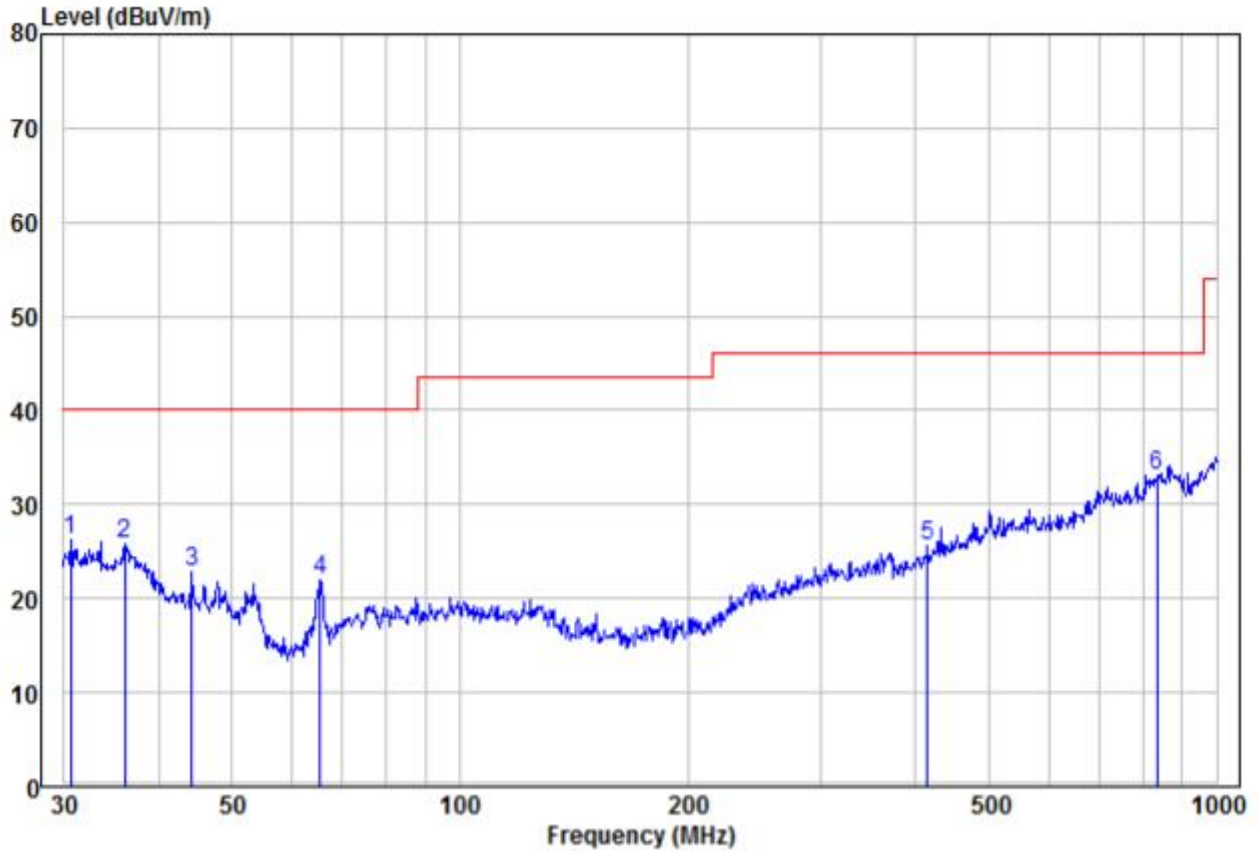

	Read Freq	Read Level	Read Factor	Limit Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	30.64	10.49	15.74	26.23	40.00	-13.77	Peak	VERTICAL
2	36.13	11.61	14.19	25.80	40.00	-14.20	Peak	VERTICAL
3	44.28	12.02	10.79	22.81	40.00	-17.19	Peak	VERTICAL
4	65.34	15.33	6.70	22.03	40.00	-17.97	Peak	VERTICAL
5	414.72	9.93	15.62	25.55	46.00	-20.45	Peak	VERTICAL
6 pp	833.32	9.07	23.97	33.04	46.00	-12.96	Peak	VERTICAL

Test mode:	Transmitting (802.11a 149CH)	Horizontal
------------	------------------------------	------------

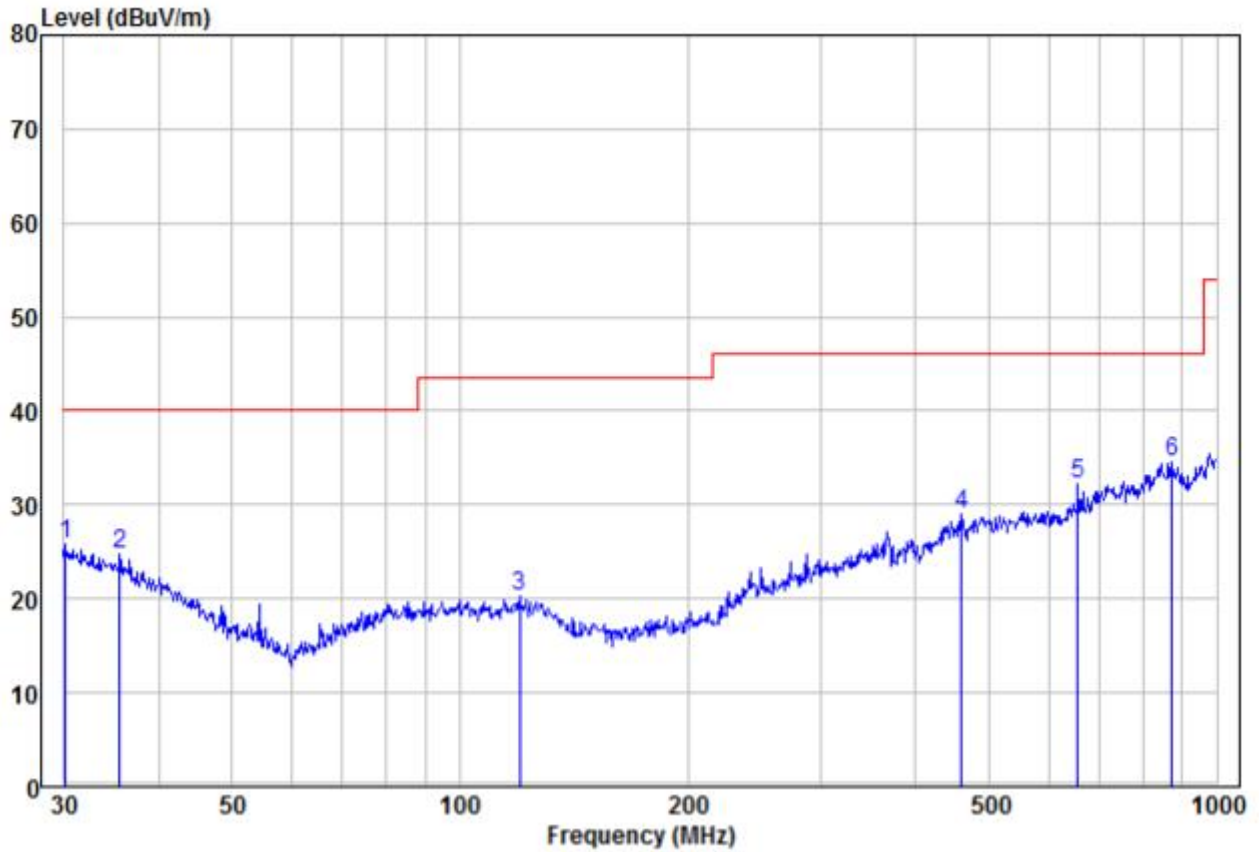

	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	30.11	9.97	15.88	25.85	40.00	-14.15	Peak HORIZONTAL
2	35.50	10.23	14.42	24.65	40.00	-15.35	Peak HORIZONTAL
3	119.86	9.63	10.69	20.32	43.50	-23.18	Peak HORIZONTAL
4	460.73	12.04	17.06	29.10	46.00	-16.90	Peak HORIZONTAL
5	656.53	12.40	19.80	32.20	46.00	-13.80	Peak HORIZONTAL
6 pp	872.18	10.60	23.96	34.56	46.00	-11.44	Peak HORIZONTAL

Transmitter Emission above 1GHz

Test mode:		802.11a(6Mbps)		Test channel:		36 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10360	52.68	2.26	54.94	74	-19.06	peak	H
10360	36.69	2.26	38.95	54	-15.05	AVG	H
15540	51.94	3.75	55.69	74	-18.31	peak	H
15540	38.38	3.75	42.13	54	-11.87	AVG	H
10360	54.58	2.26	56.84	74	-17.16	peak	V
10360	38.72	2.26	40.98	54	-13.02	AVG	V
15540	51.22	3.75	54.97	74	-19.03	peak	V
15540	35.56	3.75	39.31	54	-14.69	AVG	V

Test mode:		802.11a(6Mbps)		Test channel:		48 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10480	52.40	2.31	54.71	74	-19.29	peak	H
10480	36.73	2.31	39.04	54	-14.96	AVG	H
15720	48.93	3.79	52.72	74	-21.28	peak	H
15720	35.77	3.79	39.56	54	-14.44	AVG	H
10480	53.26	2.31	55.57	74	-18.43	peak	V
10480	37.40	2.31	39.71	54	-14.29	AVG	V
15720	48.34	3.79	52.13	74	-21.87	peak	V
15720	36.07	3.79	39.86	54	-14.14	AVG	V

Test mode:		802.11a(6Mbps)		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
11490	51.64	2.54	54.18	74	-19.82	peak	H
11490	38.57	2.54	41.11	54	-12.89	AVG	H
17235	49.38	3.94	53.32	74	-20.68	peak	H
17235	37.14	3.94	41.08	54	-12.92	AVG	H
11490	54.47	2.54	57.01	74	-16.99	peak	V
11490	38.34	2.54	40.88	54	-13.12	AVG	V
17235	49.54	3.94	53.48	74	-20.52	peak	V
17235	36.67	3.94	40.61	54	-13.39	AVG	V

Test mode:		802.11a(6Mbps)		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
11650	52.31	2.58	54.89	74	-19.11	peak	H
11650	37.75	2.58	40.33	54	-13.67	AVG	H
17475	50.81	4.02	54.83	74	-19.17	peak	H
17475	37.64	4.02	41.66	54	-12.34	AVG	H
11650	53.58	2.58	56.16	74	-17.84	peak	V
11650	38.14	2.58	40.72	54	-13.28	AVG	V
17475	51.18	4.02	55.20	74	-18.80	peak	V
17475	36.02	4.02	40.04	54	-13.96	AVG	V

Remark:

- 1) The 802.11a 6Mbps of rate is the worst case, only the worst data recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 3) Scan from 9kHz to 40GHz, The disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


8 Photographs - EUT Test Setup

8.1 Radiated Spurious Emission

9kHz~30MHz:



30MHz~1GHz:

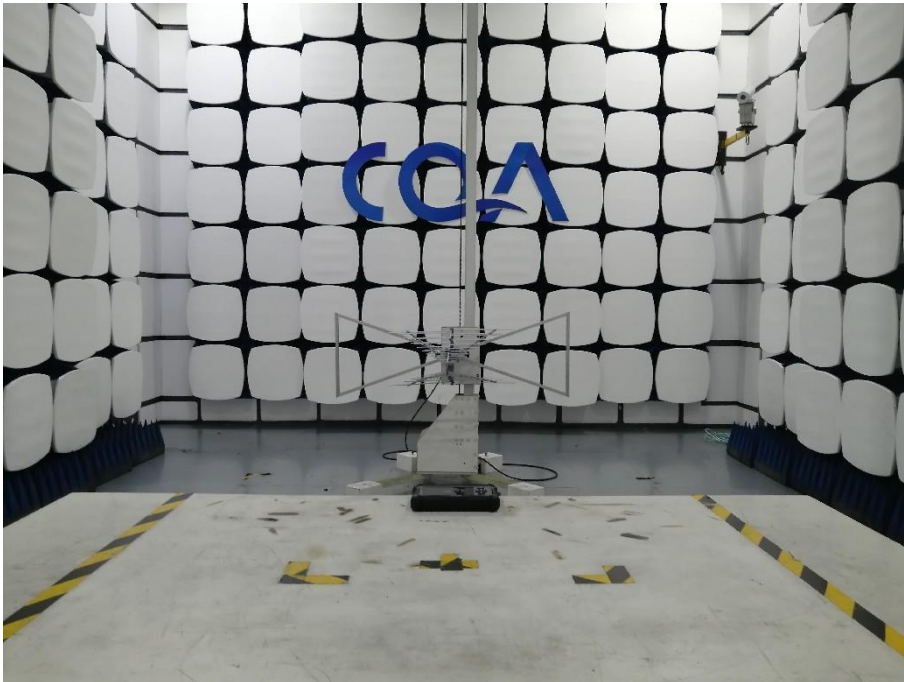

Above 1GHz:



8.2 Conducted Emission



9 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20230901752E-01.

*** END OF REPORT ***