


Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190MHz
Remark			


Test Graph

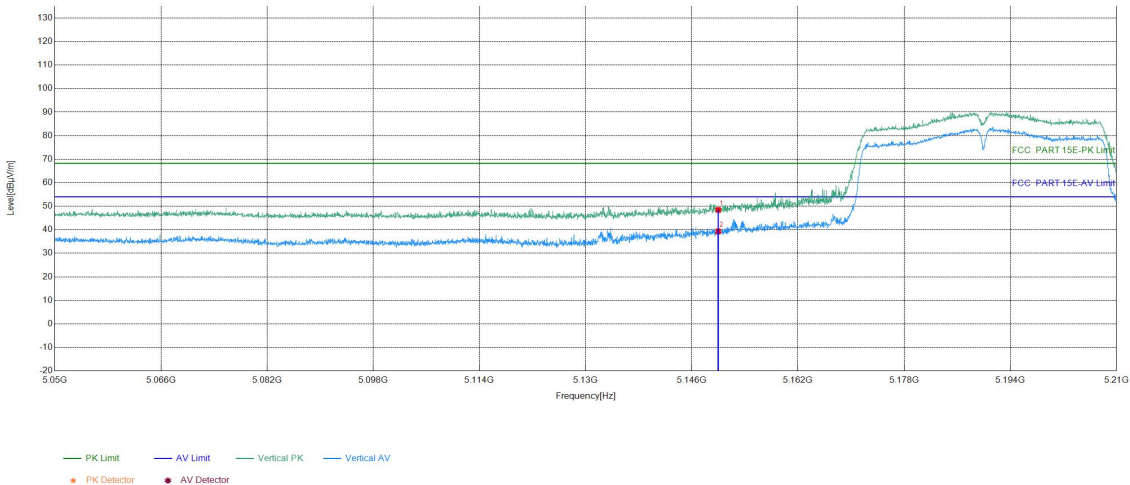

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	12.35	36.10	48.45	68.20	19.75	PASS	Vertical	PK
2	5150	12.35	27.00	39.35	54.00	14.65	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5310MHz
Remark			


Test Graph

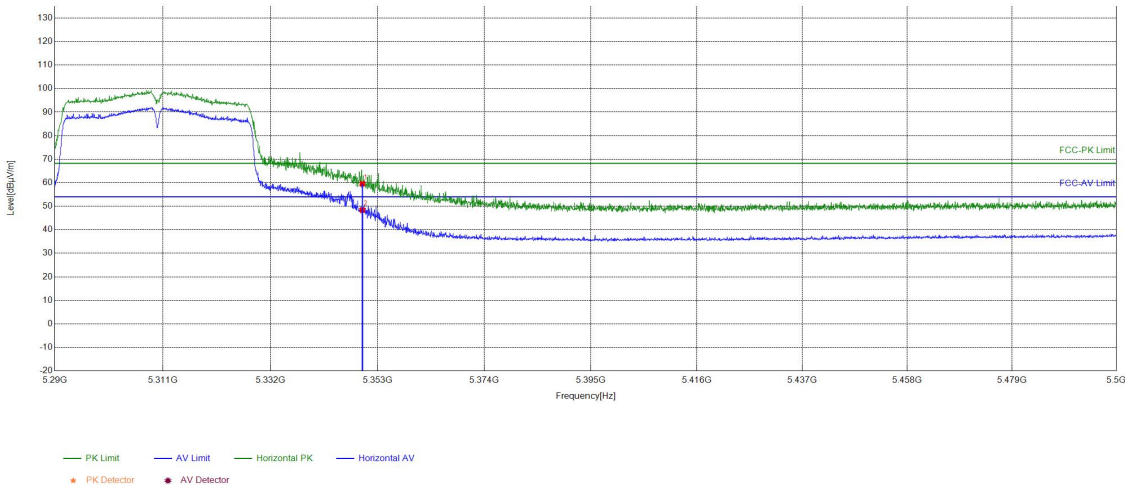

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	12.73	46.79	59.52	68.20	8.68	PASS	Horizontal	PK
2	5350	12.73	35.65	48.38	54.00	5.62	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5310MHz
Remark			


Test Graph

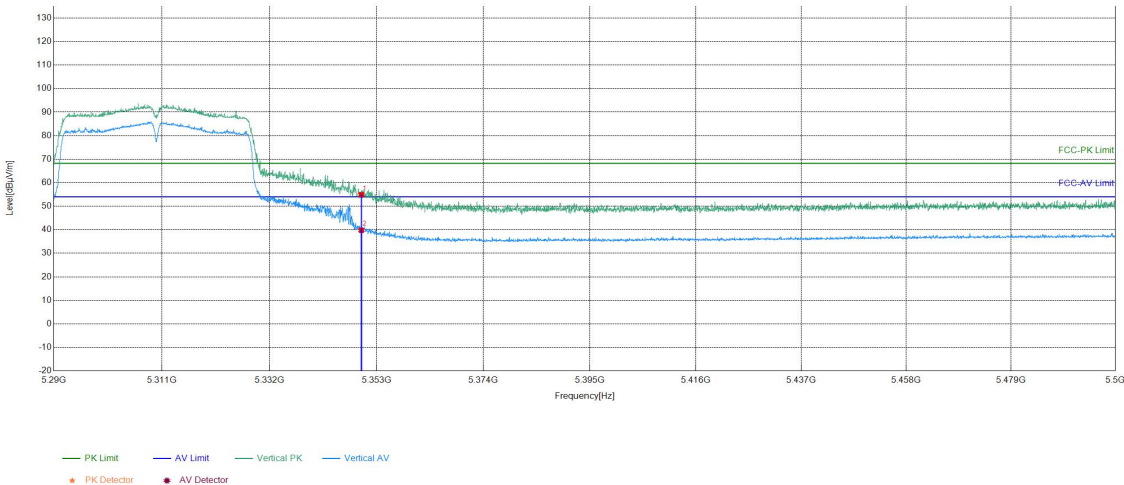

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	12.73	42.17	54.90	68.20	13.30	PASS	Vertical	PK
2	5350	12.73	27.07	39.80	54.00	14.20	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5755MHz
Remark			


Test Graph

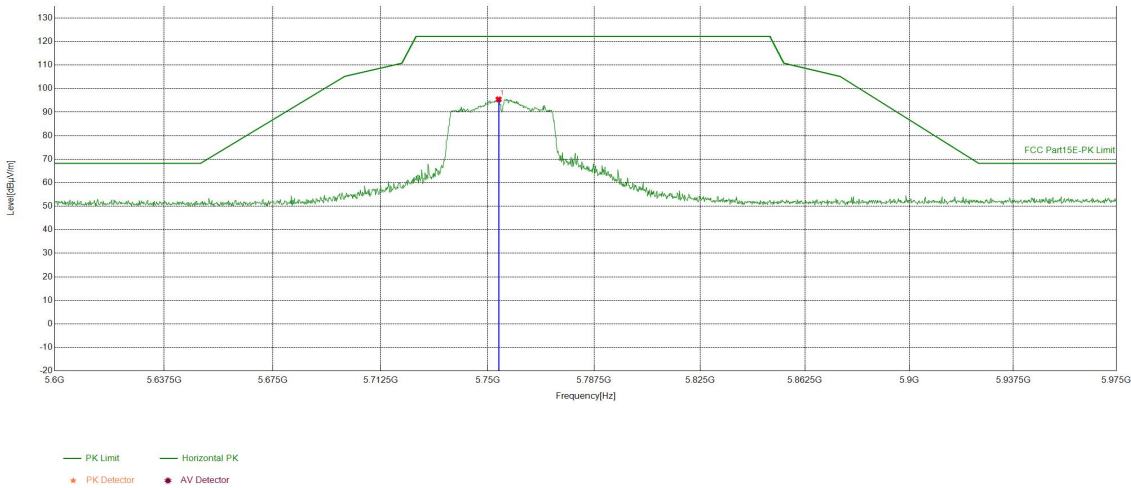

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5753.8269	13.87	81.55	95.42	122.20	26.78	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5755MHz
Remark			


Test Graph

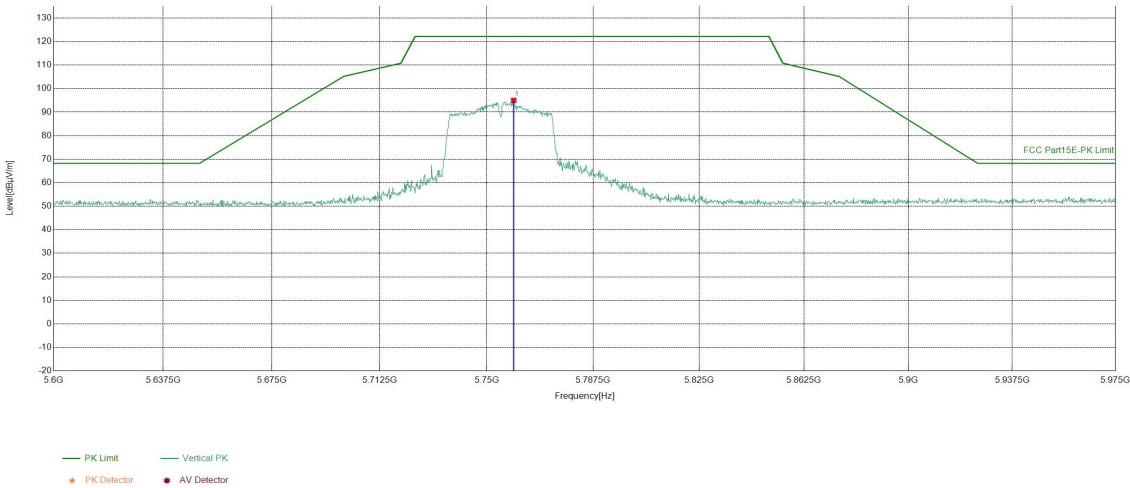

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5759.4547	13.88	81.10	94.98	122.20	27.22	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5795MHz
Remark	\		


Test Graph

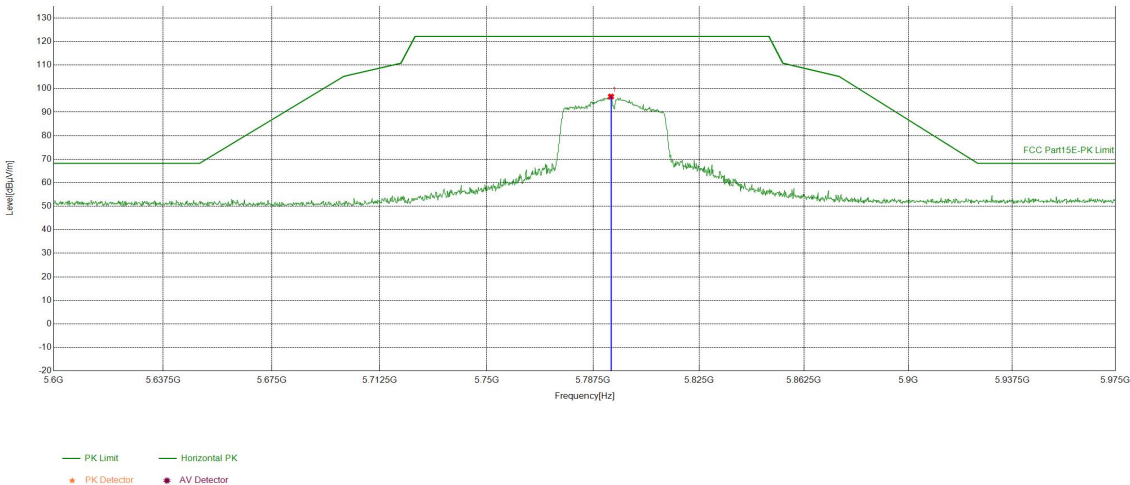

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5793.7844	13.93	82.67	96.60	122.20	25.60	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5795MHz
Remark			


Test Graph

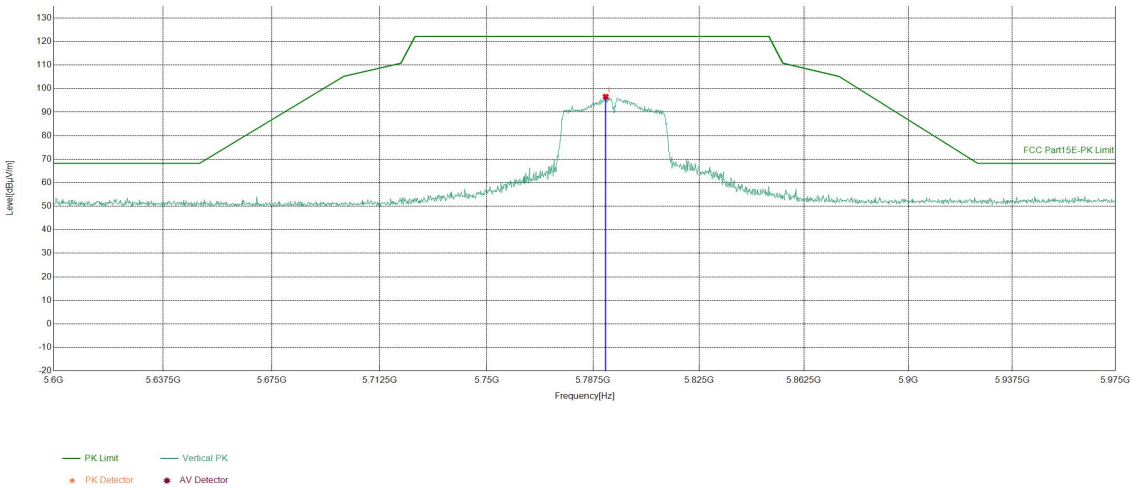

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5791.9085	13.93	82.60	96.53	122.20	25.67	PASS	Vertical	PK

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5210MHz
Remark			


Test Graph

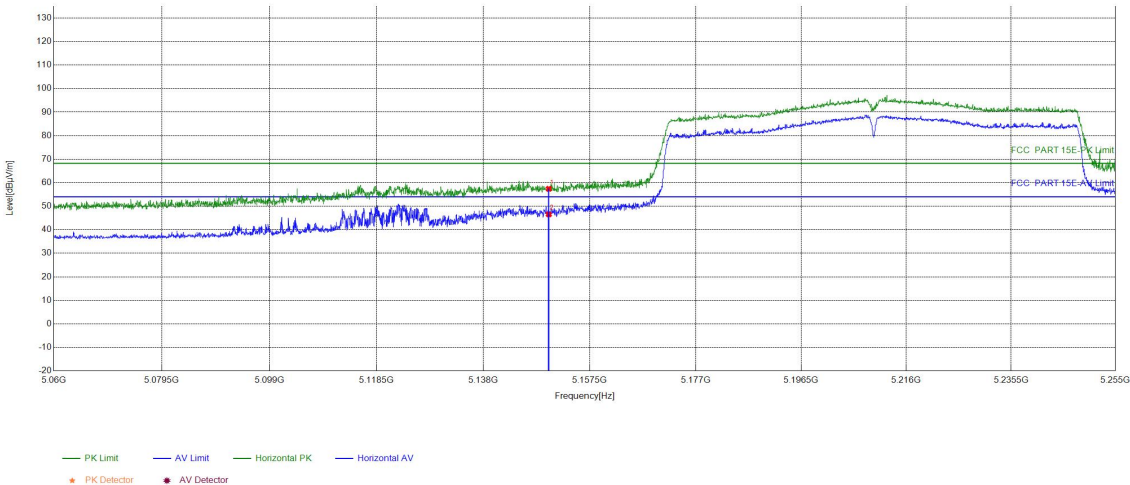

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	12.35	45.05	57.40	68.20	10.80	PASS	Horizontal	PK
2	5150	12.35	34.19	46.54	54.00	7.46	PASS	Horizontal	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5210MHz
Remark			


Test Graph

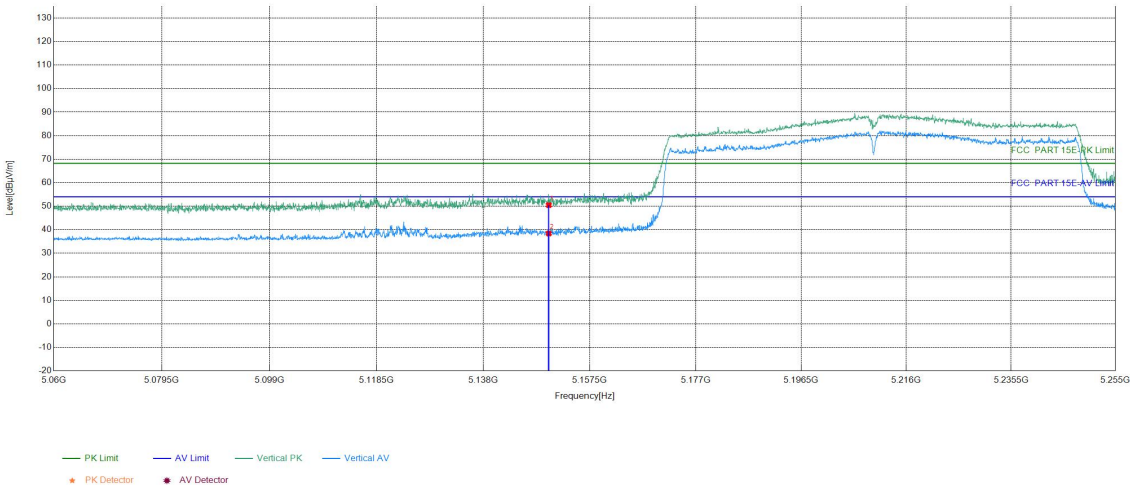

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	12.35	38.12	50.47	68.20	17.73	PASS	Vertical	PK
2	5150	12.35	26.08	38.43	54.00	15.57	PASS	Vertical	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5290MHz
Remark			


Test Graph

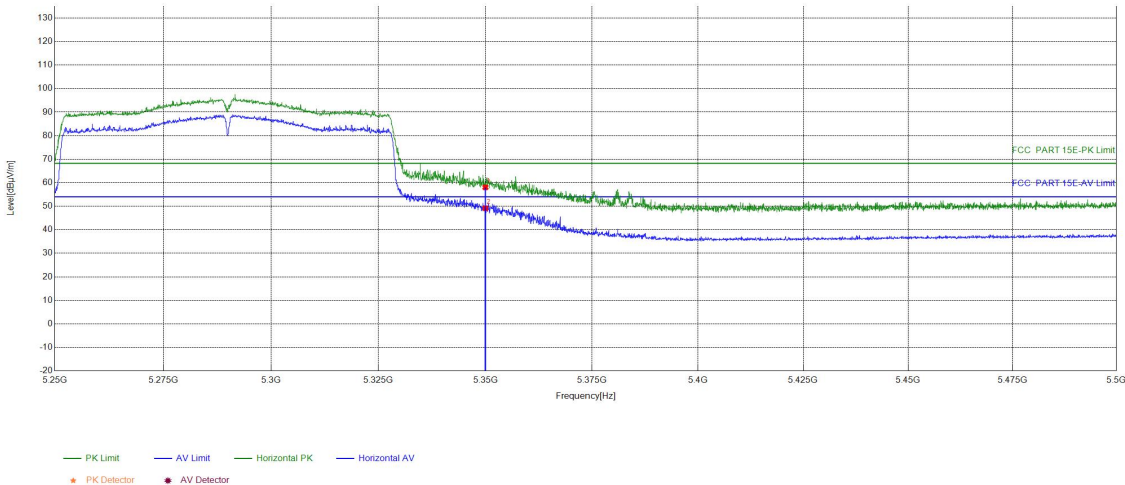

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	12.73	45.30	58.03	68.20	10.17	PASS	Horizontal	PK
2	5350	12.73	36.41	49.14	54.00	4.86	PASS	Horizontal	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5290MHz
Remark			


Test Graph

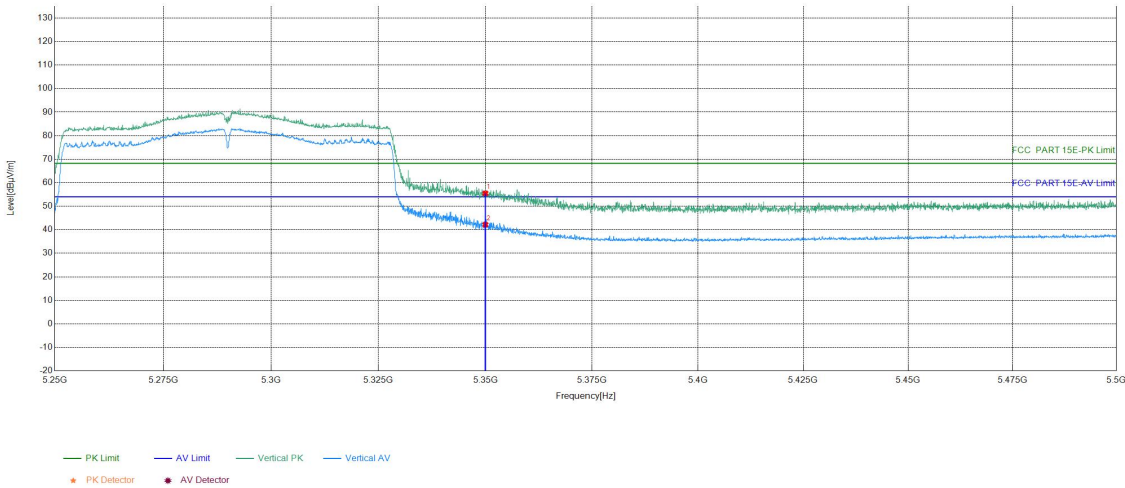

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	12.73	42.74	55.47	68.20	12.73	PASS	Vertical	PK
2	5350	12.73	29.43	42.16	54.00	11.84	PASS	Vertical	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5775MHz
Remark			


Test Graph

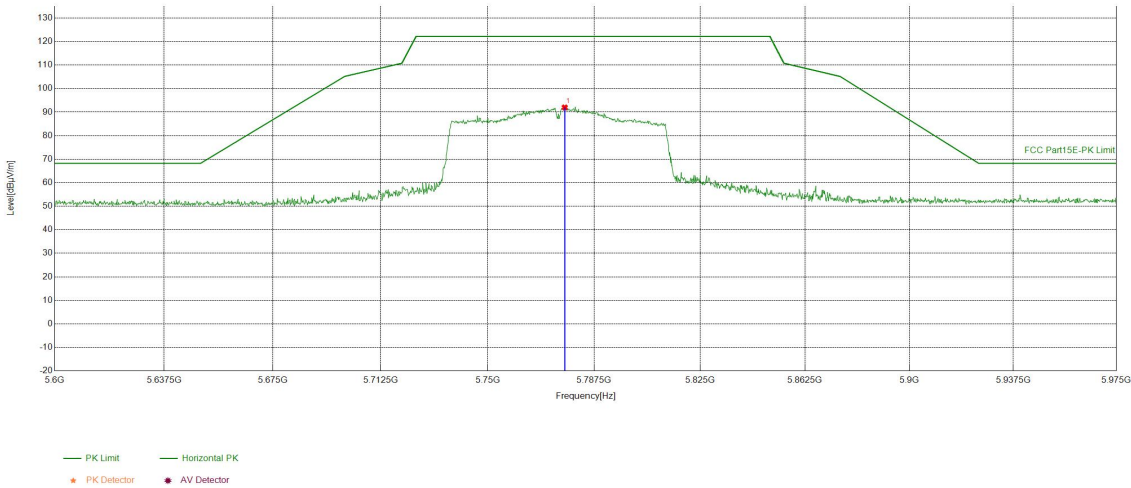

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5777.0885	13.90	78.09	91.99	122.20	30.21	PASS	Horizontal	PK

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5775MHz
Remark			

Test Graph

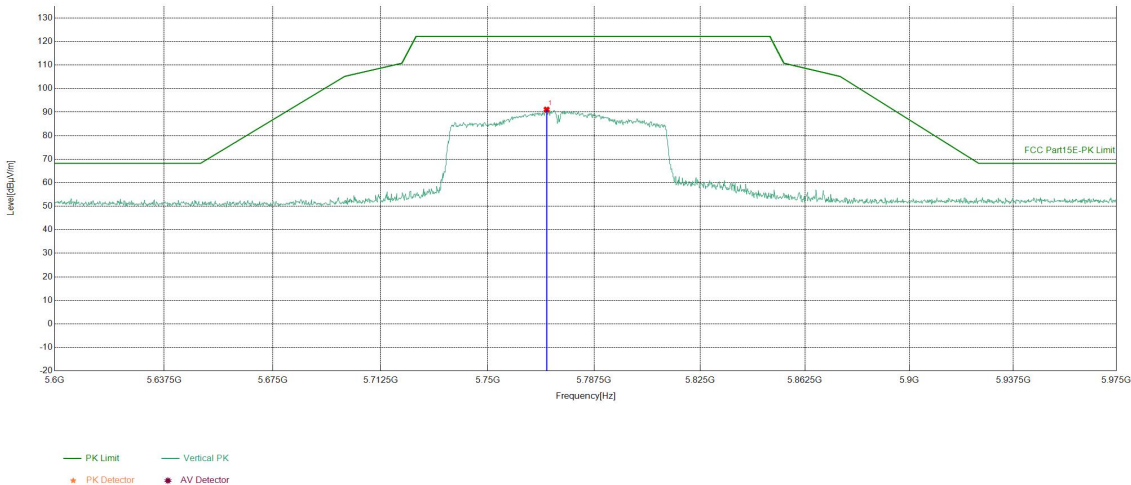

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5770.7104	13.89	77.21	91.10	122.20	31.10	PASS	Vertical	PK

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

2) Scan from 1GHz to 25GHz, the disturbance above 13GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

6 Appendix 5G WIFI

Refer to Appendix: 5G WIFI of EED32O81844304