





Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	(5260-5320MHz)		



Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	28.052	Pass
NVNT	a	5280	25.994	Pass
NVNT	a	5320	29.953	Pass
NVNT	n20	5260	23.79	Pass
NVNT	n20	5280	19.251	Pass
NVNT	n20	5320	25.271	Pass
NVNT	n40	5270	38.896	Pass
NVNT	n40	5310	38.295	Pass



Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5260	16.503
NVNT	a	5280	16.433
NVNT	a	5320	17.104
NVNT	n20	5260	17.458
NVNT	n20	5280	17.412
NVNT	n20	5320	17.473
NVNT	n40	5270	35.874
NVNT	n40	5310	35.781


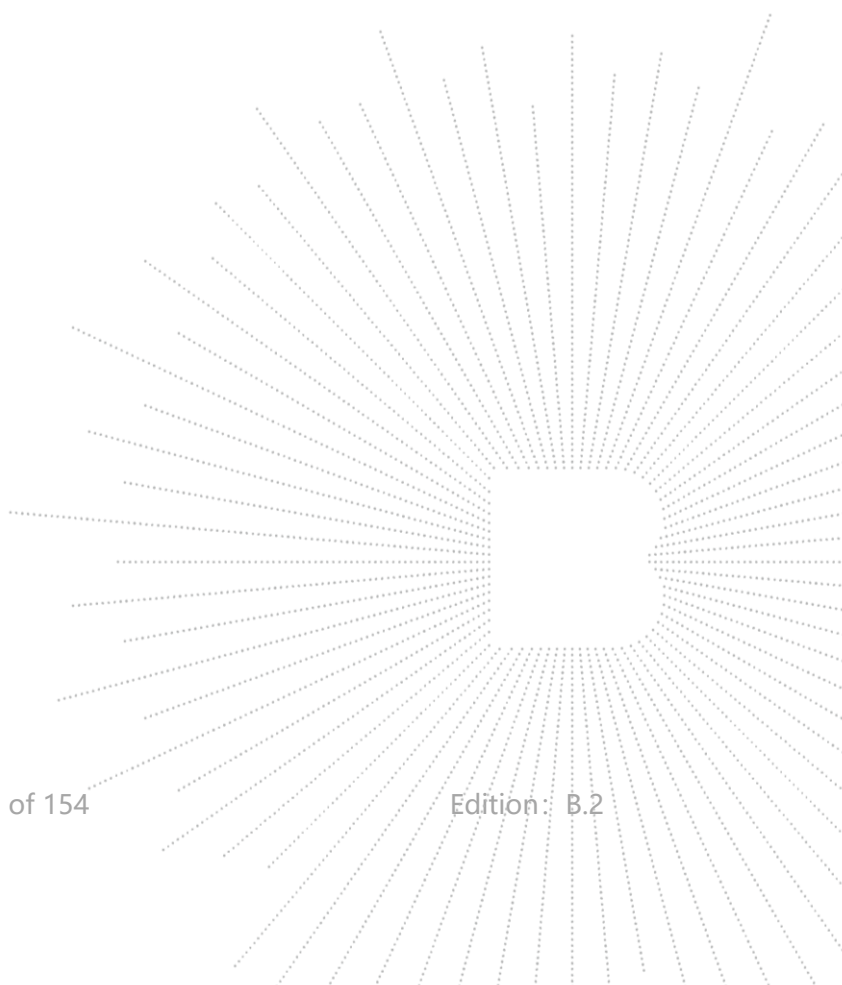



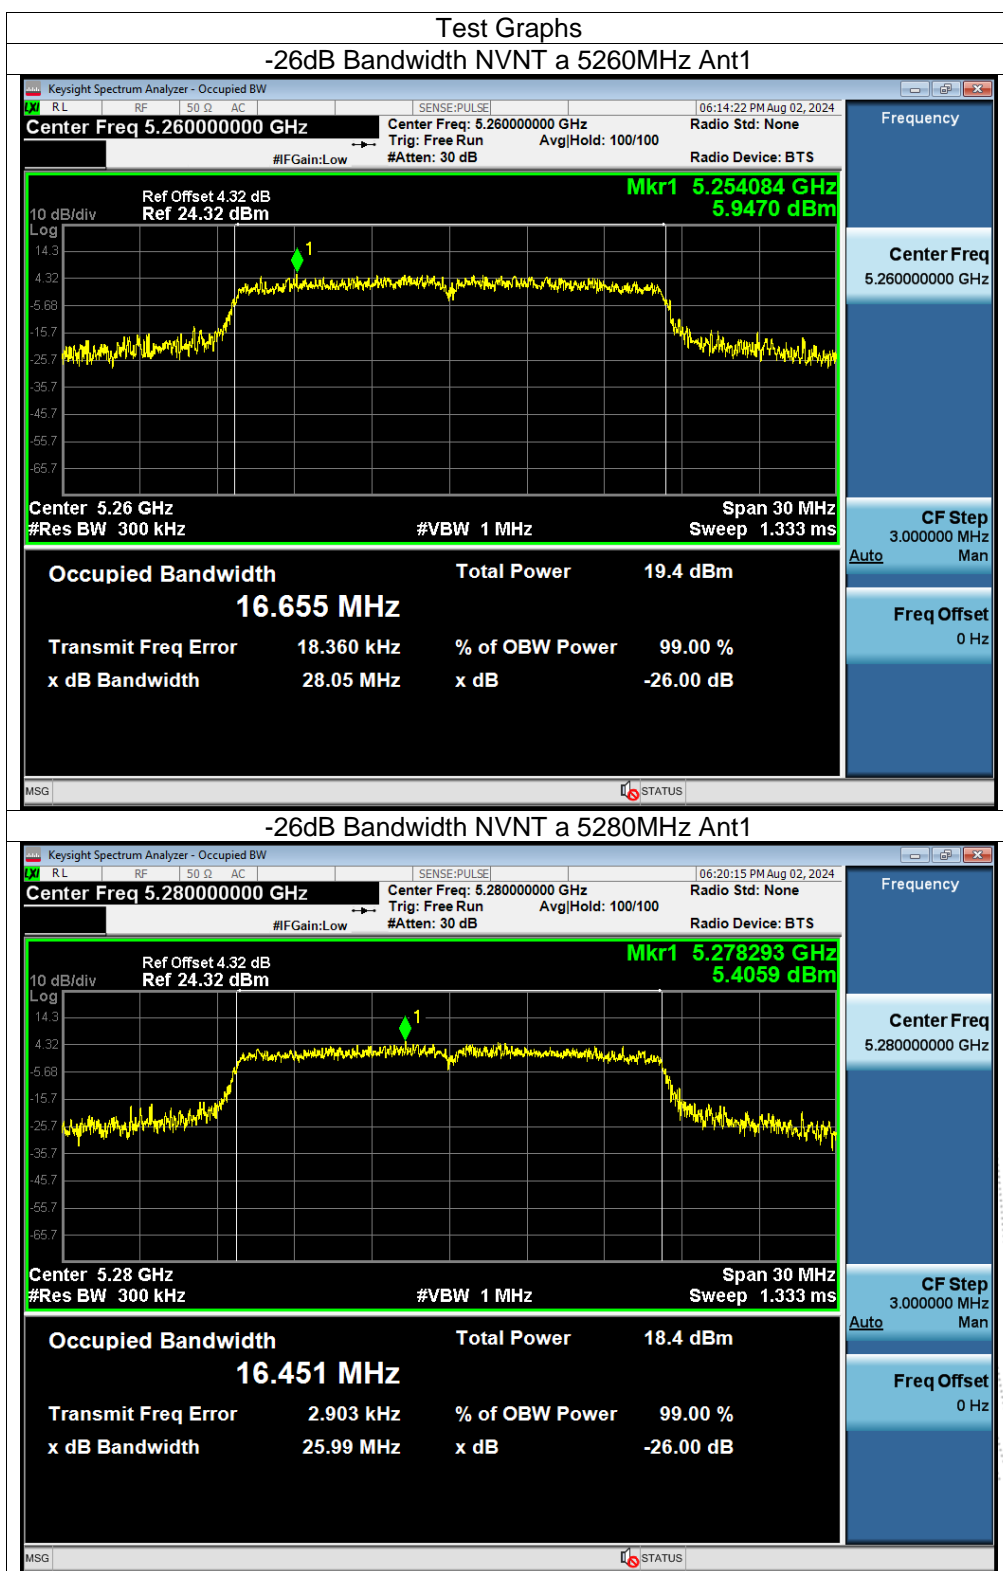


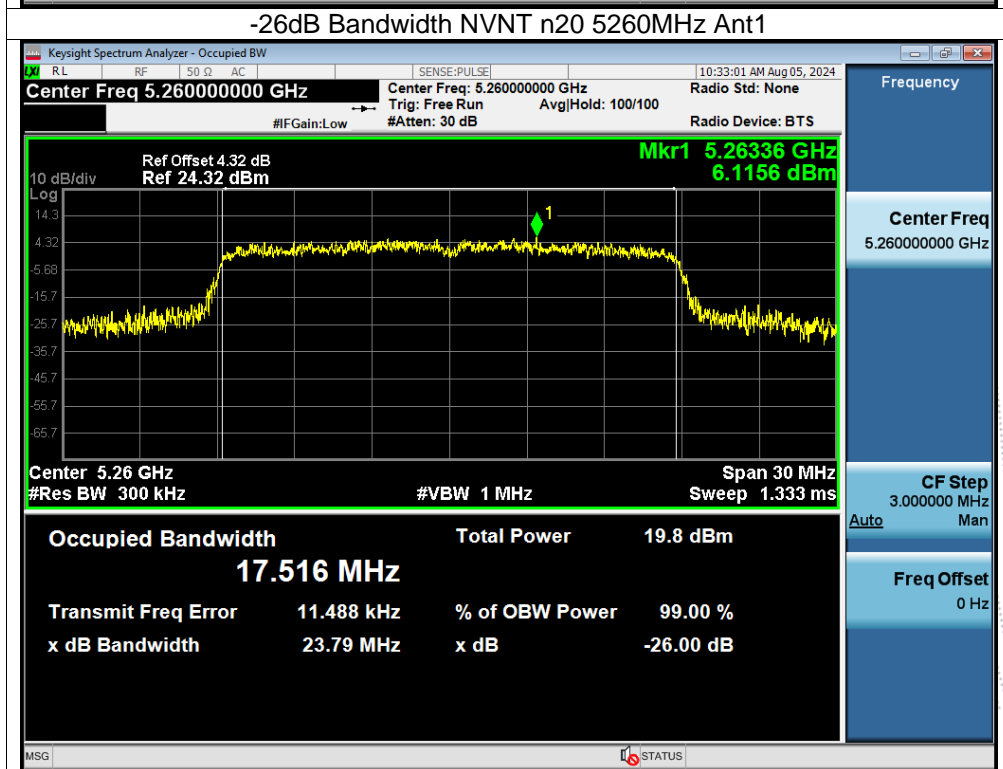
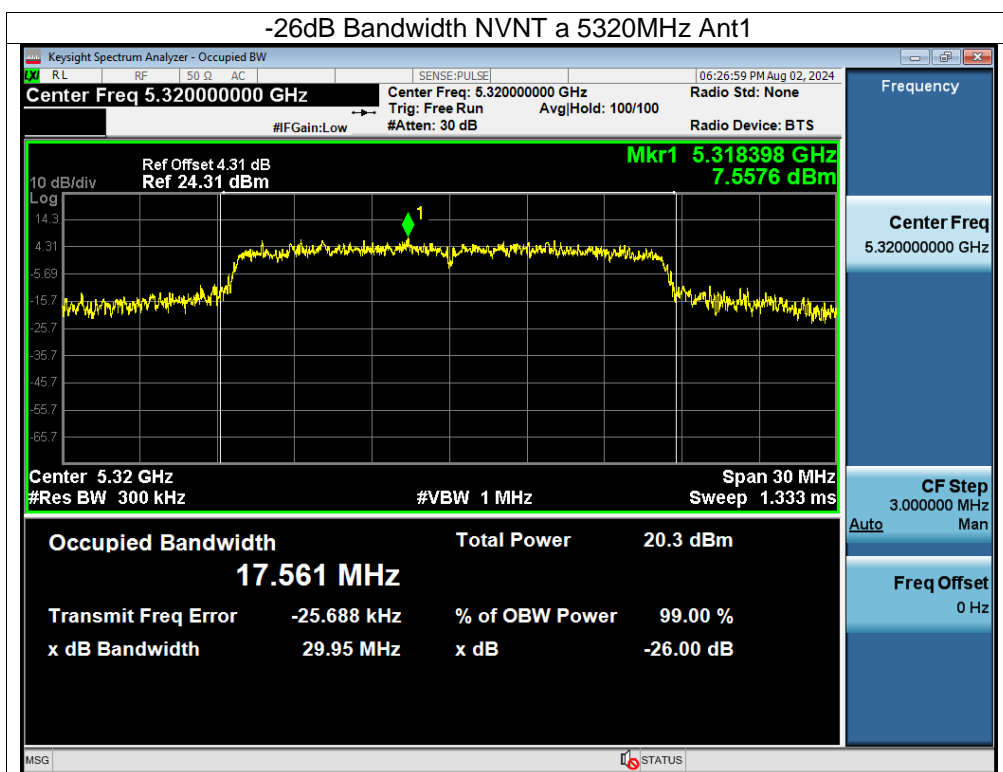


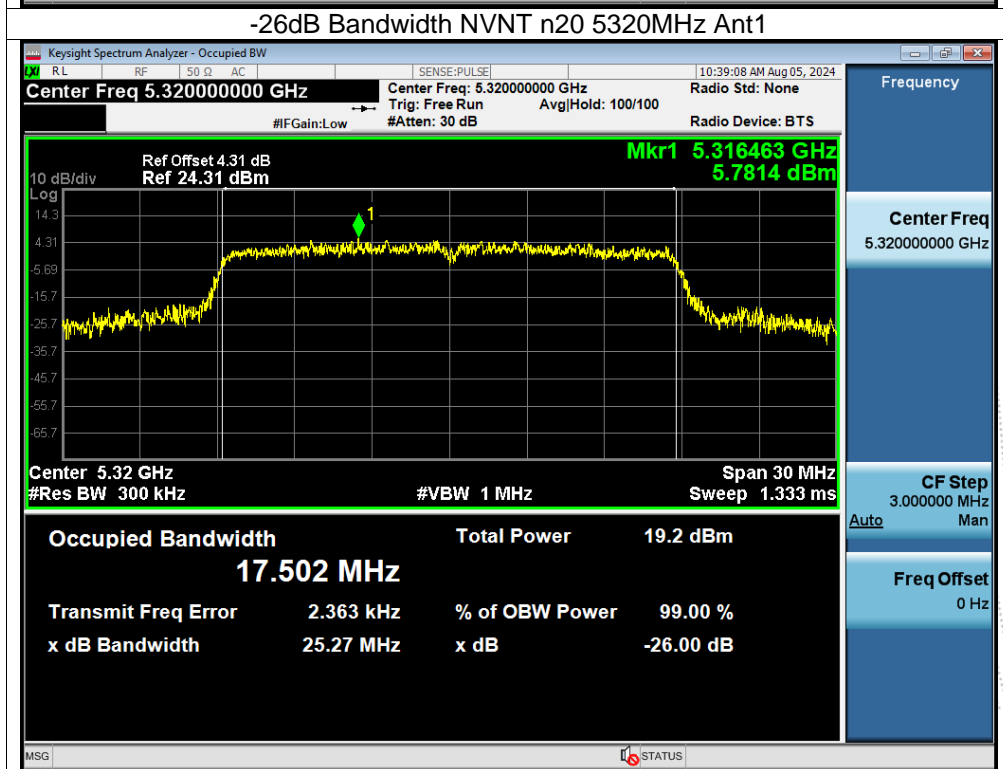
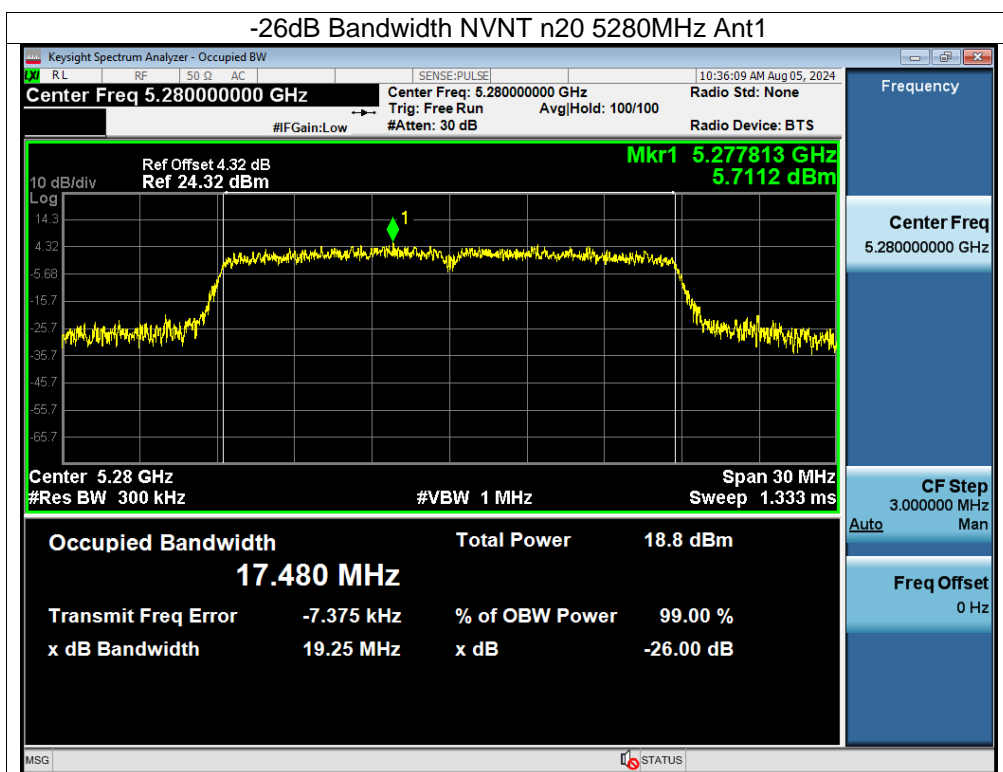


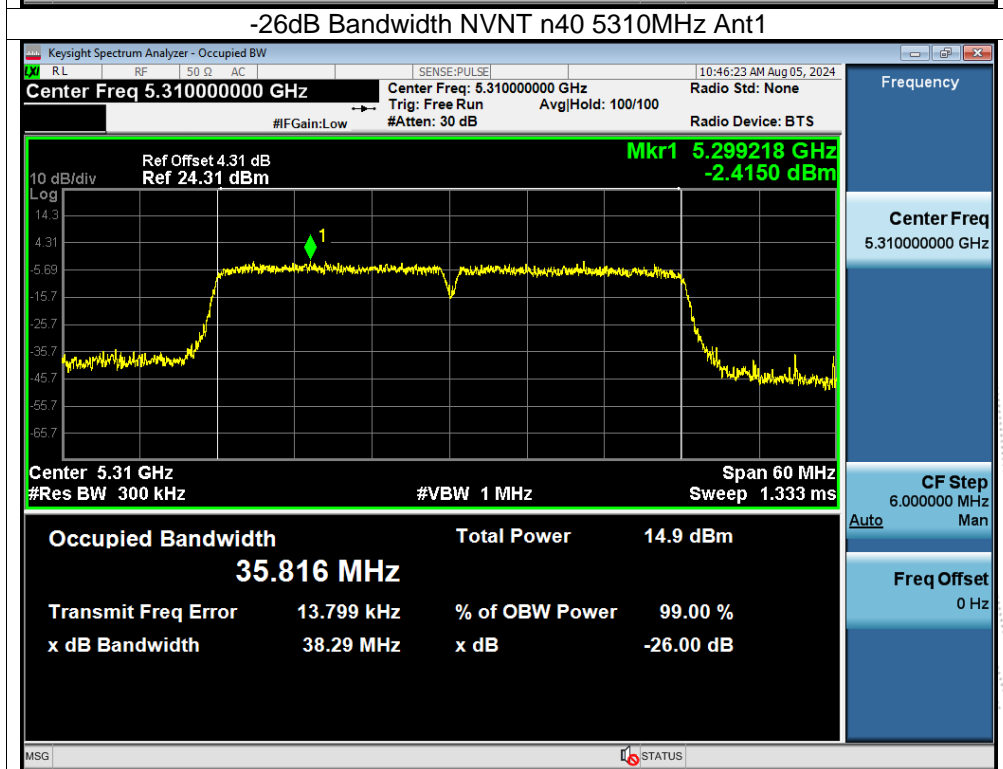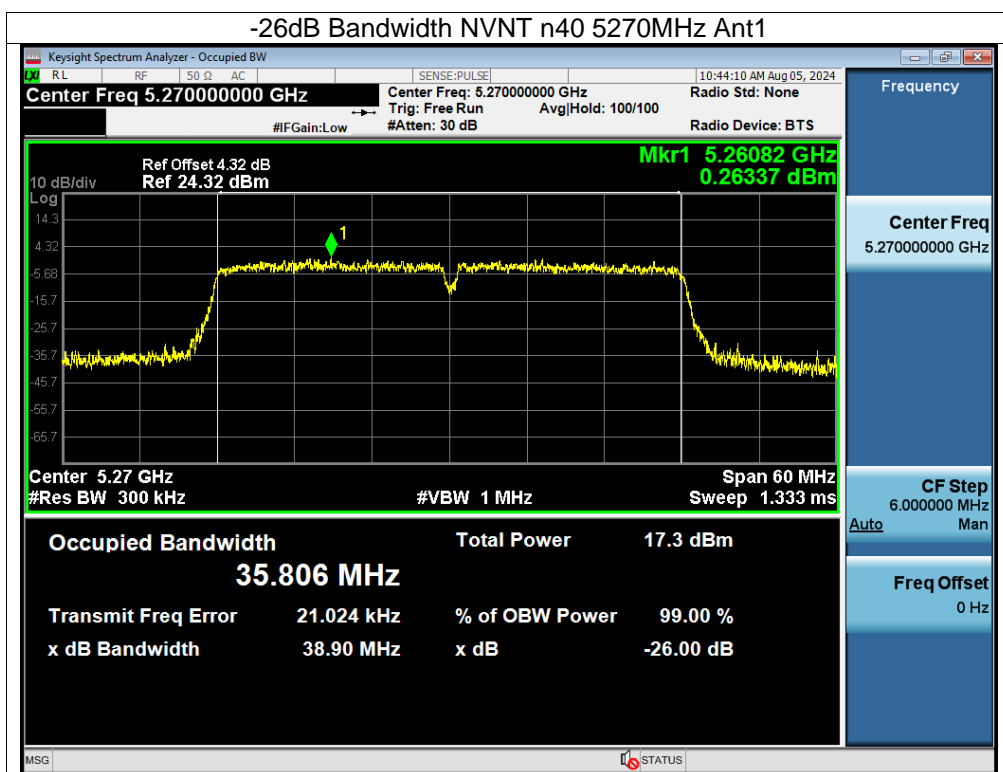

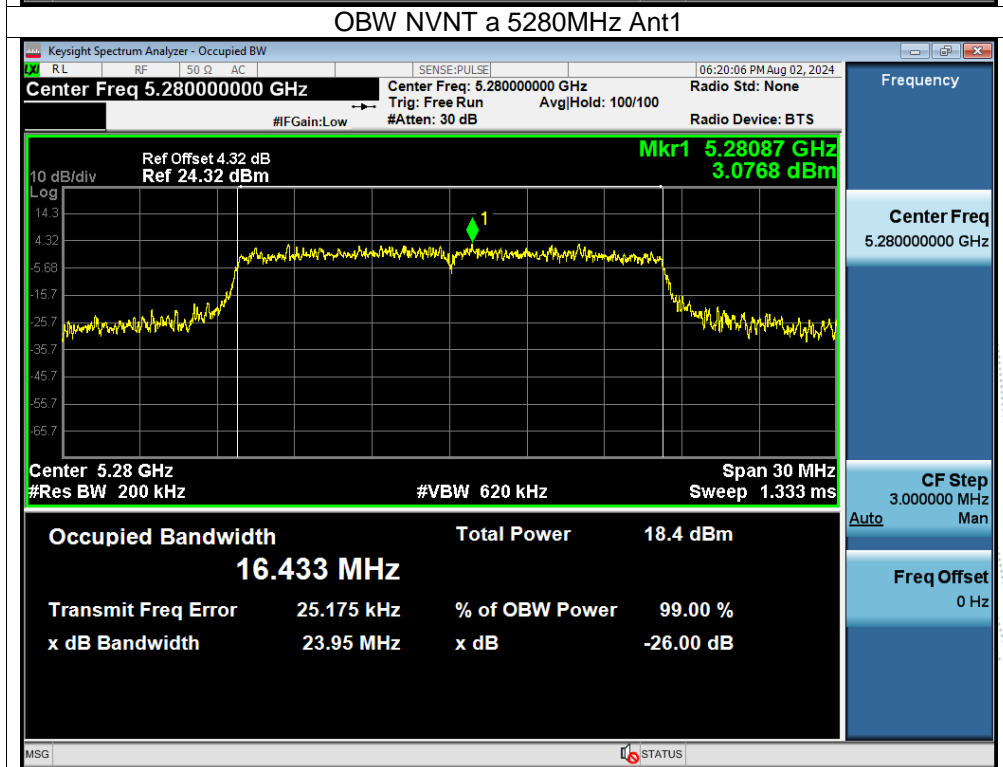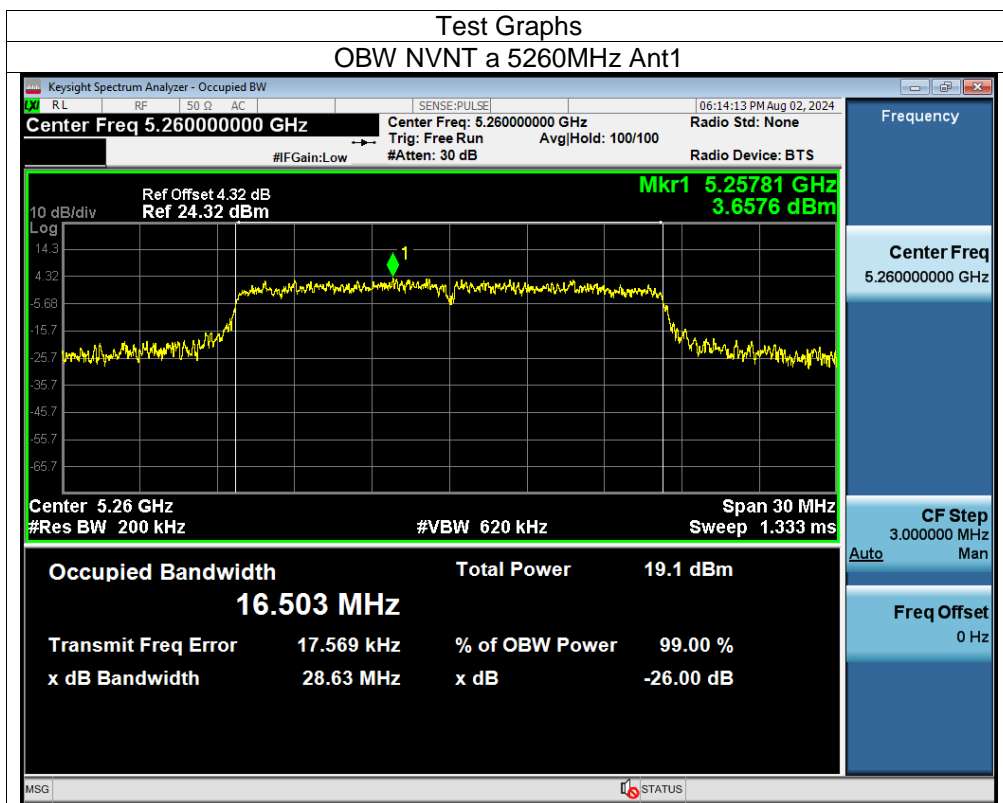

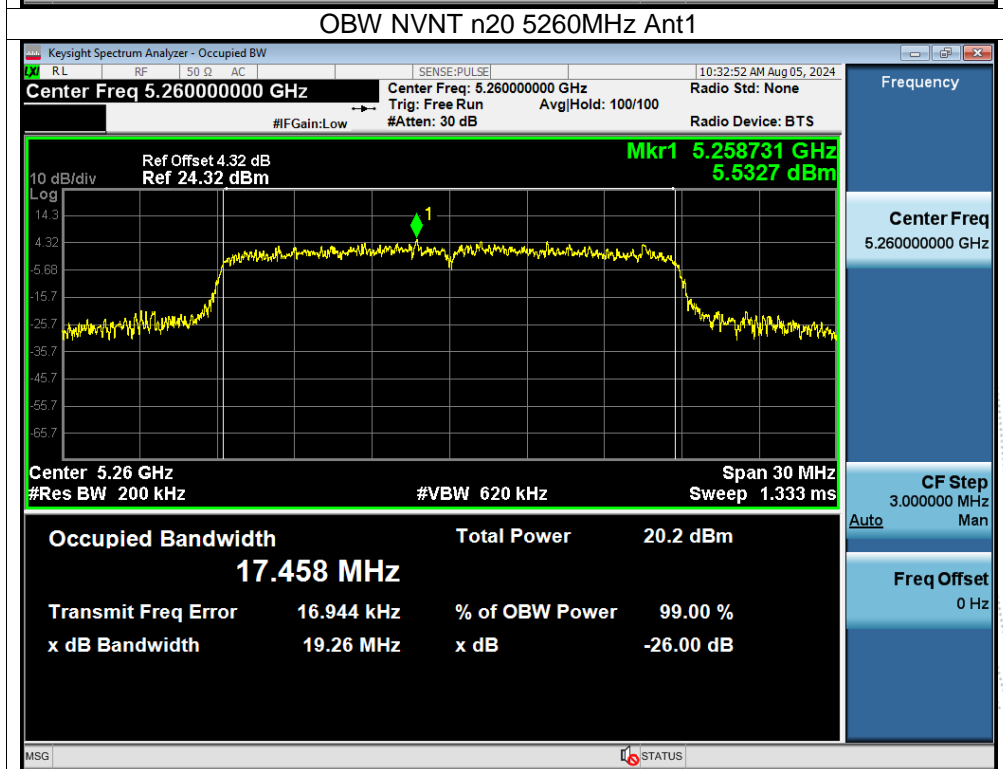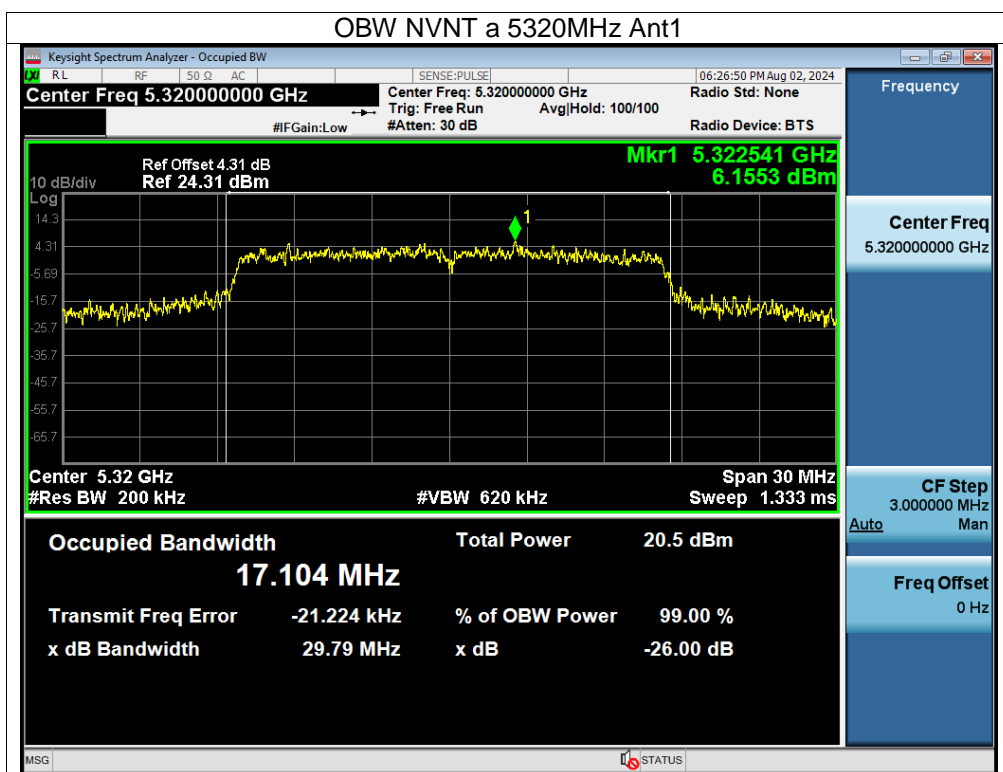

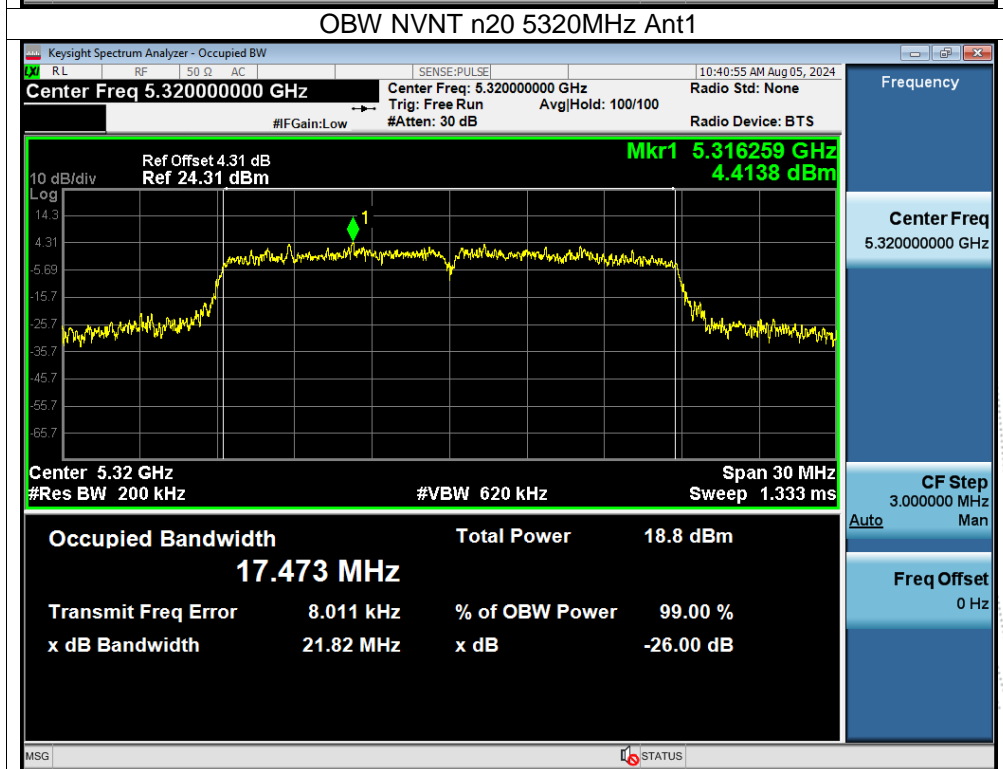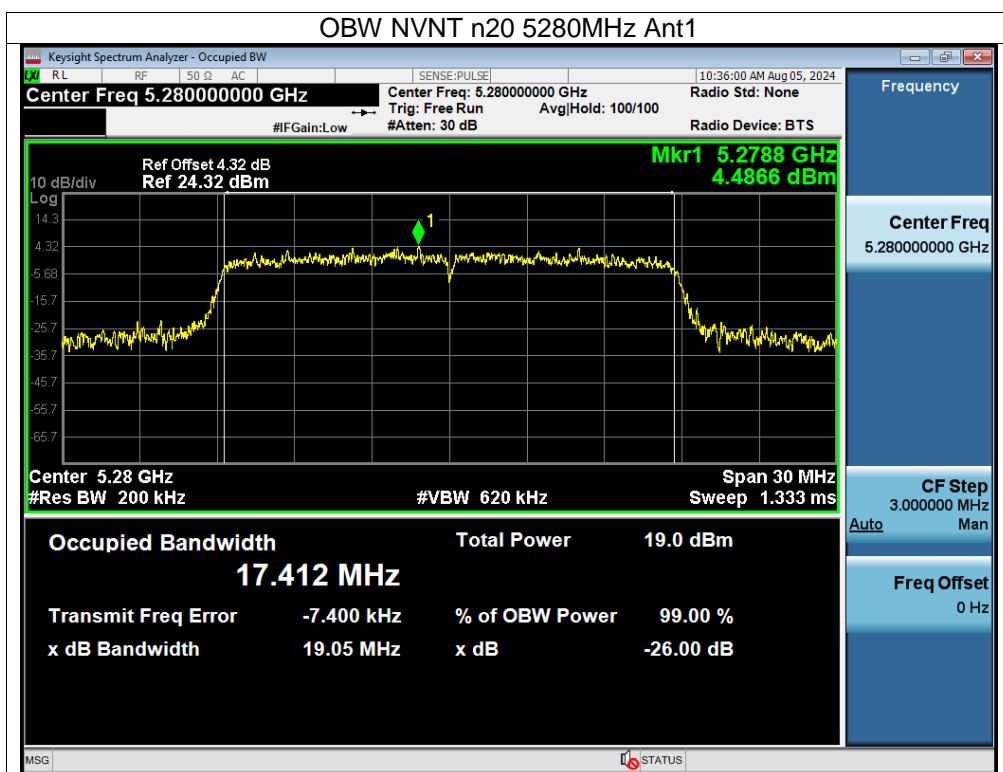


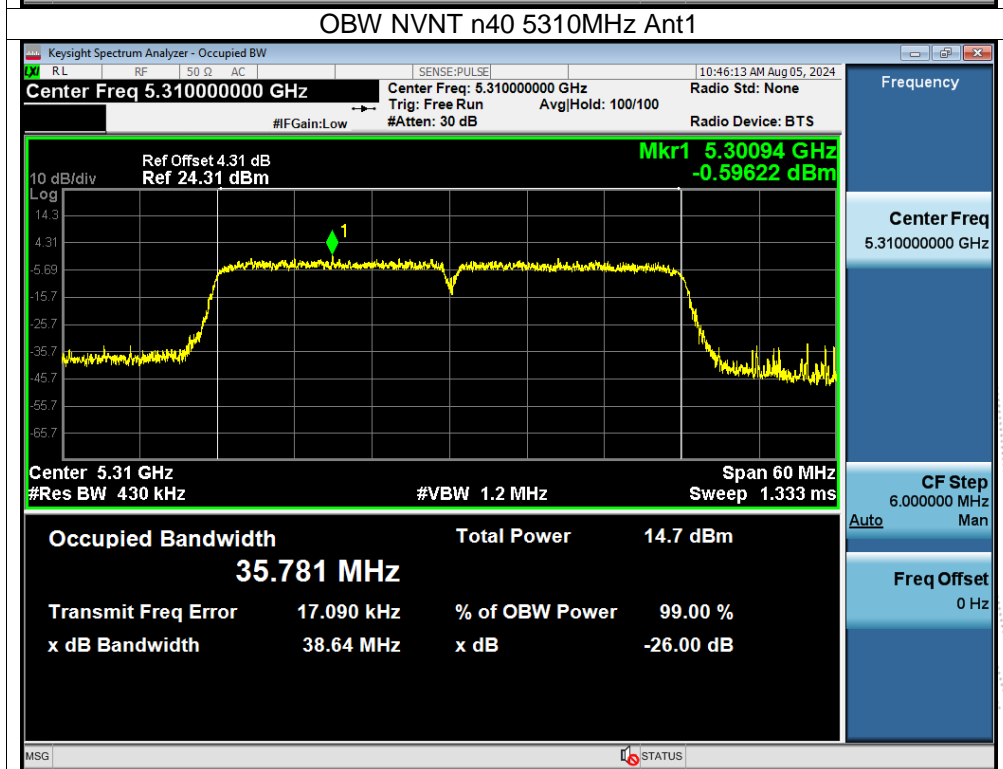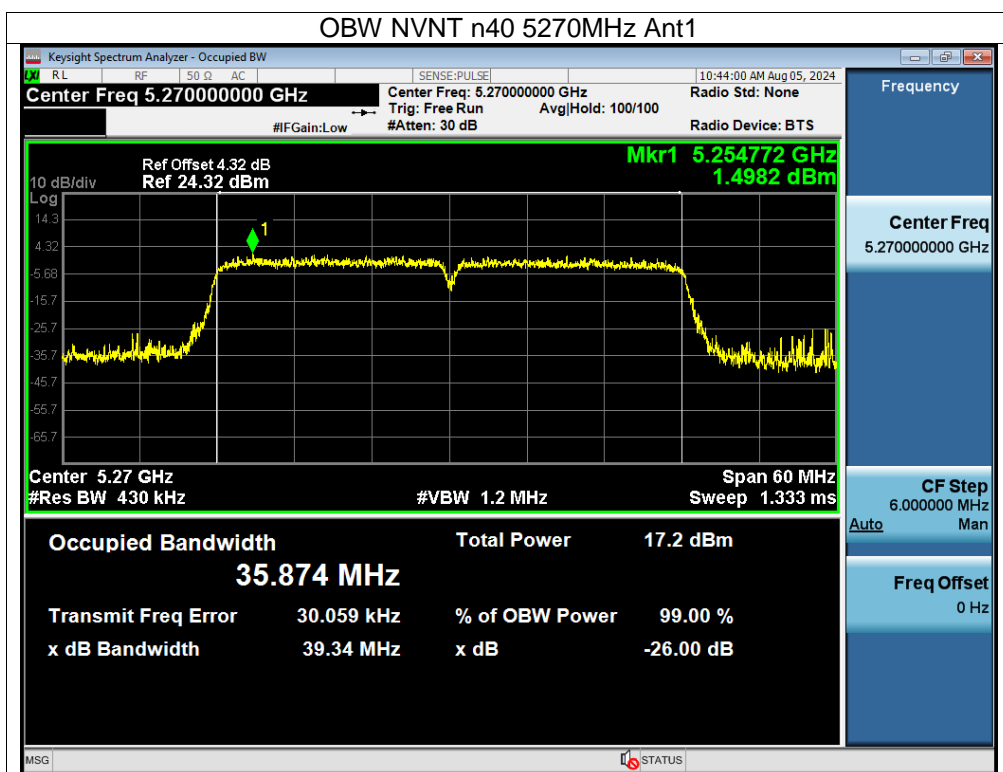




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	(5500-5700MHz)		



Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5500	30	Pass
NVNT	a	5580	29.993	Pass
NVNT	a	5700	24.553	Pass
NVNT	n20	5500	29.931	Pass
NVNT	n20	5580	29.893	Pass
NVNT	n20	5700	29.338	Pass
NVNT	n40	5510	59.505	Pass
NVNT	n40	5550	59.424	Pass
NVNT	n40	5670	53.597	Pass



Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5500	30
NVNT	a	5580	29.993
NVNT	a	5700	24.553
NVNT	n20	5500	29.931
NVNT	n20	5580	29.893
NVNT	n20	5700	29.338
NVNT	n40	5510	59.505
NVNT	n40	5550	59.424
NVNT	n40	5670	53.597

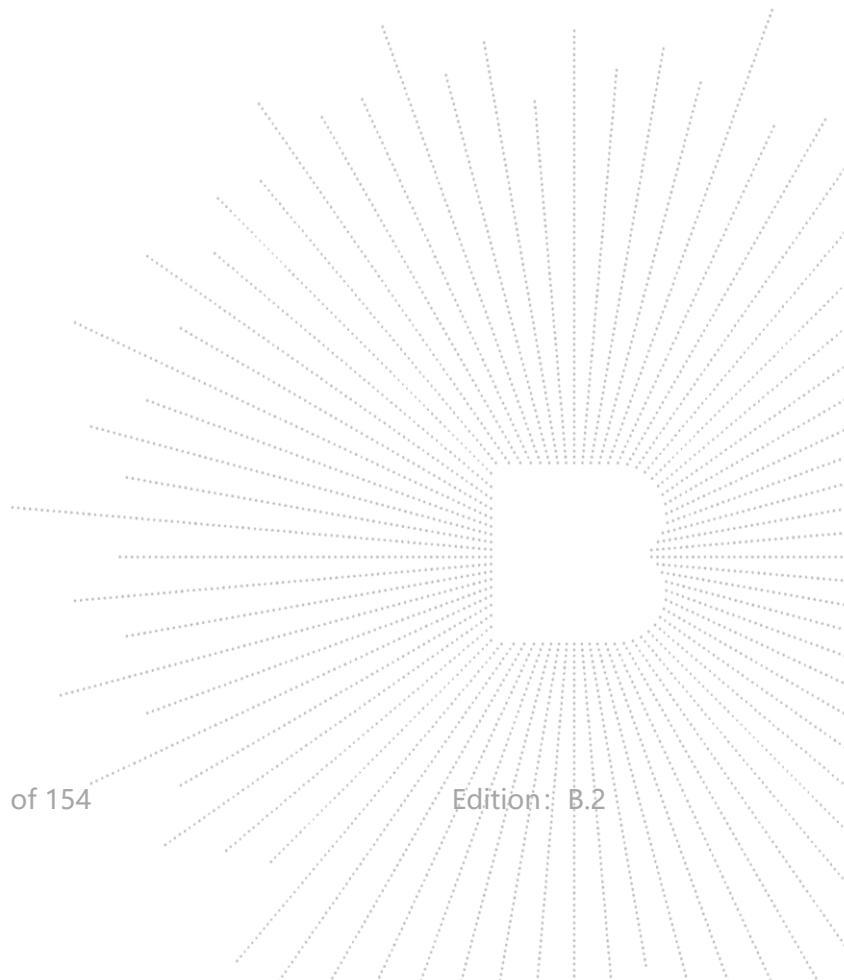


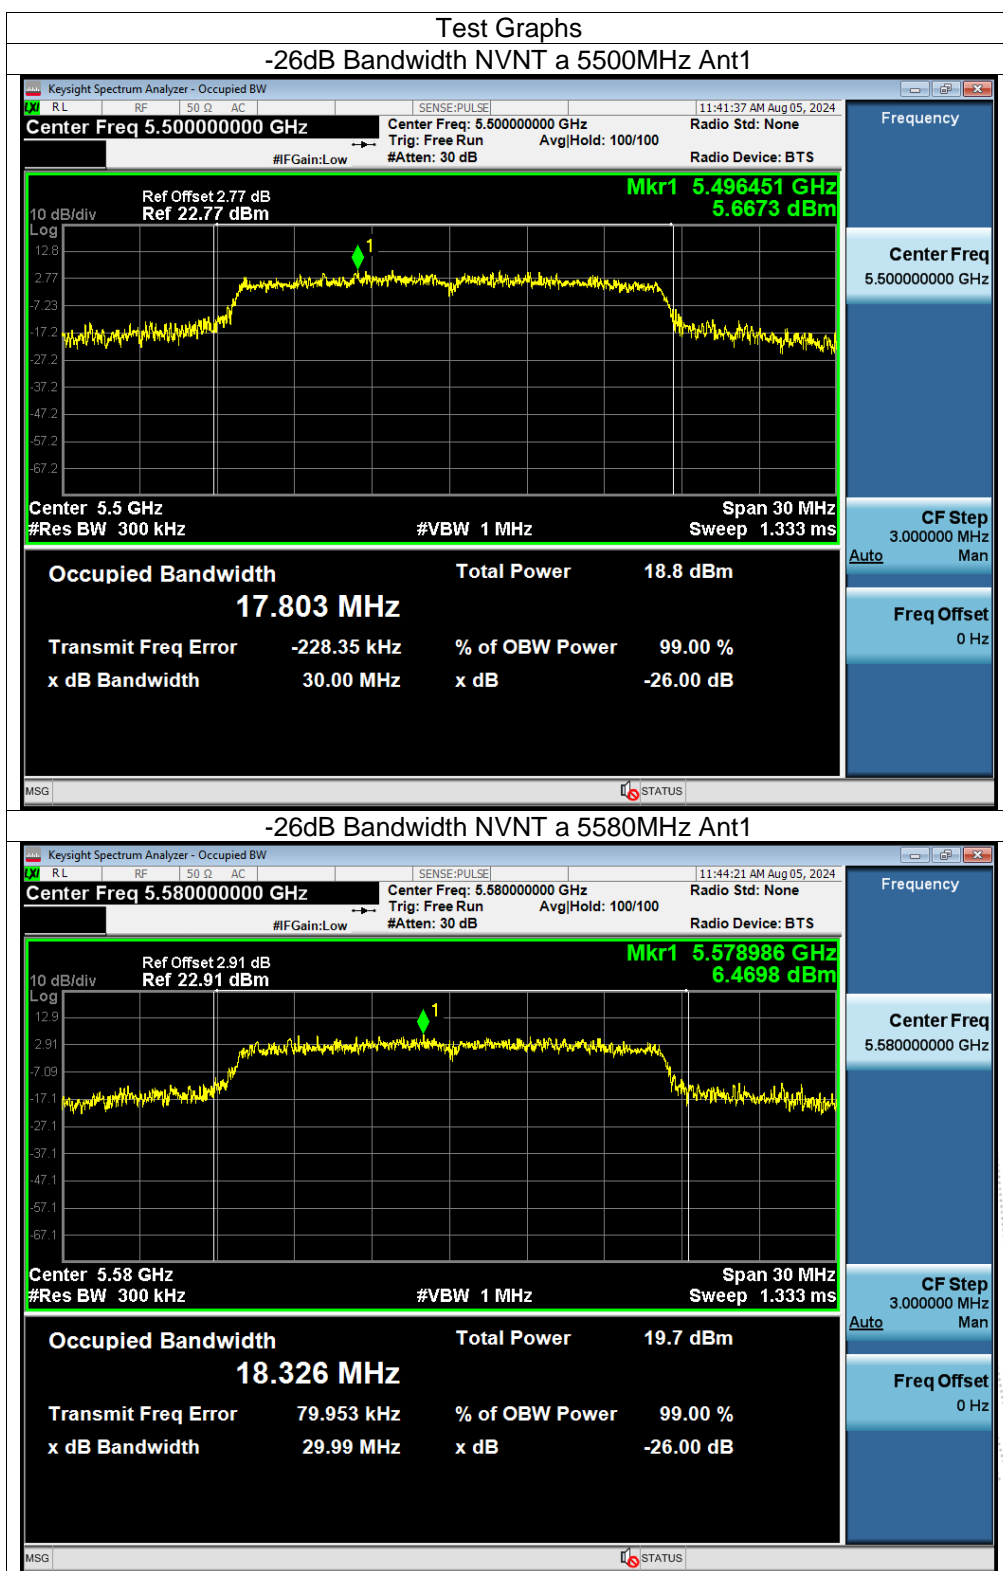


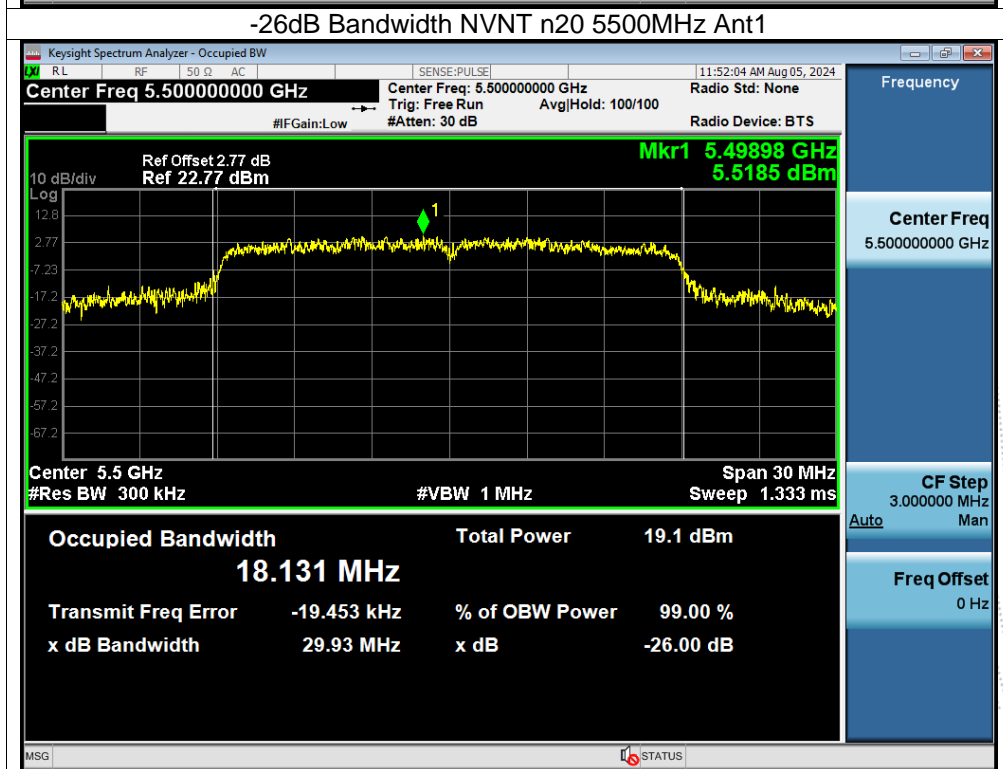
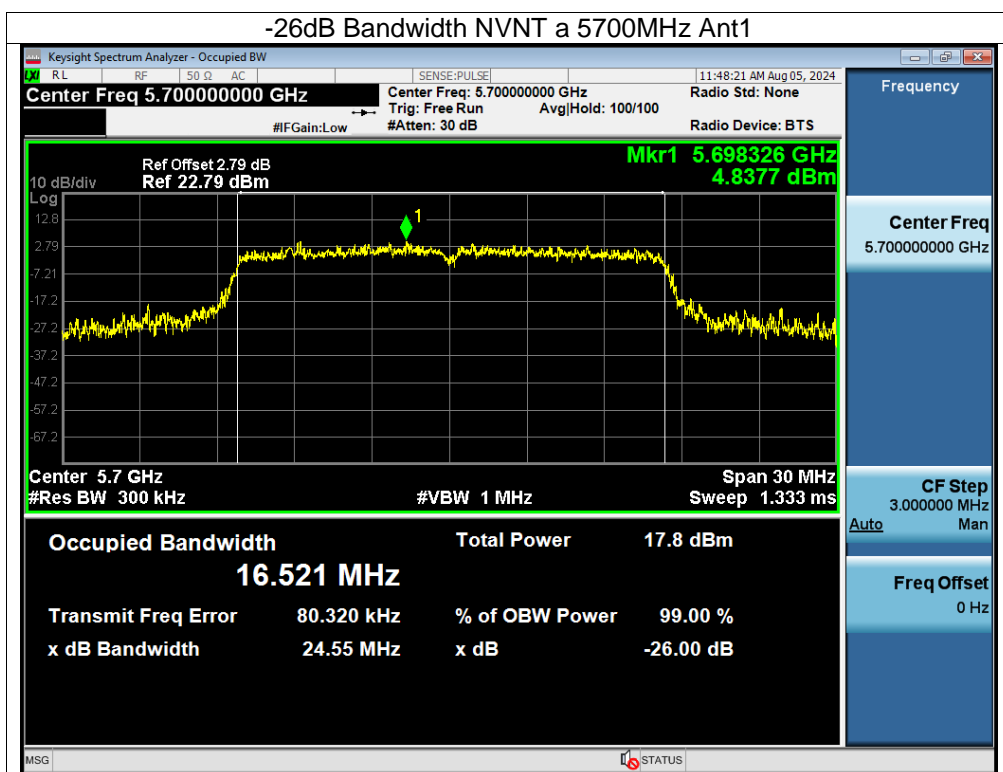


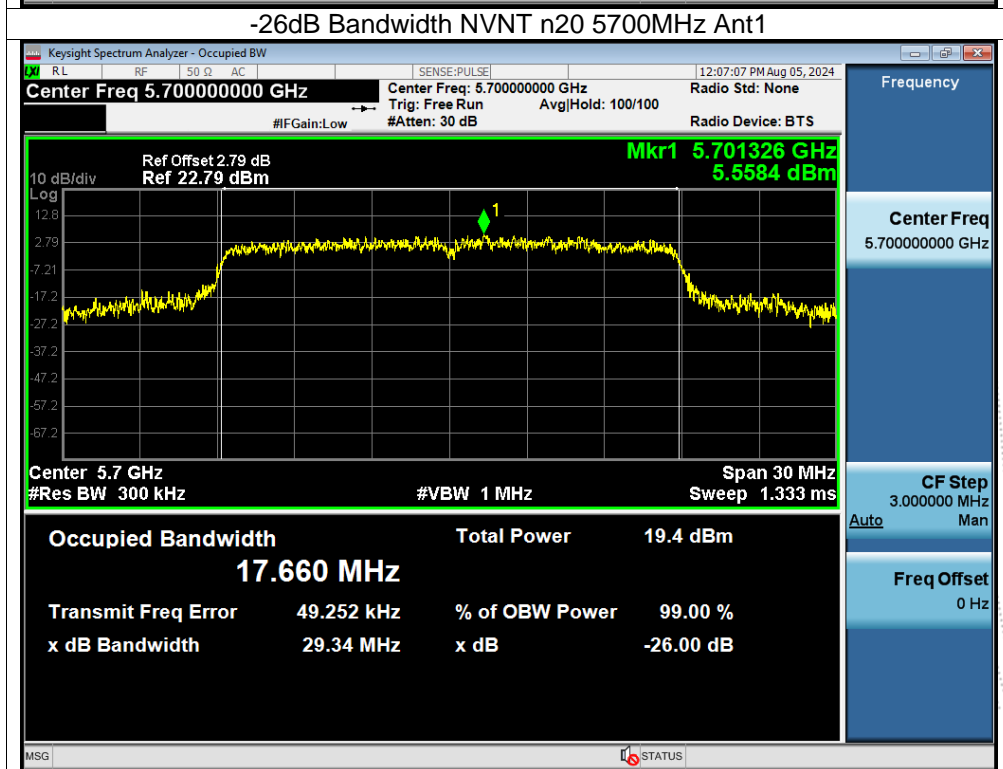
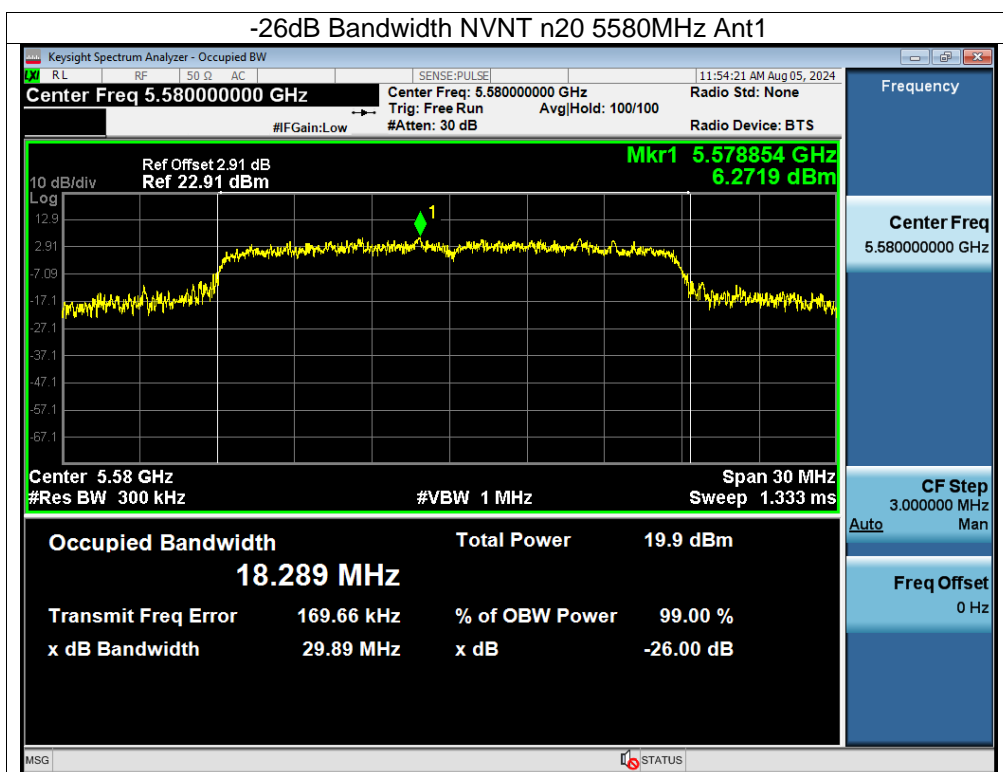


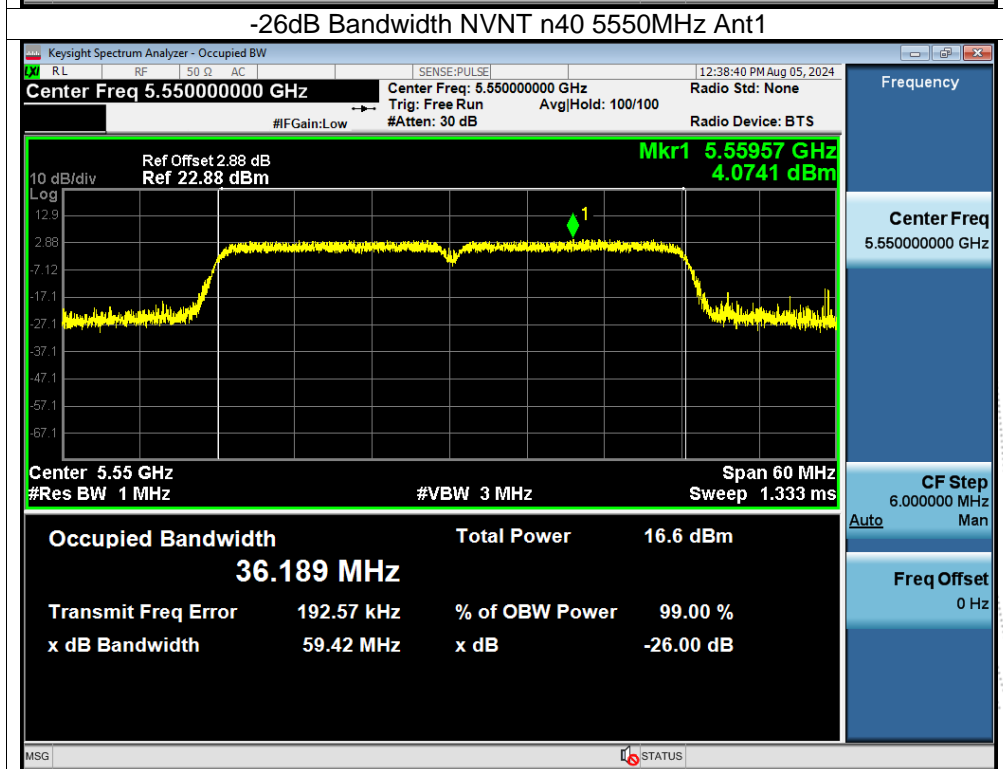
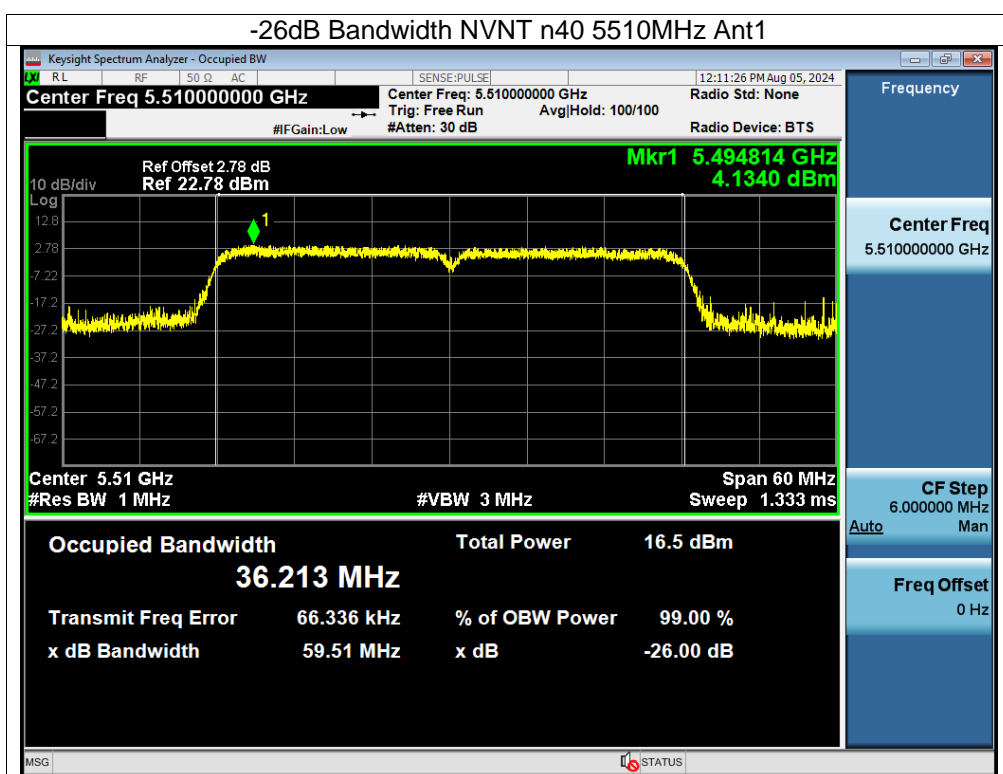


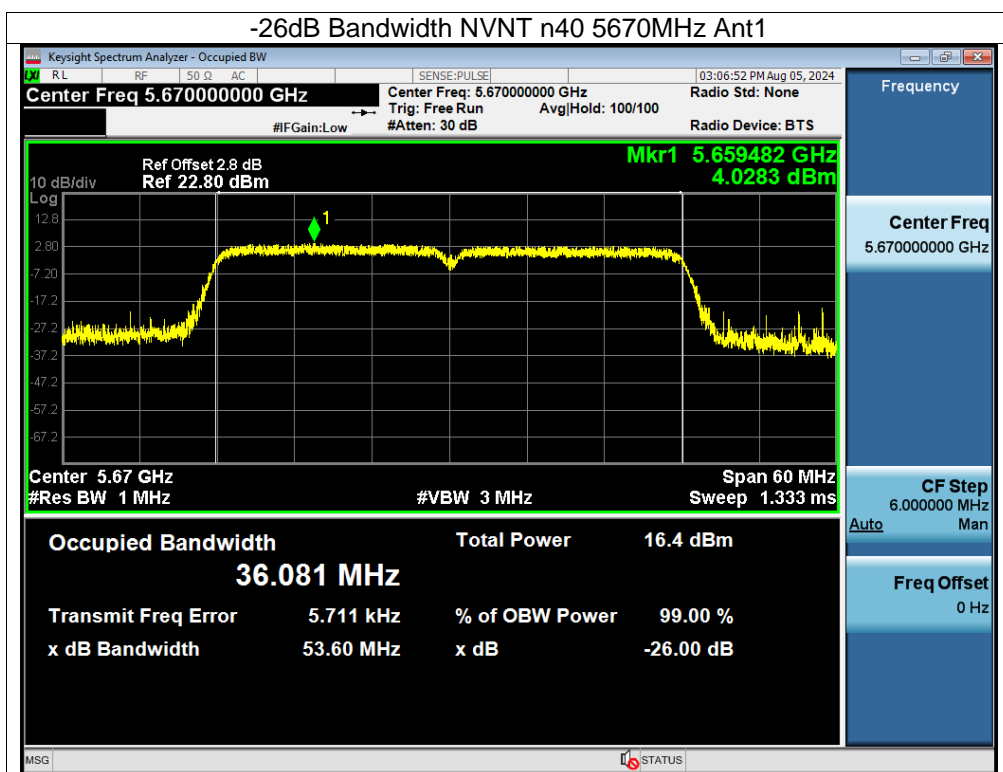


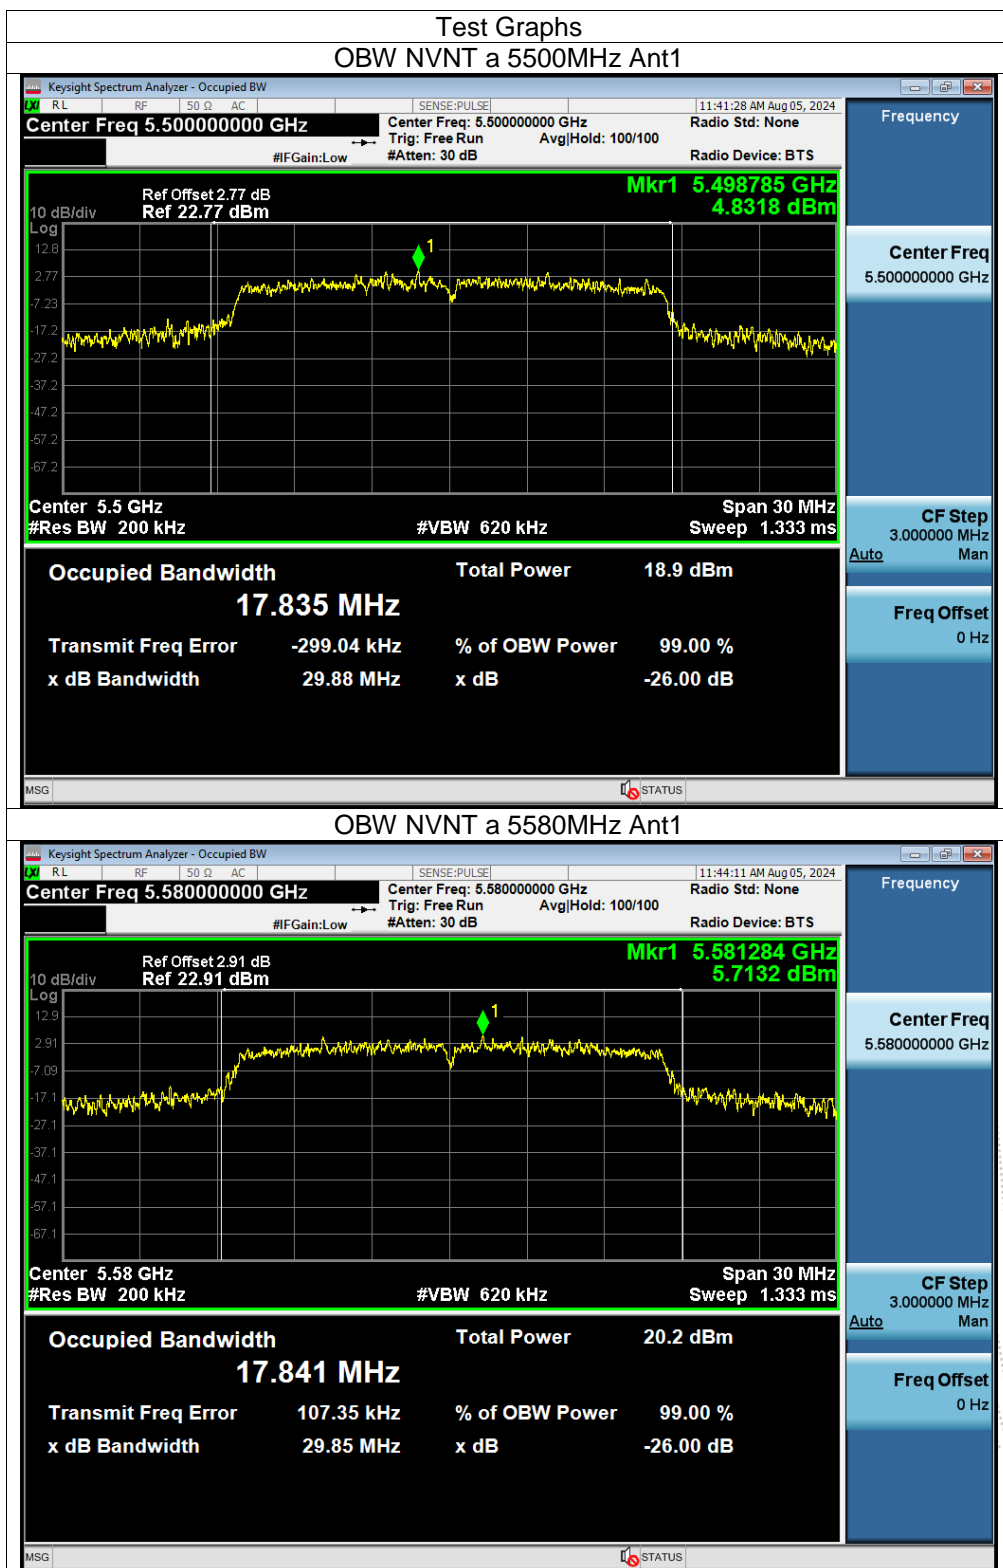

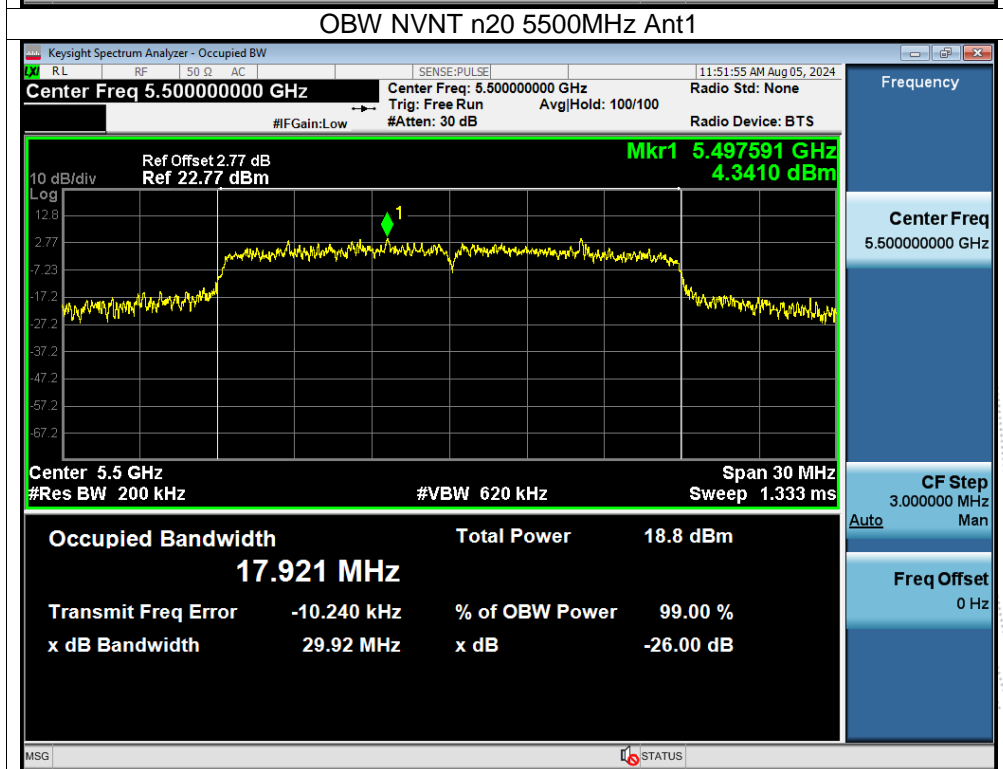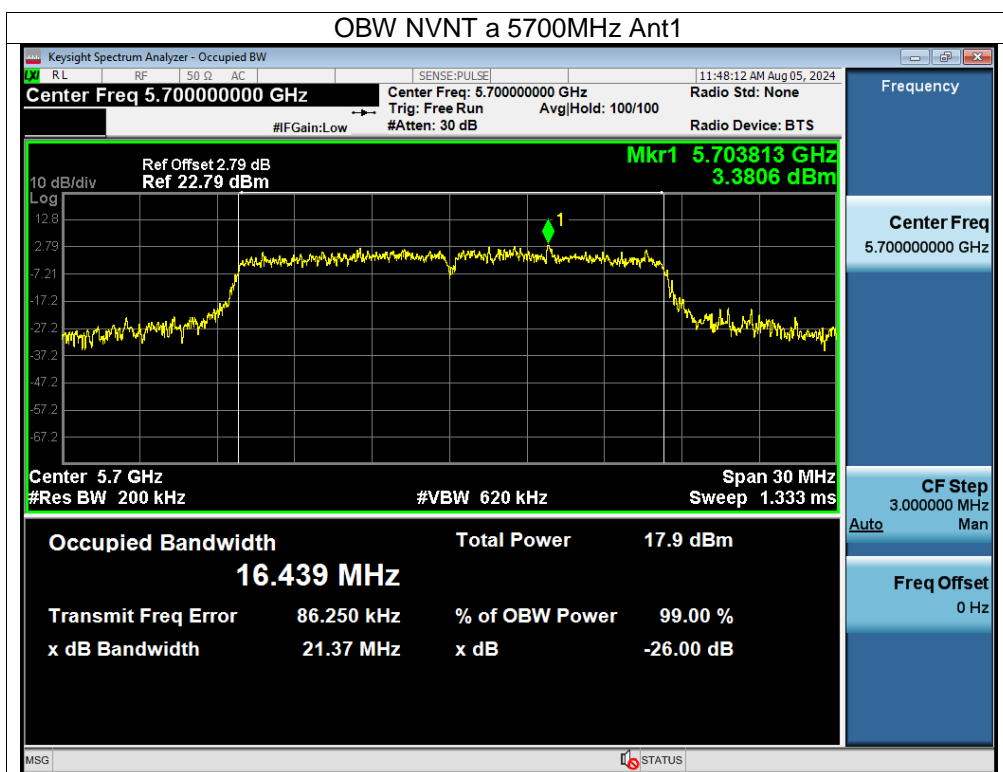

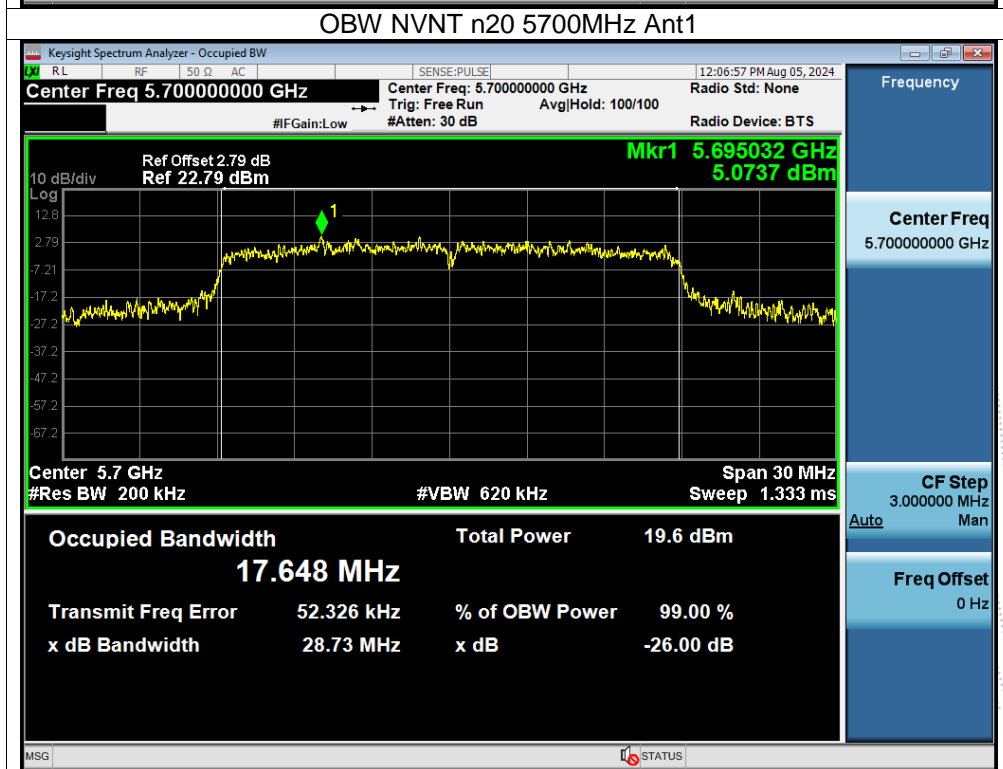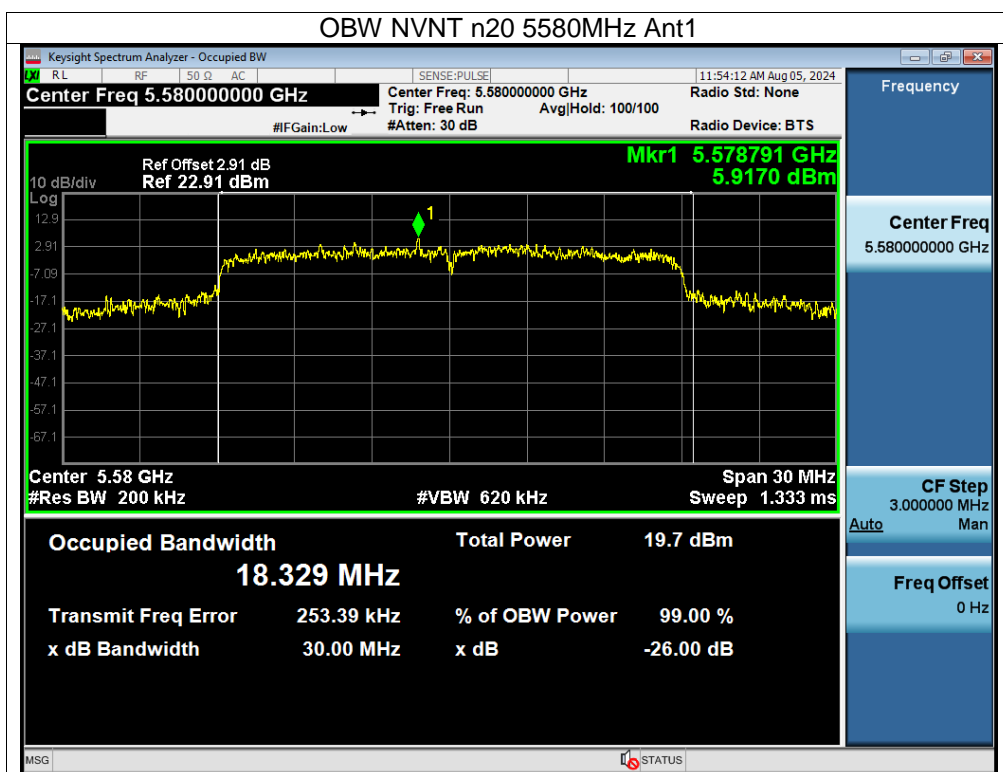

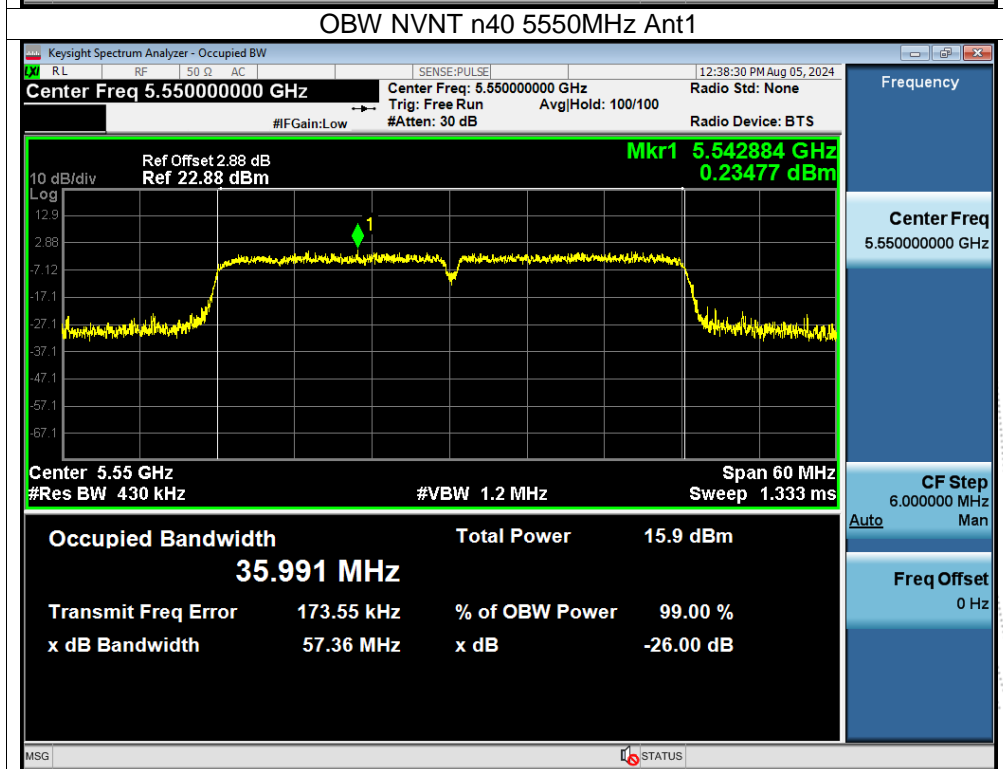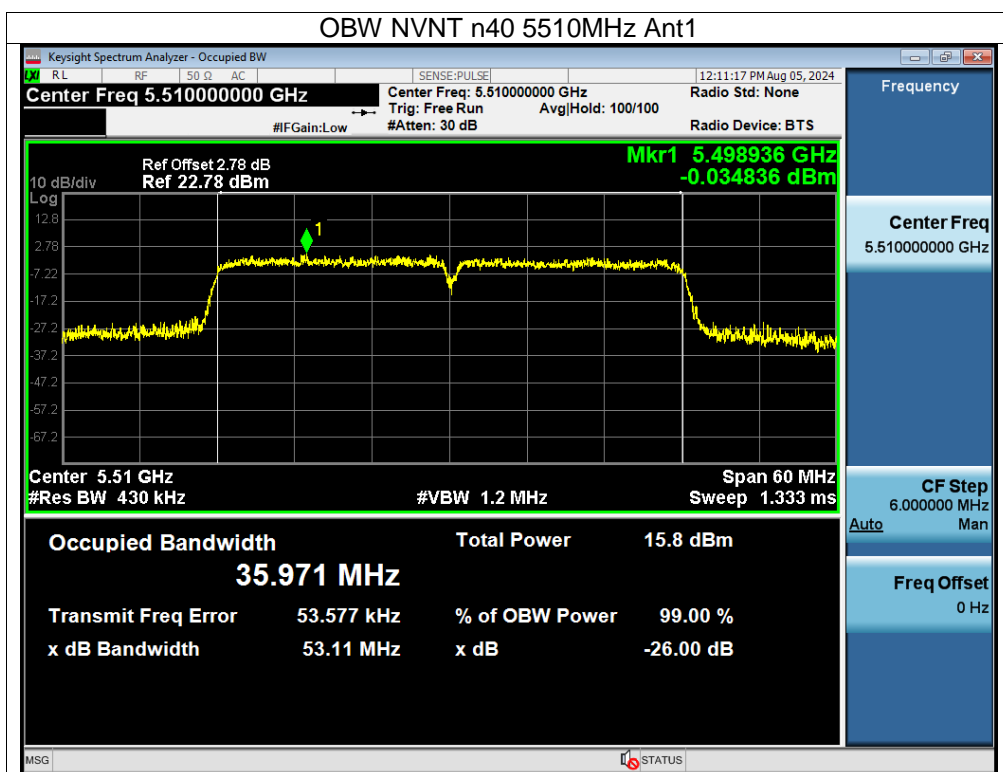


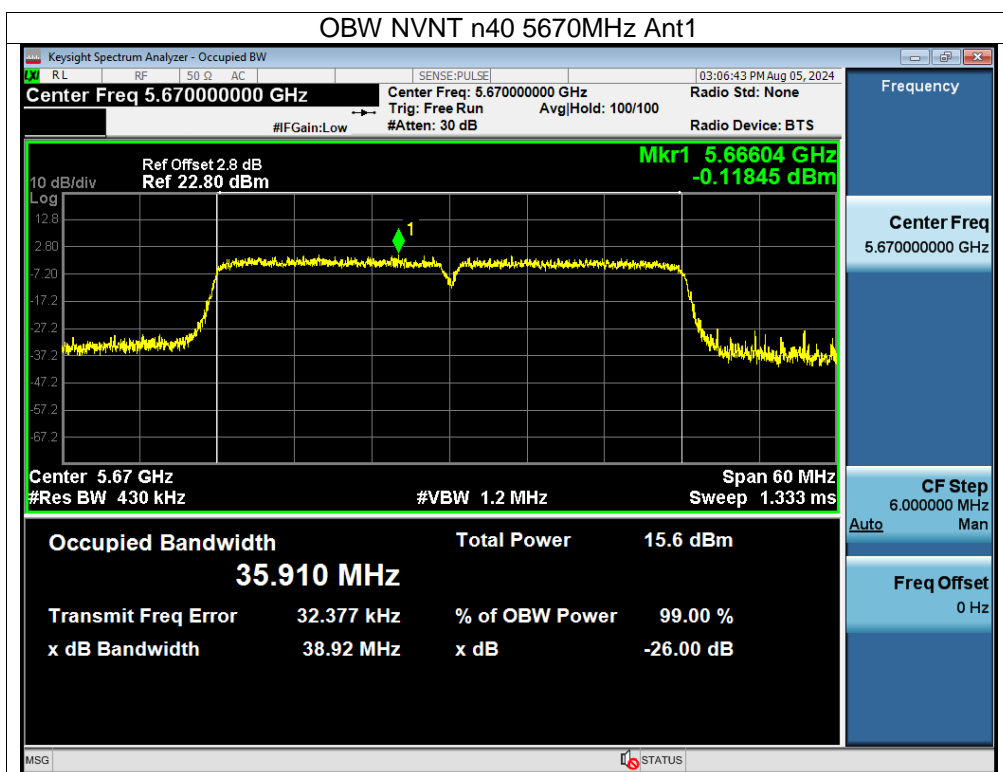

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	(5745-5825MHz)		


Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	15.723	0.5	Pass
NVNT	a	5785	14.334	0.5	Pass
NVNT	a	5825	15.119	0.5	Pass
NVNT	n20	5745	15.007	0.5	Pass
NVNT	n20	5785	14.502	0.5	Pass
NVNT	n20	5825	15.714	0.5	Pass
NVNT	n40	5755	35.337	0.5	Pass
NVNT	n40	5795	35.224	0.5	Pass

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5745	16.497
NVNT	a	5785	16.443
NVNT	a	5825	16.569
NVNT	n20	5745	17.579
NVNT	n20	5785	17.56
NVNT	n20	5825	17.613
NVNT	n40	5755	35.899
NVNT	n40	5795	35.918

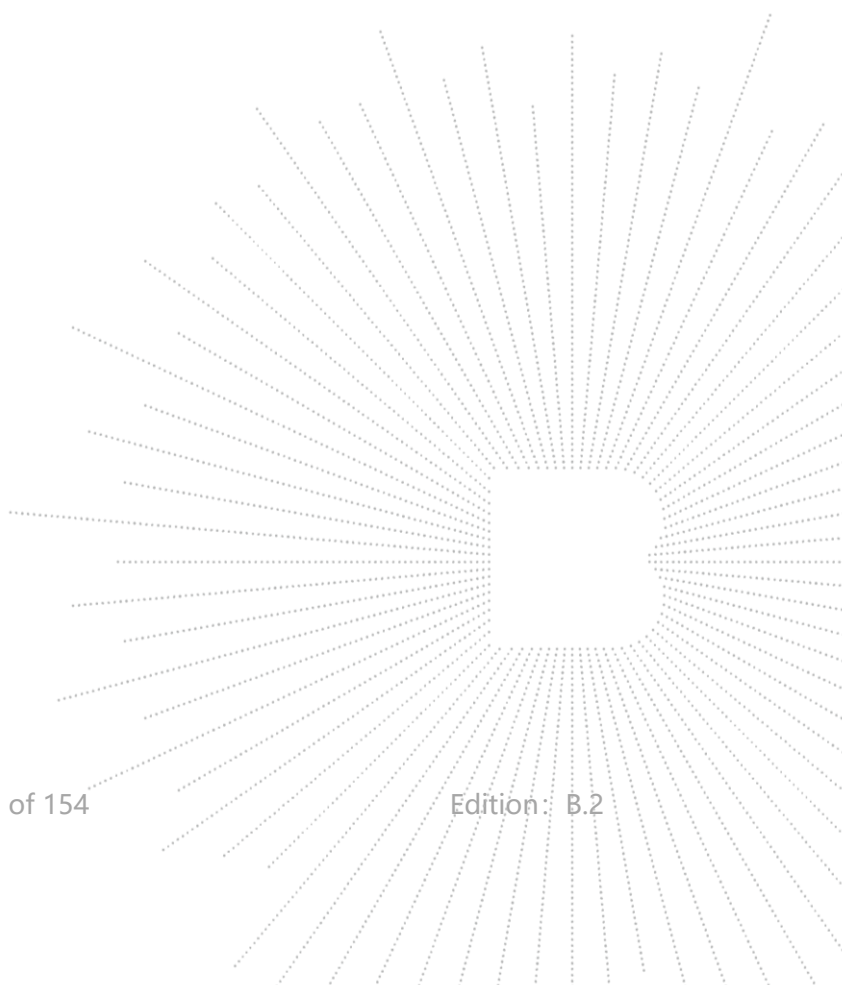




Test Graphs



-6dB Bandwidth NVNT a 5745MHz Ant1


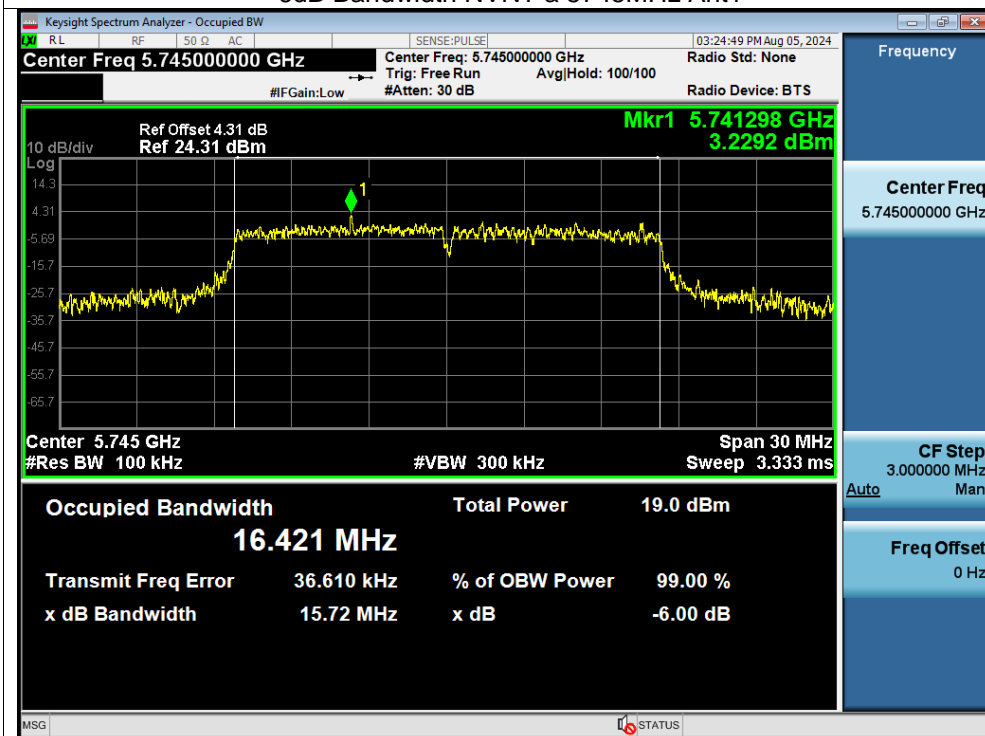


-6dB Bandwidth NVNT a 5785MHz Ant1

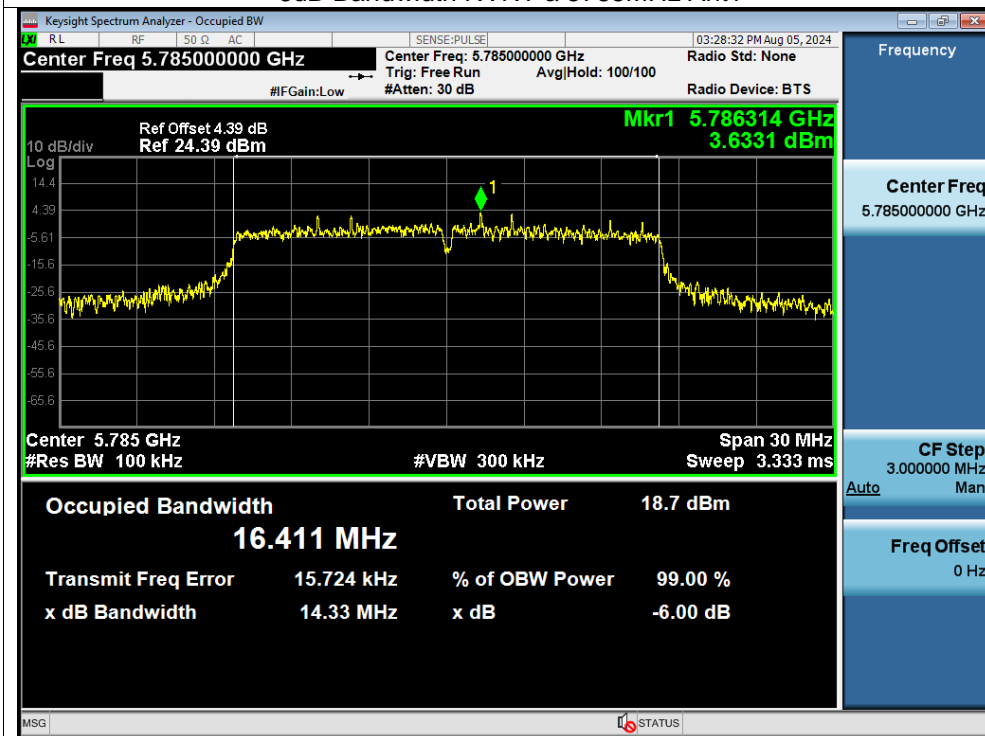

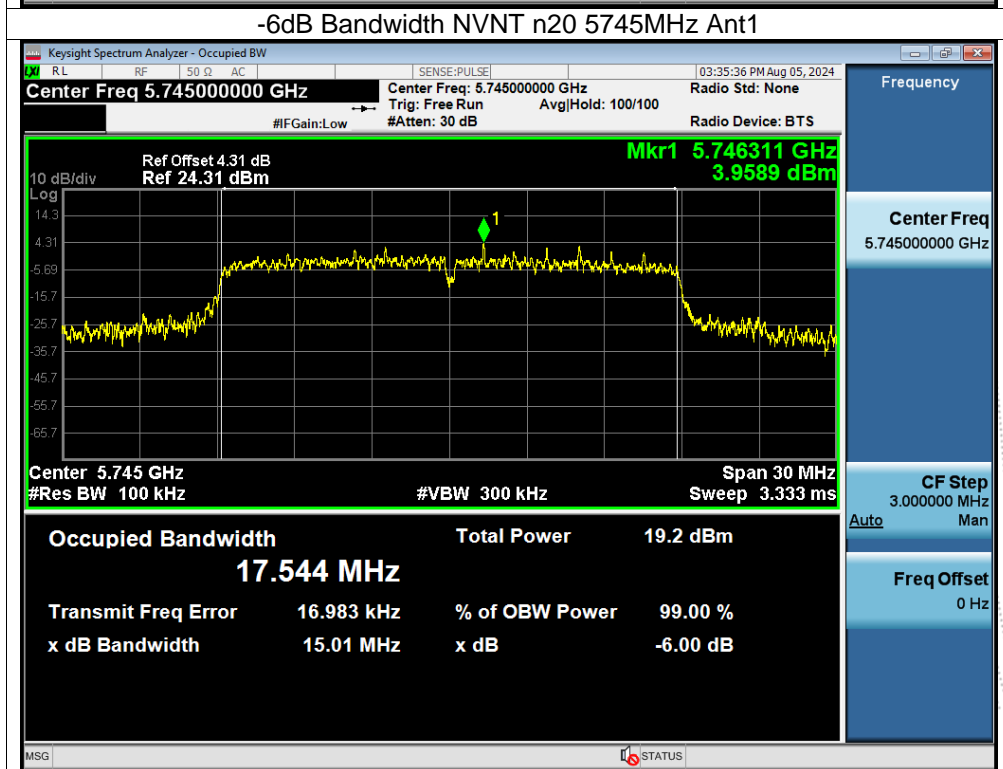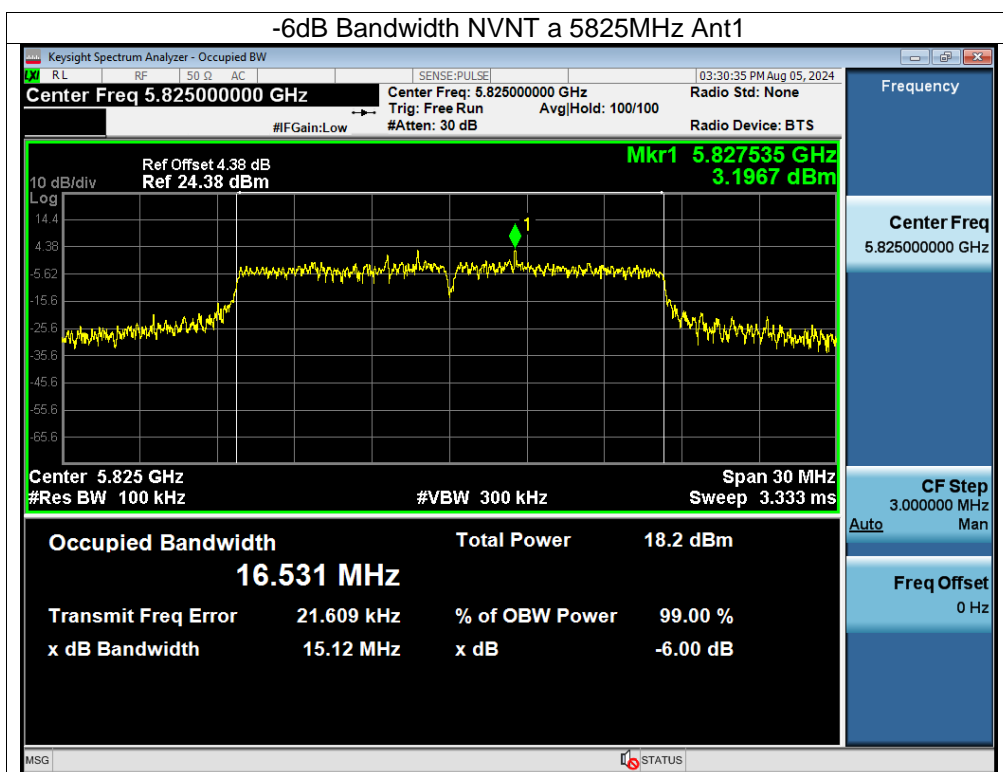

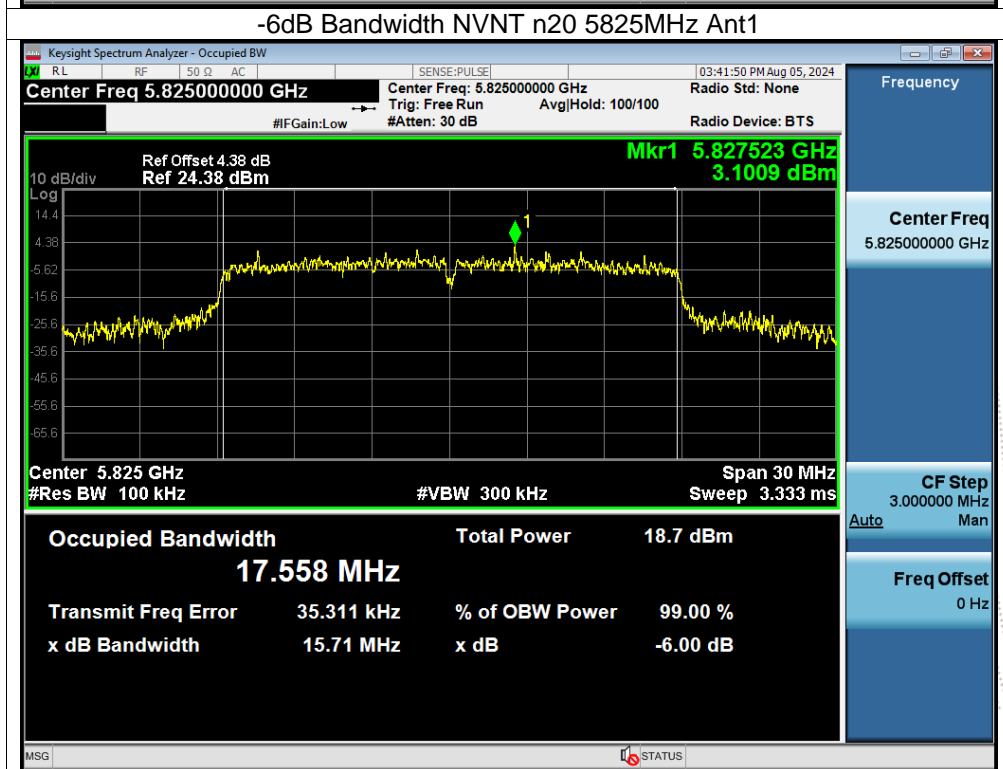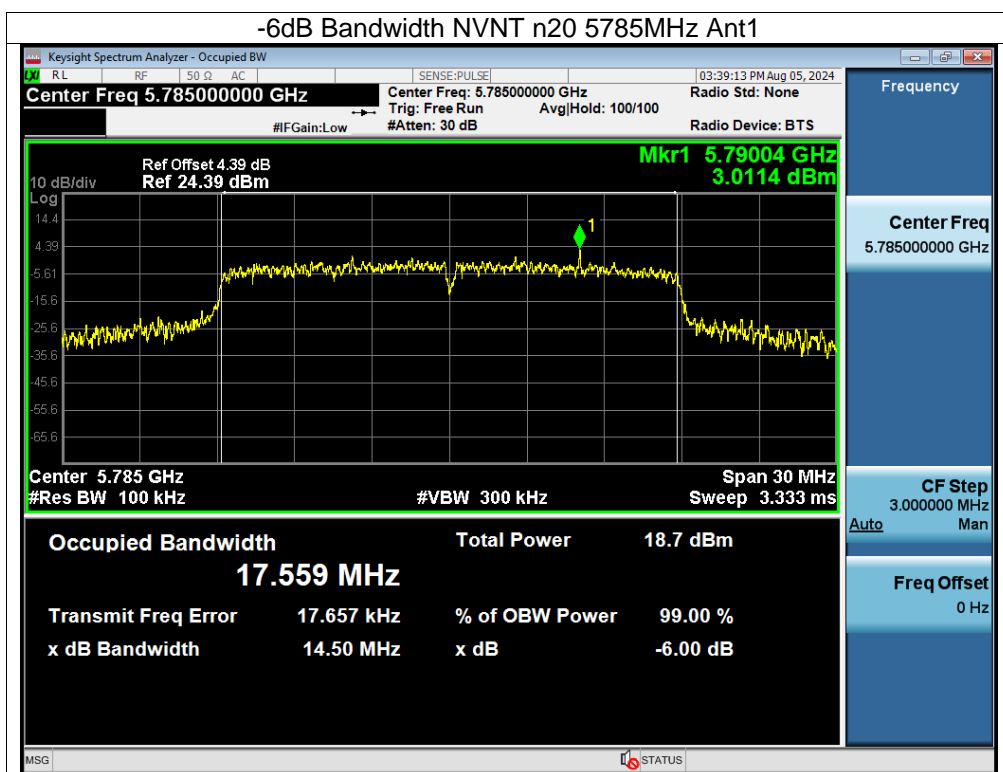


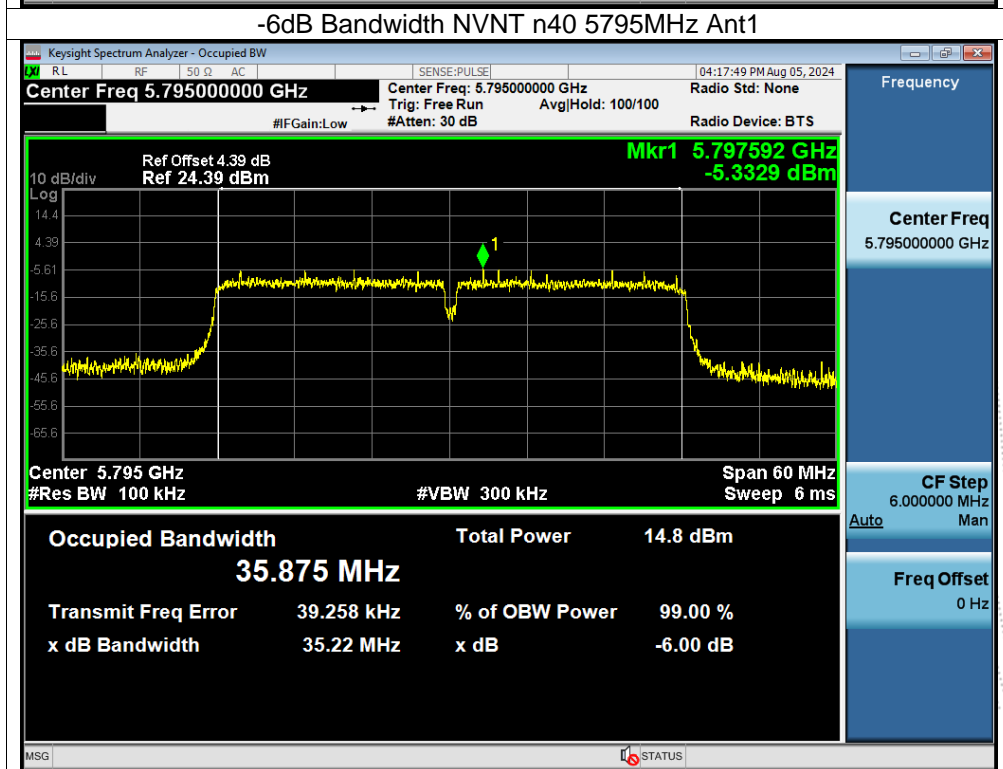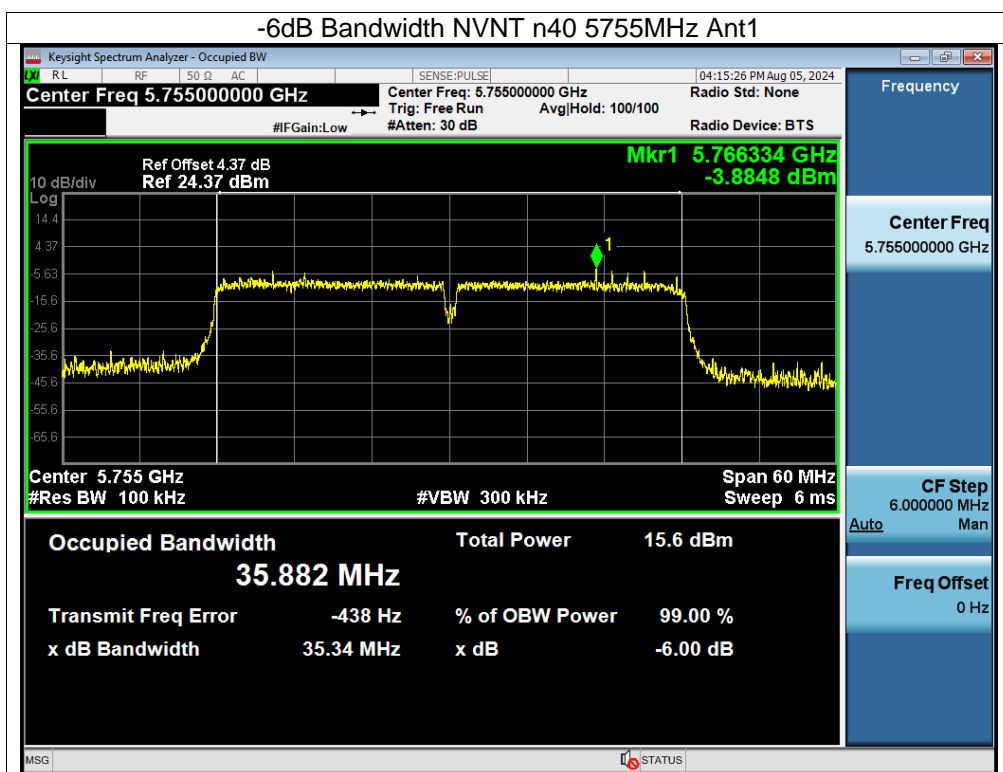





Test Graphs



OBW NVNT a 5745MHz Ant1


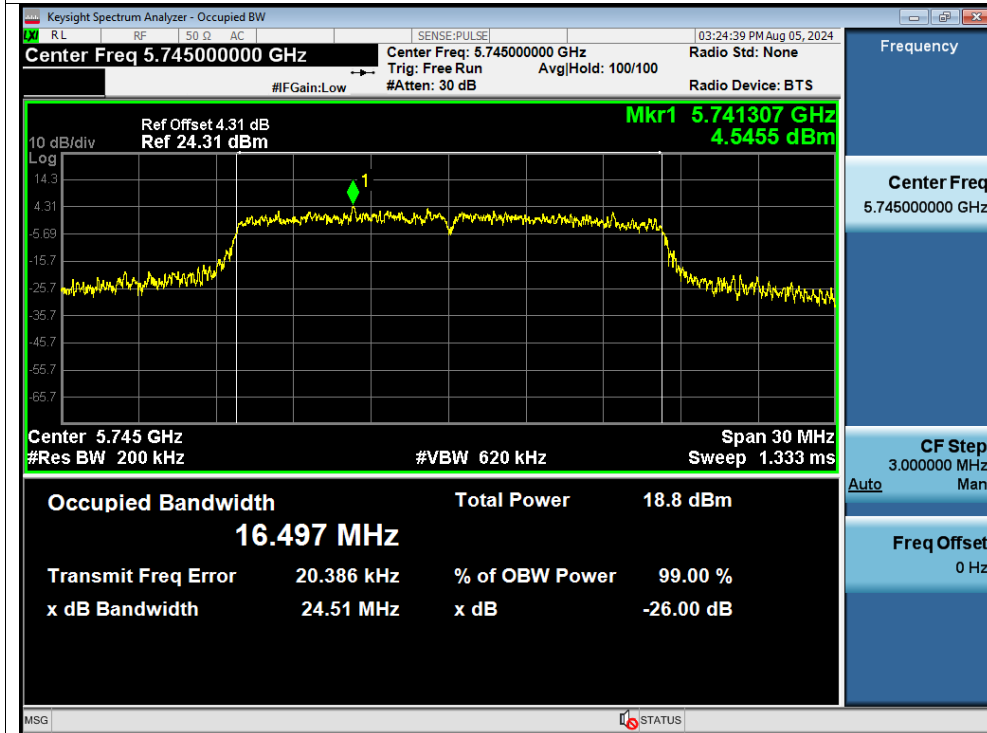


OBW NVNT a 5785MHz Ant1



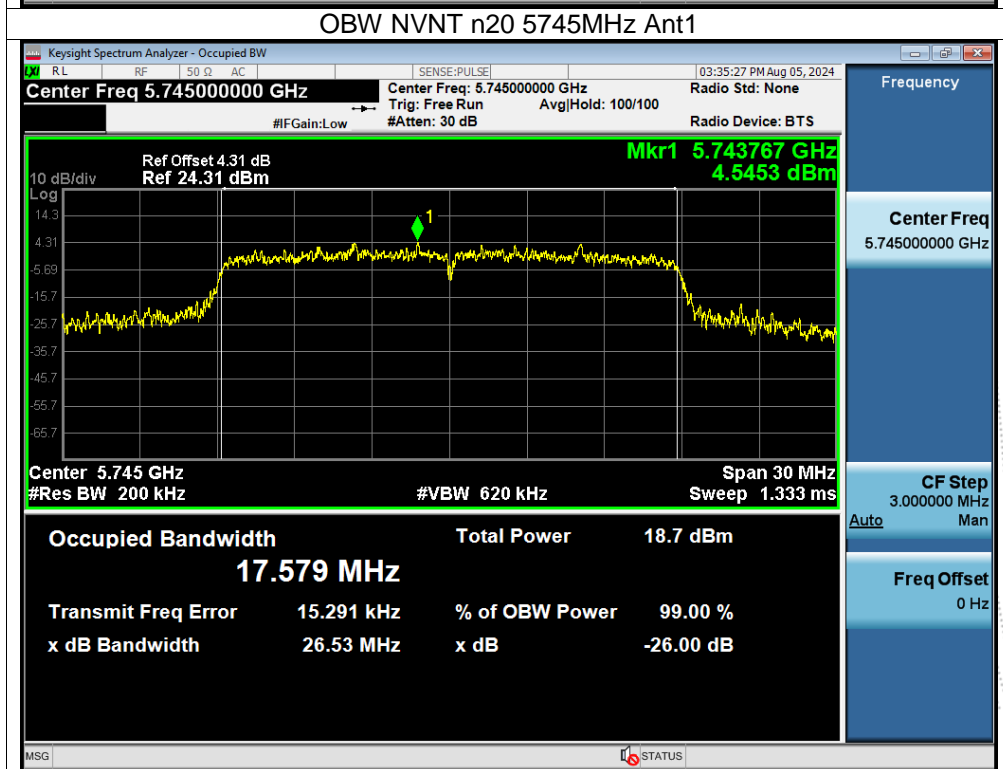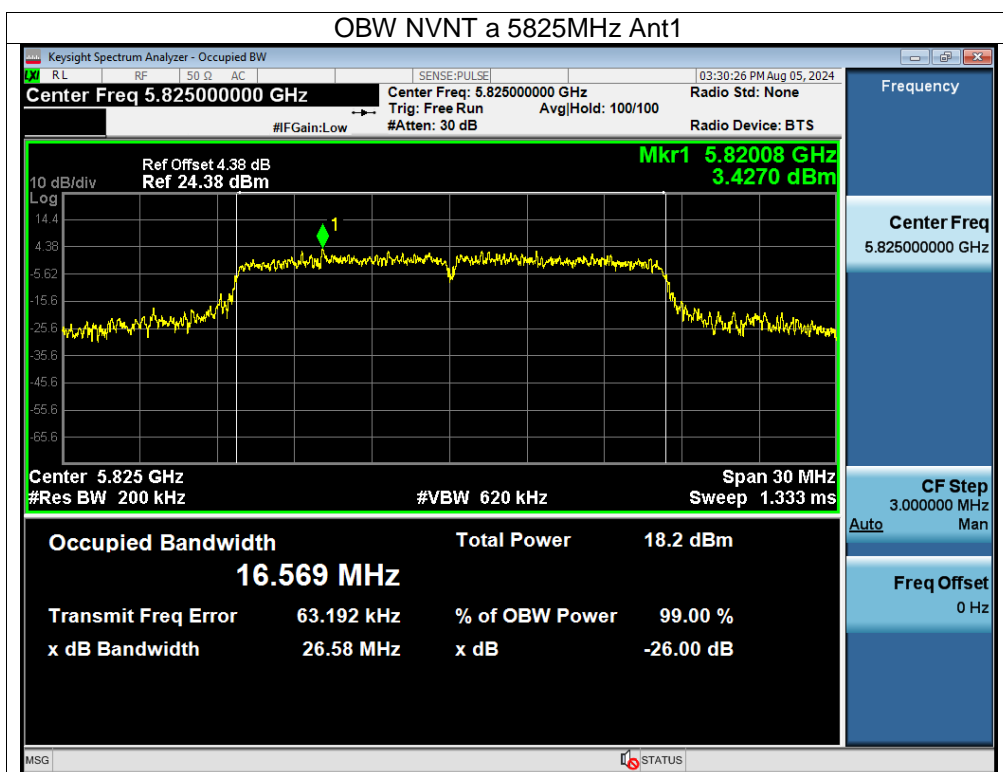

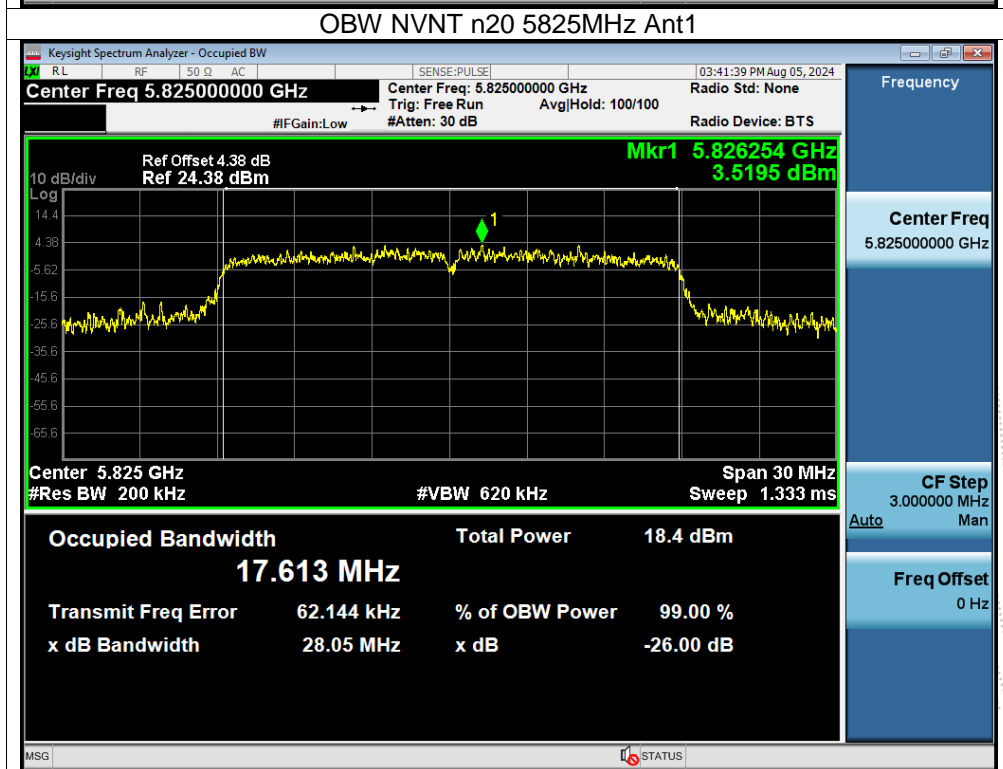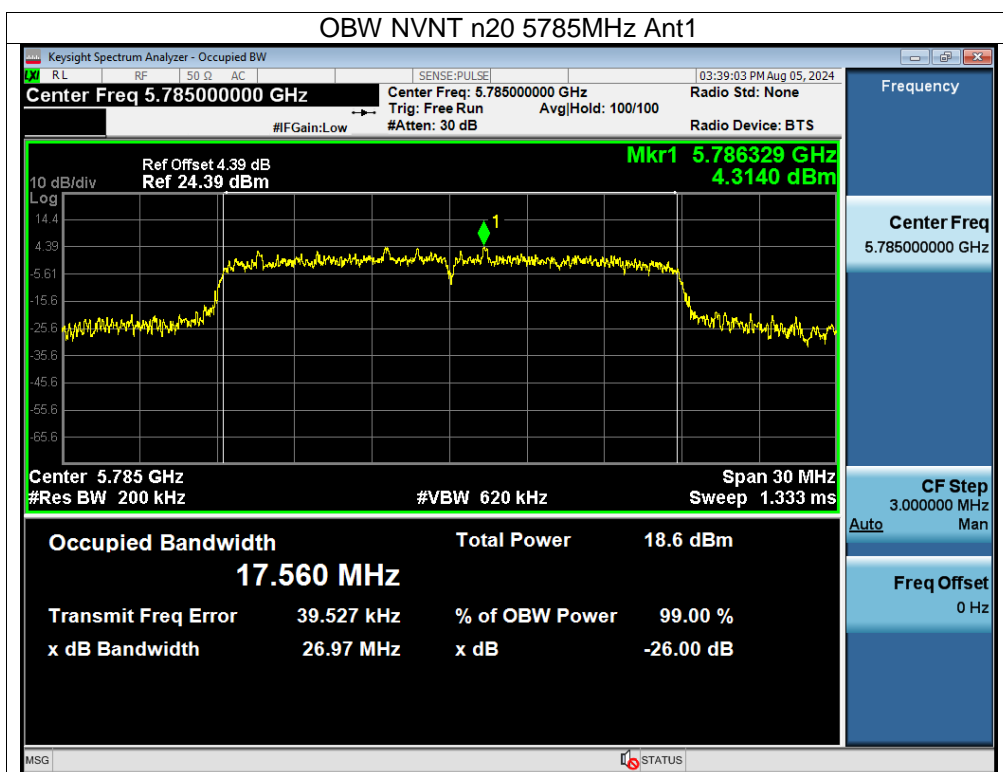

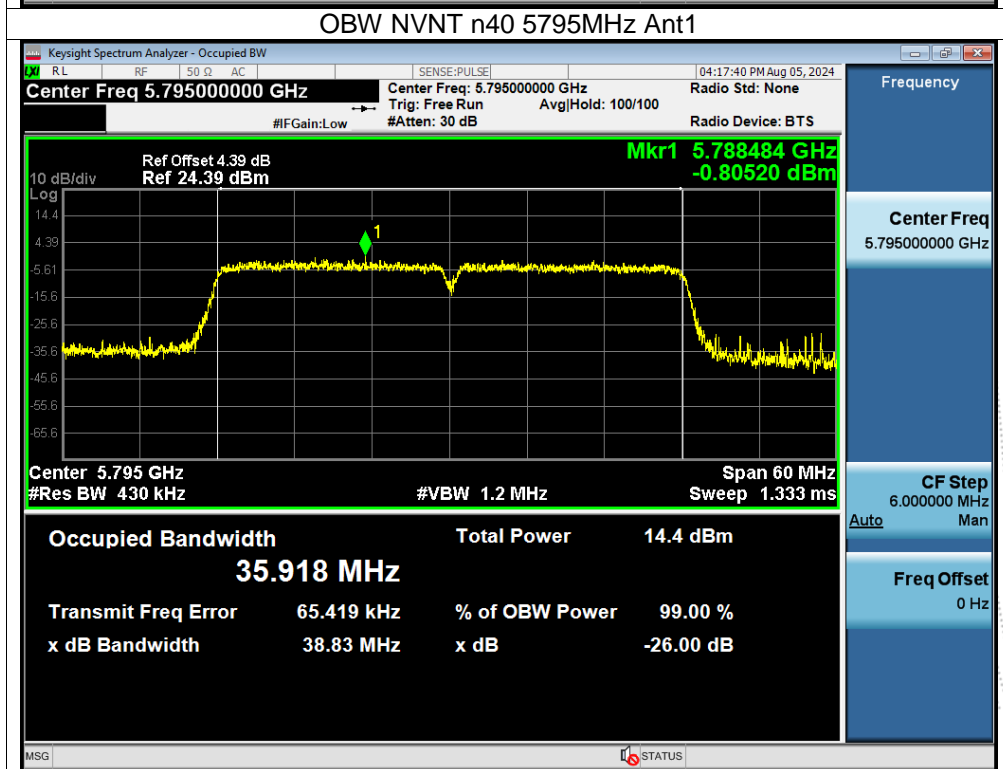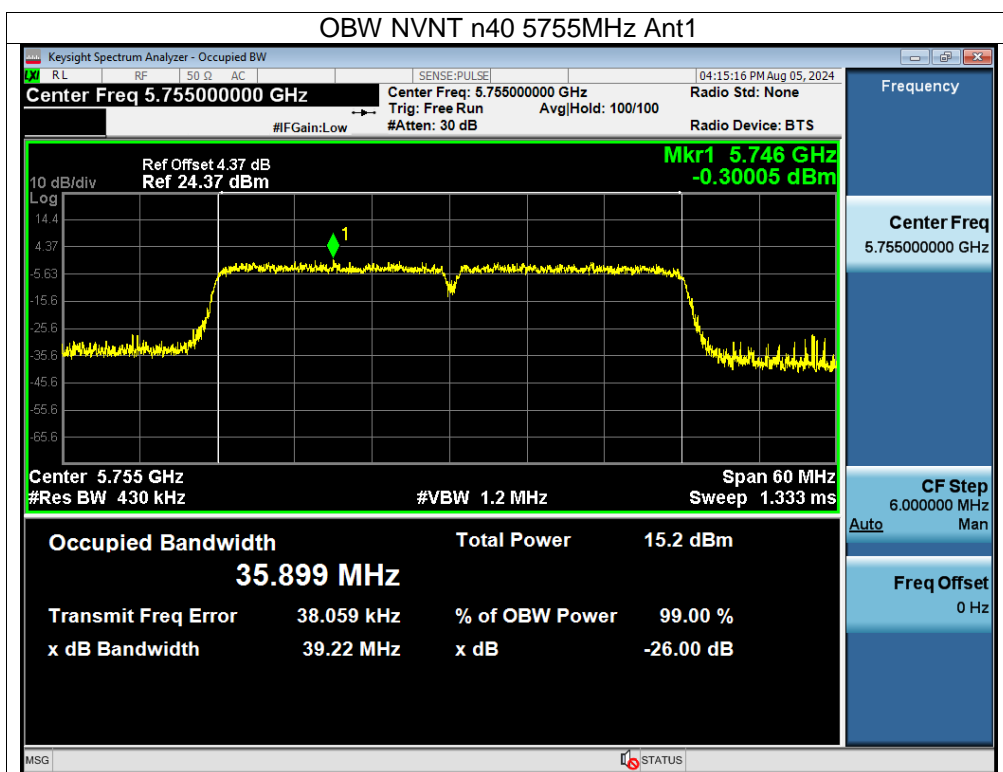

10. Maximum Conducted Output Power

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	0.25W
5250~5350	0.25W
5500~5700	0.25W
5725~5850	1W

10.3 Test Procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.


(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

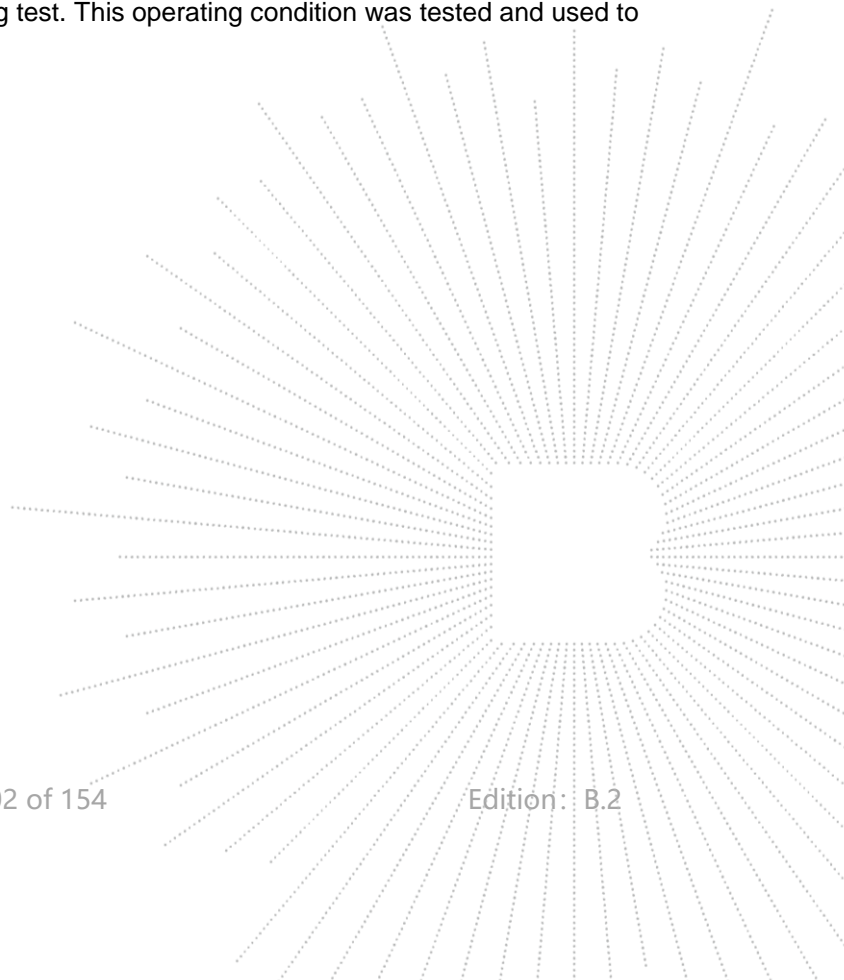

10.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	5180-5240MHz		

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	8.45	24	Pass
NVNT	a	5200	7.59	24	Pass
NVNT	a	5240	7.98	24	Pass
NVNT	n20	5180	7.65	24	Pass
NVNT	n20	5200	7.54	24	Pass
NVNT	n20	5240	7.26	24	Pass
NVNT	n40	5190	8.97	24	Pass
NVNT	n40	5230	9.08	24	Pass

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	5260-5320MHz		

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	11 + 10 logB (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	9.2	25.48	24	Pass
NVNT	a	5280	7.11	25.15	24	Pass
NVNT	a	5320	8.58	25.76	24	Pass
NVNT	n20	5260	7.98	24.76	24	Pass
NVNT	n20	5280	8.11	23.84	24	Pass
NVNT	n20	5320	7.36	25.03	24	Pass
NVNT	n40	5270	9.83	26.90	24	Pass
NVNT	n40	5310	7.43	26.83	24	Pass

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	5500-5700MHz		

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	11 + 10 logB (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	7.83	25.77	24	Pass
NVNT	a	5580	9.2	25.77	24	Pass
NVNT	a	5700	6.29	24.90	24	Pass
NVNT	n20	5500	7.63	25.76	24	Pass
NVNT	n20	5580	6.37	25.76	24	Pass
NVNT	n20	5700	6.96	25.67	24	Pass
NVNT	n40	5510	8.56	28.75	24	Pass
NVNT	n40	5550	8.8	28.74	24	Pass
NVNT	n40	5670	8.08	28.29	24	Pass

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	5745-5825MHz		

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	7.04	30	Pass
NVNT	a	5785	7.4	30	Pass
NVNT	a	5825	6.89	30	Pass
NVNT	n20	5745	6.73	30	Pass
NVNT	n20	5785	7.24	30	Pass
NVNT	n20	5825	6.41	30	Pass
NVNT	n40	5755	7.98	30	Pass
NVNT	n40	5795	7.5	30	Pass

11. Out Of Band Emissions

11.1 Block Diagram Of Test Setup



11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing

11.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



11.4 EUT Operating Conditions



The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data

11.5 Test Result

Test Mode:	5180-5240MHz
------------	--------------



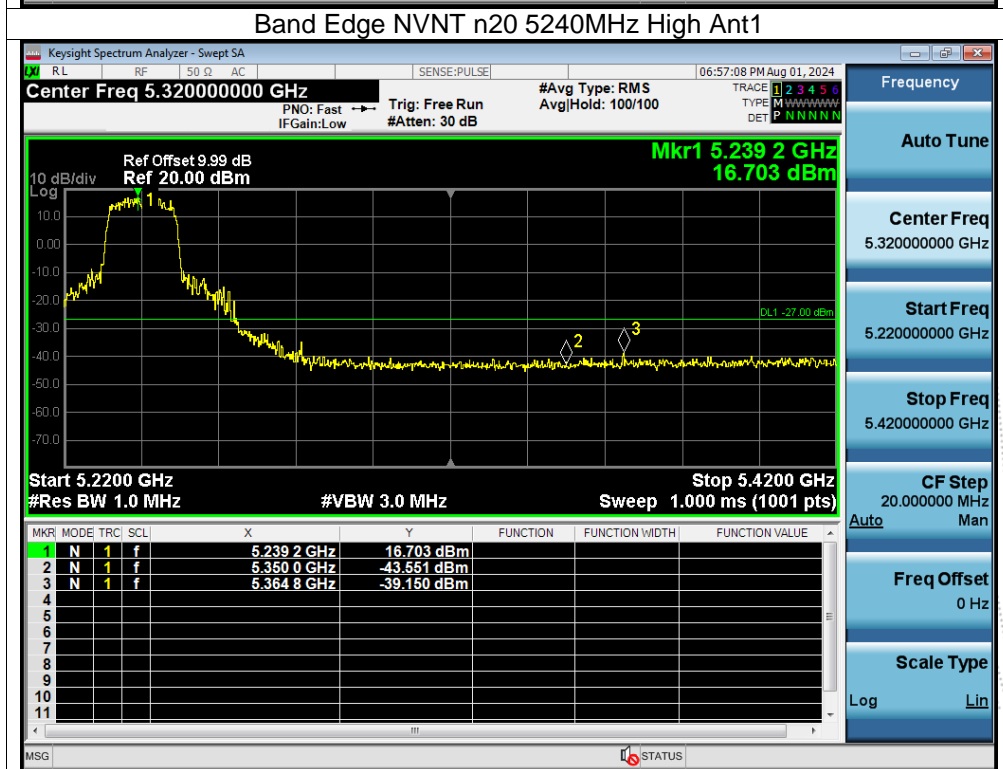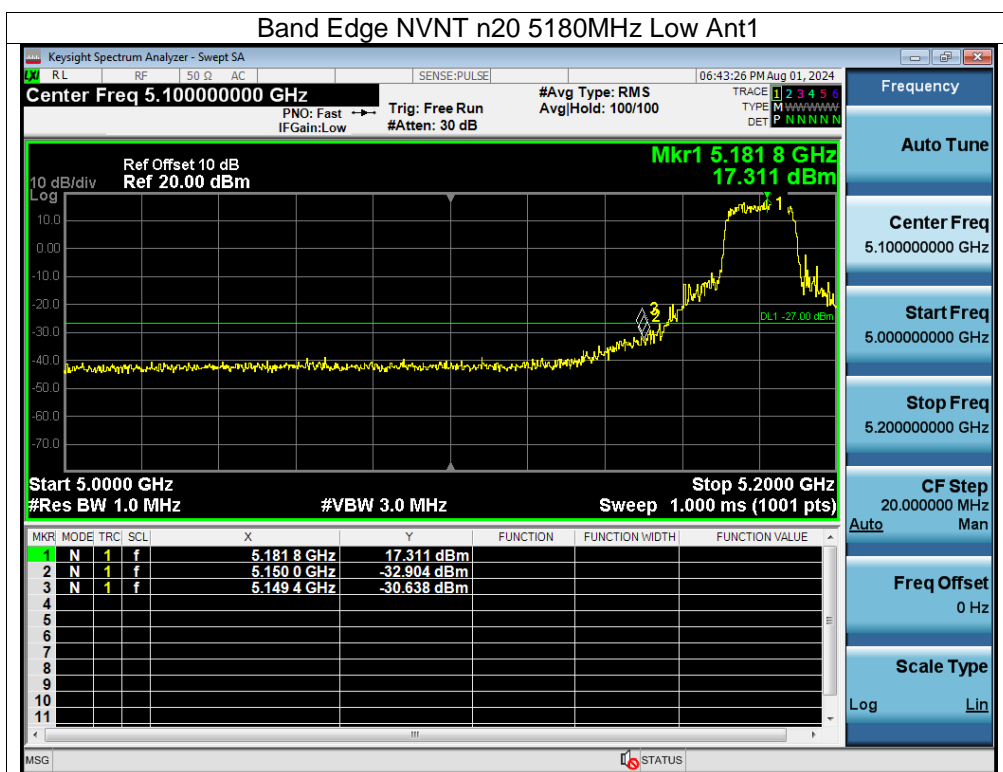


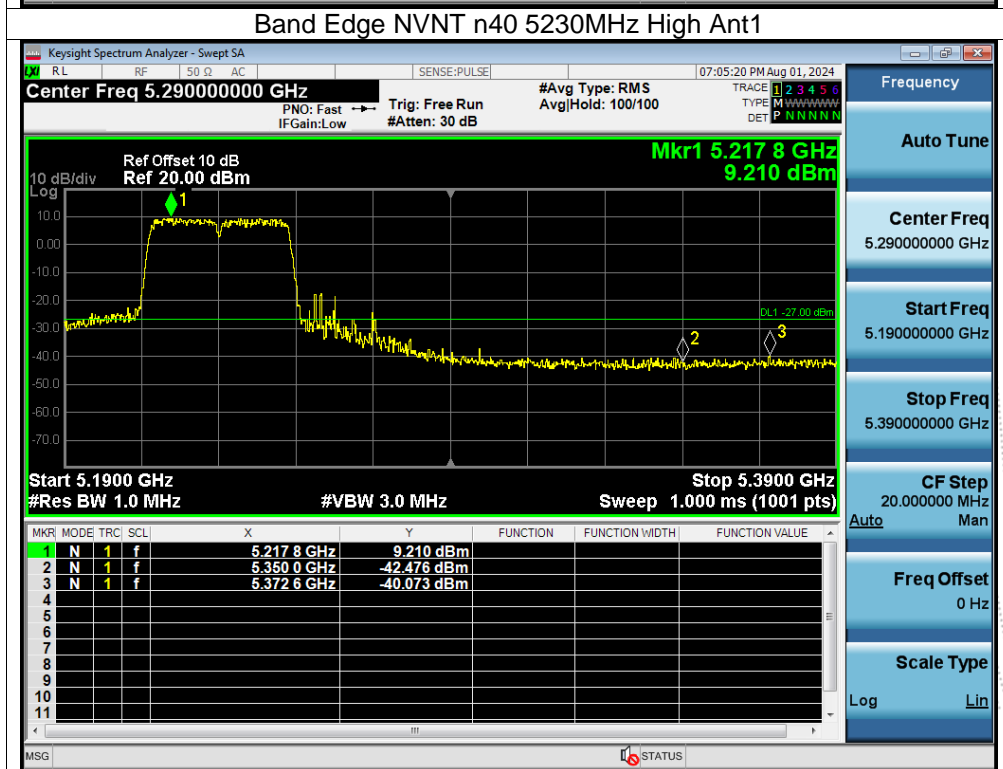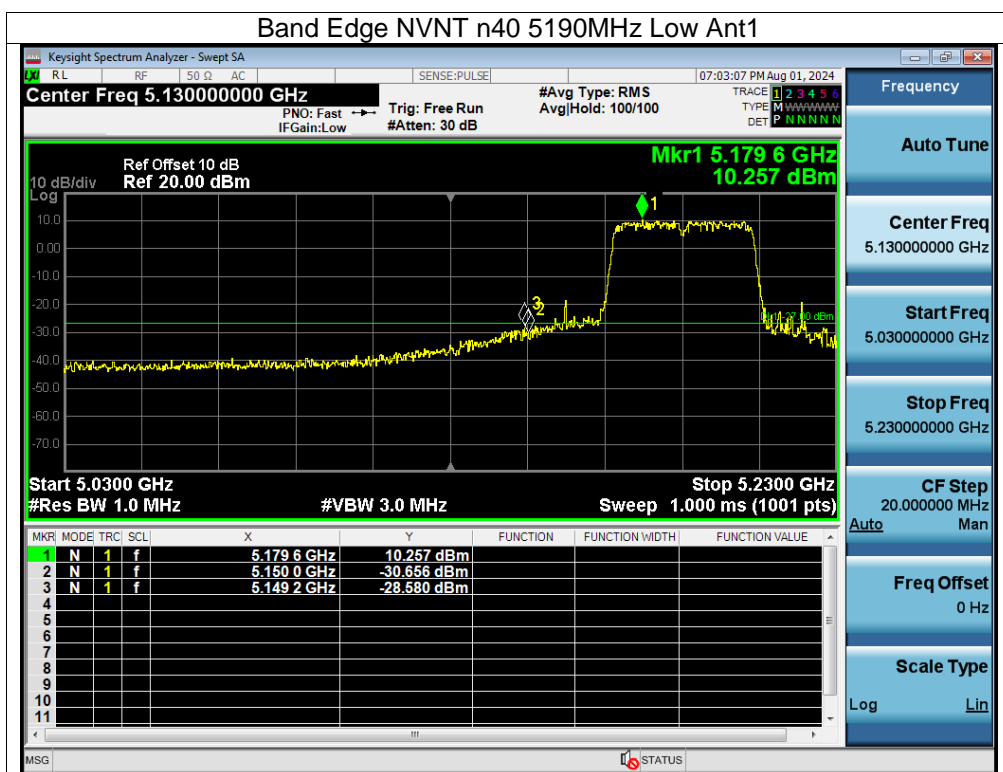


Test Mode: 5260-5230MHz



Test Graphs



Band Edge NVNT a 5260MHz Low Ant1

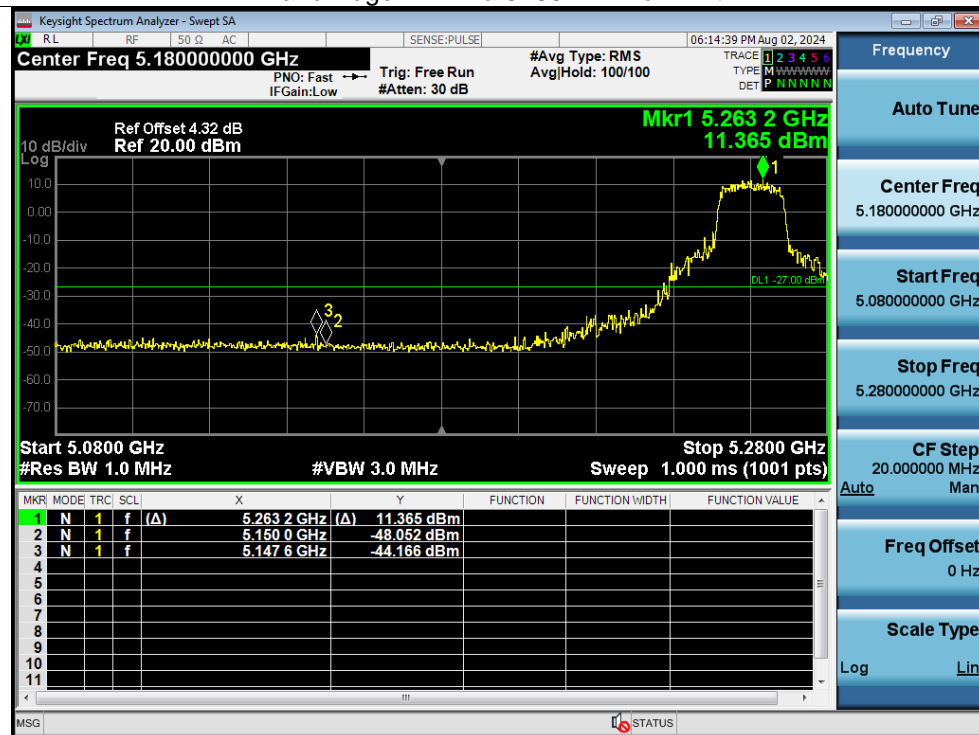


Band Edge NVNT a 5320MHz High Ant1


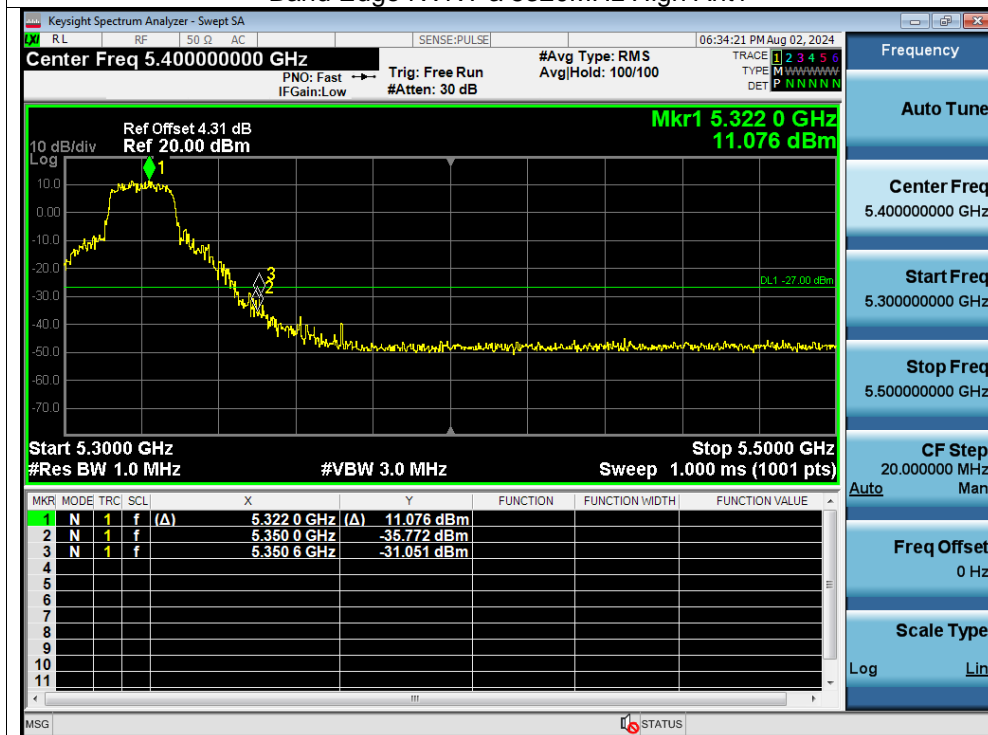


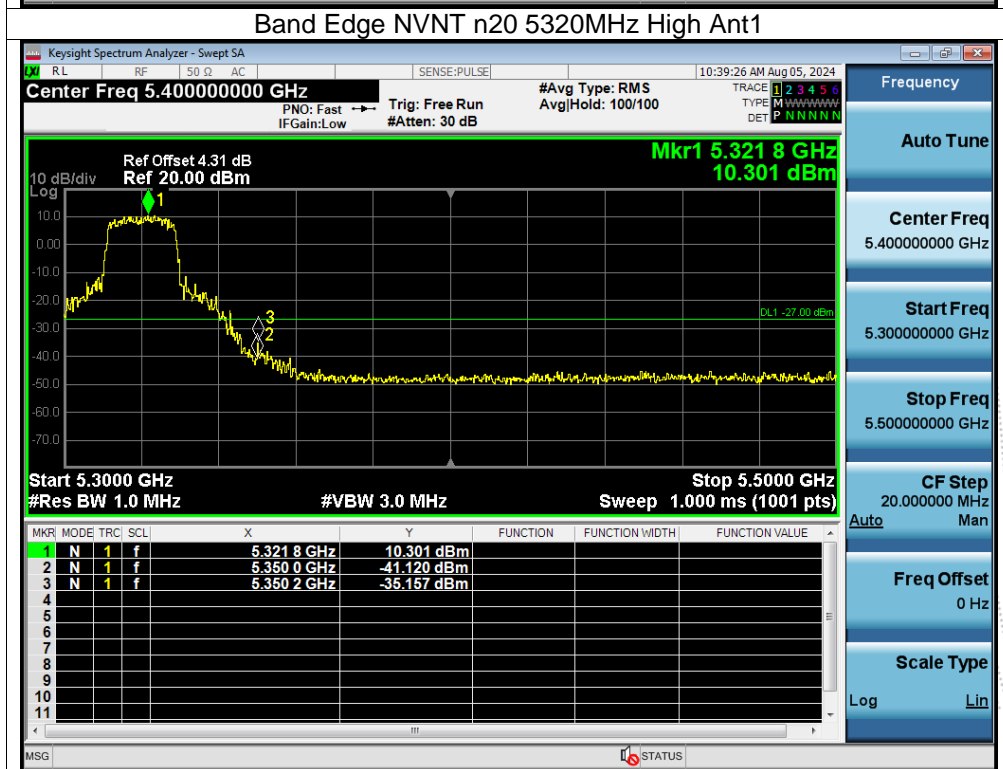
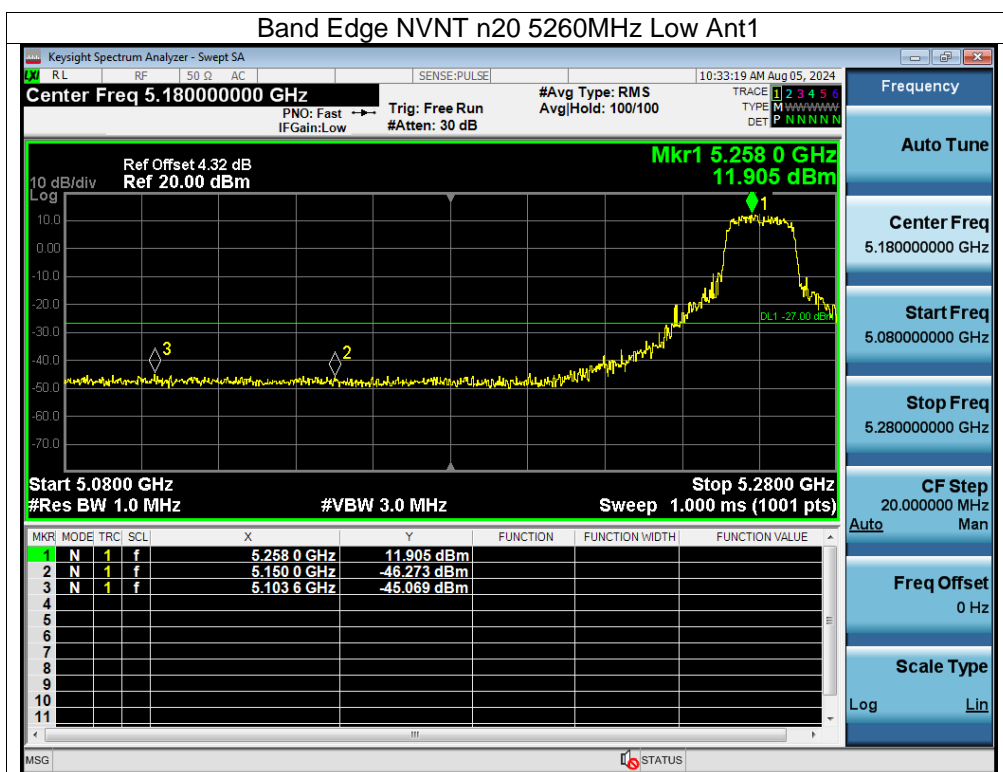


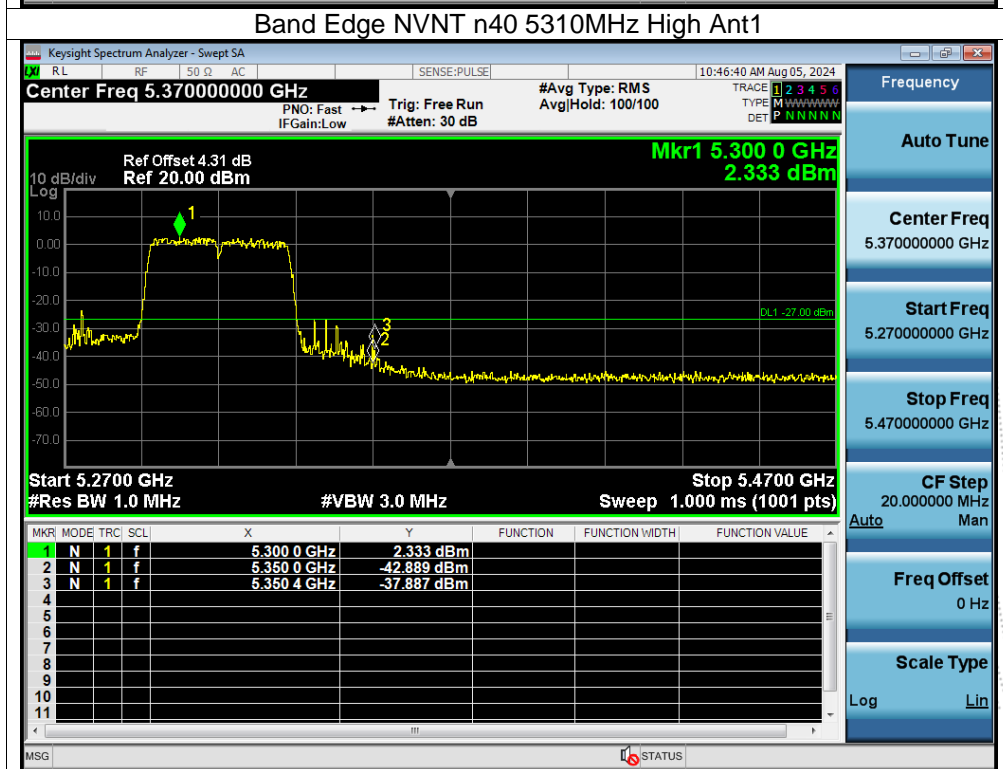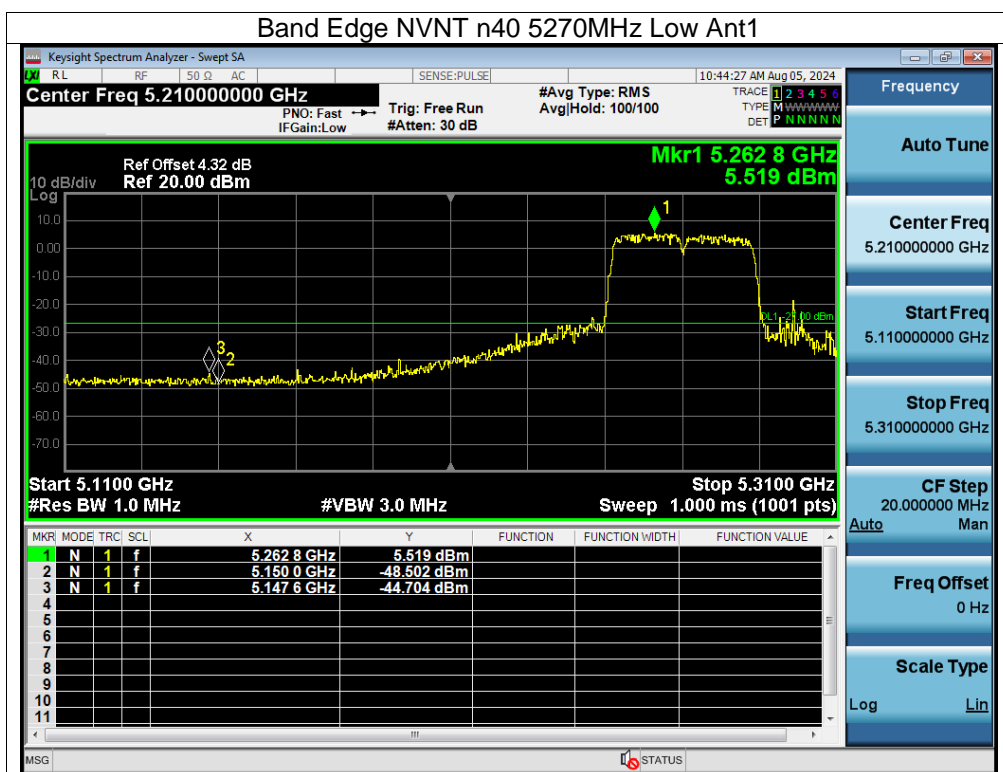

Test Mode:	5500-5700MHz
------------	--------------

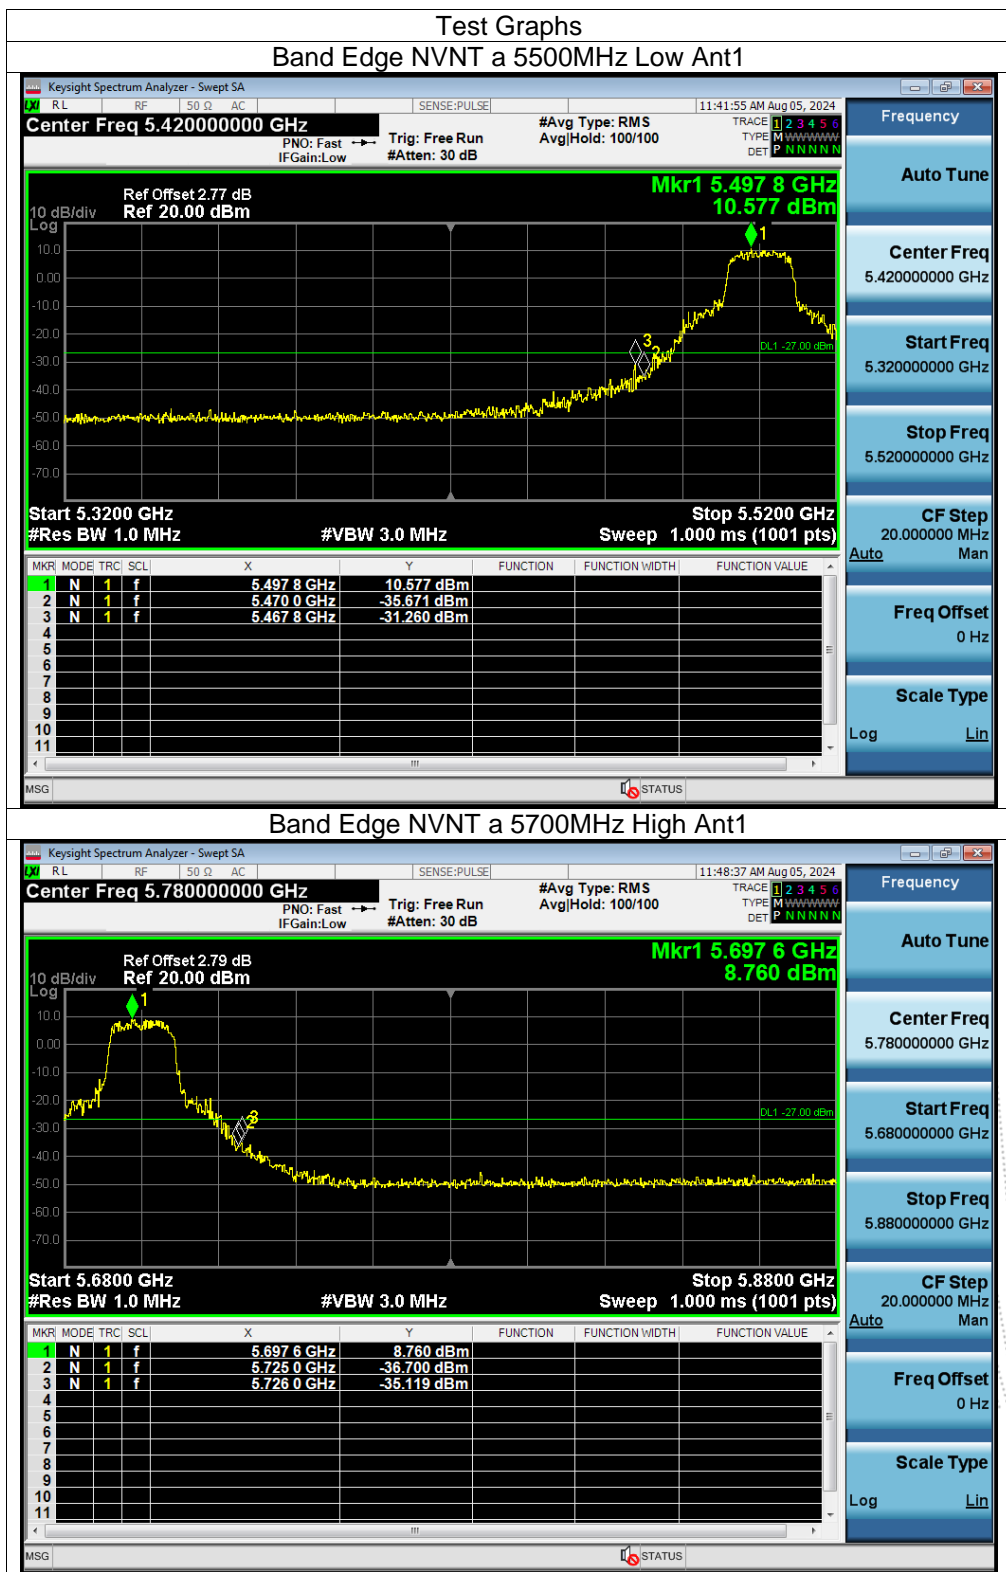

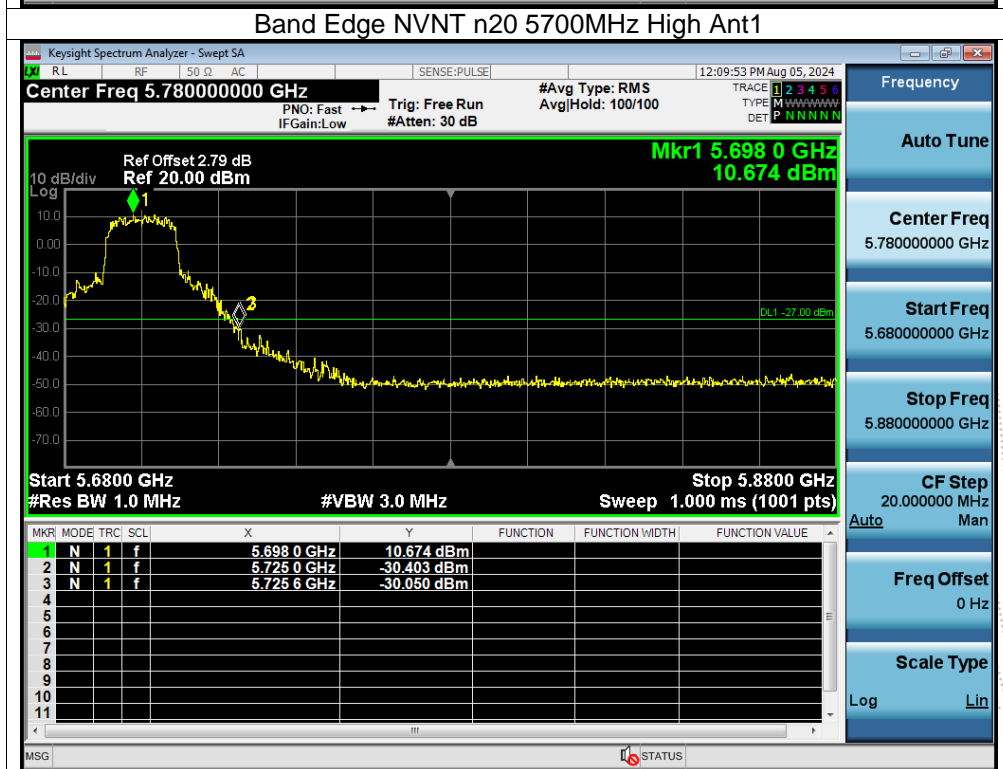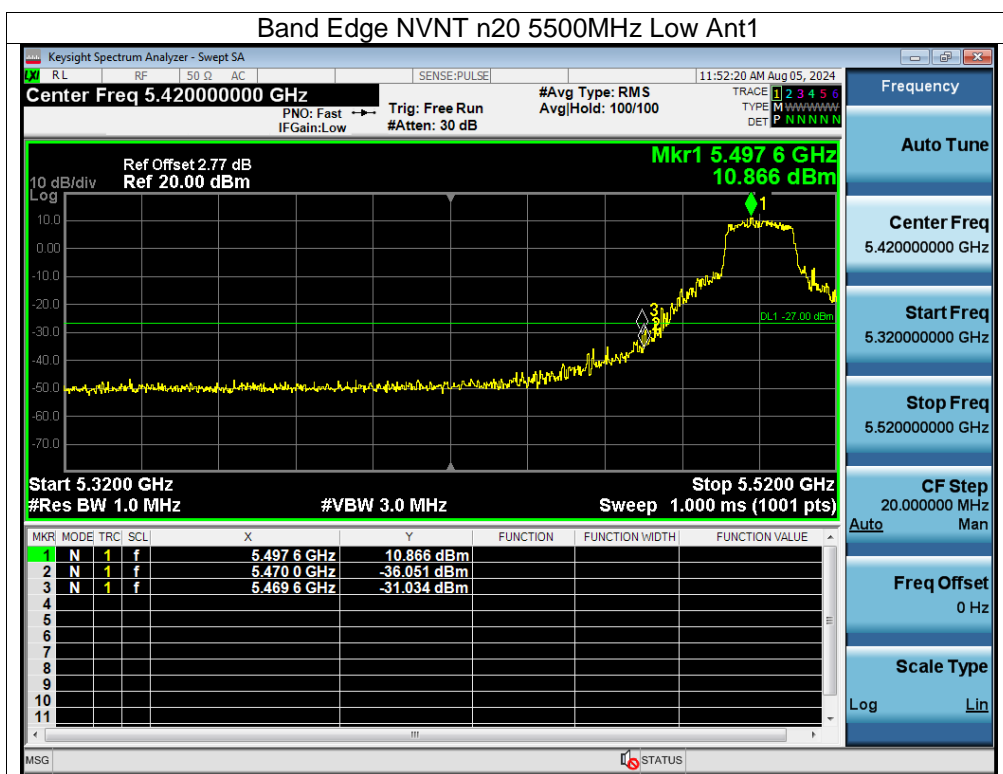


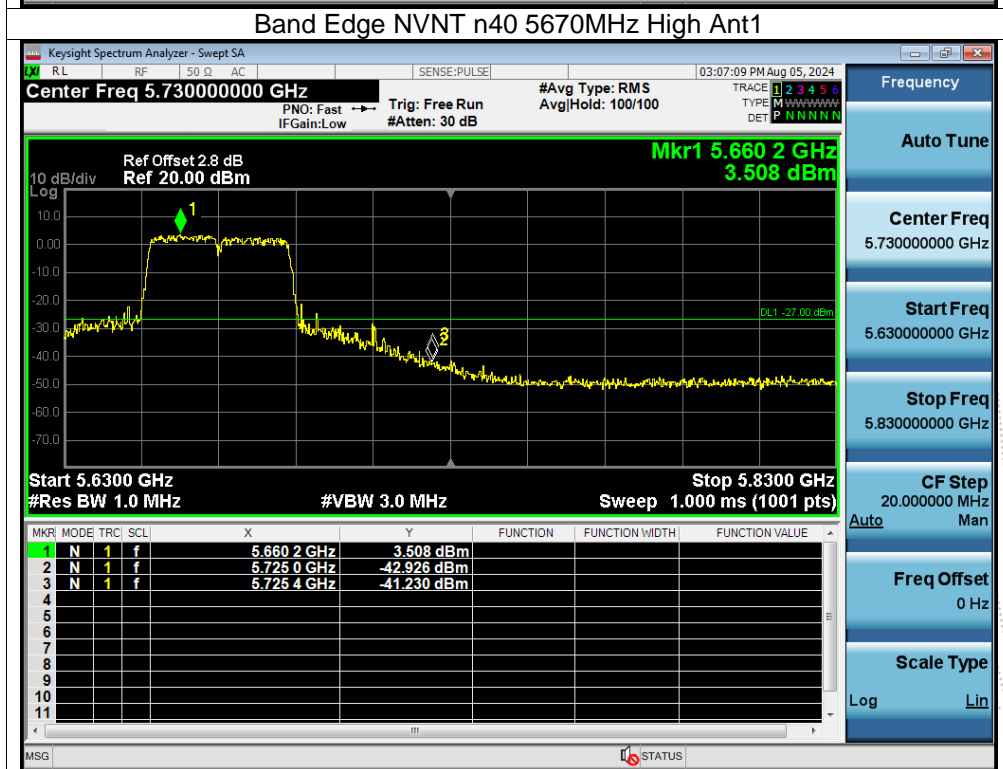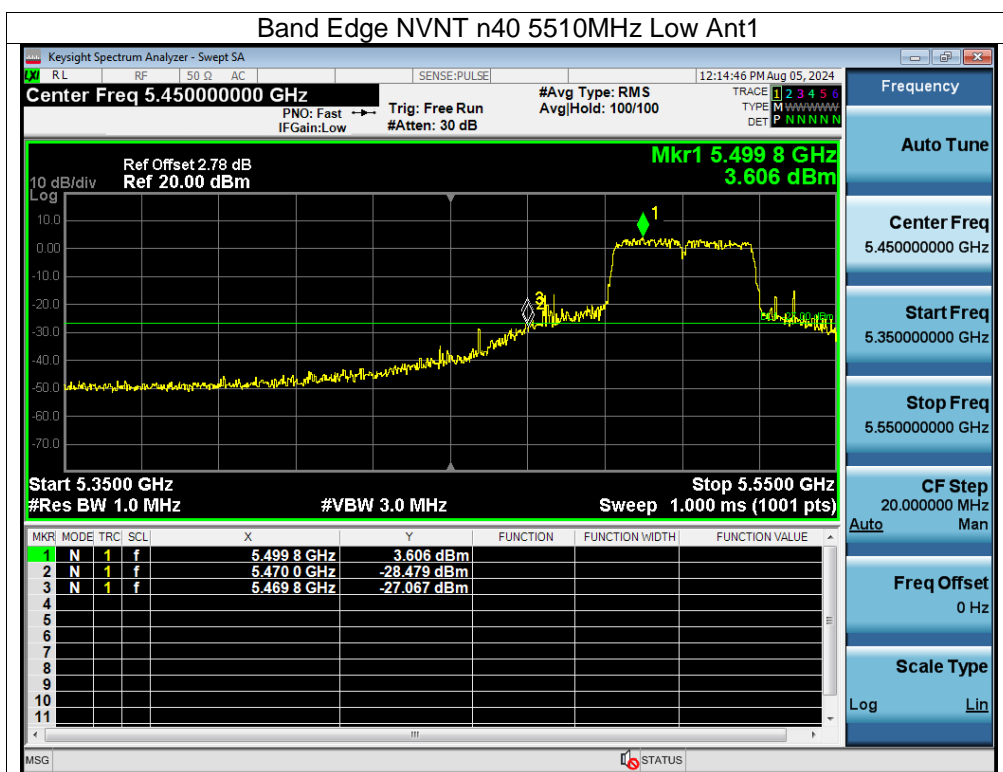


Test Mode: 5745-5825MHz



Test Graphs



Band Edge NVNT a 5745MHz Low Ant1

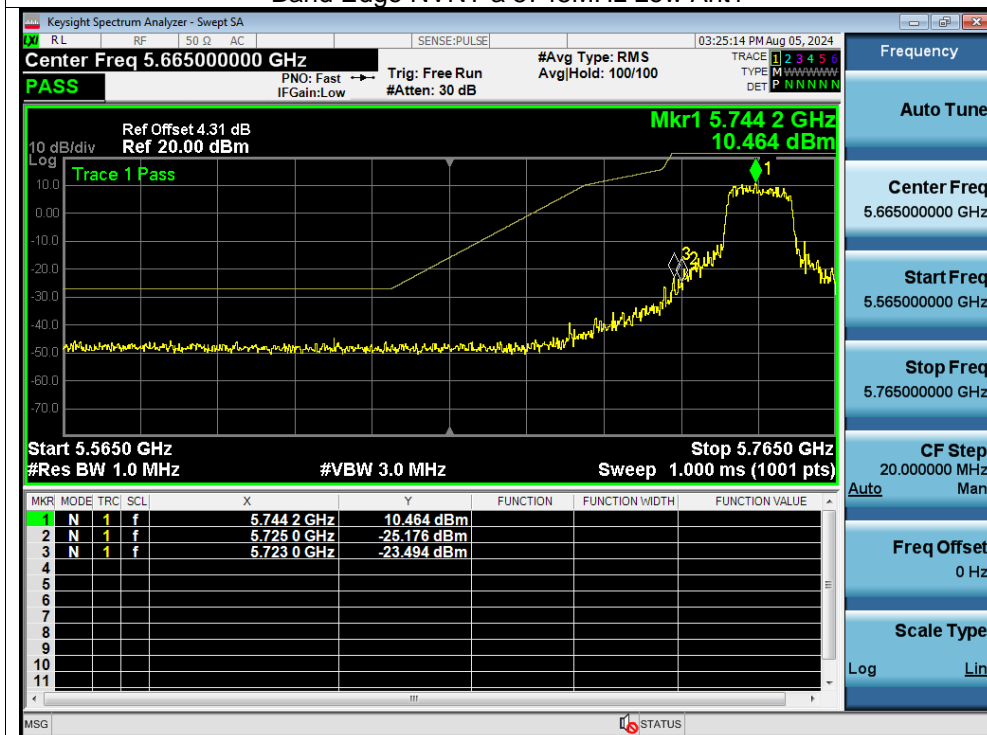

Band Edge NVNT a 5825MHz High Ant1

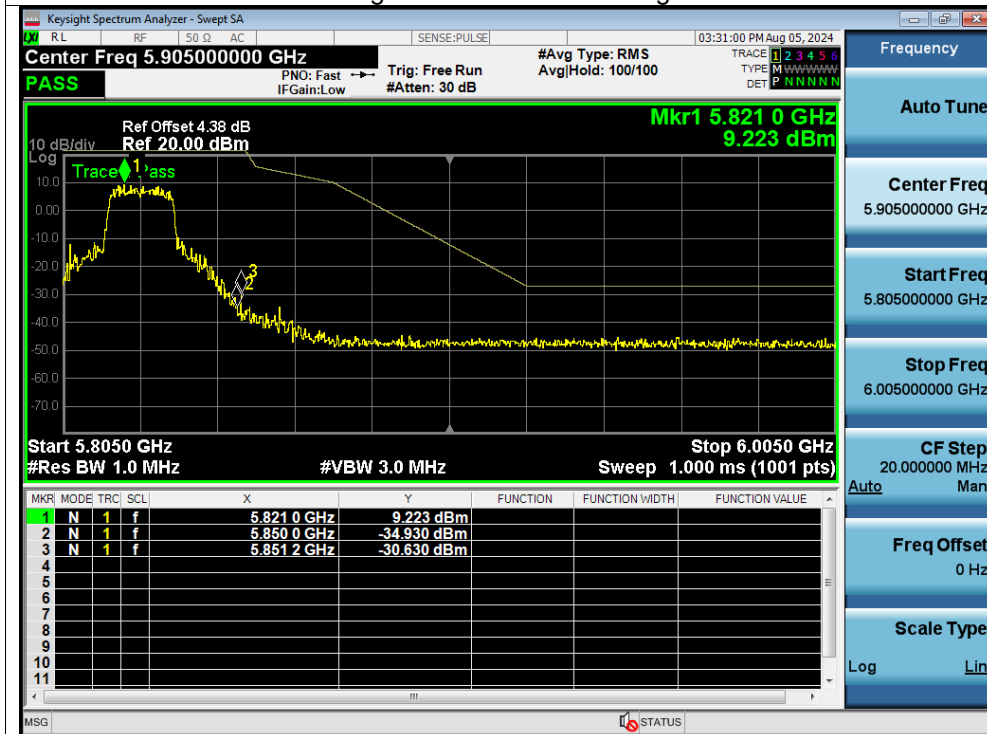

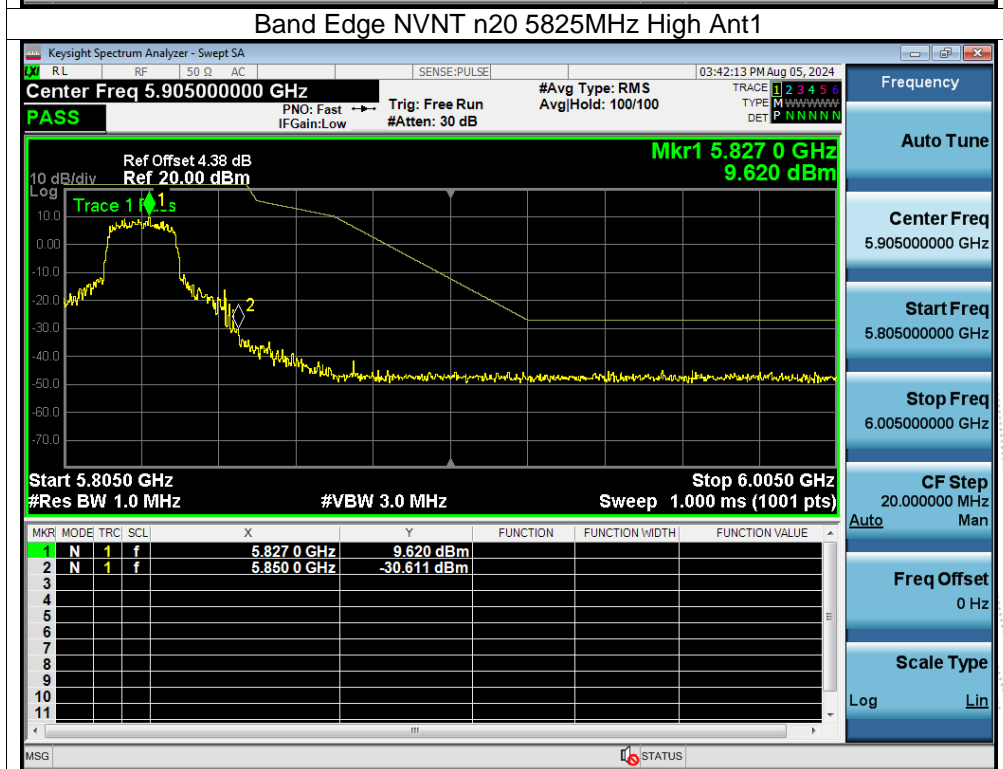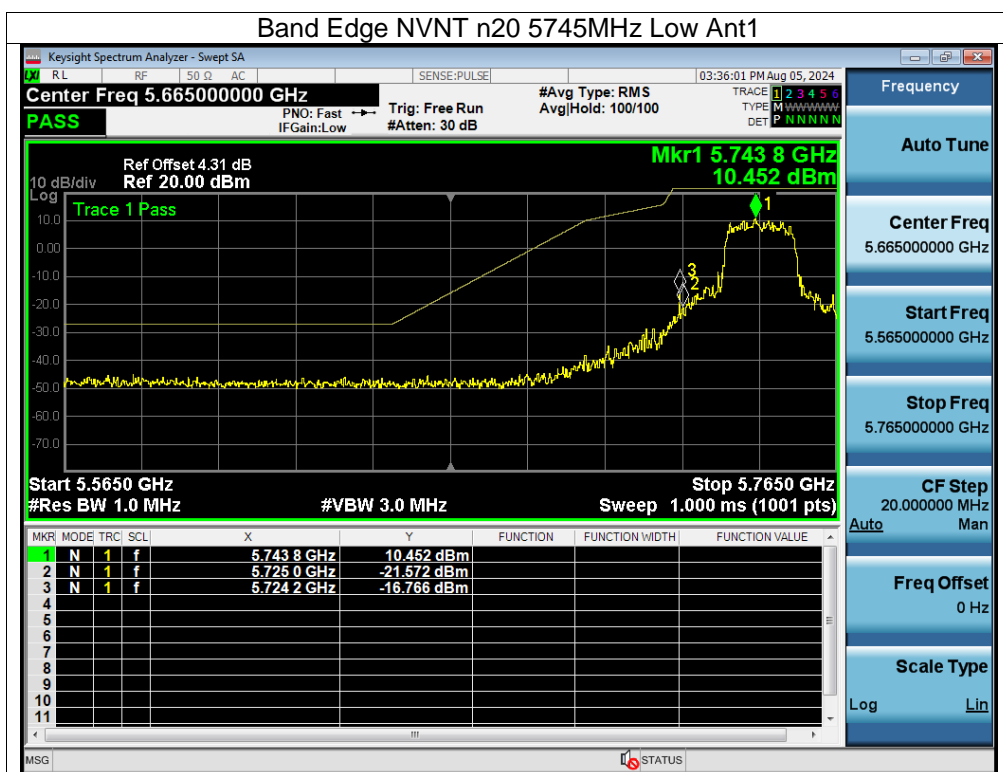

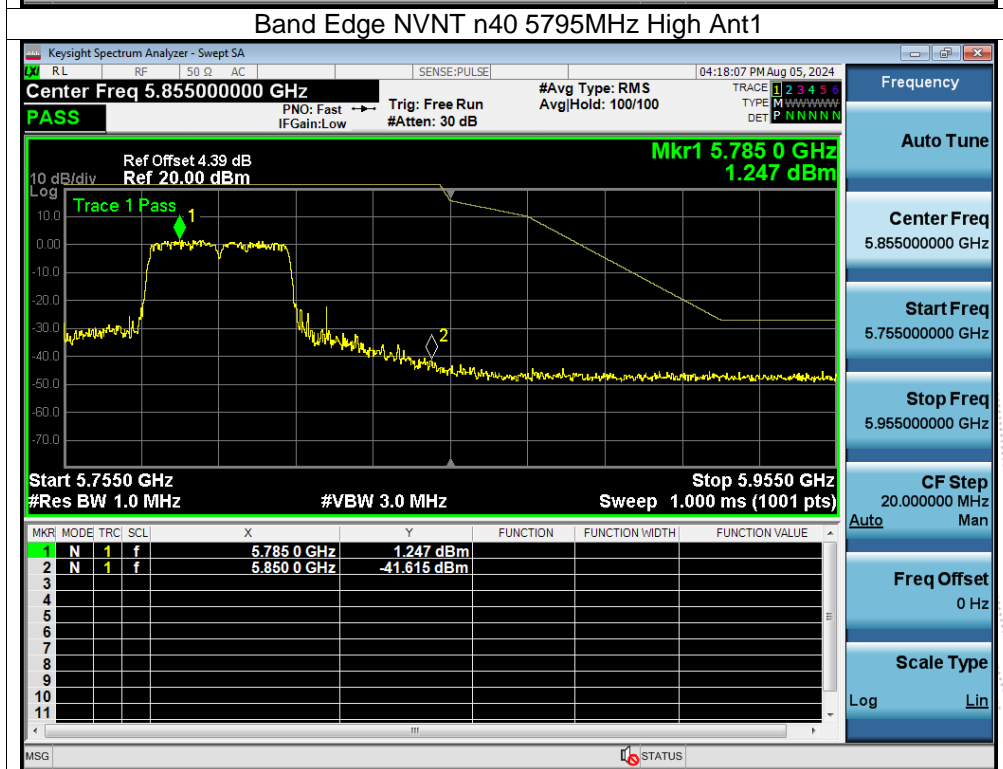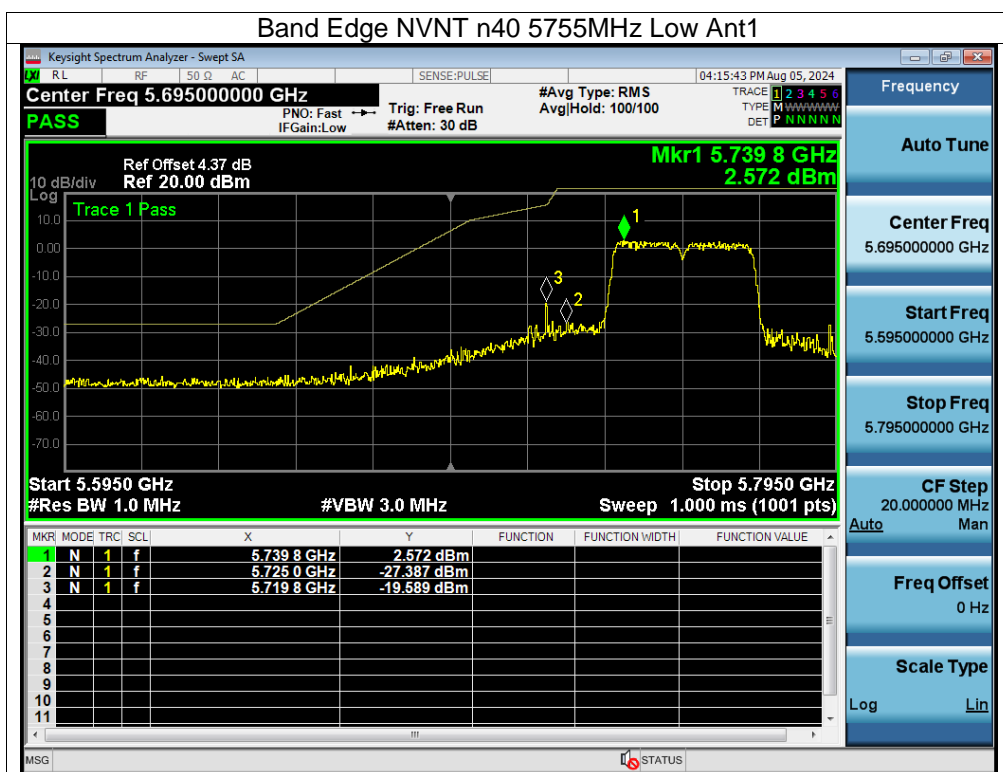

12. Spurious RF Conducted Emissions

12.1 Block Diagram Of Test Setup



12.2 Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge..

(3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

12.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

12.4 Test Result

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

About: 26.5GHz-40GHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Test Mode:	5180-5240MHz
------------	--------------

