


7. Band Edge

7.1. Test Setup

RF Radiated Measurement:

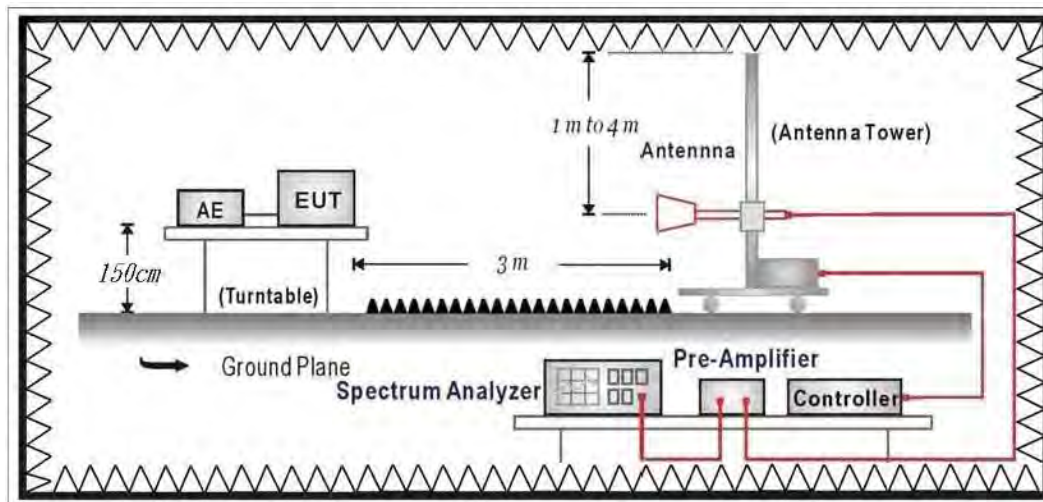

7.2. Limits

➤ General Radiated Emission Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section. Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

Remark:

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ **Unwanted Emission out of the restricted bands Limits**

FCC Part 15 Subpart E Paragraph 15.407(b) Limits		
Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength (dBuV/m@3m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
5725 - 5850	-27 (Note1)	68.3
	-17 (Note2)	78.3


4. For transmitters operating in the 5.725-5.85 GHz band

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the

band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2019 with antenna gain greater than 10 dBi may demonstrate

compliance with the emission limits in Section 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in Section 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

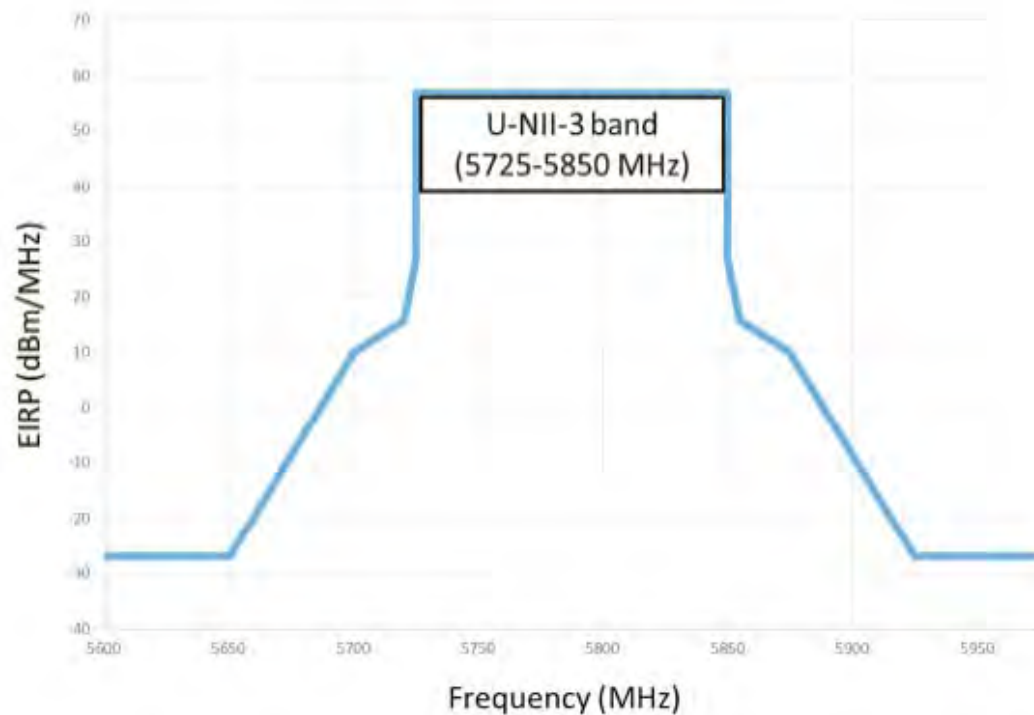

Remark:

1. For frequencies more than 10 MHz above or below the band edges.
2. For frequency range from the band edges to 10 MHz above or below the band edges.

$$3. \quad \mu\text{V/m} = \frac{1000000 \sqrt{30 \times EIRP}}{3}, \quad \text{RF Voltage (dBuV/m)} = 20 \log \text{RF Voltage (}\mu\text{V/m)}$$

7.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.


The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 KHz, above 1GHz are 1 MHz.

7.4. Test Result

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 36,5.18G,BW20M	Humidity (%RH)	57.0

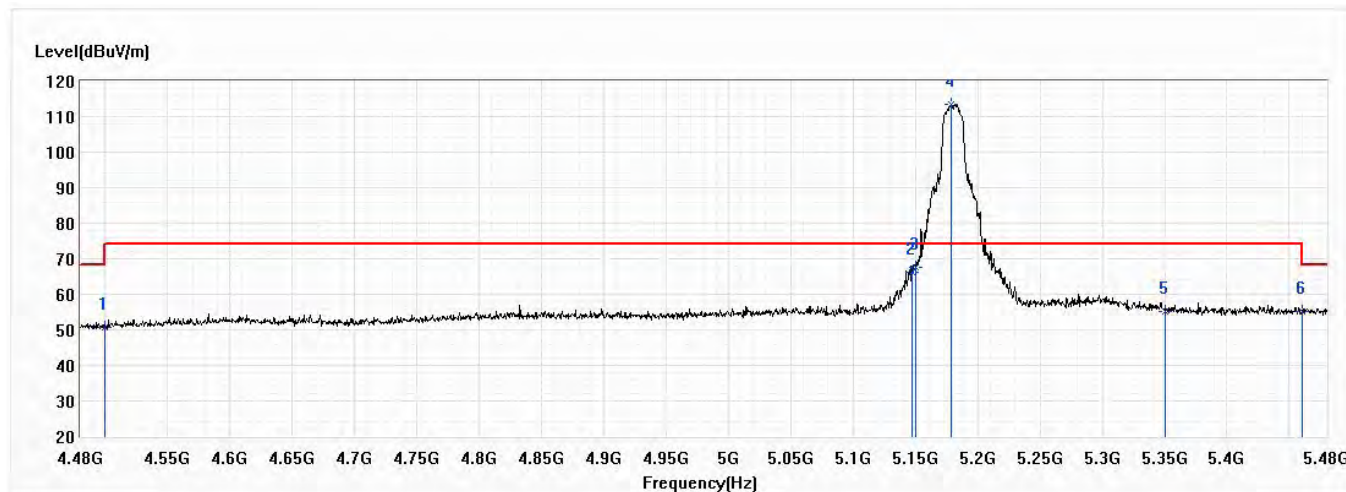


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.68	74.00	-23.32	30.44	20.24	PK
2	5147.000	66.36	74.00	-7.64	43.85	22.51	PK
3	5150.000	67.54	74.00	-6.46	45.03	22.51	PK
! 4	5179.000	113.53	74.00	39.53	90.99	22.54	PK
5	5350.000	55.12	74.00	-18.88	32.42	22.70	PK
6	5460.000	55.08	74.00	-18.92	32.27	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 36,5.18G,BW20M	Humidity (%RH)	57.0

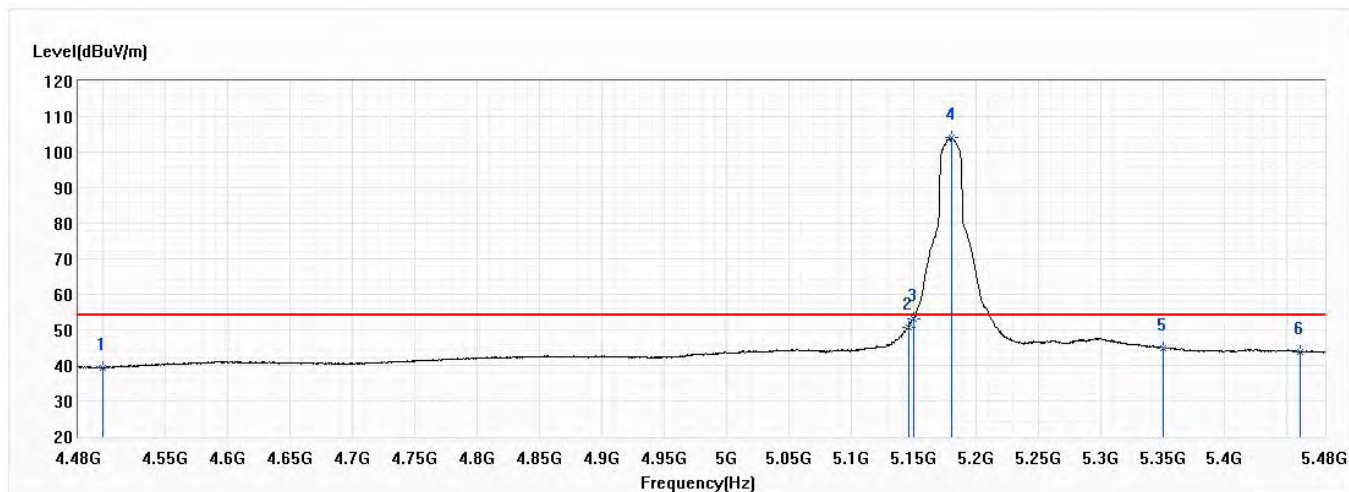


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.38	54.00	-14.62	19.14	20.24	AV
2	5146.000	50.86	54.00	-3.14	28.35	22.51	AV
3	5150.000	53.09	54.00	-0.91	30.58	22.51	AV
! 4	5181.000	104.11	54.00	50.11	81.57	22.54	AV
5	5350.000	44.94	54.00	-9.06	22.24	22.70	AV
6	5460.000	43.85	54.00	-10.15	21.04	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 36,5.18G,BW20M	Humidity (%RH)	57.0

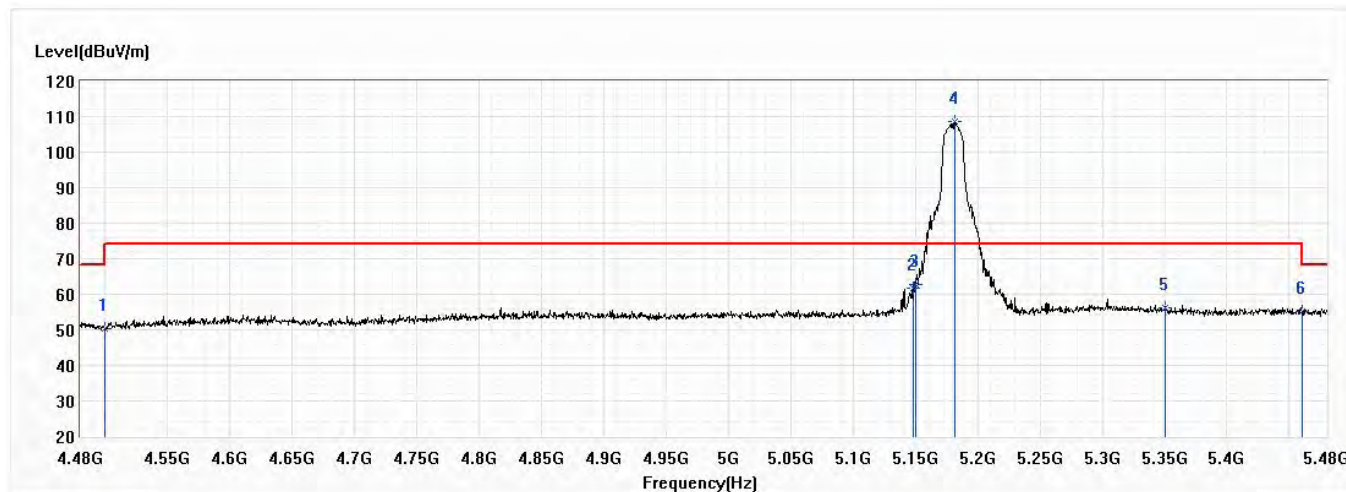


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.47	74.00	-23.53	30.23	20.24	PK
2	5148.500	61.89	74.00	-12.11	39.38	22.51	PK
3	5150.000	62.61	74.00	-11.39	40.10	22.51	PK
! 4	5182.000	108.60	74.00	34.60	86.06	22.54	PK
5	5350.000	56.06	74.00	-17.94	33.36	22.70	PK
6	5460.000	55.27	74.00	-18.73	32.46	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 36,5.18G,BW20M	Humidity (%RH)	57.0

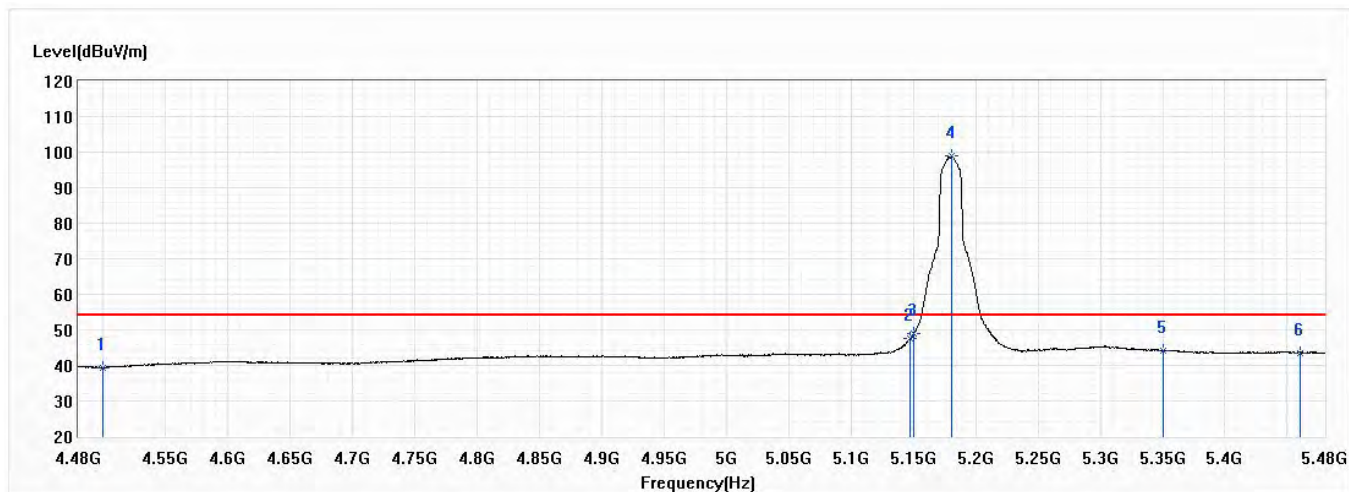


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.46	54.00	-14.54	19.22	20.24	AV
2	5147.500	47.51	54.00	-6.49	25.00	22.51	AV
3	5150.000	48.87	54.00	-5.13	26.36	22.51	AV
! 4	5181.000	98.80	54.00	44.80	76.26	22.54	AV
5	5350.000	44.14	54.00	-9.86	21.44	22.70	AV
6	5460.000	43.53	54.00	-10.47	20.72	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 44,5.22G,BW20M	Humidity (%RH)	57.0

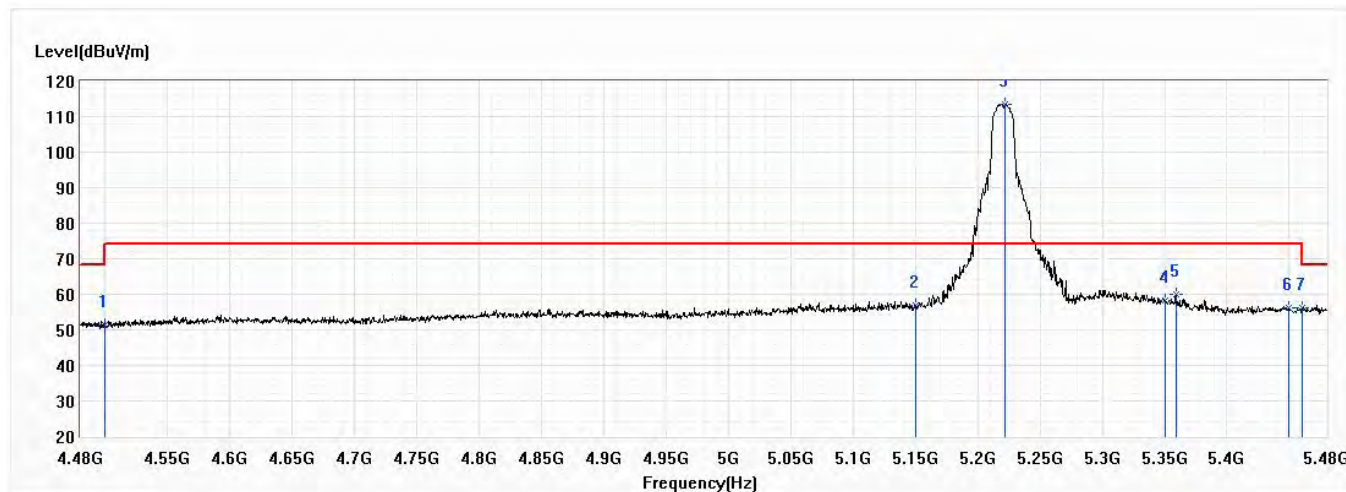


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.21	74.00	-22.79	30.97	20.24	PK
2	5150.000	57.00	74.00	-17.00	34.49	22.51	PK
3	5222.000	113.58	74.00	39.58	91.00	22.58	PK
4	5350.000	58.19	74.00	-15.81	35.49	22.70	PK
5	5359.000	59.95	74.00	-14.05	37.24	22.71	PK
6	5450.000	56.28	74.00	-17.72	33.48	22.80	PK
7	5460.000	56.09	74.00	-17.91	33.28	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 44,5.22G,BW20M	Humidity (%RH)	57.0

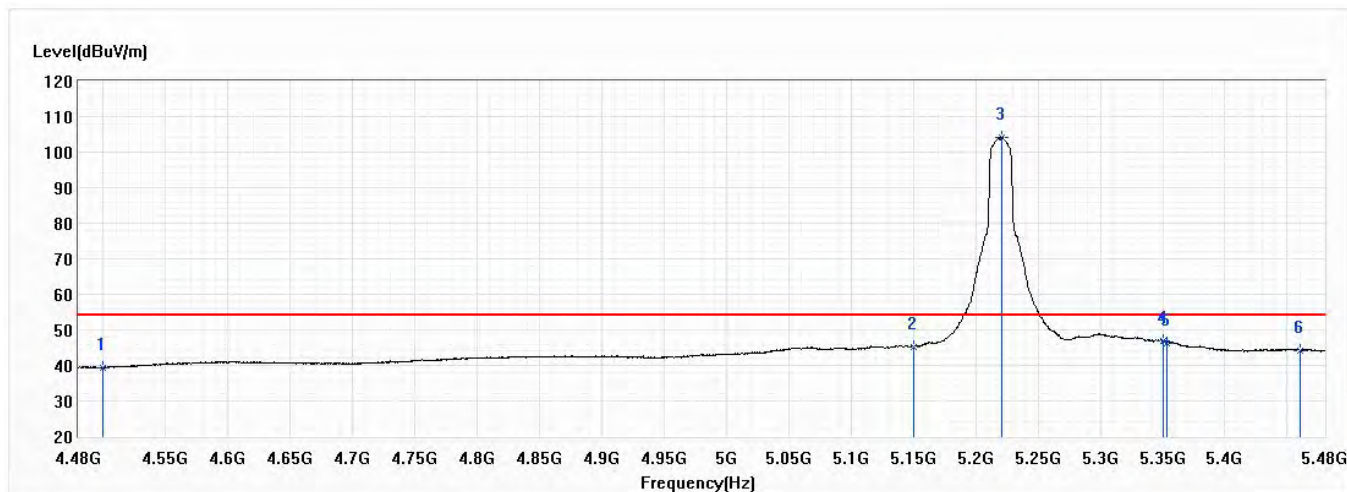


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.28	54.00	-14.72	19.04	20.24	AV
2	5150.000	45.28	54.00	-8.72	22.77	22.51	AV
! 3	5221.000	104.20	54.00	50.20	81.62	22.58	AV
4	5350.000	47.00	54.00	-7.00	24.30	22.70	AV
5	5353.500	46.37	54.00	-7.63	23.67	22.70	AV
6	5460.000	44.29	54.00	-9.71	21.48	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a, Ch 44, 5.22G, BW20M	Humidity (%RH)	57.0

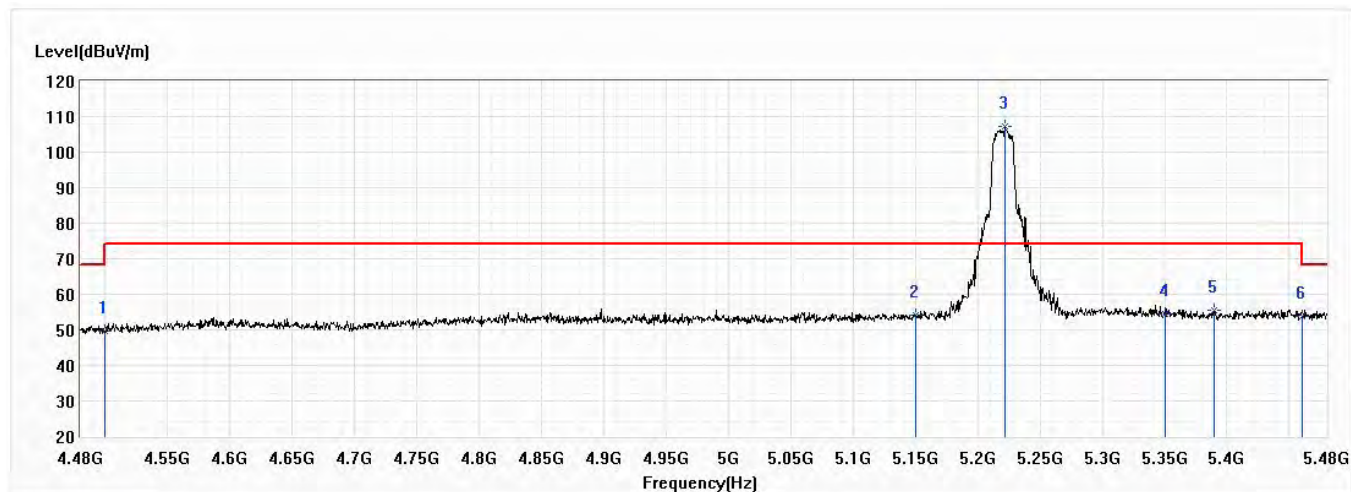


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.77	74.00	-24.23	29.53	20.24	PK
2	5150.000	54.23	74.00	-19.77	31.72	22.51	PK
! 3	5221.500	107.17	74.00	33.17	84.59	22.58	PK
4	5350.000	54.50	74.00	-19.50	31.80	22.70	PK
5	5389.500	55.45	74.00	-18.55	32.71	22.74	PK
6	5460.000	53.88	74.00	-20.12	31.07	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 44,5.22G,BW20M	Humidity (%RH)	57.0

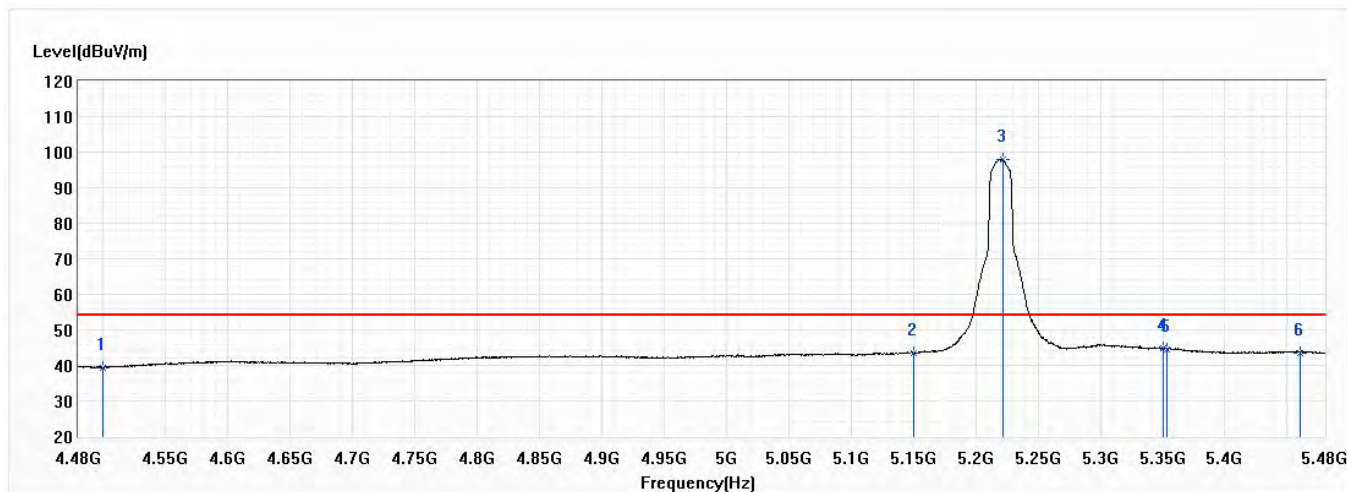


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.42	54.00	-14.58	19.18	20.24	AV
2	5150.000	43.54	54.00	-10.46	21.03	22.51	AV
! 3	5221.500	98.07	54.00	44.07	75.49	22.58	AV
4	5350.000	44.76	54.00	-9.24	22.06	22.70	AV
5	5353.500	44.62	54.00	-9.38	21.92	22.70	AV
6	5460.000	43.62	54.00	-10.38	20.81	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 48,5.24G,BW20M	Humidity (%RH)	57.0

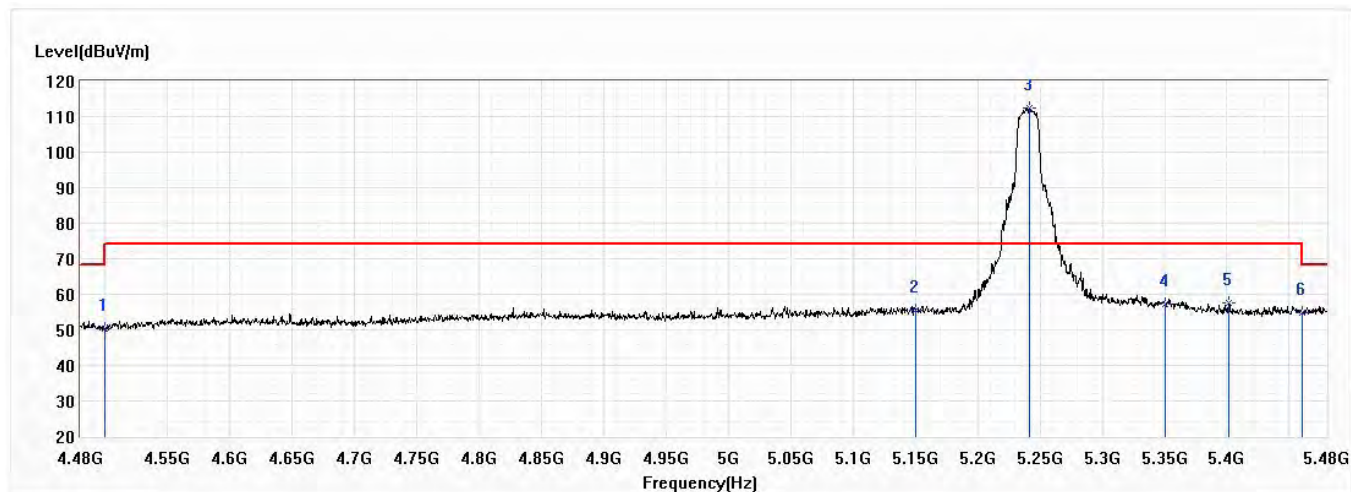


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.27	74.00	-23.73	30.03	20.24	PK
2	5150.000	55.67	74.00	-18.33	33.16	22.51	PK
! 3	5242.000	112.38	74.00	38.38	89.78	22.60	PK
4	5350.000	57.19	74.00	-16.81	34.49	22.70	PK
5	5401.500	57.72	74.00	-16.28	34.97	22.75	PK
6	5460.000	54.91	74.00	-19.09	32.10	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 48,5.24G,BW20M	Humidity (%RH)	57.0

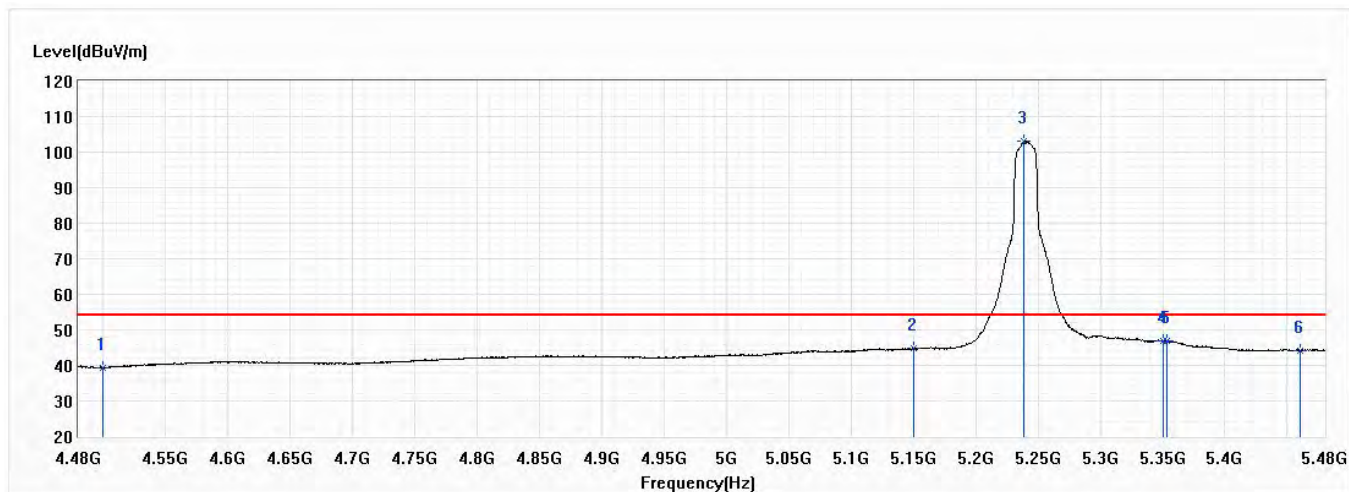


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.39	54.00	-14.61	19.15	20.24	AV
2	5150.000	44.70	54.00	-9.30	22.19	22.51	AV
! 3	5239.000	103.22	54.00	49.22	80.63	22.59	AV
4	5350.000	46.94	54.00	-7.06	24.24	22.70	AV
5	5353.500	46.91	54.00	-7.09	24.21	22.70	AV
6	5460.000	44.14	54.00	-9.86	21.33	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 48,5.24G,BW20M	Humidity (%RH)	57.0

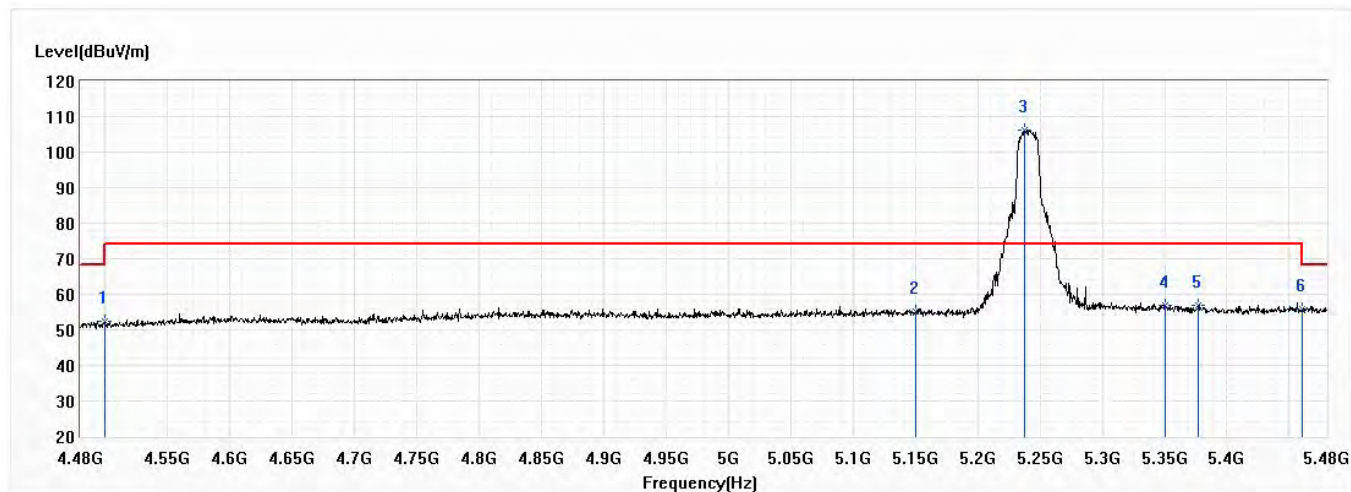


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.54	74.00	-21.46	32.30	20.24	PK
2	5150.000	55.20	74.00	-18.80	32.69	22.51	PK
3	5238.000	106.36	74.00	32.36	83.77	22.59	PK
4	5350.000	56.76	74.00	-17.24	34.06	22.70	PK
5	5377.000	56.85	74.00	-17.15	34.12	22.73	PK
6	5460.000	55.80	74.00	-18.20	32.99	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 48,5.24G,BW20M	Humidity (%RH)	57.0

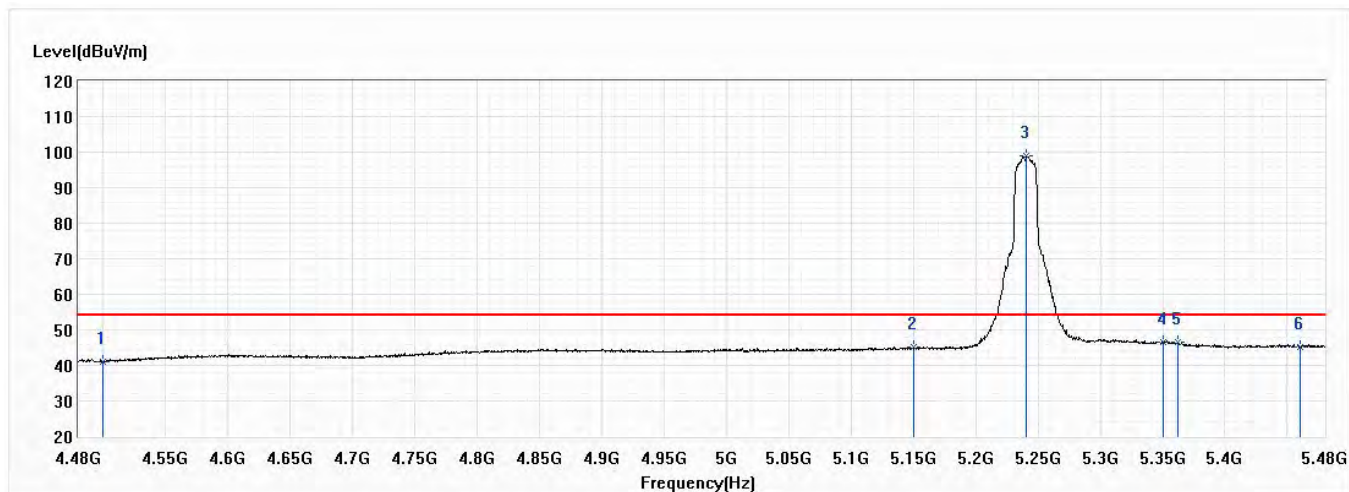


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	41.02	54.00	-12.98	20.78	20.24	AV
2	5150.000	45.05	54.00	-8.95	22.54	22.51	AV
! 3	5241.000	98.81	54.00	44.81	76.21	22.60	AV
4	5350.000	46.42	54.00	-7.58	23.72	22.70	AV
5	5362.500	46.39	54.00	-7.61	23.68	22.71	AV
6	5460.000	45.23	54.00	-8.77	22.42	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/27
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 36,5.18G,BW20M	Humidity (%RH)	57.0

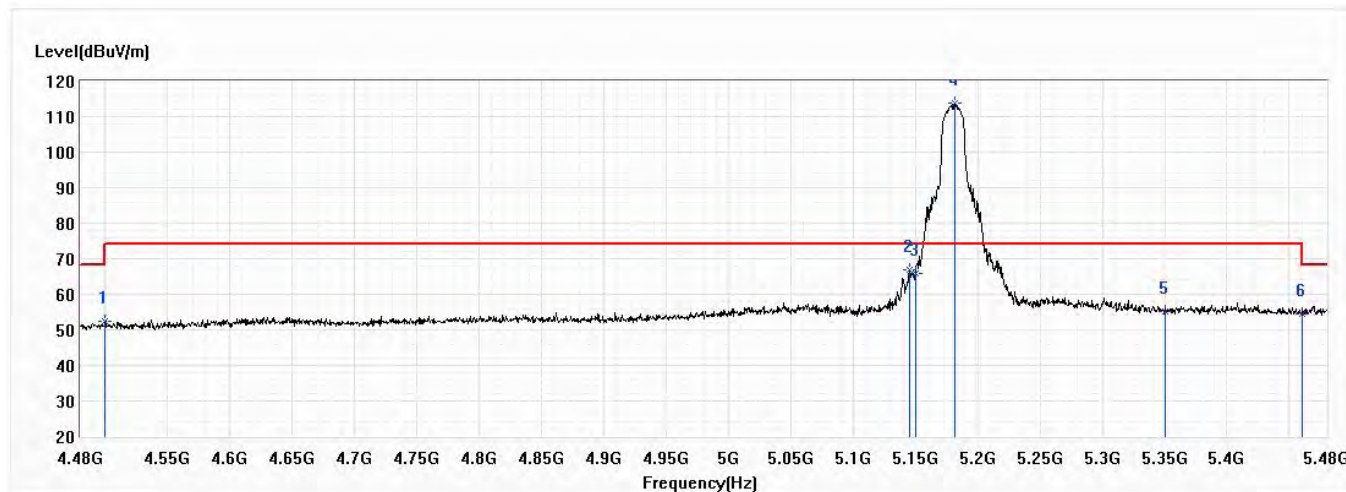


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.35	74.00	-21.65	32.11	20.24	PK
2	5145.500	67.04	74.00	-6.96	44.53	22.51	PK
3	5150.000	65.99	74.00	-8.01	43.48	22.51	PK
! 4	5181.500	113.95	74.00	39.95	91.41	22.54	PK
5	5350.000	55.10	74.00	-18.90	32.40	22.70	PK
6	5460.000	54.64	74.00	-19.36	31.83	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/27
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 36,5.18G,BW20M	Humidity (%RH)	57.0

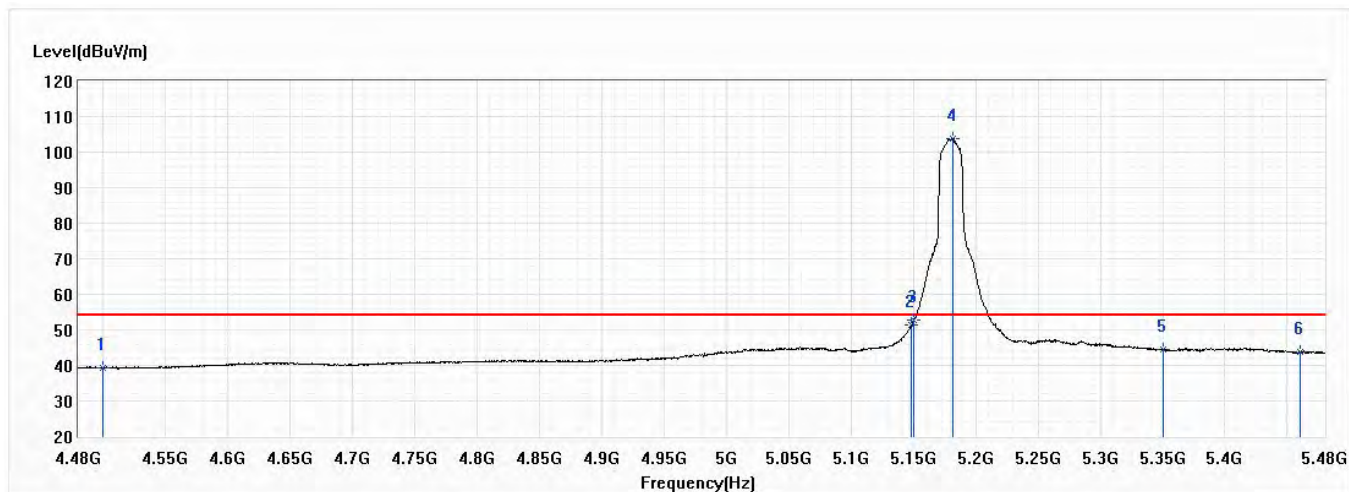


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.28	54.00	-14.72	19.04	20.24	AV
2	5148.500	51.23	54.00	-2.77	28.72	22.51	AV
3	5150.000	52.73	54.00	-1.27	30.22	22.51	AV
! 4	5181.500	103.75	54.00	49.75	81.21	22.54	AV
5	5350.000	44.53	54.00	-9.47	21.83	22.70	AV
6	5460.000	43.66	54.00	-10.34	20.85	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/27
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 36,5.18G,BW20M	Humidity (%RH)	57.0

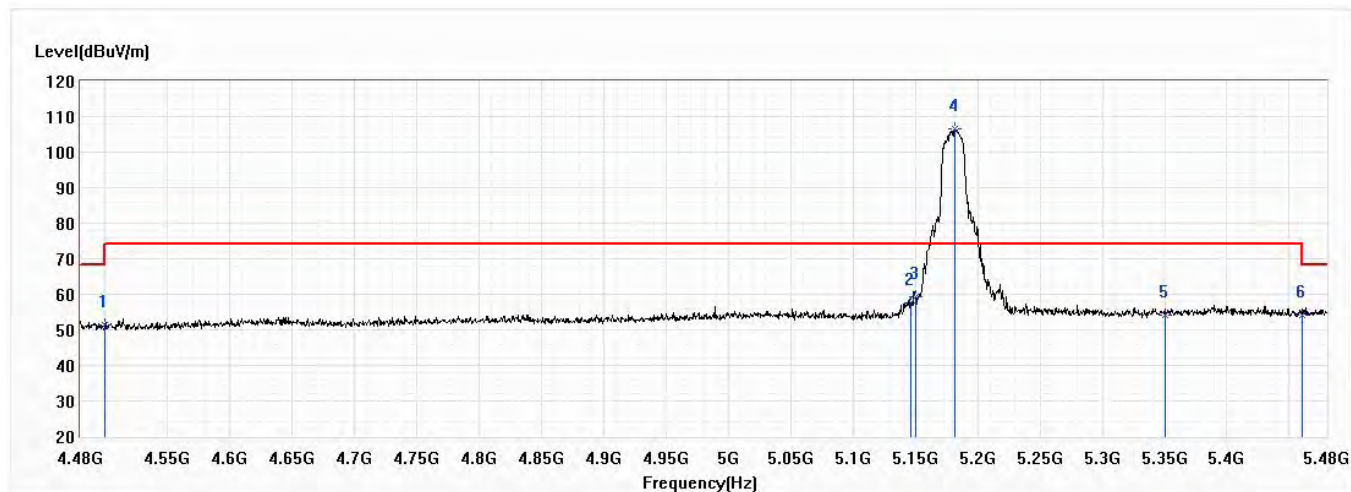


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.37	74.00	-22.63	31.13	20.24	PK
2	5146.500	57.48	74.00	-16.52	34.97	22.51	PK
3	5150.000	59.33	74.00	-14.67	36.82	22.51	PK
! 4	5181.500	106.60	74.00	32.60	84.06	22.54	PK
5	5350.000	54.21	74.00	-19.79	31.51	22.70	PK
6	5460.000	54.23	74.00	-19.77	31.42	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/27
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 36,5.18G,BW20M	Humidity (%RH)	57.0

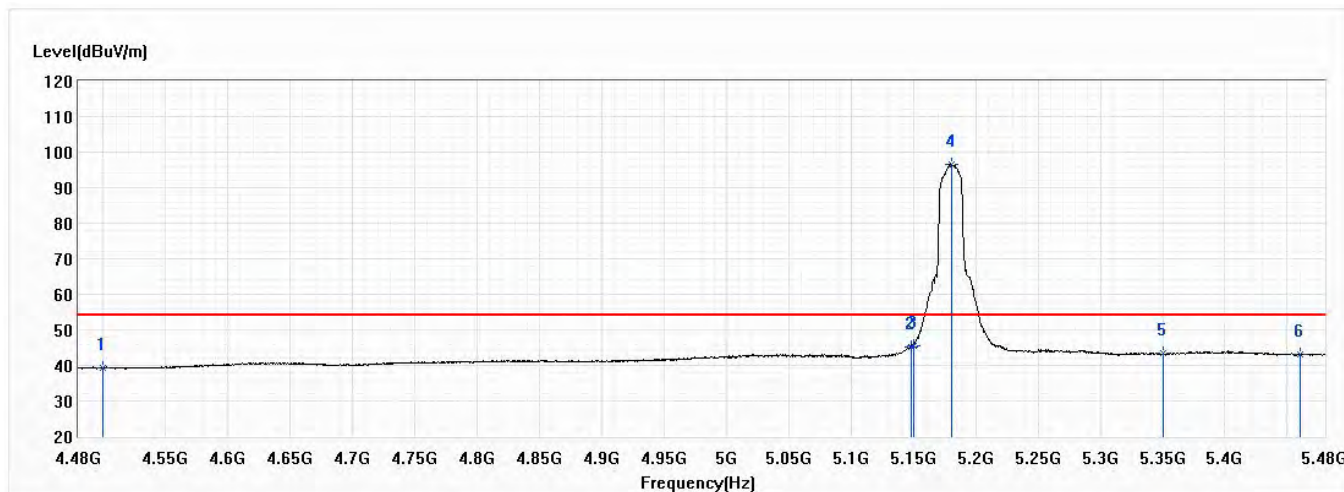


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.18	54.00	-14.82	18.94	20.24	AV
2	5148.000	45.15	54.00	-8.85	22.64	22.51	AV
3	5150.000	45.68	54.00	-8.32	23.17	22.51	AV
! 4	5181.000	96.44	54.00	42.44	73.90	22.54	AV
5	5350.000	43.30	54.00	-10.70	20.60	22.70	AV
6	5460.000	43.24	54.00	-10.76	20.43	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/27
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 44,5.22G,BW20M	Humidity (%RH)	57.0

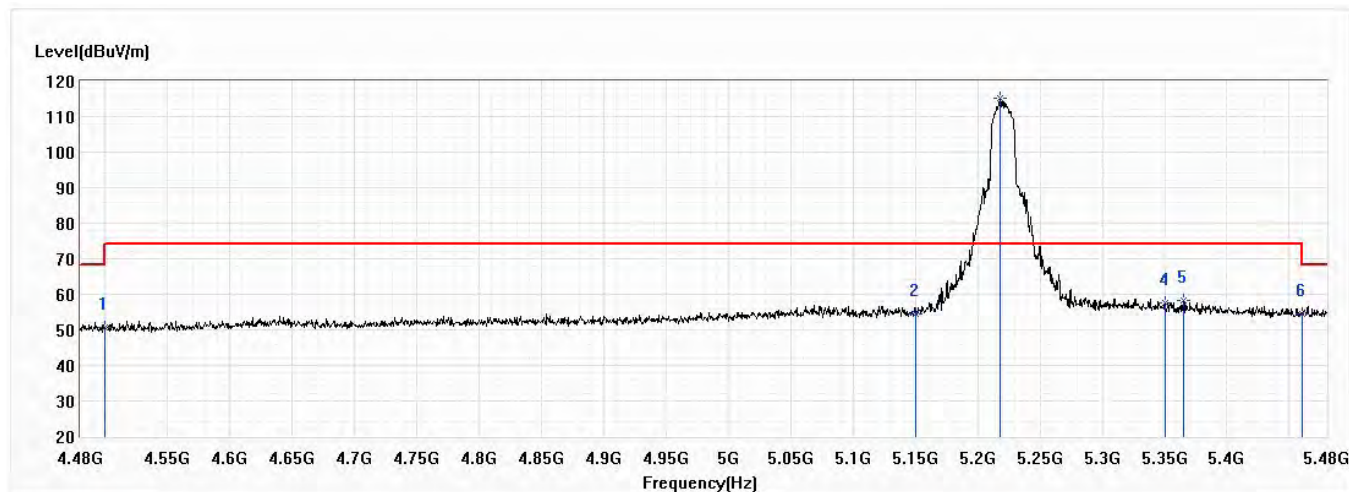


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.59	74.00	-23.41	30.35	20.24	PK
2	5150.000	54.42	74.00	-19.58	31.91	22.51	PK
3	5217.500	115.01	74.00	41.01	92.44	22.57	PK
4	5350.000	57.44	74.00	-16.56	34.74	22.70	PK
5	5365.500	58.16	74.00	-15.84	35.44	22.72	PK
6	5460.000	54.49	74.00	-19.51	31.68	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/27
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 44,5.22G,BW20M	Humidity (%RH)	57.0

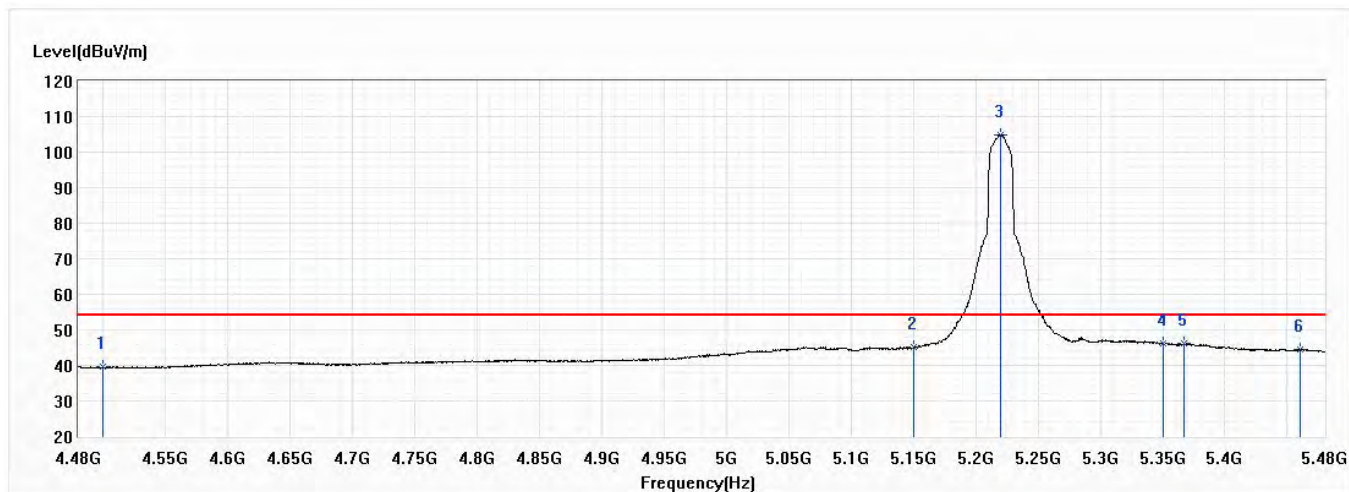


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.57	54.00	-14.43	19.33	20.24	AV
2	5150.000	45.27	54.00	-8.73	22.76	22.51	AV
! 3	5219.500	104.79	54.00	50.79	82.21	22.58	AV
4	5350.000	46.06	54.00	-7.94	23.36	22.70	AV
5	5367.000	46.14	54.00	-7.86	23.42	22.72	AV
6	5460.000	44.49	54.00	-9.51	21.68	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/27
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 44,5.22G,BW20M	Humidity (%RH)	57.0

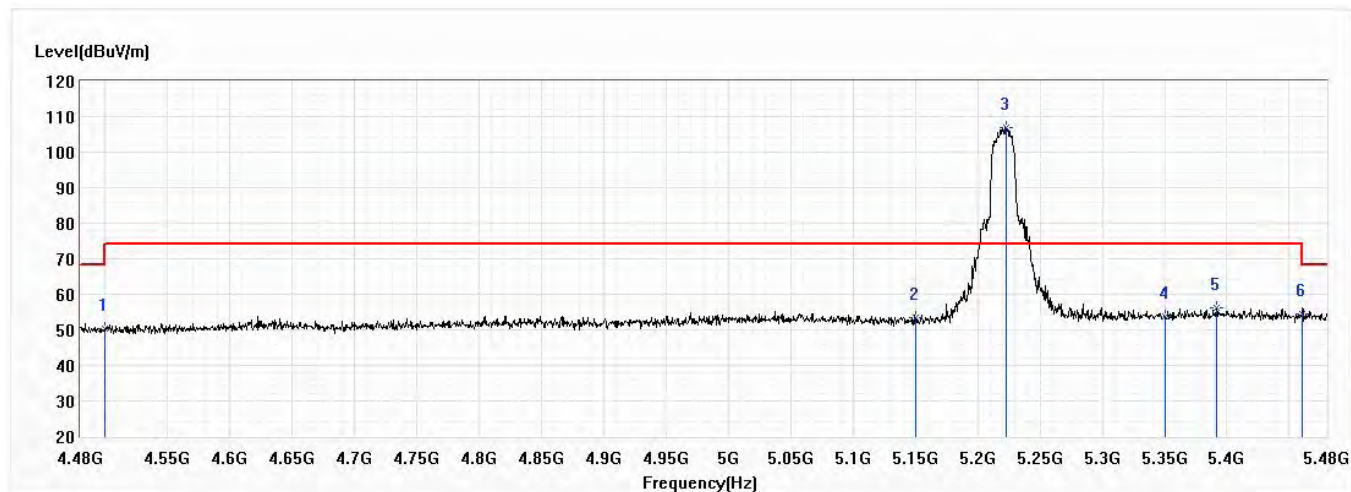


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.35	74.00	-23.65	30.11	20.24	PK
2	5150.000	53.56	74.00	-20.44	31.05	22.51	PK
! 3	5223.000	106.84	74.00	32.84	84.26	22.58	PK
4	5350.000	53.89	74.00	-20.11	31.19	22.70	PK
5	5391.500	56.17	74.00	-17.83	33.43	22.74	PK
6	5460.000	54.55	74.00	-19.45	31.74	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/27
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 44,5.22G,BW20M	Humidity (%RH)	57.0

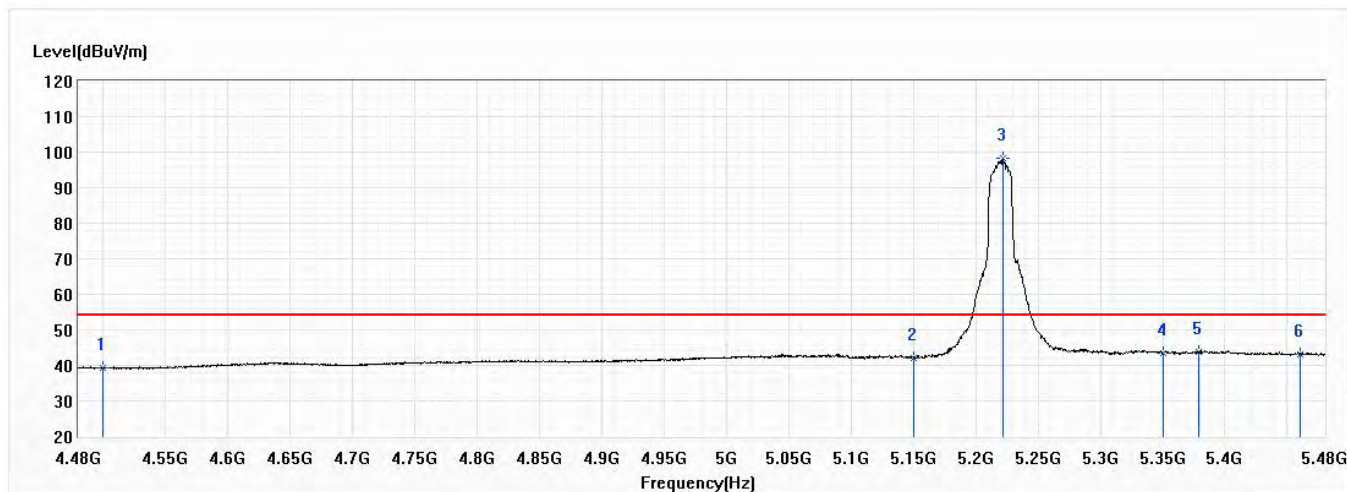


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.19	54.00	-14.81	18.95	20.24	AV
2	5150.000	42.24	54.00	-11.76	19.73	22.51	AV
! 3	5221.500	98.15	54.00	44.15	75.57	22.58	AV
4	5350.000	43.53	54.00	-10.47	20.83	22.70	AV
5	5378.500	43.95	54.00	-10.05	21.22	22.73	AV
6	5460.000	43.01	54.00	-10.99	20.20	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/27
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 48,5.24G,BW20M	Humidity (%RH)	57.0

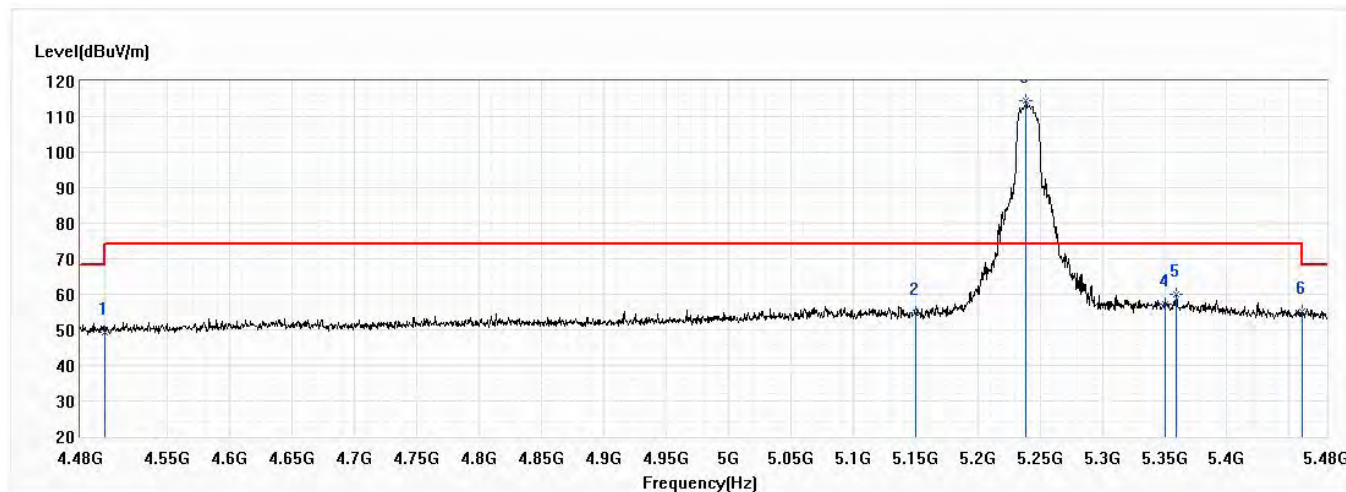


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.17	74.00	-24.83	28.93	20.24	PK
2	5150.000	54.92	74.00	-19.08	32.41	22.51	PK
! 3	5239.000	114.47	74.00	40.47	91.88	22.59	PK
4	5350.000	57.16	74.00	-16.84	34.46	22.70	PK
5	5359.500	59.97	74.00	-14.03	37.26	22.71	PK
6	5460.000	55.21	74.00	-18.79	32.40	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/27
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 48,5.24G,BW20M	Humidity (%RH)	57.0

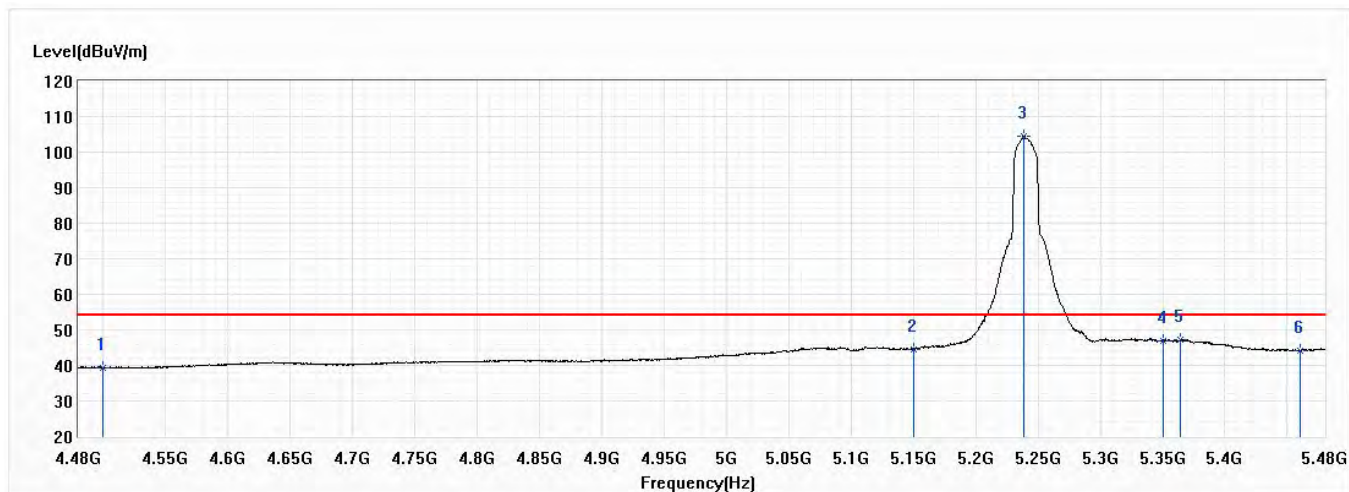


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.43	54.00	-14.57	19.19	20.24	AV
2	5150.000	44.60	54.00	-9.40	22.09	22.51	AV
! 3	5238.500	104.55	54.00	50.55	81.96	22.59	AV
4	5350.000	46.88	54.00	-7.12	24.18	22.70	AV
5	5364.000	47.21	54.00	-6.79	24.49	22.72	AV
6	5460.000	44.10	54.00	-9.90	21.29	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/27
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 48,5.24G,BW20M	Humidity (%RH)	57.0

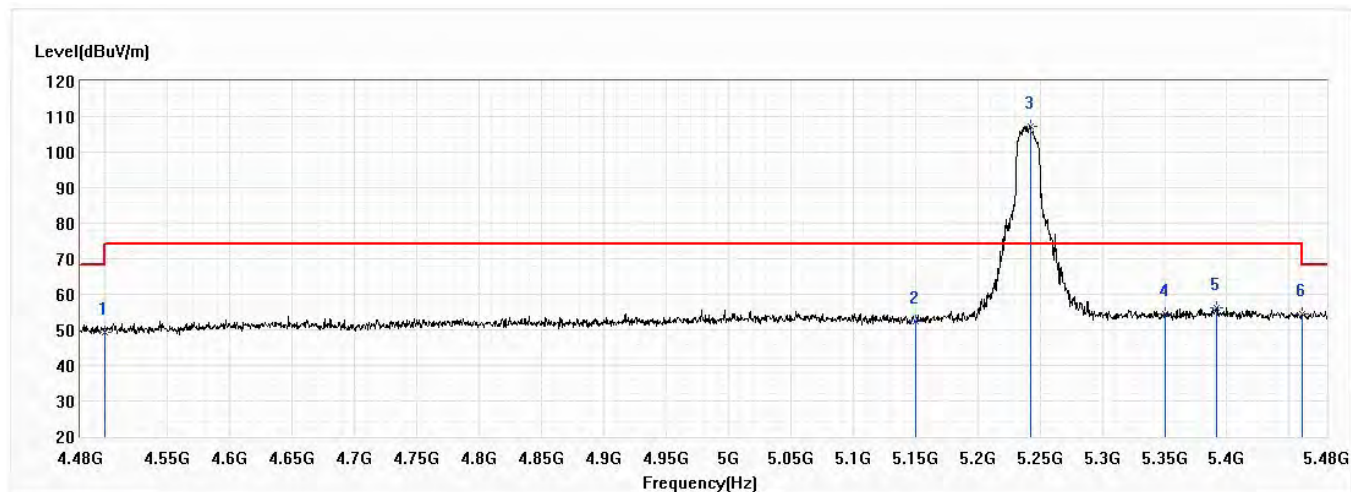


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.43	74.00	-24.57	29.19	20.24	PK
2	5150.000	52.37	74.00	-21.63	29.86	22.51	PK
! 3	5242.500	107.16	74.00	33.16	84.56	22.60	PK
4	5350.000	54.44	74.00	-19.56	31.74	22.70	PK
5	5392.000	56.24	74.00	-17.76	33.49	22.75	PK
6	5460.000	54.59	74.00	-19.41	31.78	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/27
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 48,5.24G,BW20M	Humidity (%RH)	57.0

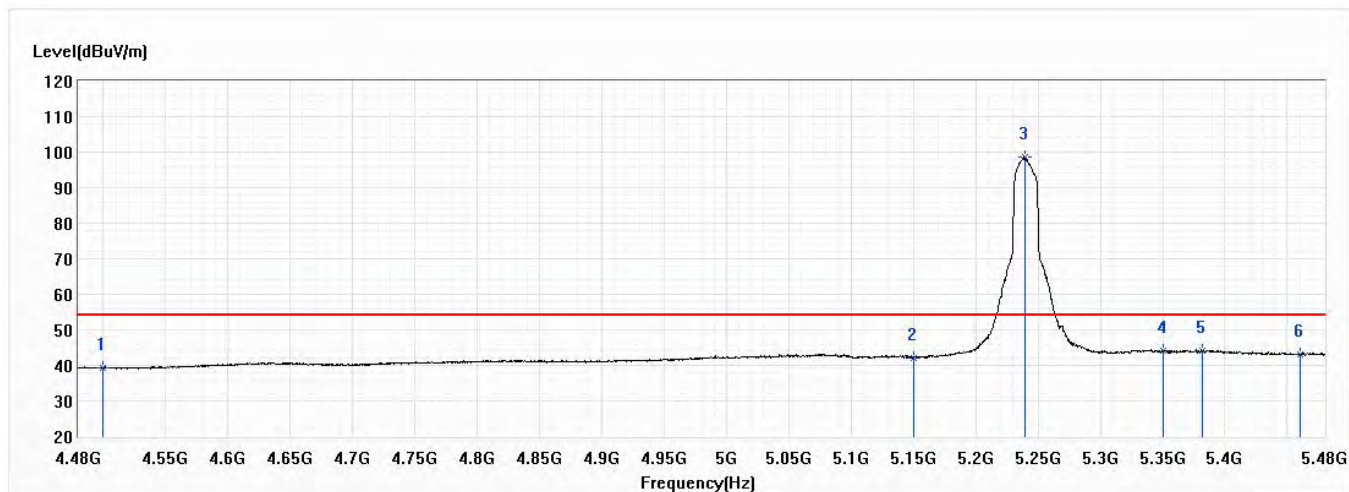


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.24	54.00	-14.76	19.00	20.24	AV
2	5150.000	42.09	54.00	-11.91	19.58	22.51	AV
! 3	5239.500	98.56	54.00	44.56	75.97	22.59	AV
4	5350.000	43.98	54.00	-10.02	21.28	22.70	AV
5	5382.000	44.15	54.00	-9.85	21.42	22.73	AV
6	5460.000	43.26	54.00	-10.74	20.45	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 38,5.19G,BW40M	Humidity (%RH)	57.0

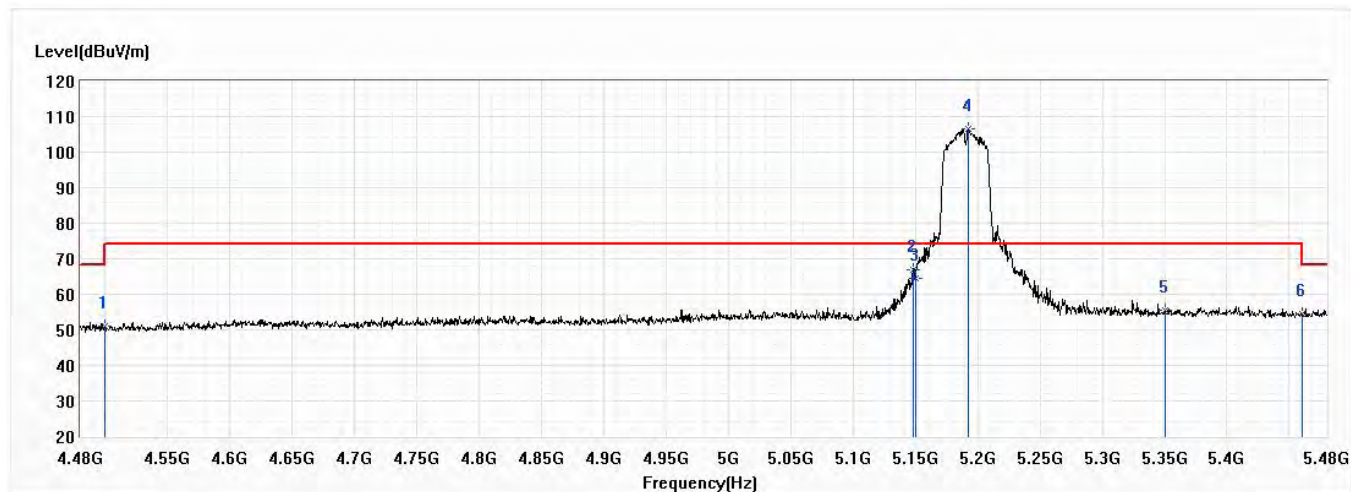


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.04	74.00	-22.96	30.80	20.24	PK
2	5148.000	67.00	74.00	-7.00	44.49	22.51	PK
3	5150.000	64.36	74.00	-9.64	41.85	22.51	PK
! 4	5192.000	106.55	74.00	32.55	84.00	22.55	PK
5	5350.000	55.55	74.00	-18.45	32.85	22.70	PK
6	5460.000	54.42	74.00	-19.58	31.61	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 38,5.19G,BW40M	Humidity (%RH)	57.0

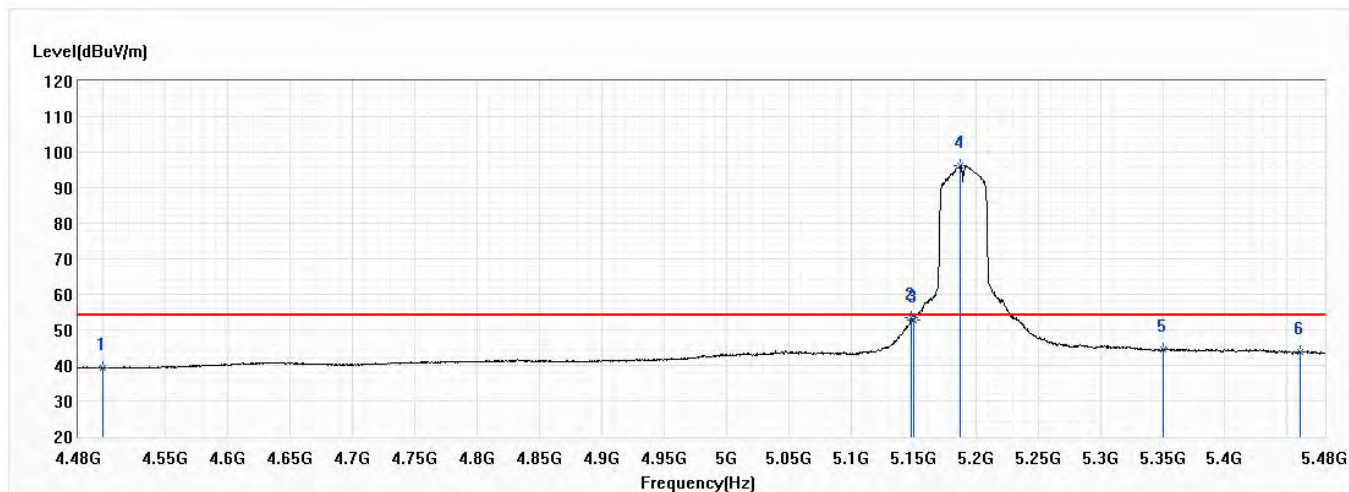


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.36	54.00	-14.64	19.12	20.24	AV
2	5148.000	53.35	54.00	-0.65	30.84	22.51	AV
3	5150.000	52.83	54.00	-1.17	30.32	22.51	AV
! 4	5188.000	96.22	54.00	42.22	73.67	22.55	AV
5	5350.000	44.49	54.00	-9.51	21.79	22.70	AV
6	5460.000	43.73	54.00	-10.27	20.92	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 38,5.19G,BW40M	Humidity (%RH)	57.0

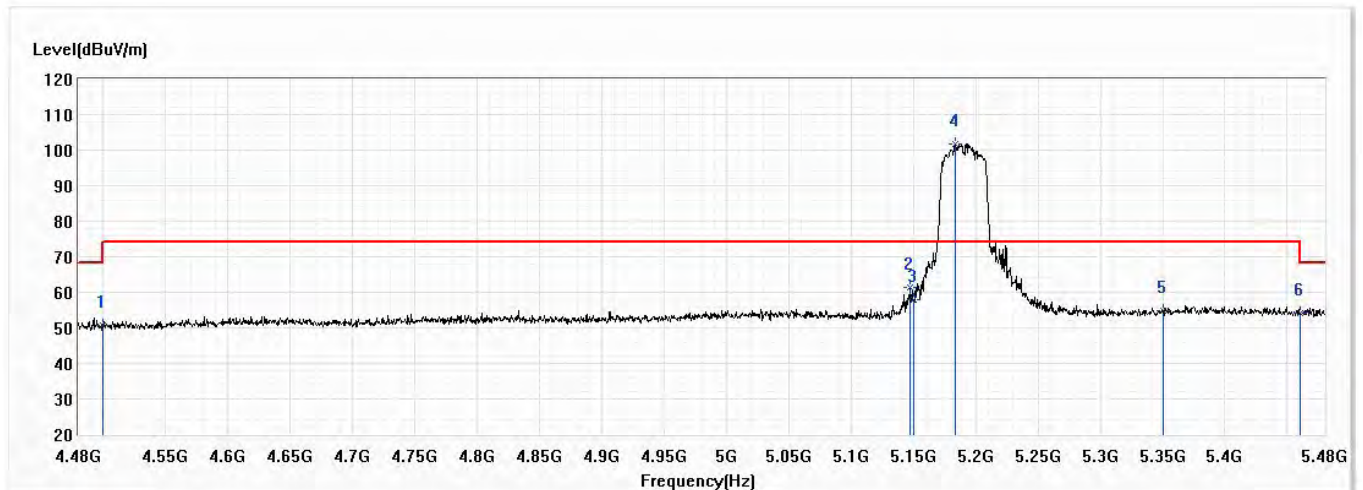


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.68	74.00	-23.32	30.44	20.24	PK
2	5147.500	61.21	74.00	-12.79	38.70	22.51	PK
3	5150.000	57.77	74.00	-16.23	35.26	22.51	PK
! 4	5184.000	101.73	74.00	27.73	79.19	22.54	PK
5	5350.000	54.68	74.00	-19.32	31.98	22.70	PK
6	5460.000	54.06	74.00	-19.94	31.25	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 38,5.19G,BW40M	Humidity (%RH)	57.0

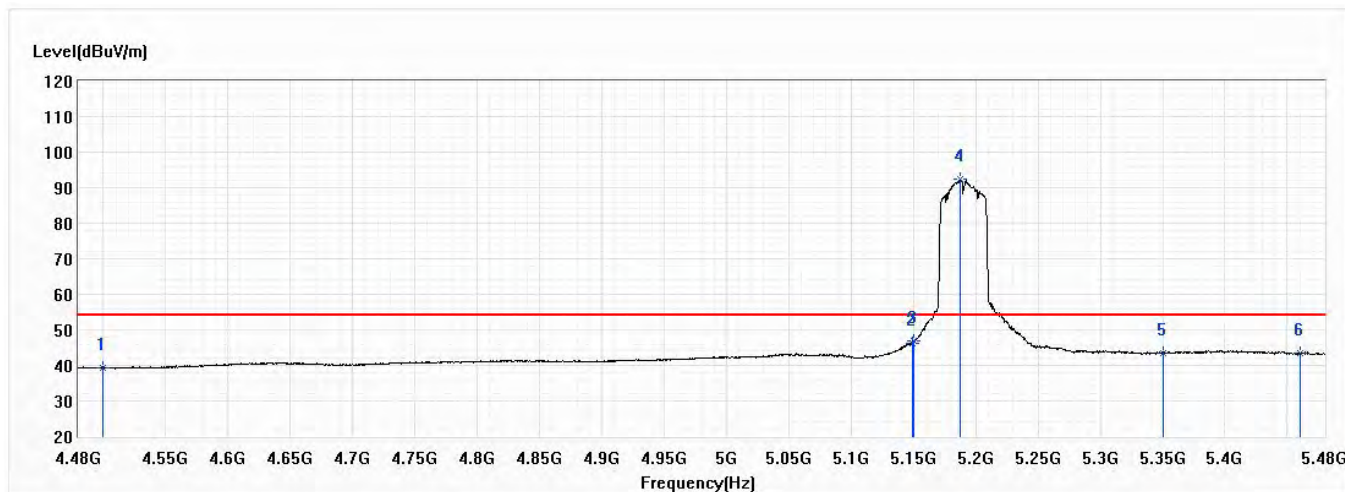


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.44	54.00	-14.56	19.20	20.24	AV
2	5149.000	46.21	54.00	-7.79	23.70	22.51	AV
3	5150.000	46.80	54.00	-7.20	24.29	22.51	AV
! 4	5187.500	92.29	54.00	38.29	69.75	22.54	AV
5	5350.000	43.62	54.00	-10.38	20.92	22.70	AV
6	5460.000	43.43	54.00	-10.57	20.62	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 46,5.23G,BW40M	Humidity (%RH)	57.0

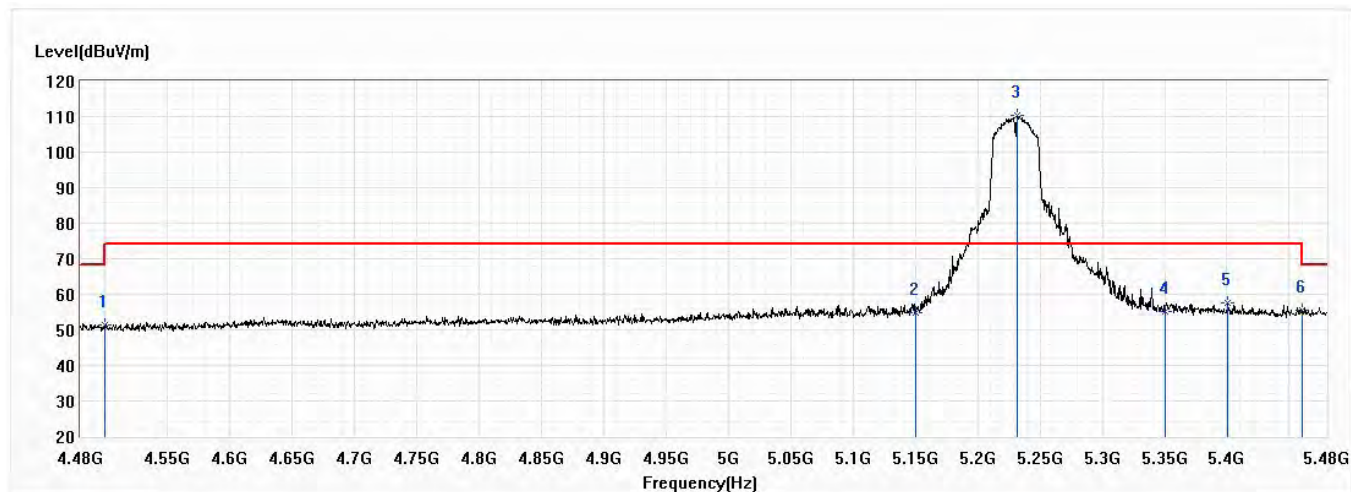


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.41	74.00	-22.59	31.17	20.24	PK
2	5150.000	54.87	74.00	-19.13	32.36	22.51	PK
3	5232.000	110.18	74.00	36.18	87.60	22.58	PK
4	5350.000	55.22	74.00	-18.78	32.52	22.70	PK
5	5401.000	57.71	74.00	-16.29	34.96	22.75	PK
6	5460.000	55.46	74.00	-18.54	32.65	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 46,5.23G,BW40M	Humidity (%RH)	57.0

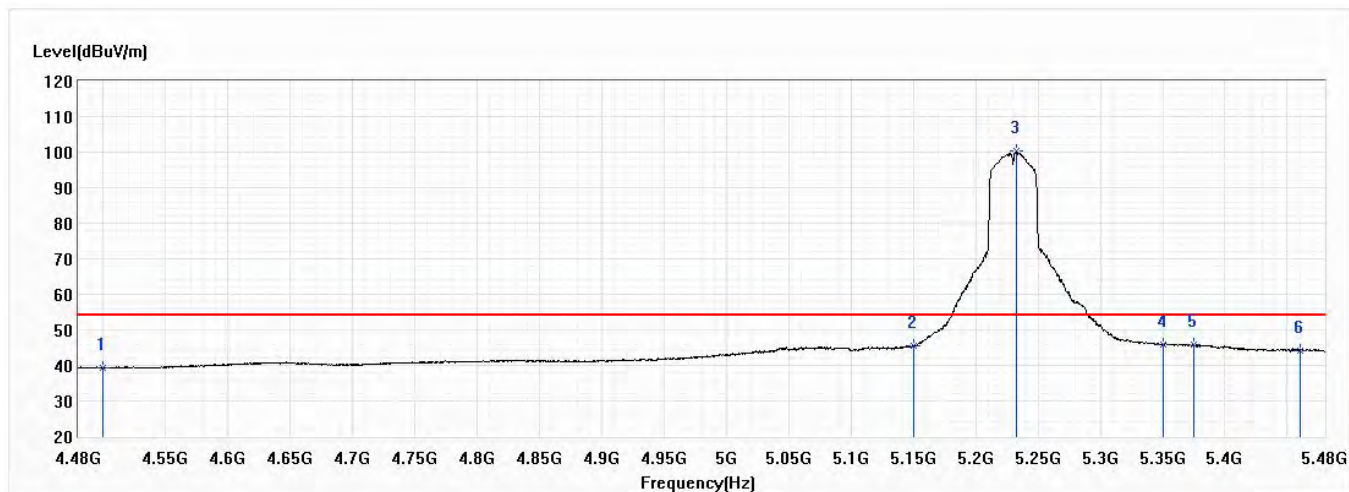


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.27	54.00	-14.73	19.03	20.24	AV
2	5150.000	45.37	54.00	-8.63	22.86	22.51	AV
! 3	5232.500	100.45	54.00	46.45	77.87	22.58	AV
4	5350.000	45.82	54.00	-8.18	23.12	22.70	AV
5	5375.000	45.80	54.00	-8.20	23.07	22.73	AV
6	5460.000	44.30	54.00	-9.70	21.49	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 46,5.23G,BW40M	Humidity (%RH)	57.0

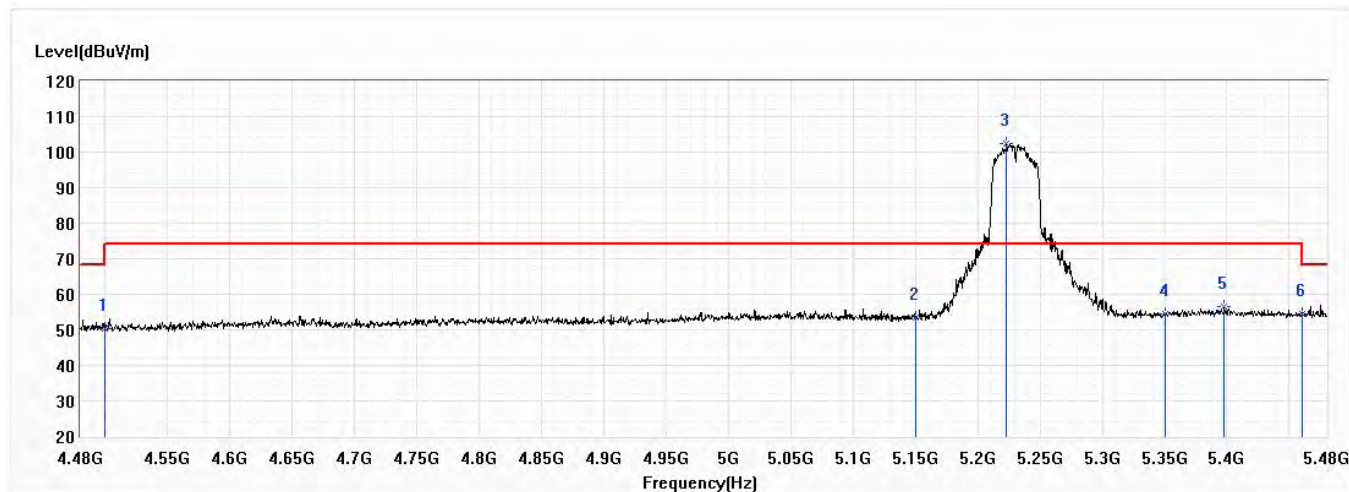


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.36	74.00	-23.64	30.12	20.24	PK
2	5150.000	53.50	74.00	-20.50	30.99	22.51	PK
3	5223.000	102.34	74.00	28.34	79.76	22.58	PK
4	5350.000	54.39	74.00	-19.61	31.69	22.70	PK
5	5398.000	56.47	74.00	-17.53	33.72	22.75	PK
6	5460.000	54.61	74.00	-19.39	31.80	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 46,5.23G,BW40M	Humidity (%RH)	57.0

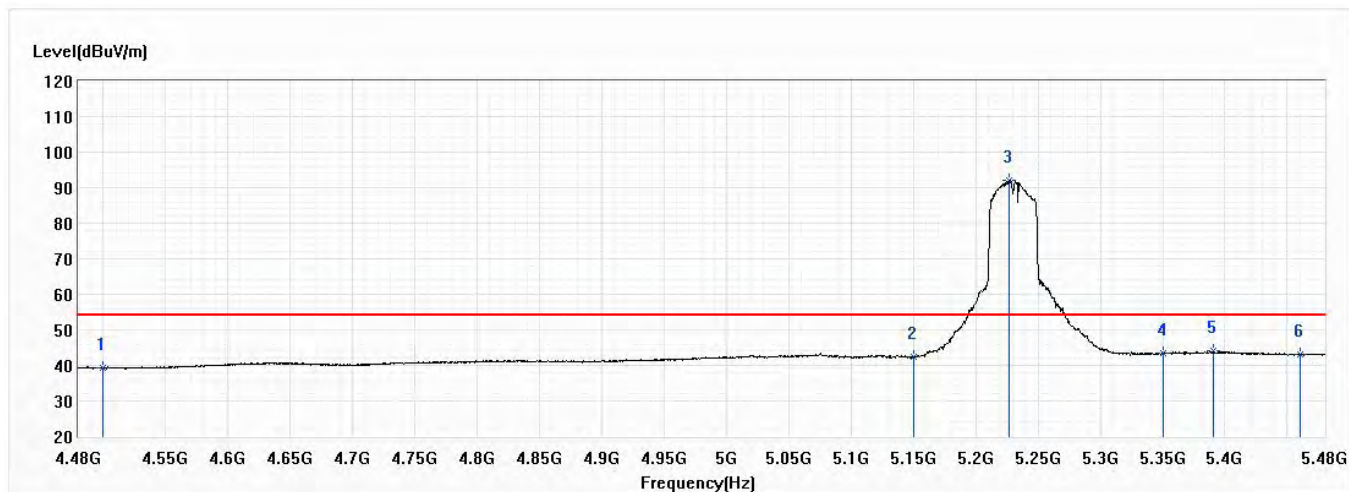


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.38	54.00	-14.62	19.14	20.24	AV
2	5150.000	42.57	54.00	-11.43	20.06	22.51	AV
! 3	5227.000	92.24	54.00	38.24	69.66	22.58	AV
4	5350.000	43.33	54.00	-10.67	20.63	22.70	AV
5	5390.500	44.13	54.00	-9.87	21.39	22.74	AV
6	5460.000	43.08	54.00	-10.92	20.27	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 52,5.26G,BW20M	Humidity (%RH)	57.0

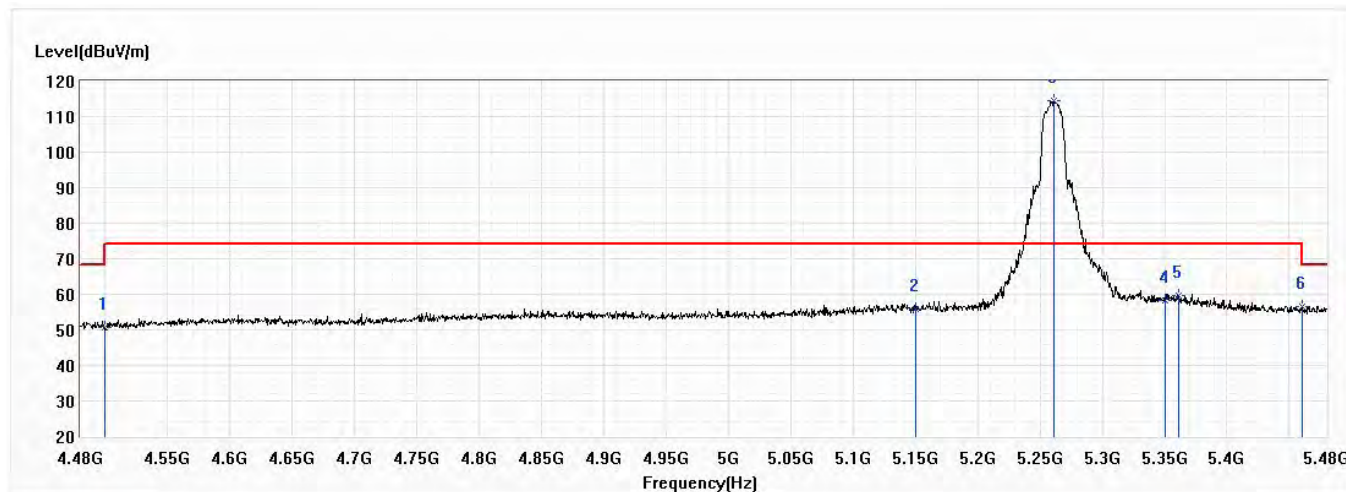


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.80	74.00	-23.20	30.56	20.24	PK
2	5150.000	55.79	74.00	-18.21	33.28	22.51	PK
! 3	5261.500	114.45	74.00	40.45	91.84	22.61	PK
4	5350.000	58.14	74.00	-15.86	35.44	22.70	PK
5	5361.000	59.82	74.00	-14.18	37.11	22.71	PK
6	5460.000	56.69	74.00	-17.31	33.88	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 52,5.26G,BW20M	Humidity (%RH)	57.0

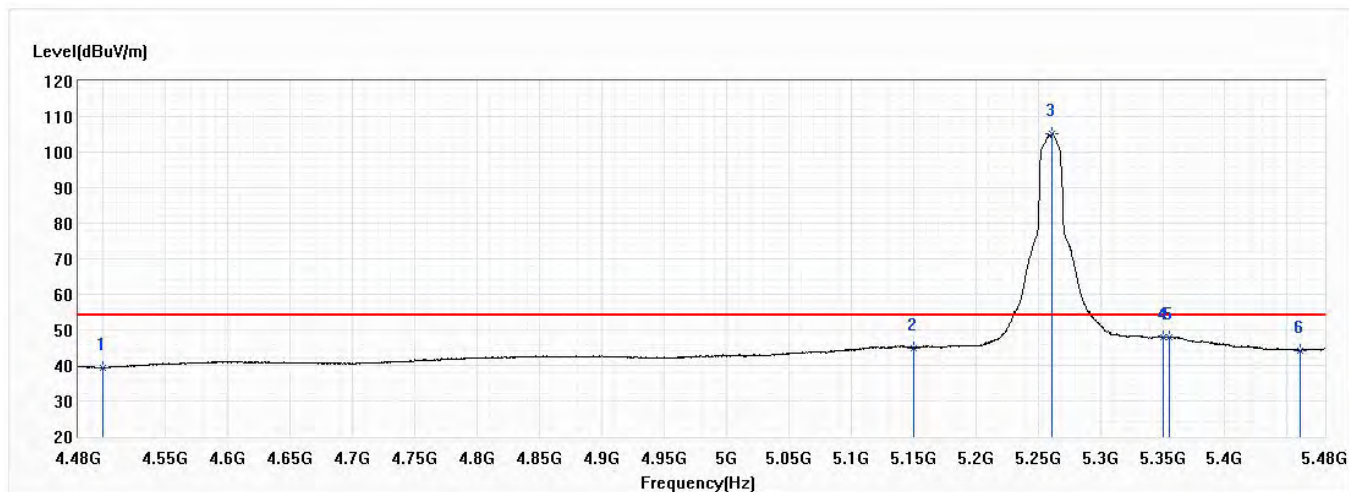


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.36	54.00	-14.64	19.12	20.24	PK
2	5150.000	44.92	54.00	-9.08	22.41	22.51	PK
! 3	5261.000	105.07	54.00	51.07	82.46	22.61	PK
4	5350.000	48.02	54.00	-5.98	25.32	22.70	PK
5	5355.000	47.98	54.00	-6.02	25.28	22.70	PK
6	5460.000	44.28	54.00	-9.72	21.47	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 52,5.26G,BW20M	Humidity (%RH)	57.0

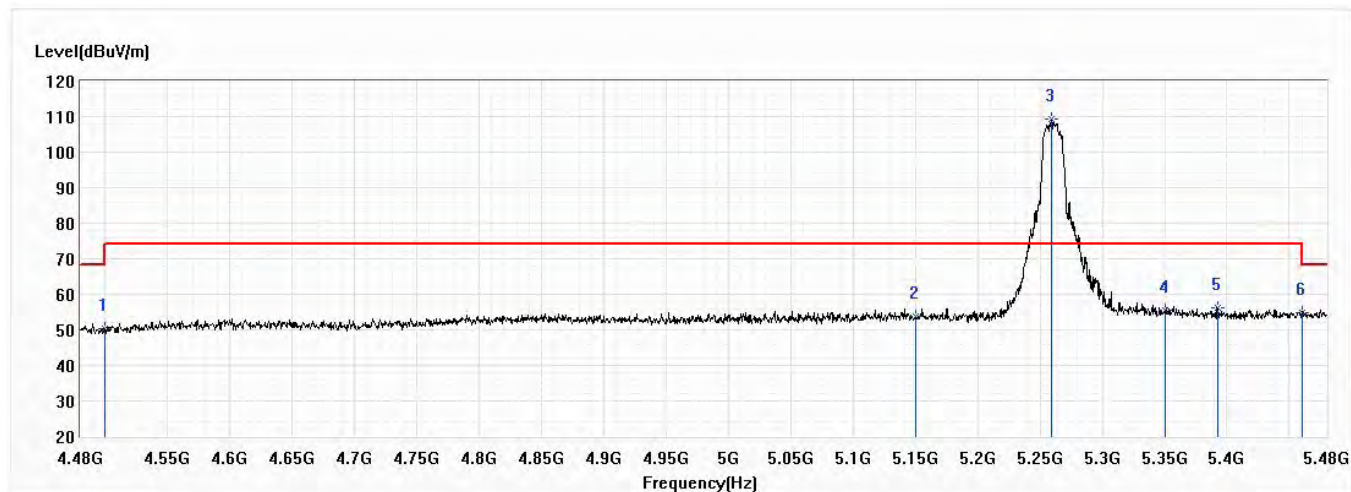


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.34	74.00	-23.66	30.10	20.24	PK
2	5150.000	53.86	74.00	-20.14	31.35	22.51	PK
3	5259.500	109.16	74.00	35.16	86.55	22.61	PK
4	5350.000	55.37	74.00	-18.63	32.67	22.70	PK
5	5392.500	56.35	74.00	-17.65	33.60	22.75	PK
6	5460.000	54.96	74.00	-19.04	32.15	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 52,5.26G,BW20M	Humidity (%RH)	57.0

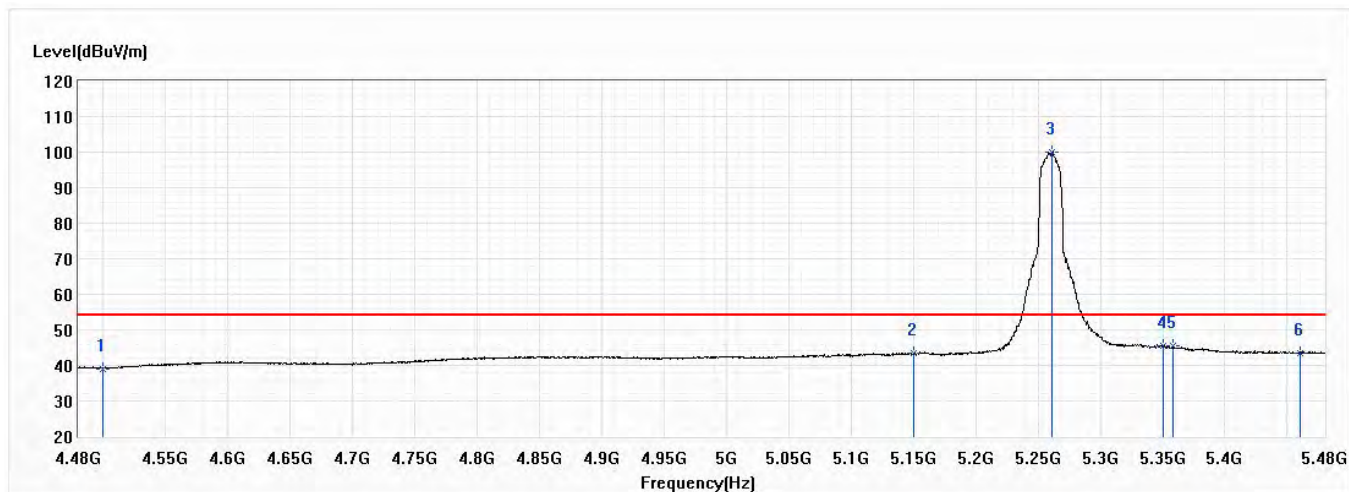


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.03	54.00	-14.97	18.79	20.24	PK
2	5150.000	43.37	54.00	-10.63	20.86	22.51	PK
3	5261.000	100.02	54.00	46.02	77.41	22.61	PK
4	5350.000	45.61	54.00	-8.39	22.91	22.70	PK
5	5358.500	45.40	54.00	-8.60	22.69	22.71	PK
6	5460.000	43.54	54.00	-10.46	20.73	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 60,5.3G,BW20M	Humidity (%RH)	57.0

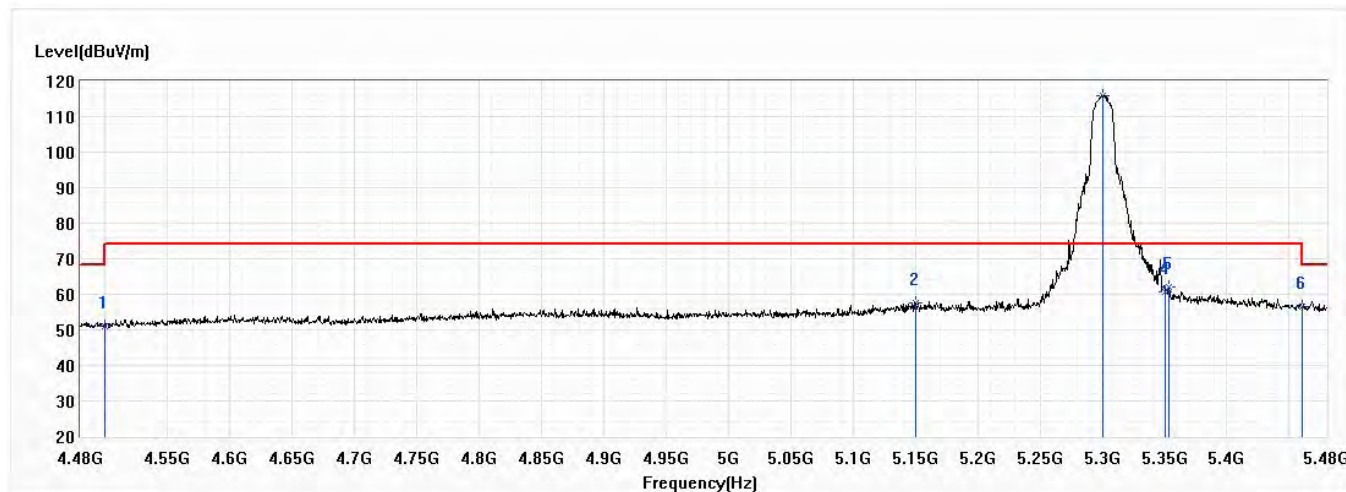


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.14	74.00	-22.86	30.90	20.24	PK
2	5150.000	57.54	74.00	-16.46	35.03	22.51	PK
! 3	5300.500	115.97	74.00	41.97	93.32	22.65	PK
4	5350.000	60.70	74.00	-13.30	38.00	22.70	PK
5	5353.500	62.06	74.00	-11.94	39.36	22.70	PK
6	5460.000	56.38	74.00	-17.62	33.57	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 60,5.3G,BW20M	Humidity (%RH)	57.0

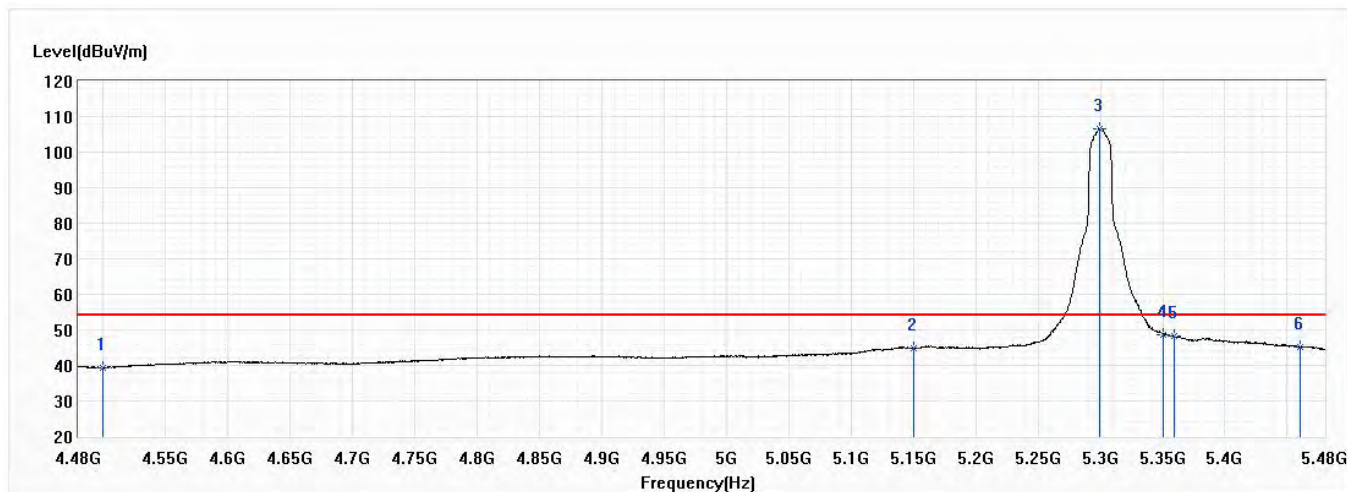


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.32	54.00	-14.68	19.08	20.24	AV
2	5150.000	44.66	54.00	-9.34	22.15	22.51	AV
3	5299.500	106.70	54.00	52.70	84.05	22.65	AV
4	5350.000	48.76	54.00	-5.24	26.06	22.70	AV
5	5359.000	48.14	54.00	-5.86	25.43	22.71	AV
6	5460.000	45.25	54.00	-8.75	22.44	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 60,5.3G,BW20M	Humidity (%RH)	57.0

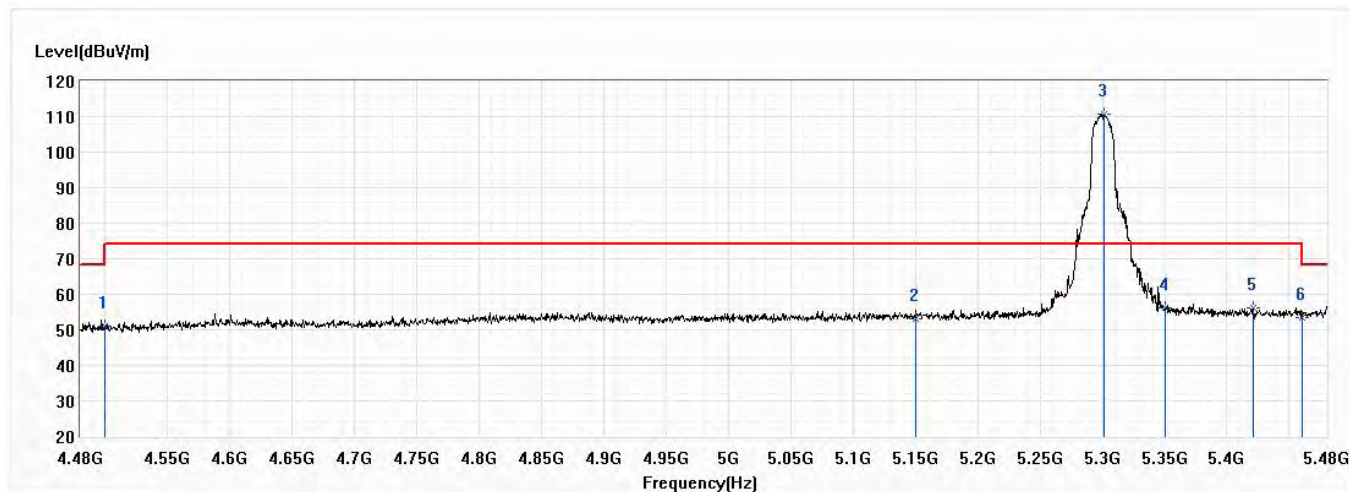


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.11	74.00	-22.89	30.87	20.24	PK
2	5150.000	53.09	74.00	-20.91	30.58	22.51	PK
3	5301.500	110.59	74.00	36.59	87.94	22.65	PK
4	5350.000	56.29	74.00	-17.71	33.59	22.70	PK
5	5421.000	56.13	74.00	-17.87	33.36	22.77	PK
6	5460.000	53.62	74.00	-20.38	30.81	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 60,5.3G,BW20M	Humidity (%RH)	57.0

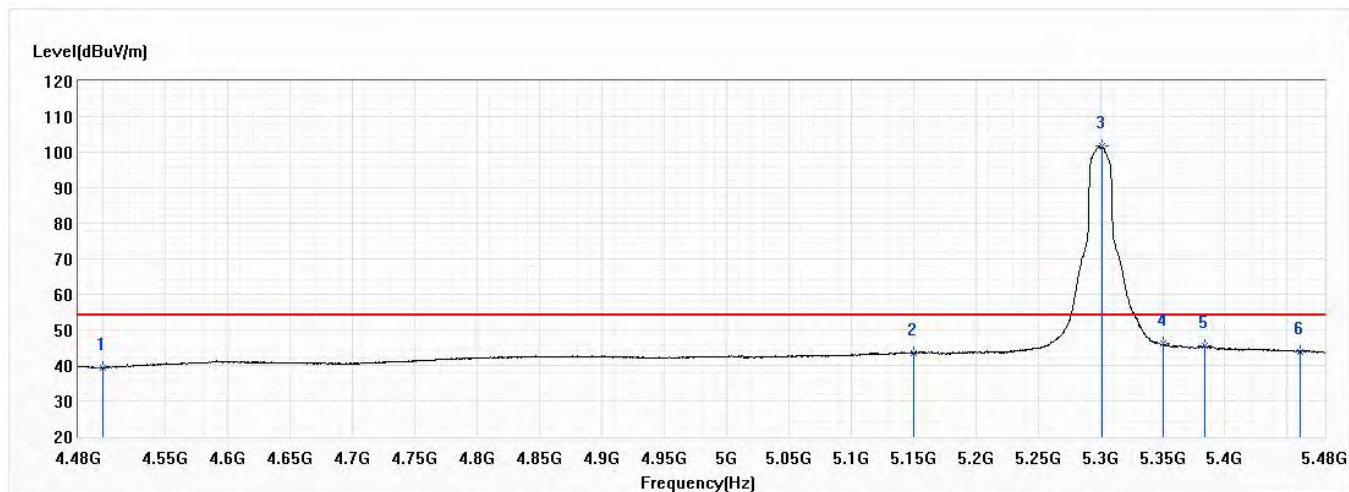


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.38	54.00	-14.62	19.14	20.24	AV
2	5150.000	43.60	54.00	-10.40	21.09	22.51	AV
! 3	5301.000	101.89	54.00	47.89	79.24	22.65	AV
4	5350.000	46.04	54.00	-7.96	23.34	22.70	AV
5	5383.500	45.38	54.00	-8.62	22.65	22.73	AV
6	5460.000	43.91	54.00	-10.09	21.10	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 64,5.32G,BW20M	Humidity (%RH)	57.0

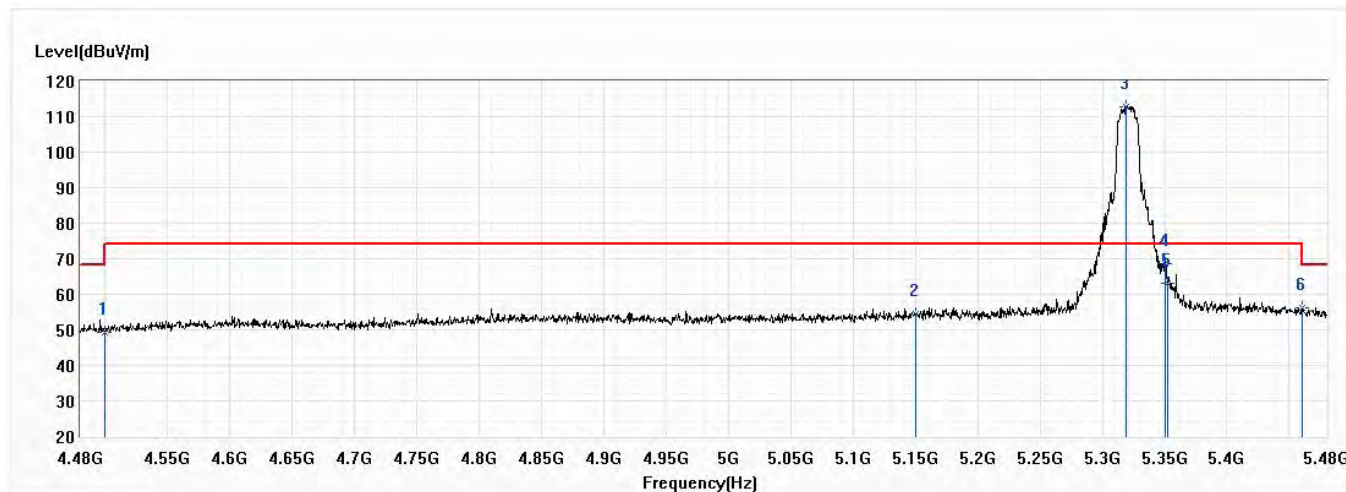


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.39	74.00	-24.61	29.15	20.24	PK
2	5150.000	54.37	74.00	-19.63	31.86	22.51	PK
3	5319.500	112.87	74.00	38.87	90.20	22.67	PK
4	5350.000	68.56	74.00	-5.44	45.86	22.70	PK
5	5352.500	63.13	74.00	-10.87	40.43	22.70	PK
6	5460.000	56.16	74.00	-17.84	33.35	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 64,5.32G,BW20M	Humidity (%RH)	57.0

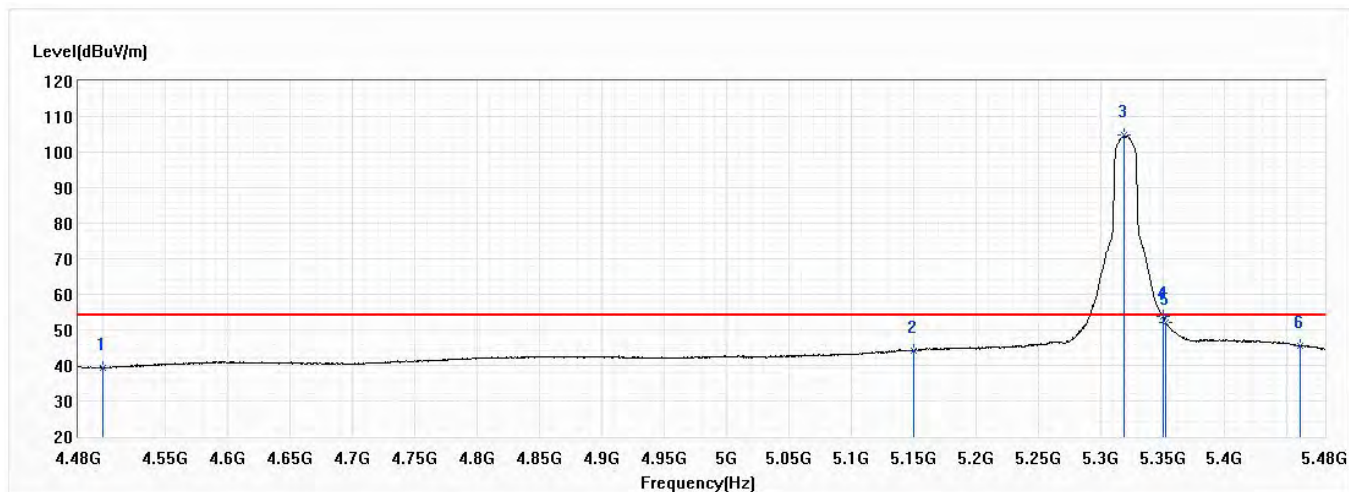


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.34	54.00	-14.66	19.10	20.24	AV
2	5150.000	44.13	54.00	-9.87	21.62	22.51	AV
! 3	5319.000	104.78	54.00	50.78	82.11	22.67	AV
4	5350.000	53.72	54.00	-0.28	31.02	22.70	AV
5	5352.500	52.23	54.00	-1.77	29.53	22.70	AV
6	5460.000	45.43	54.00	-8.57	22.62	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 64,5.32G,BW20M	Humidity (%RH)	57.0

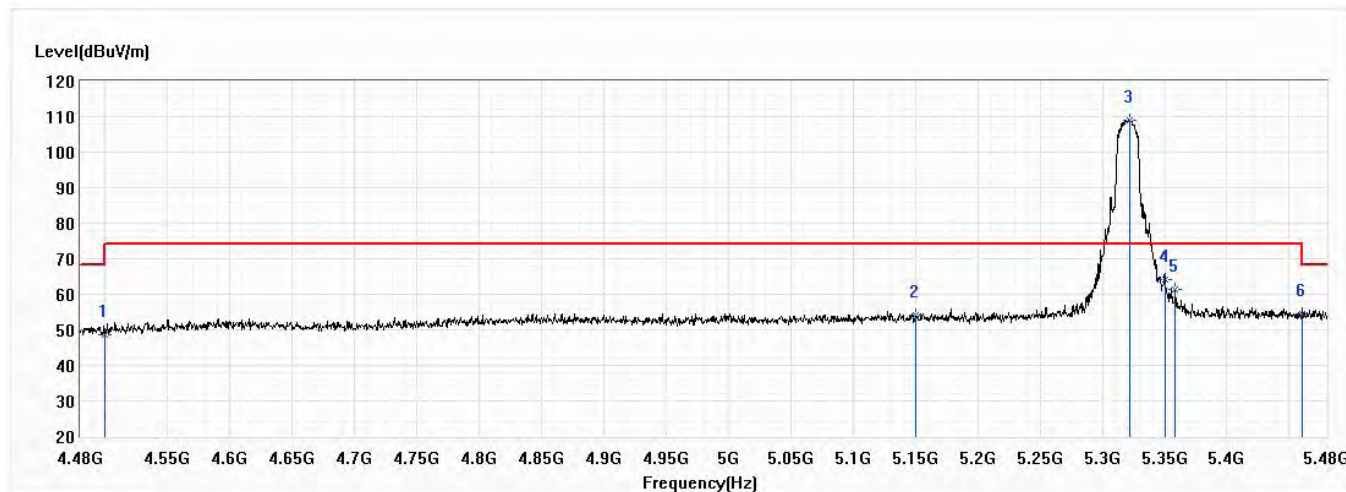


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	48.78	74.00	-25.22	28.54	20.24	PK
2	5150.000	54.21	74.00	-19.79	31.70	22.51	PK
! 3	5322.000	109.01	74.00	35.01	86.34	22.67	PK
4	5350.000	64.31	74.00	-9.69	41.61	22.70	PK
5	5358.500	61.31	74.00	-12.69	38.60	22.71	PK
6	5460.000	54.32	74.00	-19.68	31.51	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 64,5.32G,BW20M	Humidity (%RH)	57.0

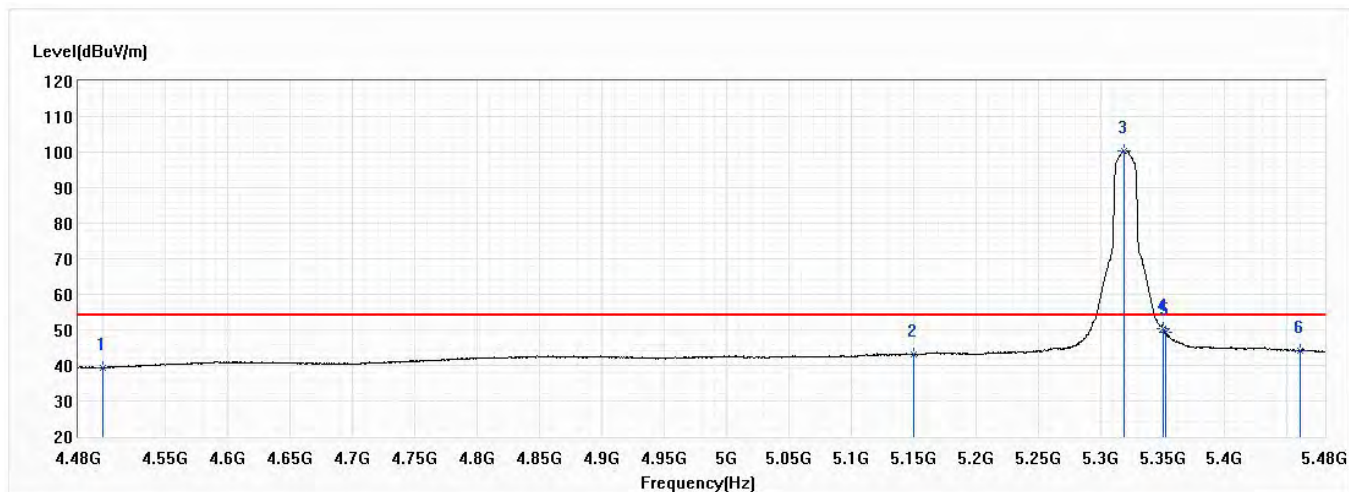


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.36	54.00	-14.64	19.12	20.24	AV
2	5150.000	43.14	54.00	-10.86	20.63	22.51	AV
! 3	5319.500	100.30	54.00	46.30	77.63	22.67	AV
4	5350.000	50.30	54.00	-3.70	27.60	22.70	AV
5	5352.500	49.25	54.00	-4.75	26.55	22.70	AV
6	5460.000	44.00	54.00	-10.00	21.19	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 52,5.26G,BW20M	Humidity (%RH)	57.0

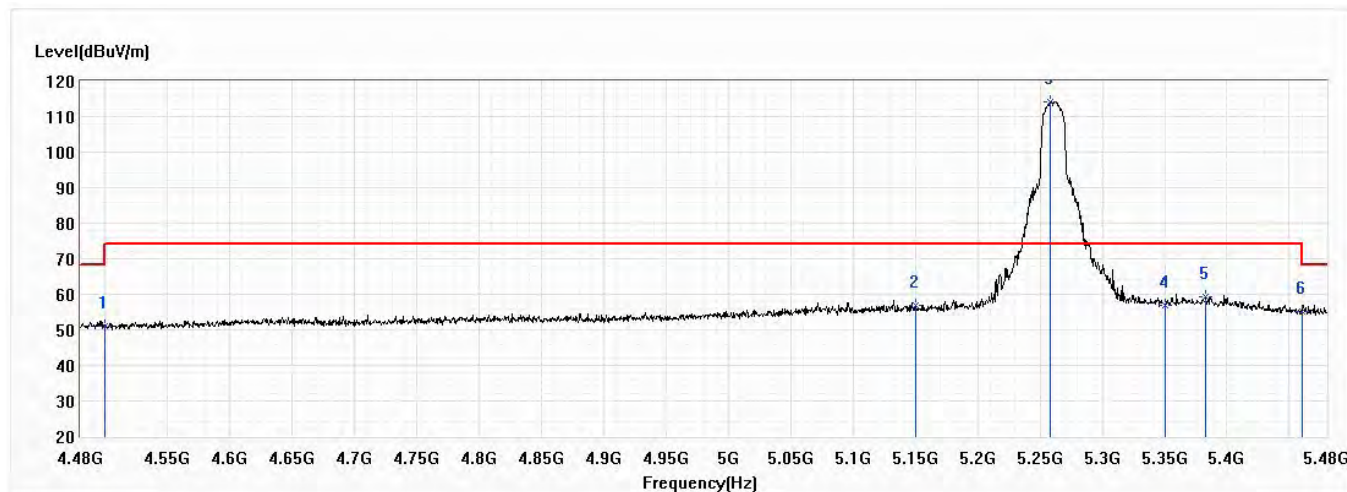


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.89	74.00	-23.11	30.65	20.24	PK
2	5150.000	56.76	74.00	-17.24	34.25	22.51	PK
3	5258.500	114.26	74.00	40.26	91.65	22.61	PK
4	5350.000	56.99	74.00	-17.01	34.29	22.70	PK
5	5383.000	59.32	74.00	-14.68	36.59	22.73	PK
6	5460.000	55.22	74.00	-18.78	32.41	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 52,5.26G,BW20M	Humidity (%RH)	57.0

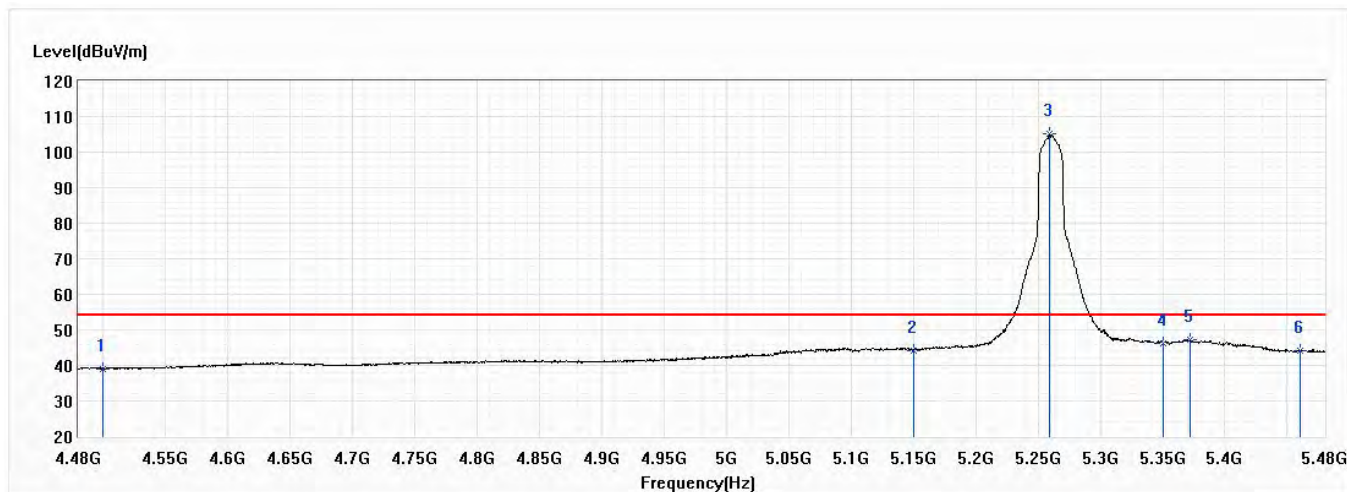


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.09	54.00	-14.91	18.85	20.24	AV
2	5150.000	44.12	54.00	-9.88	21.61	22.51	AV
! 3	5259.000	105.01	54.00	51.01	82.40	22.61	AV
4	5350.000	46.31	54.00	-7.69	23.61	22.70	AV
5	5372.500	47.17	54.00	-6.83	24.45	22.72	AV
6	5460.000	43.99	54.00	-10.01	21.18	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 52,5.26G,BW20M	Humidity (%RH)	57.0

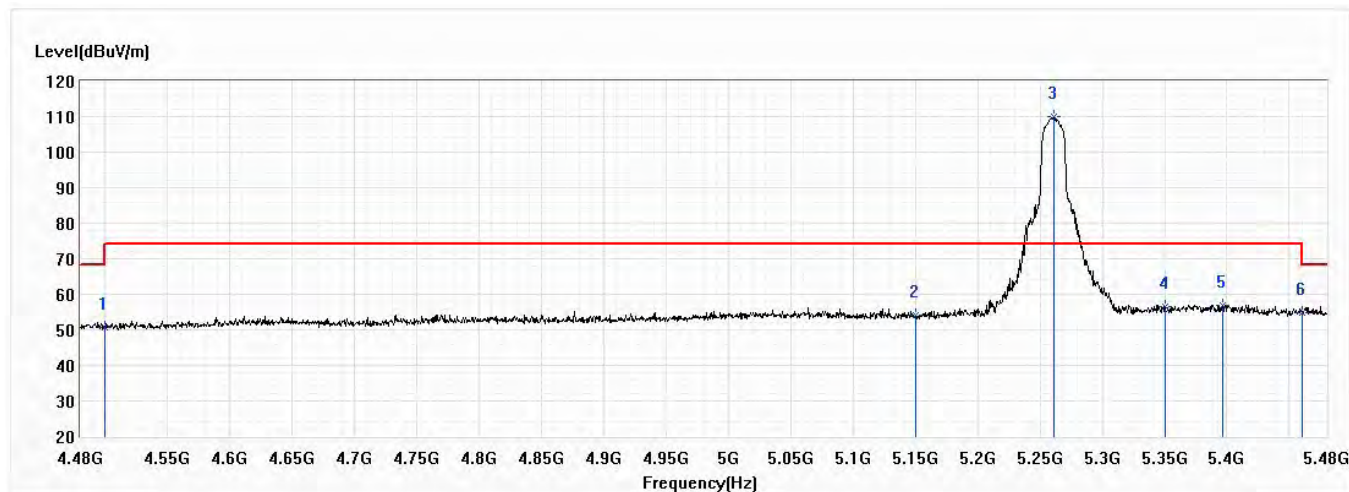


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.73	74.00	-23.27	30.49	20.24	PK
2	5150.000	54.05	74.00	-19.95	31.54	22.51	PK
3	5261.500	110.02	74.00	36.02	87.41	22.61	PK
4	5350.000	56.45	74.00	-17.55	33.75	22.70	PK
5	5397.000	56.84	74.00	-17.16	34.09	22.75	PK
6	5460.000	54.80	74.00	-19.20	31.99	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 52,5.26G,BW20M	Humidity (%RH)	57.0

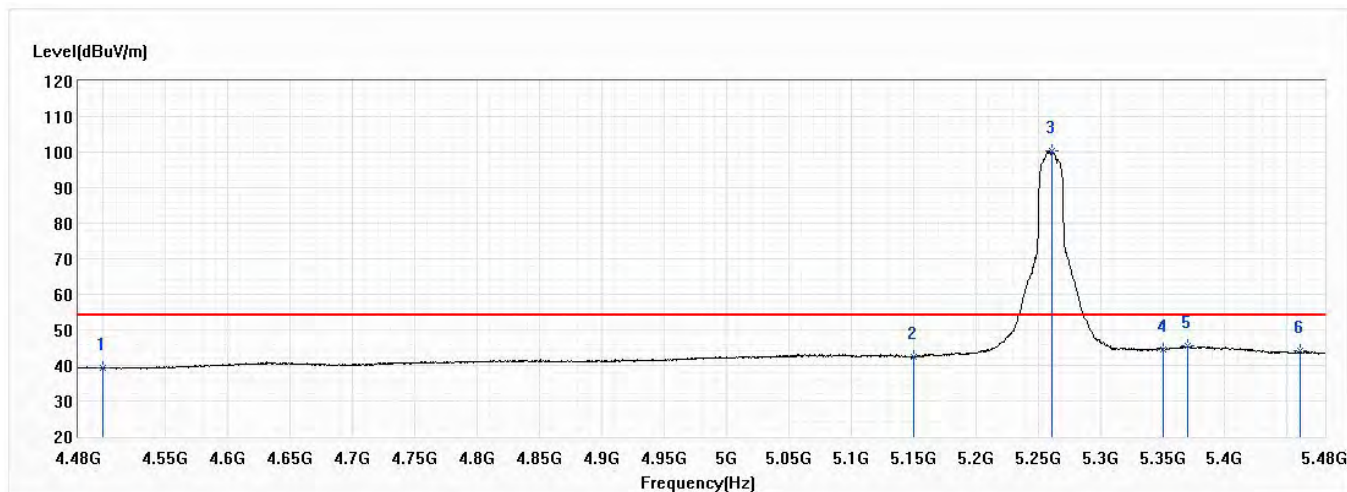


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.25	54.00	-14.75	19.01	20.24	AV
2	5150.000	42.54	54.00	-11.46	20.03	22.51	AV
! 3	5261.500	100.33	54.00	46.33	77.72	22.61	AV
4	5350.000	44.49	54.00	-9.51	21.79	22.70	AV
5	5370.500	45.36	54.00	-8.64	22.64	22.72	AV
6	5460.000	44.01	54.00	-9.99	21.20	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 60,5.3G,BW20M	Humidity (%RH)	57.0

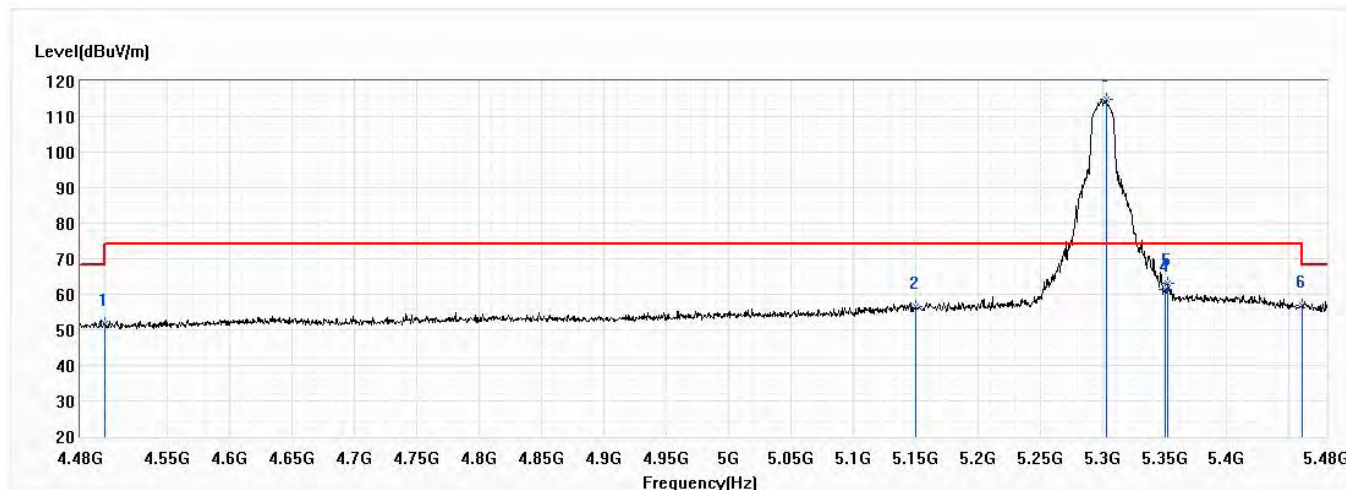


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.64	74.00	-22.36	31.40	20.24	PK
2	5150.000	56.59	74.00	-17.41	34.08	22.51	PK
3	5303.000	114.67	74.00	40.67	92.02	22.65	PK
4	5350.000	61.25	74.00	-12.75	38.55	22.70	PK
5	5352.500	63.07	74.00	-10.93	40.37	22.70	PK
6	5460.000	56.84	74.00	-17.16	34.03	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 60,5.3G,BW20M	Humidity (%RH)	57.0

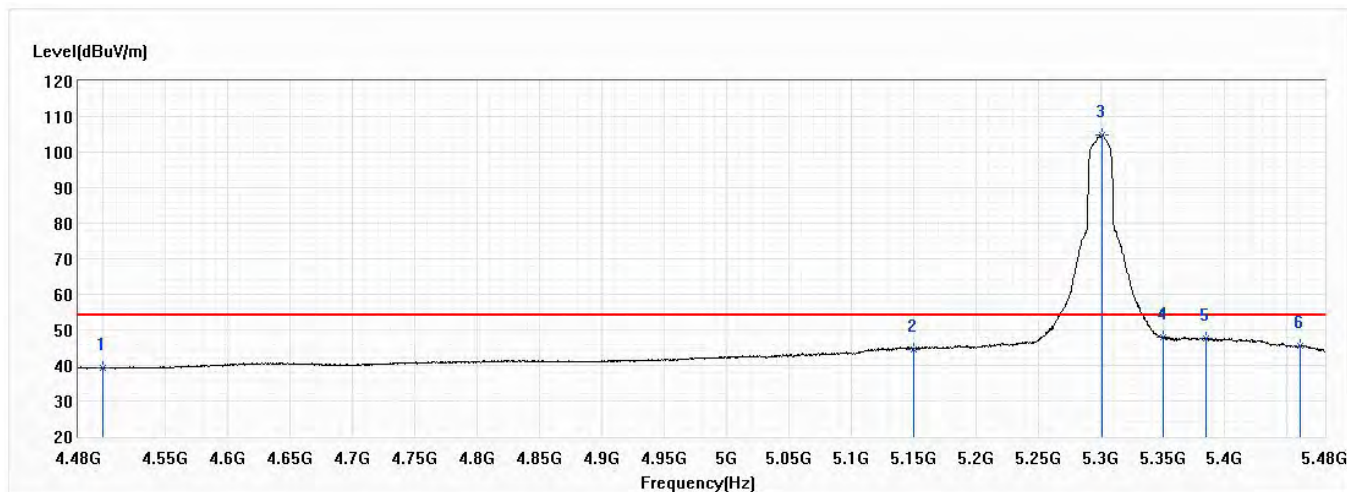


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.24	54.00	-14.76	19.00	20.24	AV
2	5150.000	44.50	54.00	-9.50	21.99	22.51	AV
3	5301.500	104.92	54.00	50.92	82.27	22.65	AV
4	5350.000	47.81	54.00	-6.19	25.11	22.70	AV
5	5385.000	47.71	54.00	-6.29	24.98	22.73	AV
6	5460.000	45.40	54.00	-8.60	22.59	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 60,5.3G,BW20M	Humidity (%RH)	57.0

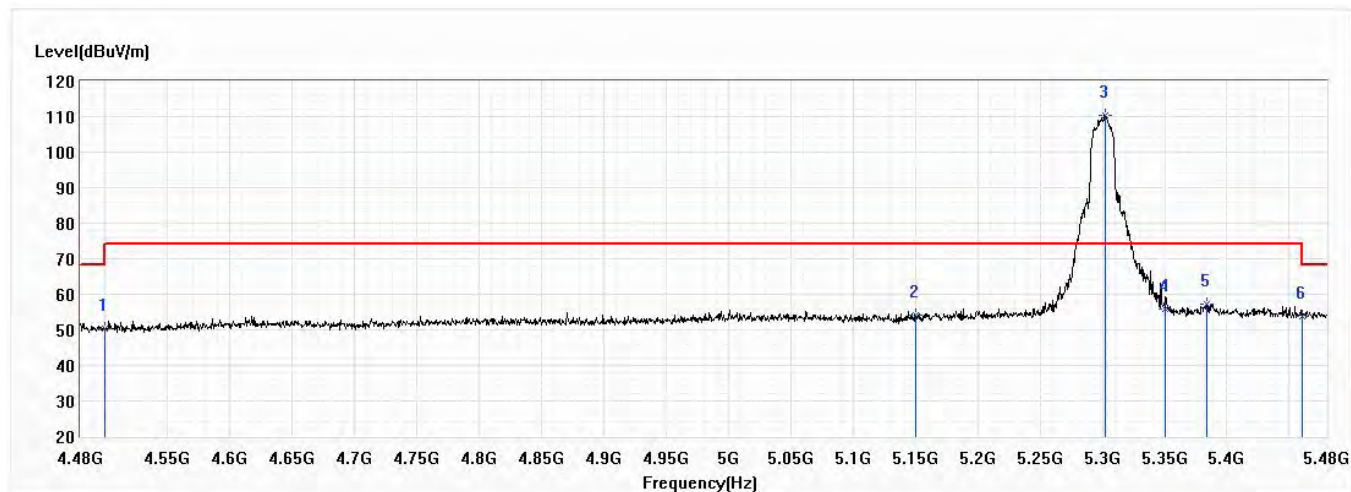


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.33	74.00	-23.67	30.09	20.24	PK
2	5150.000	54.11	74.00	-19.89	31.60	22.51	PK
3	5302.000	110.48	74.00	36.48	87.83	22.65	PK
4	5350.000	55.71	74.00	-18.29	33.01	22.70	PK
5	5383.500	57.28	74.00	-16.72	34.55	22.73	PK
6	5460.000	53.95	74.00	-20.05	31.14	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 60,5.3G,BW20M	Humidity (%RH)	57.0

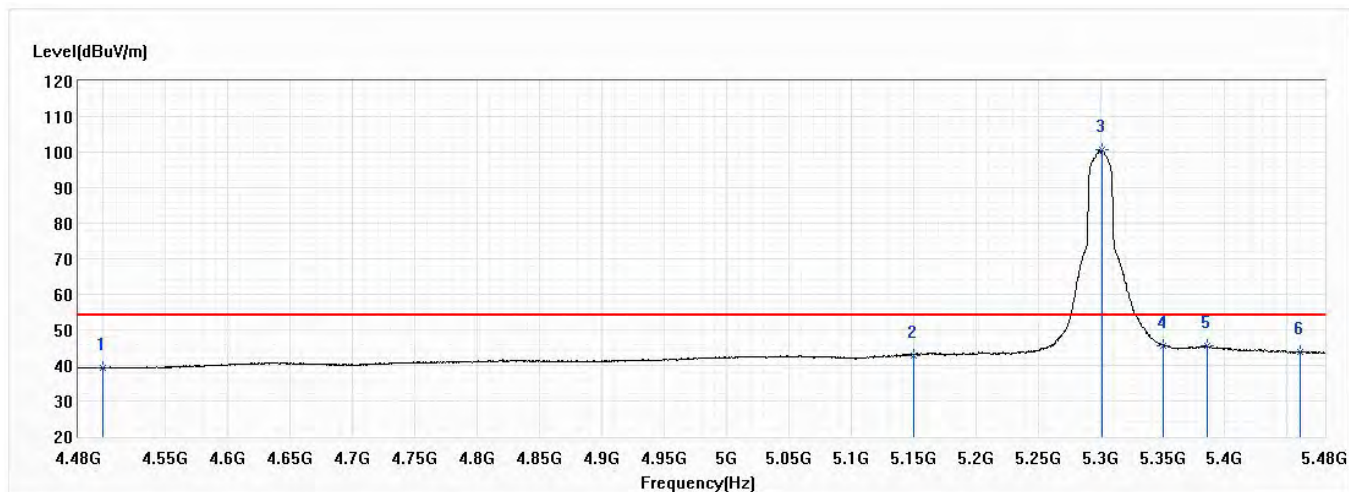


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.22	54.00	-14.78	18.98	20.24	AV
2	5150.000	42.82	54.00	-11.18	20.31	22.51	AV
3	5301.000	100.83	54.00	46.83	78.18	22.65	AV
4	5350.000	45.40	54.00	-8.60	22.70	22.70	AV
5	5385.500	45.45	54.00	-8.55	22.72	22.73	AV
6	5460.000	43.75	54.00	-10.25	20.94	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 64,5.32G,BW20M	Humidity (%RH)	57.0

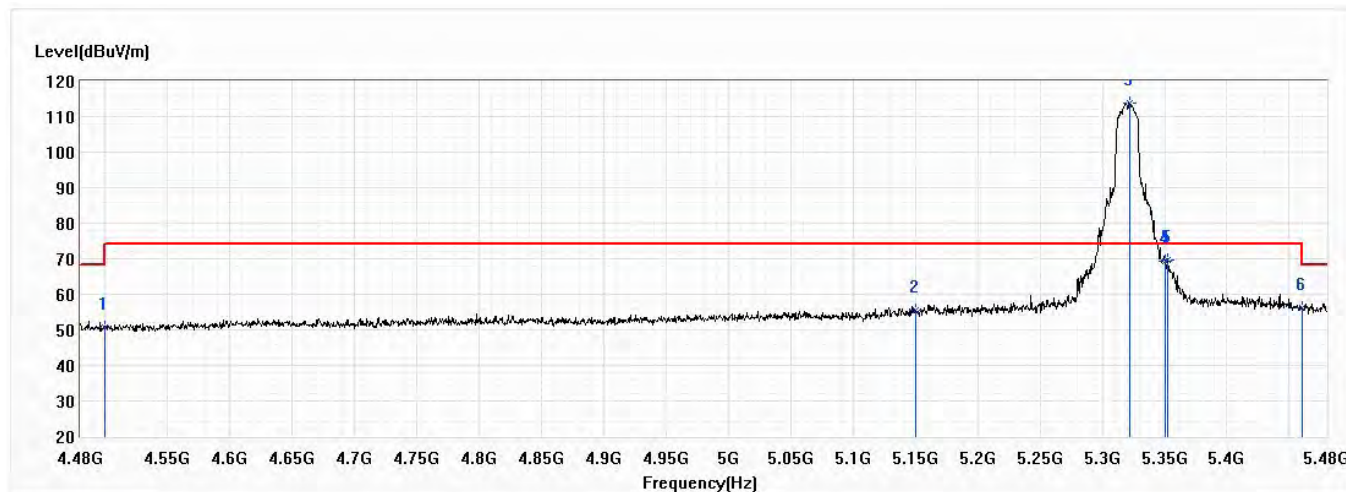


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.68	74.00	-23.32	30.44	20.24	PK
2	5150.000	55.53	74.00	-18.47	33.02	22.51	PK
3	5322.000	113.92	74.00	39.92	91.25	22.67	PK
4	5350.000	69.44	74.00	-4.56	46.74	22.70	PK
5	5352.500	69.52	74.00	-4.48	46.82	22.70	PK
6	5460.000	56.12	74.00	-17.88	33.31	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 64,5.32G,BW20M	Humidity (%RH)	57.0

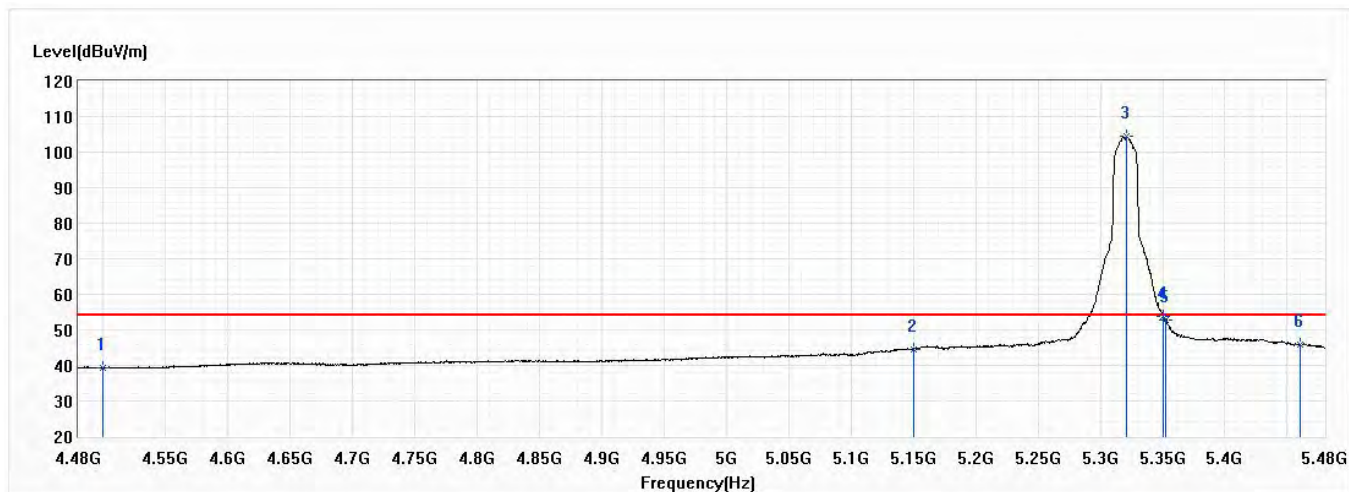


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.29	54.00	-14.71	19.05	20.24	AV
2	5150.000	44.34	54.00	-9.66	21.83	22.51	AV
! 3	5321.000	104.50	54.00	50.50	81.83	22.67	AV
4	5350.000	53.74	54.00	-0.26	31.04	22.70	AV
5	5352.500	52.92	54.00	-1.08	30.22	22.70	AV
6	5460.000	45.93	54.00	-8.07	23.12	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 64,5.32G,BW20M	Humidity (%RH)	57.0

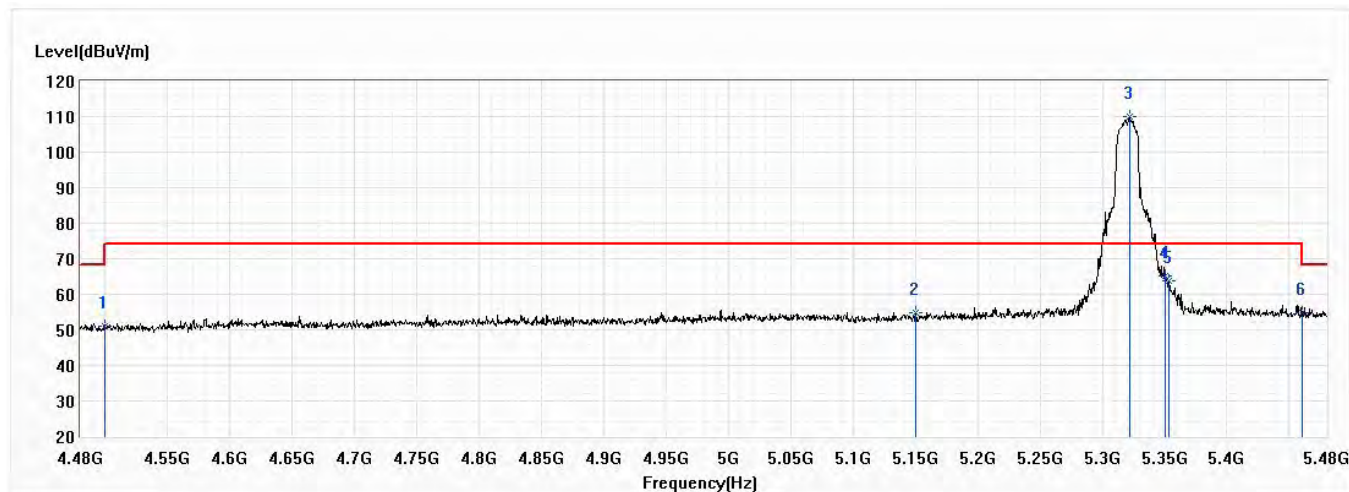


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.98	74.00	-23.02	30.74	20.24	PK
2	5150.000	54.67	74.00	-19.33	32.16	22.51	PK
3	5322.000	110.09	74.00	36.09	87.42	22.67	PK
4	5350.000	65.03	74.00	-8.97	42.33	22.70	PK
5	5353.500	63.93	74.00	-10.07	41.23	22.70	PK
6	5460.000	54.79	74.00	-19.21	31.98	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 64,5.32G,BW20M	Humidity (%RH)	57.0

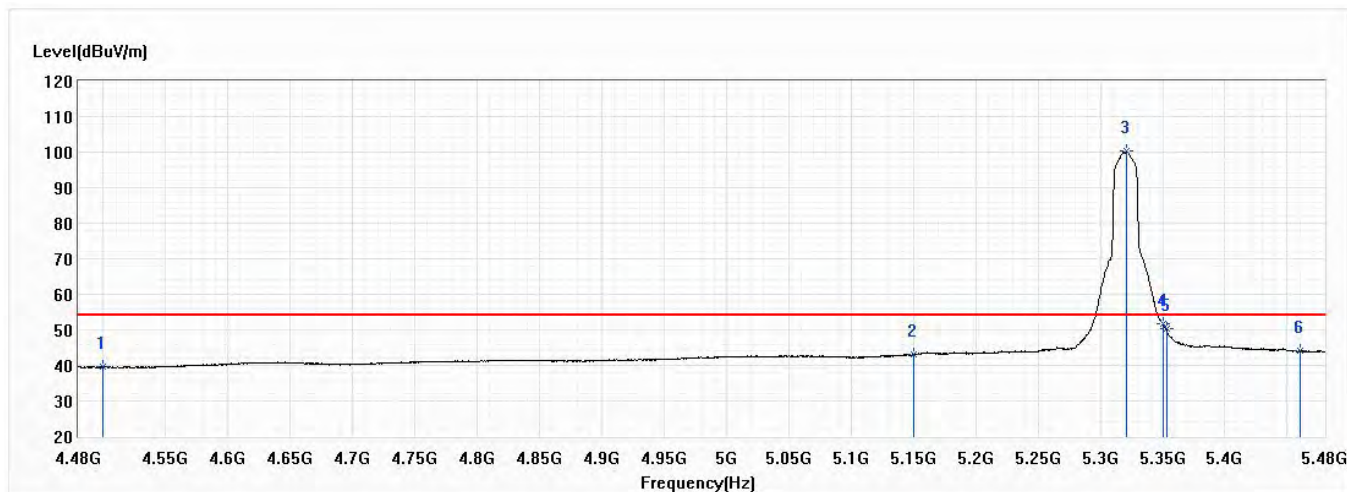


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.52	54.00	-14.48	19.28	20.24	AV
2	5150.000	43.21	54.00	-10.79	20.70	22.51	AV
! 3	5321.500	100.27	54.00	46.27	77.60	22.67	AV
4	5350.000	51.82	54.00	-2.18	29.12	22.70	AV
5	5353.000	50.24	54.00	-3.76	27.54	22.70	AV
6	5460.000	43.97	54.00	-10.03	21.16	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 54,5.27G,BW40M	Humidity (%RH)	57.0

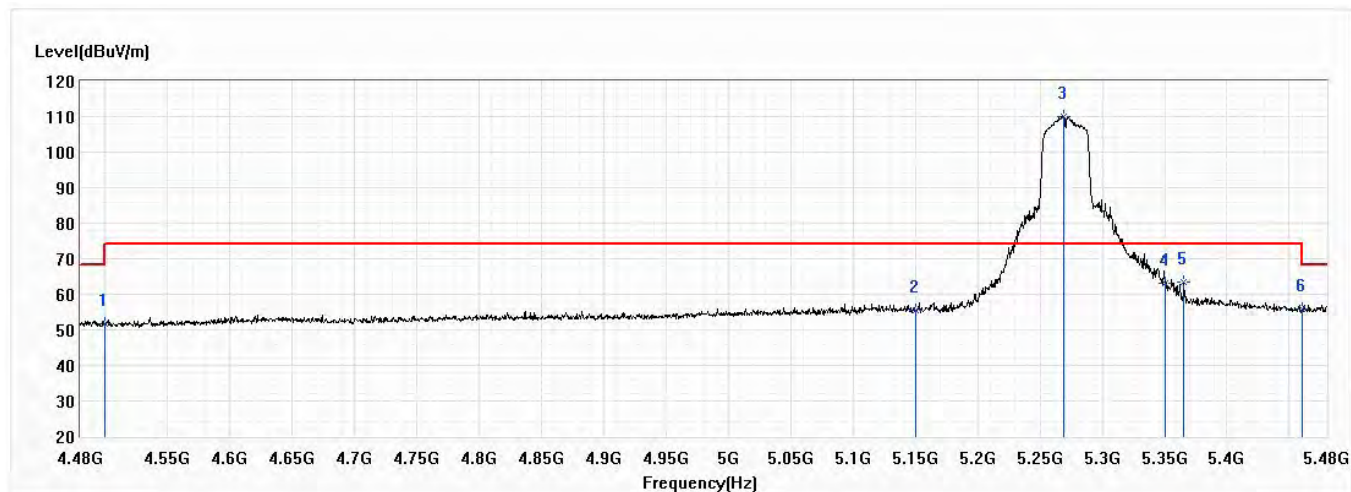


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.68	74.00	-22.32	31.44	20.24	PK
2	5150.000	55.53	74.00	-18.47	33.02	22.51	PK
3	5269.000	110.03	74.00	36.03	87.41	22.62	PK
4	5350.000	63.19	74.00	-10.81	40.49	22.70	PK
5	5365.500	63.34	74.00	-10.66	40.62	22.72	PK
6	5460.000	55.80	74.00	-18.20	32.99	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 54,5.27G,BW40M	Humidity (%RH)	57.0

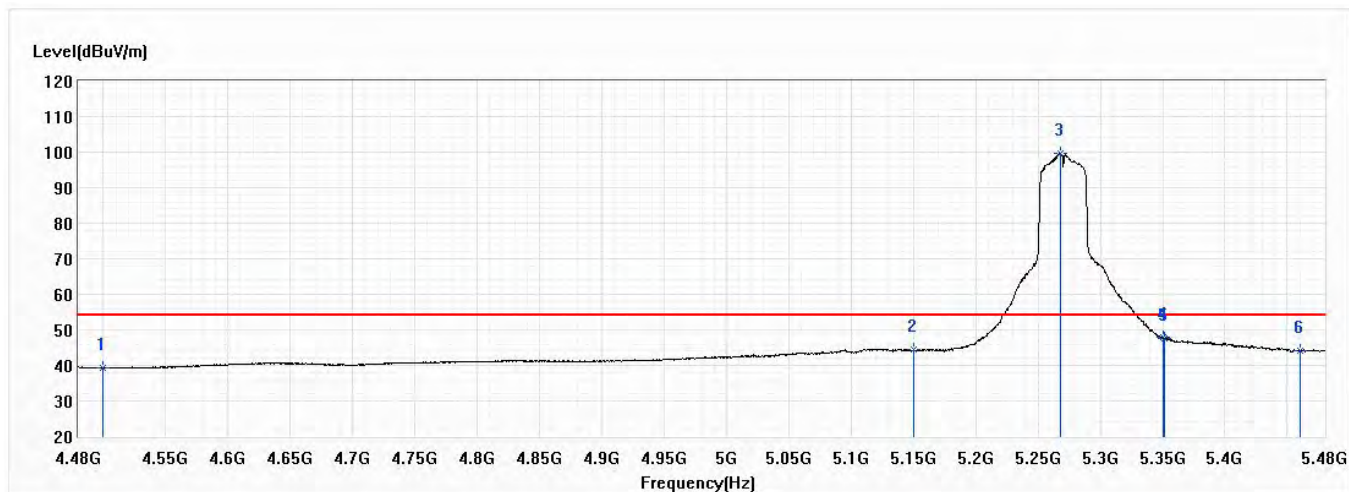


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.31	54.00	-14.69	19.07	20.24	AV
2	5150.000	44.38	54.00	-9.62	21.87	22.51	AV
3	5268.500	99.70	54.00	45.70	77.08	22.62	AV
4	5350.000	47.80	54.00	-6.20	25.10	22.70	AV
5	5351.000	47.63	54.00	-6.37	24.93	22.70	AV
6	5460.000	44.27	54.00	-9.73	21.46	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 54,5.27G,BW40M	Humidity (%RH)	57.0

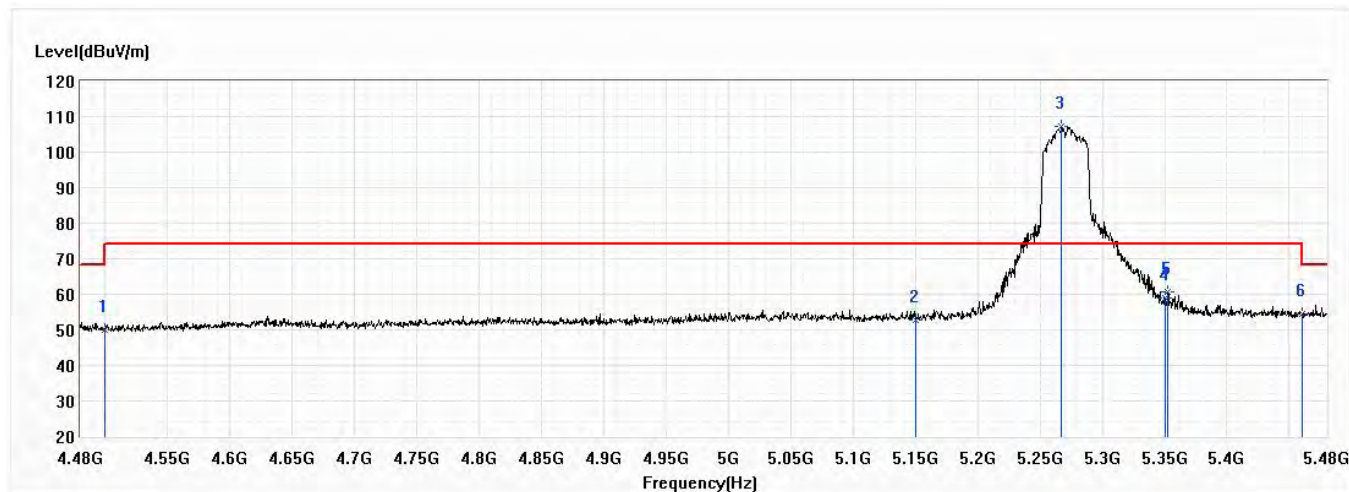


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.89	74.00	-24.11	29.65	20.24	PK
2	5150.000	52.84	74.00	-21.16	30.33	22.51	PK
3	5267.500	107.29	74.00	33.29	84.67	22.62	PK
4	5350.000	59.07	74.00	-14.93	36.37	22.70	PK
5	5352.500	60.67	74.00	-13.33	37.97	22.70	PK
6	5460.000	54.53	74.00	-19.47	31.72	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 54,5.27G,BW40M	Humidity (%RH)	57.0

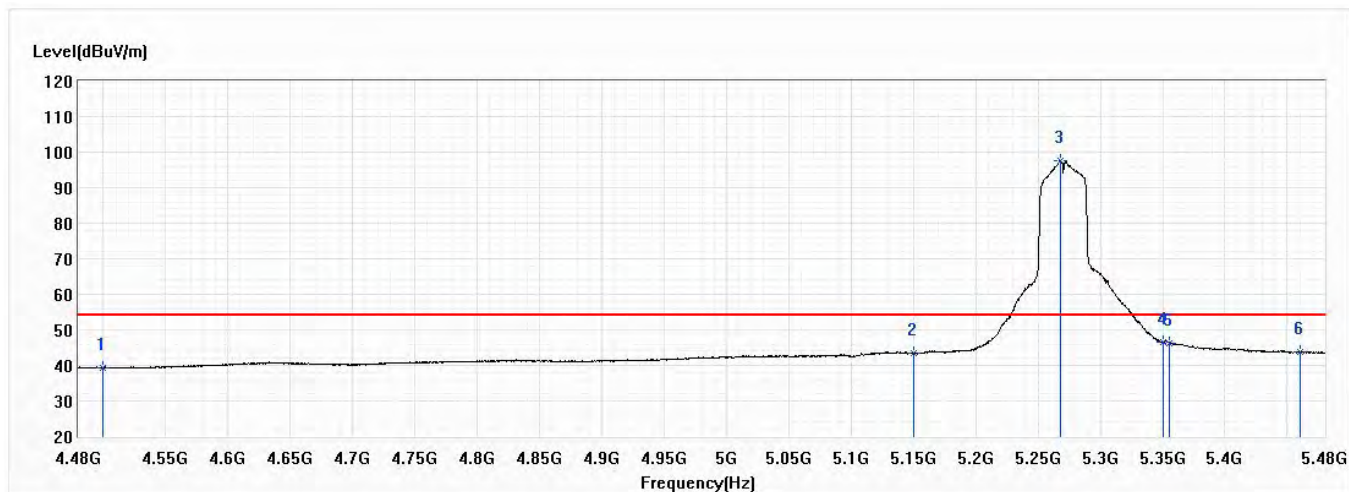


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.41	54.00	-14.59	19.17	20.24	AV
2	5150.000	43.39	54.00	-10.61	20.88	22.51	AV
3	5268.500	97.66	54.00	43.66	75.04	22.62	AV
4	5350.000	46.69	54.00	-7.31	23.99	22.70	AV
5	5355.000	46.25	54.00	-7.75	23.55	22.70	AV
6	5460.000	43.65	54.00	-10.35	20.84	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 62,5.31G,BW40M	Humidity (%RH)	57.0

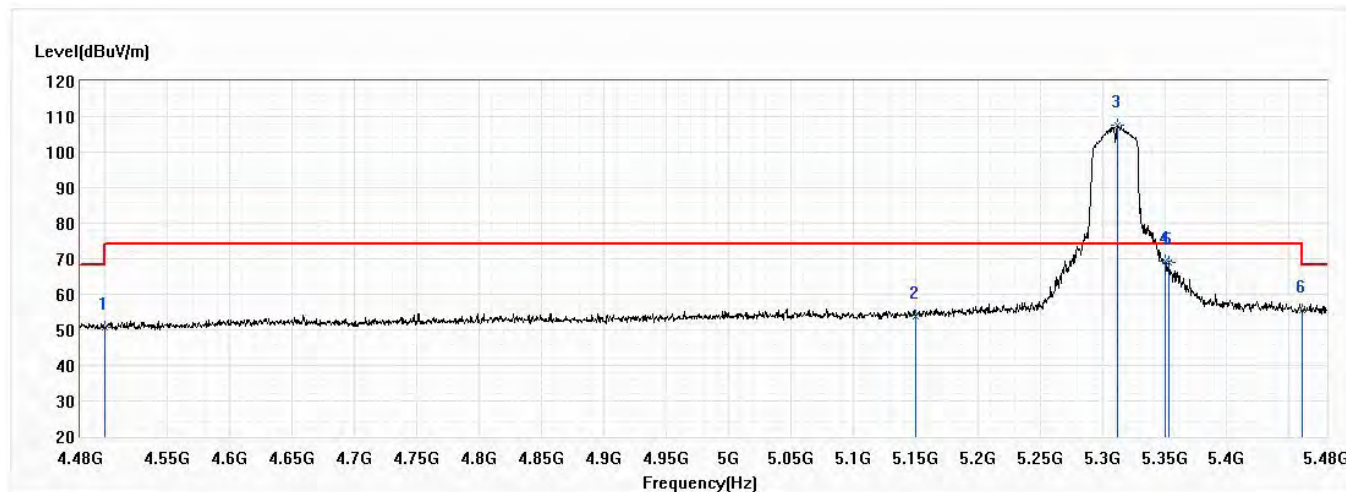


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.81	74.00	-23.19	30.57	20.24	PK
2	5150.000	53.84	74.00	-20.16	31.33	22.51	PK
3	5312.000	107.42	74.00	33.42	84.76	22.66	PK
4	5350.000	69.27	74.00	-4.73	46.57	22.70	PK
5	5353.500	68.95	74.00	-5.05	46.25	22.70	PK
6	5460.000	55.38	74.00	-18.62	32.57	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 62,5.31G,BW40M	Humidity (%RH)	57.0

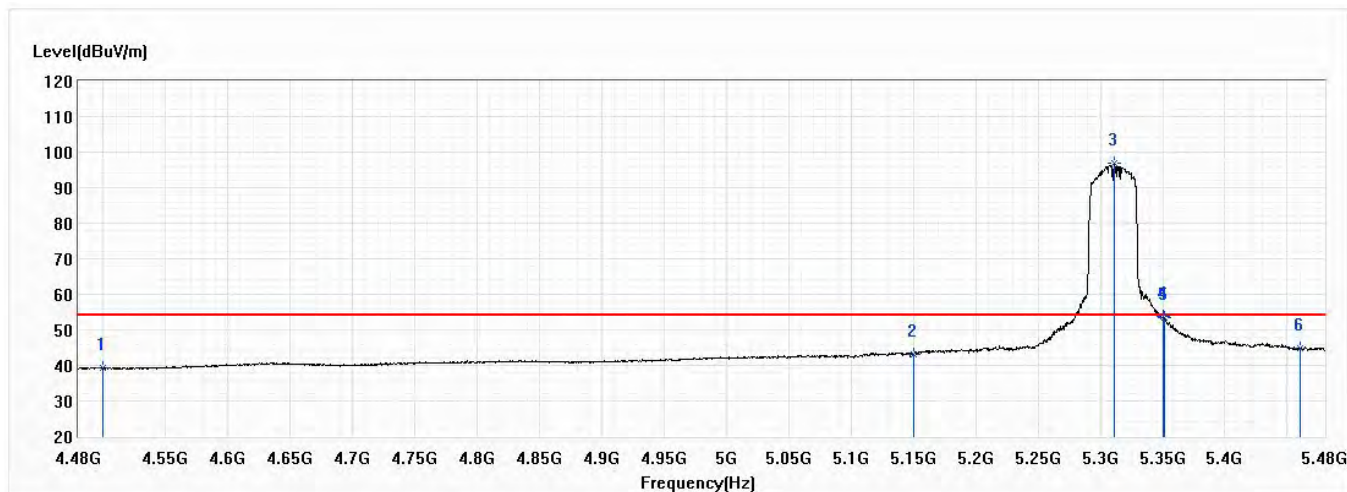


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.17	54.00	-14.83	18.93	20.24	AV
2	5150.000	43.20	54.00	-10.80	20.69	22.51	AV
! 3	5311.500	96.87	54.00	42.87	74.21	22.66	AV
4	5350.000	53.89	54.00	-0.11	31.19	22.70	AV
5	5351.500	53.49	54.00	-0.51	30.79	22.70	AV
6	5460.000	44.83	54.00	-9.17	22.02	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 62,5.31G,BW40M	Humidity (%RH)	57.0

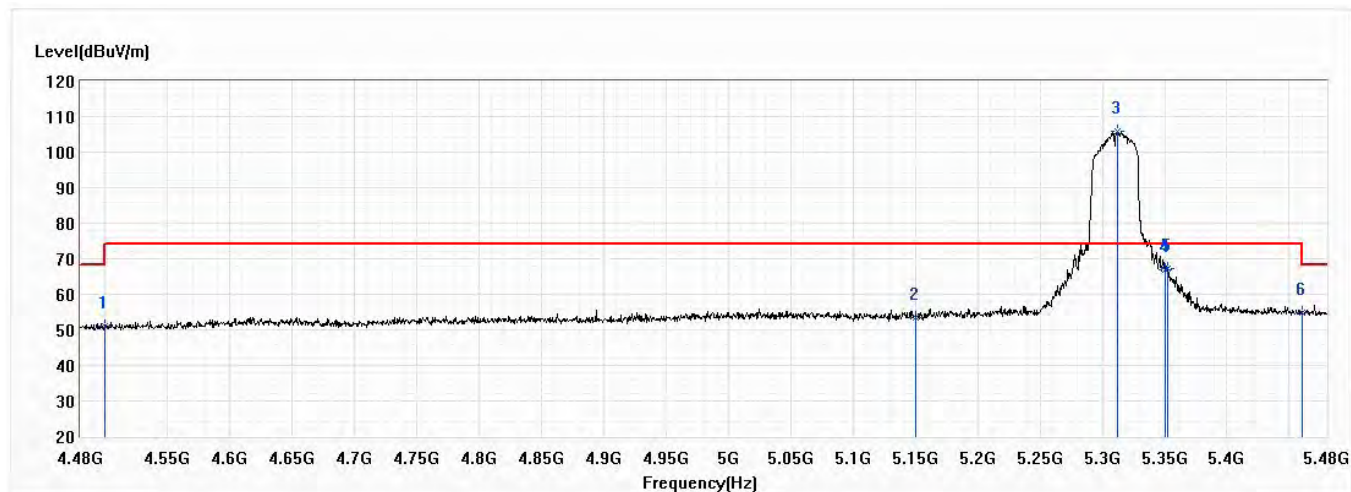


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.09	74.00	-22.91	30.85	20.24	PK
2	5150.000	53.50	74.00	-20.50	30.99	22.51	PK
! 3	5312.000	105.77	74.00	31.77	83.11	22.66	PK
4	5350.000	66.95	74.00	-7.05	44.25	22.70	PK
5	5352.000	67.14	74.00	-6.86	44.44	22.70	PK
6	5460.000	55.00	74.00	-19.00	32.19	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 62,5.31G,BW40M	Humidity (%RH)	57.0

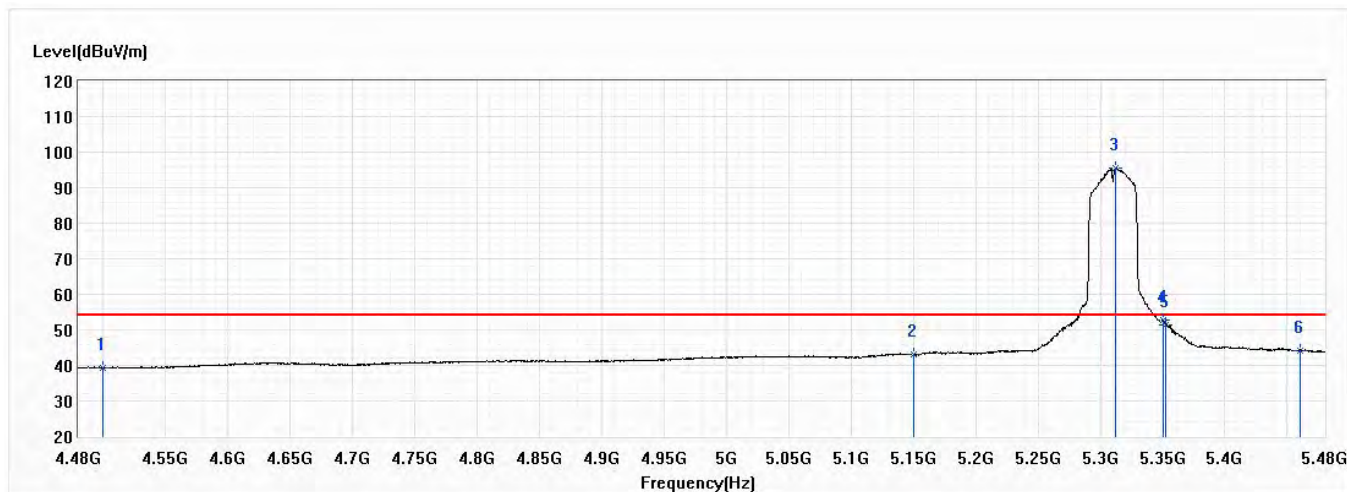


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.30	54.00	-14.70	19.06	20.24	AV
2	5150.000	42.99	54.00	-11.01	20.48	22.51	AV
! 3	5312.500	95.62	54.00	41.62	72.96	22.66	AV
4	5350.000	52.66	54.00	-1.34	29.96	22.70	AV
5	5352.500	51.53	54.00	-2.47	28.83	22.70	AV
6	5460.000	44.23	54.00	-9.77	21.42	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 100,5.5G,BW20M	Humidity (%RH)	57.0

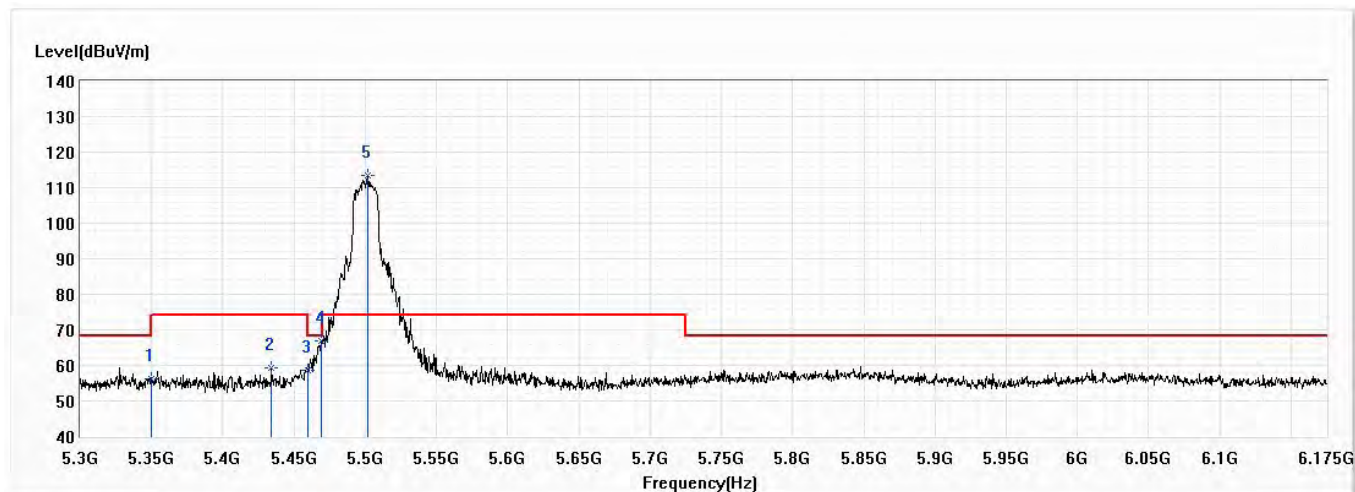


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.16	74.00	-17.84	33.46	22.70	PK
2	5434.313	59.19	74.00	-14.81	36.41	22.78	PK
3	5460.000	58.68	74.00	-15.32	35.87	22.81	PK
4	5468.875	66.96	68.20	-1.24	44.14	22.82	PK
! 5	5502.125	113.59	74.00	39.59	90.74	22.85	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 100,5.5G,BW20M	Humidity (%RH)	57.0

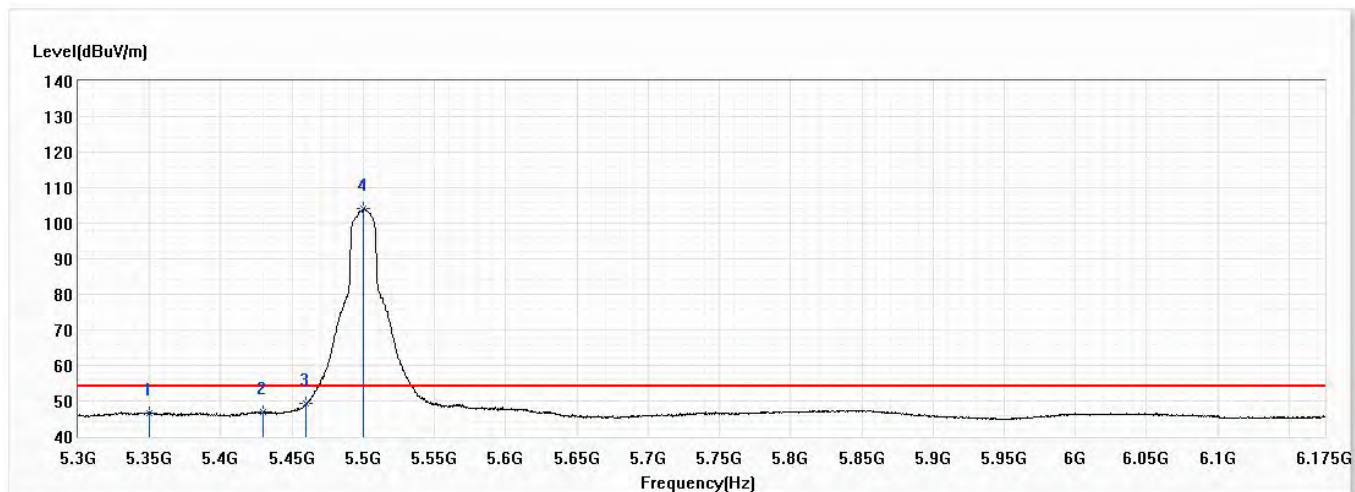


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	46.38	54.00	-7.62	23.68	22.70	AV
2	5429.938	46.89	54.00	-7.11	24.11	22.78	AV
3	5460.000	49.15	54.00	-4.85	26.34	22.81	AV
! 4	5500.375	104.07	54.00	50.07	81.22	22.85	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 100,5.5G,BW20M	Humidity (%RH)	57.0

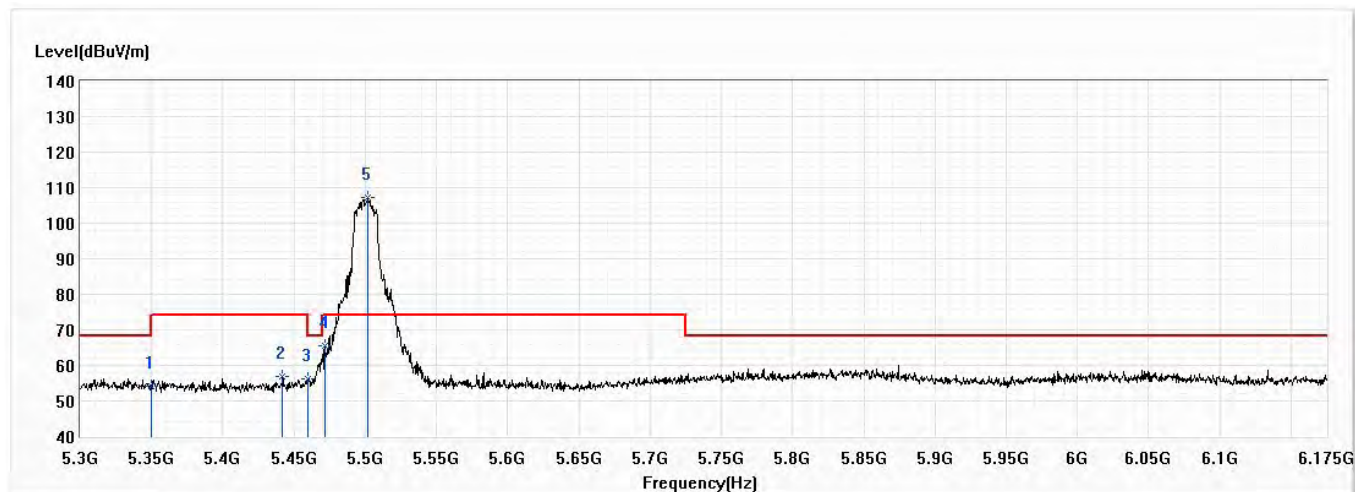


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.08	74.00	-19.92	31.38	22.70	PK
2	5441.750	56.79	74.00	-17.21	33.99	22.80	PK
3	5460.000	56.04	74.00	-17.96	33.23	22.81	PK
4	5471.500	65.48	74.00	-8.52	42.66	22.82	PK
! 5	5502.125	107.07	74.00	33.07	84.22	22.85	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 100,5.5G,BW20M	Humidity (%RH)	57.0

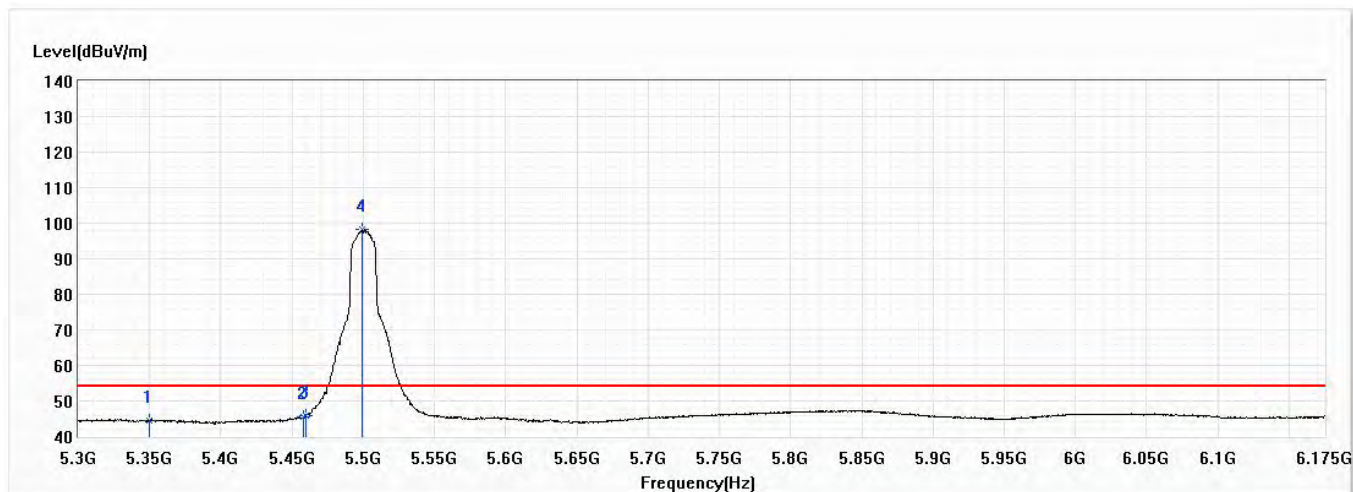


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.43	54.00	-9.57	21.73	22.70	AV
2	5457.938	45.46	54.00	-8.54	22.66	22.80	AV
3	5460.000	46.00	54.00	-8.00	23.19	22.81	AV
! 4	5499.063	98.17	54.00	44.17	75.32	22.85	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a, Ch 116, 5.58G, BW20M	Humidity (%RH)	57.0

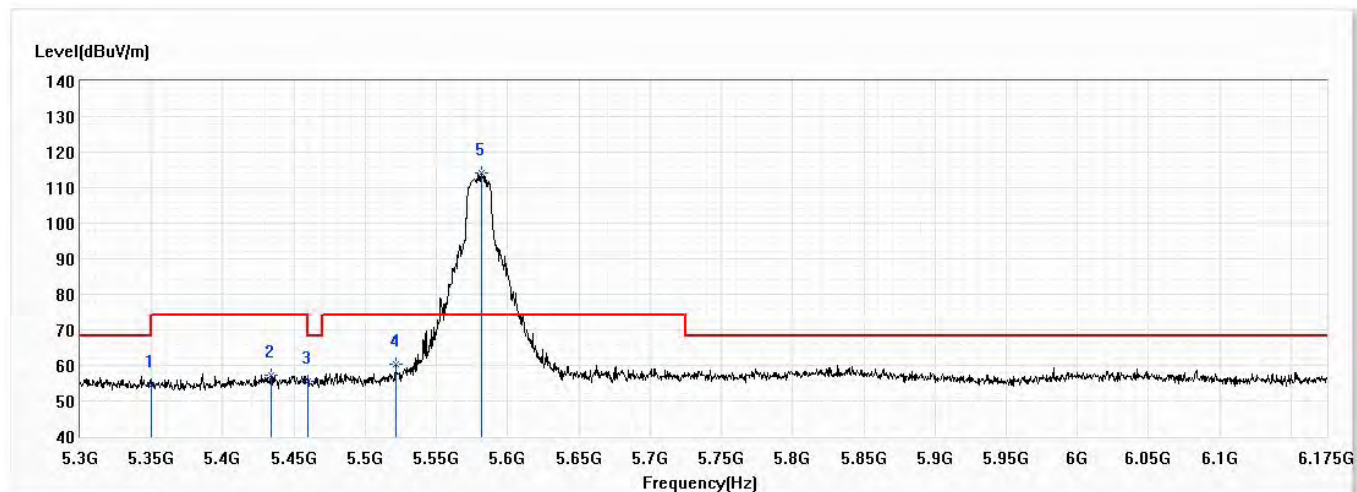


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.45	74.00	-19.55	31.75	22.70	PK
2	5434.313	57.28	74.00	-16.72	34.50	22.78	PK
3	5460.000	55.52	74.00	-18.48	32.71	22.81	PK
4	5521.375	60.42	74.00	-13.58	37.49	22.93	PK
! 5	5581.750	114.17	74.00	40.17	91.01	23.16	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 116,5.58G,BW20M	Humidity (%RH)	57.0

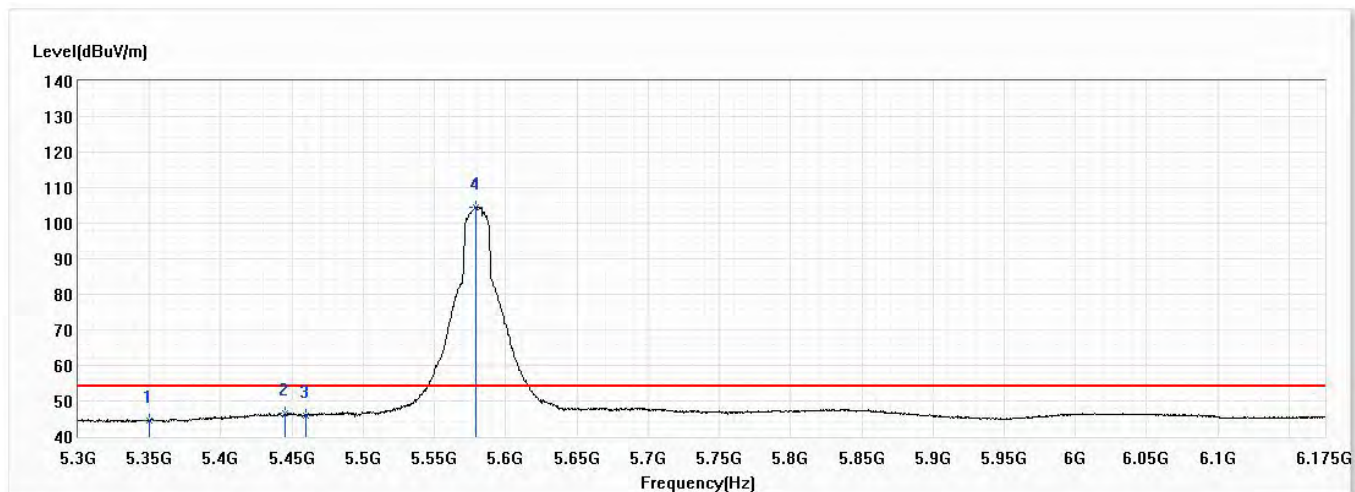


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.57	54.00	-9.43	21.87	22.70	AV
2	5444.813	46.49	54.00	-7.51	23.69	22.80	AV
3	5460.000	45.99	54.00	-8.01	23.18	22.81	AV
! 4	5578.688	104.62	54.00	50.62	81.46	23.16	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 116,5.58G,BW20M	Humidity (%RH)	57.0

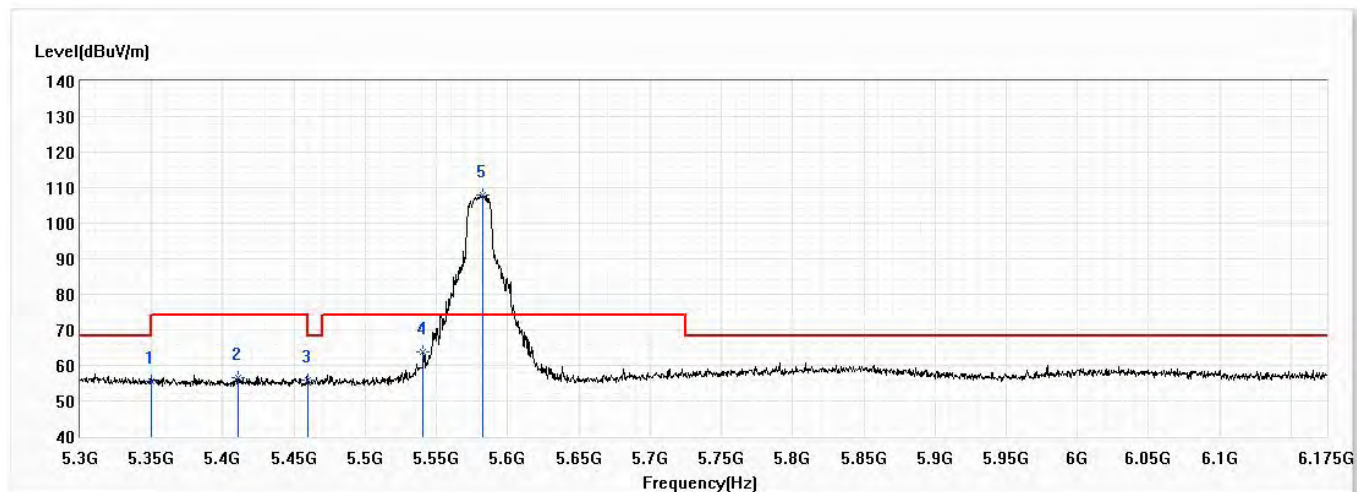


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.66	74.00	-18.34	32.96	22.70	PK
2	5410.688	56.68	74.00	-17.32	33.92	22.76	PK
3	5460.000	55.87	74.00	-18.13	33.06	22.81	PK
4	5540.625	63.78	74.00	-10.22	40.76	23.02	PK
! 5	5582.188	108.03	74.00	34.03	84.84	23.19	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 116,5.58G,BW20M	Humidity (%RH)	57.0

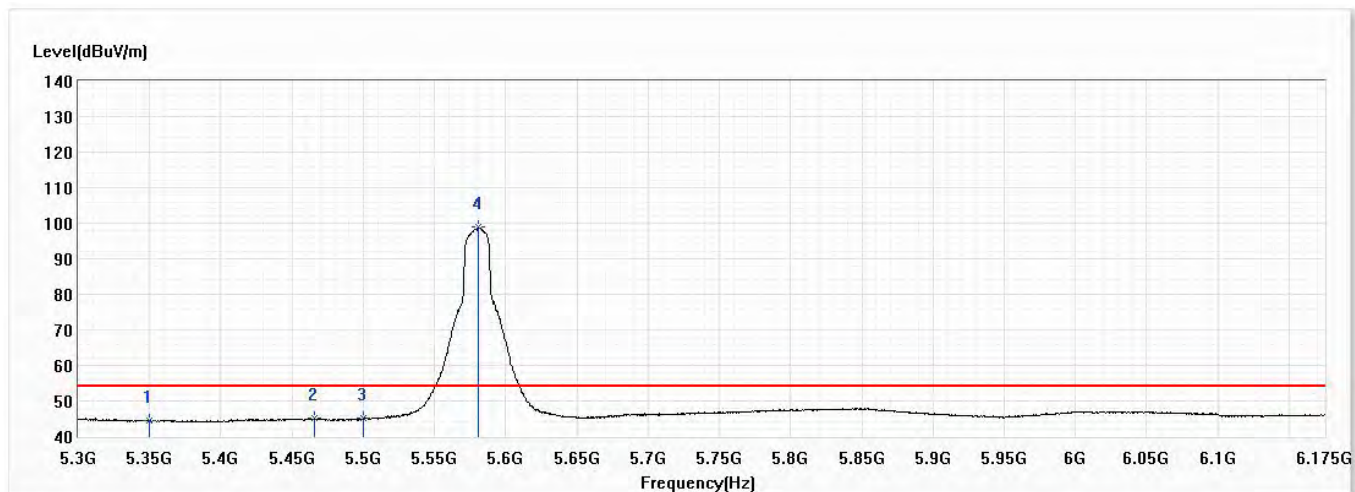


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.32	54.00	-9.68	21.62	22.70	AV
2	5465.375	45.15	54.00	-8.85	22.33	22.82	AV
3	5500.000	45.15	54.00	-8.85	22.30	22.85	AV
! 4	5580.875	98.93	54.00	44.93	75.77	23.16	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 140,5.7G,BW20M	Humidity (%RH)	57.0

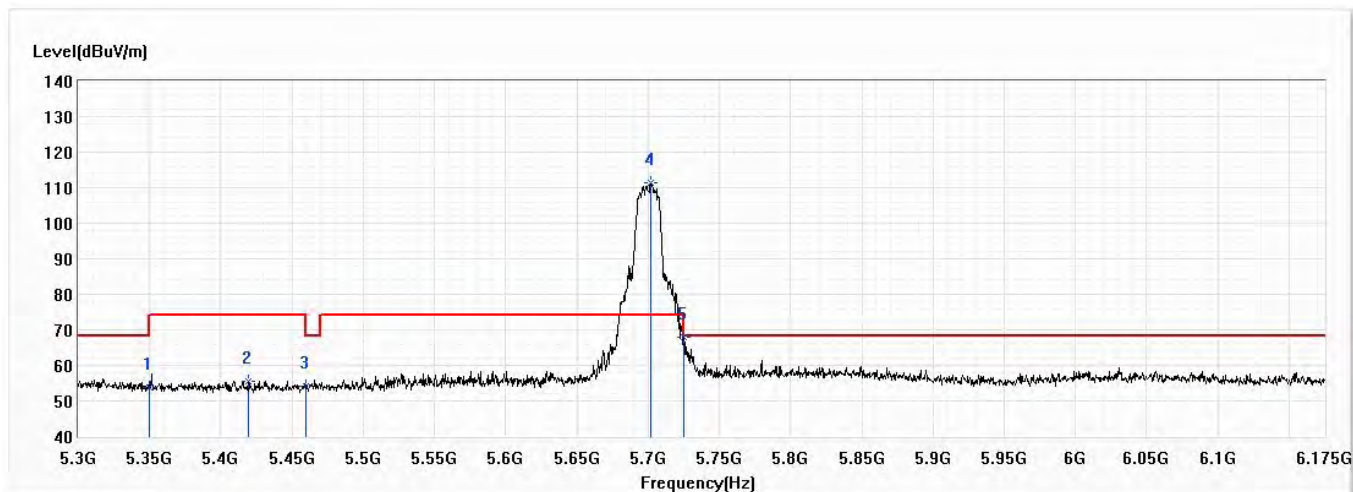


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.96	74.00	-20.04	31.26	22.70	PK
2	5419.000	55.53	74.00	-18.47	32.76	22.77	PK
3	5460.000	54.15	74.00	-19.85	31.34	22.81	PK
! 4	5701.625	111.26	74.00	37.26	87.62	23.64	PK
5	5725.250	67.97	68.20	-0.23	44.22	23.75	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 140,5.7G,BW20M	Humidity (%RH)	57.0

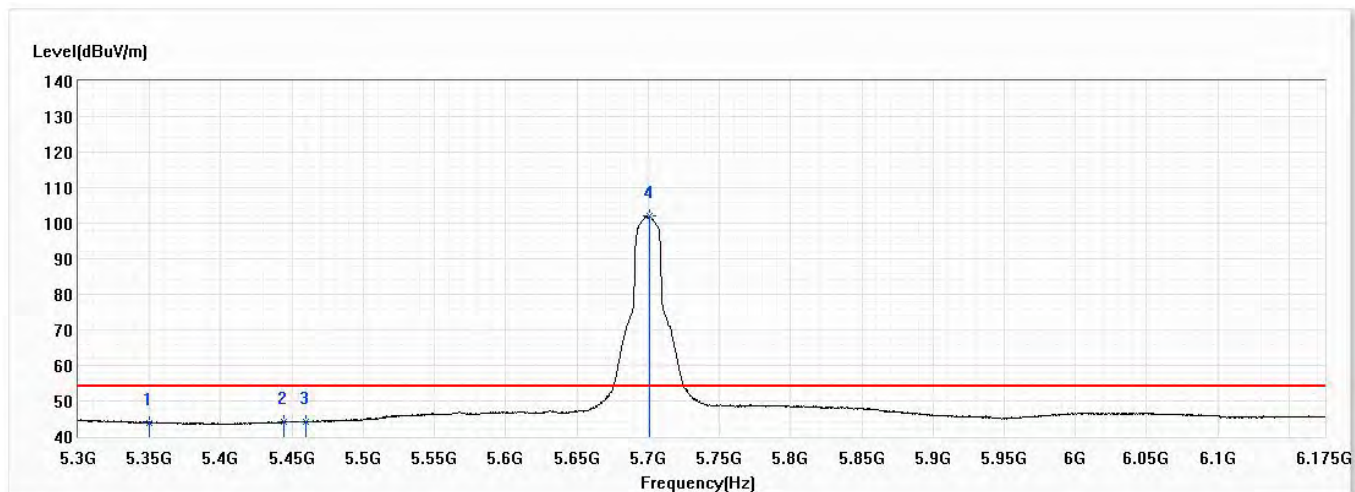


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.88	54.00	-10.12	21.18	22.70	AV
2	5443.938	44.23	54.00	-9.77	21.43	22.80	AV
3	5460.000	44.17	54.00	-9.83	21.36	22.81	AV
! 4	5700.750	102.12	54.00	48.12	78.48	23.64	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 140,5.7G,BW20M	Humidity (%RH)	57.0

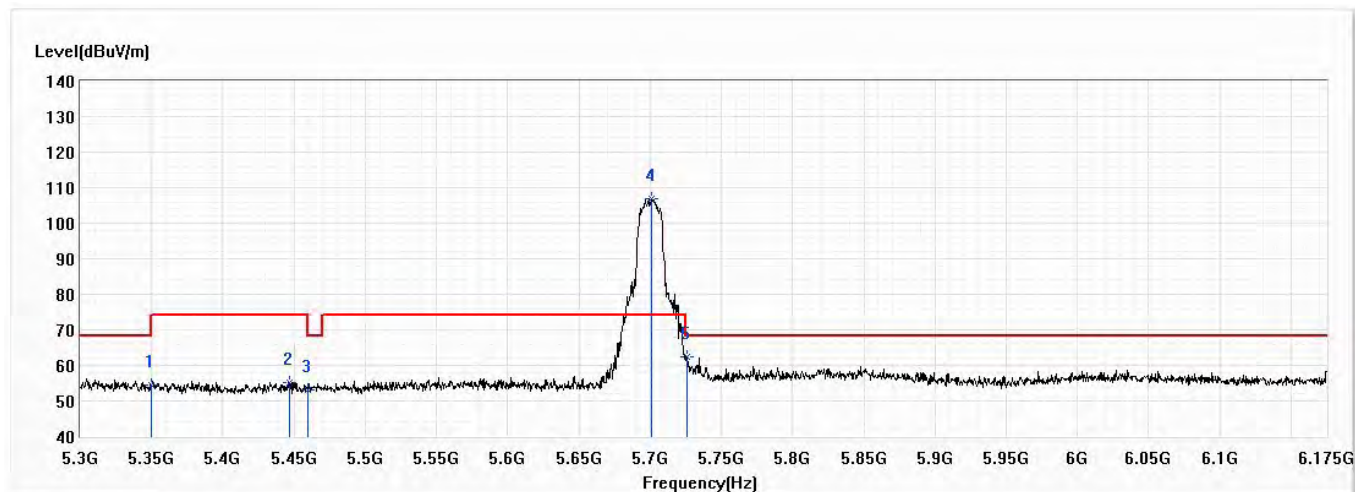


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.53	74.00	-19.47	31.83	22.70	PK
2	5446.563	55.16	74.00	-18.84	32.36	22.80	PK
3	5460.000	53.07	74.00	-20.93	30.26	22.81	PK
! 4	5701.188	107.04	74.00	33.04	83.40	23.64	PK
5	5725.688	62.26	68.20	-5.94	38.51	23.75	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 140,5.7G,BW20M	Humidity (%RH)	57.0

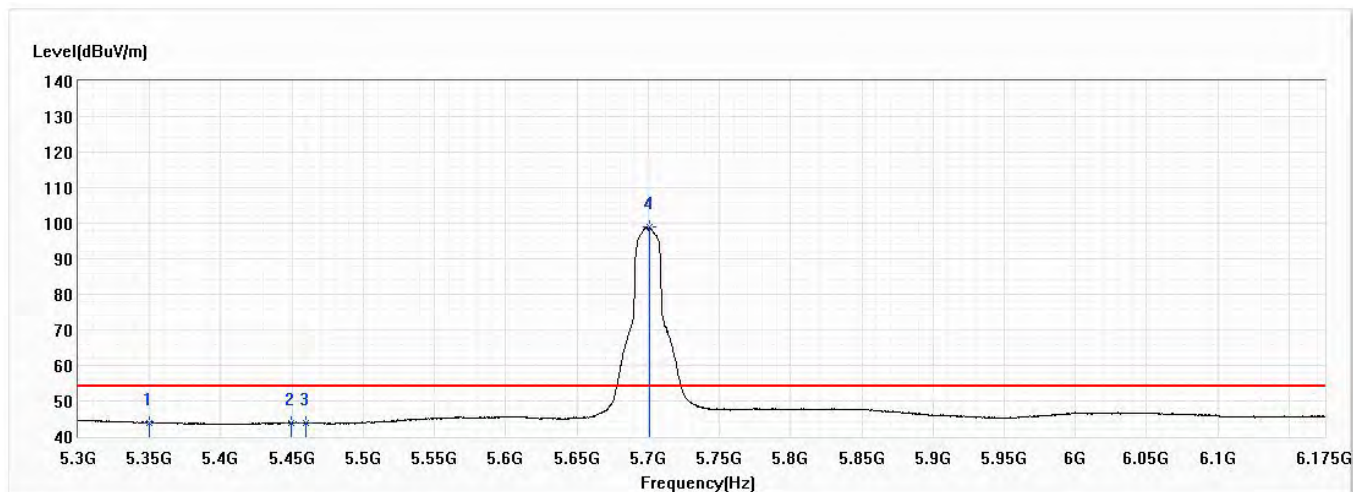


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.89	54.00	-10.11	21.19	22.70	AV
2	5449.625	43.91	54.00	-10.09	21.11	22.80	AV
3	5460.000	43.76	54.00	-10.24	20.95	22.81	AV
! 4	5701.188	98.84	54.00	44.84	75.20	23.64	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 100,5.5G,BW20M	Humidity (%RH)	57.0

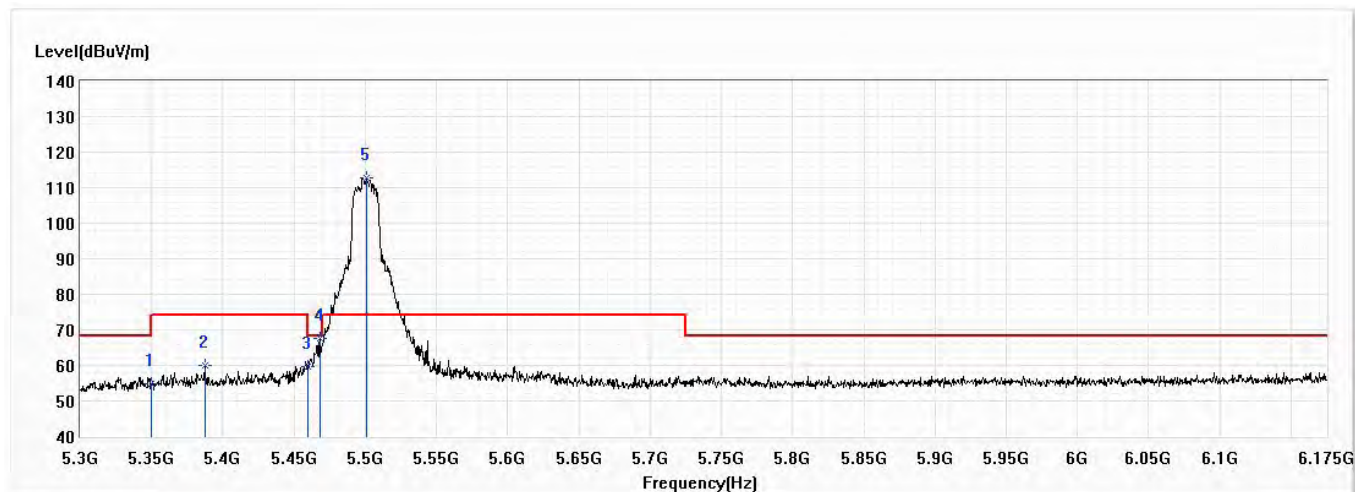


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.70	74.00	-19.30	32.00	22.70	PK
2	5387.500	59.84	74.00	-14.16	37.11	22.73	PK
3	5460.000	59.52	74.00	-14.48	36.71	22.81	PK
4	5468.000	67.55	68.20	-0.65	44.73	22.82	PK
! 5	5501.250	112.81	74.00	38.81	89.96	22.85	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 100,5.5G,BW20M	Humidity (%RH)	57.0

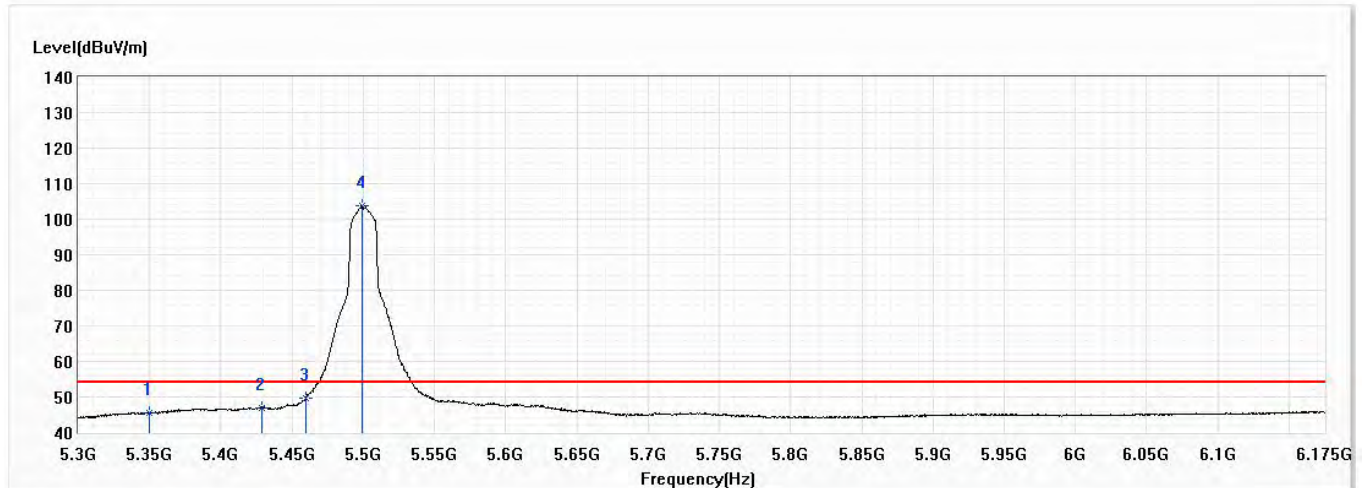


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.48	54.00	-8.52	22.78	22.70	AV
2	5429.063	46.95	54.00	-7.05	24.17	22.78	AV
3	5460.000	49.74	54.00	-4.26	26.93	22.81	AV
! 4	5499.063	103.90	54.00	49.90	81.05	22.85	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 100,5.5G,BW20M	Humidity (%RH)	57.0

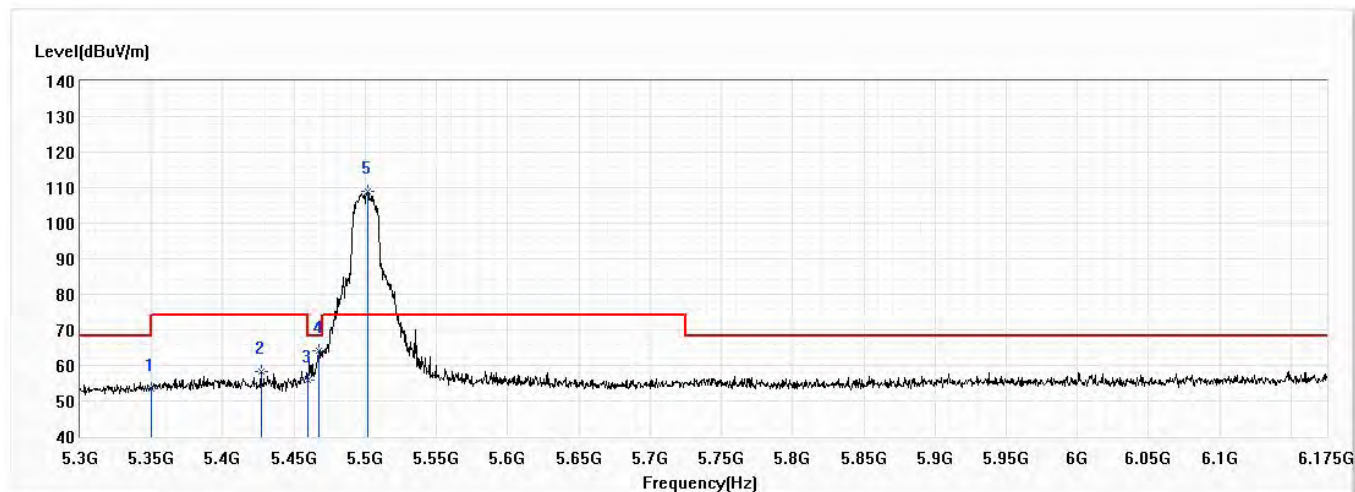


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.54	74.00	-20.46	30.84	22.70	PK
2	5426.875	58.39	74.00	-15.61	35.61	22.78	PK
3	5460.000	55.92	74.00	-18.08	33.11	22.81	PK
4	5467.563	64.28	68.20	-3.92	41.46	22.82	PK
! 5	5502.125	109.08	74.00	35.08	86.23	22.85	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 100,5.5G,BW20M	Humidity (%RH)	57.0

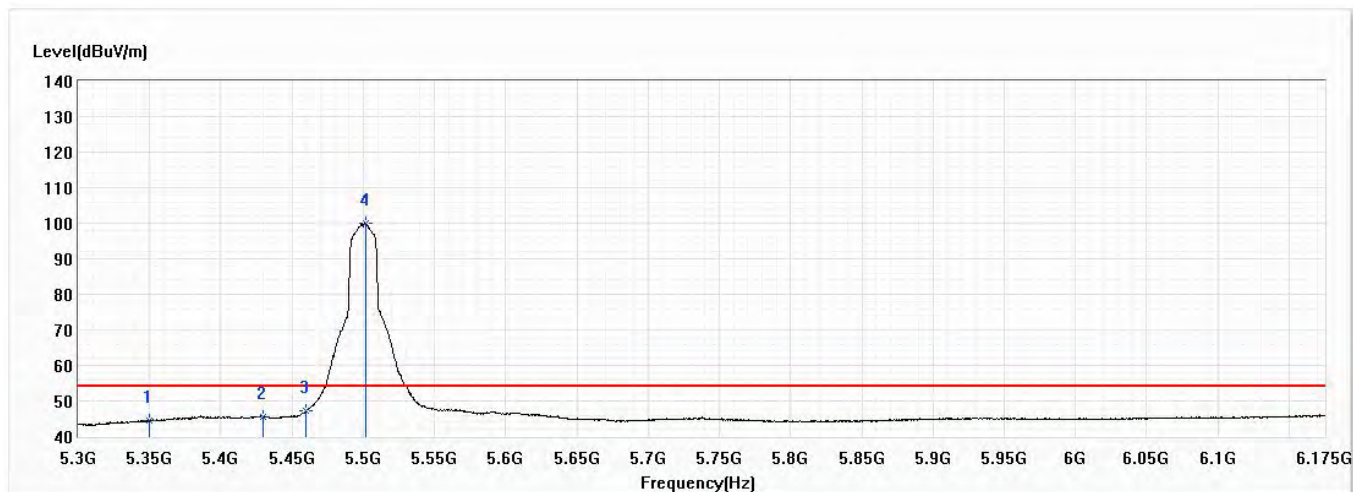


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.34	54.00	-9.66	21.64	22.70	AV
2	5429.938	45.63	54.00	-8.37	22.85	22.78	AV
3	5460.000	47.25	54.00	-6.75	24.44	22.81	AV
! 4	5501.688	100.03	54.00	46.03	77.18	22.85	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 116,5.58G,BW20M	Humidity (%RH)	57.0

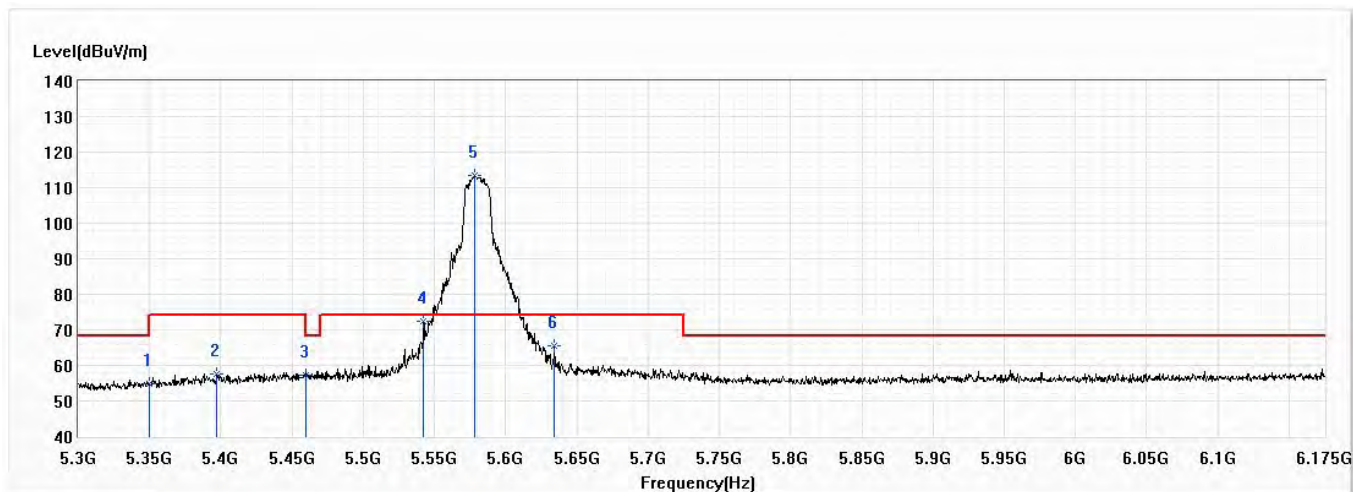


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.83	74.00	-19.17	32.13	22.70	PK
2	5397.125	57.52	74.00	-16.48	34.77	22.75	PK
3	5460.000	57.23	74.00	-16.77	34.42	22.81	PK
4	5542.375	72.29	74.00	-1.71	49.27	23.02	PK
! 5	5578.250	113.37	74.00	39.37	90.21	23.16	PK
6	5634.250	65.46	74.00	-8.54	42.07	23.39	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 116,5.58G,BW20M	Humidity (%RH)	57.0

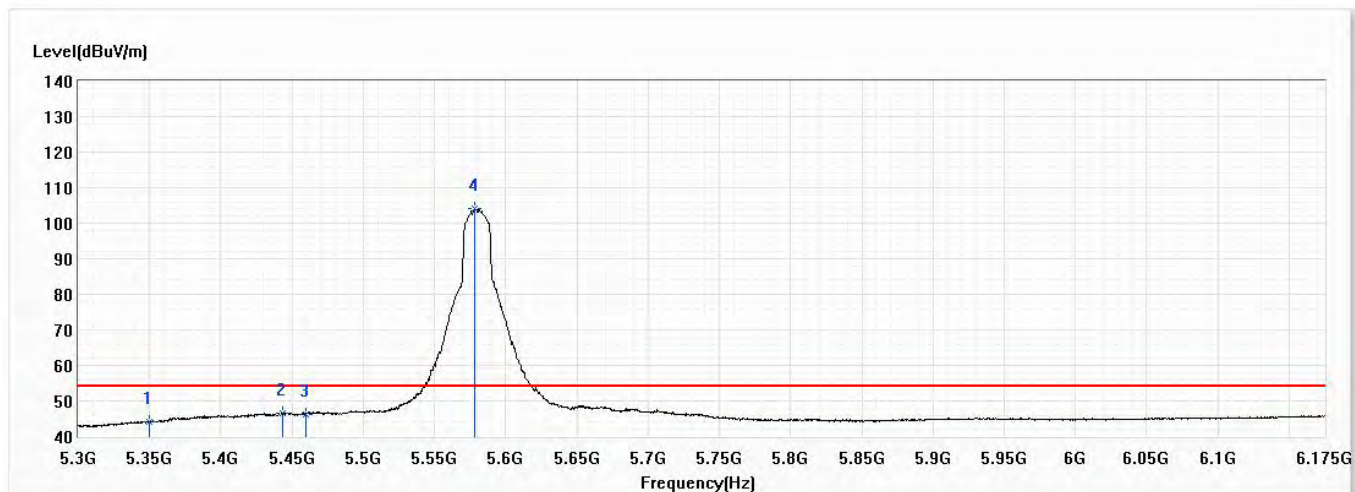


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.17	54.00	-9.83	21.47	22.70	AV
2	5443.500	46.66	54.00	-7.34	23.86	22.80	AV
3	5460.000	46.37	54.00	-7.63	23.56	22.81	AV
! 4	5578.250	104.07	54.00	50.07	80.91	23.16	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 116,5.58G,BW20M	Humidity (%RH)	57.0

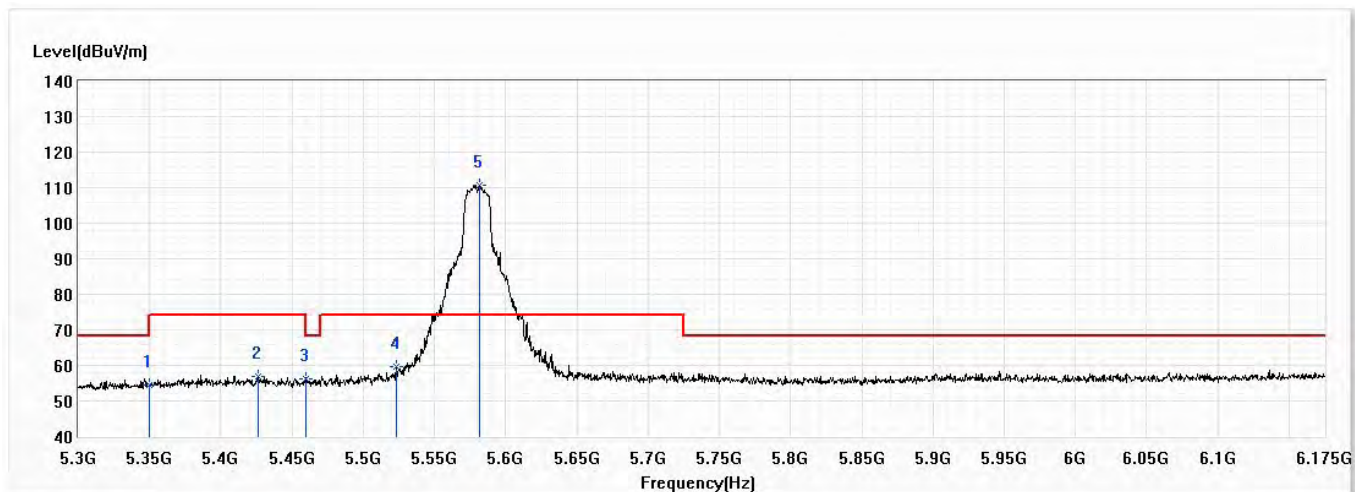


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.38	74.00	-19.62	31.68	22.70	PK
2	5426.438	56.88	74.00	-17.12	34.10	22.78	PK
3	5460.000	56.06	74.00	-17.94	33.25	22.81	PK
4	5523.125	59.67	74.00	-14.33	36.73	22.94	PK
! 5	5581.313	110.60	74.00	36.60	87.44	23.16	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 116,5.58G,BW20M	Humidity (%RH)	57.0

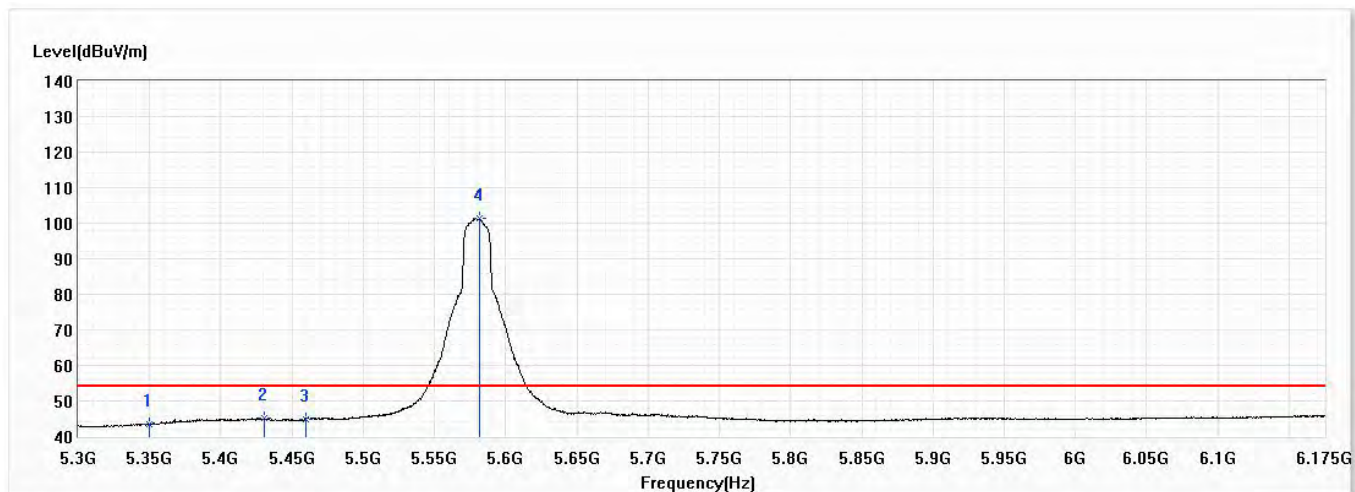


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.38	54.00	-10.62	20.68	22.70	AV
2	5430.375	45.14	54.00	-8.86	22.36	22.78	AV
3	5460.000	44.97	54.00	-9.03	22.16	22.81	AV
! 4	5581.313	101.41	54.00	47.41	78.25	23.16	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 140,5.7G,BW20M	Humidity (%RH)	57.0

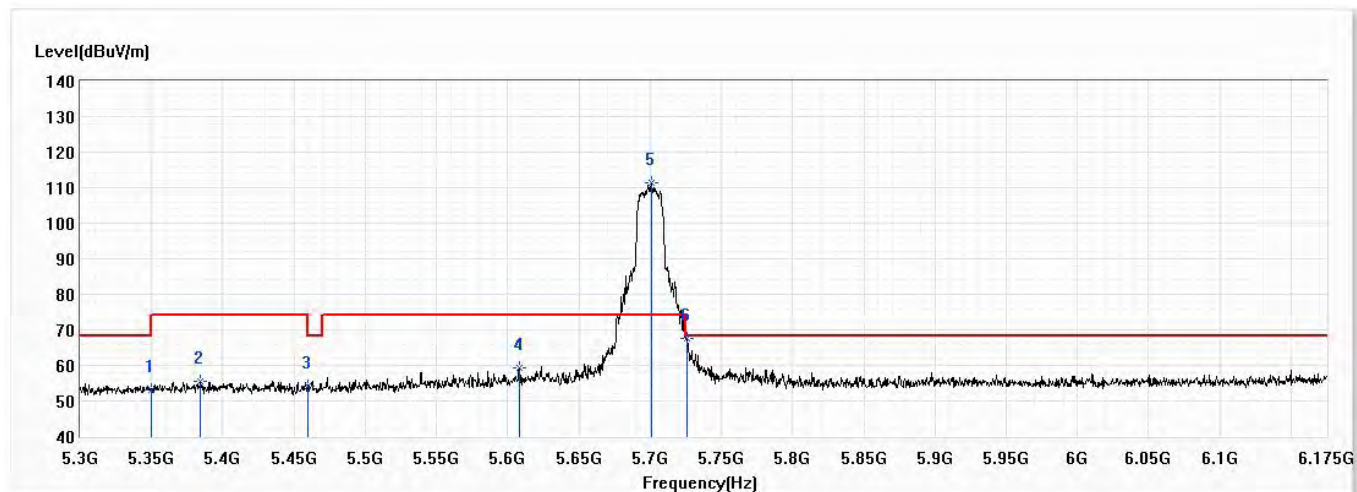


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.20	74.00	-20.80	30.50	22.70	PK
2	5384.438	55.44	74.00	-18.56	32.71	22.73	PK
3	5460.000	54.12	74.00	-19.88	31.31	22.81	PK
4	5608.438	59.16	74.00	-14.84	35.88	23.28	PK
! 5	5700.750	111.35	74.00	37.35	87.71	23.64	PK
6	5725.688	67.56	68.20	-0.64	43.81	23.75	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 140,5.7G,BW20M	Humidity (%RH)	57.0

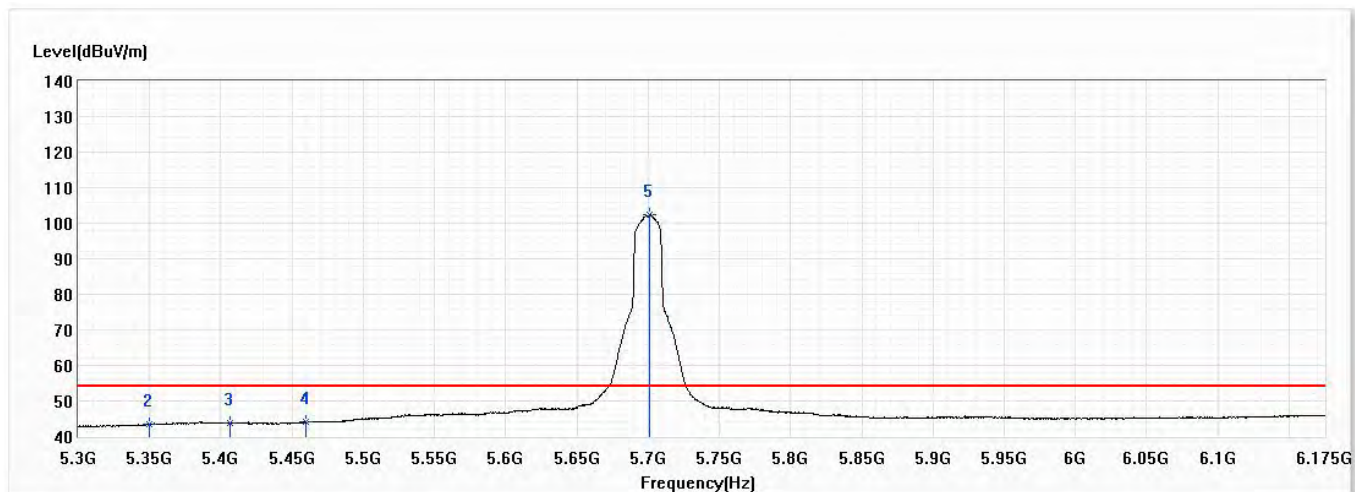


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.93	54.00	-11.07	22.69	20.24	AV
2	5350.000	43.40	54.00	-10.60	20.70	22.70	AV
3	5406.750	43.91	54.00	-10.09	21.16	22.75	AV
4	5460.000	44.07	54.00	-9.93	21.26	22.81	AV
! 5	5701.188	102.50	54.00	48.50	78.86	23.64	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 140,5.7G,BW20M	Humidity (%RH)	57.0

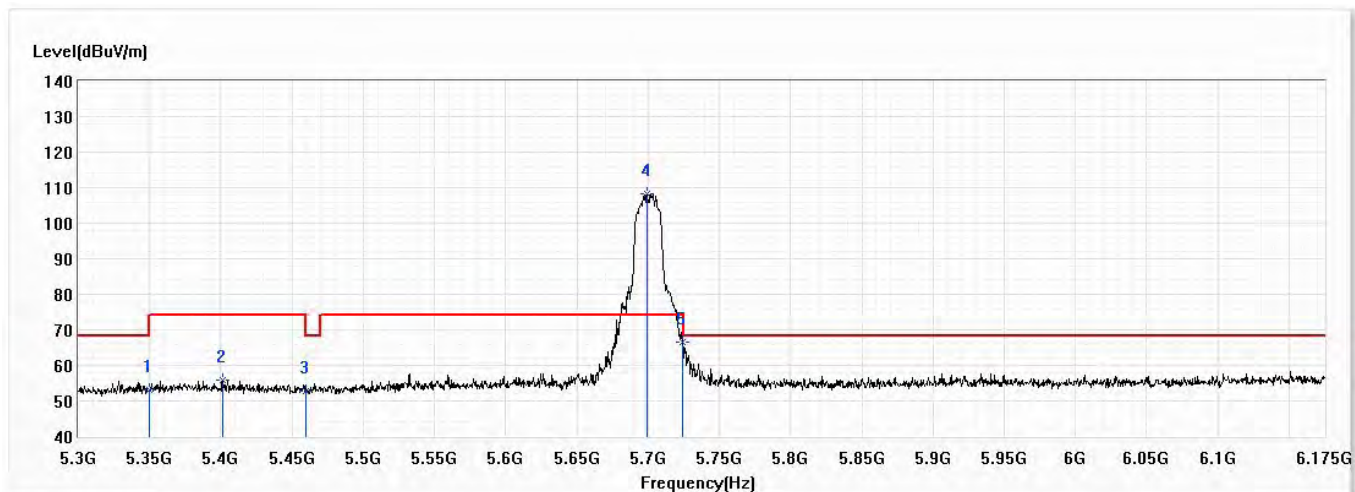


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.06	74.00	-20.94	30.36	22.70	PK
2	5401.063	55.82	74.00	-18.18	33.07	22.75	PK
3	5460.000	52.88	74.00	-21.12	30.07	22.81	PK
! 4	5699.000	108.44	74.00	34.44	84.80	23.64	PK
5	5724.375	66.56	74.00	-7.44	42.83	23.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 140,5.7G,BW20M	Humidity (%RH)	57.0

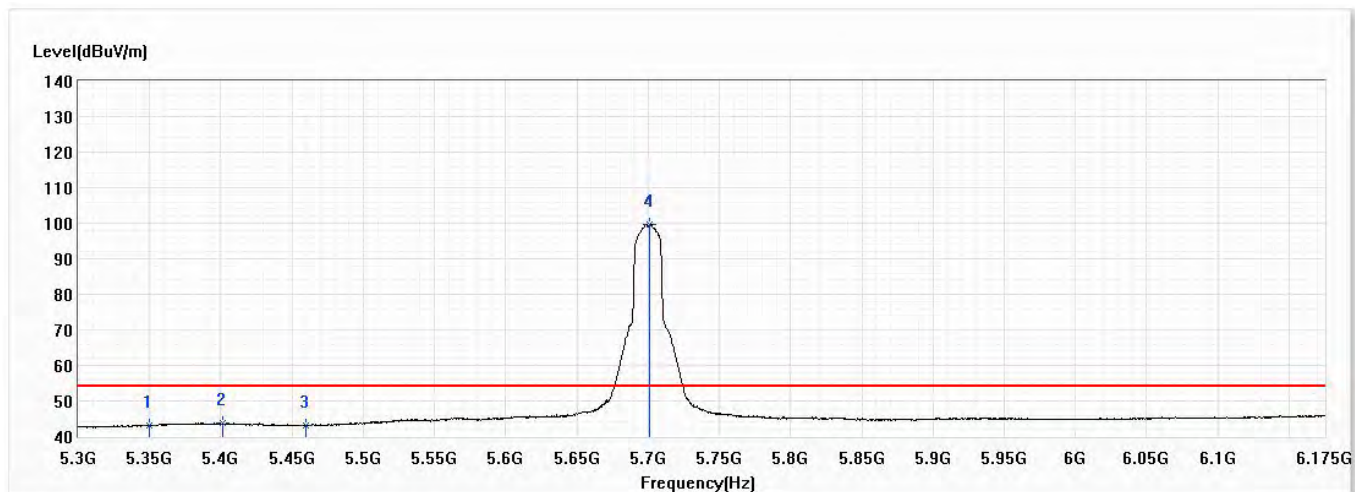


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.16	54.00	-10.84	20.46	22.70	AV
2	5401.500	43.64	54.00	-10.36	20.89	22.75	AV
3	5460.000	43.15	54.00	-10.85	20.34	22.81	AV
! 4	5700.750	99.82	54.00	45.82	76.18	23.64	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 102,5.51G,BW40M	Humidity (%RH)	57.0

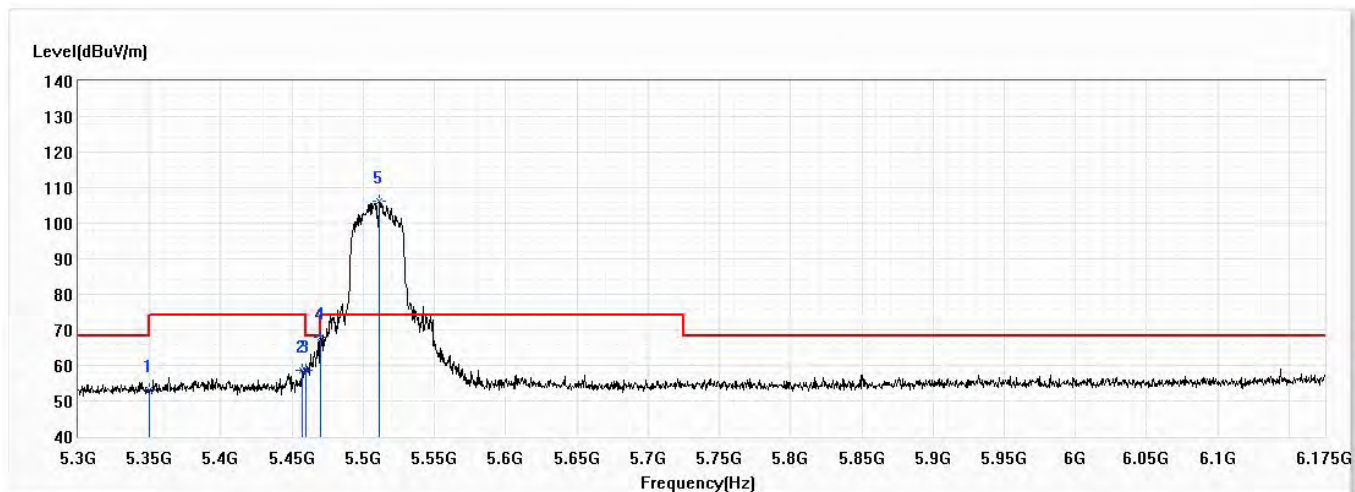


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	52.94	74.00	-21.06	30.24	22.70	PK
2	5457.063	58.65	74.00	-15.35	35.85	22.80	PK
3	5460.000	58.66	74.00	-15.34	35.85	22.81	PK
4	5469.750	68.04	68.20	-0.16	45.22	22.82	PK
! 5	5511.313	106.07	74.00	32.07	83.17	22.90	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 102,5.51G,BW40M	Humidity (%RH)	57.0

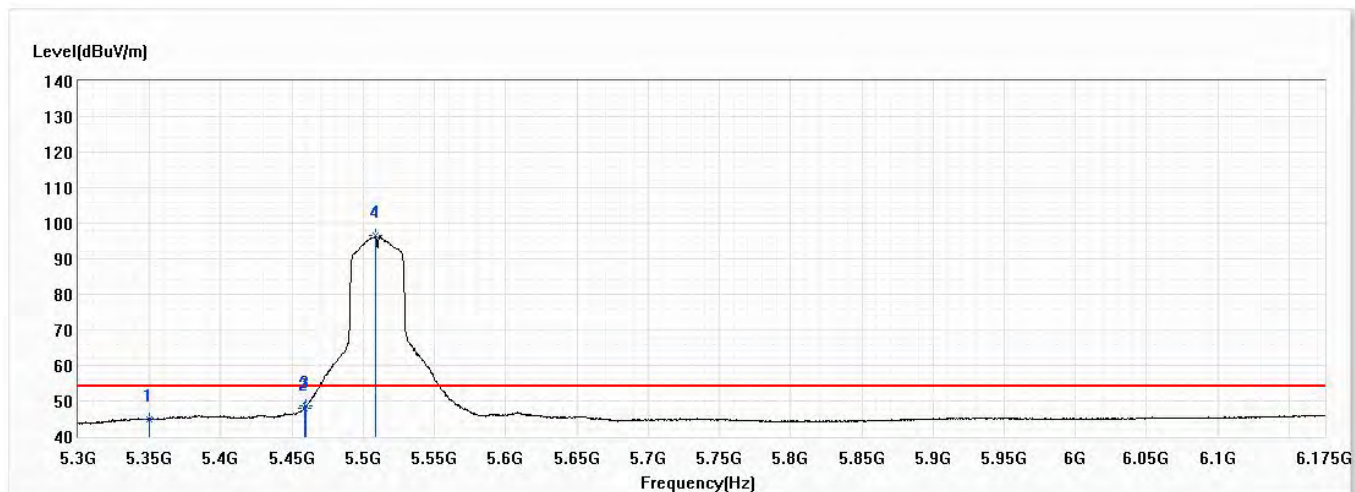


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.00	54.00	-9.00	22.30	22.70	AV
2	5458.813	47.93	54.00	-6.07	25.12	22.81	AV
3	5460.000	48.49	54.00	-5.51	25.68	22.81	AV
! 4	5508.250	96.60	54.00	42.60	73.72	22.88	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 102,5.51G,BW40M	Humidity (%RH)	57.0

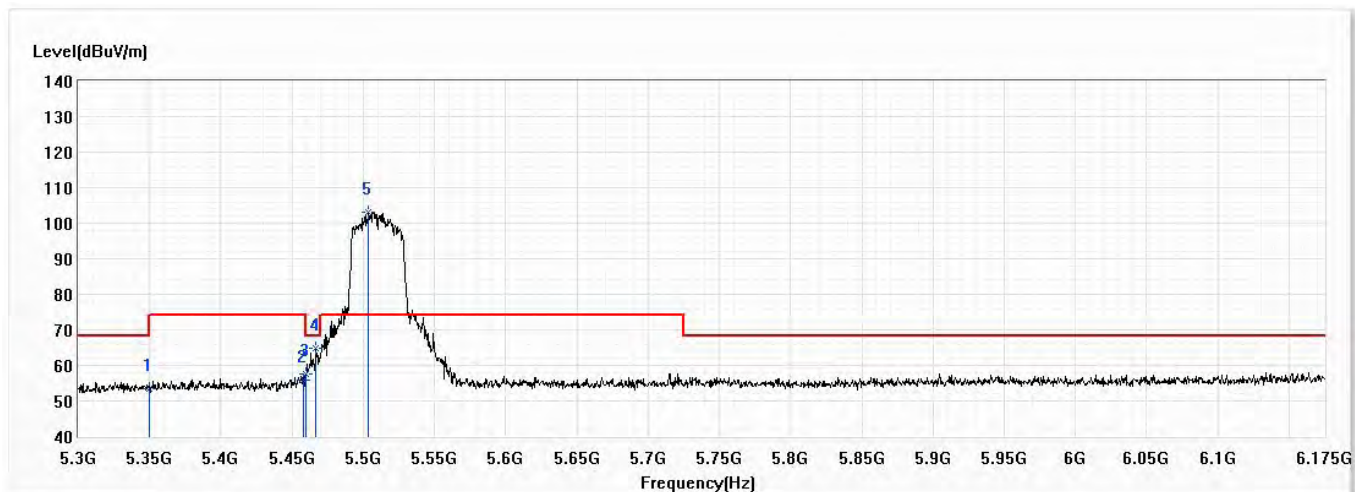


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.32	74.00	-20.68	30.62	22.70	PK
2	5457.938	55.91	74.00	-18.09	33.11	22.80	PK
3	5460.000	57.60	74.00	-16.40	34.79	22.81	PK
4	5466.688	64.84	68.20	-3.36	42.02	22.82	PK
! 5	5503.875	103.06	74.00	29.06	80.19	22.87	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 102,5.51G,BW40M	Humidity (%RH)	57.0

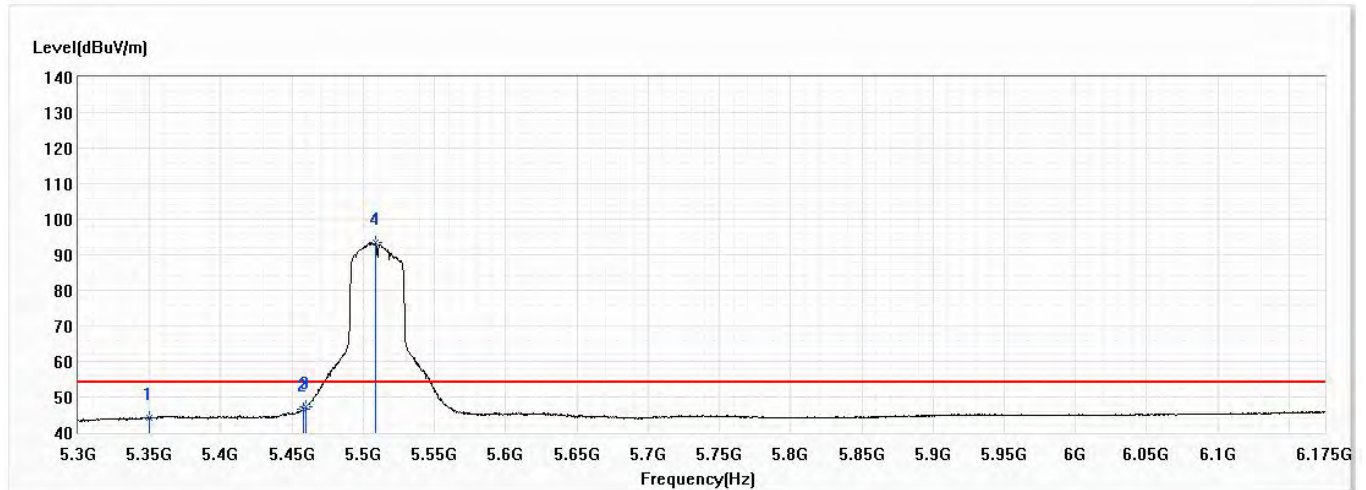


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.10	54.00	-9.90	21.40	22.70	AV
2	5457.938	46.65	54.00	-7.35	23.85	22.80	AV
3	5460.000	47.36	54.00	-6.64	24.55	22.81	AV
! 4	5508.250	93.28	54.00	39.28	70.40	22.88	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 110,5.55G,BW40M	Humidity (%RH)	57.0

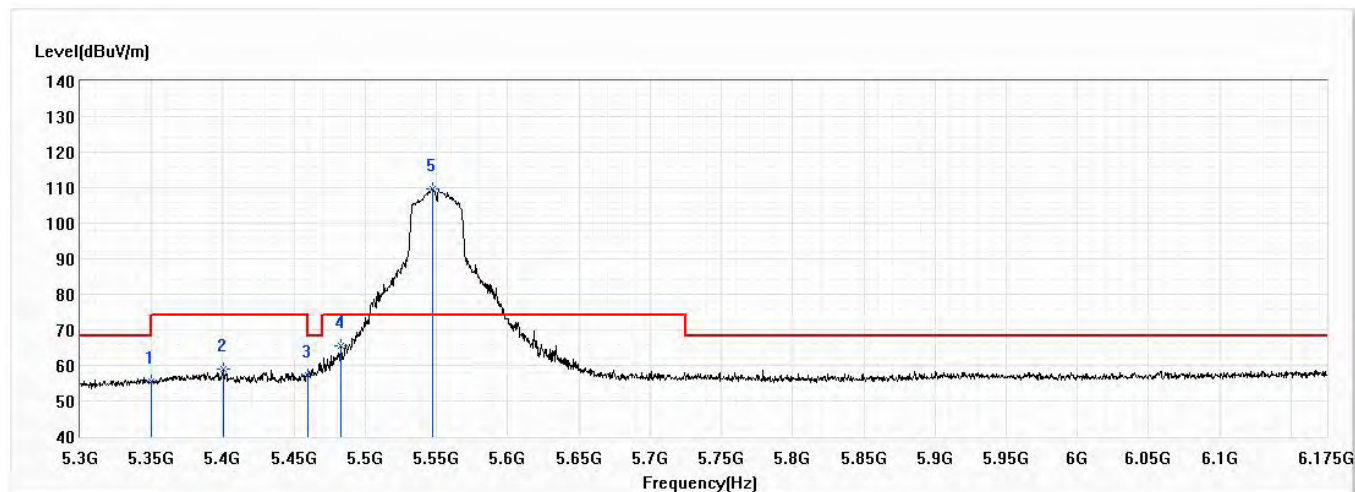


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.64	74.00	-18.36	32.94	22.70	PK
2	5400.625	58.83	74.00	-15.17	36.08	22.75	PK
3	5460.000	57.12	74.00	-16.88	34.31	22.81	PK
4	5483.313	65.61	74.00	-8.39	42.78	22.83	PK
! 5	5547.188	109.61	74.00	35.61	86.57	23.04	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 110,5.55G,BW40M	Humidity (%RH)	57.0

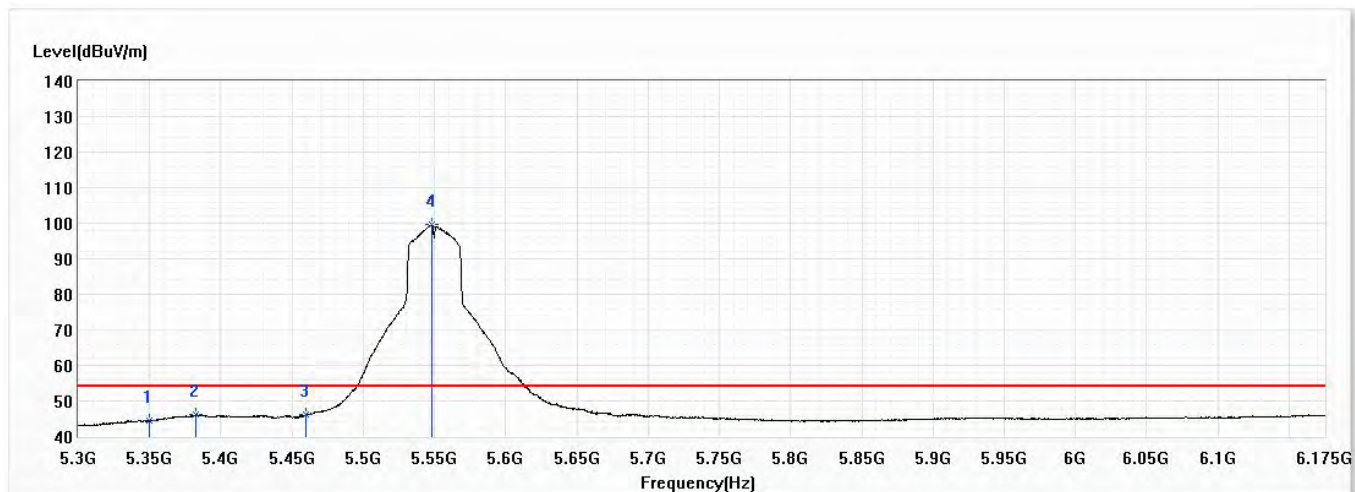


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.52	54.00	-9.48	21.82	22.70	AV
2	5382.250	46.16	54.00	-7.84	23.43	22.73	AV
3	5460.000	46.23	54.00	-7.77	23.42	22.81	AV
! 4	5548.500	99.51	54.00	45.51	76.46	23.05	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 110,5.55G,BW40M	Humidity (%RH)	57.0

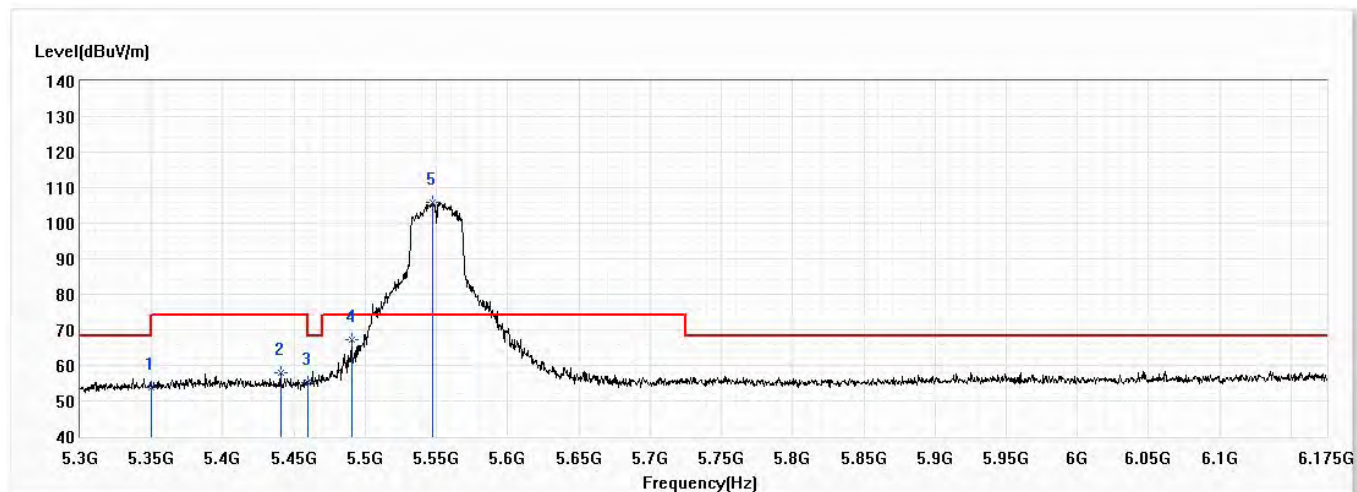


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.72	74.00	-20.28	31.02	22.70	PK
2	5440.438	57.81	74.00	-16.19	35.02	22.79	PK
3	5460.000	55.04	74.00	-18.96	32.23	22.81	PK
4	5490.313	67.21	74.00	-6.79	44.37	22.84	PK
! 5	5547.188	106.02	74.00	32.02	82.98	23.04	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 110,5.55G,BW40M	Humidity (%RH)	57.0

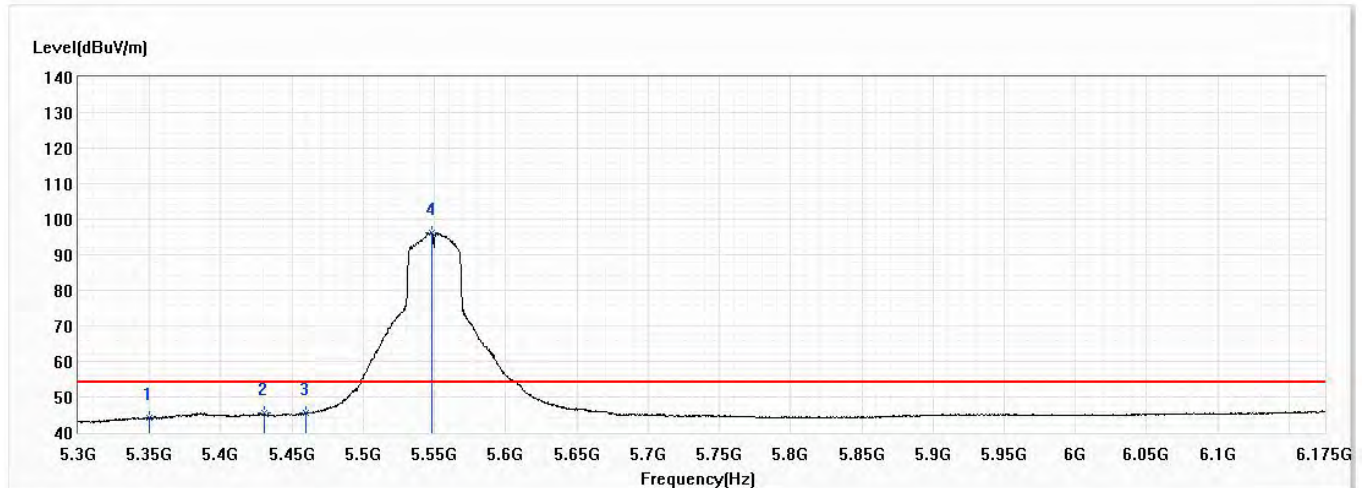


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.98	54.00	-10.02	21.28	22.70	AV
2	5430.375	45.40	54.00	-8.60	22.62	22.78	AV
3	5460.000	45.38	54.00	-8.62	22.57	22.81	AV
! 4	5548.063	96.14	54.00	42.14	73.09	23.05	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 134,5.67G,BW40M	Humidity (%RH)	57.0

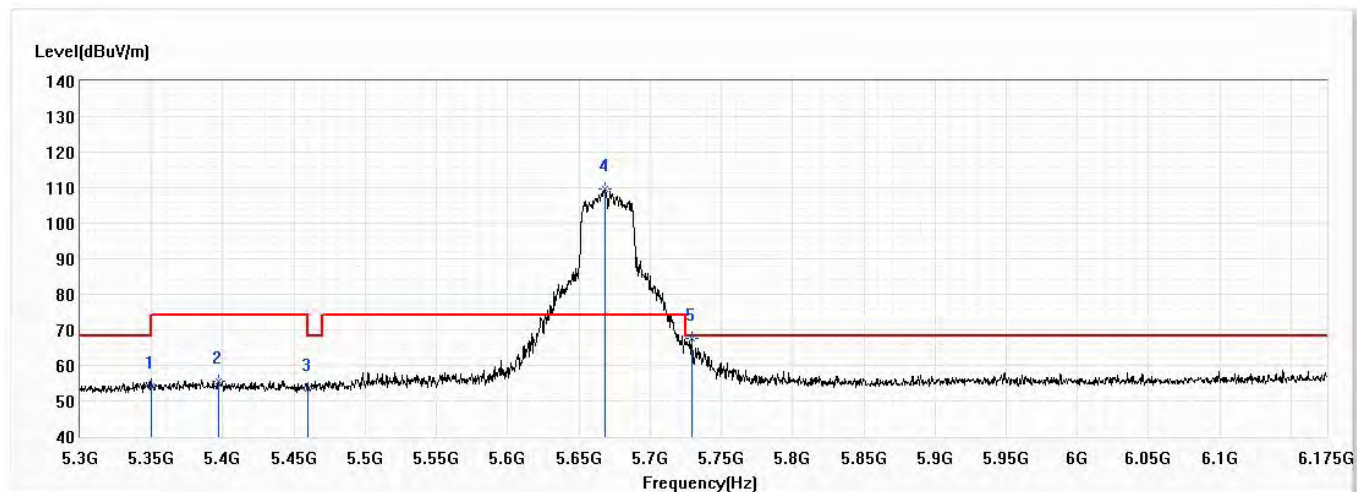


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.11	74.00	-19.89	31.41	22.70	PK
2	5396.688	55.43	74.00	-18.57	32.68	22.75	PK
3	5460.000	53.41	74.00	-20.59	30.60	22.81	PK
! 4	5668.375	109.57	74.00	35.57	86.04	23.53	PK
5	5729.188	67.42	68.20	-0.78	43.66	23.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 134,5.67G,BW40M	Humidity (%RH)	57.0

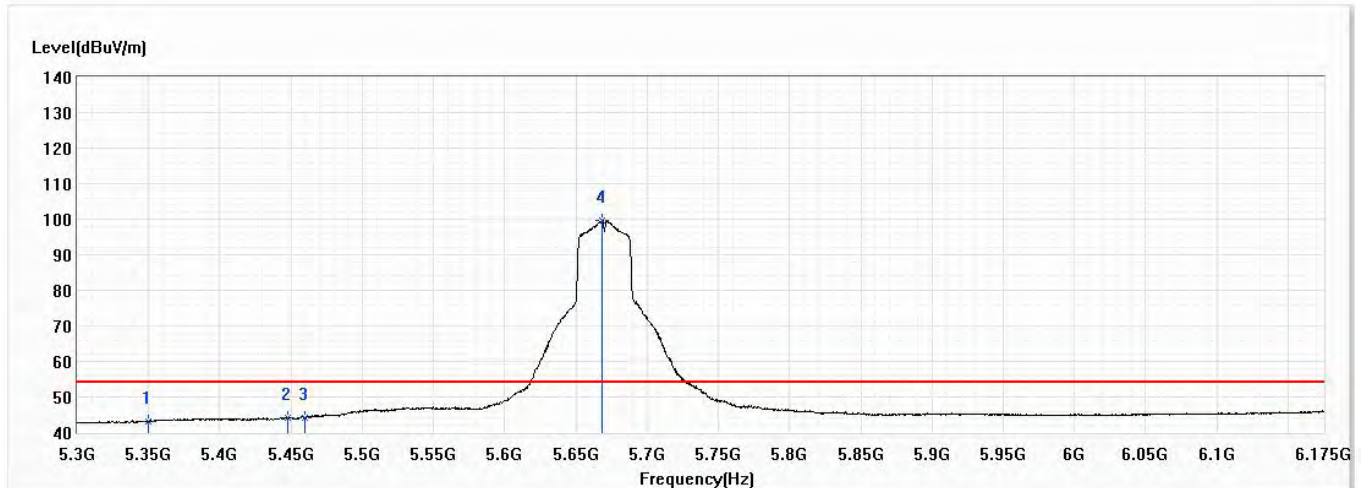


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.20	54.00	-10.80	20.50	22.70	AV
2	5447.875	44.14	54.00	-9.86	21.34	22.80	AV
3	5460.000	44.28	54.00	-9.72	21.47	22.81	AV
! 4	5668.375	99.74	54.00	45.74	76.21	23.53	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 134,5.67G,BW40M	Humidity (%RH)	57.0

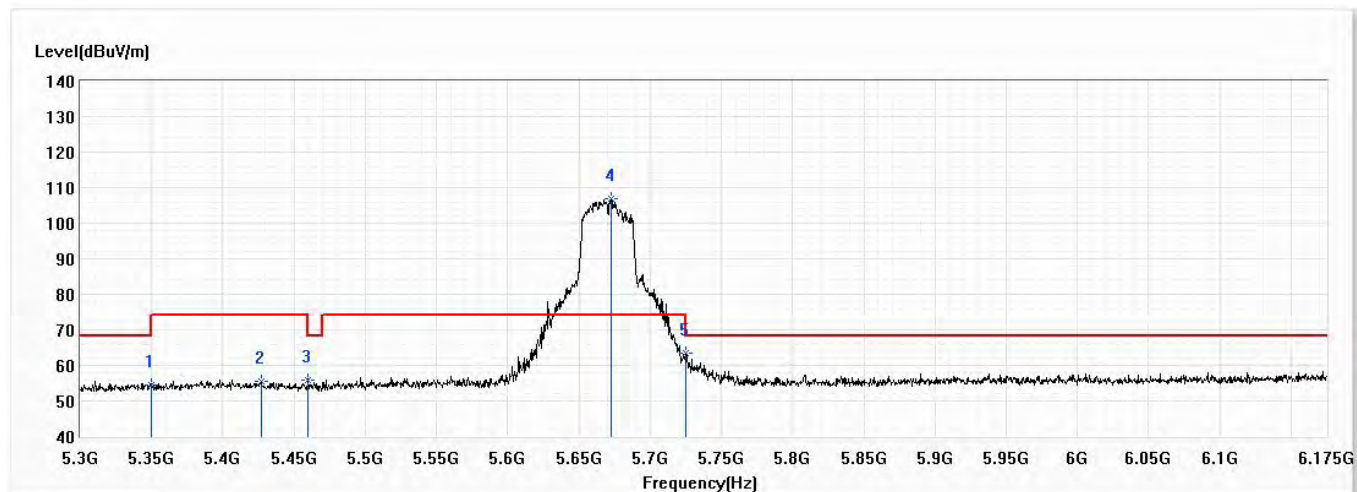


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.62	74.00	-19.38	31.92	22.70	PK
2	5426.875	55.65	74.00	-18.35	32.87	22.78	PK
3	5460.000	55.95	74.00	-18.05	33.14	22.81	PK
! 4	5672.313	106.92	74.00	32.92	83.39	23.53	PK
5	5725.250	63.51	68.20	-4.69	39.76	23.75	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 134,5.67G,BW40M	Humidity (%RH)	57.0

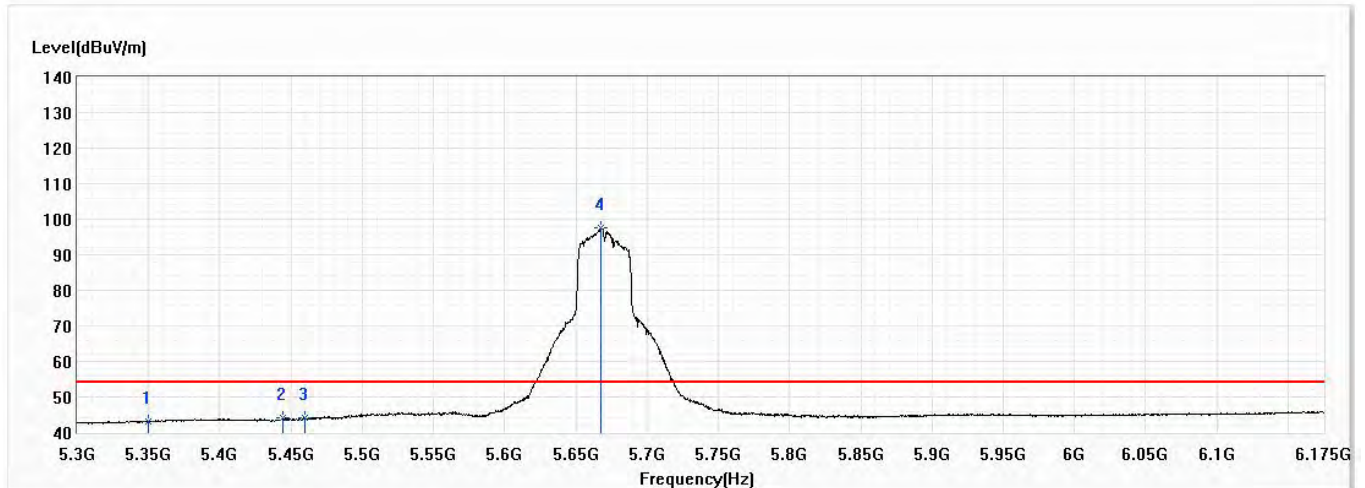


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.25	54.00	-10.75	20.55	22.70	AV
2	5443.938	43.99	54.00	-10.01	21.19	22.80	AV
3	5460.000	44.20	54.00	-9.80	21.39	22.81	AV
! 4	5667.500	97.67	54.00	43.67	74.17	23.50	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a, Ch 149, 5.745G, BW20M	Humidity (%RH)	57.0

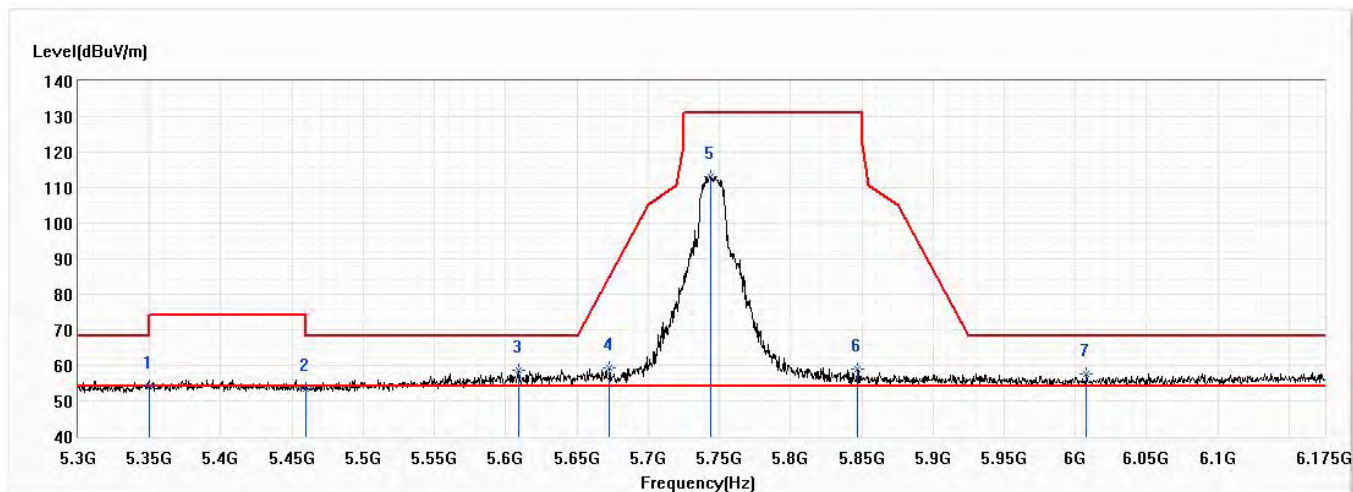


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.00	74.00	-20.00	31.30	22.70	PK
2	5460.000	53.57	74.00	-20.43	30.76	22.81	PK
* 3	5608.875	58.66	68.20	-9.54	35.38	23.28	PK
4	5672.750	59.36	85.08	-25.72	35.83	23.53	PK
5	5743.625	113.12	131.20	-18.08	89.31	23.81	PK
6	5847.313	58.99	131.20	-72.21	34.85	24.14	PK
7	6007.875	57.48	68.20	-10.72	32.86	24.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 149,5.745G,BW20M	Humidity (%RH)	57.0

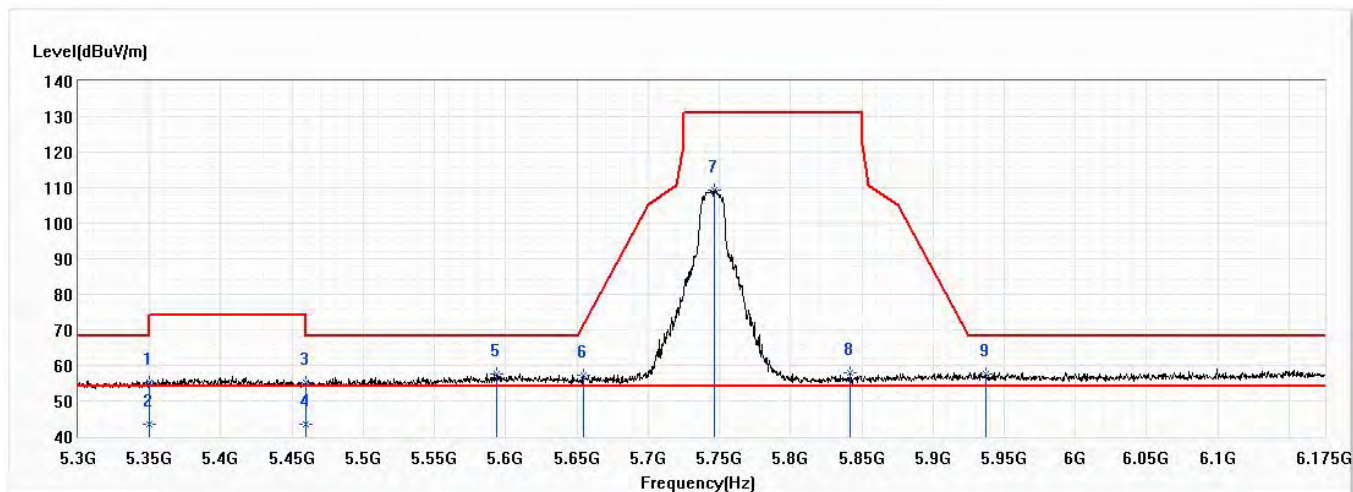


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.05	74.00	-18.95	32.35	22.70	PK
2	5350.000	43.46	54.00	-10.54	20.76	22.70	AV
3	5460.000	55.06	74.00	-18.94	32.25	22.81	PK
4	5460.000	43.33	54.00	-10.67	20.52	22.81	AV
* 5	5594.000	57.71	68.20	-10.49	34.49	23.22	PK
6	5654.375	57.08	71.45	-14.37	33.61	23.47	PK
7	5746.688	109.20	131.20	-22.00	85.36	23.84	PK
8	5841.625	57.85	131.20	-73.35	33.73	24.12	PK
9	5937.000	57.67	68.20	-10.53	33.27	24.40	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 157,5.785G,BW20M	Humidity (%RH)	57.0

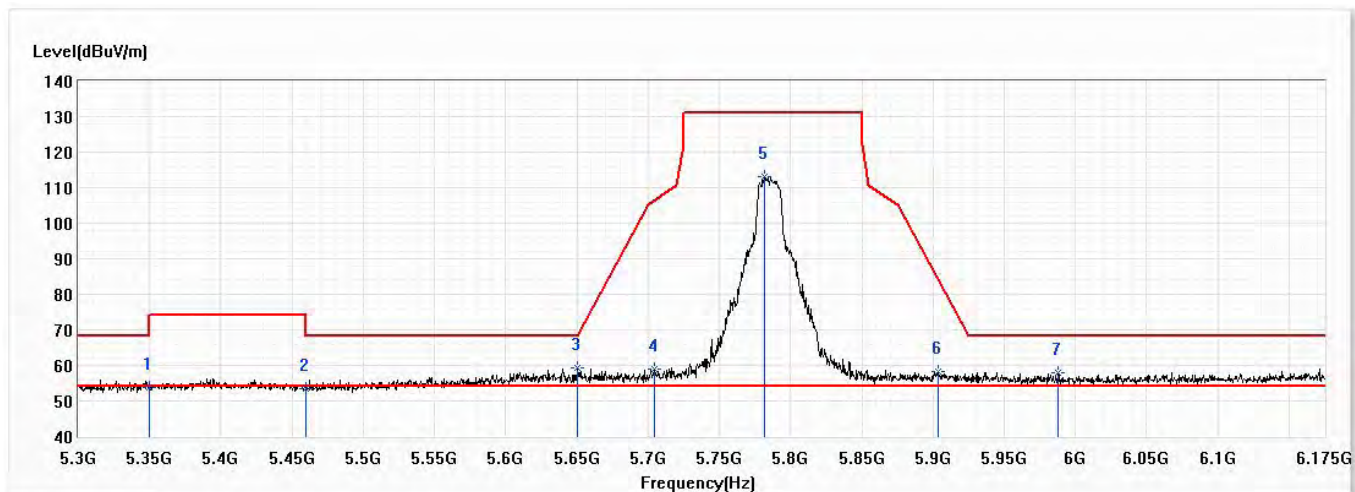


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.83	74.00	-20.17	31.13	22.70	PK
2	5460.000	53.42	74.00	-20.58	30.61	22.81	PK
* 3	5650.438	59.35	68.53	-9.17	35.91	23.44	PK
4	5704.250	59.05	106.39	-47.34	35.38	23.67	PK
5	5782.125	113.23	131.20	-17.97	89.30	23.93	PK
6	5903.313	58.15	84.21	-26.06	33.85	24.30	PK
7	5988.188	57.88	68.20	-10.32	33.32	24.56	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 157,5.785G,BW20M	Humidity (%RH)	57.0

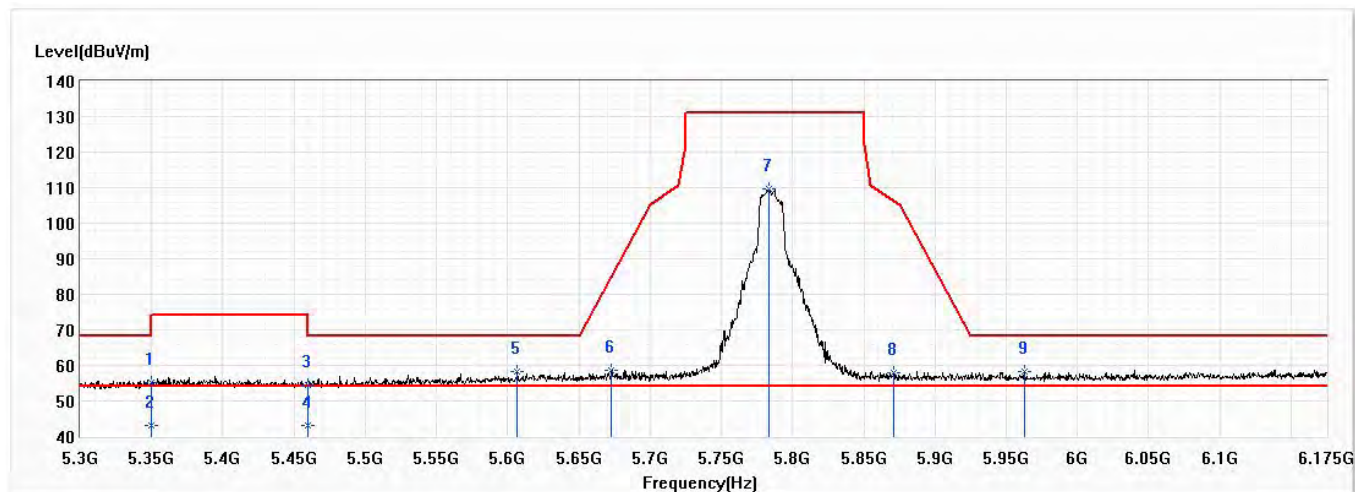


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.13	74.00	-18.87	32.43	22.70	PK
2	5350.000	43.25	54.00	-10.75	20.55	22.70	AV
3	5460.000	54.56	74.00	-19.44	31.75	22.81	PK
4	5460.000	43.15	54.00	-10.85	20.34	22.81	AV
* 5	5606.688	58.32	68.20	-9.88	35.05	23.27	PK
6	5672.750	58.64	85.08	-26.44	35.11	23.53	PK
7	5783.438	109.67	131.20	-21.53	85.72	23.95	PK
8	5871.375	58.06	106.21	-48.16	33.85	24.21	PK
9	5962.813	58.19	68.20	-10.01	33.70	24.49	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11a,Ch 165,5.825G,BW20M	Humidity (%RH)	57.0

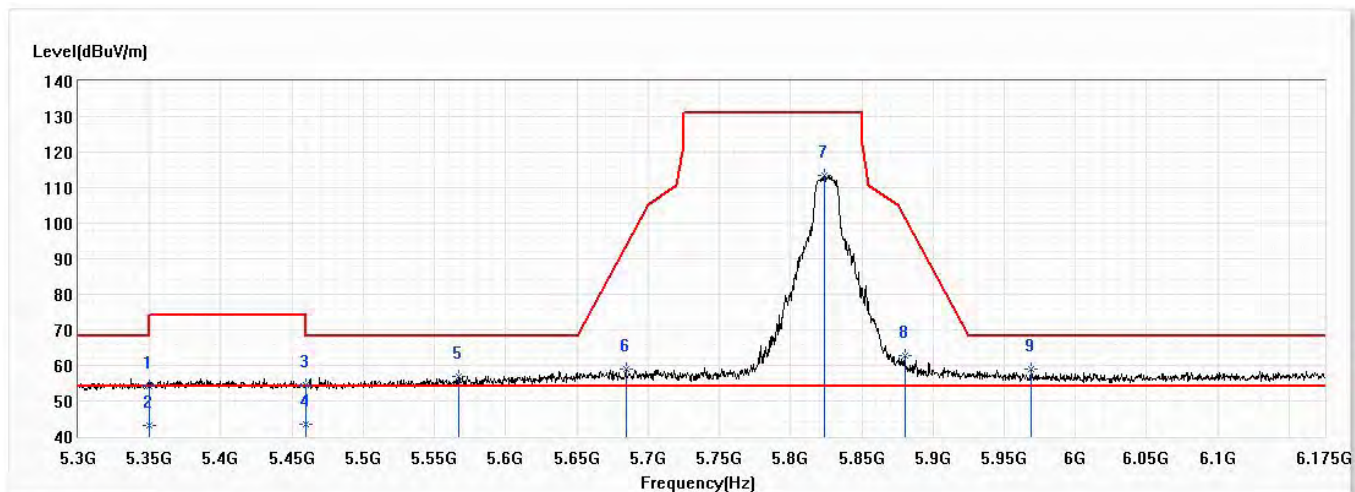


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.08	74.00	-19.92	31.38	22.70	PK
2	5350.000	43.11	54.00	-10.89	20.41	22.70	AV
3	5460.000	54.47	74.00	-19.53	31.66	22.81	PK
4	5460.000	43.31	54.00	-10.69	20.50	22.81	AV
5	5566.875	56.88	68.20	-11.32	33.77	23.11	PK
6	5684.563	59.02	93.81	-34.79	35.44	23.58	PK
7	5823.688	113.28	131.20	-17.92	89.22	24.06	PK
8	5880.125	62.90	101.39	-38.49	38.67	24.23	PK
* 9	5968.938	59.10	68.20	-9.10	34.59	24.51	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/29
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11a,Ch 165,5.825G,BW20M	Humidity (%RH)	57.0

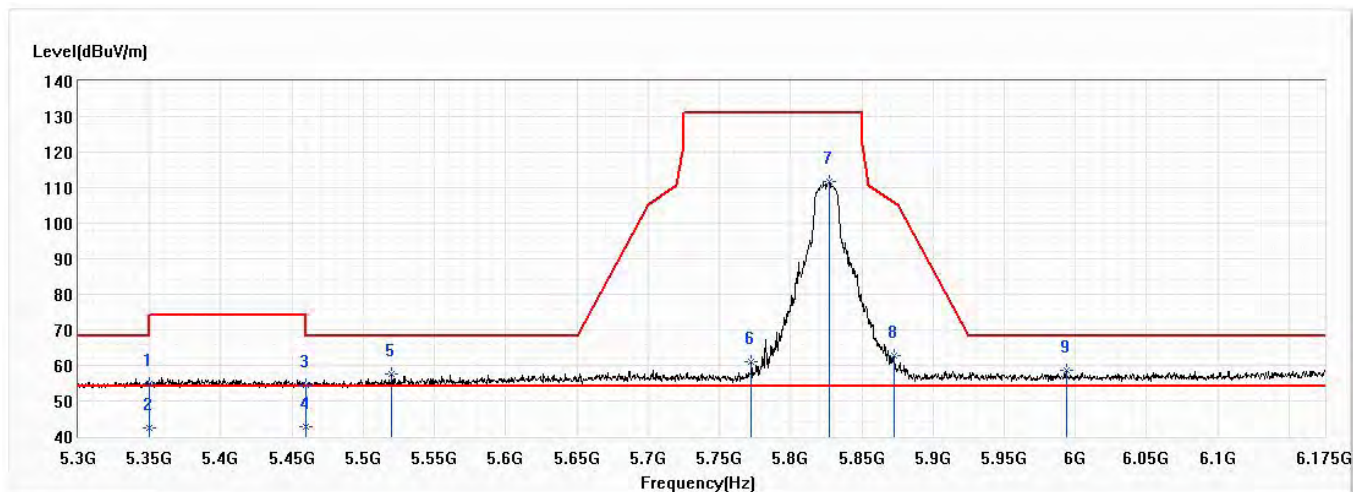


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.73	74.00	-19.27	32.03	22.70	PK
2	5350.000	42.55	54.00	-11.45	19.85	22.70	AV
3	5460.000	54.51	74.00	-19.49	31.70	22.81	PK
4	5460.000	42.77	54.00	-11.23	19.96	22.81	AV
5	5520.063	57.48	68.20	-10.72	34.55	22.93	PK
6	5772.500	61.18	131.20	-70.02	37.27	23.91	PK
7	5827.188	111.64	131.20	-19.56	87.56	24.08	PK
8	5872.688	62.65	105.85	-43.20	38.44	24.21	PK
* 9	5993.438	58.58	68.20	-9.62	34.00	24.58	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 149,5.745G,BW20M	Humidity (%RH)	57.0

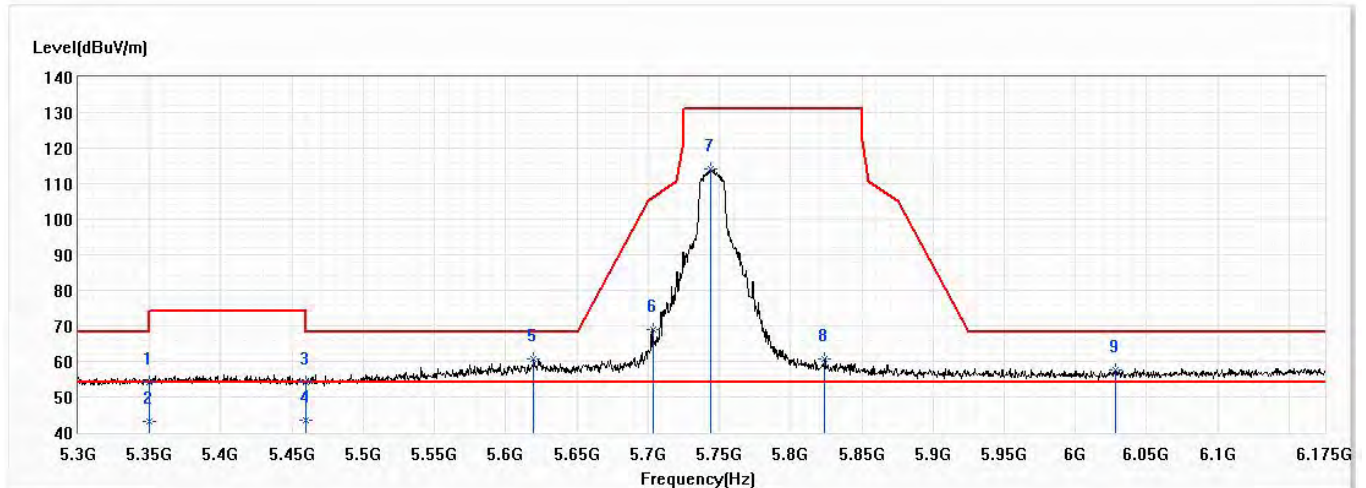


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.13	74.00	-19.87	31.43	22.70	PK
2	5350.000	43.01	54.00	-10.99	20.31	22.70	AV
3	5460.000	54.02	74.00	-19.98	31.21	22.81	PK
4	5460.000	43.33	54.00	-10.67	20.52	22.81	AV
* 5	5619.813	60.81	68.20	-7.39	37.48	23.33	PK
6	5703.375	68.94	106.15	-37.21	45.29	23.65	PK
7	5743.625	114.17	131.20	-17.03	90.36	23.81	PK
8	5824.125	60.57	131.20	-70.63	36.51	24.06	PK
9	6028.000	57.48	68.20	-10.72	32.79	24.69	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 149,5.745G,BW20M	Humidity (%RH)	57.0

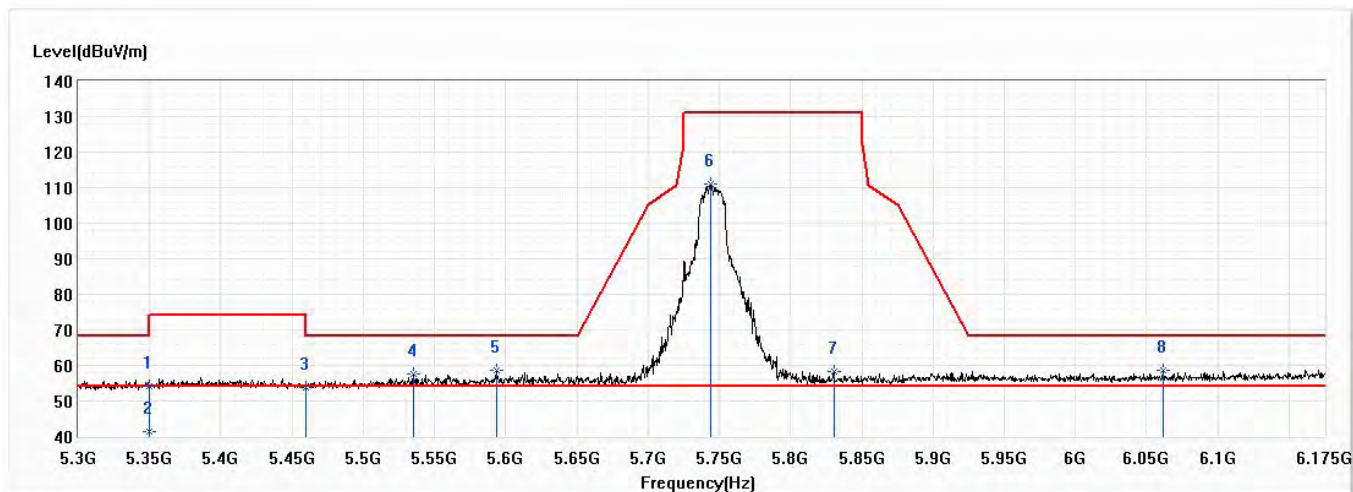


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.23	74.00	-19.77	31.53	22.70	PK
2	5350.000	41.55	54.00	-12.45	18.85	22.70	AV
3	5460.000	53.92	74.00	-20.08	31.11	22.81	PK
4	5534.938	57.43	68.20	-10.77	34.44	22.99	PK
* 5	5593.563	58.56	68.20	-9.64	35.34	23.22	PK
6	5744.060	110.92	131.20	-20.28	87.11	23.81	PK
7	5830.250	58.42	131.20	-72.78	34.34	24.08	PK
8	6061.688	58.51	68.20	-9.69	33.70	24.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 157,5.785G,BW20M	Humidity (%RH)	57.0

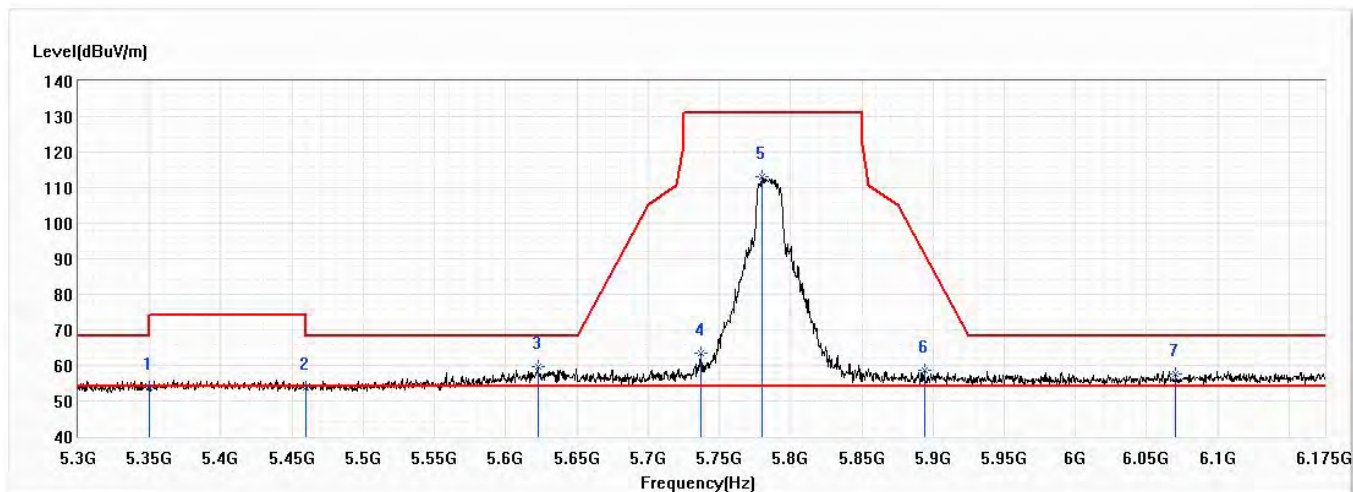


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.87	74.00	-20.13	31.17	22.70	PK
2	5460.000	53.67	74.00	-20.33	30.86	22.81	PK
* 3	5622.438	59.76	68.20	-8.44	36.43	23.33	PK
4	5737.063	63.47	131.20	-67.73	39.69	23.78	PK
5	5780.375	113.11	131.20	-18.09	89.18	23.93	PK
6	5894.125	58.75	91.01	-32.26	34.48	24.27	PK
7	6070.438	57.74	68.20	-10.46	32.89	24.85	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 157,5.785G,BW20M	Humidity (%RH)	57.0

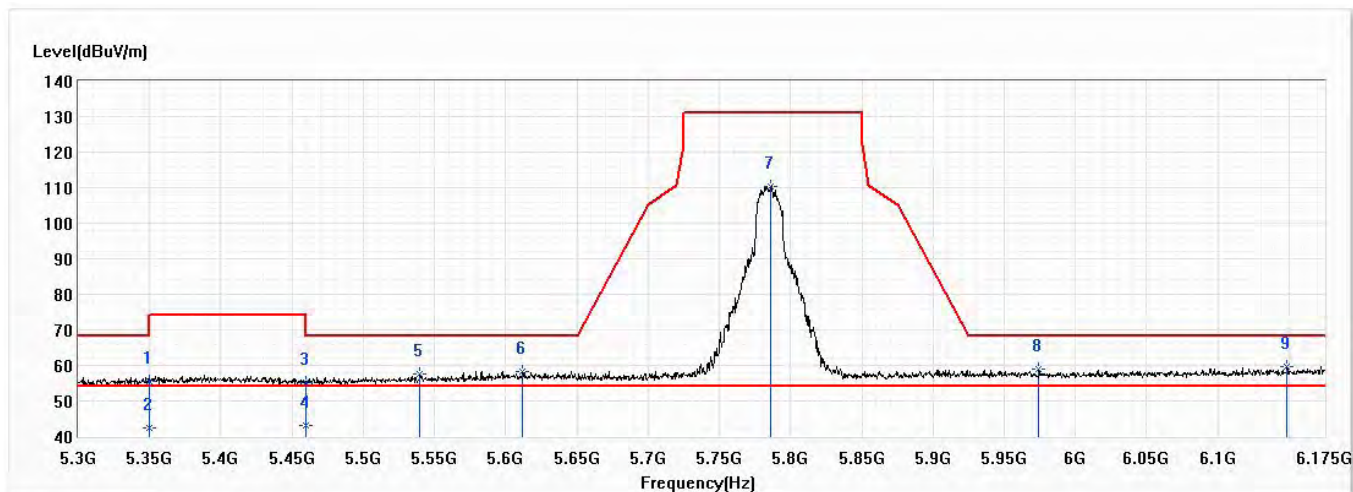


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.60	74.00	-18.40	32.90	22.70	PK
2	5350.000	42.55	54.00	-11.45	19.85	22.70	AV
3	5460.000	55.31	74.00	-18.69	32.50	22.81	PK
4	5460.000	43.10	54.00	-10.90	20.29	22.81	AV
5	5539.750	57.56	68.20	-10.64	34.54	23.02	PK
6	5611.938	58.11	68.20	-10.09	34.81	23.30	PK
7	5786.063	110.49	131.20	-20.71	86.54	23.95	PK
8	5974.188	59.05	68.20	-9.15	34.54	24.51	PK
* 9	6148.750	59.57	68.20	-8.63	34.46	25.11	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 165,5.825G,BW20M	Humidity (%RH)	57.0

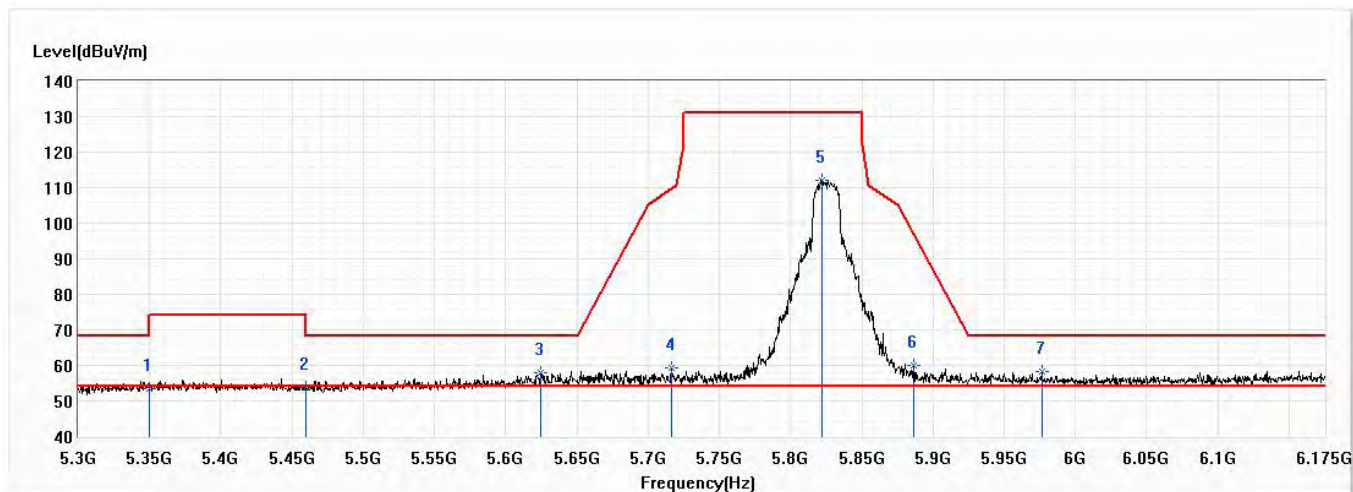


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.36	74.00	-20.64	30.66	22.70	PK
2	5460.000	53.76	74.00	-20.24	30.95	22.81	PK
3	5624.188	58.02	68.20	-10.18	34.69	23.33	PK
4	5716.063	59.23	109.70	-50.47	35.53	23.70	PK
5	5821.938	112.15	131.20	-19.05	88.09	24.06	PK
6	5886.688	60.02	96.52	-36.50	35.77	24.25	PK
* 7	5976.375	58.24	68.20	-9.96	33.71	24.53	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 165,5.825G,BW20M	Humidity (%RH)	57.0

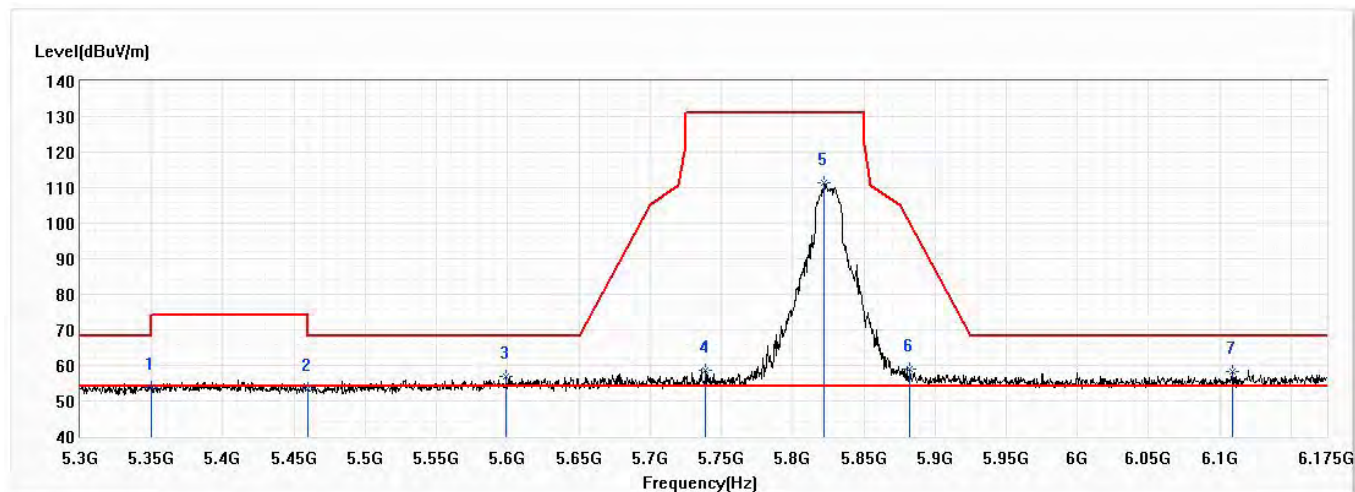


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.74	74.00	-20.26	31.04	22.70	PK
2	5460.000	53.42	74.00	-20.58	30.61	22.81	PK
3	5599.250	56.99	68.20	-11.21	33.74	23.25	PK
4	5738.813	58.64	131.20	-72.56	34.85	23.79	PK
5	5822.375	111.31	131.20	-19.89	87.25	24.06	PK
6	5882.313	59.13	99.77	-40.64	34.88	24.25	PK
* 7	6108.500	58.25	68.20	-9.95	33.28	24.97	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 151,5.755G,BW40M	Humidity (%RH)	57.0

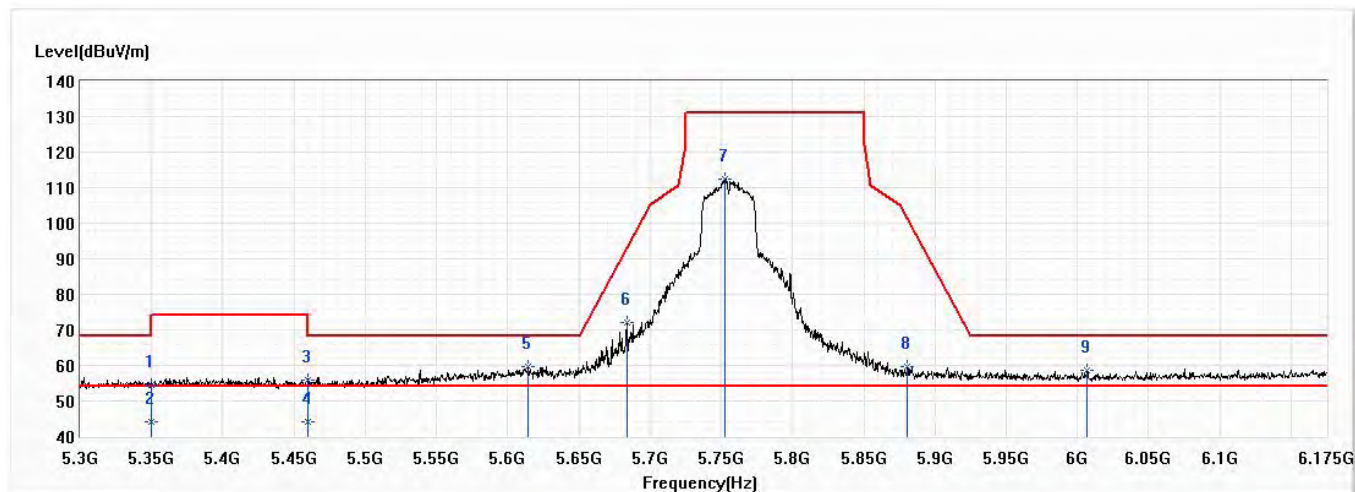


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.56	74.00	-19.44	31.86	22.70	PK
2	5350.000	44.11	54.00	-9.89	21.41	22.70	AV
3	5460.000	55.74	74.00	-18.26	32.93	22.81	PK
4	5460.000	44.25	54.00	-9.75	21.44	22.81	AV
* 5	5614.563	59.55	68.20	-8.65	36.25	23.30	PK
6	5683.688	71.97	93.16	-21.19	48.39	23.58	PK
7	5752.375	112.31	131.20	-18.89	88.47	23.84	PK
8	5880.563	59.71	101.07	-41.36	35.48	24.23	PK
9	6007.000	58.56	68.20	-9.64	33.94	24.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 151,5.755G,BW40M	Humidity (%RH)	57.0

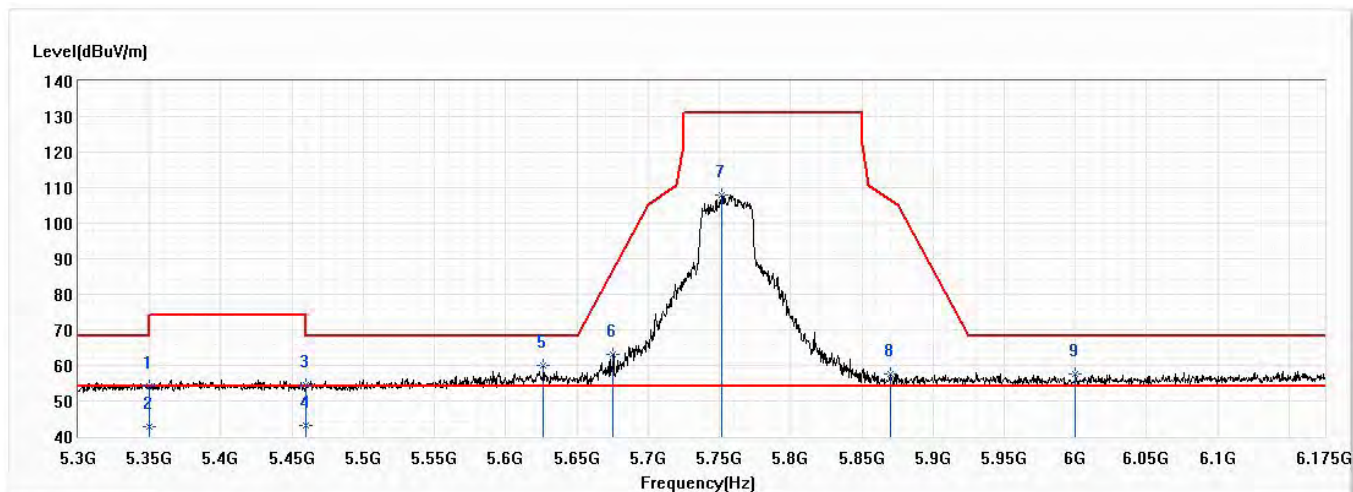


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.09	74.00	-19.91	31.39	22.70	PK
2	5350.000	42.88	54.00	-11.12	20.18	22.70	AV
3	5460.000	54.34	74.00	-19.66	31.53	22.81	PK
4	5460.000	43.25	54.00	-10.75	20.44	22.81	AV
* 5	5626.375	59.86	68.20	-8.34	36.50	23.36	PK
6	5675.375	63.11	87.02	-23.91	39.56	23.55	PK
7	5751.938	108.05	131.20	-23.15	84.21	23.84	PK
8	5870.500	57.64	106.46	-48.82	33.43	24.21	PK
9	6000.000	57.52	68.20	-10.68	32.92	24.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	802.11n,Ch 159,5.795G,BW40M	Humidity (%RH)	57.0

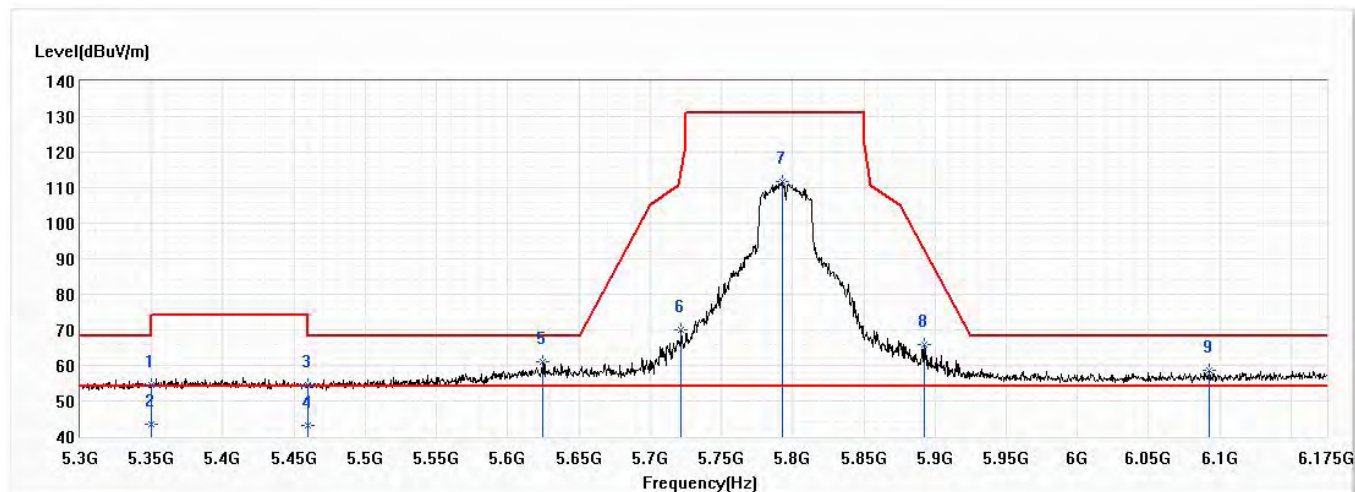


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.51	74.00	-19.49	31.81	22.70	PK
2	5350.000	43.32	54.00	-10.68	20.62	22.70	AV
3	5460.000	54.48	74.00	-19.52	31.67	22.81	PK
4	5460.000	43.11	54.00	-10.89	20.30	22.81	AV
* 5	5624.188	61.10	68.20	-7.10	37.77	23.33	PK
6	5721.750	70.12	114.79	-44.67	46.39	23.73	PK
7	5792.625	111.77	131.20	-19.43	87.80	23.97	PK
8	5892.813	66.03	91.98	-25.96	41.76	24.27	PK
9	6092.313	58.66	68.20	-9.54	33.74	24.92	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	Hex Sense	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/28
Test Mode	Mode 1: Transmit Mode	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	802.11n,Ch 159,5.795G,BW40M	Humidity (%RH)	57.0

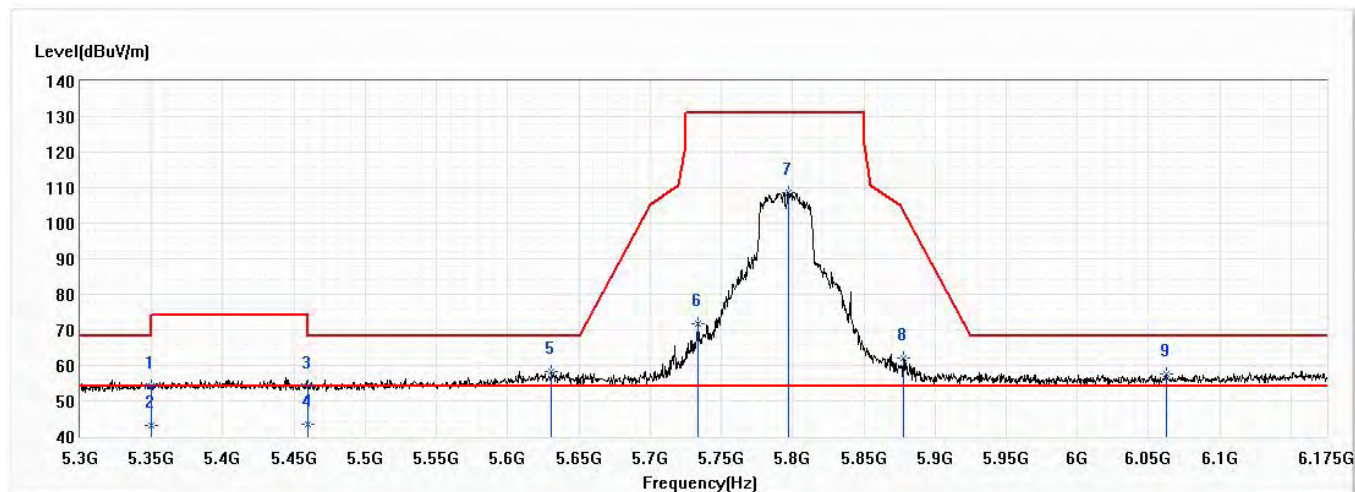

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.14	74.00	-19.86	31.44	22.70	PK
2	5350.000	43.10	54.00	-10.90	20.40	22.70	AV
3	5460.000	53.99	74.00	-20.01	31.18	22.81	PK
4	5460.000	43.41	54.00	-10.59	20.60	22.81	AV
* 5	5630.750	58.30	68.20	-9.90	34.94	23.36	PK
6	5733.563	71.88	131.20	-59.32	48.10	23.78	PK
7	5797.000	108.56	131.20	-22.64	84.57	23.99	PK
8	5877.938	62.02	103.02	-40.99	37.79	24.23	PK
9	6062.125	57.48	68.20	-10.72	32.67	24.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.