



**FCC TEST REPORT**  
**FCC ID: 2AW2V-CTC-QIP14**

On Behalf of

**Merkury Innovations LLC**

**Wireless Charger**

**Model No.: WD07, CTC-QIP14, 035-7364-0, 035-7365-8**

Prepared for : Merkury Innovations LLC  
Address : 45 Broadway, Suite 350, New York, NY 10006

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,  
518103, Shenzhen, Guangdong, China

Report Number : A2007030-C01-R01  
Date of Receipt : July 15, 2020  
Date of Test : July 15, 2020– July 29, 2020  
Date of Report : July 29, 2020  
Version Number : V0

## **TABLE OF CONTENTS**

<b>1. Test Result Summary .....</b>	<b>5</b>
<b>2. General Information.....</b>	<b>6</b>
2.1. DESCRIPTION OF DEVICE (EUT).....	6
2.2. ACCESSORIES OF DEVICE (EUT).....	7
2.3. TESTED SUPPORTING SYSTEM DETAILS .....	7
2.4. BLOCK DIAGRAM OF CONNECTION BETWEEN EUT AND SIMULATORS .....	7
2.5. DESCRIPTION OF TEST MODES.....	7
2.6. TEST CONDITIONS .....	7
2.7. TEST FACILITY .....	8
2.8. MEASUREMENT UNCERTAINTY .....	8
2.9. TEST EQUIPMENT LIST.....	9
<b>3. Test Results and Measurement Data .....</b>	<b>10</b>
3.1. CONDUCTED EMISSION .....	10
3.2. RADIATED SPURIOUS EMISSION MEASUREMENT .....	13
3.3. TEST SPECIFICATION .....	21
<b>4. Photos of test setup .....</b>	<b>23</b>
<b>5. Photographs of EUT .....</b>	<b>25</b>

# TEST REPORT DECLARATION



Applicant : Merkury Innovations LLC  
 Address : 45 Broadway, Suite 350, New York, NY 10006  
 Manufacturer : Shenzhen Goodwin Technology Co., Ltd.  
 Address : 4/F, Building A, Huayuan Industrial Park, Fenghuang NO.1 Industrial Area, Fuyong, Bao'an Dist, Shenzhen, China  
 EUT Description : Wireless Charger  
 (A) Model No. : WD07, CTC-QIP14, 035-7364-0, 035-7365-8  
 (B) Trademark : **Merkury, Bluehive**

Measurement Standard Used:

**FCC CFR Title 47 Part 15 Subpart C Section 15.209**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC CFR Title 47 Part 15 Subpart C Section 15.209 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:	Lucas Pang Project Engineer	 -----
Approved by (name + signature).....:	Simple Guan Project Manager	 -----
Date of issue.....	July 29, 2020	

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	July 29, 2020	Initial released Issue	Lucas Pang

## 1. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209(a)(f)	PASS
Occupied Bandwidth	§15.215 (c)	PASS

**Note:**

1. *PASS: Test item meets the requirement.*
2. *Fail: Test item does not meet the requirement.*
3. *N/A: Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*

## 2. General Information

### 2.1. Description of Device (EUT)

EUT Name : Wireless Charger

Model No. : WD07, CTC-QIP14, 035-7364-0, 035-7365-8

DIFF. : There is no difference except for the appearance, shape and model name. So all the test were performed on the model WD07

Trademark : **Merkury, Bluehive**

Power supply : Input : DC 5V/2A, DC 9V/1.7A  
Output : 10W(Max)

Operation frequency : 112~205KHz

Modulation : MSK

Antenna Type : Internal Antenna


## 2.2. Accessories of Device (EUT)

Accessories1 : /  
 Manufacturer : /  
 Model : /  
 Ratings : /

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	Wireless load	--	--	--	N/A
2	SWITCHING ADAPTER	Salcomp	MDY-10-EH	--	N/A

## 2.4. Block Diagram of connection between EUT and simulators

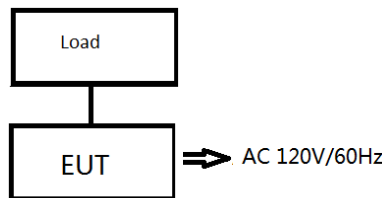

## 2.5. Description of Test Modes

Channel	Frequency (KHz)
1	165

## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 15, 2019 Certificated by IC

Registration Number: CN0085

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Conducted Emission Test	2.74dB	
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB	Polarize: V
	2.57dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB	Polarize: V
	3.80dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.13dB	Polarize: H
	4.16dB	Polarize: V
Uncertainty for radio frequency	$5.4 \times 10^{-8}$	
Uncertainty for conducted RF Power	0.37dB	




## 2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2019.09.06	1Year
Spectrum analyzer	R&S	FSU	1166.1660.26	2019.09.06	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2019.09.05	1Year
Receiver	R&S	ESR	1316.3003K03-10208 2-Wa	2019.09.06	1Year
Receiver	R&S	ESCI	101165	2019.09.05	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2019.09.07	2Year
Horn Antenna	SCHWARZBEC K	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Active Loop Antenna	SCHWARZBEC K	FMZB 1519B	00059	2019.09.07	2Year
Cable	Resenberger	N/A	No.1	2019.09.05	1Year
Cable	Resenberger	N/A	No.2	2019.09.05	1Year
Cable	Resenberger	N/A	No.3	2019.09.05	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2019.09.05	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2019.09.05	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126-466	2019.09.05	1Year
L.I.S.N.#2	R&S	ENV216	101043	2019.09.05	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2019.09.20	1 Year

### 3. Test Results and Measurement Data

#### 3.1. Conducted Emission

##### 3.1.1. Test Specification

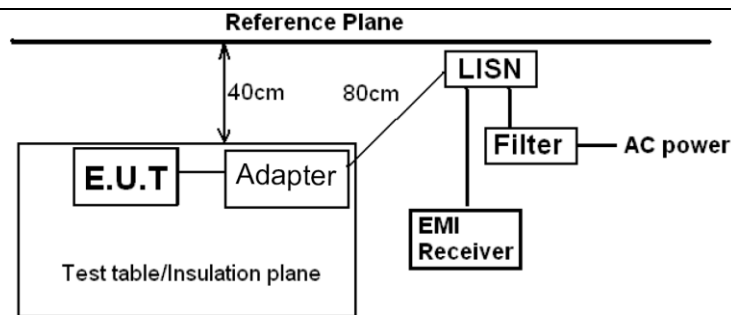
<b>Test Requirement:</b>	FCC Part15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.10:2013														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	 <p><i>Remark</i>  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>														
<b>Test Mode:</b>	Charging + Transmitting Mode														
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>														
<b>Test Result:</b>	PASS														

### 3.1.2. Test data

**Please refer to following diagram for individual**


Test Mode : Full Load, Half Load, Empty Load
Test Results : <b>PASS</b>
Note: The test results are listed in next pages. All test modes has been tested, this report only reflected the worst mode. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

<b>EUT Description</b>	Wireless Charger	<b>Model No.</b>	WD07, CTC-QIP14, 035-7364-0, 035-7365-8
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Pol</b>	Line	<b>Test date</b>	2020/7/16
<b>Test Voltage</b>	DC 9V from Adapter Input AC 120V/60Hz	<b>Test mode</b>	Full Load

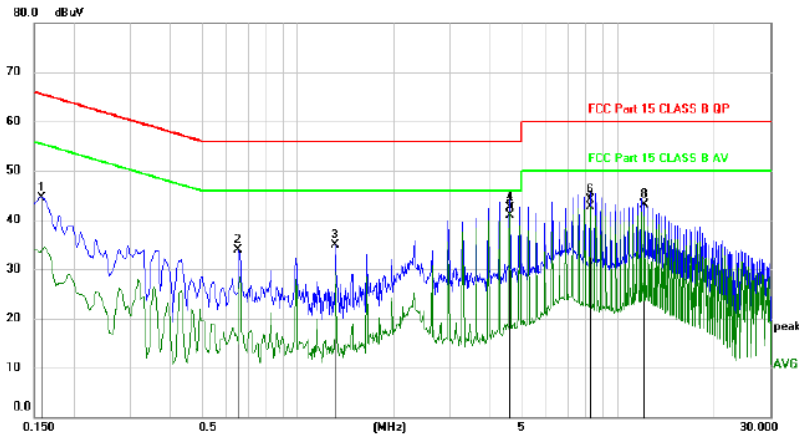

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1582	34.61	9.94	44.55	65.56	-21.01	peak	
2	0.6540	23.98	9.93	33.91	56.00	-22.09	peak	
3	1.3140	24.98	9.90	34.88	56.00	-21.12	peak	
4	4.6020	32.47	10.01	42.48	56.00	-13.52	QP	
5 *	4.6020	30.80	10.01	40.81	46.00	-5.19	AVG	
6	8.2140	34.03	10.16	44.19	60.00	-15.81	QP	
7	8.2140	32.59	10.16	42.75	50.00	-7.25	AVG	
8	12.1620	32.82	10.26	43.08	60.00	-16.92	peak	

<b>Pol</b>	Neutral
------------	---------

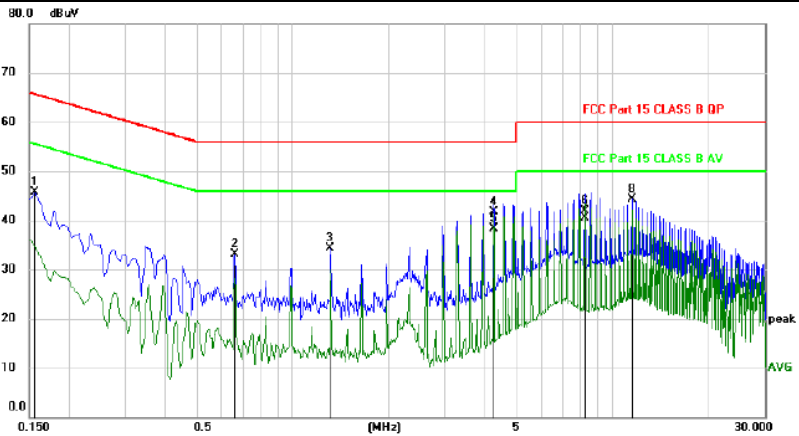


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1560	35.77	9.94	45.71	65.67	-19.96	peak	
2	0.6600	23.08	9.93	33.01	56.00	-22.99	peak	
3	1.3140	24.45	9.90	34.35	56.00	-21.65	peak	
4	4.2540	31.73	9.99	41.72	56.00	-14.28	QP	
5 *	4.2540	28.37	9.99	38.36	46.00	-7.64	AVG	
6	8.2200	31.68	10.16	41.84	60.00	-18.16	QP	
7	8.2200	30.41	10.16	40.57	50.00	-9.43	AVG	
8	11.5080	34.06	10.25	44.31	60.00	-15.69	peak	


\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable


## 3.2. Radiated Spurious Emission Measurement

### 3.2.1. Test Specification
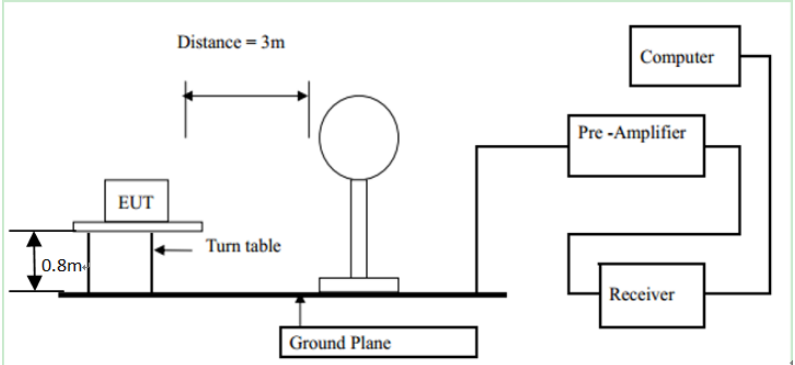
<b>Test Requirement:</b>	FCC Part15 C Section 15.209					
<b>Test Method:</b>	ANSI C63.10: 2013					
<b>Frequency Range:</b>	9 kHz to 25 GHz					
<b>Measurement Distance:</b>	3 m					
<b>Antenna Polarization:</b>	Horizontal & Vertical					
<b>Operation mode:</b>	Refer to item 4.1					
<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark	
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	
	Above 1GHz	Peak	1MHz	3MHz	Peak Value	
		Peak	1MHz	10Hz	Average Value	
<b>Limit:</b>	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)			
	0.009-0.490	2400/F(KHz)	300			
	0.490-1.705	24000/F(KHz)	30			
	1.705-30	30	30			
	30-88	100	3			
	88-216	150	3			
	216-960	200	3			
	Above 960	500	3			
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector		
	Above 1GHz	500	3	Average		
	5000	3	Peak			
<b>Test setup:</b>	For radiated emissions below 30MHz					
	 <p>The diagram illustrates the test setup for radiated emissions below 30MHz. It shows an Equipment Under Test (EUT) on a turn table, positioned 0.8m above a ground plane. The antenna is located 3m away from the EUT. The antenna is connected to a pre-amplifier, which is then connected to a receiver. The receiver is connected to a computer.</p>					
	30MHz to 1GHz					

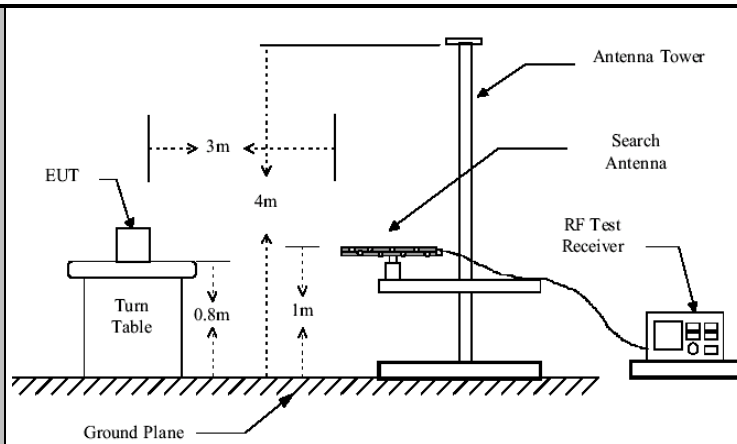

### Above 1GHz

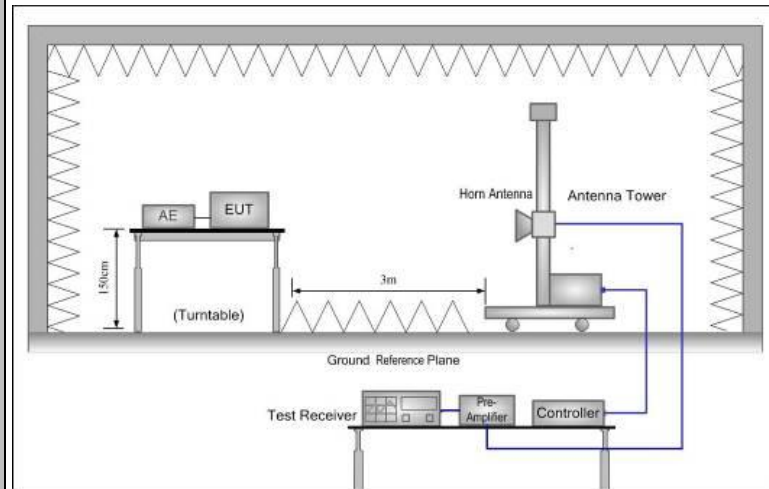

### Test Procedure:

#### 1. For the radiated emission test below 1GHz:

The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.

#### For the radiated emission test above 1GHz:

Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which

	<p>maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <ol style="list-style-type: none"> <li>2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</li> <li>3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</li> <li>4. Use the following spectrum analyzer settings: <ol style="list-style-type: none"> <li>(1) Span shall wide enough to fully capture the emission being measured;</li> <li>(2) Set RBW=100 kHz for <math>f &lt; 1</math> GHz; <math>VBW \geq RBW</math>; Sweep = auto; Detector function = peak; Trace = max hold;</li> <li>(3) Set RBW = 1 MHz, <math>VBW = 3</math> MHz for <math>f \geq 1</math> GHz for peak measurement.</li> </ol> <p>For average measurement: <math>VBW = 10</math> Hz, when duty cycle is no less than 98 percent. <math>VBW \geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p> </li> </ol>
<b>Test mode:</b>	Refer to section 4.1 for details
<b>Test results:</b>	PASS


### 3.2.2. Test Data

Please refer to following diagram for individual


Frequency Range	: 9KHz~30MHz
Test Mode	: TX: 165KHz (Full Load)
Test Results	: <b>PASS</b>
Note:	<ol style="list-style-type: none"><li>1. The test results are listed in next pages.</li><li>2. This mode is worst case mode, so this report only reflected the worst mode.</li><li>3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.</li></ol>



X

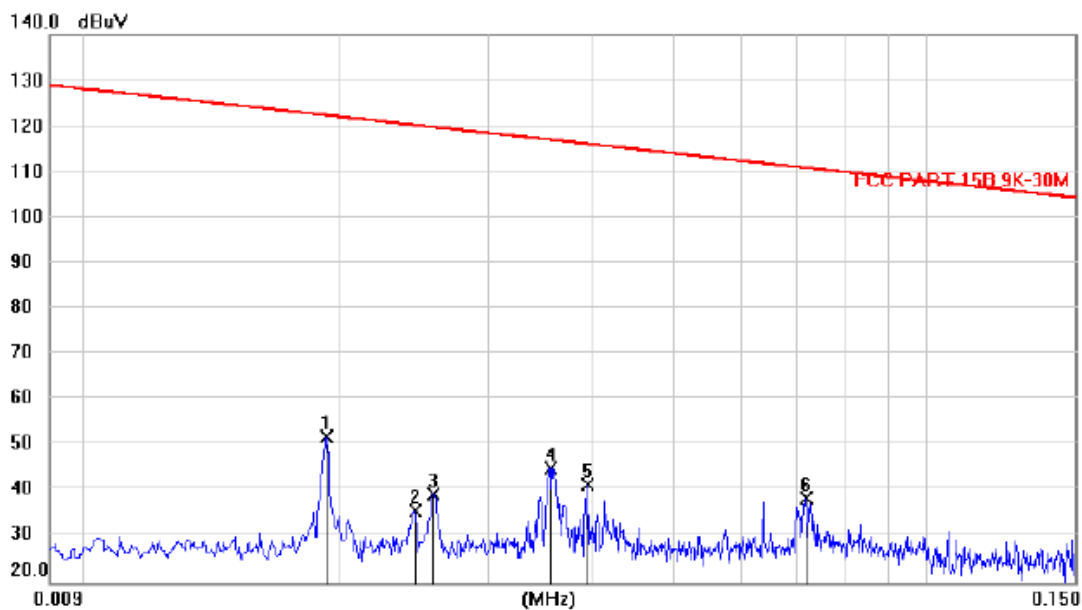

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Antenna Height cm	Table Degree	Comment
1	*	0.0192	30.65	21.27	51.92	122.2	-70.37	peak		
2		0.0245	14.69	21.14	35.83	120.1	-84.33	peak		
3		0.0258	18.23	21.10	39.33	119.7	-80.38	peak		
4		0.0355	24.35	20.69	45.04	116.9	-71.88	peak		
5		0.0394	20.97	20.48	41.45	116.0	-74.56	peak		
6		0.0718	18.30	20.17	38.47	110.7	-72.30	peak		

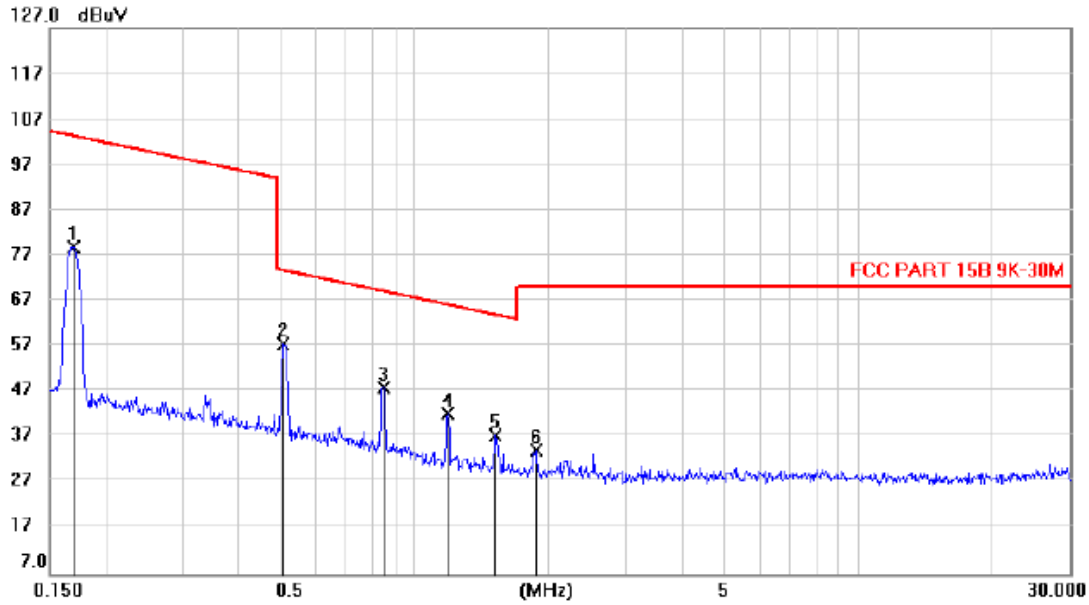

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Antenna Height cm	Table Degree	Comment
1		0.1650	58.69	20.17	78.86	103.2	-24.41			peak
2	*	0.5055	37.85	19.70	57.55	73.73	-16.18			peak
3		0.8514	27.96	19.91	47.87	69.13	-21.26			peak
4		1.1856	22.19	20.05	42.24	66.21	-23.97			peak
5		1.5249	17.41	20.13	37.54	63.98	-26.44			peak
6		1.8730	13.81	20.22	34.03	70.00	-35.97			peak

\*:Maximum data    x:Over limit    !:over margin


Note: Measurement=Reading Level+Correc Factor.    Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Frequency Range	: 30MHz~1000MHz
Test Mode	: Full Load, Half Load, Empty Load
Test Results	: <b>PASS</b>
Note:	<p>1. The test results are listed in next pages.</p> <p>2. All test modes has been tested, this report only reflected the worst mode.</p> <p>3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.</p>

Frequency Range	: Above 1GHz		
EUT	: /	Test Date	: /
M/N	: /	Temperature	: /
Test Engineer	: /	Humidity	: /
Test Mode	: /		
Test Results	: N/A		
Note:	<p>1. The highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. So the frequency rang above 1GHz radiation test not applicable.</p>		


30MHz-1GHz

<b>EUT Description</b>	Wireless Charger	<b>Model No.</b>	WD07, CTC-QIP14, 035-7364-0, 035-7365-8
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Pol</b>	Vertical	<b>Test date</b>	2020/7/16
<b>Test Voltage</b>	DC 9V from Adapter Input AC 120V/60Hz	<b>Test mode</b>	Full Load

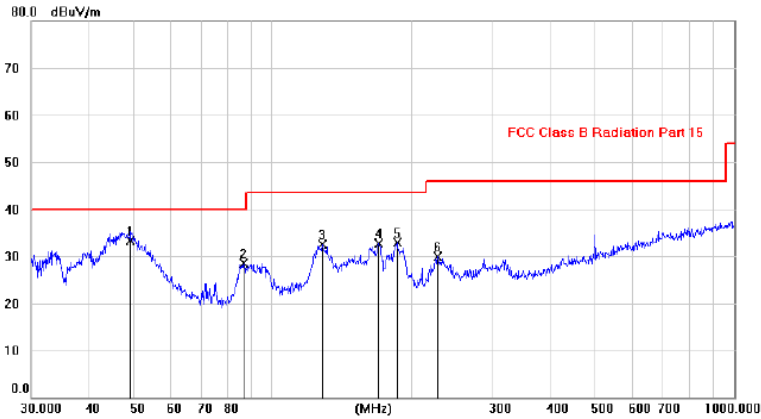

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1 *	49.2730	18.79	14.61	33.40	40.00	-6.60	QP			
2	86.5332	17.88	10.69	28.57	40.00	-11.43	peak			
3	128.2027	18.06	14.38	32.44	43.50	-11.06	peak			
4	170.1351	17.47	15.14	32.61	43.50	-10.89	peak			
5	185.9186	19.83	13.00	32.83	43.50	-10.67	peak			
6	227.7705	16.53	13.29	29.82	46.00	-16.18	peak			

<b>Pol</b>	Horizontal
------------	------------

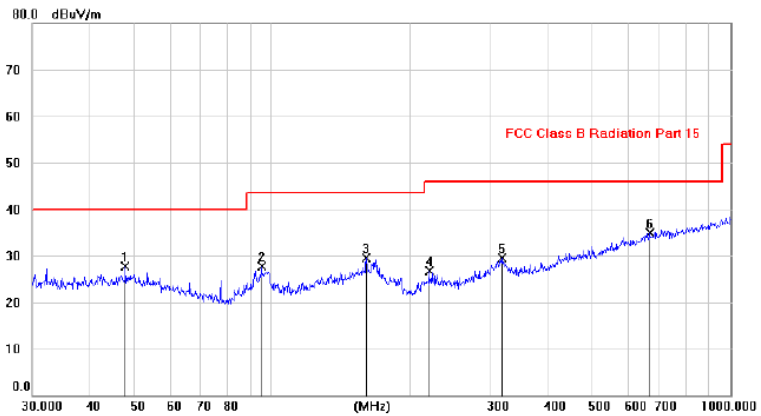


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	47.8260	13.09	14.65	27.74	40.00	-12.26	peak			
2	94.7933	16.53	11.13	27.66	43.50	-15.84	peak			
3	160.6271	13.61	15.99	29.60	43.50	-13.90	peak			
4	220.5398	13.84	12.83	26.67	46.00	-19.33	peak			
5	317.9239	13.75	15.75	29.50	46.00	-16.50	peak			
6 *	667.6739	12.01	22.80	34.81	46.00	-11.19	peak			

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable


### 3.3. Test Specification
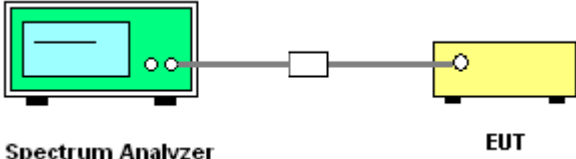
<b>Test Requirement:</b>	FCC Part15 C Section 15.215(c)
<b>Test Method:</b>	ANSI C63.10: 2013
<b>Limit:</b>	N/A
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW <math>\geq</math> 1% of the 20 dB bandwidth; VBW <math>\geq</math> RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>4. Measure and record the results in the test report.</li> </ol>
<b>Test setup:</b>	 <p>The diagram illustrates the test setup. On the left is a Spectrum Analyzer, represented by a green box with a blue screen and two small circles. A cable connects it to a small white rectangular component, which in turn connects to a yellow box labeled 'EUT' (Equipment Under Test). Below the Spectrum Analyzer is the text 'Spectrum Analyzer' and below the EUT is the text 'EUT'.</p>
<b>Test Mode:</b>	Refer to section 4.1 for details
<b>Test results:</b>	PASS

3.3.1. Test data



Frequency(KHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
165	3.559	---	PASS

Test plots as follows:

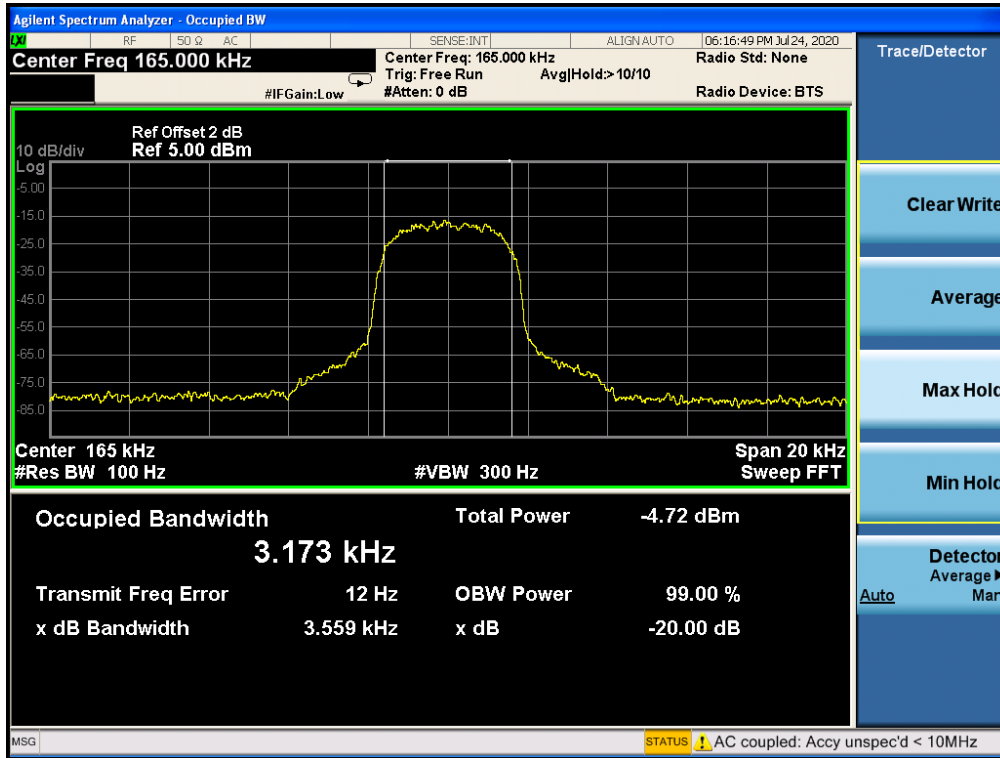

## 4. Photos of test setup

### Radiated Emission

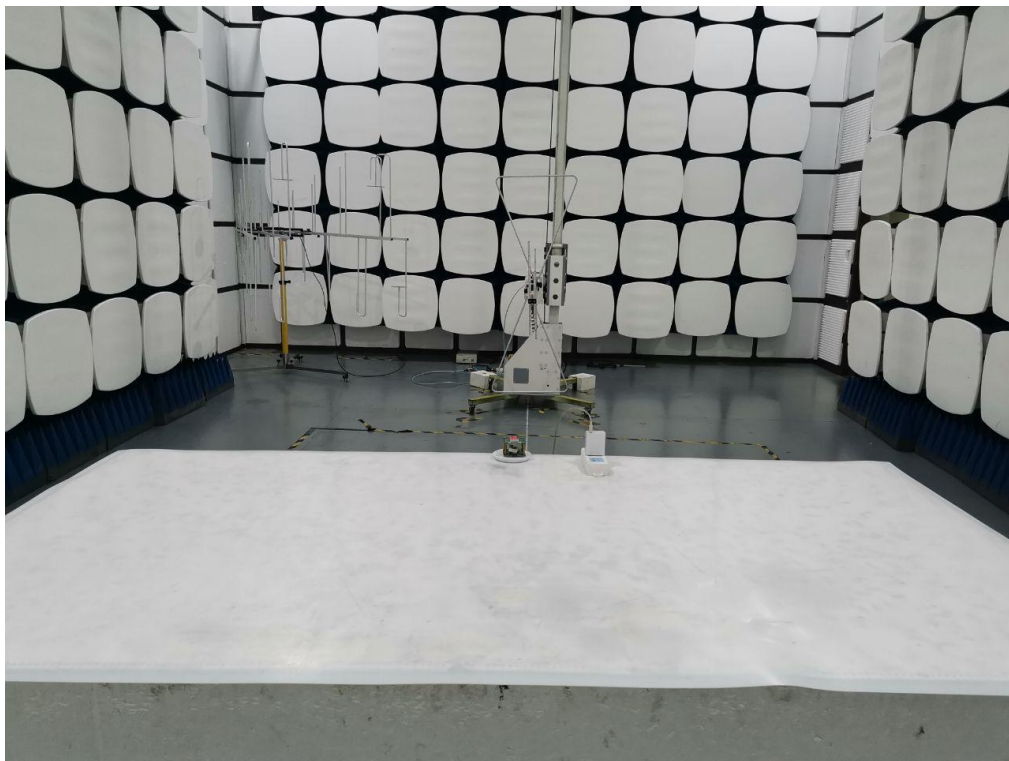
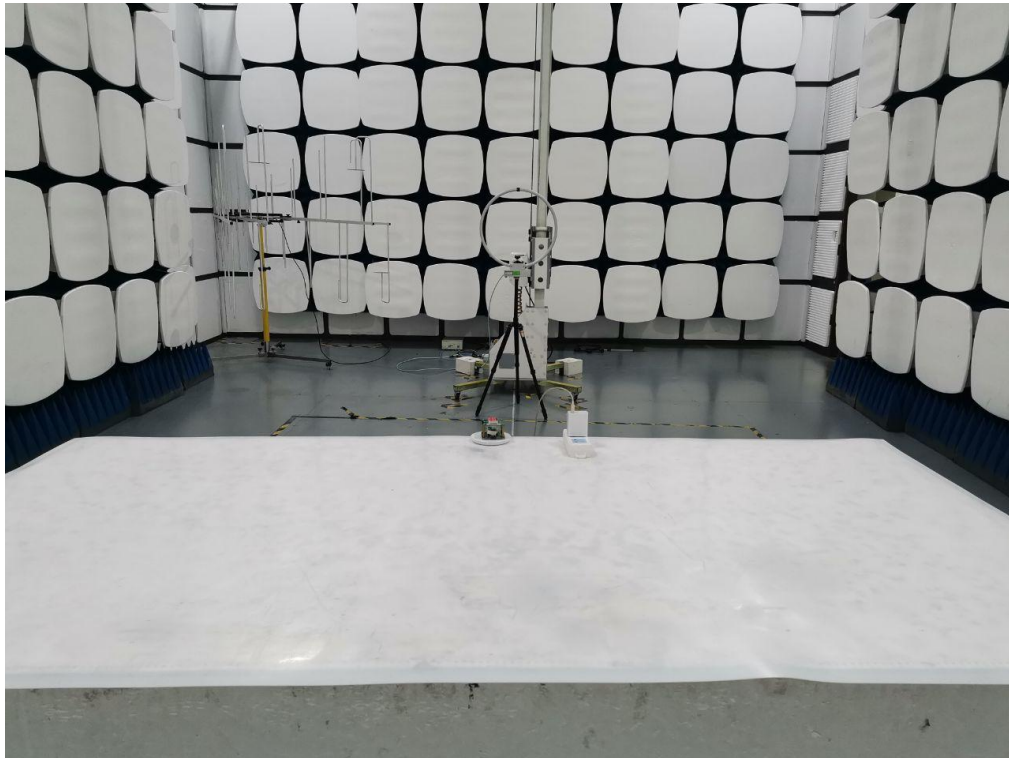


Conducted Emission









## 5. Photographs of EUT

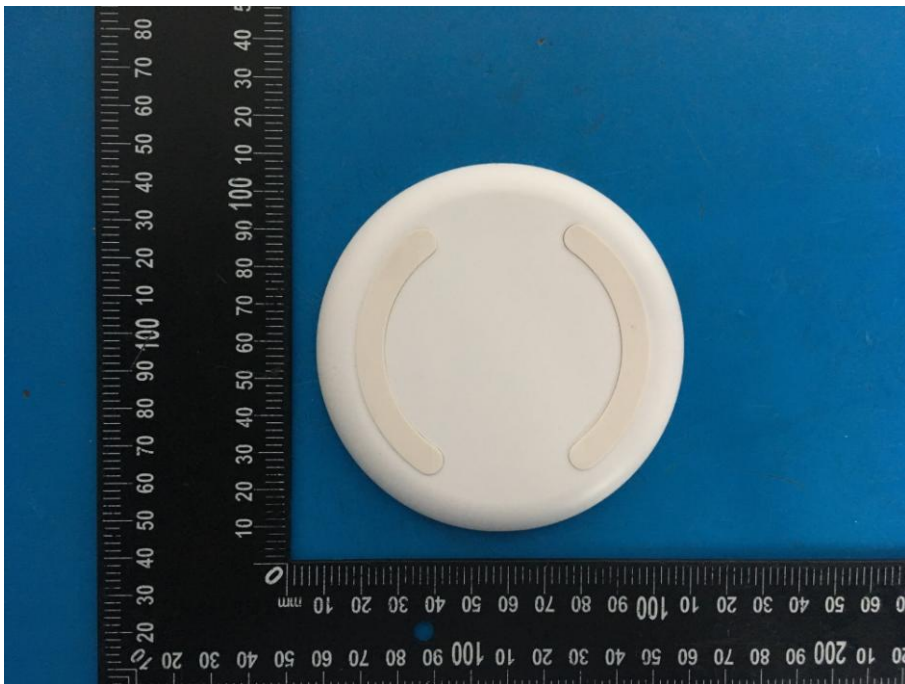
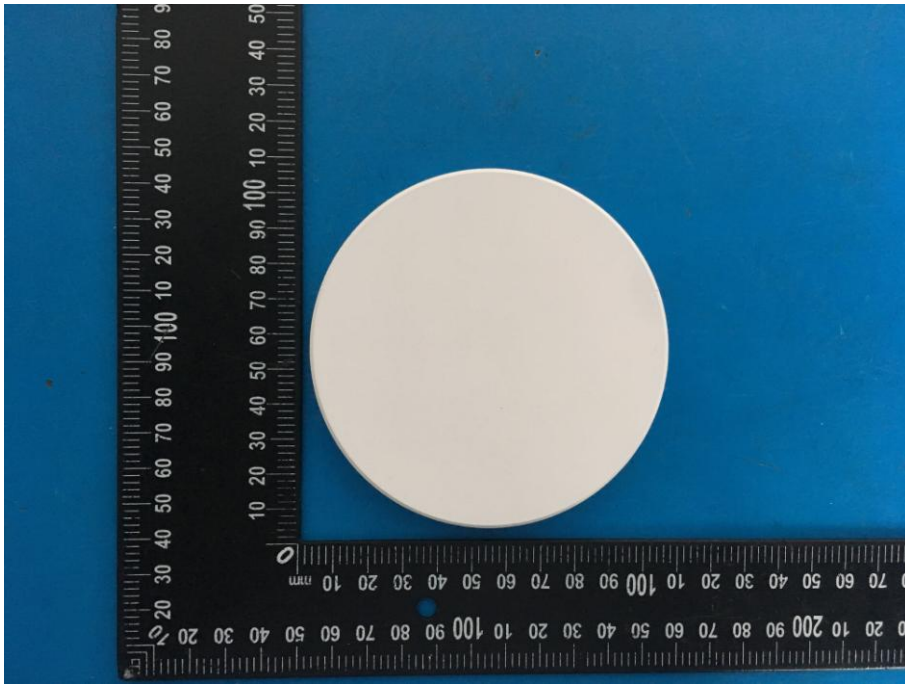






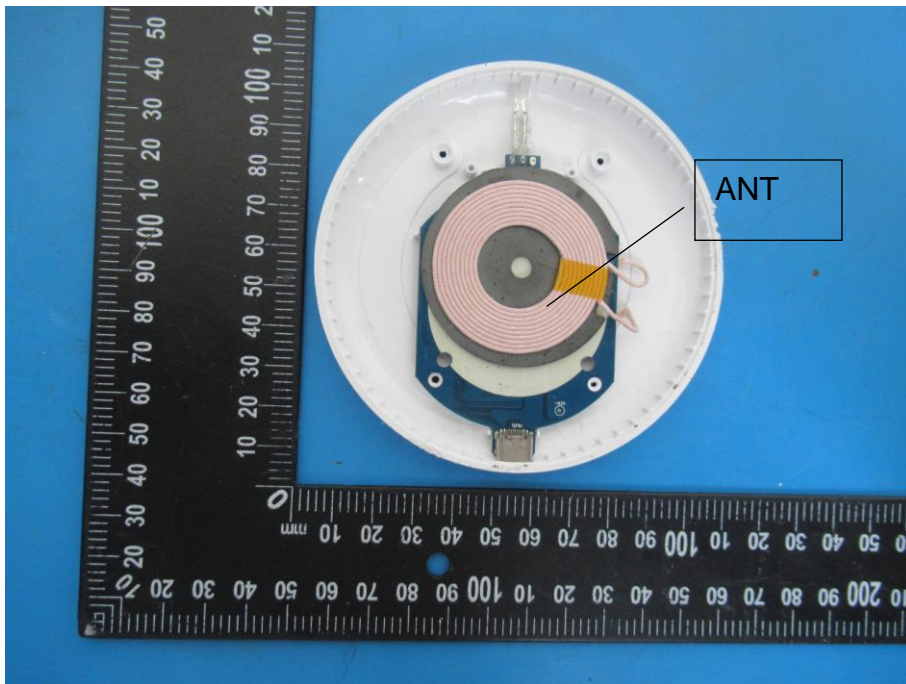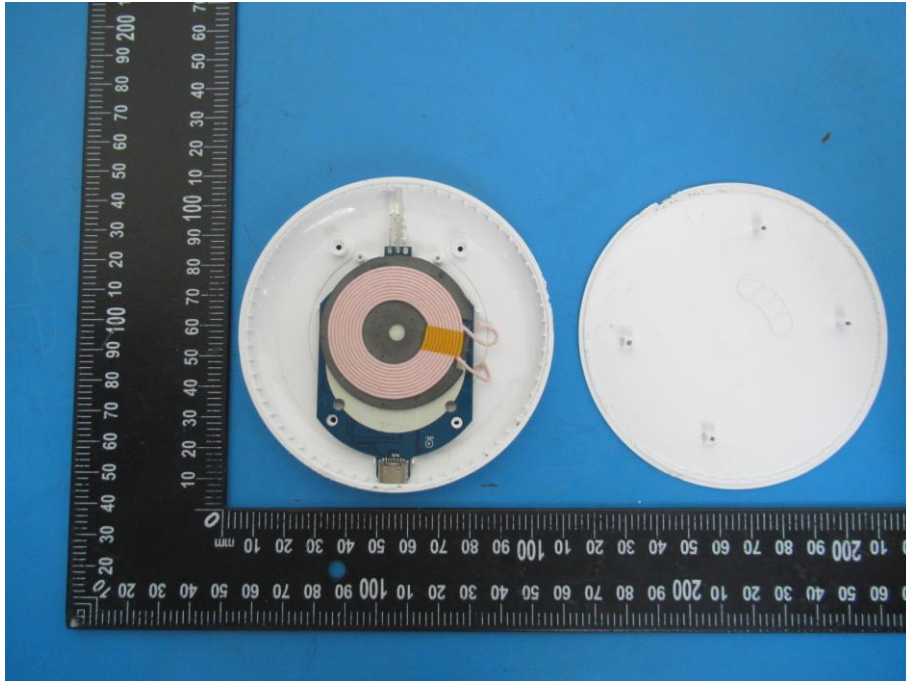

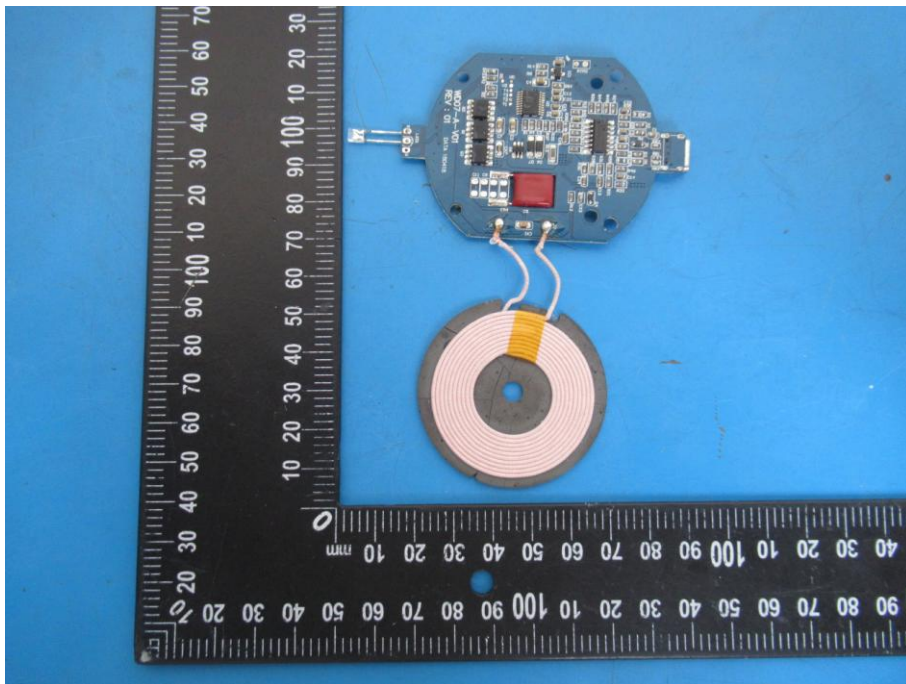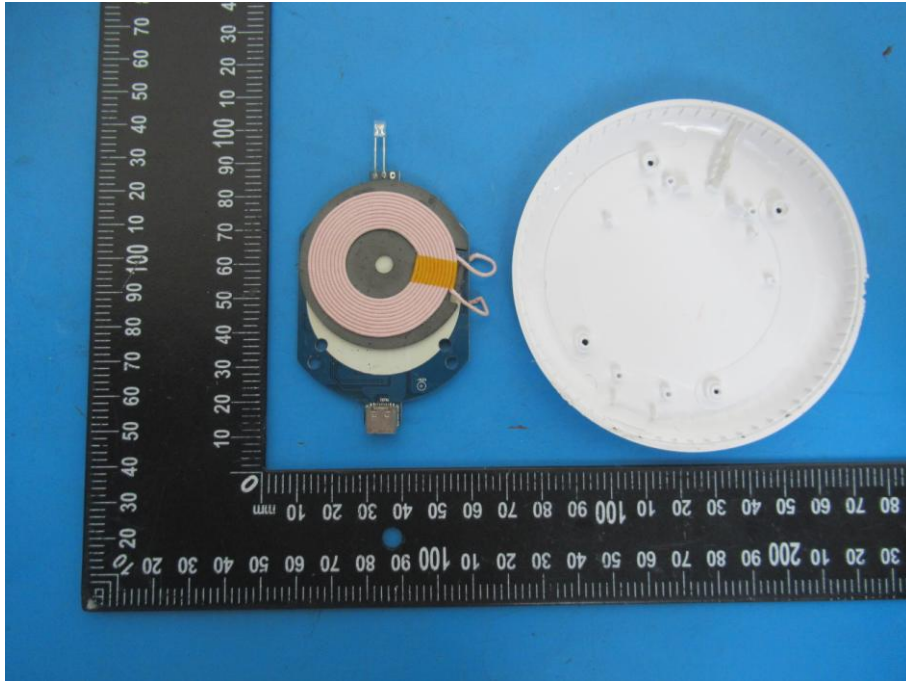

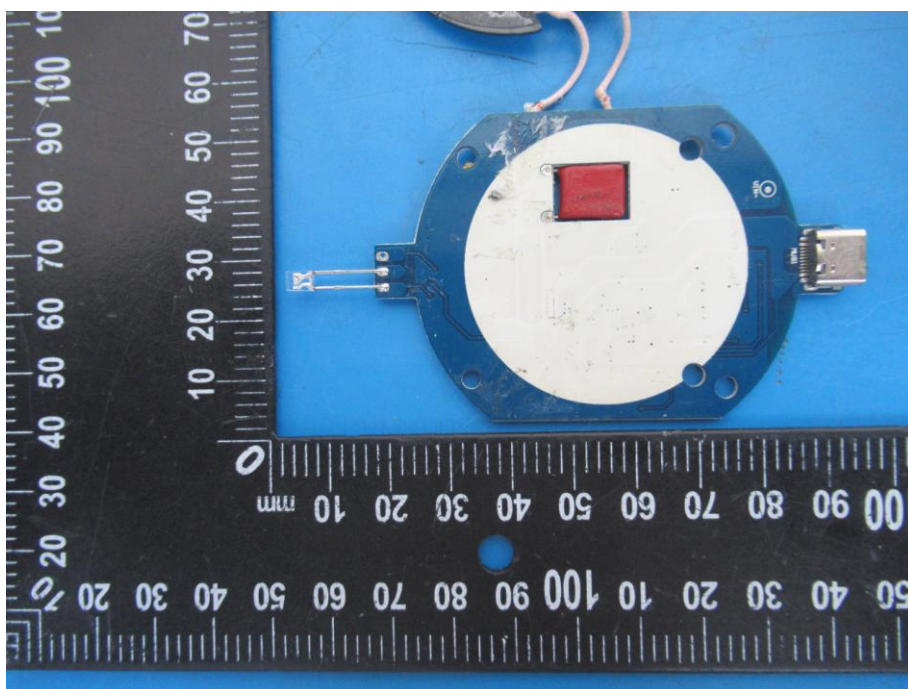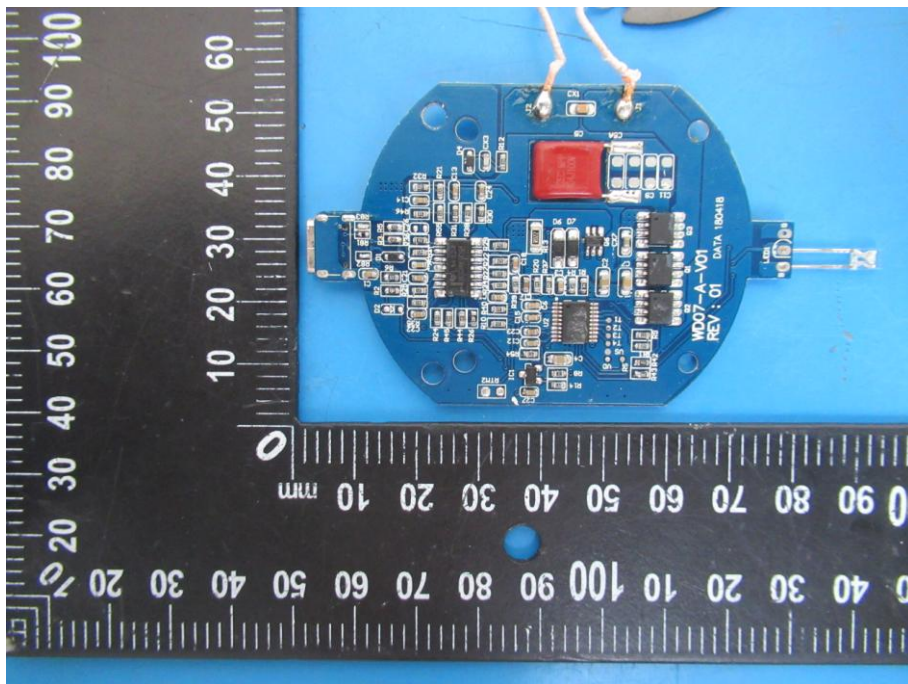

-----End-----