


FCC Test Report

FCC ID : 2AW34DS0923ST00
Equipment : DOOR SENSOR
Model No. : DS-0923ST-00
Brand Name : SeniorAdom
Applicant : KRG CORPORATE
Address : 5 rue Benjamin Raspail, 92240 Malakoff,
France
Standard : 47 CFR FCC Part 15.247
Received Date : Jul. 06, 2020
Tested Date : Jul. 28 ~ Jul. 30, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

| | | |
|----------|--|-----------|
| 1 | GENERAL DESCRIPTION | 5 |
| 1.1 | Information..... | 5 |
| 1.2 | Local Support Equipment List | 6 |
| 1.3 | Test Setup Chart | 6 |
| 1.4 | The Equipment List | 7 |
| 1.5 | Test Standards | 8 |
| 1.6 | Reference Guidance | 8 |
| 1.7 | Deviation from Test Standard and Measurement Procedure..... | 8 |
| 1.8 | Measurement Uncertainty | 8 |
| 2 | TEST CONFIGURATION..... | 9 |
| 2.1 | Testing Facility | 9 |
| 2.2 | The Worst Test Modes and Channel Details | 9 |
| 3 | TRANSMITTER TEST RESULTS | 10 |
| 3.1 | Unwanted Emissions into Restricted Frequency Bands | 10 |
| 3.2 | Unwanted Emissions into Non-Restricted Frequency Bands | 20 |
| 3.3 | RF Output Power..... | 23 |
| 3.4 | Number of Hopping Frequency | 24 |
| 3.5 | 20dB and Occupied Bandwidth..... | 26 |
| 3.6 | Channel Separation..... | 28 |
| 3.7 | Number of Dwell Time..... | 30 |
| 4 | TEST LABORATORY INFORMATION | 31 |

Release Record

| Report No. | Version | Description | Issued Date |
|------------|---------|---------------|---------------|
| FR070603 | Rev. 01 | Initial issue | Sep. 03, 2020 |

Summary of Test Results

| FCC Rules | Test Items | Measured | Result |
|---------------------|----------------------------|--|--------|
| 15.207 | Conducted Emissions | Note | Pass |
| 15.247(d) 15.209 | Radiated Emissions | [dBuV/m at 3m]: 9046.63MHz 42.35 (Margin -11.65dB) - AV | Pass |
| 15.247(d) | Band Edge | Meet the requirement of limit | Pass |
| 15.247(b)(1) | Conducted Output Power | Power [dBm]: 21.57 | Pass |
| 15.247(a)(1)(iii) | Number of Hopping Channels | Meet the requirement of limit | Pass |
| 15.247(a)(1) | Hopping Channel Separation | Meet the requirement of limit | Pass |
| 15.247(a)(1)(iii) | Dwell Time | Meet the requirement of limit | Pass |
| 15.203 | Antenna Requirement | Meet the requirement of limit | Pass |

N/A means Not Applicable.

Note: The EUT consumes DC power, so the test is not required.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

| RF General Information | | | |
|------------------------|---------------------|------------|-----------|
| Frequency Range (MHz) | Ch. Freq. (MHz) | Modulation | Data Rate |
| 902 ~ 905 | 902.1375 ~ 904.6625 | GFSK-DBPSK | 600kbps |

1.1.2 Antenna Details

| Ant. No. | Brand / Model | Type | Connector | Gain (dBi) |
|----------|---------------|-------------------------|-----------|------------|
| 1 | LITEON/Sigfox | Open-ended slot antenna | N/A | 2.23 |

1.1.3 Power Supply Type of Equipment under Test (EUT)

| | |
|--------------------------|---|
| Power Supply Type | 3Vdc from battery (1.5Vdc battery AAx2) |
|--------------------------|---|

1.1.4 Accessories

| Accessories | | |
|-------------|------------|--|
| No. | Equipment | Description |
| 1 | Battery x2 | Brand: GOLDEN POWER Model: GLR6A Rating: 1.5Vdc, 2550mAh |

1.1.5 Channel List

| UL | MHz | Micro ch.1 | Micro ch.2 | Micro ch.3 | Micro ch.4 | Micro ch.5 | Micro ch.6 |
|----|-------|------------|------------|------------|------------|------------|------------|
| 1 | 902.2 | 902.1375 | 902.1625 | 902.1875 | 902.2125 | 902.2375 | 902.2625 |
| 2 | 902.5 | 902.4375 | 902.4625 | 902.4875 | 902.5125 | 902.5375 | 902.5625 |
| 3 | 902.8 | 902.7375 | 902.7625 | 902.7875 | 902.8125 | 902.8375 | 902.8625 |
| 4 | 903.1 | 903.0375 | 903.0625 | 903.0875 | 903.1125 | 903.1375 | 903.1625 |
| 5 | 903.4 | 903.3375 | 903.3625 | 903.3875 | 903.4125 | 903.4375 | 903.4625 |
| 6 | 903.7 | 903.6375 | 903.6625 | 903.6875 | 903.7125 | 903.7375 | 903.7625 |
| 7 | 904.0 | 903.9375 | 903.9625 | 903.9875 | 904.0125 | 904.0375 | 904.0625 |
| 8 | 904.3 | 904.2375 | 904.2625 | 904.2875 | 904.3125 | 904.3375 | 904.3625 |
| 9 | 904.6 | 904.5375 | 904.5625 | 904.5875 | 904.6125 | 904.6375 | 904.6625 |


1.1.6 Test Tool and Duty Cycle

| | | |
|-----------------------------------|----------------------------|-------------------------|
| Test Tool | Tera Term, Version: V4.7.4 | |
| Duty Cycle and Duty Factor | Duty Cycle (%) | Duty Factor (dB) |
| | 95.65% | 0.19 |

1.2 Local Support Equipment List

| Support Equipment List | | | | | |
|------------------------|-----------|-------|----------------|--------|------------------------|
| No. | Equipment | Brand | Model | FCC ID | Remarks |
| 1 | Notebook | DELL | Latitude E5470 | DoC | --- |
| 2 | Fixture | --- | --- | --- | Provided by applicant. |

1.3 Test Setup Chart

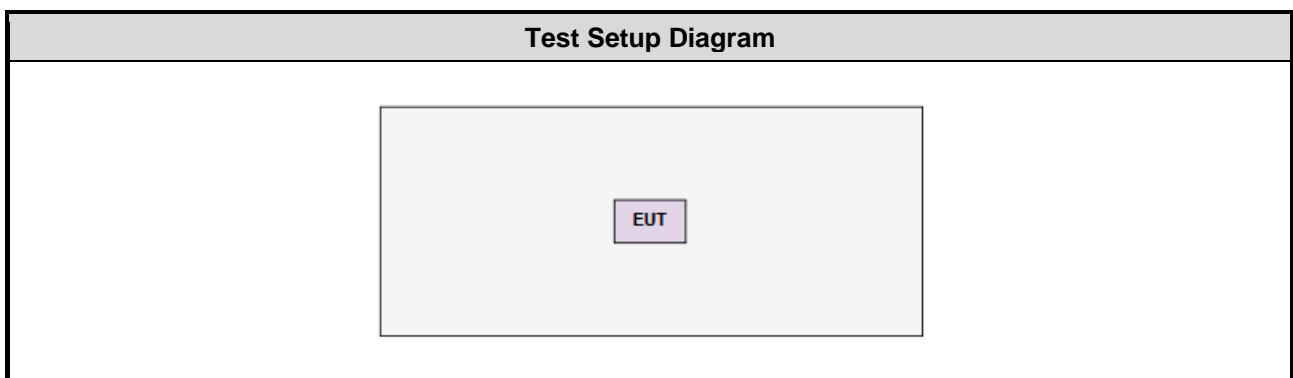

Note: The support notebook and fixture are disconnected from EUT and removed from test table when giving command to EUT to transmit continuously.

1.4 The Equipment List

| Test Item | Radiated Emission | | | | |
|-------------------------|-----------------------------|-----------------------|-------------------------|------------------|-------------------|
| Test Site | 966 chamber 3 / (03CH03-WS) | | | | |
| Instrument | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Until |
| Spectrum Analyzer | R&S | FSV40 | 101499 | Jan. 09, 2020 | Jan. 08, 2021 |
| Receiver | R&S | ESR3 | 101657 | Feb. 14, 2020 | Feb. 13, 2021 |
| Bilog Antenna | SCHWARZBECK | VULB9168 | VULB9168-685 | Apr. 29, 2020 | Apr. 28, 2021 |
| Horn Antenna 1G-18G | SCHWARZBECK | BBHA 9120 D | BBHA 9120 D 1206 | Dec. 27, 2019 | Dec. 26, 2020 |
| Horn Antenna 18G-40G | SCHWARZBECK | BBHA 9170 | BBHA 9170517 | Nov. 15, 2019 | Nov. 14, 2020 |
| Loop Antenna | R&S | HFH2-Z2 | 100330 | Nov. 13, 2019 | Nov. 12, 2020 |
| Loop Antenna Cable | KOAX KABEL | 101354-BW | 101354-BW | Oct. 07, 2019 | Oct. 06, 2020 |
| Preamplifier | EMC | EMC02325 | 980187 | Aug. 14, 2019 | Aug. 13, 2020 |
| Preamplifier | Agilent | 83017A | MY39501308 | Oct. 08, 2019 | Oct. 07, 2020 |
| Preamplifier | EMC | EMC184045B | 980192 | Jul. 21, 2020 | Jul. 20, 2021 |
| RF cable-3M | HUBER+SUHNER | SUCOFLEX104 | MY22620/4 | Sep. 27, 2019 | Sep. 26, 2020 |
| RF cable-8M | EMC | EMC104-SM-SM-80 00 | 181107 | Sep. 27, 2019 | Sep. 26, 2020 |
| RF cable-1M | HUBER+SUHNER | SUCOFLEX104 | MY22624/4 | Sep. 27, 2019 | Sep. 26, 2020 |
| LF cable-0.8M | EMC | EMC8D-NM-NM-800 | EMC8D-NM-NM-800 -001 | Sep. 27, 2019 | Sep. 26, 2020 |
| LF cable-3M | EMC | EMC8D-NM-NM-300 0 | 131103 | Sep. 27, 2019 | Sep. 26, 2020 |
| LF cable-13M | EMC | EMC8D-NM-NM-130 00 | 131104 | Sep. 27, 2019 | Sep. 26, 2020 |
| Measurement Software | AUDIX | e3 | 6.120210g | NA | NA |

Note: Calibration Interval of instruments listed above is one year.

| Test Item | RF Conducted | | | | |
|-------------------------|--------------|-----------|------------|------------------|-------------------|
| Test Site | (TH01-WS) | | | | |
| Instrument | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Until |
| Spectrum Analyzer | R&S | FSV40 | 101063 | Apr. 30, 2020 | Apr. 29, 2021 |
| Power Meter | Anritsu | ML2495A | 1241002 | Oct. 23, 2019 | Oct. 22, 2020 |
| Power Sensor | Anritsu | MA2411B | 1207366 | Oct. 23, 2019 | Oct. 22, 2020 |
| Measurement Software | Sporton | Sporton_1 | 1.3.30 | NA | NA |

Note: Calibration Interval of instruments listed above is one year.

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

| Measurement Uncertainty | |
|--------------------------------|-----------------|
| Parameters | Uncertainty |
| Bandwidth | ± 34.130 Hz |
| AC conducted emission | ± 2.92 dB |
| Radiated emission ≤ 1 GHz | ± 3.41 dB |
| Radiated emission > 1 GHz | ± 4.59 dB |

2 Test Configuration

2.1 Testing Facility

| | |
|-----------------------------|---|
| Test Laboratory | International Certification Corp. |
| Test Site | TH01-WS |
| Address of Test Site | No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C. |
| Test Site | 03CH03-WS |
| Address of Test Site | No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C. |

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

| Test item | Mode | Test Frequency (MHz) | Data Rate (Mbps) | Test Configuration |
|--|------------|----------------------|------------------|--------------------|
| Radiated Emissions ≤ 1GHz Radiated Emissions > 1GHz Conducted Output Power Number of Hopping Channels Hopping Channel Separation 20dB and Occupied bandwidth | GFSK-DBPSK | 902.1375 / 904.6625 | 600kbps | --- |
| Dwell Time | GFSK-DBPSK | 902.1375 | 600kbps | --- |
| NOTE: | | | | |
| 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report. | | | | |

3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

| Restricted Band Emissions Limit | | | |
|---------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz) | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490 | 2400/F(kHz) | 48.5 - 13.8 | 300 |
| 0.490~1.705 | 24000/F(kHz) | 33.8 - 23 | 30 |
| 1.705~30.0 | 30 | 29 | 30 |
| 30~88 | 100 | 40 | 3 |
| 88~216 | 150 | 43.5 | 3 |
| 216~960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.


3.1.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.1.3 Test Setup

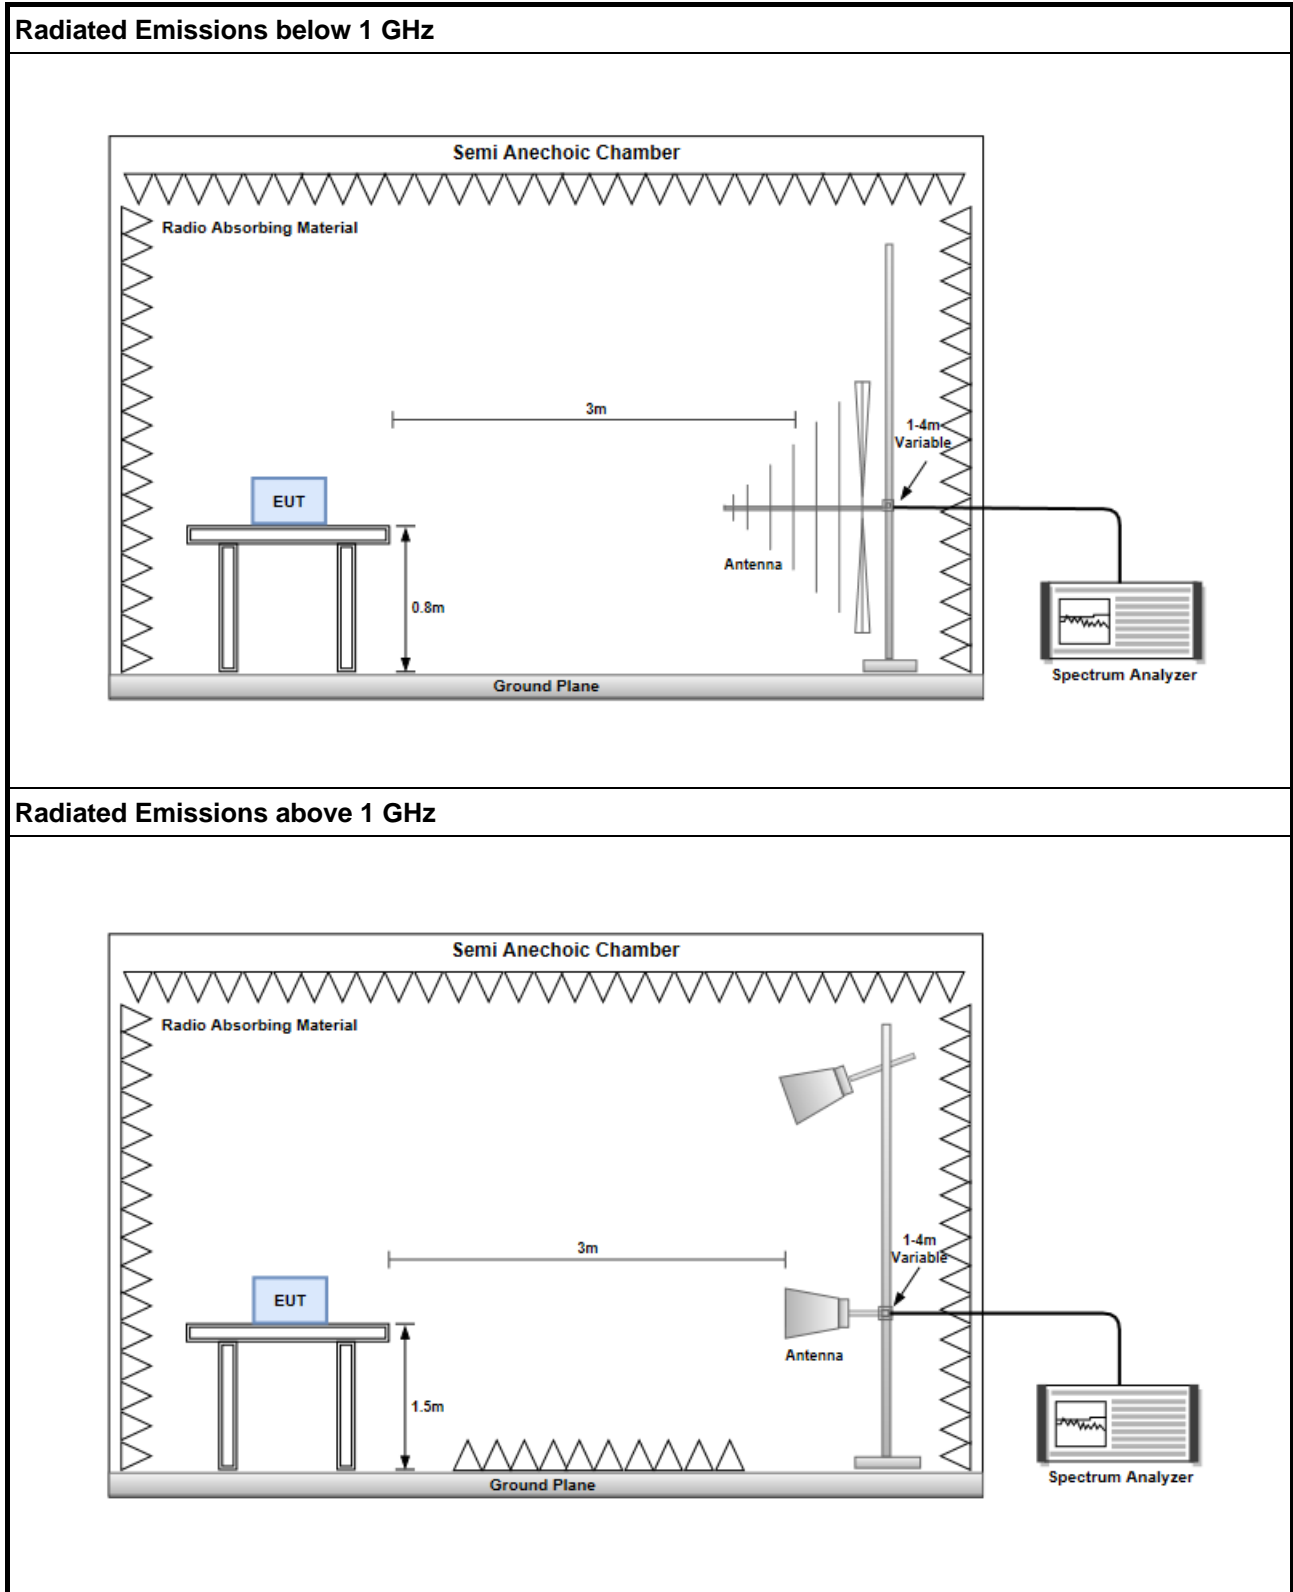


3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)
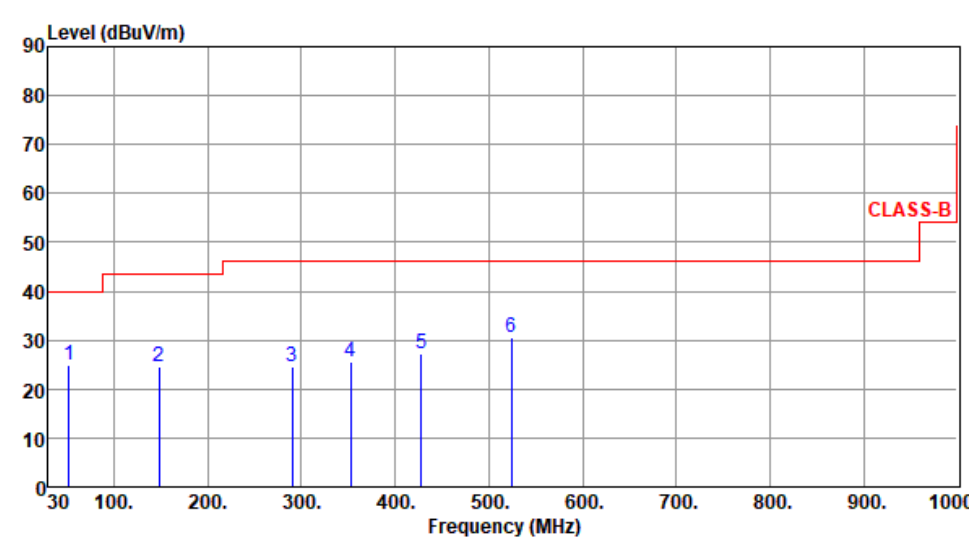
| | | | | | | | | | |
|---|------------|-------------------------|----------|--------|------------|--------|--------|----------|------------|
| Modulation | GFSK-DBPSK | Test Freq. (MHz) | 902.1375 | | | | | | |
| Polarization | Horizontal | | | | | | | | |
| Test By :BRAD WU Temperature(°C):24 Humidity(%):64 | | | | | | | | | |
|  | | | | | | | | | |
| | Freq. | Emission level | Limit | Margin | SA reading | Factor | Remark | ANT High | Turn Table |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | | cm | deg |
| 1 | 52.31 | 24.96 | 40.00 | -15.04 | 33.89 | -8.93 | Peak | --- | --- |
| 2 | 148.34 | 24.50 | 43.50 | -19.00 | 33.52 | -9.02 | Peak | --- | --- |
| 3 | 289.96 | 24.66 | 46.00 | -21.34 | 33.34 | -8.68 | Peak | --- | --- |
| 4 | 353.01 | 25.44 | 46.00 | -20.56 | 32.61 | -7.17 | Peak | --- | --- |
| 5 | 427.70 | 27.30 | 46.00 | -18.70 | 32.17 | -4.87 | Peak | --- | --- |
| 6 | 523.73 | 30.51 | 46.00 | -15.49 | 33.07 | -2.56 | Peak | --- | --- |

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

| | | | |
|---------------------|------------|-------------------------|----------|
| Modulation | GFSK-DBPSK | Test Freq. (MHz) | 902.1375 |
| Polarization | Vertical | | |

Test By :BRAD WU Temperature(°C):24 Humidity(%):64

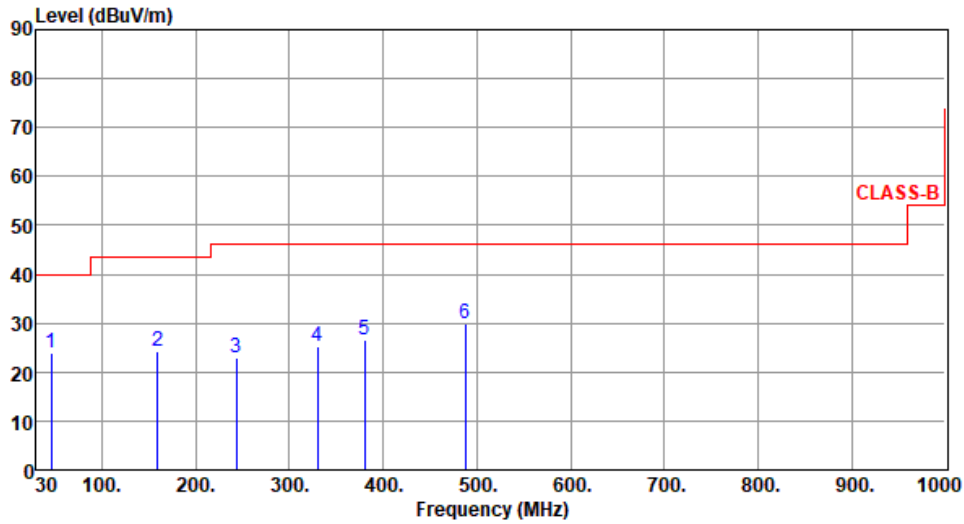

| | Freq. MHz | Emission level dBuV/m | Limit dBuV/m | Margin dB | SA reading dBuV | Factor dB | Remark | ANT High cm | Turn Table deg |
|---|--------------|-----------------------------|-----------------|--------------|-----------------------|--------------|--------|-------------------|----------------------|
| 1 | 45.52 | 23.89 | 40.00 | -16.11 | 32.65 | -8.76 | Peak | --- | --- |
| 2 | 159.01 | 24.41 | 43.50 | -19.09 | 33.33 | -8.92 | Peak | --- | --- |
| 3 | 243.40 | 22.80 | 46.00 | -23.20 | 33.24 | -10.44 | Peak | --- | --- |
| 4 | 329.73 | 25.31 | 46.00 | -20.69 | 32.68 | -7.37 | Peak | --- | --- |
| 5 | 380.17 | 26.49 | 46.00 | -19.51 | 32.71 | -6.22 | Peak | --- | --- |
| 6 | 487.84 | 29.97 | 46.00 | -16.03 | 33.36 | -3.39 | Peak | --- | --- |

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

| | | | |
|---------------------|------------|-------------------------|----------|
| Modulation | GFSK-DBPSK | Test Freq. (MHz) | 904.6625 |
| Polarization | Horizontal | | |

Test By :BRAD WU Temperature(°C):24 Humidity(%):64

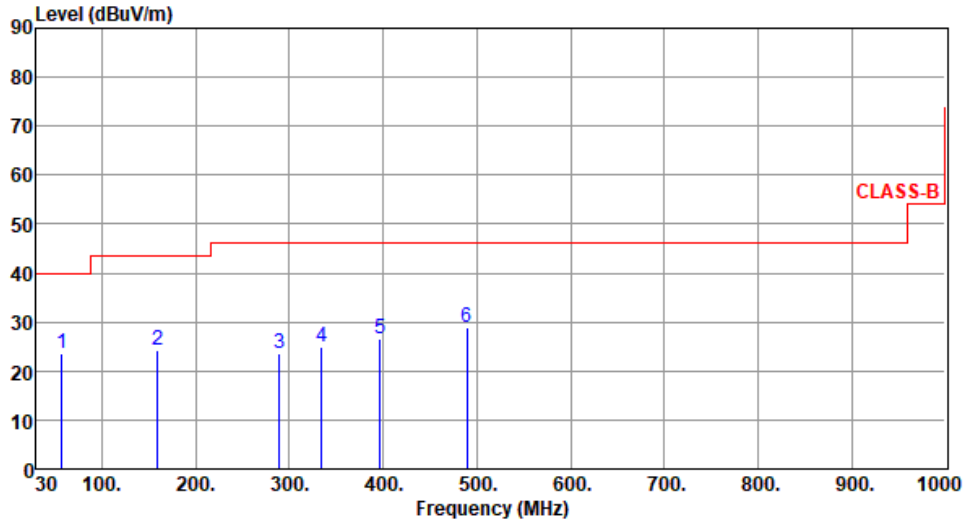

| | Freq. MHz | Emission level dBuV/m | Limit dBuV/m | Margin dB | SA reading dBuV | Factor dB | Remark | ANT High cm | Turn Table deg |
|---|--------------|-----------------------------|-----------------|--------------|-----------------------|--------------|--------|-------------------|----------------------|
| 1 | 57.16 | 23.57 | 40.00 | -16.43 | 32.63 | -9.06 | Peak | --- | --- |
| 2 | 159.01 | 24.37 | 43.50 | -19.13 | 33.29 | -8.92 | Peak | --- | --- |
| 3 | 288.99 | 23.57 | 46.00 | -22.43 | 32.30 | -8.73 | Peak | --- | --- |
| 4 | 334.58 | 25.06 | 46.00 | -20.94 | 32.30 | -7.24 | Peak | --- | --- |
| 5 | 396.66 | 26.61 | 46.00 | -19.39 | 32.40 | -5.79 | Peak | --- | --- |
| 6 | 489.78 | 29.03 | 46.00 | -16.97 | 32.41 | -3.38 | Peak | --- | --- |

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

| | | | |
|---------------------|------------|-------------------------|----------|
| Modulation | GFSK-DBPSK | Test Freq. (MHz) | 904.6625 |
| Polarization | Vertical | | |

Test By :BRAD WU Temperature(°C):24 Humidity(%):64

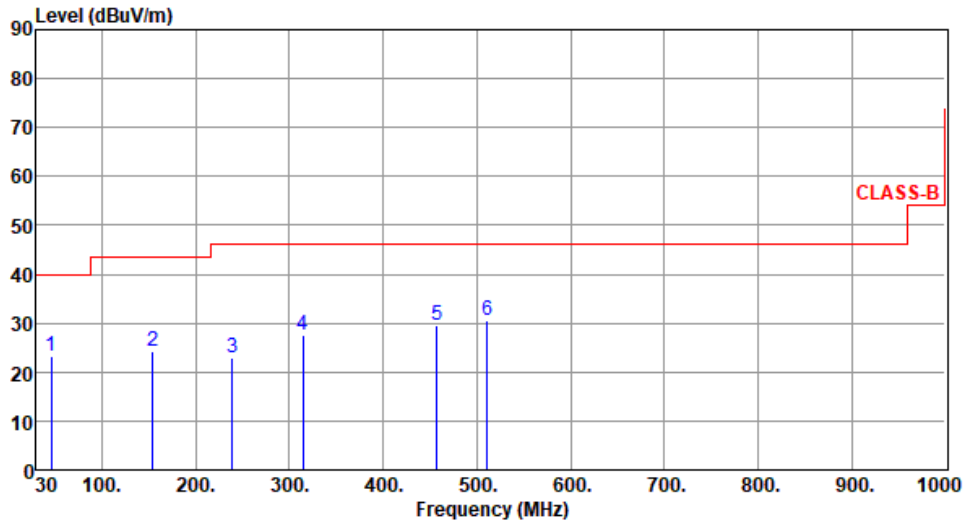

| | Freq. MHz | Emission level dBuV/m | Limit dBuV/m | Margin dB | SA reading dBuV | Factor dB | Remark | ANT High cm | Turn Table deg |
|---|--------------|-----------------------------|-----------------|--------------|-----------------------|--------------|--------|-------------------|----------------------|
| 1 | 45.52 | 23.41 | 40.00 | -16.59 | 32.17 | -8.76 | Peak | --- | --- |
| 2 | 154.16 | 24.28 | 43.50 | -19.22 | 33.21 | -8.93 | Peak | --- | --- |
| 3 | 239.52 | 23.01 | 46.00 | -22.99 | 33.65 | -10.64 | Peak | --- | --- |
| 4 | 314.21 | 27.56 | 46.00 | -18.44 | 35.54 | -7.98 | Peak | --- | --- |
| 5 | 457.77 | 29.46 | 46.00 | -16.54 | 33.32 | -3.86 | Peak | --- | --- |
| 6 | 511.12 | 30.60 | 46.00 | -15.40 | 33.39 | -2.79 | Peak | --- | --- |


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)
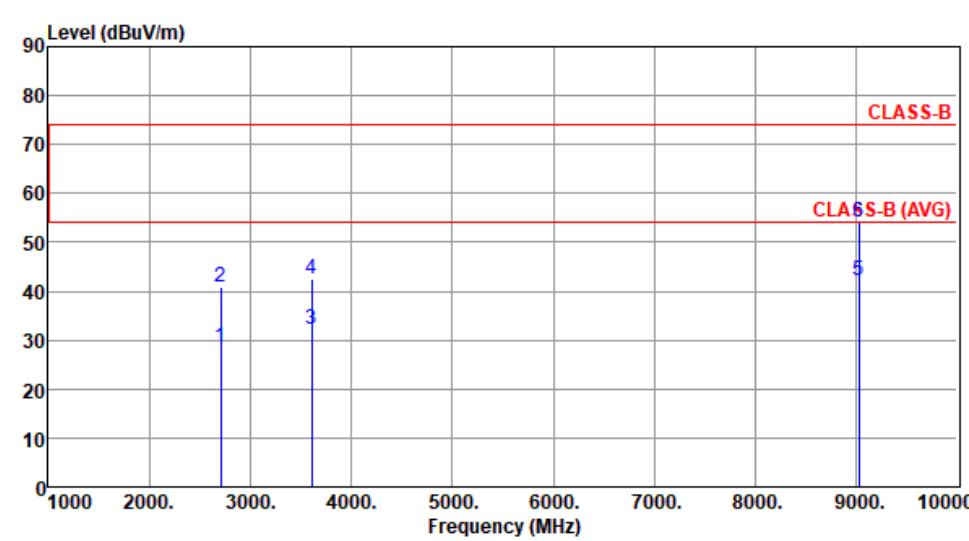
| | | | | | | | | | |
|---|------------|-------------------------|--------------|-----------|-----------------|-----------|---------|-------------|----------------|
| Modulation | GFSK-DBPSK | Test Freq. (MHz) | 902.1375 | | | | | | |
| Polarization | Horizontal | | | | | | | | |
| Test By :BRAD WU Temperature(°C):24 Humidity(%):64 | | | | | | | | | |
|  | | | | | | | | | |
| | Freq. MHz | Emission level dBuV/m | Limit dBuV/m | Margin dB | SA reading dBuV | Factor dB | Remark | ANT High cm | Turn Table deg |
| 1 | 2706.41 | 28.53 | 54.00 | -25.47 | 30.20 | -1.67 | Average | 100 | 54 |
| 2 | 2706.41 | 40.80 | 74.00 | -33.20 | 42.47 | -1.67 | Peak | 100 | 54 |
| 3 | 3608.55 | 32.30 | 54.00 | -21.70 | 31.16 | 1.14 | Average | 106 | 209 |
| 4 | 3608.55 | 42.55 | 74.00 | -31.45 | 41.41 | 1.14 | Peak | 106 | 209 |
| 5 | 9021.38 | 42.03 | 54.00 | -11.97 | 30.14 | 11.89 | Average | 100 | 33 |
| 6 | 9021.38 | 54.21 | 74.00 | -19.79 | 42.32 | 11.89 | Peak | 100 | 33 |

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

| | | | |
|---------------------|------------|-------------------------|----------|
| Modulation | GFSK-DBPSK | Test Freq. (MHz) | 902.1375 |
| Polarization | Vertical | | |

Test By :BRAD WU Temperature(°C):24 Humidity(%):64

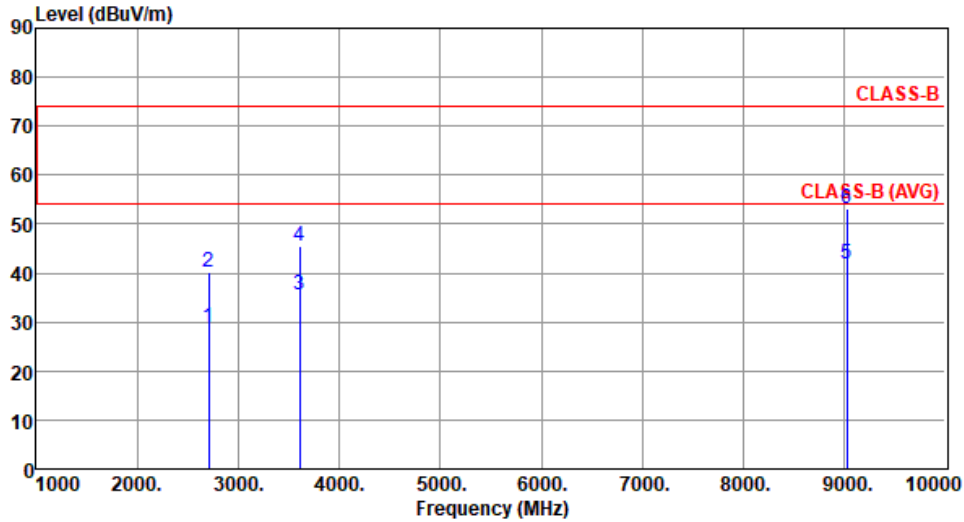

| | Freq. MHz | Emission level dBuV/m | Limit dBuV/m | Margin dB | SA reading dBuV | Factor dB | Remark | ANT High cm | Turn Table deg |
|---|--------------|-----------------------------|-----------------|--------------|-----------------------|--------------|---------|-------------------|----------------------|
| 1 | 2706.41 | 28.80 | 54.00 | -25.20 | 30.47 | -1.67 | Average | 100 | 24 |
| 2 | 2706.41 | 40.30 | 74.00 | -33.70 | 41.97 | -1.67 | Peak | 100 | 24 |
| 3 | 3608.55 | 35.56 | 54.00 | -18.44 | 34.42 | 1.14 | Average | 100 | 359 |
| 4 | 3608.55 | 45.65 | 74.00 | -28.35 | 44.51 | 1.14 | Peak | 100 | 359 |
| 5 | 9021.38 | 41.78 | 54.00 | -12.22 | 29.89 | 11.89 | Average | 100 | 15 |
| 6 | 9021.38 | 53.13 | 74.00 | -20.87 | 41.24 | 11.89 | Peak | 100 | 15 |


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

| | | | |
|---------------------|------------|-------------------------|----------|
| Modulation | GFSK-DBPSK | Test Freq. (MHz) | 904.6625 |
| Polarization | Horizontal | | |

Test By :BRAD WU Temperature(°C):24 Humidity(%):64

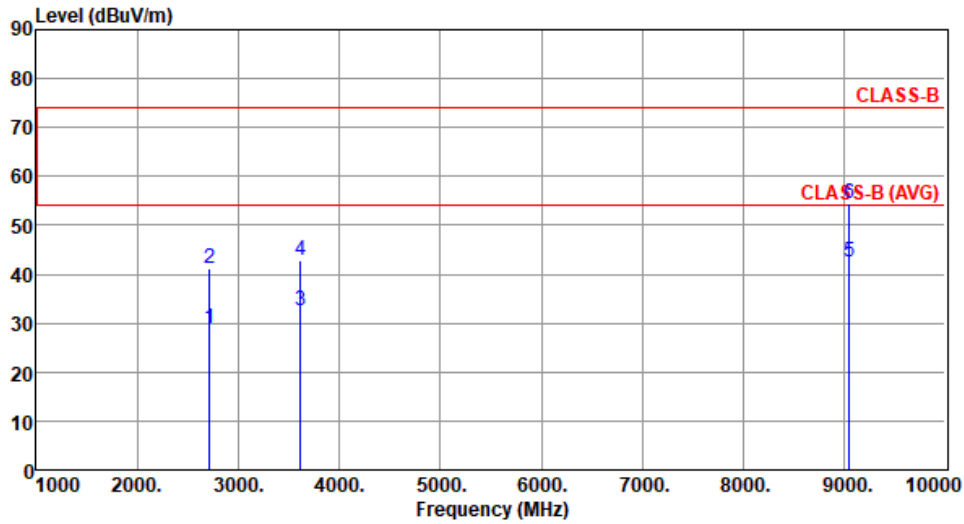

| | Freq. MHz | Emission level dBuV/m | Limit dBuV/m | Margin dB | SA reading dBuV | Factor dB | Remark | ANT High cm | Turn Table deg |
|---|--------------|-----------------------------|-----------------|--------------|-----------------------|--------------|---------|-------------------|----------------------|
| 1 | 2713.99 | 28.84 | 54.00 | -25.16 | 30.50 | -1.66 | Average | 100 | 61 |
| 2 | 2713.99 | 41.16 | 74.00 | -32.84 | 42.82 | -1.66 | Peak | 100 | 61 |
| 3 | 3618.65 | 32.45 | 54.00 | -21.55 | 31.31 | 1.14 | Average | 110 | 224 |
| 4 | 3618.65 | 42.68 | 74.00 | -31.32 | 41.54 | 1.14 | Peak | 110 | 224 |
| 5 | 9046.63 | 42.35 | 54.00 | -11.65 | 30.49 | 11.86 | Average | 100 | 44 |
| 6 | 9046.63 | 54.56 | 74.00 | -19.44 | 42.70 | 11.86 | Peak | 100 | 44 |


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

| | | | |
|---------------------|------------|-------------------------|----------|
| Modulation | GFSK-DBPSK | Test Freq. (MHz) | 904.6625 |
| Polarization | Vertical | | |

Test By :BRAD WU Temperature(°C):24 Humidity(%):64

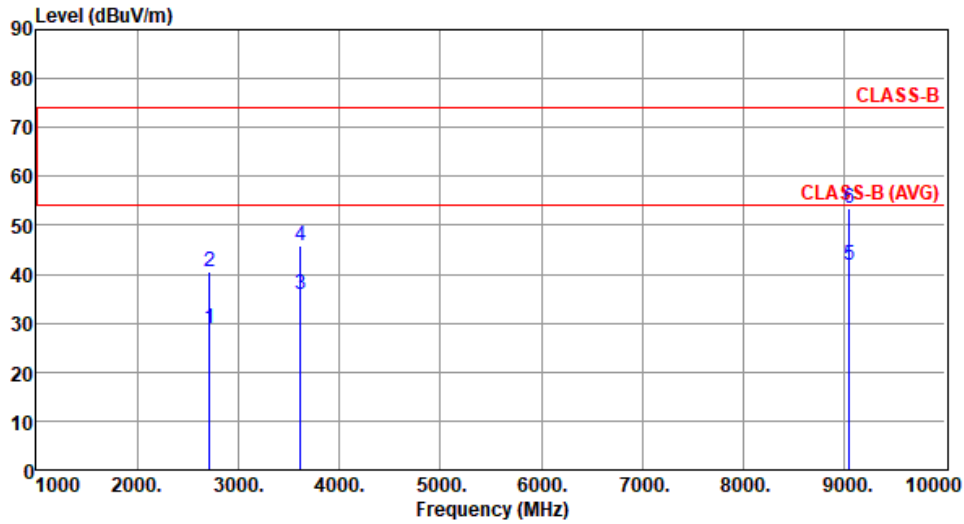

| | Freq. MHz | Emission level dBuV/m | Limit dBuV/m | Margin dB | SA reading dBuV | Factor dB | Remark | ANT High cm | Turn Table deg |
|---|--------------|-----------------------------|-----------------|--------------|-----------------------|--------------|---------|-------------------|----------------------|
| 1 | 2713.99 | 28.96 | 54.00 | -25.04 | 30.62 | -1.66 | Average | 100 | 15 |
| 2 | 2713.99 | 40.46 | 74.00 | -33.54 | 42.12 | -1.66 | Peak | 100 | 15 |
| 3 | 3618.65 | 35.84 | 54.00 | -18.16 | 34.70 | 1.14 | Average | 100 | 355 |
| 4 | 3618.65 | 45.92 | 74.00 | -28.08 | 44.78 | 1.14 | Peak | 100 | 355 |
| 5 | 9046.63 | 41.95 | 54.00 | -12.05 | 30.09 | 11.86 | Average | 100 | 24 |
| 6 | 9046.63 | 53.44 | 74.00 | -20.56 | 41.58 | 11.86 | Peak | 100 | 24 |

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.2 Unwanted Emissions into Non-Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power

3.2.2 Test Procedures


Reference Level Measurement

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Set Sweep time = auto couple, Trace mode = max hold.
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement


1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Trace Mode = max hold, Sweep = auto couple.
3. Allow the trace to stabilize.
4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


3.2.3 Test Setup



3.2.4 Unwanted Emissions into Non-Restricted Frequency Bands

| | | | |
|-------------------|------------|-----------|------------|
| Ambient Condition | 24°C / 67% | Tested By | Aska Huang |
|-------------------|------------|-----------|------------|

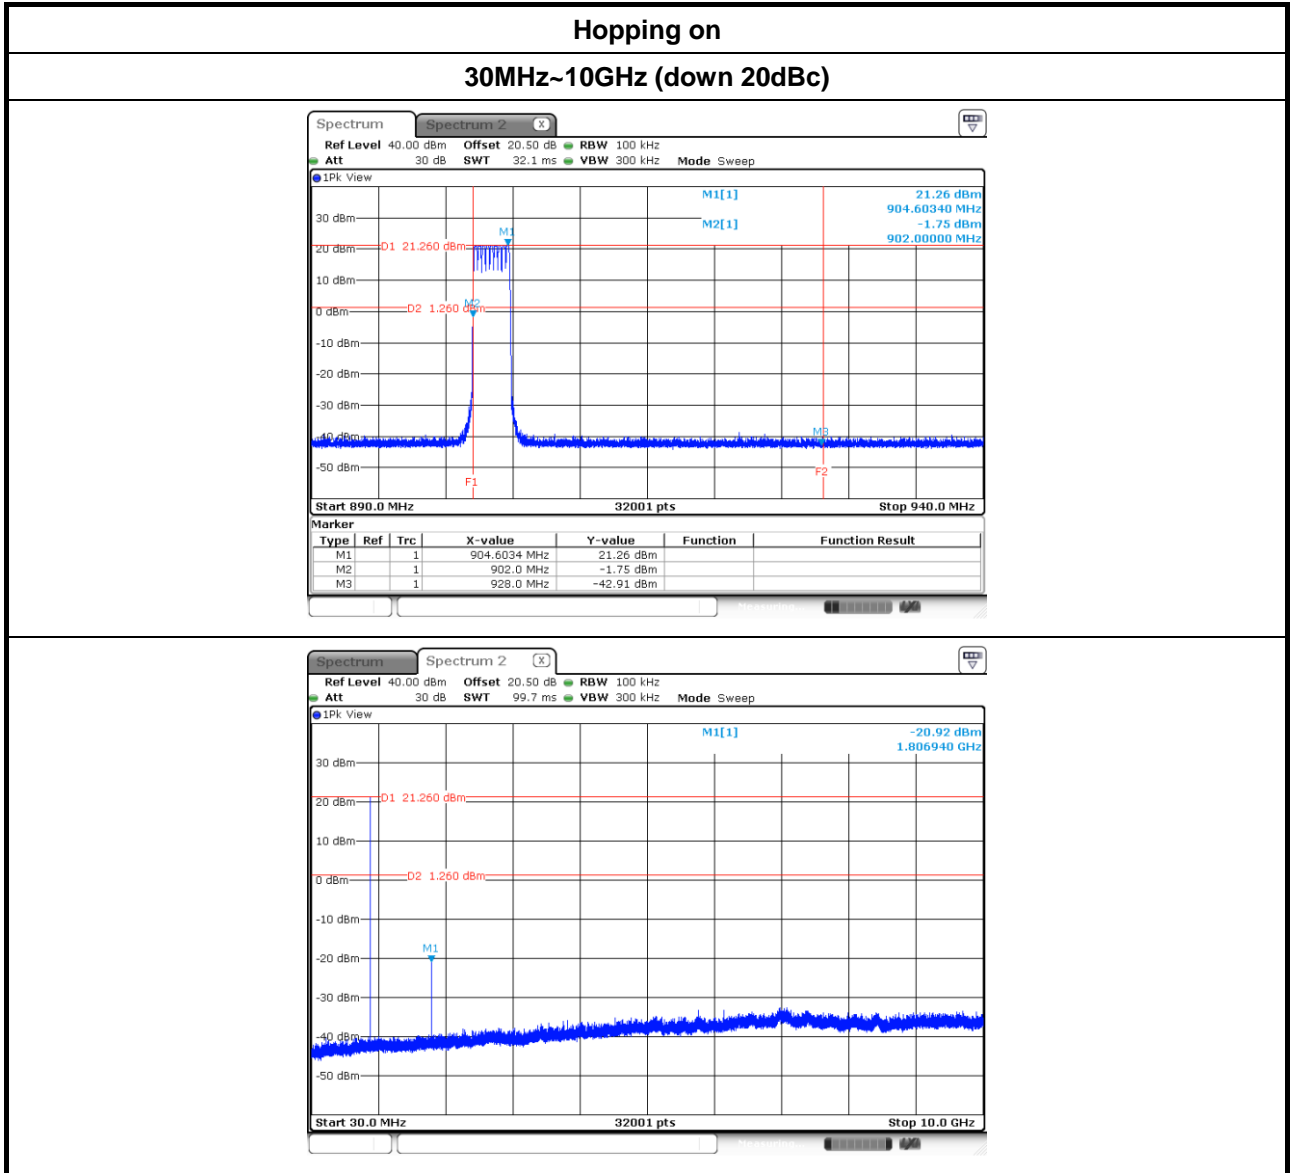

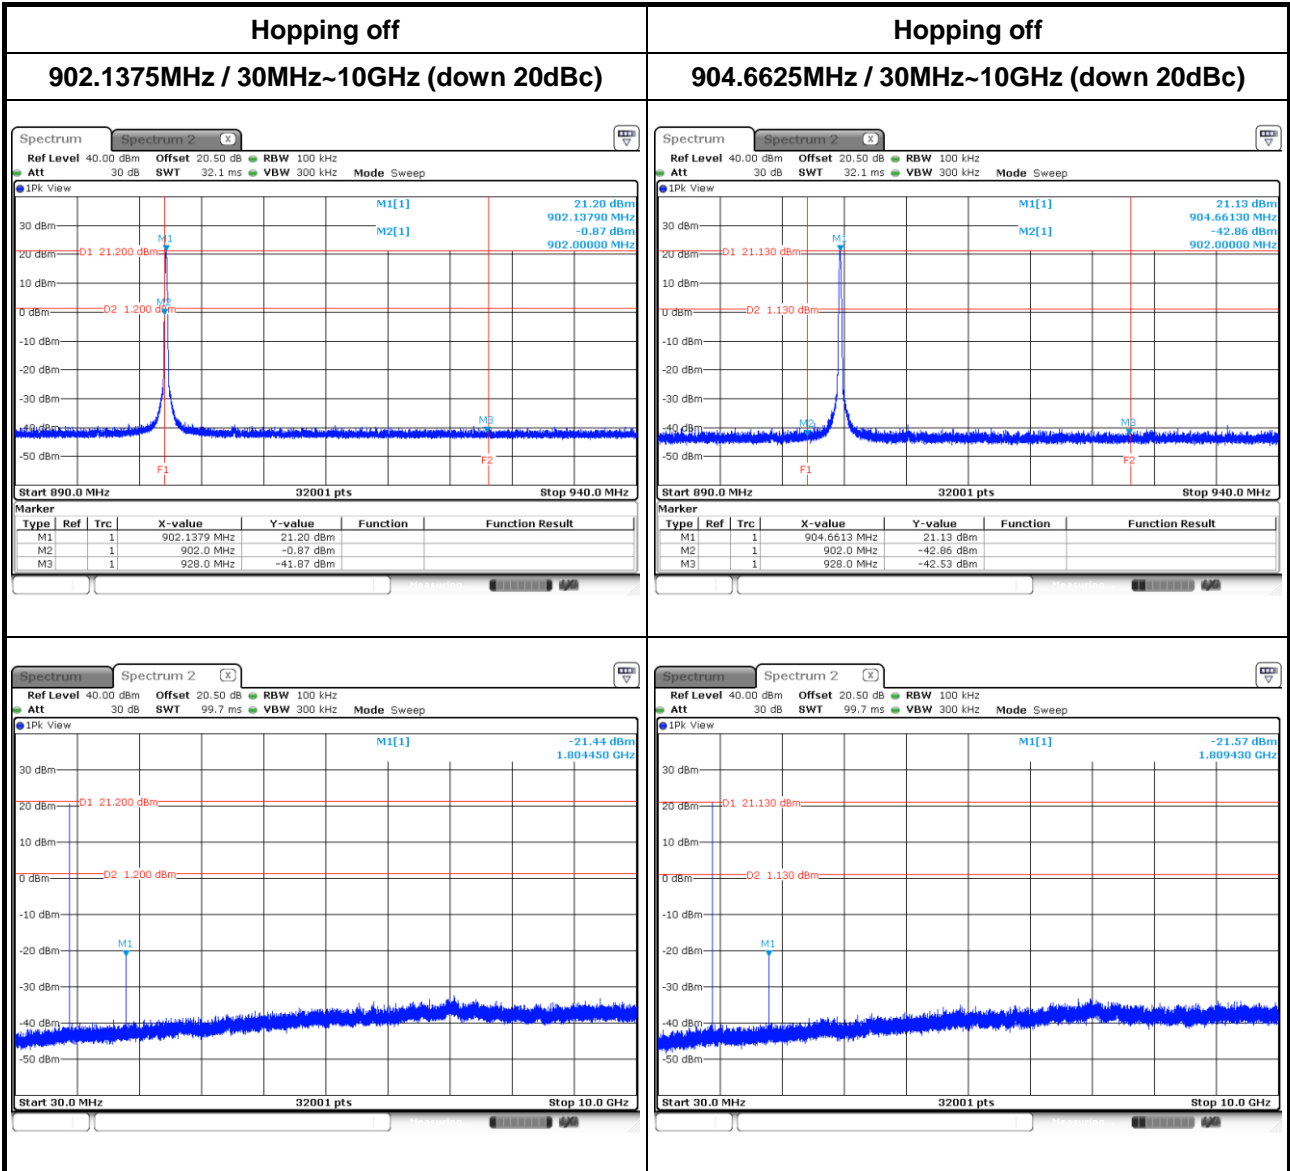

3.3 RF Output Power

3.3.1 Limit of RF Output Power


1 watt for systems employing at least 50 hopping channels

3.3.2 Test Procedures

A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz

If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.3.3 Test Setup



3.3.4 Test Result of Maximum Output Power

| | | | |
|--------------------------|------------|------------------|------------|
| Ambient Condition | 24°C / 67% | Tested By | Aska Huang |
|--------------------------|------------|------------------|------------|

| Modulation Mode | Freq. (MHz) | Output Power (mW) | Output Power (dBm) | Limit (dBm) |
|-----------------|-------------|-------------------|--------------------|-------------|
| GFSK-DBPSK | 902.1375 | 138.68 | 21.42 | 30 |
| GFSK-DBPSK | 904.6625 | 143.55 | 21.57 | 30 |

| Modulation Mode | Freq. (MHz) | AV Output Power (mW) | AV Output Power (dBm) |
|-----------------|-------------|----------------------|-----------------------|
| GFSK-DBPSK | 902.1375 | 137.09 | 21.37 |
| GFSK-DBPSK | 904.6625 | 141.91 | 21.52 |

Note: Average power is for reference only.

3.4 Number of Hopping Frequency


3.4.1 Limit of Number of Hopping Frequency

The 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies.

3.4.2 Test Procedures


1. Set RBW = 1 kHz, VBW = 3 kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

3.4.3 Test Setup



3.4.4 Test Result of Number of Hopping Frequency

| | | | |
|-------------------|------------|-----------|------------|
| Ambient Condition | 24°C / 67% | Tested By | Aska Huang |
|-------------------|------------|-----------|------------|

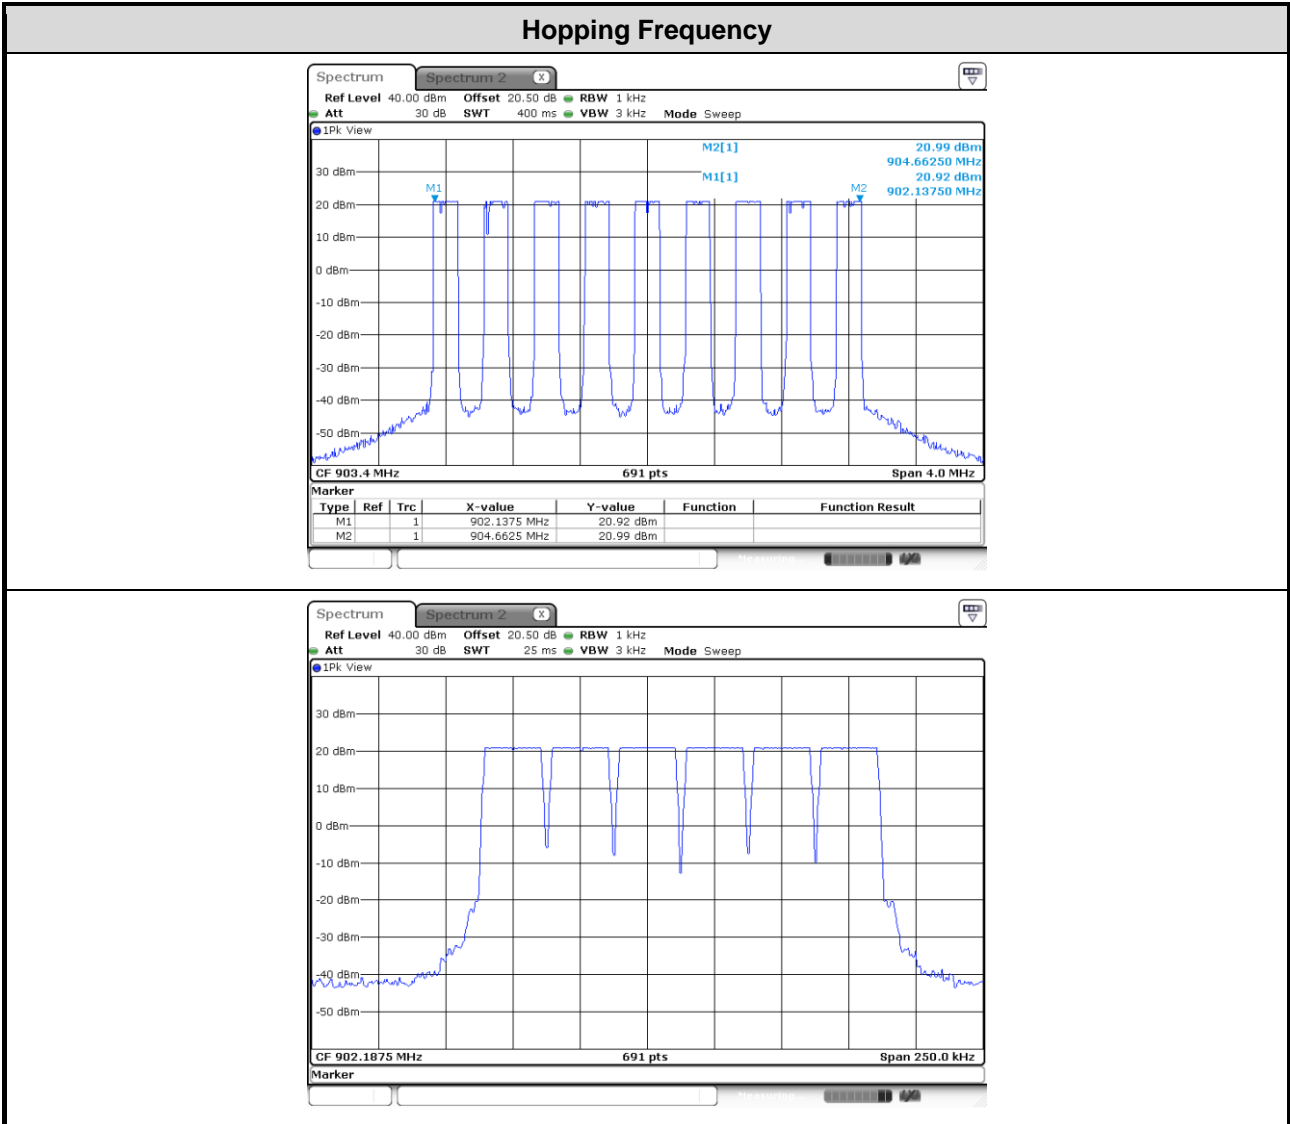

Note:

Plot 1: 9 groups

Plot 2: 6 channels / 1 group

Total channel: 9 * 6 = 54 channels

3.5 20dB and Occupied Bandwidth


3.5.1 Limit of Number of 20dB Bandwidth

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.5.2 Test Procedures

1. Set resolution bandwidth (RBW) = 500 Hz, Video bandwidth = 2 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.
5. Use the occupied measurement function of spectrum analyzer to measure 99% occupied bandwidth.


3.5.3 Test Setup



3.5.4 20dB and Occupied Bandwidth

| | | | |
|--------------------------|------------|------------------|------------|
| Ambient Condition | 24°C / 67% | Tested By | Aska Huang |
|--------------------------|------------|------------------|------------|

| Modulation Mode | Freq. (MHz) | 20dB Bandwidth (kHz) | Occupied Bandwidth (kHz) |
|--------------------|-------------|----------------------|--------------------------|
| GFSK-DBPSK | 902.1375 | 22.25 | 21.06 |
| GFSK-DBPSK | 904.6625 | 22.18 | 21.06 |
| Limit (kHz) | | 500 | --- |

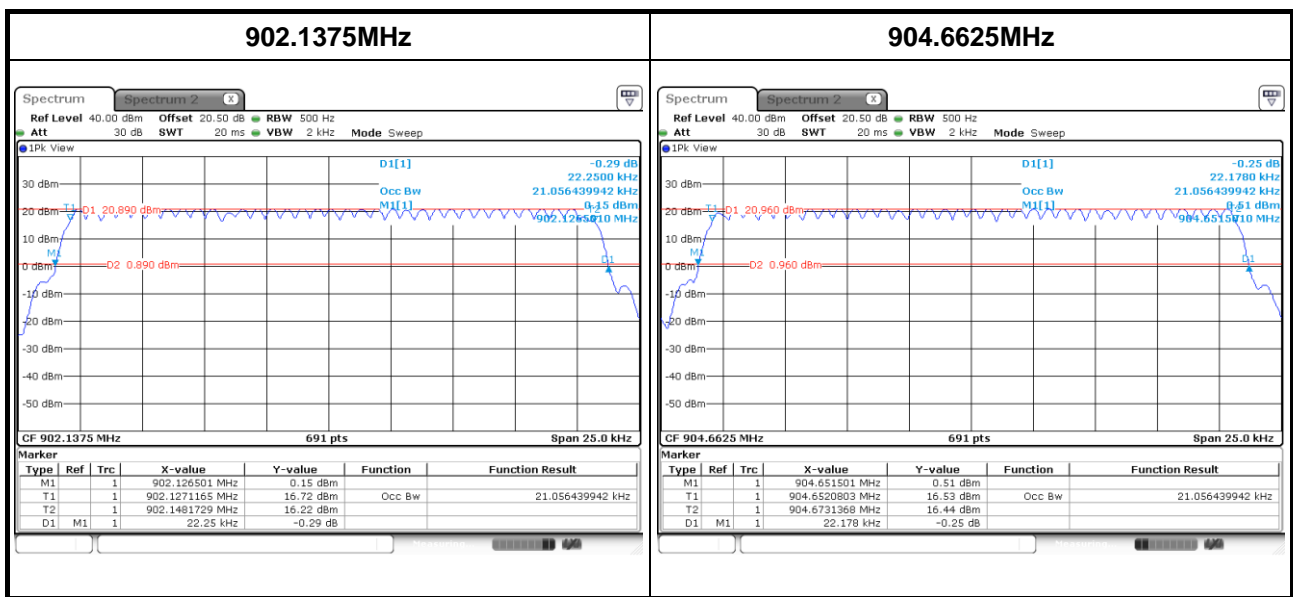

3.6 Channel Separation


3.6.1 Limit of Channel Separation

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

3.6.2 Test Procedures

1. Set RBW=1 kHz, VBW=3 kHz, Sweep time = Auto, Detector=Peak Trace max hold.
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit


3.6.3 Test Setup



3.6.4 Test result of Channel Separation

| | | | |
|--------------------------|------------|------------------|------------|
| Ambient Condition | 24°C / 67% | Tested By | Aska Huang |
|--------------------------|------------|------------------|------------|

| Modulation Mode | Freq. (MHz) | Channel Separation (kHz) | Limit (kHz) |
|-----------------|-------------|--------------------------|-------------|
| GFSK-DBPSK | 902.1375 | 25.02 | 25.00 |
| GFSK-DBPSK | 904.6625 | 25.02 | 25.00 |

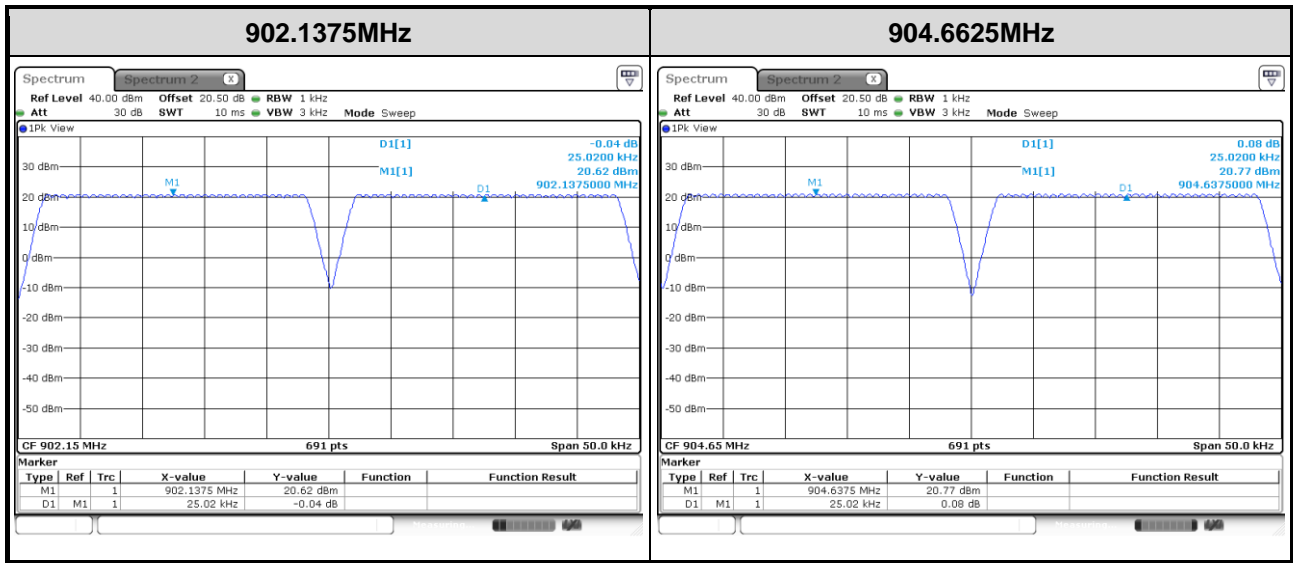

3.7 Number of Dwell Time


3.7.1 Limit of Dwell time

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period;

3.7.2 Test Procedures

1. Set RBW=100kHz,VBW=300kHz,Sweep time = 500 ms, Detector=Peak, Span=0Hz,Trace max hold
2. Enable gating and trigger function of spectrum analyzer to measure burst on time.


3.7.3 Test Setup



3.7.4 Test Result of Dwell Time

| | | | |
|-------------------|------------|-----------|------------|
| Ambient Condition | 24°C / 67% | Tested By | Aska Huang |
|-------------------|------------|-----------|------------|

| Modulation Mode | Freq. (MHz) | Length of Transmission Time (sec) | Number of Transmission in a 20s | Result (s) | Limit (s) |
|-----------------|-------------|-----------------------------------|---------------------------------|------------|-----------|
| GFSK-DBPSK | 902.1375 | 0.354 | 1 | 0.354 | 0.4 |

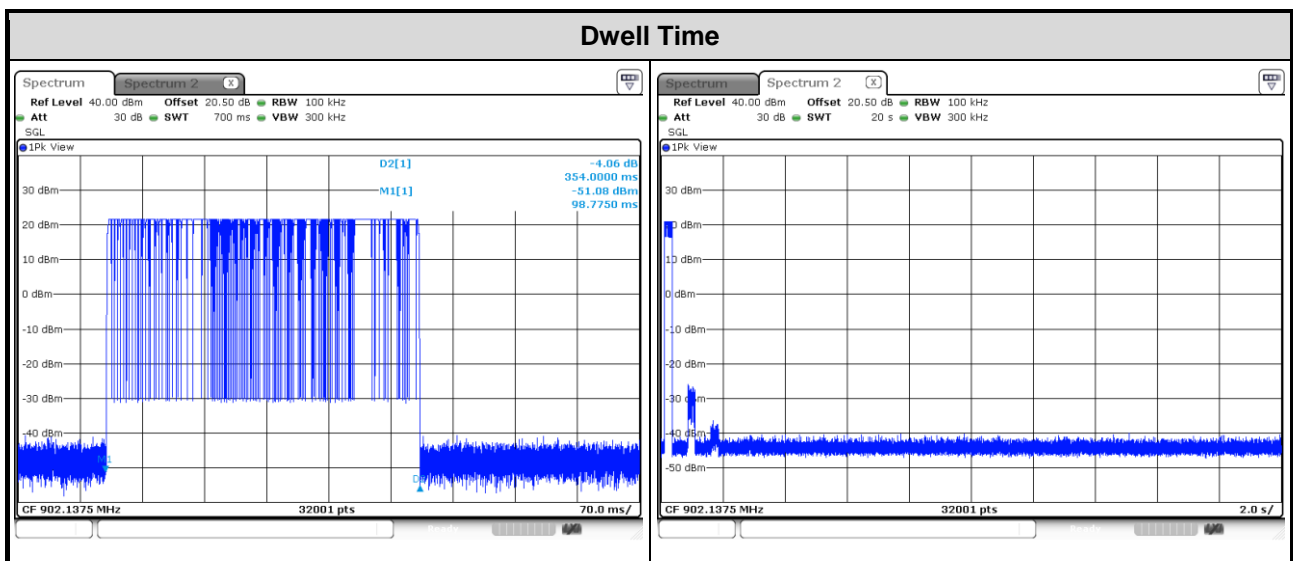

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==