




# FCC RADIO TEST REPORT

FCC ID : 2AW3A-1NAC21ACUCM  
Equipment : EV Charger  
Brand Name : RIVIAN  
Model Name : PT00057322  
PT00261633  
PT00401761  
PT00340197  
Marketing Name : RIVIAN WAYPOINTS CHARGER  
RIVIAN FLEET AC DISPENSER  
Applicant : Rivian Automotive LLC.  
607 Hansen Way, Palo Alto, CA 94304  
Manufacturer : Lite-On Technology Corporation  
15F , No.555, Siyuan Rd., Xinzhuang  
Dist., New Taipei City, Taiwan (R.O.C.)  
Standard : FCC Part 15 Subpart C §15.247

The product was received on Mar. 17, 2022 and testing was performed from Apr. 09, 2022 to May 17, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| <b>History of this test report.....</b>                         | <b>3</b>  |
| <b>Summary of Test Result.....</b>                              | <b>4</b>  |
| <b>1 General Description.....</b>                               | <b>5</b>  |
| 1.1 Product Feature of Equipment Under Test.....                | 5         |
| 1.2 Modification of EUT .....                                   | 6         |
| 1.3 Testing Location .....                                      | 6         |
| 1.4 Applicable Standards.....                                   | 6         |
| <b>2 Test Configuration of Equipment Under Test .....</b>       | <b>7</b>  |
| 2.1 Carrier Frequency Channel .....                             | 7         |
| 2.2 Test Mode.....                                              | 8         |
| 2.3 Connection Diagram of Test System.....                      | 9         |
| 2.4 Support Unit used in test configuration and system .....    | 9         |
| 2.5 EUT Operation Test Setup .....                              | 9         |
| <b>3 Test Result.....</b>                                       | <b>10</b> |
| 3.1 Output Power Measurement.....                               | 10        |
| 3.2 Radiated Band Edges and Spurious Emission Measurement ..... | 14        |
| 3.3 AC Conducted Emission Measurement.....                      | 18        |
| 3.4 Antenna Requirements.....                                   | 20        |
| <b>4 List of Measuring Equipment .....</b>                      | <b>21</b> |
| <b>5 Uncertainty of Evaluation.....</b>                         | <b>23</b> |
| <b>Appendix A. AC Conducted Emission Test Result</b>            |           |
| <b>Appendix B. Radiated Spurious Emission</b>                   |           |
| <b>Appendix C. Radiated Spurious Emission Plots</b>             |           |
| <b>Appendix D. Duty Cycle Plots</b>                             |           |
| <b>Appendix E. Setup Photographs</b>                            |           |



## History of this test report

| Report No. | Version | Description                              | Issue Date    |
|------------|---------|------------------------------------------|---------------|
| FR230116A  | 01      | Initial issue of report                  | Sep. 14, 2022 |
| FR230116A  | 02      | Revise the section 2.2 and section 3.1.5 | Sep. 27, 2022 |
|            |         |                                          |               |
|            |         |                                          |               |
|            |         |                                          |               |
|            |         |                                          |               |
|            |         |                                          |               |
|            |         |                                          |               |
|            |         |                                          |               |
|            |         |                                          |               |
|            |         |                                          |               |
|            |         |                                          |               |
|            |         |                                          |               |
|            |         |                                          |               |
|            |         |                                          |               |

## Summary of Test Result

| Report Clause | Ref Std. Clause    | Test Items                                | Result (PASS/FAIL) | Remark                                   |
|---------------|--------------------|-------------------------------------------|--------------------|------------------------------------------|
| 3.1           | 15.247(b)(3)       | Output Power                              | Pass               | -                                        |
| 3.2           | 15.247(d)          | Radiated Band Edges and Spurious Emission | Pass               | 10.19 dB under the limit at 2498.400 MHz |
| 3.3           | 15.207             | AC Conducted Emission                     | Pass               | 1.39 dB under the limit at 0.279 MHz     |
| 3.4           | 15.203 & 15.247(b) | Antenna Requirement                       | Pass               | -                                        |

**Note:** The module (Model:ANNA-B112) makes no difference after verifying output power, this report reuses test data from the module report.

### Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.  
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

### Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by:** Yun Huang

**Report Producer:** Kaye Yang

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

GSM/LTE, Bluetooth - LE, Wi-Fi 2.4GHz 802.11b/g/n and NFC.

| Product Feature |                                                                                                                |
|-----------------|----------------------------------------------------------------------------------------------------------------|
| Sample 1        | SKU 1                                                                                                          |
| Sample 2        | SKU 2                                                                                                          |
| Sample 3        | SKU 3                                                                                                          |
| Sample 4        | SKU 4                                                                                                          |
| Antenna Type    | WWAN: Fixed External Antenna<br>WLAN: FPC Antenna<br>Bluetooth - LE: Internal Antenna<br>NFC: PCB Loop Antenna |

| Antenna information |                 |     |
|---------------------|-----------------|-----|
| 2402 MHz ~ 2480 MHz | Peak Gain (dBi) | 0.5 |

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

|               | SKU 1                      | SKU 2                      | SKU 3                      | SKU 4                      |
|---------------|----------------------------|----------------------------|----------------------------|----------------------------|
|               | Public                     | Fleet                      | Fleet                      | Fleet                      |
|               | LITEON:<br>W1-UC166-0TH1ER | LITEON:<br>W1-UC16A-00H1ER | LITEON:<br>W1-UC168-00H1ER | LITEON:<br>W1-UC166-00H1ER |
|               | RIVIAN: PT00057322         | RIVIAN:PT00261633          | RIVIAN: PT00340197         | RIVIAN:PT00401761          |
| LCD Panel     | Yes                        | NO                         | NO                         | NO                         |
| Charge Plug   | 25ft                       | 32ft                       | 25ft                       | 18ft                       |
| LTE module    | YES                        | YES                        | YES                        | YES                        |
| BLE module    | YES                        | YES                        | YES                        | YES                        |
| Wi-Fi module  | YES                        | YES                        | YES                        | YES                        |
| RFID module   | YES                        | YES                        | YES                        | YES                        |
| Holster       | YES                        | NO                         | NO                         | NO                         |
| Holster cover | YES                        | YES                        | YES                        | YES                        |

## 1.2 Modification of EUT

No modifications made to the EUT during the testing.

## 1.3 Testing Location

|                    |                                                                                                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------------------|
| Test Site          | Sporton International Inc. EMC & Wireless Communications Laboratory                                                       |
| Test Site Location | No.52, Huaya 1st Rd., Guishan Dist.,<br>Taoyuan City 333, Taiwan (R.O.C.)<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |
| Test Site No.      | <b>Sporton Site No.</b><br>CO05-HY (TAF Code: 1190)                                                                       |
| Remark             | The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory. |

**Note:** The test site complies with ANSI C63.4 2014 requirement.

|                    |                                                                                                                                                  |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Site          | Sporton International Inc. Wensan Laboratory                                                                                                     |
| Test Site Location | No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist.,<br>Taoyuan City 333010, Taiwan (R.O.C.)<br>TEL: +886-3-327-0868<br>FAX: +886-3-327-0855 |
| Test Site No.      | <b>Sporton Site No.</b><br>03CH11-HY                                                                                                             |

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

## 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

| Frequency Band  | Channel | Freq.<br>(MHz) | Channel | Freq.<br>(MHz) |
|-----------------|---------|----------------|---------|----------------|
| 2400-2483.5 MHz | 0       | 2402           | 21      | 2444           |
|                 | 1       | 2404           | 22      | 2446           |
|                 | 2       | 2406           | 23      | 2448           |
|                 | 3       | 2408           | 24      | 2450           |
|                 | 4       | 2410           | 25      | 2452           |
|                 | 5       | 2412           | 26      | 2454           |
|                 | 6       | 2414           | 27      | 2456           |
|                 | 7       | 2416           | 28      | 2458           |
|                 | 8       | 2418           | 29      | 2460           |
|                 | 9       | 2420           | 30      | 2462           |
|                 | 10      | 2422           | 31      | 2464           |
|                 | 11      | 2424           | 32      | 2466           |
|                 | 12      | 2426           | 33      | 2468           |
|                 | 13      | 2428           | 34      | 2470           |
|                 | 14      | 2430           | 35      | 2472           |
|                 | 15      | 2432           | 36      | 2474           |
|                 | 16      | 2434           | 37      | 2476           |
|                 | 17      | 2436           | 38      | 2478           |
|                 | 18      | 2438           | 39      | 2480           |
|                 | 19      | 2440           | -       | -              |
|                 | 20      | 2442           | -       | -              |

## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

| Summary table of Test Cases                                                                                                                                                                                                       |                                                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| Test Item                                                                                                                                                                                                                         | Data Rate / Modulation                                                           |
| Radiated Test Cases                                                                                                                                                                                                               | Bluetooth – LE / GFSK                                                            |
|                                                                                                                                                                                                                                   | Mode 1: Bluetooth Tx CH19_2440 MHz_1Mbps                                         |
|                                                                                                                                                                                                                                   | Mode 2: Bluetooth Tx CH19_2440 MHz_2Mbps                                         |
|                                                                                                                                                                                                                                   | Mode 3: Bluetooth Tx CH39_2480 MHz_2Mbps                                         |
| AC Conducted Emission                                                                                                                                                                                                             | Mode 1 :WLAN (2.4GHz) Link + Bluetooth Link + Power Cable (240 Vac) for Sample 1 |
|                                                                                                                                                                                                                                   | Mode 2 :WLAN (2.4GHz) Link + Bluetooth Link + Power Cable (240 Vac) for Sample 2 |
| <b>Remark:</b> <ol style="list-style-type: none"> <li>The worst case of Conducted Emission is mode 2; only the test data of it was reported.</li> <li>For Radiated Test Cases, the tests were performed with Sample 1.</li> </ol> |                                                                                  |



## 2.3 Connection Diagram of Test System

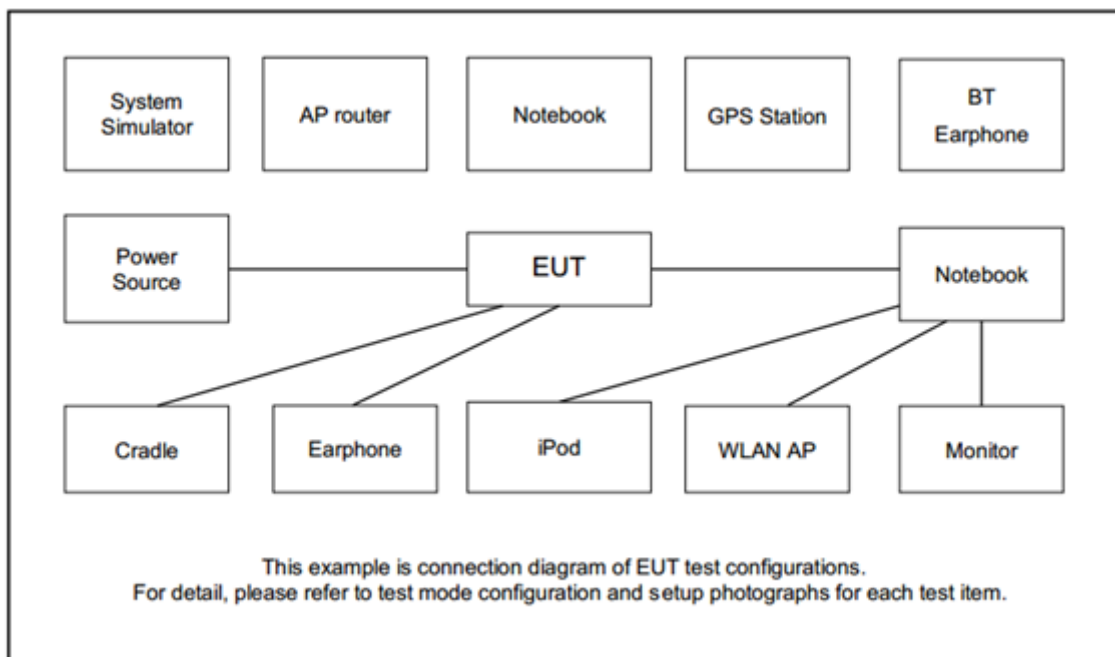

## 2.4 Support Unit used in test configuration and system

| Item | Equipment    | Brand Name | Model Name    | FCC ID      | Data Cable | Power Cord                                                 |
|------|--------------|------------|---------------|-------------|------------|------------------------------------------------------------|
| 1.   | WLAN AP      | ASUS       | RT-AC66U      | MSQ-RTAC66U | N/A        | Unshielded, 1.8 m                                          |
| 2.   | Notebook     | DELL       | Latitude 3400 | FCC DoC     | N/A        | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |
| 3.   | Mobile Phone | SAMSUNG    | SM-A730F/DS   | A3LSMA730F  | N/A        | N/A                                                        |

## 2.5 EUT Operation Test Setup

The RF test items, utility “Dut Wlan BT Labtool” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



### 3 Test Result

#### 3.1 Output Power Measurement

##### 3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.2.4 Method AVSGA-2.
2. Set span to at least 1.5 times the OBW.
3. Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
4. Set VBW  $\geq [3 \times \text{RBW}]$ .
5. Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq \text{RBW} / 2$ , so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto.
7. Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
8. The sweep to "free run."
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
10. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
11. Add  $[10 \log (1 / D)]$ , where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is 25%.

### 3.1.4 Test Setup

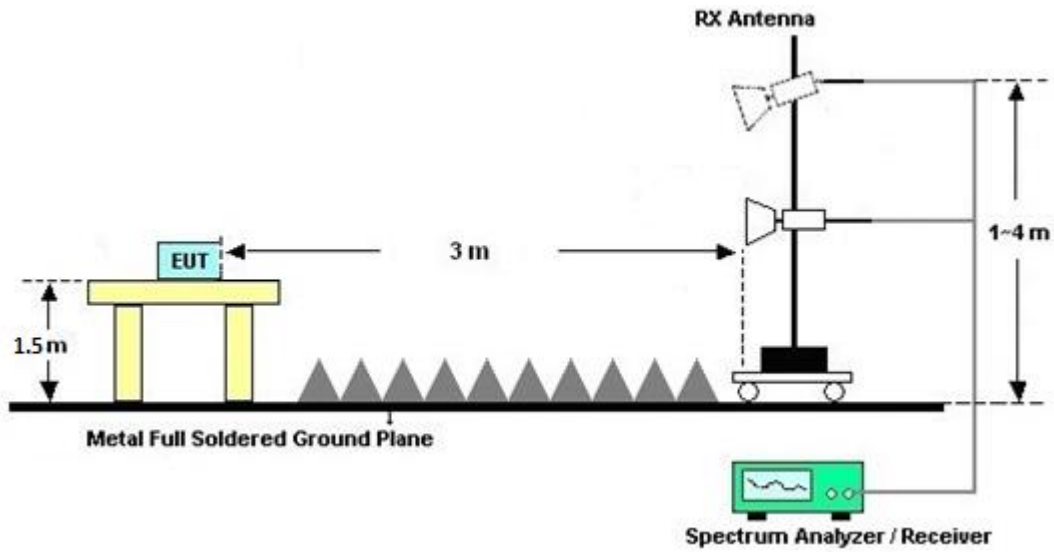



## 3.1.5 Test Result of Average Output Power

&lt;1Mbps&gt;

| Setting | Frequency | Field Strength@3m |            |                |           |               |             | Output Power |       |                 |       |
|---------|-----------|-------------------|------------|----------------|-----------|---------------|-------------|--------------|-------|-----------------|-------|
|         |           | Level             | Read Level | Antenna Factor | Path Loss | Preamp Factor | Duty Factor | EIRP         | Gain  | Conducted Power | Limit |
|         | (MHz)     | (dBuV/m)          | (dBuV)     | (dB/m)         | (dB)      | (dB)          | (dB)        | (dBm)        | (dBi) | (dBm)           | (dBm) |
| 0       | 2402      | 91.80             | 78.91      | 27.51          | 17.30     | 33.95         | 2.03        | -3.40        | 0.5   | -3.90           | 30.00 |
|         | 2440      | 91.24             | 78.13      | 27.66          | 17.36     | 33.94         | 2.03        | -3.96        | 0.5   | -4.46           | 30.00 |
|         | 2480      | 90.01             | 76.73      | 27.76          | 17.42     | 33.93         | 2.03        | -5.19        | 0.5   | -5.69           | 30.00 |

Note:

- Field Strength (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Path Loss (dB) - Preamp Factor (dB) + Duty Factor (dB)
- EIRP (dBm) = Field Strength (dBuV/m)@3m - 95.2
- Conducted Power (dBm) = EIRP (dBm) - Gain (dBi)






&lt;2Mbps&gt;

| Setting | Frequency | Field Strength@3m |            |                |           |               |             | Output Power |       |                 |       |
|---------|-----------|-------------------|------------|----------------|-----------|---------------|-------------|--------------|-------|-----------------|-------|
|         |           | Level             | Read Level | Antenna Factor | Path Loss | Preamp Factor | Duty Factor | EIRP         | Gain  | Conducted Power | Limit |
|         | (MHz)     | (dBuV/m)          | (dBuV)     | (dB/m)         | (dB)      | (dB)          | (dB)        | (dBm)        | (dBi) | (dBm)           | (dBm) |
| -4      | 2402      | 85.94             | 70.27      | 27.51          | 17.30     | 33.95         | 4.81        | -9.26        | 0.5   | -9.76           | 30.00 |
|         | 2440      | 86.79             | 70.90      | 27.66          | 17.36     | 33.94         | 4.81        | -8.41        | 0.5   | -8.91           | 30.00 |
|         | 2480      | 86.71             | 70.65      | 27.76          | 17.42     | 33.93         | 4.81        | -8.49        | 0.5   | -8.99           | 30.00 |

Note:

- Field Strength (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Path Loss (dB) - Preamp Factor (dB) + Duty Factor (dB)
- EIRP (dBm) = Field Strength (dBuV/m)@3m - 95.2
- Conducted Power (dBm) = EIRP (dBm) - Gain (dBi)

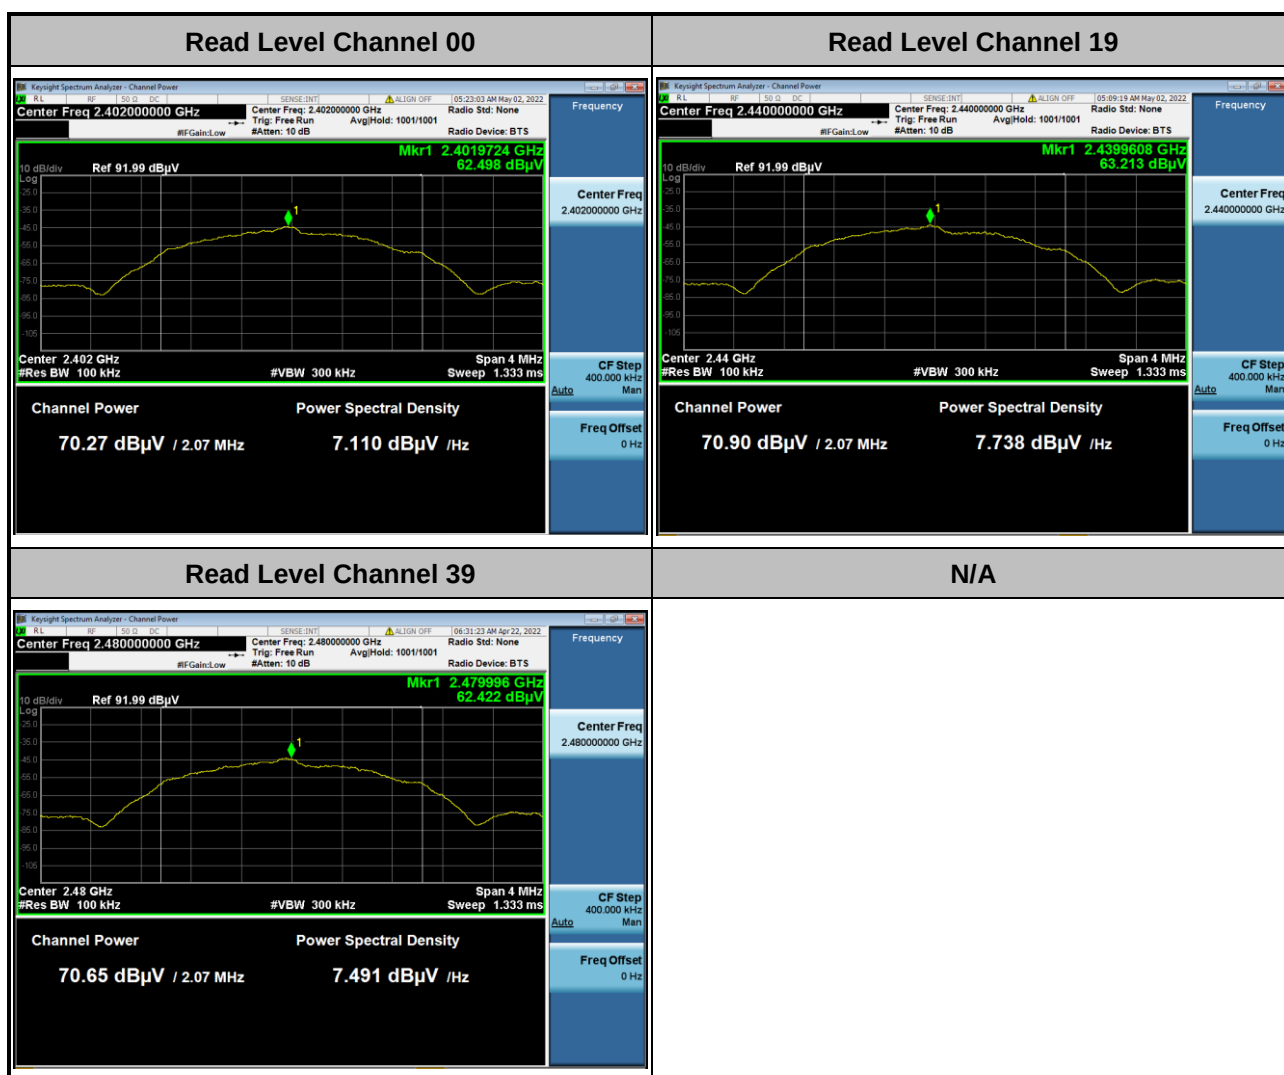

## 3.2 Radiated Band Edges and Spurious Emission Measurement

### 3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

### 3.2.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.For average measurement:
  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.2.4 Test Setup


For radiated test below 30MHz

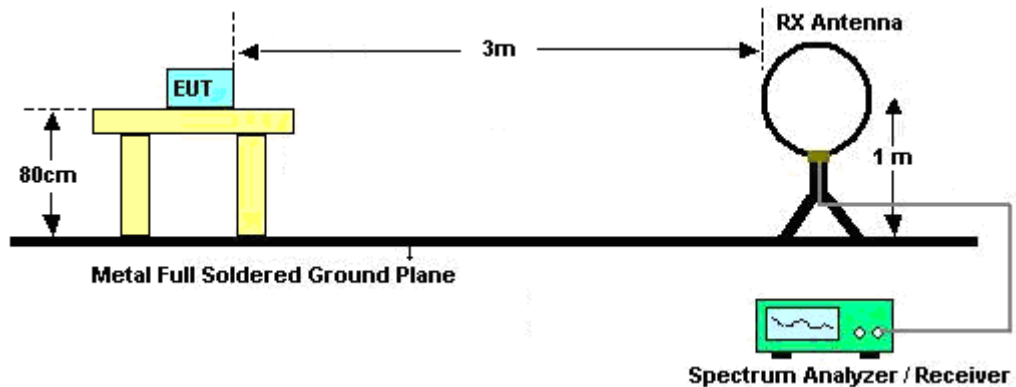

For radiated test from 30MHz to 1GHz

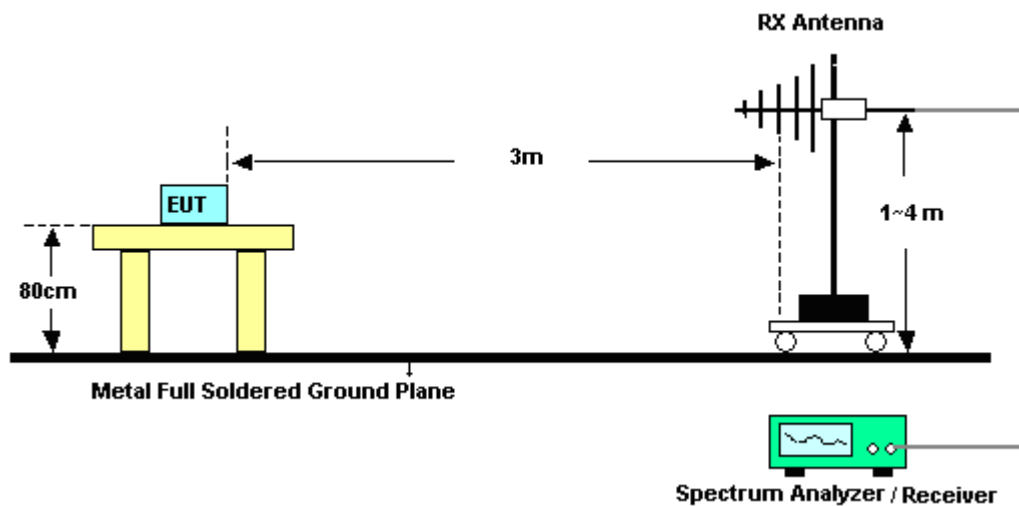


For radiated test from 1GHz to 18GHz

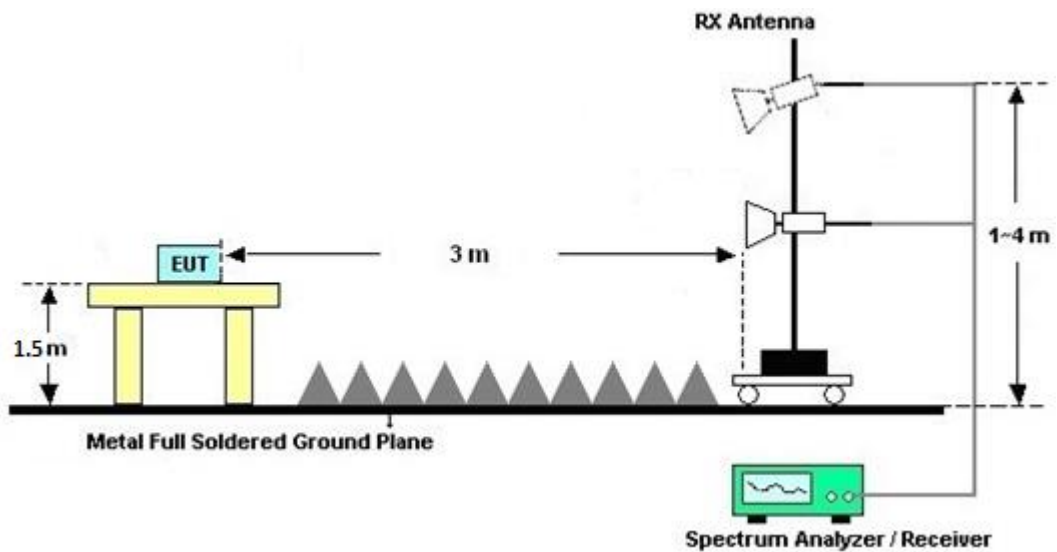



For radiated test above 18GHz

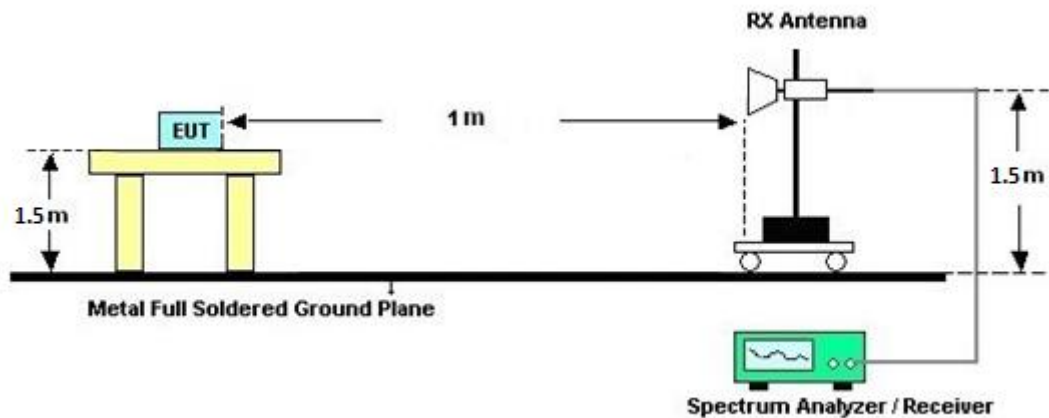

### 3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

### 3.2.7 Duty Cycle

Please refer to Appendix D.

### 3.2.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

### 3.3 AC Conducted Emission Measurement

#### 3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15-0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5-5                       | 56                           | 46        |
| 5-30                        | 60                           | 50        |

\*Decreases with the logarithm of the frequency.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.3.4 Test Setup

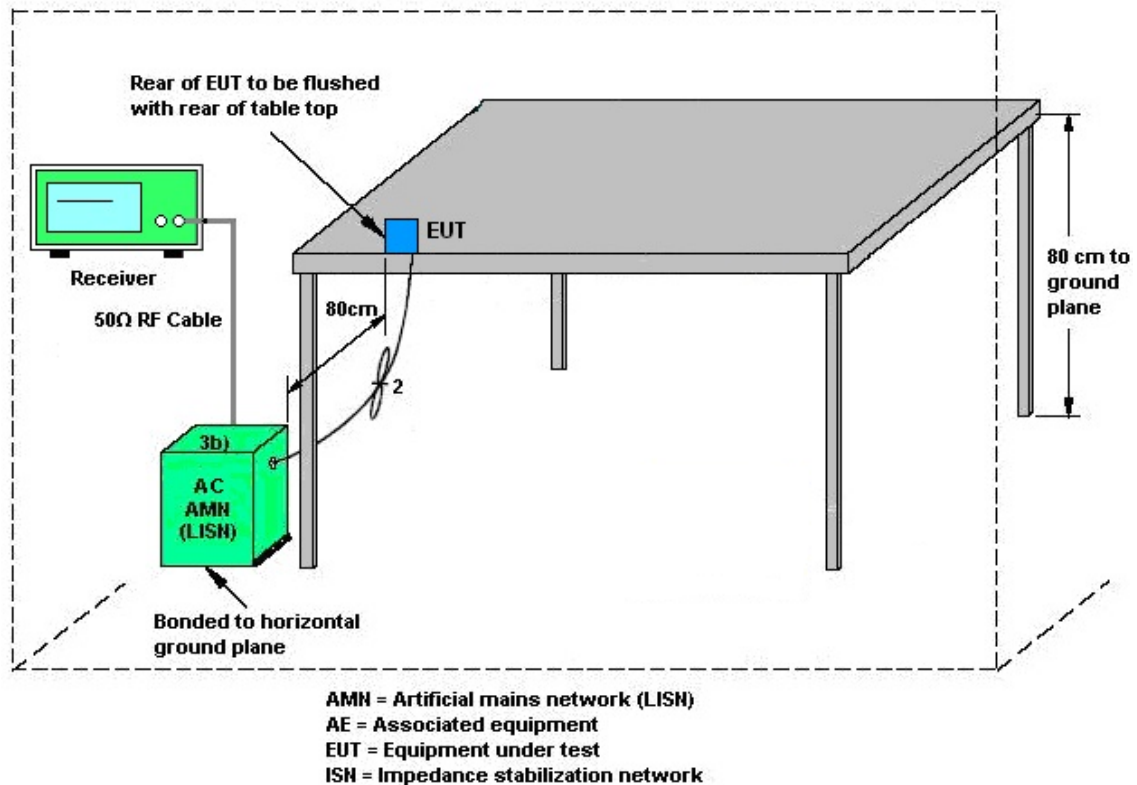

### 3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



## **3.4 Antenna Requirements**

### **3.4.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.4.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.4.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

| Instrument           | Brand Name      | Model No.          | Serial No.       | Characteristics               | Calibration Date | Test Date                  | Due Date      | Remark                |
|----------------------|-----------------|--------------------|------------------|-------------------------------|------------------|----------------------------|---------------|-----------------------|
| AC Power Source      | ChainTek        | APC-1000W          | N/A              | N/A                           | N/A              | Apr. 11, 2022              | N/A           | Conduction (CO05-HY)  |
| EMI Test Receiver    | Rohde & Schwarz | ESR3               | 102388           | 9kHz~3.6GHz                   | Dec. 01, 2021    | Apr. 11, 2022              | Nov. 30, 2022 | Conduction (CO05-HY)  |
| Hygrometer           | Testo           | 608-H1             | 34913912         | N/A                           | Nov. 17, 2021    | Apr. 11, 2022              | Nov. 16, 2022 | Conduction (CO05-HY)  |
| LISN                 | Rohde & Schwarz | ENV216             | 100080           | 9kHz~30MHz                    | Dec. 03, 2021    | Apr. 11, 2022              | Dec. 02, 2022 | Conduction (CO05-HY)  |
| Software             | Rohde & Schwarz | EMC32              | N/A              | N/A                           | N/A              | Apr. 11, 2022              | N/A           | Conduction (CO05-HY)  |
| Pulse Limiter        | SCHWARZBECK     | VTSD 9561-FN       | 00691            | N/A                           | Jul. 28, 2021    | Apr. 11, 2022              | Jul. 27, 2022 | Conduction (CO05-HY)  |
| LISN Cable           | MVE             | RG-400             | 260260           | N/A                           | Dec. 30, 2021    | Apr. 11, 2022              | Dec. 29, 2022 | Conduction (CO05-HY)  |
| Loop Antenna         | Rohde & Schwarz | HFH2-Z2            | 100315           | 9 kHz~30 MHz                  | Jan. 07, 2022    | Apr. 22, 2022~May 17, 2022 | Jan. 06, 2023 | Radiation (03CH11-HY) |
| Bilog Antenna        | TESEQ           | CBL 6111D & N-6-06 | 35414 & AT-N0602 | 30MHz~1GHz                    | Oct. 09, 2021    | Apr. 22, 2022~May 17, 2022 | Oct. 08, 2022 | Radiation (03CH11-HY) |
| Horn Antenna         | SCHWARZBECK     | BBHA 9120 D        | 9120D-1212       | 1GHz ~ 18GHz                  | Mar. 10, 2022    | Apr. 22, 2022~May 17, 2022 | Mar. 09, 2023 | Radiation (03CH11-HY) |
| SHF-EHF Horn Antenna | SCHWARZBECK     | BBHA9170           | 00993            | 18GHz~40GHz                   | Nov. 30, 2021    | Apr. 22, 2022~May 17, 2022 | Nov. 29, 2022 | Radiation (03CH11-HY) |
| Amplifier            | SONOMA          | 310N               | 187312           | 9kHz~1GHz                     | Dec. 10, 2021    | Apr. 22, 2022~May 17, 2022 | Dec. 09, 2022 | Radiation (03CH11-HY) |
| Preamplifier         | Keysight        | 83017A             | MY53270080       | 1GHz~26.5GHz                  | Nov. 10, 2021    | Apr. 22, 2022~May 17, 2022 | Nov. 09, 2022 | Radiation (03CH11-HY) |
| Preamplifier         | Jet-Power       | JPA0118-55-303     | 1710001800055007 | 1GHz~18GHz                    | Jun. 16, 2021    | Apr. 22, 2022~May 17, 2022 | Jun. 15, 2022 | Radiation (03CH11-HY) |
| Preamplifier         | EMEC            | EM18G40G           | 060801           | 18GHz~40GHz                   | Jun. 22, 2021    | Apr. 22, 2022~May 17, 2022 | Jun. 21, 2022 | Radiation (03CH11-HY) |
| Spectrum Analyzer    | Keysight        | N9010A             | MY54200486       | 10Hz~44GHz                    | Oct. 15, 2021    | Apr. 22, 2022~May 17, 2022 | Oct. 14, 2022 | Radiation (03CH11-HY) |
| EMI Test Receiver    | Keysight        | N9038A(MXE)        | MY55420170       | 20MHz~8.4GHz                  | Jul. 15, 2021    | Apr. 22, 2022~May 17, 2022 | Jul. 14, 2022 | Radiation (03CH11-HY) |
| Controller           | EMEC            | EM 1000            | N/A              | Control Turn table & Ant Mast | N/A              | Apr. 22, 2022~May 17, 2022 | N/A           | Radiation (03CH11-HY) |
| Antenna Mast         | EMEC            | AM-BS-4500-B       | N/A              | 1~4m                          | N/A              | Apr. 22, 2022~May 17, 2022 | N/A           | Radiation (03CH11-HY) |
| Turn Table           | EMEC            | TT 2000            | N/A              | 0~360 Degree                  | N/A              | Apr. 22, 2022~May 17, 2022 | N/A           | Radiation (03CH11-HY) |
| Software             | Audix           | E3 6.2009-8-24     | RK-001053        | N/A                           | N/A              | Apr. 22, 2022~May 17, 2022 | N/A           | Radiation (03CH11-HY) |



| Instrument      | Brand Name      | Model No.                    | Serial No. | Characteristics          | Calibration Date | Test Date                   | Due Date      | Remark                |
|-----------------|-----------------|------------------------------|------------|--------------------------|------------------|-----------------------------|---------------|-----------------------|
| RF Cable        | HUBER + SUHNER  | SUCOFLEX 102                 | MY2859/2   | 30MHz-40GHz              | Mar. 10, 2022    | Apr. 22, 2022~ May 17, 2022 | Mar. 09, 2023 | Radiation (03CH11-HY) |
| RF Cable        | HUBER + SUHNER  | SUCOFLEX 104                 | MY9837/4PE | 9kHz-30MHz               | Mar. 10, 2022    | Apr. 22, 2022~ May 17, 2022 | Mar. 09, 2023 | Radiation (03CH11-HY) |
| RF Cable        | HUBER + SUHNER  | SUCOFLEX 104                 | MY9837/4PE | 30MHz-18GHz              | Mar. 10, 2022    | Apr. 22, 2022~ May 17, 2022 | Mar. 09, 2023 | Radiation (03CH11-HY) |
| RF Cable        | HUBER + SUHNER  | SUCOFLEX 104                 | 811852/4   | 30MHz-18GHz              | Mar. 10, 2022    | Apr. 22, 2022~ May 17, 2022 | Mar. 09, 2023 | Radiation (03CH11-HY) |
| Filter          | Wainwright      | WLK4-1000-1530-8000-40SS     | SN11       | 1.53G Low Pass           | Sep. 13, 2021    | Apr. 22, 2022~ May 17, 2022 | Sep. 12, 2022 | Radiation (03CH11-HY) |
| Filter          | Wainwright      | WHKX12-2700-3000-18000-60SS  | SN3        | 3GHz High Pass Filter    | Sep. 13, 2021    | Apr. 22, 2022~ May 17, 2022 | Sep. 12, 2022 | Radiation (03CH11-HY) |
| Filter          | Wainwright      | WHKX8-5872.5-6750-18000-40SS | SN3        | 6.75GHz High Pass Filter | Sep. 13, 2021    | Apr. 22, 2022~ May 17, 2022 | Sep. 12, 2022 | Radiation (03CH11-HY) |
| Filter          | Wainwright      | WHKX12-900-1000-15000-60SS   | SN12       | 1GHz High Pass Filter    | Nov. 04, 2021    | Apr. 22, 2022~ May 17, 2022 | Nov. 03, 2022 | Radiation (03CH11-HY) |
| Hygrometer      | TECEPEL         | DTM-303B                     | TP140325   | N/A                      | Nov. 26, 2021    | Apr. 22, 2022~ May 17, 2022 | Nov. 25, 2022 | Radiation (03CH11-HY) |
| Hygrometer      | TECEPEL         | DTM-303B                     | TP200880   | N/A                      | Sep. 30, 2021    | Apr. 22, 2022~ May 17, 2022 | Sep. 29, 2022 | Radiation (03CH11-HY) |
| Signal Analyzer | Rohde & Schwarz | FSV40                        | 101566     | 10Hz~40GHz               | Aug. 30, 2021    | Apr. 09, 2022               | Aug. 29, 2022 | Radiation (03CH11-HY) |

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 2.7 dB |
|-------------------------------------------------------------------------|--------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 5.8 dB |
|-------------------------------------------------------------------------|--------|

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 5.4 dB |
|-------------------------------------------------------------------------|--------|

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 5.9 dB |
|-------------------------------------------------------------------------|--------|



## **Appendix A. AC Conducted Emission Test Results**


|                        |             |                            |         |
|------------------------|-------------|----------------------------|---------|
| <b>Test Engineer :</b> | Calvin Wang | <b>Temperature :</b>       | 23~26°C |
|                        |             | <b>Relative Humidity :</b> | 45~55%  |



## EUT Information

Report NO : 230116  
 Test Mode : Mode 2  
 Test Voltage : 240V/60Hz  
 Phase : Line

Full Spectrum

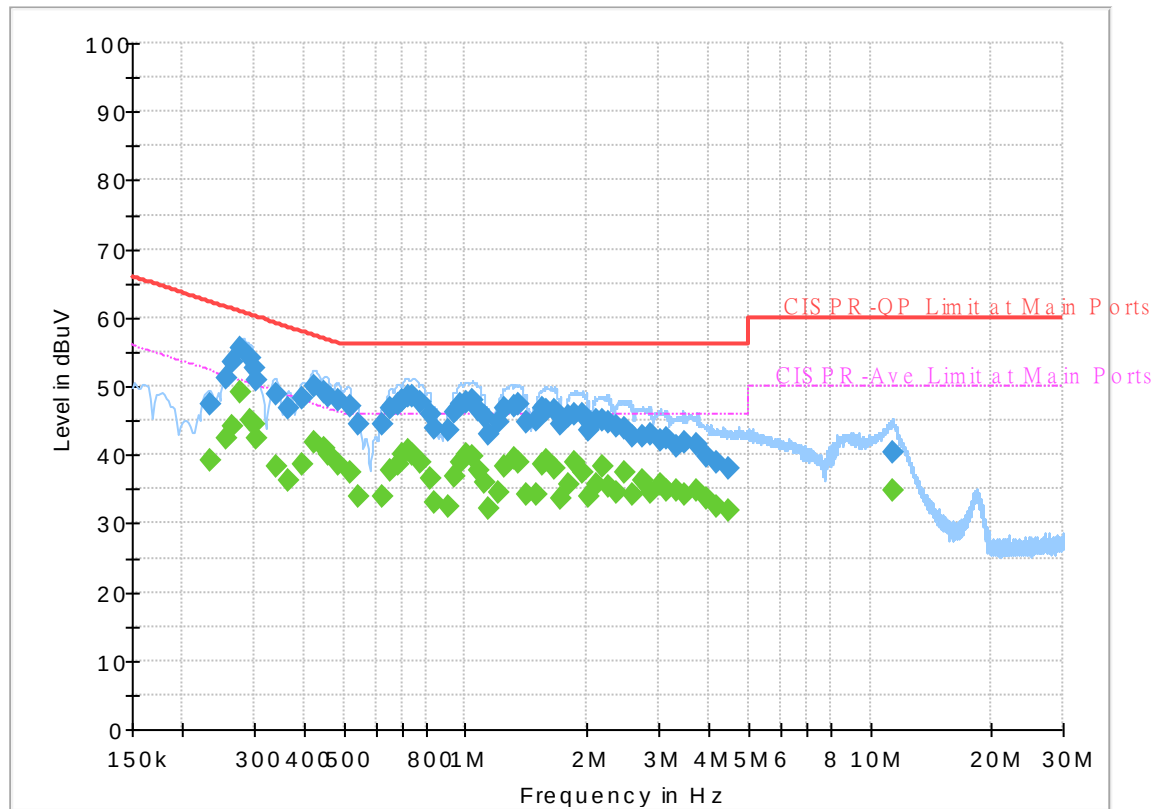

## Final Result

| Frequency (MHz) | QuasiPeak (dBuV) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|------|--------|------------|
| 0.233250        | ---              | 39.24           | 52.33        | 13.09       | L1   | OFF    | 19.6       |
| 0.233250        | 47.30            | ---             | 62.33        | 15.03       | L1   | OFF    | 19.6       |
| 0.255840        | ---              | 42.54           | 51.57        | 9.03        | L1   | OFF    | 19.6       |
| 0.255840        | 51.20            | ---             | 61.57        | 10.37       | L1   | OFF    | 19.6       |
| 0.264750        | ---              | 44.23           | 51.28        | 7.05        | L1   | OFF    | 19.6       |
| 0.264750        | 53.61            | ---             | 61.28        | 7.67        | L1   | OFF    | 19.6       |
| 0.278250        | ---              | 49.12           | 50.87        | 1.75        | L1   | OFF    | 19.6       |
| 0.278250        | 55.43            | ---             | 60.87        | 5.44        | L1   | OFF    | 19.6       |
| 0.292740        | ---              | 45.11           | 50.45        | 5.34        | L1   | OFF    | 19.6       |
| 0.292740        | 54.06            | ---             | 60.45        | 6.39        | L1   | OFF    | 19.6       |
| 0.299670        | ---              | 44.45           | 50.25        | 5.80        | L1   | OFF    | 19.6       |
| 0.299670        | 52.60            | ---             | 60.25        | 7.65        | L1   | OFF    | 19.6       |
| 0.303000        | ---              | 42.49           | 50.16        | 7.67        | L1   | OFF    | 19.6       |
| 0.303000        | 50.83            | ---             | 60.16        | 9.33        | L1   | OFF    | 19.6       |
| 0.339000        | ---              | 38.36           | 49.23        | 10.87       | L1   | OFF    | 19.6       |
| 0.339000        | 48.92            | ---             | 59.23        | 10.31       | L1   | OFF    | 19.6       |
| 0.363750        | ---              | 36.32           | 48.64        | 12.32       | L1   | OFF    | 19.6       |
| 0.363750        | 46.85            | ---             | 58.64        | 11.79       | L1   | OFF    | 19.6       |
| 0.393000        | ---              | 38.71           | 48.00        | 9.29        | L1   | OFF    | 19.6       |
| 0.393000        | 48.23            | ---             | 58.00        | 9.77        | L1   | OFF    | 19.6       |
| 0.424500        | ---              | 41.96           | 47.36        | 5.40        | L1   | OFF    | 19.6       |


|          |       |       |       |       |    |     |      |
|----------|-------|-------|-------|-------|----|-----|------|
| 0.424500 | 50.01 | ---   | 57.36 | 7.35  | L1 | OFF | 19.6 |
| 0.447000 | ---   | 40.82 | 46.93 | 6.11  | L1 | OFF | 19.6 |
| 0.447000 | 49.19 | ---   | 56.93 | 7.74  | L1 | OFF | 19.6 |
| 0.456000 | ---   | 39.92 | 46.77 | 6.85  | L1 | OFF | 19.6 |
| 0.456000 | 48.61 | ---   | 56.77 | 8.16  | L1 | OFF | 19.6 |
| 0.483000 | ---   | 38.69 | 46.29 | 7.60  | L1 | OFF | 19.6 |
| 0.483000 | 47.86 | ---   | 56.29 | 8.43  | L1 | OFF | 19.6 |
| 0.516750 | ---   | 37.31 | 46.00 | 8.69  | L1 | OFF | 19.6 |
| 0.516750 | 46.93 | ---   | 56.00 | 9.07  | L1 | OFF | 19.6 |
| 0.541500 | ---   | 33.98 | 46.00 | 12.02 | L1 | OFF | 19.6 |
| 0.541500 | 44.57 | ---   | 56.00 | 11.43 | L1 | OFF | 19.6 |
| 0.622500 | ---   | 34.06 | 46.00 | 11.94 | L1 | OFF | 19.6 |
| 0.622500 | 44.32 | ---   | 56.00 | 11.68 | L1 | OFF | 19.6 |
| 0.649500 | ---   | 37.76 | 46.00 | 8.24  | L1 | OFF | 19.6 |
| 0.649500 | 46.81 | ---   | 56.00 | 9.19  | L1 | OFF | 19.6 |
| 0.681000 | ---   | 38.47 | 46.00 | 7.53  | L1 | OFF | 19.6 |
| 0.681000 | 47.49 | ---   | 56.00 | 8.51  | L1 | OFF | 19.6 |
| 0.699000 | ---   | 40.01 | 46.00 | 5.99  | L1 | OFF | 19.6 |
| 0.699000 | 48.04 | ---   | 56.00 | 7.96  | L1 | OFF | 19.6 |
| 0.721500 | ---   | 40.54 | 46.00 | 5.46  | L1 | OFF | 19.6 |
| 0.721500 | 48.47 | ---   | 56.00 | 7.53  | L1 | OFF | 19.6 |
| 0.737250 | ---   | 40.05 | 46.00 | 5.95  | L1 | OFF | 19.6 |
| 0.737250 | 48.51 | ---   | 56.00 | 7.49  | L1 | OFF | 19.6 |
| 0.771000 | ---   | 38.89 | 46.00 | 7.11  | L1 | OFF | 19.6 |
| 0.771000 | 47.60 | ---   | 56.00 | 8.40  | L1 | OFF | 19.6 |
| 0.816000 | ---   | 36.46 | 46.00 | 9.54  | L1 | OFF | 19.6 |
| 0.816000 | 45.77 | ---   | 56.00 | 10.23 | L1 | OFF | 19.6 |
| 0.840750 | ---   | 33.16 | 46.00 | 12.84 | L1 | OFF | 19.6 |
| 0.840750 | 43.84 | ---   | 56.00 | 12.16 | L1 | OFF | 19.6 |
| 0.908250 | ---   | 32.47 | 46.00 | 13.53 | L1 | OFF | 19.6 |
| 0.908250 | 43.46 | ---   | 56.00 | 12.54 | L1 | OFF | 19.6 |
| 0.939750 | ---   | 36.70 | 46.00 | 9.30  | L1 | OFF | 19.6 |
| 0.939750 | 46.05 | ---   | 56.00 | 9.95  | L1 | OFF | 19.6 |
| 0.966750 | ---   | 38.98 | 46.00 | 7.02  | L1 | OFF | 19.6 |
| 0.966750 | 47.31 | ---   | 56.00 | 8.69  | L1 | OFF | 19.6 |
| 1.005000 | ---   | 39.94 | 46.00 | 6.06  | L1 | OFF | 19.6 |
| 1.005000 | 47.78 | ---   | 56.00 | 8.22  | L1 | OFF | 19.6 |
| 1.041000 | ---   | 39.81 | 46.00 | 6.19  | L1 | OFF | 19.6 |
| 1.041000 | 47.81 | ---   | 56.00 | 8.19  | L1 | OFF | 19.6 |
| 1.077000 | ---   | 37.60 | 46.00 | 8.40  | L1 | OFF | 19.6 |
| 1.077000 | 46.60 | ---   | 56.00 | 9.40  | L1 | OFF | 19.6 |
| 1.110750 | ---   | 35.86 | 46.00 | 10.14 | L1 | OFF | 19.6 |
| 1.110750 | 45.55 | ---   | 56.00 | 10.45 | L1 | OFF | 19.6 |
| 1.140000 | ---   | 32.22 | 46.00 | 13.78 | L1 | OFF | 19.6 |
| 1.140000 | 43.07 | ---   | 56.00 | 12.93 | L1 | OFF | 19.6 |
| 1.209750 | ---   | 34.46 | 46.00 | 11.54 | L1 | OFF | 19.6 |
| 1.209750 | 44.77 | ---   | 56.00 | 11.23 | L1 | OFF | 19.6 |
| 1.252500 | ---   | 38.18 | 46.00 | 7.82  | L1 | OFF | 19.6 |
| 1.252500 | 46.72 | ---   | 56.00 | 9.28  | L1 | OFF | 19.6 |
| 1.320000 | ---   | 39.57 | 46.00 | 6.43  | L1 | OFF | 19.6 |
| 1.320000 | 47.01 | ---   | 56.00 | 8.99  | L1 | OFF | 19.6 |
| 1.358250 | ---   | 38.90 | 46.00 | 7.10  | L1 | OFF | 19.6 |
| 1.358250 | 47.23 | ---   | 56.00 | 8.77  | L1 | OFF | 19.6 |
| 1.412250 | ---   | 34.09 | 46.00 | 11.91 | L1 | OFF | 19.6 |
| 1.412250 | 44.85 | ---   | 56.00 | 11.15 | L1 | OFF | 19.6 |
| 1.497750 | ---   | 34.26 | 46.00 | 11.74 | L1 | OFF | 19.6 |
| 1.497750 | 45.07 | ---   | 56.00 | 10.93 | L1 | OFF | 19.6 |
| 1.549500 | ---   | 38.61 | 46.00 | 7.39  | L1 | OFF | 19.6 |
| 1.549500 | 46.80 | ---   | 56.00 | 9.20  | L1 | OFF | 19.6 |
| 1.587750 | ---   | 39.13 | 46.00 | 6.87  | L1 | OFF | 19.6 |
| 1.587750 | 46.55 | ---   | 56.00 | 9.45  | L1 | OFF | 19.6 |
| 1.657500 | ---   | 38.04 | 46.00 | 7.96  | L1 | OFF | 19.6 |
| 1.657500 | 46.59 | ---   | 56.00 | 9.41  | L1 | OFF | 19.6 |
| 1.711500 | ---   | 33.76 | 46.00 | 12.24 | L1 | OFF | 19.6 |
| 1.711500 | 44.34 | ---   | 56.00 | 11.66 | L1 | OFF | 19.6 |
| 1.806000 | ---   | 35.76 | 46.00 | 10.24 | L1 | OFF | 19.6 |
| 1.806000 | 45.69 | ---   | 56.00 | 10.31 | L1 | OFF | 19.6 |
| 1.869000 | ---   | 38.85 | 46.00 | 7.15  | L1 | OFF | 19.6 |
| 1.869000 | 45.83 | ---   | 56.00 | 10.17 | L1 | OFF | 19.6 |
| 1.947750 | ---   | 37.44 | 46.00 | 8.56  | L1 | OFF | 19.6 |
| 1.947750 | 46.03 | ---   | 56.00 | 9.97  | L1 | OFF | 19.6 |

|           |       |       |       |       |    |     |      |
|-----------|-------|-------|-------|-------|----|-----|------|
| 2.008500  | ---   | 33.98 | 46.00 | 12.02 | L1 | OFF | 19.6 |
| 2.008500  | 43.60 | ---   | 56.00 | 12.40 | L1 | OFF | 19.6 |
| 2.103000  | ---   | 35.79 | 46.00 | 10.21 | L1 | OFF | 19.6 |
| 2.103000  | 44.94 | ---   | 56.00 | 11.06 | L1 | OFF | 19.6 |
| 2.188500  | ---   | 38.40 | 46.00 | 7.60  | L1 | OFF | 19.6 |
| 2.188500  | 44.94 | ---   | 56.00 | 11.06 | L1 | OFF | 19.6 |
| 2.256000  | ---   | 35.47 | 46.00 | 10.53 | L1 | OFF | 19.6 |
| 2.256000  | 44.83 | ---   | 56.00 | 11.17 | L1 | OFF | 19.6 |
| 2.375250  | ---   | 34.61 | 46.00 | 11.39 | L1 | OFF | 19.6 |
| 2.375250  | 44.27 | ---   | 56.00 | 11.73 | L1 | OFF | 19.6 |
| 2.472000  | ---   | 37.47 | 46.00 | 8.53  | L1 | OFF | 19.6 |
| 2.472000  | 43.93 | ---   | 56.00 | 12.07 | L1 | OFF | 19.6 |
| 2.582250  | ---   | 34.17 | 46.00 | 11.83 | L1 | OFF | 19.6 |
| 2.582250  | 42.62 | ---   | 56.00 | 13.38 | L1 | OFF | 19.6 |
| 2.748750  | ---   | 36.29 | 46.00 | 9.71  | L1 | OFF | 19.6 |
| 2.748750  | 42.71 | ---   | 56.00 | 13.29 | L1 | OFF | 19.6 |
| 2.854500  | ---   | 34.63 | 46.00 | 11.37 | L1 | OFF | 19.6 |
| 2.854500  | 42.93 | ---   | 56.00 | 13.07 | L1 | OFF | 19.6 |
| 3.030000  | ---   | 35.59 | 46.00 | 10.41 | L1 | OFF | 19.6 |
| 3.030000  | 42.05 | ---   | 56.00 | 13.95 | L1 | OFF | 19.6 |
| 3.153750  | ---   | 34.82 | 46.00 | 11.18 | L1 | OFF | 19.6 |
| 3.153750  | 42.48 | ---   | 56.00 | 13.52 | L1 | OFF | 19.6 |
| 3.327000  | ---   | 34.81 | 46.00 | 11.19 | L1 | OFF | 19.6 |
| 3.327000  | 41.18 | ---   | 56.00 | 14.82 | L1 | OFF | 19.6 |
| 3.477750  | ---   | 34.34 | 46.00 | 11.66 | L1 | OFF | 19.6 |
| 3.477750  | 41.77 | ---   | 56.00 | 14.23 | L1 | OFF | 19.6 |
| 3.723000  | ---   | 34.90 | 46.00 | 11.10 | L1 | OFF | 19.6 |
| 3.723000  | 41.48 | ---   | 56.00 | 14.52 | L1 | OFF | 19.6 |
| 3.934500  | ---   | 33.55 | 46.00 | 12.45 | L1 | OFF | 19.6 |
| 3.934500  | 39.81 | ---   | 56.00 | 16.19 | L1 | OFF | 19.6 |
| 4.161750  | ---   | 32.57 | 46.00 | 13.43 | L1 | OFF | 19.6 |
| 4.161750  | 38.76 | ---   | 56.00 | 17.24 | L1 | OFF | 19.6 |
| 4.452000  | ---   | 31.87 | 46.00 | 14.13 | L1 | OFF | 19.7 |
| 4.452000  | 38.14 | ---   | 56.00 | 17.86 | L1 | OFF | 19.7 |
| 11.415750 | ---   | 34.78 | 50.00 | 15.22 | L1 | OFF | 19.8 |
| 11.415750 | 40.49 | ---   | 60.00 | 19.51 | L1 | OFF | 19.8 |

## EUT Information

Report NO : 230116  
 Test Mode : Mode 2  
 Test Voltage : 240V/60Hz  
 Phase : Neutral

Full Spectrum

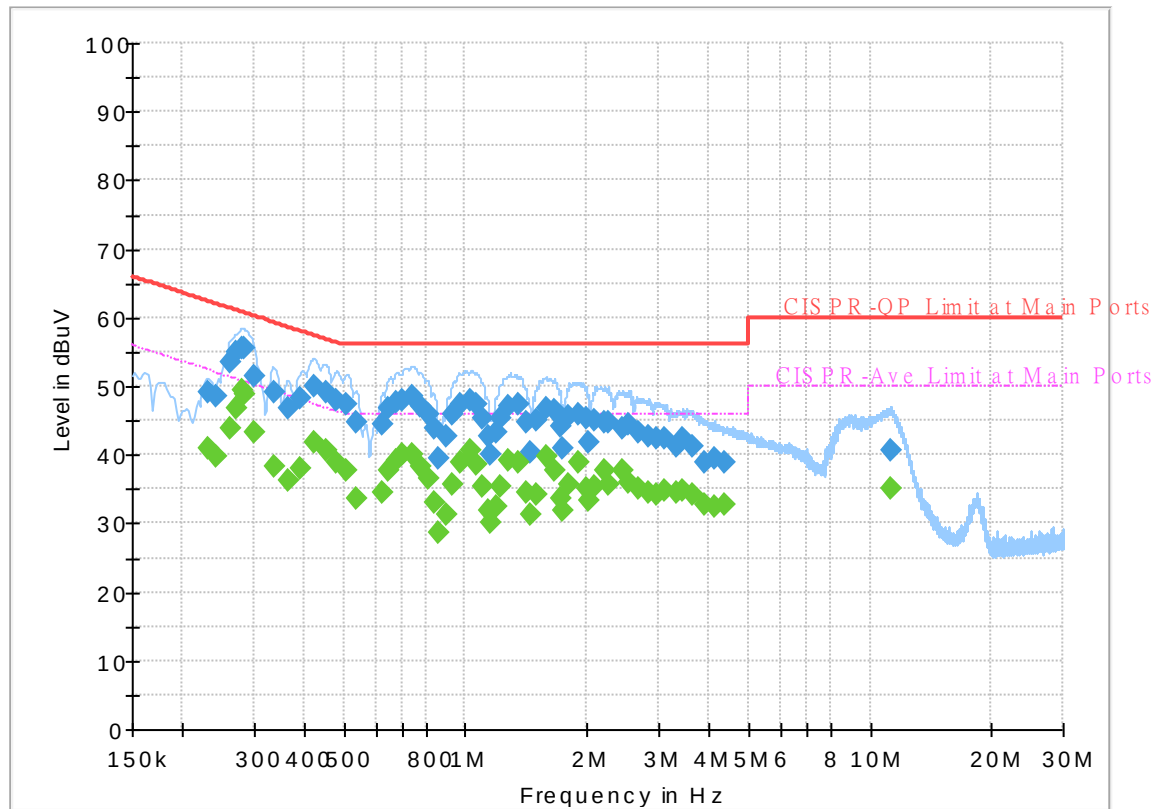

## Final\_Result

| Frequency (MHz) | QuasiPeak (dBuV) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|------|--------|------------|
| 0.231000        | ---              | 40.83           | 52.41        | 11.58       | N    | OFF    | 19.6       |
| 0.231000        | 49.17            | ---             | 62.41        | 13.24       | N    | OFF    | 19.6       |
| 0.242250        | ---              | 39.72           | 52.02        | 12.30       | N    | OFF    | 19.6       |
| 0.242250        | 48.57            | ---             | 62.02        | 13.45       | N    | OFF    | 19.6       |
| 0.262680        | ---              | 43.94           | 51.35        | 7.41        | N    | OFF    | 19.6       |
| 0.262680        | 53.42            | ---             | 61.35        | 7.93        | N    | OFF    | 19.6       |
| 0.271500        | ---              | 46.80           | 51.07        | 4.27        | N    | OFF    | 19.6       |
| 0.271500        | 54.83            | ---             | 61.07        | 6.24        | N    | OFF    | 19.6       |
| 0.279420        | ---              | 49.44           | 50.83        | 1.39        | N    | OFF    | 19.6       |
| 0.279420        | 55.54            | ---             | 60.83        | 5.29        | N    | OFF    | 19.6       |
| 0.282750        | ---              | 48.76           | 50.74        | 1.98        | N    | OFF    | 19.6       |
| 0.282750        | 55.41            | ---             | 60.74        | 5.33        | N    | OFF    | 19.6       |
| 0.300930        | ---              | 43.19           | 50.22        | 7.03        | N    | OFF    | 19.6       |
| 0.300930        | 51.47            | ---             | 60.22        | 8.75        | N    | OFF    | 19.6       |
| 0.336750        | ---              | 38.37           | 49.28        | 10.91       | N    | OFF    | 19.6       |
| 0.336750        | 49.09            | ---             | 59.28        | 10.19       | N    | OFF    | 19.6       |
| 0.363750        | ---              | 36.22           | 48.64        | 12.42       | N    | OFF    | 19.6       |
| 0.363750        | 46.79            | ---             | 58.64        | 11.85       | N    | OFF    | 19.6       |
| 0.390750        | ---              | 38.04           | 48.05        | 10.01       | N    | OFF    | 19.6       |
| 0.390750        | 48.22            | ---             | 58.05        | 9.83        | N    | OFF    | 19.6       |
| 0.422250        | ---              | 41.78           | 47.40        | 5.62        | N    | OFF    | 19.6       |

|          |       |       |       |       |   |     |      |
|----------|-------|-------|-------|-------|---|-----|------|
| 0.422250 | 50.10 | ---   | 57.40 | 7.30  | N | OFF | 19.6 |
| 0.451500 | ---   | 40.70 | 46.85 | 6.15  | N | OFF | 19.6 |
| 0.451500 | 49.10 | ---   | 56.85 | 7.75  | N | OFF | 19.6 |
| 0.480750 | ---   | 38.76 | 46.33 | 7.57  | N | OFF | 19.6 |
| 0.480750 | 47.93 | ---   | 56.33 | 8.40  | N | OFF | 19.6 |
| 0.507750 | ---   | 37.79 | 46.00 | 8.21  | N | OFF | 19.6 |
| 0.507750 | 47.51 | ---   | 56.00 | 8.49  | N | OFF | 19.6 |
| 0.537000 | ---   | 33.68 | 46.00 | 12.32 | N | OFF | 19.6 |
| 0.537000 | 44.63 | ---   | 56.00 | 11.37 | N | OFF | 19.6 |
| 0.622500 | ---   | 34.40 | 46.00 | 11.60 | N | OFF | 19.6 |
| 0.622500 | 44.31 | ---   | 56.00 | 11.69 | N | OFF | 19.6 |
| 0.647250 | ---   | 37.60 | 46.00 | 8.40  | N | OFF | 19.6 |
| 0.647250 | 46.80 | ---   | 56.00 | 9.20  | N | OFF | 19.6 |
| 0.672000 | ---   | 39.23 | 46.00 | 6.77  | N | OFF | 19.6 |
| 0.672000 | 47.63 | ---   | 56.00 | 8.37  | N | OFF | 19.6 |
| 0.696750 | ---   | 39.99 | 46.00 | 6.01  | N | OFF | 19.6 |
| 0.696750 | 47.99 | ---   | 56.00 | 8.01  | N | OFF | 19.6 |
| 0.737250 | ---   | 40.09 | 46.00 | 5.91  | N | OFF | 19.6 |
| 0.737250 | 48.50 | ---   | 56.00 | 7.50  | N | OFF | 19.6 |
| 0.777750 | ---   | 38.31 | 46.00 | 7.69  | N | OFF | 19.6 |
| 0.777750 | 47.11 | ---   | 56.00 | 8.89  | N | OFF | 19.6 |
| 0.809250 | ---   | 36.49 | 46.00 | 9.51  | N | OFF | 19.6 |
| 0.809250 | 45.85 | ---   | 56.00 | 10.15 | N | OFF | 19.6 |
| 0.836250 | ---   | 33.17 | 46.00 | 12.83 | N | OFF | 19.6 |
| 0.836250 | 43.97 | ---   | 56.00 | 12.03 | N | OFF | 19.6 |
| 0.856500 | ---   | 28.79 | 46.00 | 17.21 | N | OFF | 19.6 |
| 0.856500 | 39.59 | ---   | 56.00 | 16.41 | N | OFF | 19.6 |
| 0.899250 | ---   | 31.16 | 46.00 | 14.84 | N | OFF | 19.6 |
| 0.899250 | 42.79 | ---   | 56.00 | 13.21 | N | OFF | 19.6 |
| 0.928500 | ---   | 35.56 | 46.00 | 10.44 | N | OFF | 19.6 |
| 0.928500 | 45.88 | ---   | 56.00 | 10.12 | N | OFF | 19.6 |
| 0.971250 | ---   | 39.03 | 46.00 | 6.97  | N | OFF | 19.6 |
| 0.971250 | 47.44 | ---   | 56.00 | 8.56  | N | OFF | 19.6 |
| 1.029750 | ---   | 40.61 | 46.00 | 5.39  | N | OFF | 19.6 |
| 1.029750 | 48.00 | ---   | 56.00 | 8.00  | N | OFF | 19.6 |
| 1.068000 | ---   | 38.70 | 46.00 | 7.30  | N | OFF | 19.6 |
| 1.068000 | 47.23 | ---   | 56.00 | 8.77  | N | OFF | 19.6 |
| 1.101750 | ---   | 35.24 | 46.00 | 10.76 | N | OFF | 19.6 |
| 1.101750 | 45.19 | ---   | 56.00 | 10.81 | N | OFF | 19.6 |
| 1.140000 | ---   | 31.99 | 46.00 | 14.01 | N | OFF | 19.6 |
| 1.140000 | 42.78 | ---   | 56.00 | 13.22 | N | OFF | 19.6 |
| 1.155750 | ---   | 30.09 | 46.00 | 15.91 | N | OFF | 19.6 |
| 1.155750 | 40.05 | ---   | 56.00 | 15.95 | N | OFF | 19.6 |
| 1.194000 | ---   | 32.40 | 46.00 | 13.60 | N | OFF | 19.6 |
| 1.194000 | 43.35 | ---   | 56.00 | 12.65 | N | OFF | 19.6 |
| 1.216500 | ---   | 35.52 | 46.00 | 10.48 | N | OFF | 19.6 |
| 1.216500 | 45.43 | ---   | 56.00 | 10.57 | N | OFF | 19.6 |
| 1.272750 | ---   | 39.09 | 46.00 | 6.91  | N | OFF | 19.6 |
| 1.272750 | 47.05 | ---   | 56.00 | 8.95  | N | OFF | 19.6 |
| 1.358250 | ---   | 38.96 | 46.00 | 7.04  | N | OFF | 19.6 |
| 1.358250 | 47.28 | ---   | 56.00 | 8.72  | N | OFF | 19.6 |
| 1.410000 | ---   | 34.49 | 46.00 | 11.51 | N | OFF | 19.6 |
| 1.410000 | 44.76 | ---   | 56.00 | 11.24 | N | OFF | 19.6 |
| 1.450500 | ---   | 31.25 | 46.00 | 14.75 | N | OFF | 19.6 |
| 1.450500 | 40.33 | ---   | 56.00 | 15.67 | N | OFF | 19.6 |
| 1.497750 | ---   | 34.28 | 46.00 | 11.72 | N | OFF | 19.6 |
| 1.497750 | 45.17 | ---   | 56.00 | 10.83 | N | OFF | 19.6 |
| 1.578750 | ---   | 39.80 | 46.00 | 6.20  | N | OFF | 19.6 |
| 1.578750 | 46.74 | ---   | 56.00 | 9.26  | N | OFF | 19.6 |
| 1.657500 | ---   | 37.78 | 46.00 | 8.22  | N | OFF | 19.6 |
| 1.657500 | 46.57 | ---   | 56.00 | 9.43  | N | OFF | 19.6 |
| 1.711500 | ---   | 33.57 | 46.00 | 12.43 | N | OFF | 19.6 |
| 1.711500 | 44.14 | ---   | 56.00 | 11.86 | N | OFF | 19.6 |
| 1.743000 | ---   | 31.90 | 46.00 | 14.10 | N | OFF | 19.6 |
| 1.743000 | 41.07 | ---   | 56.00 | 14.93 | N | OFF | 19.6 |
| 1.806000 | ---   | 35.72 | 46.00 | 10.28 | N | OFF | 19.6 |
| 1.806000 | 45.66 | ---   | 56.00 | 10.34 | N | OFF | 19.6 |
| 1.893750 | ---   | 39.03 | 46.00 | 6.97  | N | OFF | 19.6 |
| 1.893750 | 45.82 | ---   | 56.00 | 10.18 | N | OFF | 19.6 |
| 1.981500 | ---   | 35.09 | 46.00 | 10.91 | N | OFF | 19.6 |
| 1.981500 | 45.18 | ---   | 56.00 | 10.82 | N | OFF | 19.6 |

|           |       |       |       |       |   |     |      |
|-----------|-------|-------|-------|-------|---|-----|------|
| 2.024250  | ---   | 33.34 | 46.00 | 12.66 | N | OFF | 19.6 |
| 2.024250  | 41.84 | ---   | 56.00 | 14.16 | N | OFF | 19.6 |
| 2.091750  | ---   | 35.33 | 46.00 | 10.67 | N | OFF | 19.6 |
| 2.091750  | 45.17 | ---   | 56.00 | 10.83 | N | OFF | 19.6 |
| 2.206500  | ---   | 37.68 | 46.00 | 8.32  | N | OFF | 19.6 |
| 2.206500  | 44.87 | ---   | 56.00 | 11.13 | N | OFF | 19.6 |
| 2.251500  | ---   | 35.57 | 46.00 | 10.43 | N | OFF | 19.6 |
| 2.251500  | 44.68 | ---   | 56.00 | 11.32 | N | OFF | 19.6 |
| 2.442750  | ---   | 37.61 | 46.00 | 8.39  | N | OFF | 19.6 |
| 2.442750  | 43.97 | ---   | 56.00 | 12.03 | N | OFF | 19.6 |
| 2.526000  | ---   | 35.83 | 46.00 | 10.17 | N | OFF | 19.6 |
| 2.526000  | 44.45 | ---   | 56.00 | 11.55 | N | OFF | 19.6 |
| 2.688000  | ---   | 35.02 | 46.00 | 10.98 | N | OFF | 19.6 |
| 2.688000  | 43.26 | ---   | 56.00 | 12.74 | N | OFF | 19.6 |
| 2.852250  | ---   | 34.41 | 46.00 | 11.59 | N | OFF | 19.6 |
| 2.852250  | 42.81 | ---   | 56.00 | 13.19 | N | OFF | 19.6 |
| 2.964750  | ---   | 34.29 | 46.00 | 11.71 | N | OFF | 19.6 |
| 2.964750  | 42.36 | ---   | 56.00 | 13.64 | N | OFF | 19.6 |
| 3.124500  | ---   | 34.83 | 46.00 | 11.17 | N | OFF | 19.6 |
| 3.124500  | 42.35 | ---   | 56.00 | 13.65 | N | OFF | 19.6 |
| 3.318000  | ---   | 34.39 | 46.00 | 11.61 | N | OFF | 19.6 |
| 3.318000  | 41.24 | ---   | 56.00 | 14.76 | N | OFF | 19.6 |
| 3.450750  | ---   | 34.81 | 46.00 | 11.19 | N | OFF | 19.6 |
| 3.450750  | 42.29 | ---   | 56.00 | 13.71 | N | OFF | 19.6 |
| 3.644250  | ---   | 34.15 | 46.00 | 11.85 | N | OFF | 19.6 |
| 3.644250  | 41.13 | ---   | 56.00 | 14.87 | N | OFF | 19.6 |
| 3.887250  | ---   | 32.62 | 46.00 | 13.38 | N | OFF | 19.6 |
| 3.887250  | 39.02 | ---   | 56.00 | 16.98 | N | OFF | 19.6 |
| 4.143750  | ---   | 32.57 | 46.00 | 13.43 | N | OFF | 19.6 |
| 4.143750  | 39.35 | ---   | 56.00 | 16.65 | N | OFF | 19.6 |
| 4.393500  | ---   | 32.76 | 46.00 | 13.24 | N | OFF | 19.7 |
| 4.393500  | 38.80 | ---   | 56.00 | 17.20 | N | OFF | 19.7 |
| 11.267250 | ---   | 35.10 | 50.00 | 14.90 | N | OFF | 19.8 |
| 11.267250 | 40.51 | ---   | 60.00 | 19.49 | N | OFF | 19.8 |



## **Appendix B. Radiated Spurious Emission**

|                        |                                |                            |             |
|------------------------|--------------------------------|----------------------------|-------------|
| <b>Test Engineer :</b> | Theodore, Fu Chen, Troye Hsieh | <b>Temperature :</b>       | 20.1~21.7°C |
|                        |                                | <b>Relative Humidity :</b> | 56.1~67.5%  |

**<1Mbps>**

## 2.4GHz 2400~2483.5MHz

### BLE (Harmonic @ 3m)

| BLE                     | Note                                                                                                                                    | Frequency | Level      | Over Limit | Limit Line | Read Level | Antenna Factor | Path Loss | Preamp Factor | Ant Pos | Table Pos | Peak Avg. | Pol.    |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|------------|------------|------------|----------------|-----------|---------------|---------|-----------|-----------|---------|
|                         |                                                                                                                                         | ( MHz )   | ( dBμV/m ) | ( dB )     | ( dBμV/m ) | ( dBμV )   | ( dB/m )       | ( dB )    | ( dB )        | ( cm )  | ( deg )   | ( P/A )   | ( H/V ) |
| BLE<br>CH 19<br>2440MHz |                                                                                                                                         | 4880      | 45.94      | -28.06     | 74         | 60.15      | 32.62          | 11.65     | 58.48         | 100     | 100       | P         | H       |
|                         |                                                                                                                                         | 4880      | 42.45      | -11.55     | 54         | 56.66      | 32.62          | 11.65     | 58.48         | 100     | 100       | A         | H       |
|                         |                                                                                                                                         | 7320      | 42.88      | -31.12     | 74         | 51.59      | 37.02          | 13.44     | 59.17         | -       | -         | P         | H       |
|                         |                                                                                                                                         | 11025     | 46.88      | -27.12     | 74         | 52.09      | 38.9           | 17.42     | 61.53         | -       | -         | P         | H       |
|                         |                                                                                                                                         | 14475     | 46.81      | -27.19     | 74         | 48.46      | 40.57          | 20.81     | 63.03         | -       | -         | P         | H       |
|                         |                                                                                                                                         | 17985     | 48.73      | -25.27     | 74         | 39.85      | 42.49          | 23.03     | 56.64         | -       | -         | P         | H       |
|                         |                                                                                                                                         | 17985     | 39.41      | -14.59     | 54         | 30.53      | 42.49          | 23.03     | 56.64         | -       | -         | A         | H       |
|                         |                                                                                                                                         |           |            |            |            |            |                |           |               |         |           |           | H       |
|                         |                                                                                                                                         |           |            |            |            |            |                |           |               |         |           |           | H       |
|                         |                                                                                                                                         |           |            |            |            |            |                |           |               |         |           |           | H       |
|                         |                                                                                                                                         |           |            |            |            |            |                |           |               |         |           |           | H       |
|                         |                                                                                                                                         |           |            |            |            |            |                |           |               |         |           |           | H       |
|                         |                                                                                                                                         | 4880      | 45.1       | -28.9      | 74         | 59.31      | 32.62          | 11.65     | 58.48         | 400     | 244       | P         | V       |
|                         |                                                                                                                                         | 4880      | 39.67      | -14.33     | 54         | 53.88      | 32.62          | 11.65     | 58.48         | 400     | 244       | A         | V       |
|                         |                                                                                                                                         | 7320      | 41.82      | -32.18     | 74         | 50.53      | 37.02          | 13.44     | 59.17         | -       | -         | P         | V       |
|                         |                                                                                                                                         | 11130     | 47.02      | -26.98     | 74         | 52.26      | 38.96          | 17.46     | 61.66         | -       | -         | P         | V       |
|                         |                                                                                                                                         | 14505     | 47.12      | -26.88     | 74         | 48.68      | 40.59          | 20.85     | 63            | -       | -         | P         | V       |
|                         |                                                                                                                                         | 17985     | 49.34      | -24.66     | 74         | 40.46      | 42.49          | 23.03     | 56.64         | -       | -         | P         | V       |
|                         |                                                                                                                                         | 17985     | 39.89      | -14.11     | 54         | 31.01      | 42.49          | 23.03     | 56.64         | -       | -         | A         | V       |
|                         |                                                                                                                                         |           |            |            |            |            |                |           |               |         |           |           | V       |
|                         |                                                                                                                                         |           |            |            |            |            |                |           |               |         |           |           | V       |
|                         |                                                                                                                                         |           |            |            |            |            |                |           |               |         |           |           | V       |
|                         |                                                                                                                                         |           |            |            |            |            |                |           |               |         |           |           | V       |
|                         |                                                                                                                                         |           |            |            |            |            |                |           |               |         |           |           | V       |
| Remark                  | 1. No other spurious found.                                                                                                             |           |            |            |            |            |                |           |               |         |           |           |         |
|                         | 2. All results are PASS against Peak and Average limit line.                                                                            |           |            |            |            |            |                |           |               |         |           |           |         |
|                         | 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. |           |            |            |            |            |                |           |               |         |           |           |         |
|                         | 4. The emission level close to 18GHz is checked that the average emission level is noise floor only.                                    |           |            |            |            |            |                |           |               |         |           |           |         |





&lt;2Mbps&gt;

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

| BLE                     | Note                                                                                        | Frequency | Level      | Over Limit | Limit Line | Read Level | Antenna Factor | Path Loss | Preamp Factor | Ant Pos | Table Pos | Peak Avg. | Pol.    |
|-------------------------|---------------------------------------------------------------------------------------------|-----------|------------|------------|------------|------------|----------------|-----------|---------------|---------|-----------|-----------|---------|
|                         |                                                                                             | ( MHz )   | ( dBμV/m ) | ( dB )     | ( dBμV/m ) | ( dBμV )   | ( dB/m )       | ( dB )    | ( dB )        | ( cm )  | ( deg )   | ( P/A )   | ( H/V ) |
| BLE<br>CH 39<br>2480MHz | *                                                                                           | 2480      | 88.81      | -          | -          | 77.56      | 27.76          | 17.42     | 33.93         | 200     | 179       | P         | H       |
|                         | *                                                                                           | 2480      | 86.8       | -          | -          | 75.55      | 27.76          | 17.42     | 33.93         | 200     | 179       | A         | H       |
|                         |                                                                                             | 2490.72   | 53.21      | -20.79     | 74         | 41.91      | 27.78          | 17.44     | 33.92         | 200     | 179       | P         | H       |
|                         |                                                                                             | 2492.32   | 43.67      | -10.33     | 54         | 32.37      | 27.78          | 17.44     | 33.92         | 200     | 179       | A         | H       |
|                         |                                                                                             |           |            |            |            |            |                |           |               |         |           |           | H       |
|                         |                                                                                             |           |            |            |            |            |                |           |               |         |           |           | H       |
|                         | *                                                                                           | 2480      | 89.43      | -          | -          | 78.18      | 27.76          | 17.42     | 33.93         | 300     | 171       | P         | V       |
|                         | *                                                                                           | 2480      | 87.89      | -          | -          | 76.64      | 27.76          | 17.42     | 33.93         | 300     | 171       | A         | V       |
|                         |                                                                                             | 2487.76   | 53.42      | -20.58     | 74         | 42.13      | 27.78          | 17.43     | 33.92         | 300     | 171       | P         | V       |
|                         |                                                                                             | 2498.4    | 43.81      | -10.19     | 54         | 32.48      | 27.8           | 17.45     | 33.92         | 300     | 171       | A         | V       |
|                         |                                                                                             |           |            |            |            |            |                |           |               |         |           |           | V       |
|                         |                                                                                             |           |            |            |            |            |                |           |               |         |           |           | V       |
| Remark                  | 1. No other spurious found.<br>2. All results are PASS against Peak and Average limit line. |           |            |            |            |            |                |           |               |         |           |           |         |



## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

| BLE                     | Note | Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB/m ) | Path<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Peak<br>Avg.<br>( P/A ) | Pol.<br>( H/V ) |
|-------------------------|------|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-------------------------------|------------------------|----------------------------|----------------------|-------------------------|-------------------------|-----------------|
| BLE<br>CH 19<br>2440MHz |      | 4880                 | 46.73               | -27.27                  | 74                          | 60.94                     | 32.62                         | 11.65                  | 58.48                      | 100                  | 93                      | P                       | H               |
|                         |      | 4880                 | 41.77               | -12.23                  | 54                          | 55.98                     | 32.62                         | 11.65                  | 58.48                      | 100                  | 93                      | A                       | H               |
|                         |      | 7320                 | 41.88               | -32.12                  | 74                          | 50.59                     | 37.02                         | 13.44                  | 59.17                      | -                    | -                       | P                       | H               |
|                         |      | 10935                | 47.64               | -26.36                  | 74                          | 52.83                     | 38.9                          | 17.33                  | 61.42                      | -                    | -                       | P                       | H               |
|                         |      | 14475                | 47.22               | -26.78                  | 74                          | 48.87                     | 40.57                         | 20.81                  | 63.03                      | -                    | -                       | P                       | H               |
|                         |      | 17985                | 48.83               | -25.17                  | 74                          | 39.95                     | 42.49                         | 23.03                  | 56.64                      | -                    | -                       | P                       | H               |
|                         |      | 17985                | 39.14               | -14.86                  | 54                          | 30.26                     | 42.49                         | 23.03                  | 56.64                      | -                    | -                       | A                       | H               |
|                         |      |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | H               |
|                         |      |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | H               |
|                         |      |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | H               |
|                         |      |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | H               |
|                         |      |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | H               |
|                         |      | 4880                 | 43.74               | -30.26                  | 74                          | 57.95                     | 32.62                         | 11.65                  | 58.48                      | 400                  | 243                     | P                       | V               |
|                         |      | 4880                 | 40.67               | -13.33                  | 54                          | 54.88                     | 32.62                         | 11.65                  | 58.48                      | 400                  | 243                     | A                       | V               |
|                         |      | 7320                 | 41.56               | -32.44                  | 74                          | 50.27                     | 37.02                         | 13.44                  | 59.17                      | -                    | -                       | P                       | V               |
|                         |      | 11325                | 46.89               | -27.11                  | 74                          | 52.07                     | 39.17                         | 17.54                  | 61.89                      | -                    | -                       | P                       | V               |
|                         |      | 14475                | 47.94               | -26.06                  | 74                          | 49.59                     | 40.57                         | 20.81                  | 63.03                      | -                    | -                       | P                       | V               |
|                         |      | 17970                | 48.54               | -25.46                  | 74                          | 39.81                     | 42.39                         | 23.01                  | 56.67                      | -                    | -                       | P                       | V               |
|                         |      | 17970                | 39.75               | -14.25                  | 54                          | 31.02                     | 42.39                         | 23.01                  | 56.67                      | -                    | -                       | A                       | V               |
|                         |      |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | V               |
|                         |      |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | V               |
|                         |      |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | V               |
|                         |      |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | V               |
|                         |      |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | V               |



| BLE                     | Note                                                                                                                                    | Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB/m ) | Path<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Peak<br>Avg.<br>( P/A ) | Pol.<br>( H/V ) |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-------------------------------|------------------------|----------------------------|----------------------|-------------------------|-------------------------|-----------------|
| BLE<br>CH 39<br>2480MHz |                                                                                                                                         | 4960                 | 47.28               | -26.72                  | 74                          | 60.86                     | 33.02                         | 11.89                  | 58.49                      | 300                  | 277                     | P                       | H               |
|                         |                                                                                                                                         | 4960                 | 42.46               | -11.54                  | 54                          | 56.04                     | 33.02                         | 11.89                  | 58.49                      | 300                  | 277                     | A                       | H               |
|                         |                                                                                                                                         | 7440                 | 41.01               | -32.99                  | 74                          | 49.94                     | 36.44                         | 13.75                  | 59.12                      | -                    | -                       | P                       | H               |
|                         |                                                                                                                                         | 11430                | 47.27               | -26.73                  | 74                          | 52.61                     | 39.1                          | 17.58                  | 62.02                      | -                    | -                       | P                       | H               |
|                         |                                                                                                                                         | 14475                | 46.85               | -27.15                  | 74                          | 48.5                      | 40.57                         | 20.81                  | 63.03                      | -                    | -                       | P                       | H               |
|                         |                                                                                                                                         | 17895                | 49.04               | -24.96                  | 74                          | 41.12                     | 41.83                         | 22.94                  | 56.85                      | -                    | -                       | P                       | H               |
|                         |                                                                                                                                         | 17895                | 38.77               | -15.23                  | 54                          | 30.85                     | 41.83                         | 22.94                  | 56.85                      | -                    | -                       | A                       | H               |
|                         |                                                                                                                                         |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | H               |
|                         |                                                                                                                                         |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | H               |
|                         |                                                                                                                                         |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | H               |
|                         |                                                                                                                                         |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | H               |
|                         |                                                                                                                                         |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | H               |
|                         |                                                                                                                                         | 4960                 | 43.21               | -30.79                  | 74                          | 56.79                     | 33.02                         | 11.89                  | 58.49                      | 400                  | 106                     | P                       | V               |
|                         |                                                                                                                                         | 4960                 | 41.38               | -12.62                  | 54                          | 54.96                     | 33.02                         | 11.89                  | 58.49                      | 400                  | 106                     | A                       | V               |
|                         |                                                                                                                                         | 7440                 | 41.61               | -32.39                  | 74                          | 50.54                     | 36.44                         | 13.75                  | 59.12                      | -                    | -                       | P                       | V               |
|                         |                                                                                                                                         | 11475                | 46.98               | -27.02                  | 74                          | 52.35                     | 39.1                          | 17.6                   | 62.07                      | -                    | -                       | P                       | V               |
|                         |                                                                                                                                         | 14490                | 46.41               | -27.59                  | 74                          | 48                        | 40.59                         | 20.83                  | 63.01                      | -                    | -                       | P                       | V               |
|                         |                                                                                                                                         | 17985                | 49.75               | -24.25                  | 74                          | 40.87                     | 42.49                         | 23.03                  | 56.64                      | -                    | -                       | P                       | V               |
|                         |                                                                                                                                         | 17985                | 39.95               | -14.05                  | 54                          | 31.07                     | 42.49                         | 23.03                  | 56.64                      | -                    | -                       | A                       | V               |
|                         |                                                                                                                                         |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | V               |
|                         |                                                                                                                                         |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | V               |
|                         |                                                                                                                                         |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | V               |
|                         |                                                                                                                                         |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | V               |
|                         |                                                                                                                                         |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | V               |
|                         |                                                                                                                                         |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         | V               |
| Remark                  | 1. No other spurious found.                                                                                                             |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         |                 |
|                         | 2. All results are PASS against Peak and Average limit line.                                                                            |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         |                 |
|                         | 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         |                 |
|                         | 4. The emission level close to 18GHz is checked that the average emission level is noise floor only.                                    |                      |                     |                         |                             |                           |                               |                        |                            |                      |                         |                         |                 |



## Emission above 18GHz

## 2.4GHz BLE (SHF)

| BLE                  | Note                                                                                                                                                                                                                  | Frequency | Level      | Over   | Limit      | Read   | Antenna  | Path   | Preamp | Ant    | Table   | Peak  | Pol.  |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|--------|------------|--------|----------|--------|--------|--------|---------|-------|-------|
|                      |                                                                                                                                                                                                                       |           |            | Limit  | Line       | Level  | Factor   | Loss   | Factor | Pos    | Pos     | Avg.  |       |
|                      |                                                                                                                                                                                                                       | ( MHz )   | ( dBμV/m ) | ( dB ) | ( dBμV/m ) | (dBμV) | ( dB/m ) | ( dB ) | ( dB ) | ( cm ) | ( deg ) | (P/A) | (H/V) |
| 2.4GHz<br>BLE<br>SHF |                                                                                                                                                                                                                       | 21647     | 38.27      | -35.73 | 74         | 57.72  | 38.1     | -2.85  | 54.7   | -      | -       | P     | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | H     |
|                      |                                                                                                                                                                                                                       | 23222     | 39.42      | -34.58 | 74         | 57.26  | 38.9     | -2.68  | 54.06  | -      | -       | P     | V     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | V     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | V     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | V     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | V     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | V     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | V     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | V     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | V     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | V     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | V     |
|                      |                                                                                                                                                                                                                       |           |            |        |            |        |          |        |        |        |         |       | V     |
| Remark               | 1. No other spurious found.<br>2. All results are PASS against limit line.<br>3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. |           |            |        |            |        |          |        |        |        |         |       |       |

## Emission below 1GHz

## 2.4GHz BLE (LF)

| BLE                         | Note                                                                                                                                                               | Frequency | Level      | Over   | Limit      | Read   | Antenna  | Path   | Preamp | Ant    | Table   | Peak  | Pol.  |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|--------|------------|--------|----------|--------|--------|--------|---------|-------|-------|
|                             |                                                                                                                                                                    |           |            | Limit  | Line       | Level  | Factor   | Loss   | Factor | Pos    | Pos     | Avg.  |       |
|                             |                                                                                                                                                                    | ( MHz )   | ( dBμV/m ) | ( dB ) | ( dBμV/m ) | (dBμV) | ( dB/m ) | ( dB ) | ( dB ) | ( cm ) | ( deg ) | (P/A) | (H/V) |
| 2.4GHz<br><br>BLE<br><br>LF |                                                                                                                                                                    | 52.31     | 31         | -9     | 40         | 49.35  | 13.04    | 1.09   | 32.48  | -      | -       | P     | H     |
|                             |                                                                                                                                                                    | 206.54    | 34.05      | -9.45  | 43.5       | 49.39  | 14.94    | 2.22   | 32.5   | -      | -       | P     | H     |
|                             |                                                                                                                                                                    | 258.92    | 35.99      | -10.01 | 46         | 46.34  | 19.41    | 2.5    | 32.26  | -      | -       | P     | H     |
|                             |                                                                                                                                                                    | 479.11    | 37.62      | -8.38  | 46         | 42.83  | 23.5     | 3.34   | 32.05  | -      | -       | P     | H     |
|                             |                                                                                                                                                                    | 848.68    | 30.27      | -15.73 | 46         | 28.27  | 29.01    | 4.49   | 31.5   | -      | -       | P     | H     |
|                             |                                                                                                                                                                    | 949.56    | 31.49      | -14.51 | 46         | 27.23  | 30.38    | 4.78   | 30.9   | -      | -       | P     | H     |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         |       | H     |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         |       | H     |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         |       | H     |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         |       | H     |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         |       | H     |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         |       | H     |
|                             |                                                                                                                                                                    | 52.31     | 29.39      | -10.61 | 40         | 47.74  | 13.04    | 1.09   | 32.48  | 100    | 76      | Q     | V     |
|                             |                                                                                                                                                                    | 143.49    | 34.56      | -8.94  | 43.5       | 48.01  | 17.13    | 1.87   | 32.45  | -      | -       | P     | V     |
|                             |                                                                                                                                                                    | 239.52    | 35         | -11    | 46         | 48.07  | 16.88    | 2.4    | 32.35  | -      | -       | P     | V     |
|                             |                                                                                                                                                                    | 479.11    | 36.28      | -9.72  | 46         | 41.49  | 23.5     | 3.34   | 32.05  | -      | -       | P     | V     |
|                             |                                                                                                                                                                    | 891.36    | 30.3       | -15.7  | 46         | 28.09  | 28.85    | 4.63   | 31.27  | -      | -       | P     | V     |
|                             |                                                                                                                                                                    | 947.62    | 30.4       | -15.6  | 46         | 26.26  | 30.28    | 4.77   | 30.91  | -      | -       | P     | V     |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         |       | V     |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         |       | V     |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         |       | V     |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         |       | V     |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         |       | V     |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         | V     |       |
| Remark                      | 1. No other spurious found.                                                                                                                                        |           |            |        |            |        |          |        |        |        |         |       |       |
|                             | 2. All results are PASS against limit line.                                                                                                                        |           |            |        |            |        |          |        |        |        |         |       |       |
|                             | 3. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only. |           |            |        |            |        |          |        |        |        |         |       |       |
|                             |                                                                                                                                                                    |           |            |        |            |        |          |        |        |        |         |       |       |



**Note symbol**

|     |                                                                                                                                                          |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| *   | <b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. |
| !   | Test result is <b>over limit</b> line.                                                                                                                   |
| P/A | <b>Peak</b> or <b>Average</b>                                                                                                                            |
| H/V | <b>Horizontal</b> or <b>Vertical</b>                                                                                                                     |



A calculation example for radiated spurious emission is shown as below:

| BLE                     | Note | Frequency | Level      | Over   | Limit      | Read     | Antenna  | Path   | Preamp | Ant    | Table   | Peak    | Pol.    |
|-------------------------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
|                         |      |           |            | Limit  | Line       | Level    | Factor   | Loss   | Factor | Pos    | Pos     | Avg.    |         |
|                         |      | ( MHz )   | ( dBμV/m ) | ( dB ) | ( dBμV/m ) | ( dBμV ) | ( dB/m ) | ( dB ) | ( dB ) | ( cm ) | ( deg ) | ( P/A ) | ( H/V ) |
| BLE<br>CH 00<br>2402MHz |      | 2390      | 55.45      | -18.55 | 74         | 54.51    | 32.22    | 4.58   | 35.86  | 103    | 308     | P       | H       |
|                         |      | 2390      | 43.54      | -10.46 | 54         | 42.6     | 32.22    | 4.58   | 35.86  | 103    | 308     | A       | H       |

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.





## Appendix C. Radiated Spurious Emission Plots

|                 |                                |                     |             |
|-----------------|--------------------------------|---------------------|-------------|
| Test Engineer : | Theodore, Fu Chen, Troye Hsieh | Temperature :       | 20.1~21.7°C |
|                 |                                | Relative Humidity : | 56.1~67.5%  |

&lt;1Mbps&gt;

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)
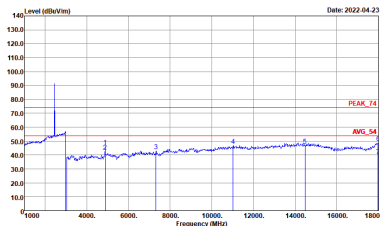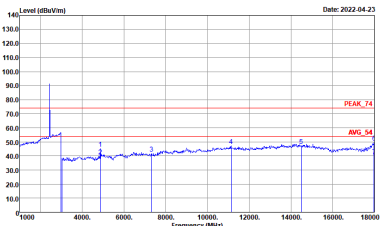
| BLE          | 2.4GHz 2400~2483.5MHz Harmonic @ 3m                                                                                                                                |                                                                                                                                                                   |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              | BLE CH19 2440MHz                                                                                                                                                   |                                                                                                                                                                   |
|              | Horizontal                                                                                                                                                         | Vertical                                                                                                                                                          |
| Peak<br>Avg. |  <p>Site : 03CH11-HY<br/>Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL</p> |  <p>Site : 03CH11-HY<br/>Condition : PEAK_74 3m 91200_1212_220310 VERTICAL</p> |









&lt;2Mbps&gt;

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

| BLE  | 2.4GHz 2400~2483.5MHz Band Edge @ 3m                                                                                                                                                                                  |                                                                                                                                                                                                                     |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | BLE CH39 2480MHz                                                                                                                                                                                                      |                                                                                                                                                                                                                     |
|      | Horizontal                                                                                                                                                                                                            | Fundamental                                                                                                                                                                                                         |
| Peak |  <p>Site : 03CH11-HY<br/>Condition : PEAK_BE_74 3m 91200_1212_220310 HORIZONTAL<br/>: RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto</p> |  <p>Site : 03CH11-HY<br/>Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL<br/>: RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto</p> |
| Avg. |  <p>Site : 03CH11-HY<br/>Condition : AVG_BE_54 3m 91200_1212_220310 HORIZONTAL<br/>: RBW:1000.0000kHz VBW:10.0000kHz SWT:Auto</p>  |  <p>Site : 03CH11-HY<br/>Condition : AVG_54 3m 91200_1212_220310 HORIZONTAL<br/>: RBW:1000.0000kHz VBW:10.0000kHz SWT:Auto</p>  |





| BLE  | 2.4GHz 2400~2483.5MHz Band Edge @ 3m                                                                                            |                                                                                                                              |
|------|---------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
|      | BLE CH39 2480MHz                                                                                                                |                                                                                                                              |
|      | Vertical                                                                                                                        | Fundamental                                                                                                                  |
| Peak | <p>Site : 03CH11-HY<br/>Condition : PEAK_BE_74 3m 91200_1212_220310 VERTICAL<br/>: RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto</p> | <p>Site : 03CH11-HY<br/>Condition : PEAK_74 3m 91200_1212_220310 VERTICAL<br/>: RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto</p> |
| Avg. | <p>Site : 03CH11-HY<br/>Condition : AVG_BE_74 3m 91200_1212_220310 VERTICAL<br/>: RBW:1000.0000Hz VBW:10.0000Hz SWT:Auto</p>    | <p>Site : 03CH11-HY<br/>Condition : AVG_74 3m 91200_1212_220310 VERTICAL<br/>: RBW:1000.0000Hz VBW:10.0000Hz SWT:Auto</p>    |





2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)
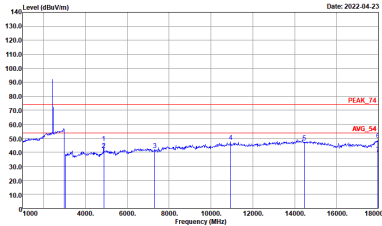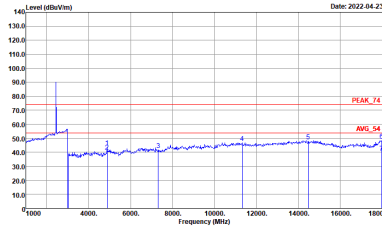
| BLE          | 2.4GHz 2400~2483.5MHz Harmonic @ 3m                                                                                                                                |                                                                                                                                                                   |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              | BLE CH19 2440MHz                                                                                                                                                   |                                                                                                                                                                   |
|              | Horizontal                                                                                                                                                         | Vertical                                                                                                                                                          |
| Peak<br>Avg. |  <p>Site : 03CH11-14Y<br/>Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL</p> |  <p>Site : 03CH11-14Y<br/>Condition : PEAK_74 3m 91200_1212_220310 VERTICAL</p> |

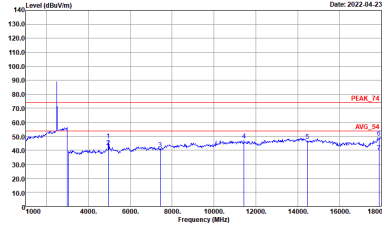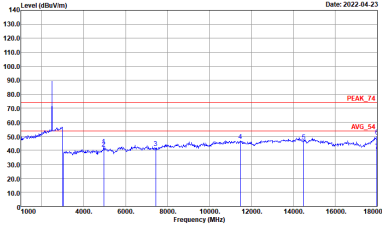

| BLE          | 2.4GHz 2400~2483.5MHz Harmonic @ 3m                                                                                                                               |                                                                                                                                                                  |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              | BLE CH39 2480MHz                                                                                                                                                  |                                                                                                                                                                  |
|              | Horizontal                                                                                                                                                        | Vertical                                                                                                                                                         |
| Peak<br>Avg. |  <p>Site : 03CH11-HY<br/>Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL</p> |  <p>Site : 03CH11-HY<br/>Condition : PEAK_74 3m 91200_1212_220310 VERTICAL</p> |





Emission above 18GHz  
2.4GHz BLE (SHF @ 1m)

| BLE          | 2.4GHz 2400~2483.5MHz                                                                                                                   |                                                                                                                                       |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
|              | BLE SHF                                                                                                                                 |                                                                                                                                       |
|              | Horizontal                                                                                                                              | Vertical                                                                                                                              |
| Peak<br>Avg. | <div><p>Level (dBuV/m)</p><p>Date: 2022-04-23</p><p>Site : 03CH11-HY<br/>Condition : PEAK_74 1m SHF ANT_9170_00993 HORIZONTAL</p></div> | <div><p>Level (dBuV/m)</p><p>Date: 2022-04-23</p><p>Site : 03CH11-HY<br/>Condition : PEAK_74 1m SHF ANT_9170_00993 VERTICAL</p></div> |



Emission below 1GHz

2.4GHz BLE (LF)

| BLE          | 2.4GHz 2400~2483.5MHz                                                                                                                                                 |                                                                                                                                                                      |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              | BLE LF                                                                                                                                                                |                                                                                                                                                                      |
|              | Horizontal                                                                                                                                                            | Vertical                                                                                                                                                             |
| QP /<br>Peak | <p></p> <p>Site : 03CH11-HY<br/>Condition : QP 3m BL-LO6 35414-211009 HORIZONTAL</p> | <p></p> <p>Site : 03CH11-HY<br/>Condition : QP 3m BL-LO6 35414-211009 VERTICAL</p> |



## Appendix D. Duty Cycle Plots

| Band                     | Duty Cycle(%) | T(us) | 1/T(kHz) | VBW Setting |
|--------------------------|---------------|-------|----------|-------------|
| Bluetooth – LE for 1Mbps | 62.62         | 392   | 2.55     | 3kHz        |
| Bluetooth – LE for 2Mbps | 33.01         | 206   | 4.85     | 10kHz       |

