

FCC TEST REPORT

For

Shenzhen Xtooltech Intelligent Co.Ltd

Tire pressure sensor

Test Model: TS100

Additional Model No.: /

Prepared for : Shenzhen Xtooltech Intelligent Co.Ltd
Address : 2nd Floor, Tower 2, Excellence City, No.128, Zhongkang Road,
Shangmeilin, Futian District, Shenzhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : Room 101, 201, Building A and Room 301, Building C, Juji
Industrial Park, Yabianxueziwei, Shajing Street, Bao' an District,
Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 10, 2020
Number of tested samples : 1
Serial number : Prototype
Date of Test : March 10, 2020 ~ March 16, 2020
Date of Report : March 18, 2020

FCC TEST REPORT
FCC CFR 47 PART 15C(15.231)

Report Reference No. : **LCS200301018AEB**

Date of Issue..... : March 18, 2020

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address..... : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao' an District, Shenzhen, Guangdong, China

Testing Location/ Procedure..... : Full application of Harmonised standards
 Partial application of Harmonised standards
 Other standard testing method

Applicant's Name..... : **Shenzhen Xtooltech Intelligent Co.Ltd**

Address..... : 2nd Floor, Tower 2, Excellence City, No.128, Zhongkang Road, Shangmeilin, Futian District, Shenzhen, China

Test Specification

Standard..... : FCC CFR 47 PART 15 C(15.231)

Test Report Form No..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : **Tire pressure sensor**

Trade Mark..... : XTOOL

Test Model..... : TS100

Ratings..... : DC 3V By Battery(350mAh)

Result : **Positive**

Compiled by:

Jerry Zeng

Jerry Zeng/ Administrators

Supervised by:

Jin Wang

Jin Wang / Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS200301018AEB	<u>March 18, 2020</u> Date of issue
--	--

Test Mode.....	: TS100
EUT.....	: Tire pressure sensor
Applicant.....	: Shenzhen Xtooltech Intelligent Co.Ltd
Address.....	: 2nd Floor, Tower 2, Excellence City, No.128, Zhongkang Road, Shangmeilin, Futian District, Shenzhen, China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Shenzhen Xtooltech Intelligent Co.Ltd
Address.....	: 2nd Floor, Tower 2, Excellence City, No.128, Zhongkang Road, Shangmeilin, Futian District, Shenzhen, China
Telephone.....	: /
Fax.....	: /
Factory.....	: Shenzhen Xtooltech Intelligent Co.Ltd
Address.....	: 2nd Floor, Tower 2, Excellence City, No.128, Zhongkang Road, Shangmeilin, Futian District, Shenzhen, China
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	March 18, 2020	Initial Issue	Gavin Liang

TABLE OF CONTENTS

- 1. GENERAL INFORMATION.....6**
 - 1.1. DESCRIPTION OF DEVICE (EUT)..... 6
 - 1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS.....6
 - 1.3. EXTERNAL I/O CABLE.....6
 - 1.4. DESCRIPTION OF TEST FACILITY.....6
 - 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....7
 - 1.6. MEASUREMENT UNCERTAINTY.....7
 - 1.7. DESCRIPTION OF TEST MODES..... 7
- 2. TEST METHODOLOGY..... 8**
 - 2.1. EUT CONFIGURATION..... 8
 - 2.2. EUT EXERCISE.....8
 - 2.3. GENERAL TEST PROCEDURES.....8
- 3. SYSTEM TEST CONFIGURATION.....9**
 - 3.1. JUSTIFICATION..... 9
 - 3.2. EUT EXERCISE SOFTWARE.....9
 - 3.3. SPECIAL ACCESSORIES.....9
 - 3.4. BLOCK DIAGRAM/SCHEMATICS.....9
 - 3.5. EQUIPMENT MODIFICATIONS.....9
 - 3.6. TEST SETUP.....9
- 4. SUMMARY OF TEST RESULTS..... 10**
- 5. TEST ITEMS AND RESULTS..... 11**
 - 5.1. DURATION OF EACH TRANSMISSION AND THE SILENT PERIOD..... 11
 - 5.2. TRANSMITTER FIELD STRENGTH OF EMISSIONS.....12
 - 5.3. 99% AND 20DB BANDWIDTH EMISSIONS.....22
 - 5.4. DUTY CYCLE.....24
 - 5.5. AC POWER LINE CONDUCTED EMISSIONS (NOT APPLICABLE).....25
 - 5.6. ANTENNA REQUIREMENT..... 26
- 6. LIST OF MEASURING EQUIPMENTS..... 27**
- 7. PHOTOGRAPHS OF TEST SETUP.....28**
- 8. EXTERIOR PHOTOGRAPHS OF THE EUT.....28**
- 9. INTERIOR PHOTOGRAPHS OF THE EUT.....28**

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: Tire pressure sensor
Test Model	: TS100
Power Supply	: DC 3V By Battery(350mAh)
Hardware version	: V1.2
Software version	: /
Operation frequency	: 315MHz
Number of Channels	: 1
Modulation Type	: GFSK
Antenna Description	: Internal Antenna, 0dBi (Max.)
Operation frequency	: 433.92MHz
Modulation Type	: GFSK
Channel Number	: 1
Antenna Description	: Internal Antenna, 0dBi (Max.)

1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	---	--

1.3. External I/O Cable

I/O Port Description	Quantity	Cable
--	--	--

1.4. Description of Test Facility

FCC Registration Number. is 254912.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001.

NVLAP Registration Code is 600167-0.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10:2013 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	±3.10dB	(1)
	30MHz~200MHz	±2.96dB	(1)
	200MHz~1000MHz	±3.10dB	(1)
	1GHz~26.5GHz	±3.80dB	(1)
	26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	±1.63dB	(1)
Power disturbance	30MHz~300MHz	±1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

The EUT has been tested under engineering mode. The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis). The worst case of X axis was reported.

A new battery supplied DC 3.0V power to the EUT for testing.

The EUT transmits signal as soon as it is powered on, and recorded the result in this report.

***Note: Using a temporary antenna connector for the EUT when conducted measurements are performed.

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.231 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013.

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmit condition.

Using sample to test, which was automatically launched

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Bands Of Operation	Compliant
§15.207	AC Mains Conducted Emission	N/A*
§15.209	General Requirements.	Compliant
§15.231 (e)	Field Strength Of Fundamental And Harmonics	Compliant
§15.231 (c)	20dB Bandwidth	Compliant
§15.231	Duty cycle Factor	Compliant
§15.231 (e)	Duration of each Transmission and the silent period	Compliant

Note:

1.N/A – Not Applicable.

5. TEST ITEMS AND RESULTS

5.1. Duration of each Transmission and the silent period

FCC 15.231 (e)

5.1.1. Limit

devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

5.1.2. Test Procedure


Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. The antenna was all opened.

5.1.3. Test Results

Temperature	22.3°C	Humidity	53.0%
Test Engineer	Diamond Lu	Configurations	TX Mode

Frequency (MHz)	Duration of each Transmission (s)	Limit: not more than 1 seconds (s)	Conclusion
315	0.968	1	PASS

Frequency (MHz)	the silent period (s)	Limit: At least 30 times the duration of the transmission but in no case less than 10s	Conclusion
315	29.80	>10s	PASS

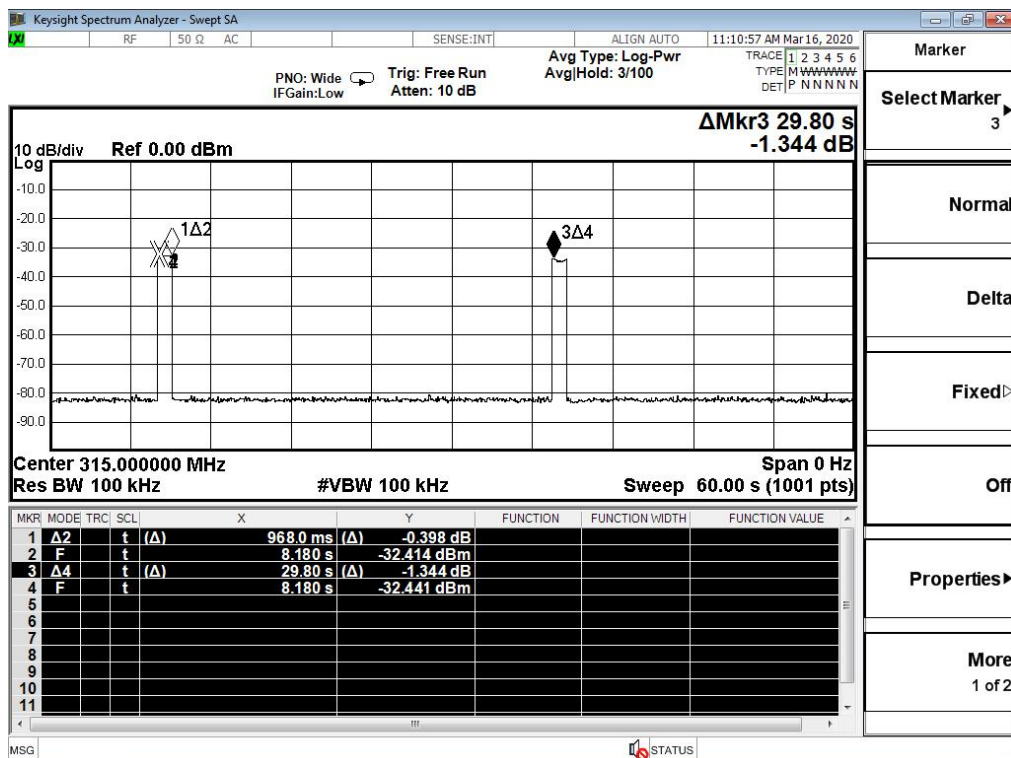

5.2. Transmitter Field Strength of Emissions

5.2.1. Limit

FCC §15.231 /15.209 /15.205

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	608-614	4.5-5.15
¹ 0.495-0.505	16.69475-16.68525	960-1240	5.35-5.46
2.1735-2.1905	16.80425-16.80475	1300-1427	7.25-7.75
4.125-4.128	25.525-67	1435-1626.5	8.025-8.5
4.17725-4.17775	37.5-38.25	1645.5-1646.5	9.0-9.2
4.20725-4.20775	73-74.6	1660-1710	9.3-9.5
6.215-6.218	74.8-75.2	1718.8-1722.2	10.6-12.7
6.26775-6.26825	108-121.94	2200-2300	13.25-13.4
6.31175-6.31225	123-138	2310-2390	14.47-14.5
8.291-8.294	149.9-150.05	2483.5-2500	15.35-16.2
8.362-8.366	156.52475-156.52525	2655-2900	17.7-21.4
8.37625-8.38675	156.7-156.9	3260-3267	22.01-23.12
8.41425-8.41475	162.0125167.17	3332-3339	23.6-24.0
12.29-12.293	167.72-173.2	3345.8-3358	31.2-31.8
12.51975-12.52025	240-285	3600-4400	36.43-36.5
12.57675-12.57725	322-335.4		.(²)
13.36-13.41	399.9-410		

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

According to § 15.231 (e), Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	1,000	100
71-130	500	50
130-174	500 to 1,500 ¹	50 to 150 ¹
174-260	1,500	150
260-470	1,500 to 5,000 ¹	150 to 500 ¹
Above 470	5,000	500

¹Linear interpolations.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F (KHz)	300
0.490-1.705	24000 (KHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 72 MHz, 76 88 MHz, 174 216 MHz or 470 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

5.2.2 Measuring Instruments and Setting

Please refer to equipment's list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

5.2.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Premeasurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height is 1.5 meter.

--- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum found antenna polarization and turntable position of the premeasurement the software maximizes the peaks by rotating the turntable position (0° to 360°). This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps). This procedure is repeated for both antenna polarizations.

--- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and RMS detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


5.2.4. Test Setup Layout

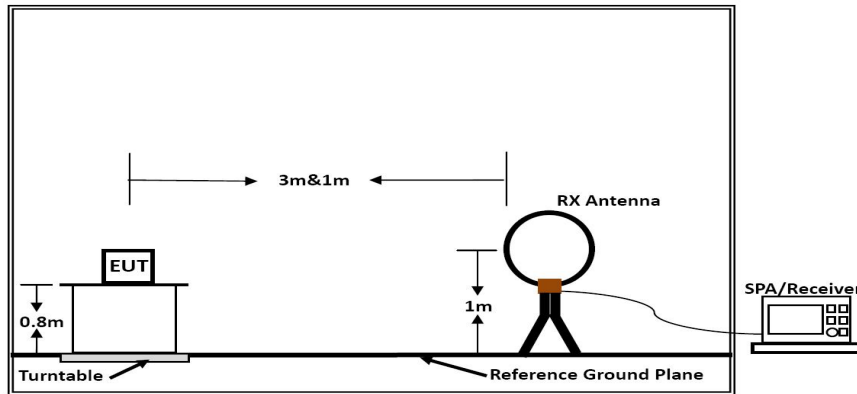

Below 30MHz

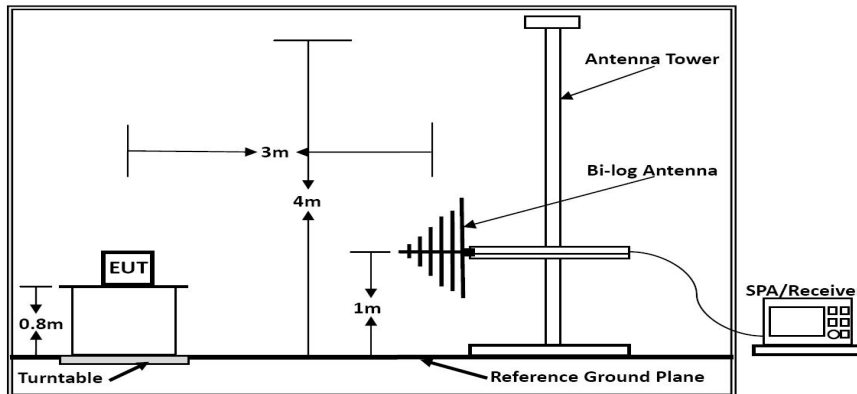

Below 1GHz

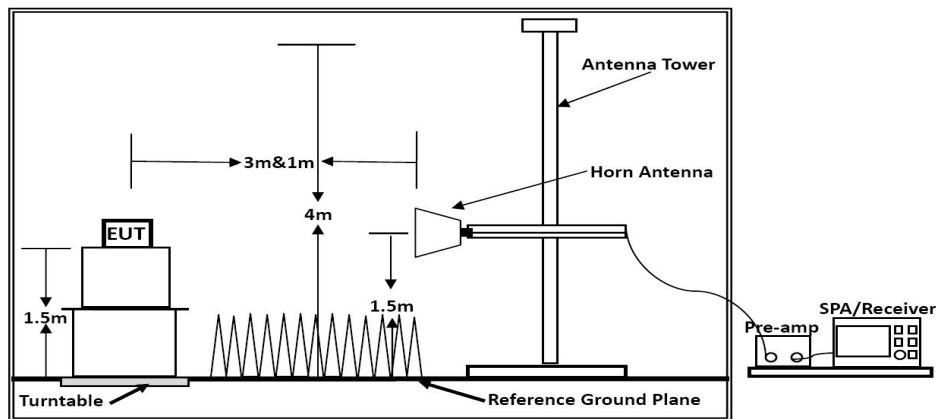

Above 1GHz

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.6. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	23.9°C	Humidity	54.0%
Test Engineer	Diamond Lu	Configurations	TX

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dB)	Remark
-	-	-	-	See Note

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.2.7. Results of Radiated Emissions (30MHz~1GHz)


Horizontal

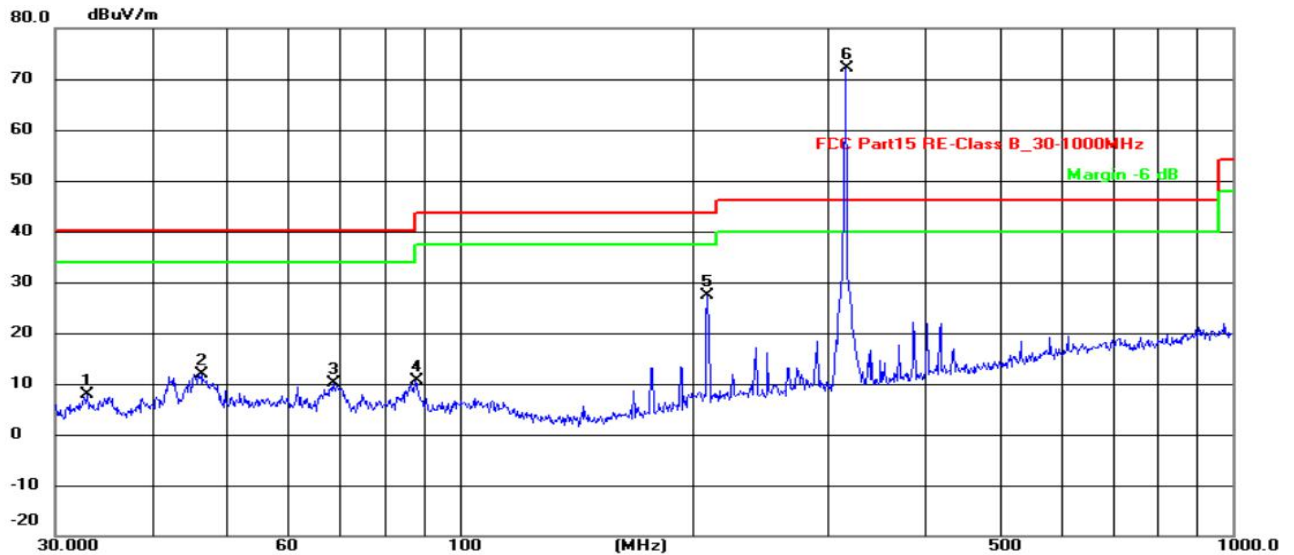

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.9791	26.91	-19.08	7.83	40.00	-32.17	QP
2	46.3402	28.39	-16.43	11.96	40.00	-28.04	QP
3	68.6310	30.20	-20.13	10.07	40.00	-29.93	QP
4	87.7248	31.09	-20.48	10.61	40.00	-29.39	QP
5	209.3129	45.33	-17.91	27.42	43.50	-16.08	QP
6	315.4808	87.30	-15.27	72.03	90.82	-18.79	peak

Fundamental and Harmonics Average Result						
Frequency (MHz)	Peak Level (dBμV/m)	AV Factor (dBμV/m) (see Section 5.4)	Average Level (dBμV/m)	Limit (dBμV/m) (average)	Limit (dBμV/m) (Peak)	Conclusion
315.48	72.03	-8.89	63.14	70.82	90.82	PASS

Vertical

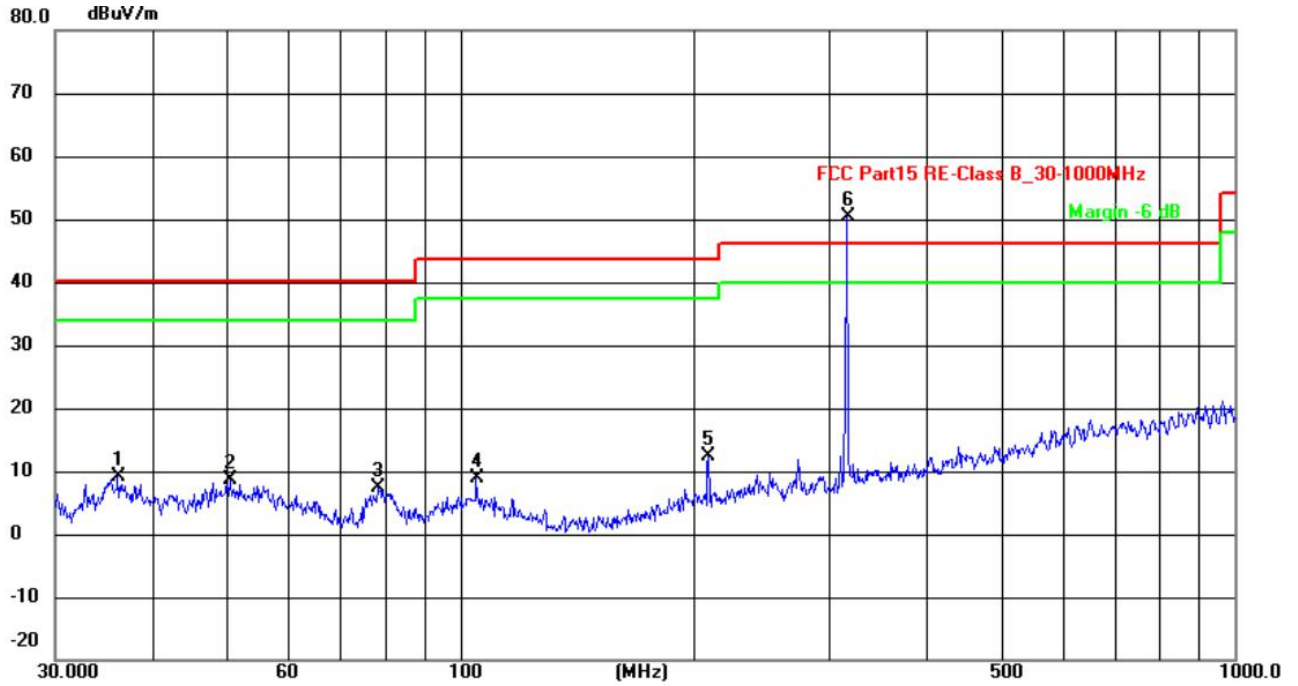

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.1272	27.71	-18.65	9.06	40.00	-30.94	QP
2	50.4089	25.03	-16.46	8.57	40.00	-31.43	QP
3	78.4133	29.36	-21.98	7.38	40.00	-32.62	QP
4	104.9033	27.19	-18.37	8.82	43.50	-34.68	QP
5	209.3129	30.41	-17.91	12.50	43.50	-31.00	QP
6	315.4808	65.56	-15.27	50.29	90.82	-40.53	peak

Fundamental and Harmonics Average Result

Frequency (MHz)	Peak Level (dBμV/m)	AV Factor(dBμV/m) (see Section 5.4)	Average Level (dBμV/m)	Limit(dBμV/m) (average)	Limit(dBμV/m) (Peak)	Conclusion
315.48	50.29	-8.89	41.4	70.82	90.82	PASS

5.2.8. Results of Radiated Emissions (Above1GHz)

Temperature	23.9°C	Humidity	54.0%
Test Engineer	Diamond Lu	Configurations	Harmonics Emissions/ Spurious Emission

Peak Value				
Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1259.94	48.11	74	-25.89	Horizontal
1575.05	46.77	74	-27.23	Horizontal
1890.14	46.94	74	-27.06	Horizontal
1259.93	46.65	74	-27.35	Vertical
1575.06	47.14	74	-26.86	Vertical
1890.10	46.92	74	-27.08	Vertical

Average Value:						
Frequency (MHz)	Peak Level (dBuV/m)	Duty cycle factor	Average value (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1259.88	48.11	-8.89	39.22	54.00	-14.78	Horizontal
1575.06	46.77	-8.89	37.88	54.00	-16.12	Horizontal
1890.13	46.94	-8.89	38.05	54.00	-15.95	Horizontal
1259.92	46.65	-8.89	37.76	54.00	-16.24	Vertical
1575.07	47.14	-8.89	38.00	54.00	-15.75	Vertical
1890.14	46.92	-8.89	38.03	54.00	-15.97	Vertical

Remark:

1. Measuring frequencies from 9 KHz~10th harmonic (ex. 5GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9 KHz~10th harmonic (ex. 5GHz) were made with an instrument using Peak detector mode.
3. Average values = Peak values + DC factor = Peak values – 8.89
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


5.3. 99% and 20dB Bandwidth Emissions

5.3.1. Limit

According to § 15.231 (c), the bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

- 0.25% of the center operating frequency
- 0.5% of the center operating frequency

5.4.2. Block Diagram of Test Setup

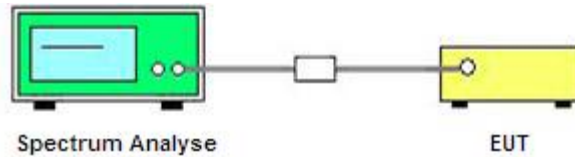

5.3.2. Test Procedure

Use the following spectrum analyzer settings:

Span = 500KHz

RBW = 3 KHz

VBW = 10KHz

Sweep = auto

Detector function = peak

Trace = max hold


The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

5.3.3. Test Data

Transmit Frequency (MHz)	Limit (kHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)	Result
315.00	787.50	177.4	144.85	PASS

Remark:

1. Test results including cable loss;
2. Please refer following test plots;

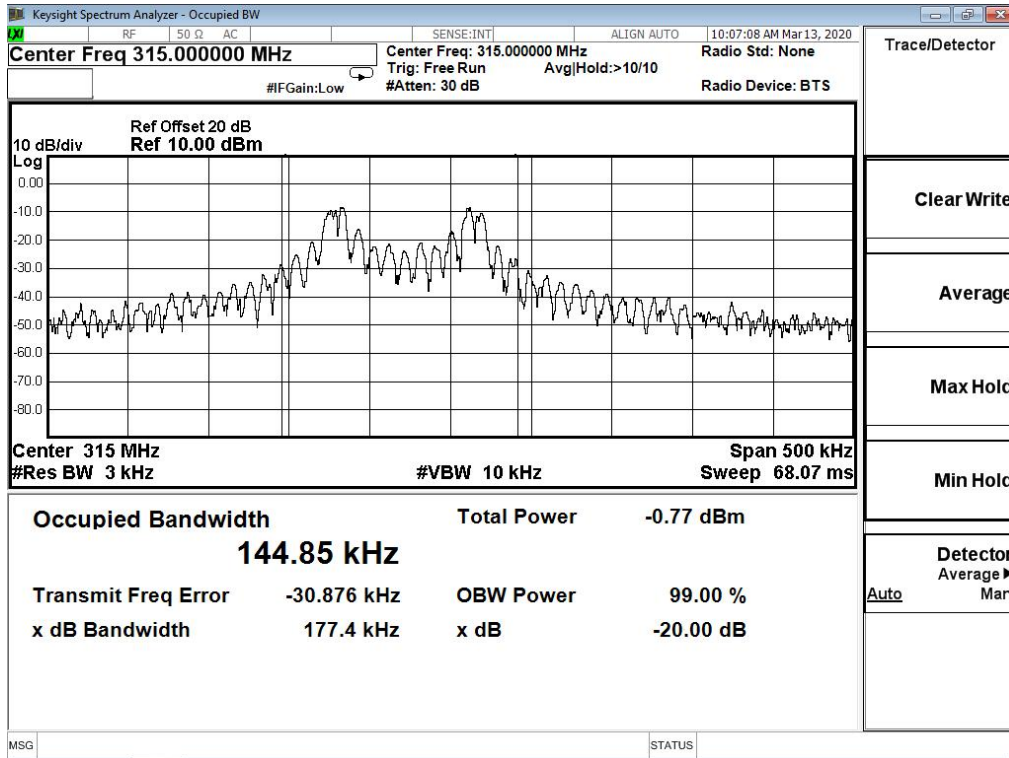


5.4. Duty cycle

5.4.1. Limit

No dedicated limit specified in the Rules.

5.4.2. Block Diagram of Test Setup

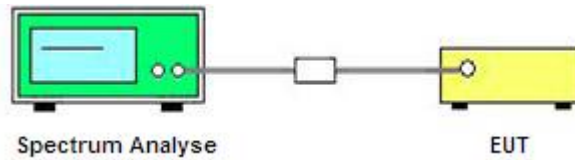

5.4.3. Test Procedure

- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set centre frequency of spectrum analyzer=operating frequency.
- Set the spectrum analyzer as RBW=100 KHz, VBW=100 KHz, Span=0Hz, Adjust Sweep=100ms.
- Repeat above procedures until all frequency measured was complete.

5.4.3. Test Results


$$T_{on} = 0.28 \cdot 19 + 0.94 \cdot 6 = 10.96 \text{ ms}$$

$$T_p = 30.50 \text{ (ms)}$$

$$\text{The duty cycle} = (0.28 \cdot 19 + 0.94 \cdot 6) / 100 = 35.93\%$$

$$\text{Average Correction Factory} = 20 \log (T_{on}/T_p) = 20 \log (22.05/100) = -8.89 \text{ dB}$$

Note: The signal bandwidth was measured and less than 100 kHz RBW so PDCF factor is not required to correct the fundamental signal peak result.

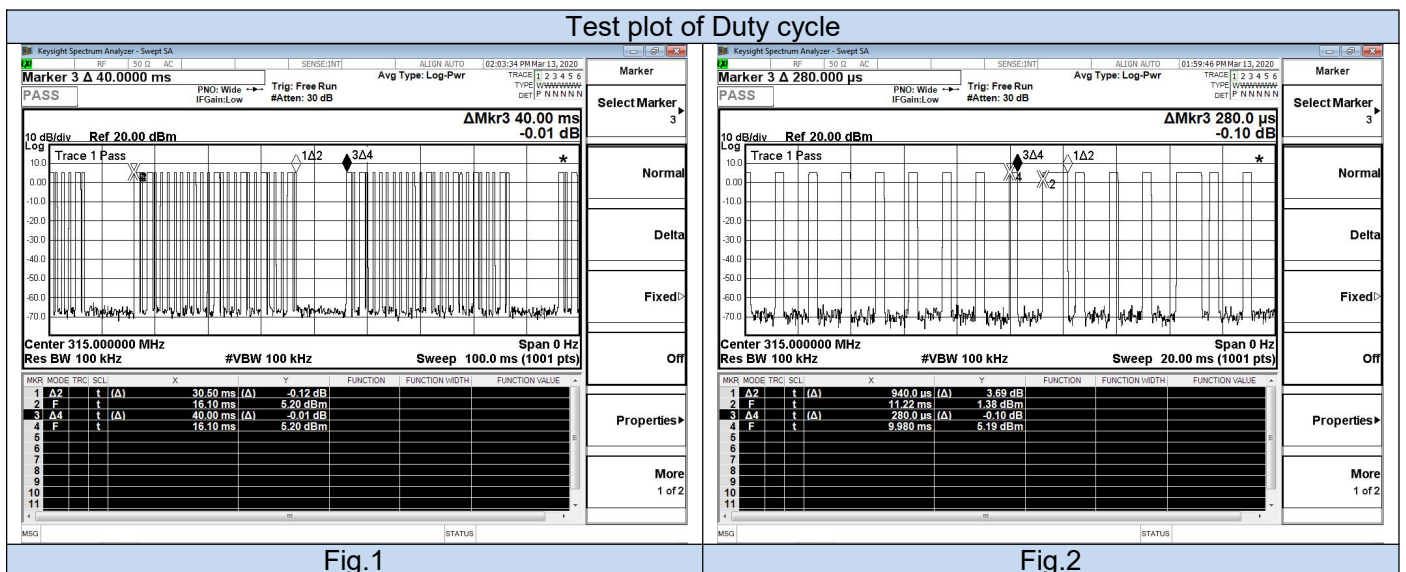

5.5. AC Power Line Conducted Emissions (Not Applicable)


5.5.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

5.5.2 Block Diagram of Test Setup

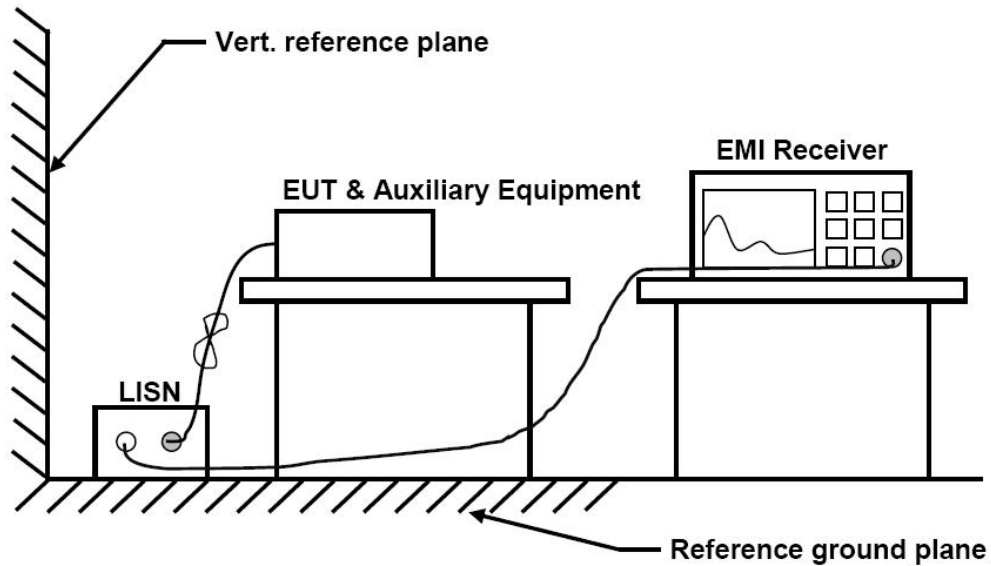

5.5.3 Test Results

Not Applicable!!!!

The device was powered by DC battery!!!

5.6. Antenna Requirement

5.6.1. Standard Applicable

According to § 15.203 and RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.6.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 0dBi, and the antenna is an Internal antenna connect to board and no consideration of replacement. Please see EUT photo for details.

5.6.3 Result

Compliance.

6. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Meter	R&S	NRVS	100444	2019-06-11	2020-06-10
2	Power Sensor	R&S	NRV-Z81	100458	2019-06-11	2020-06-10
3	Power Sensor	R&S	NRV-Z32	10057	2019-06-11	2020-06-10
4	Test Software	Tonscend	JS1120-2	/	N/A	N/A
5	RF Control Unit	Tonscend	JS0806-2	N/A	2019-06-11	2020-06-10
6	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2019-11-22	2020-11-21
7	DC Power Supply	Agilent	E3642A	N/A	2019-11-14	2020-11-13
8	EMI Test Software	AUDIX	E3	/	N/A	N/A
9	3m Full Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2019-06-12	2020-06-11
10	Positioning Controller	MF	MF-7082	N/A	2019-06-12	2020-06-11
11	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2018-07-26	2021-07-25
12	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2018-07-26	2021-07-25
13	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2018-07-02	2021-07-01
14	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2017-09-21	2020-09-20
15	Broadband Preamplifier	SCHWARZBECK	BBV 9719	9719-025	2019-06-17	2020-06-16
16	EMI Test Receiver	R&S	ESR 7	101181	2019-06-12	2020-06-11
17	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2019-11-14	2020-11-13
18	Broadband Preamplifier	/	BP-01M18G	P190501	2019-07-01	2020-06-30
19	RF Cable-R03m	Jye Bao	RG142	CB021	2019-06-12	2020-06-11
20	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2019-06-12	2020-06-11
21	6dB Attenuator	/	100W/6dB	1172040	2019-06-11	2020-06-10
22	3dB Attenuator	/	2N-3dB	/	2019-06-11	2020-06-10
23	Power Meter	R&S	NRVS	100444	2019-06-11	2020-06-10
24	Power Sensor	R&S	NRV-Z81	100458	2019-06-11	2020-06-10
25	Power Sensor	R&S	NRV-Z32	10057	2019-06-11	2020-06-10

Note: All equipment is calibrated through GUANGZHOU LISAI CALIBRATION AND TEST CO.,LTD.

7. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files for External Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----