



Test report No.: 2380950R-RFNAV02S-A

TEST REPORT (Class II Permissive Change)

Product Name	TCx EDGE Cam+
Trademark	TOSHIBA
Model and /or type reference	6260-002
FCC ID	2AW3T-6260-002
Applicant's name / address	Toshiba Global Commerce Solutions, Inc. 3901 South Miami Blvd., Durham, North Carolina United States 27703
Manufacturer's name	Toshiba Global Commerce Solutions, Inc.
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Verdict Summary	IN COMPLIANCE
Documented By (Senior Project Specialist / Ida Tung)	<i>Ida Tung</i>
Tested By (Senior Engineer / Bill Lin)	<i>Bill Lin</i>
Approved By (Senior Engineer / Alan Chen)	<i>Alan Chen</i>
Date of Receipt	2023/08/31
Date of Issue	2023/10/16
Report Version	V1.0

INDEX

	Page
1. General Information.....	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	8
1.3. Configuration of Tested System	8
1.4. EUT Exercise Software	8
1.5. Test Facility	9
1.6. List of Test Item and Equipment	10
1.7. Uncertainty	11
2. Maximum Power Output	12
2.1. Test Setup	12
2.2. Limits.....	12
2.3. Test Procedure	12
2.4. Test Result of Peak Power Output.....	13
3. Radiated Emission	19
3.1. Test Setup	19
3.2. Limits.....	20
3.3. Test Procedure	21
3.4. Test Result of Radiated Emission.....	22
4. Band Edge	23
4.1. Test Setup	23
4.2. Limits.....	24
4.3. Test Procedure	24
4.4. Test Result of Band Edge	25
5. Power Density.....	26
5.1. Test Setup	26
5.2. Limits.....	26
5.3. Test Procedure	26
5.4. Test Result of Power Density	27
6. Duty Cycle	31
6.1. Test Setup	31
6.2. Test Procedure	31
6.3. Test Result of Duty Cycle.....	32

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 2380950R-Product Photos

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Report No.	Version	Description	Issued Date
2380950R-RFNAV02S-A	V1.0	Initial issue of report.	2023/10/16

1. General Information

1.1. EUT Description

Product Name	TCx EDGE Cam+
Trademark	TOSHIBA
Model and /or type reference	6260-002
EUT Rated Voltage	PoE, 48-57V $\overline{=}$ / 25.5W max USB 12V $\overline{=}$ 2.25A / 9V $\overline{=}$ 3A / 27W max
EUT Test Voltage	DC 12V (by USB-Type C) DC 48V (by PoE)
Frequency Range	802.11b/g/n/ac/ax-20 MHz: 2412-2462 MHz 802.11n/ac/ax-40: 2422-2452 MHz
Number of Channels	802.11b/g/n/ac/ax-20 MHz: 11 CH, 802.11n/ac/ax-40 MHz: 7 CH
Data Speed	802.11b: 1-11 Mbps, 802.11g: 6-54 Mbps, 802.11n: up to 300 Mbps 802.11ac: up to 400 Mbps, 802.11ax: up to 573.6 Mbps
Channel separation	802.11b/g/n/ac/ax: 5 MHz
Type of Modulation	802.11b: DSSS, DBPSK, DQPSK, CCK 802.11g/n/ac/ax: OFDM, OFDMA, BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Channel Control	Auto
USB Cable	Shielded, 2.5m
RJ45 Cable	Non-Shielded, 4.3m
Mounting Pipe	N/A

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Pulse	TZ2531W (Main)	PIFA	2.7 dBi for 2400 MHz
		TZ2530W (Aux)		3.3 dBi for 2400 MHz

Note: The antenna of EUT is conforming to FCC 15.203. The antenna gain as by the manufacturer provided.

For power CDD Directional gain	For power Beamforming Directional gain
3.3 dBi for 2.4 GHz	6.31 dBi for 2.4 GHz

For CDD mode:

2400MHz: Directional gain = 3.3 dBi
 (Directional gain = $G_{ANT\ MAX} + \text{Array Gain, Array Gain} = 0\ \text{dB for } N_{ANT} \leq 4$)

For Beamforming mode:

2400MHz: Directional gain = 6.31 dBi
 (Directional gain = $G_{ANT\ MAX} + \text{Array Gain, Array Gain} = 10 * \log(2) = 3.01\ \text{dB}$)

For Power Density Directional gain
6.02 dBi for 2.4 GHz

2400 MHz: Directional gain = 6.02 dBi
 Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$ dBi

802.11b/g/n/ac/ax-20 MHz Center Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422	04	2427
05	2432	06	2437	07	2442	08	2447
09	2452	10	2457	11	2462	--	--

802.11n/ac/ax-40 MHz Center Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432	06	2437
07	2442	08	2447	09	2452	--	--

Note:

1. The EUT is a TCx EDGE Cam+ with a built-in WLAN and Bluetooth transceiver, this report for 2.4GHz WLAN.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test. The other channels are for reference only.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
4. DEKRA has evaluated each test mode. Only the worst case is shown in the report.
5. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report.
6. The CDD mode and Beamforming mode are presented in the power output test item. For other test items, CDD mode is the worst case for the final test and shown in this report.
7. This device does not support partial RU function, only support full RU function.
8. This is to request a Class II permissive change.

The major change filed under this application is:

Change #1: Enable CDD and Beamforming function by software(SW version: v0.1630_Perf) and test Output power, verify Radiated Emission, Band Edge and Duty Cycle.

9. These tests are conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.

Test Mode	Mode 1	Transmit (802.11b)-CDD
		Transmit (802.11g)-CDD
		Transmit (802.11ax-20BW)-CDD
		Transmit (802.11ax-40BW)-CDD
		Transmit (802.11ax-20BW)-Beamforming
		Transmit (802.11ax-40BW)-Beamforming


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Power Adapter	NETGEAR	2ACL068S	N/A	N/A
2 PoE Switch	NETGEAR	GS305Pv2	N/A	N/A
3 Notebook PC	DELL	Latitude E5440	FS9TK32	N/A

Cable Type	Cable Description
A Power Cable	Non-shielded, 1.5m
B LAN Cable	Non-shielded, 4.2m
C USB-Type C Cable	Shielded, 2.5m

1.3. Configuration of Tested System

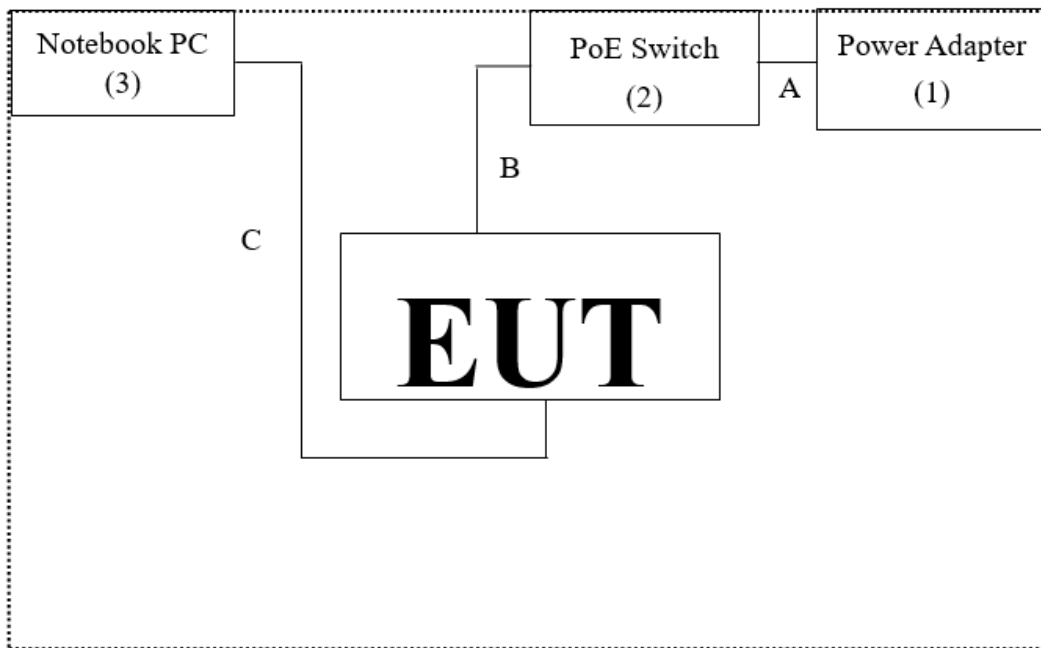

1.4. EUT Exercise Software

1	Setup the EUT as shown in Section 1.3.
2	Execute software “QRCT Version 4.0.210.0” on the Notebook PC.
3	Configure the test mode, the test channel, and the data rate.
4	Press “OK” to start the continuous transmit.
5	Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Radiated Emission	Temperature (°C)	10~40 °C	23.4 °C
	Humidity (%RH)	10~90 %	66.8 %
Conductive	Temperature (°C)	10~40 °C	22.0 °C
	Humidity (%RH)	10~90 %	61.0 %

USA	FCC Registration Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No.5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan, R.O.C
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

1.6. List of Test Item and Equipment

For Conduction Measurements / HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
	EMI Test Receiver	R&S	ESR7	101601	2023/06/20	2024/06/19
	Two-Line V-Network	R&S	ENV216	101306	2023/03/16	2024/03/15
	Two-Line V-Network	R&S	ENV216	101307	2023/08/17	2024/08/16
	Coaxial Cable	SUHNER	RG400 BNC	RF001	2023/01/10	2024/01/09

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

For Conducted Measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103466	2022/12/22	2023/12/21
V	Spectrum Analyzer	KEYSIGHT	N9010A	MY53470892	2022/11/7	2023/11/06
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000539	2023/05/15	2024/05/14
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY59240002	2023/05/18	2024/05/18
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY59240003	2023/05/18	2024/05/17

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: RF Conducted Test Tools R3 V3.0.0.14.

For Radiated Measurements /HY-CB01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	AMETEK	HLA6121	56736	2023/05/23	2024/05/24
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-0675	2023/08/09	2025/08/08
V	Horn Antenna	RF SPIN	DRH18-E	210802A18ES	2023/03/23	2024/03/22
V	Horn Antenna	Com-Power	AH-840	101101	2021/11/30	2023/11/29
V	Pre-Amplifier	SGH	0301	20211007-7	2023/01/10	2024/01/09
V	Pre-Amplifier	EMCI	EMC051845SE	980632	2023/01/10	2024/01/09
V	Pre-Amplifier	EMCI	EMC05820SE	980362	2023/01/10	2024/01/09
	Pre-Amplifier	EMCI	EMC184045SE	980369	2023/01/10	2024/01/09
V	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
V	Filter	MICRO TRONICS	BRM50702	G251	2023/01/05	2024/01/04
	Filter	MICRO TRONICS	BRM50716	067	2023/01/05	2024/01/04
V	EMI Test Receiver	R&S	ESR3	102792	2022/12/29	2023/12/28
V	Spectrum Analyzer	R&S	FSV3044	101115	2023/01/06	2024/01/05
	Coaxial Cable	SUHNER	SUCOFLEX 106	25450/6	2023/01/10	2024/01/09
V	Coaxial Cable	SGH	HA800	GD20110222-8		
	Coaxial Cable	SGH	SGH18	2021003-8		
	Coaxial Cable	EMCI	EMC106	151113		

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
Maximum Power Output	Spectrum Analyzer: ± 2.14 dB Power Meter: ± 1.05 dB
Radiated Emission	9 kHz~30 MHz: ± 3.88 dB 30 MHz~1 GHz: ± 4.42 dB 1 GHz~18 GHz: ± 4.28 dB 18 GHz~40 GHz: ± 3.90 dB
Band Edge	9 kHz~30 MHz: ± 3.88 dB 30 MHz~1 GHz: ± 4.42 dB 1 GHz~18 GHz: ± 4.28 dB 18 GHz~40 GHz: ± 3.90 dB
Power Density	± 2.14 dB
Duty Cycle	± 0.53 %

2. Maximum Power Output

2.1. Test Setup



2.2. Limits

The maximum peak power shall be less 1 Watt.

2.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method. The maximum average conducted output power using C63.10:2013 Section 11.9.2.3 Measurement using a power meter (PM). (Measurement using a gated RF average-reading power meter).

2.4. Test Result of Peak Power Output

Product : TCx EDGE Cam+
 Test Item : Maximum Power Output Data
 Test Mode : Transmit (802.11b)-CDD
 Test Date : 2023/09/07

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Chain A (dBm)	Chain B (dBm)	Average Output Power Chain A + B (dBm)	Limit (dBm)	Result
01	2412	1	15.09	15.59	18.36	<30	Pass
06	2437	1	15.71	15.84	18.79	<30	Pass
11	2462	1	14.93	15.67	18.33	<30	Pass

Note: Average Power Output Value (dBm) = $10 \cdot \text{LOG} (\text{Chain A (mW)} + \text{Chain B (mW)})$

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Chain A (dBm)	Chain B (dBm)	Peak Output Power Chain A + B (dBm)	Limit (dBm)	Result
01	2412	1	17.75	17.95	20.86	<30	Pass
06	2437	1	18.12	18.48	21.31	<30	Pass
11	2462	1	17.43	18.36	20.93	<30	Pass

Note: Peak Power Output Value (dBm) = $10 \cdot \text{LOG} (\text{Chain A (mW)} + \text{Chain B (mW)})$

Product : TCx EDGE Cam+
 Test Item : Maximum Power Output Data
 Test Mode : Transmit (802.11g)-CDD
 Test Date : 2023/09/07

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Chain A (dBm)	Chain B (dBm)	Average Output Power Chain A + B (dBm)	Limit (dBm)	Result
01	2412	6	13.19	13.68	16.45	<30	Pass
06	2437	6	13.28	14.02	16.68	<30	Pass
11	2462	6	12.93	13.85	16.42	<30	Pass

Note: Average Power Output Value (dBm) = $10 \cdot \text{LOG} (\text{Chain A (mW)} + \text{Chain B (mW)})$

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Chain A (dBm)	Chain B (dBm)	Peak Output Power Chain A + B (dBm)	Limit (dBm)	Result
01	2412	6	15.74	16.09	18.93	<30	Pass
06	2437	6	15.87	16.56	19.24	<30	Pass
11	2462	6	15.47	16.53	19.04	<30	Pass

Note: Peak Power Output Value (dBm) = $10 \cdot \text{LOG} (\text{Chain A (mW)} + \text{Chain B (mW)})$

Product : TCx EDGE Cam+
 Test Item : Maximum Power Output Data
 Test Mode : Transmit (802.11ax-20BW)-CDD
 Test Date : 2023/09/07

Channel No.	Frequency (MHz)	Data Rate	Chain A	Chain B	Average Output Power Chain A + B (dBm)	Limit (dBm)	Result
01	2412	MCS0	11.10	12.02	14.59	<30	Pass
06	2437	MCS0	11.02	11.94	14.51	<30	Pass
11	2462	MCS0	11.21	12.04	14.66	<30	Pass

Note: Average Power Output Value (dBm) = $10 \cdot \text{LOG} (\text{Chain A (mW)} + \text{Chain B (mW)})$

Channel No.	Frequency (MHz)	Data Rate	Chain A	Chain B	Peak Output Power Chain A + B (dBm)	Limit (dBm)	Result
01	2412	MCS0	19.45	19.62	22.55	<30	Pass
06	2437	MCS0	18.36	19.39	21.92	<30	Pass
11	2462	MCS0	18.48	19.62	22.10	<30	Pass

Note: Peak Power Output Value (dBm) = $10 \cdot \text{LOG} (\text{Chain A (mW)} + \text{Chain B (mW)})$

Product : TCx EDGE Cam+
 Test Item : Maximum Power Output Data
 Test Mode : Transmit (802.11ax-40BW)-CDD
 Test Date : 2023/09/07

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Chain A	Chain B	Average Output Power Chain A + B (dBm)	Limit (dBm)	Result
03	2422	MCS0	11.23	11.67	14.47	<30	Pass
06	2437	MCS0	11.22	12.11	14.70	<30	Pass
09	2452	MCS0	10.62	12.12	14.44	<30	Pass

Note: Average Power Output Value (dBm) = $10 \cdot \text{LOG} (\text{Chain A (mW)} + \text{Chain B (mW)})$

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Chain A	Chain B	Peak Output Power Chain A + B (dBm)	Limit (dBm)	Result
03	2422	MCS0	19.39	19.15	22.28	<30	Pass
06	2437	MCS0	19.07	19.70	22.41	<30	Pass
09	2452	MCS0	18.24	19.63	22.00	<30	Pass

Note: Peak Power Output Value (dBm) = $10 \cdot \text{LOG} (\text{Chain A (mW)} + \text{Chain B (mW)})$

Product : TCx EDGE Cam+
 Test Item : Maximum Power Output Data
 Test Mode : Transmit (802.11ax-20BW)-Beamforming
 Test Date : 2023/09/07

Channel No.	Frequency (MHz)	Data Rate	Chain A	Chain B	Average Output Power Chain A + B (dBm)	Limit (dBm)	Result
01	2412	MCS0	8.09	9.01	11.58	<29.69	Pass
06	2437	MCS0	8.01	8.93	11.50	<29.69	Pass
11	2462	MCS0	8.20	9.03	11.65	<29.69	Pass

Note: Average Power Output Value (dBm) = $10 \cdot \text{LOG} (\text{Chain A (mW)} + \text{Chain B (mW)})$

Channel No.	Frequency (MHz)	Data Rate	Chain A	Chain B	Peak Output Power Chain A + B (dBm)	Limit (dBm)	Result
01	2412	MCS0	16.44	16.61	19.54	<29.69	Pass
06	2437	MCS0	15.35	16.38	18.91	<29.69	Pass
11	2462	MCS0	15.47	16.61	19.09	<29.69	Pass

Note: Peak Power Output Value (dBm) = $10 \cdot \text{LOG} (\text{Chain A (mW)} + \text{Chain B (mW)})$

Product : TCx EDGE Cam+
 Test Item : Maximum Power Output Data
 Test Mode : Transmit (802.11ax-40BW)-Beamforming
 Test Date : 2023/09/07

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Chain A	Chain B	Average Output Power Chain A + B (dBm)	Limit (dBm)	Result
03	2422	MCS0	8.22	8.66	11.46	<29.69	Pass
06	2437	MCS0	8.21	9.10	11.69	<29.69	Pass
09	2452	MCS0	7.61	9.11	11.43	<29.69	Pass

Note: Average Power Output Value (dBm) = $10 \cdot \text{LOG} (\text{Chain A (mW)} + \text{Chain B (mW)})$


Channel No.	Frequency (MHz)	Data Rate (Mbps)	Chain A	Chain B	Peak Output Power Chain A + B (dBm)	Limit (dBm)	Result
03	2422	MCS0	16.38	16.14	19.27	<29.69	Pass
06	2437	MCS0	16.06	16.69	19.40	<29.69	Pass
09	2452	MCS0	15.23	16.62	18.99	<29.69	Pass

Note: Peak Power Output Value (dBm) = $10 \cdot \text{LOG} (\text{Chain A (mW)} + \text{Chain B (mW)})$


3. Radiated Emission

3.1. Test Setup


Radiated Emission Under 30 MHz

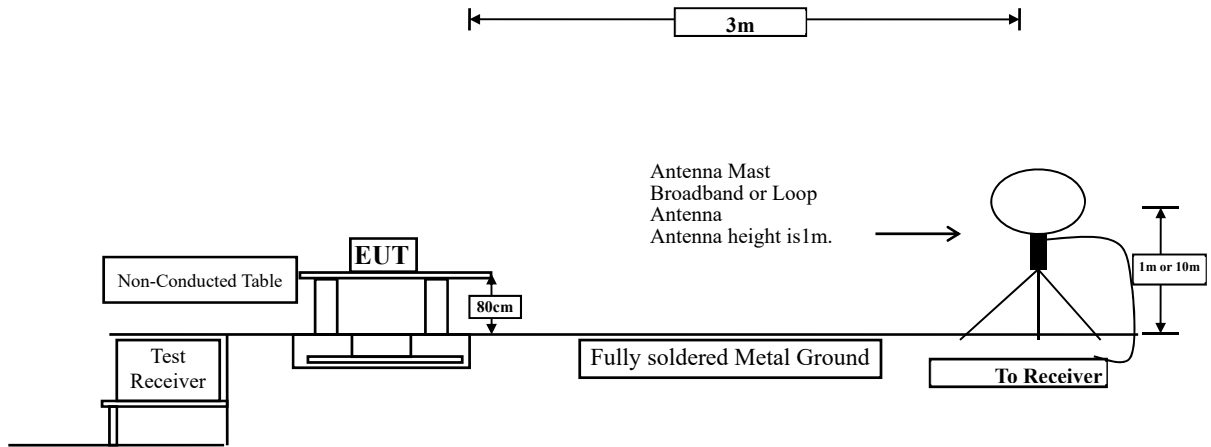

Radiated Emission Below 1 GHz

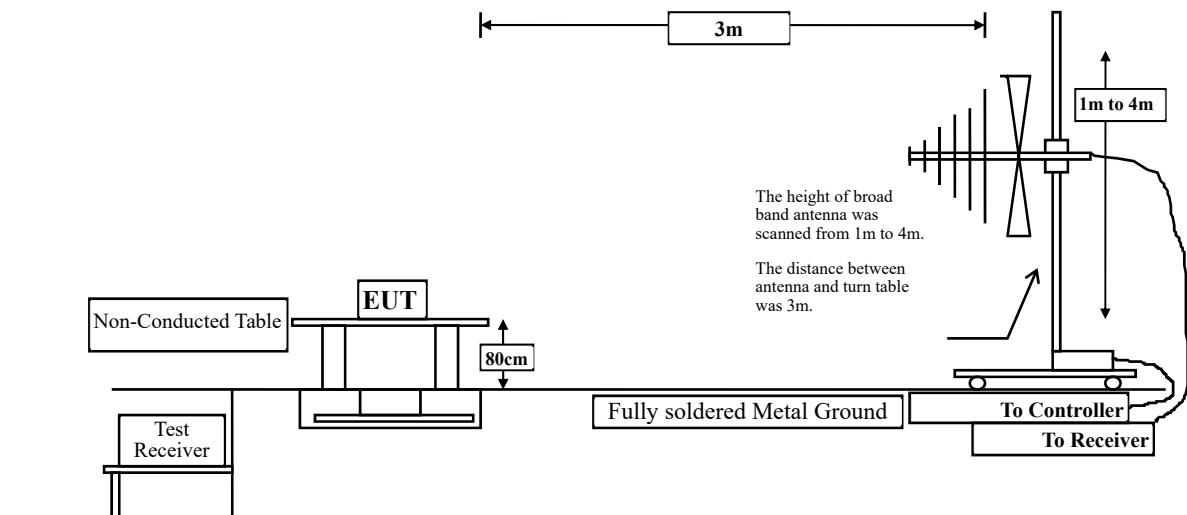

Radiated Emission Above 1 GHz

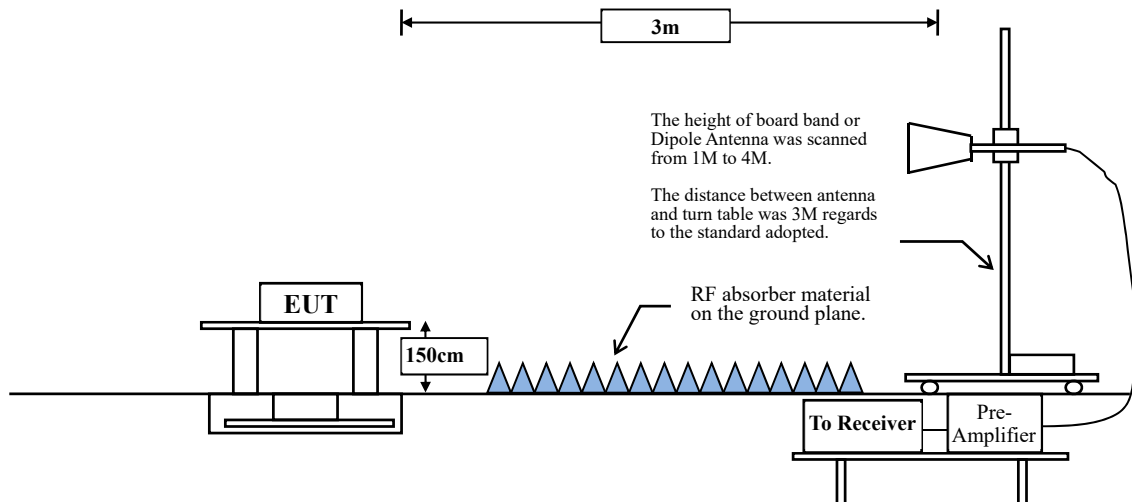

3.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20 dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dB μ V) = 20 log RF Voltage (μ V)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1 GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30 MHz setting on the field strength meter is 9 kHz and 30 MHz~1 GHz is 120 kHz and above 1 GHz is 1 MHz.

Radiated emission measurements below 30 MHz are made using Loop Antenna and 30 MHz~1 GHz are made using broadband Bilog antenna and above 1 GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9 kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

VBW $\geq 3 \times$ RBW.

Table 1 - RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98 \%$


VBW $\geq 1/T$, when duty cycle $< 98 \%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11 ax-20 MHz	99.51	5.4360	184	10

Note: Duty Cycle Refer to Section 5.


3.4. Test Result of Radiated Emission

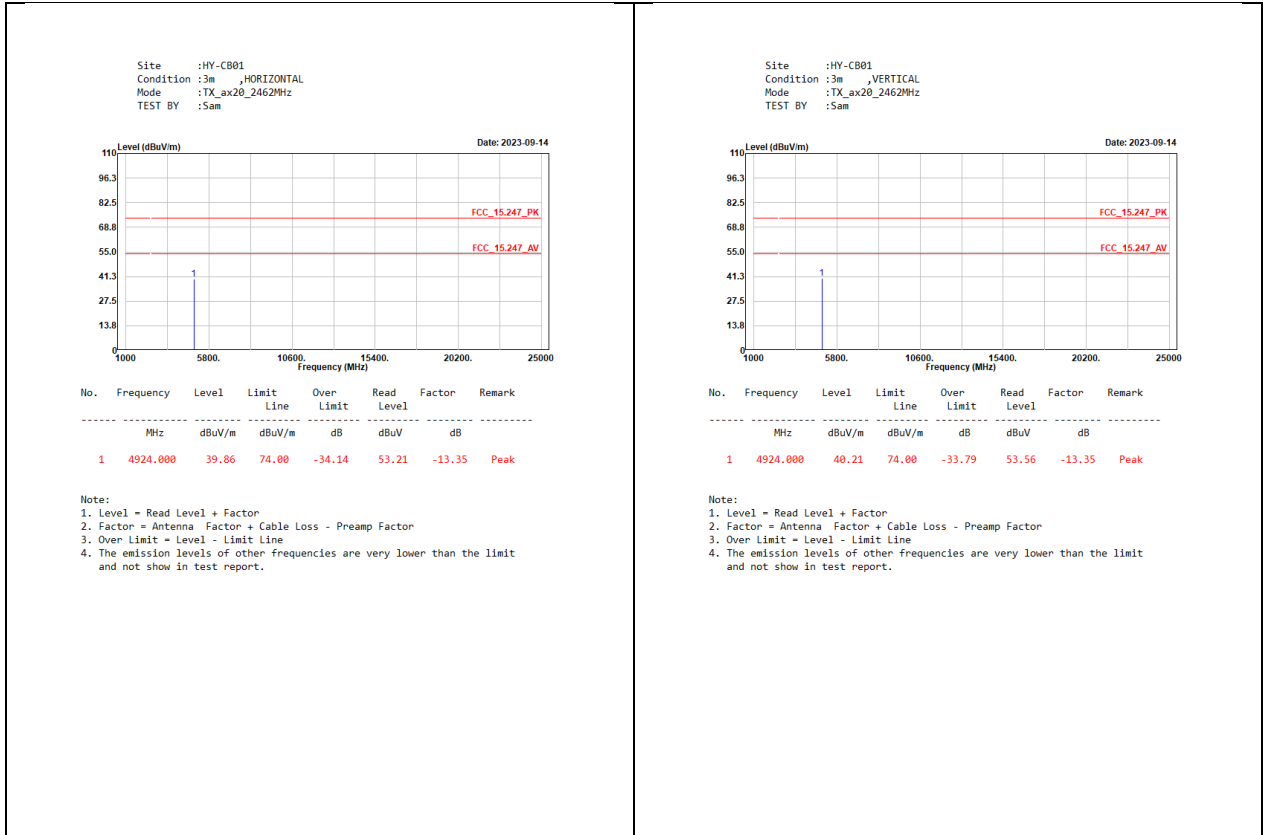

4. Band Edge


4.1. Test Setup

RF Conducted Measurement

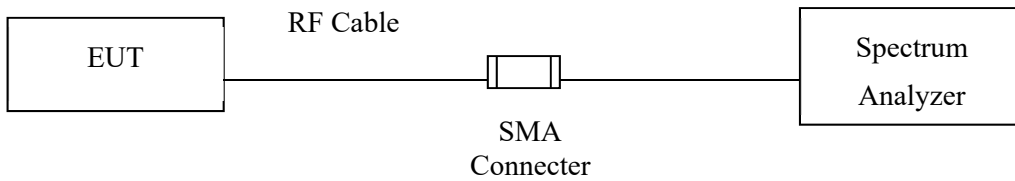

RF Radiated Measurement:

Above 1 GHz

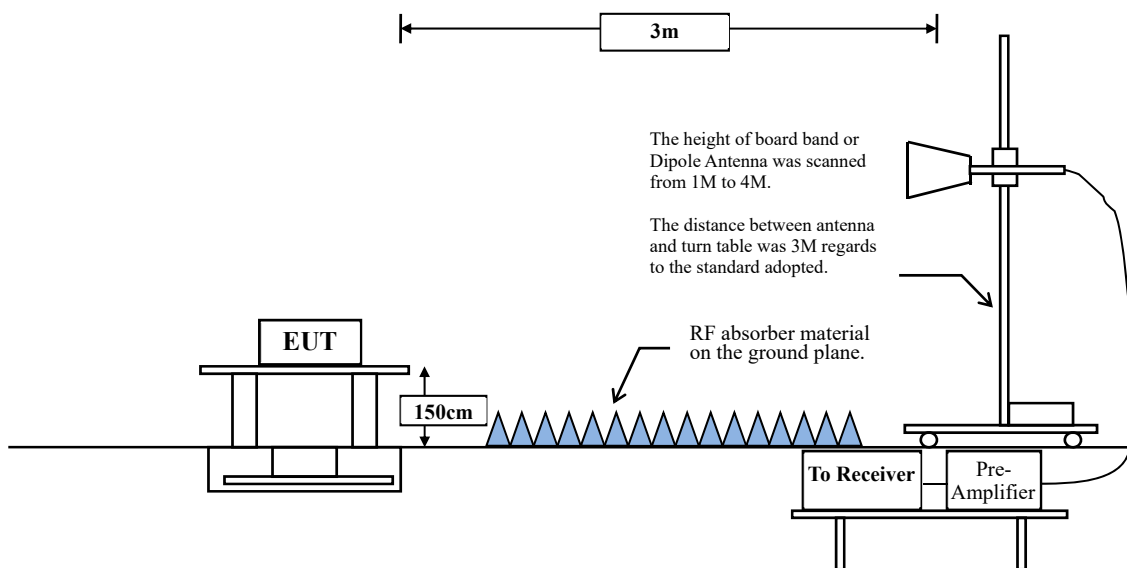

4.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

VBW $\geq 3 \times$ RBW.

Table 1 - RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1 MHz.

VBW = 10 Hz, when duty cycle $\geq 98 \%$





VBW $\geq 1/T$, when duty cycle $< 98 \%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11 ax-20 MHz	99.51	5.4360	184	10


Note: Duty Cycle Refer to Section 5.

4.4. Test Result of Band Edge

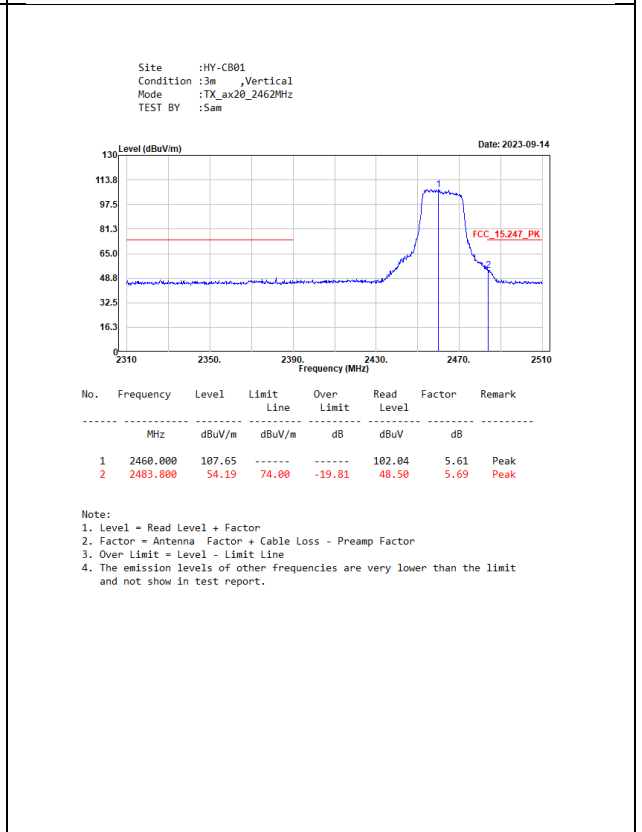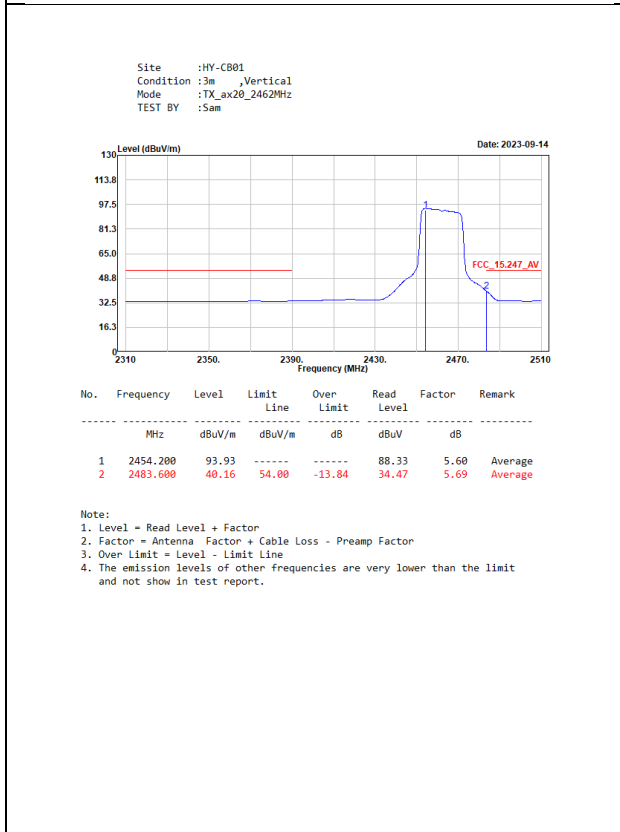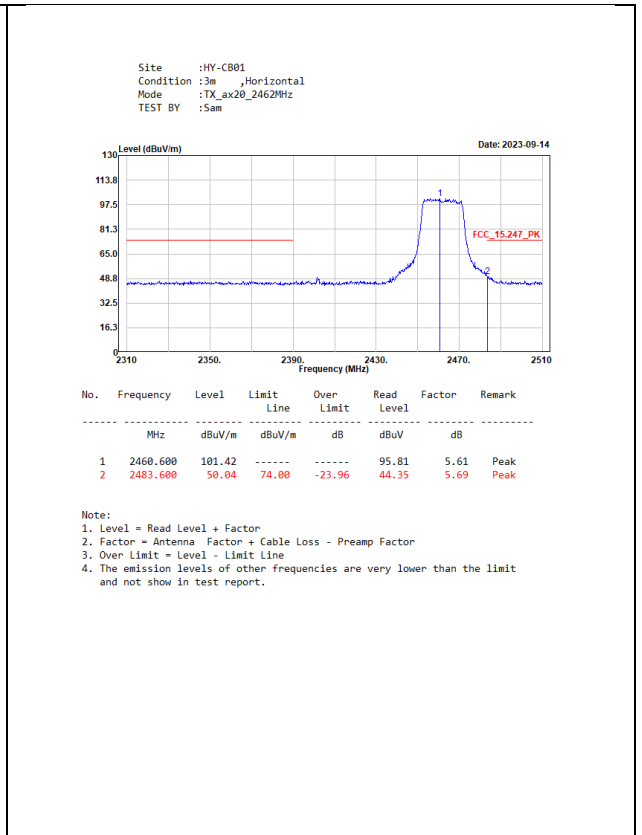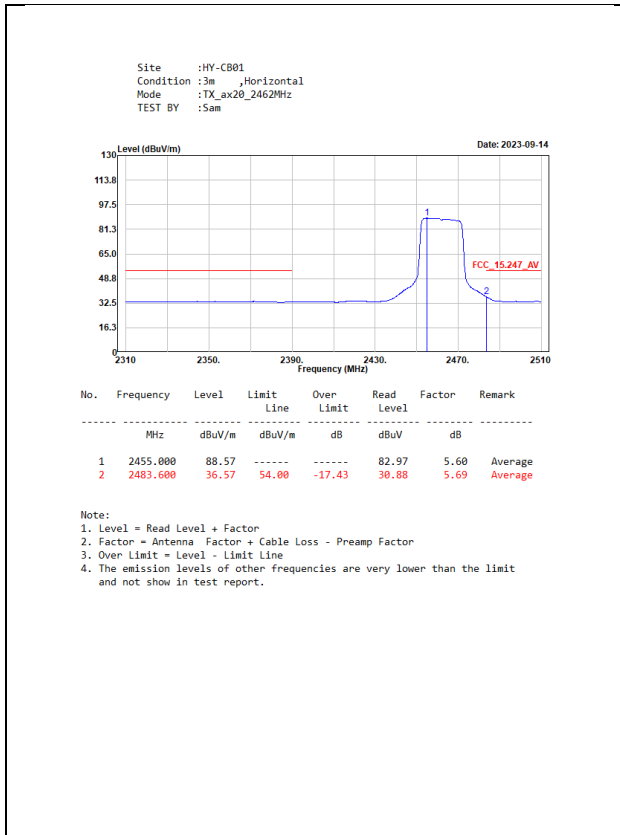

5. Power Density

5.1. Test Setup

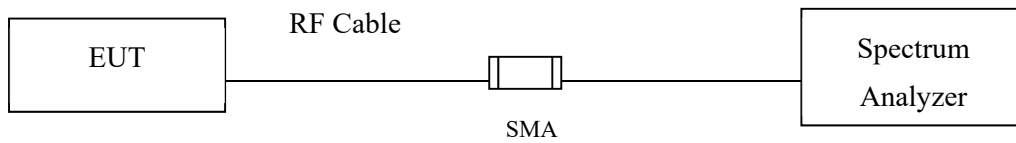

5.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3 kHz bandwidth.

5.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The maximum power spectral density using C63.10 Section 11.10.2 Method PKPSD (peak PSD)


5.4. Test Result of Power Density

Product : TCx EDGE Cam+
 Test Item : Power Density Data
 Test Mode : Transmit (802.11b)-CDD
 Test Date : 2023/10/11

Channel No.	Frequency (MHz)	Chain	PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
01	2412	A	-10.330	-7.320	7.98	Pass
		B	-9.820	-6.810		Pass
06	2437	A	-8.630	-5.620	7.98	Pass
		B	-8.760	-5.750		Pass
11	2462	A	-8.250	-5.240	7.98	Pass
		B	-7.550	-4.540		Pass

Note: The quantity 10*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel 11:

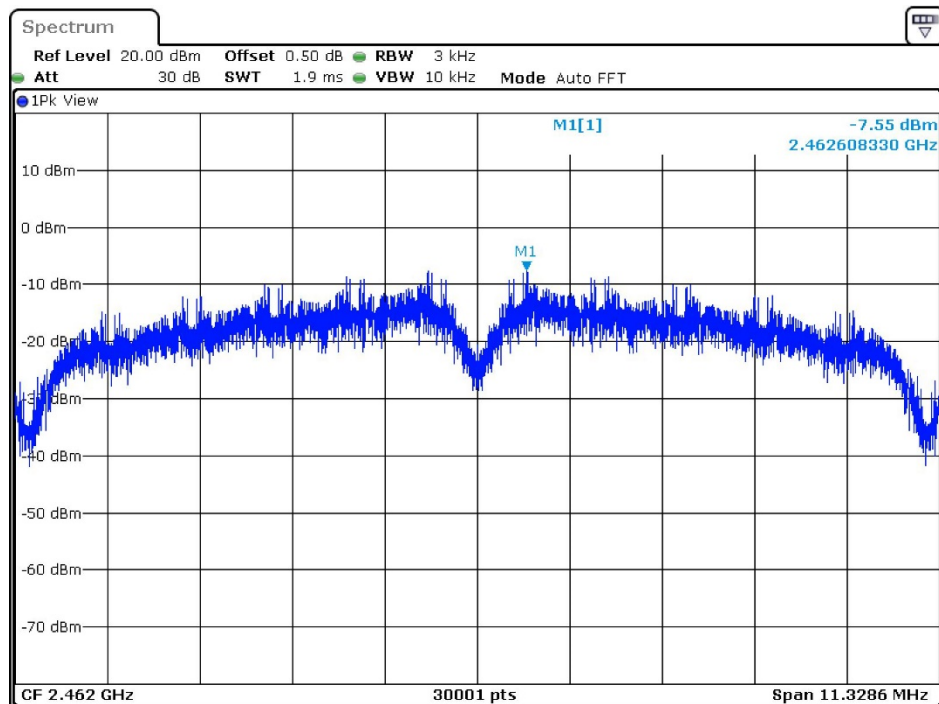


Product : TCx EDGE Cam+
 Test Item : Power Density Data
 Test Mode : Transmit (802.11g)-CDD
 Test Date : 2023/10/11

Channel No.	Frequency (MHz)	Chain	PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
01	2412	A	-11.810	-8.800	7.98	Pass
		B	-12.110	-9.100		Pass
06	2437	A	-11.620	-8.610	7.98	Pass
		B	-10.720	-7.710		Pass
11	2462	A	-11.790	-8.780	7.98	Pass
		B	-10.990	-7.980		Pass

Note: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel 06:

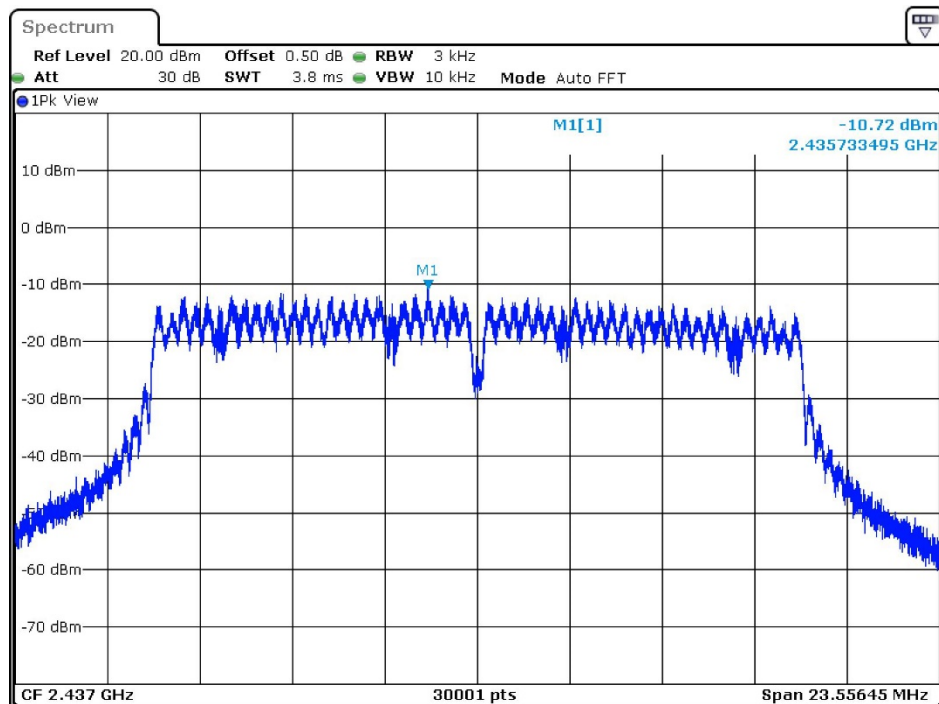


Date: 11.OCT.2023 12:51:07

Product : TCx EDGE Cam+
 Test Item : Power Density Data
 Test Mode : Transmit (802.11ax-20BW)-CDD
 Test Date : 2023/10/11

Channel No.	Frequency (MHz)	Chain	PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
01	2412	A	-14.070	-11.060	7.98	Pass
		B	-14.220	-11.210		Pass
06	2437	A	-14.000	-10.990	7.98	Pass
		B	-13.670	-10.660		Pass
11	2462	A	-14.090	-11.080	7.98	Pass
		B	-14.050	-11.040		Pass

Note: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel 06:

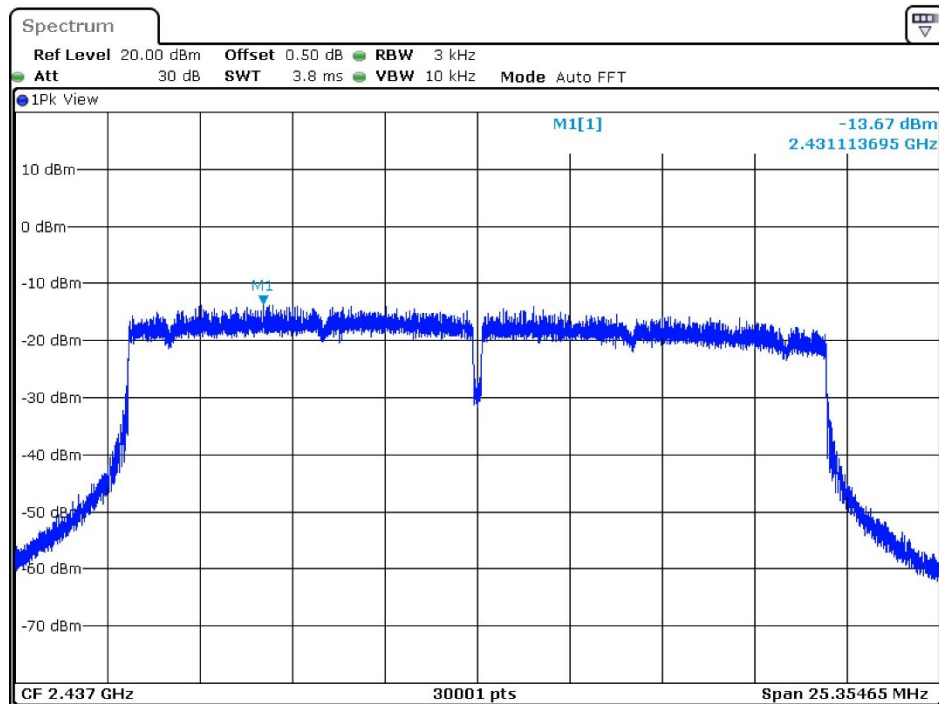


Date: 11.OCT.2023 14:43:04

Product : TCx EDGE Cam+
 Test Item : Power Density Data
 Test Mode : Transmit (802.11ax-40BW)-CDD
 Test Date : 2023/10/11

Channel No.	Frequency (MHz)	Chain	PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
03	2422	A	-15.440	-12.430	7.98	Pass
		B	-15.000	-11.990		Pass
06	2437	A	-16.570	-13.560	7.98	Pass
		B	-14.920	-11.910		Pass
09	2452	A	-17.440	-14.430	7.98	Pass
		B	-16.070	-13.060		Pass


Note: The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel 06:

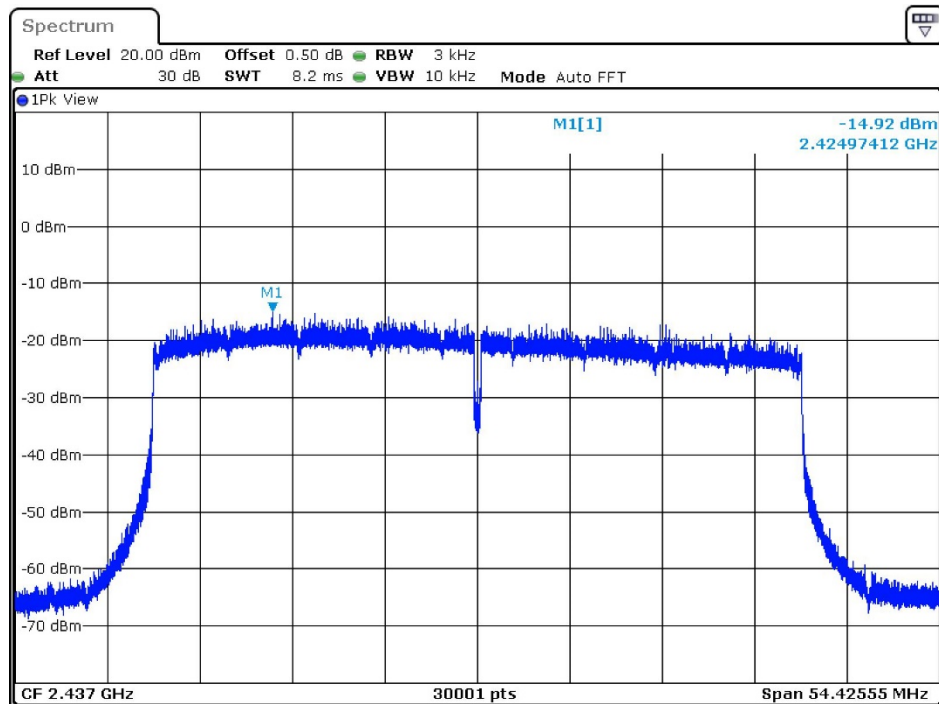

6. Duty Cycle

6.1. Test Setup

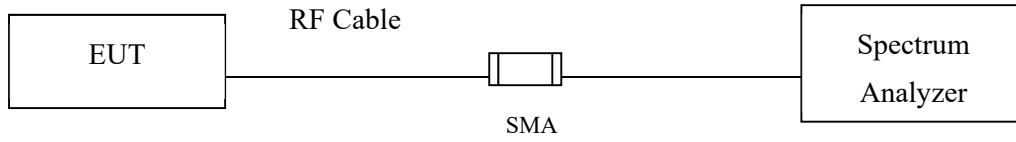

6.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

6.3. Test Result of Duty Cycle

Product : TCx EDGE Cam+
Test Item : Duty Cycle
Test Mode : Transmit

Duty Cycle Formula:

Duty Cycle = $Ton / (Ton + Toff)$

Duty Factor = $10 \text{ Log } (1/\text{Duty Cycle})$

Results:

2.4 GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11 ax-20 MHz	5.4360	5.4630	99.51	0.02