

FCC Test Report

Report No.: AGC03518200601FE04

FCC ID : 2AW4DYGH5244

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Wireless Charging Alarm Clock

BRAND NAME : N/A

MODEL NAME : YGH5244, YGH5231

APPLICANT: Shenzhen YuanGuangHao Electronics Co., Ltd.

DATE OF ISSUE : Aug. 21, 2020

STANDARD(S)


TEST PROCEDURE(S)

: FCC Part 15 Rules

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd








REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	· /	Aug. 21, 2020	Valid	Initial Release



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	7
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	9
7. RADIATED EMISSION	
7.1TEST LIMIT	10
7.2. MEASUREMENT PROCEDURE	
7.3. TEST SETUP	
7.4. TEST RESULT	
8. 20DB BANDWIDTH	16
8.1. MEASUREMENT PROCEDURE	16
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. MEASUREMENT RESULTS	17
9. FCC LINE CONDUCTED EMISSION TEST	18
9.1. LIMITS OF LINE CONDUCTED EMISSION TEST	18
9.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	18
9.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	19
9.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
9.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	22
APPENDIX B: PHOTOGRAPHS OF EUT	24





1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen YuanGuangHao Electronics Co., Ltd.			
Address	No.7, LianYi Street, TangKeng Road, HengGang Town, Shenzhen, P.R.China.			
Manufacturer	Shenzhen YuanGuangHao Electronics Co., Ltd.			
Address	No.7, LianYi Street, TangKeng Road, HengGang Town, Shenzhen, P.R.China.			
Factory	Shenzhen YuanGuangHao Electronics Co., Ltd.			
Address	No.7, LianYi Street, TangKeng Road, HengGang Town, Shenzhen, P.R.China.			
Product Designation	Wireless Charging Alarm Clock			
Brand Name	N/A			
Test Model	YGH5244			
Series Model	YGH5231			
Difference description	All the same except for the model name.			
Date of test	Jul. 21, 2020 to Aug. 20, 2020			
Deviation	No any deviation from the test method			
Condition of Test Sample	Normal			
Test Result	Pass			
Report Template	AGCRT-US-BR/RF			


We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with Section 15.207, 15.209, 15.203 of the FCC Part 15, Subpart C Rules. The results of testing in this report apply to the product/system which was tested only.

> Prepared By Sky Dong Aug. 20, 2020 **Project Engineer** Reviewed By Max Zhang Aug. 21, 2020 Reviewer Approved By Forrest Lei

Authorized Officer Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the g/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter achievable of AGE he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Aug. 21, 2020






2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	110-205 kHz
Test Frequency	145kHz
Maximum field strength	55.92dBuV/m(PK)@3m
Modulation	FSK
Number of channels	1
Antenna Gain	0dBi
Antenna Designation Coil Antenna (Met 15.203 Antenna requirement)	
Hardware Version V1.0	
Software Version V1.0	
Power Supply DC 5V by adapter	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB





4. DESCRIPTION OF TEST MODES

NO.		TEST MODE DESCRIPTION
1		Wireless charging Mode(Full load)
2	0	Wireless charging Mode(half load)
3	9 -6	Wireless charging Mode(Null load)

1. The mode 1 was the worst case and only the data of the worst case record in this report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 8 of 26

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure:



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless Charging Alarm Clock	YGH5244	2AW4DYGH5244	EUT
2	Adapter	K-T100501500U	INPUT:AC 100-240V~50/60Hz 0.25A OUTPUT:DC 5V, 1.5A	AE
3	Wireless Load	N/A	5W	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.209	Radiated Emission	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Compliant



Page 9 of 26

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA			

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 15, 2020	May 14, 2022
LISN	R&S	ESH2-Z5	100086	Aug. 26, 2019	Aug. 25, 2020
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 12, 2019	Dec. 11, 2020
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
ANTENNA	SCHWARZBECK	VULB9168	D69250	Jan. 09, 2019	Jan. 08, 2021
Test software	FARA	EZ_EMC (Ver.RA-03A)	N/A	N/A	N/A



Page 10 of 26

7. RADIATED EMISSION

7.1TEST LIMIT


Standard FCC 15.209

Frequency	Distance	Field	Field Strengths Limit		
(MHz)	Meters	μ V/m	dB(μV)/m		
0.009 ~ 0.490	300	2400/F(kHz)	GY 2G 2		
0.490 ~ 1.705	30	24000/F(kHz)			
1.705 ~ 30	30	30	6		
30 ~ 88	3	100	40.0		
88 ~ 216	3	150	43.5		
216 ~ 960	3	200	46.0		
960 ~ 1000	3	500	54.0		
Above 1000	3	Other:74.0 dB(µV)/m	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)		

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Algorithms and the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





7.2. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




7.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

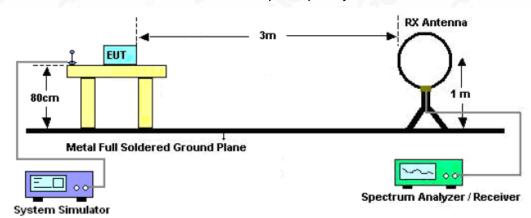

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

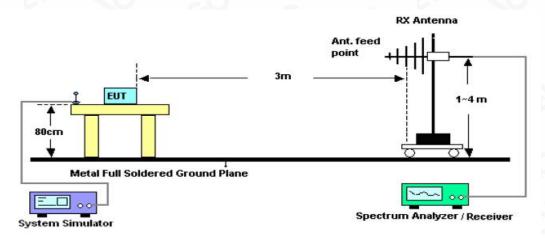

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual



Page 13 of 26

7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

Frequency MHz	Polarization	Reading dB(uV) PK	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) AV	Margin dB	Pass/Fail
0.145	Face	45.52	10.40	55.92	104.38	-48.46	Pass
0.145	Side	35.26	10.40	45.66	104.38	-58.72	Pass

Note1: The result of the lowest internal use/generated frequency to 30MHz is 20dB less than the limit. The peak level of the emission is less than the average limit, so the average level shall be less than the limit without test.

Note 2: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)

Factor(dB/m)=Antenna Factor(dB/m)+Cable loss(dB)+Attenuation(dB)for Attenuator

Margin=Level-Limit


Limit(dBuV/m)=20log(2400/F(kHz))+40log(300/3)=104.38dBuV/m.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Algorithms and the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



RADIATED EMISSION 30MHz-1GHz

EUT:	Wireless Charging Alarm Clock	Model Name. :	YGH5244
Temperature:	20 ℃	Relative Humidtity:	48%
Pressure:	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization:	Horizontal

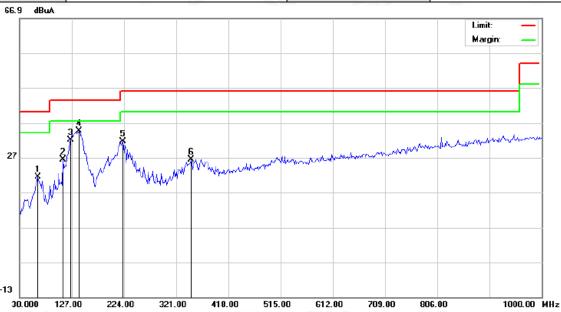


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuA	dB	dBuA	dBuA	dΒ	Detector
1		63.9500	5.03	16.36	21.39	40.00	-18.61	peak
2		110.8333	9.24	17.07	26.31	43.50	-17.19	peak
3		125.3833	13.64	18.31	31.95	43.50	-11.55	peak
4	*	139.9333	15.38	19.23	34.61	43.50	-8.89	peak
5		222.3833	15.91	15.65	31.56	46.00	-14.44	peak
6		348.4833	5.26	21.17	26.43	46.00	-19.57	peak

RESULT: PASS



EUT:	Wireless Charging Alarm Clock	Model Name. :	YGH5244
Temperature:	20 ℃	Relative Humidtity:	48%
Pressure:	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization:	Vertical

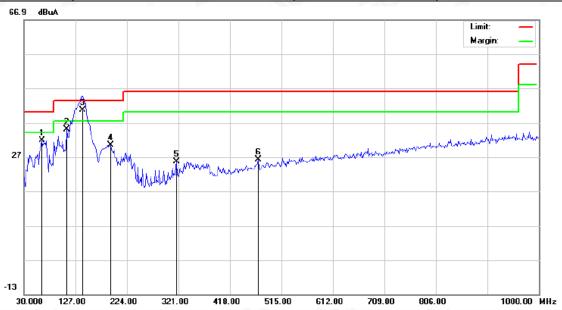

No.	Μk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuA	dB	dBuA	dBuA	d₿	Detector
1		63.9500	15.52	16.36	31.88	40.00	-8.12	peak
2		110.8333	17.86	17.07	34.93	43.50	-8.57	peak
3	*	139.9333	20.30	19.23	39.53	43.50	-3.97	QP
4		193.2833	16.04	14.43	30.47	43.50	-13.03	peak
5		317.7667	5.50	20.09	25.59	46.00	-20.41	peak
6		471.3500	1.81	24.41	26.22	46.00	-19.78	peak

RESULT: PASS

Note:

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.




8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2, Set the EUT Work on operation frequency.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

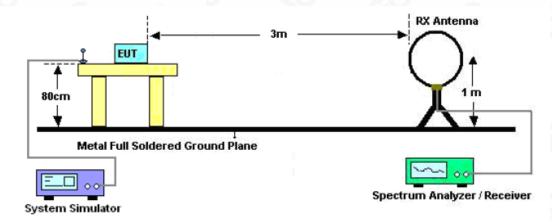



8.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH	10	10°	-6	8	
TEST MODULATION	FSK	8		10	1GC	0

Test Data (Hz)	Criteria	
Operate Channel	844	PASS

TEST PLOT OF BANDWIDTH



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stadiedard restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



9. FCC LINE CONDUCTED EMISSION TEST


9.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage					
Frequency	Q.P.(dBuV)	Average(dBuV)				
150kHz~500kHz	66-56	56-46				
500kHz~5MHz	56	46				
5MHz~30MHz	60	50				


Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

9.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

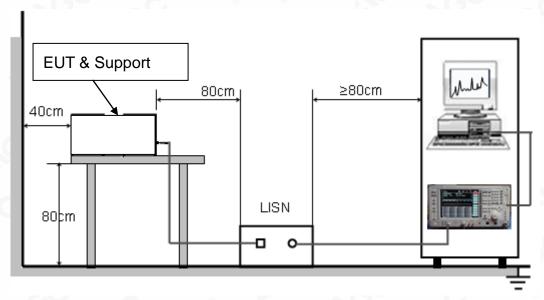

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





9.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN..
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


9.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



9.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

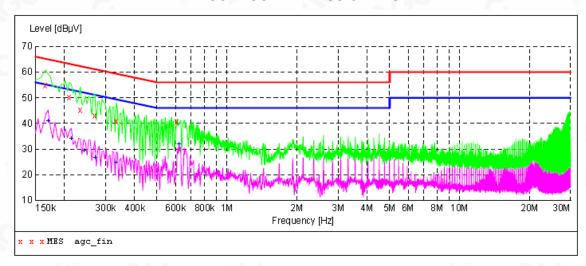

MEASUREMENT RESULT: "agc fin"

2020/8/6 23:29 Limit Frequency Level Transd Margin Detector MHzdΒμV dB dΒμV dΒ 9.3 0.166000 54.70 65 10.5 ь1 GND OP 0.210000 50.30 9.3 63 12.9 QP ь1 GND 0.234000 45.10 9.3 62 17.2 GND QP 0.270000 43.00 9.3 61 18.1 QP ь1 GND 0.334000 40.90 9.3 59 18.5 QP ь1 GND

56

15.4

OP

ь1

GND

9.3

MEASUREMENT RESULT: "agc fin2"

40.60


0.610000

2020/8/6 23:29 Frequency Level Transd Limit Marqin Detector Line PE MHzdΒμV dΒ dΒμV dΒ 0.170000 41.00 9.3 55 ΑV 14.0 Ь1 GND 0.214000 33.90 9.3 19.1 53 GND ΑV T. 1 0.242000 29.20 9.3 52 22.8 GND AV ь1 0.270000 26.70 9.3 51 24.4 ΑV ь1 GND 9.3 0.334000 24.80 49 24.6 ΑV ь1 GND 9.3 46 0.622000 31.70 14.3 AV GND

RESULT: PASS



LINE CONDUCTED EMISSION TEST-N

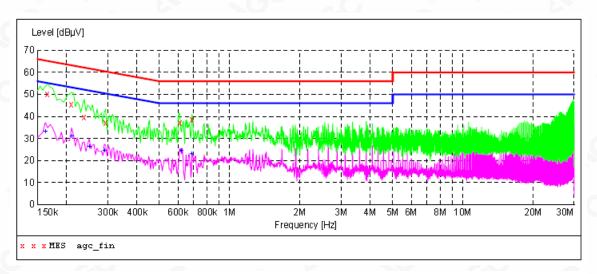

MEASUREMENT RESULT: "agc_fin"

2020/8/6	23:32
----------	-------

2020/0/0 23	. 52						
Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.166000	50.00	9.3	65	15.2	QP	N	GND
0.210000	45.30	9.3	63	17.9	QP	N	GND
0.238000	39.70	9.3	62	22.5	QP	N	GND
0.294000	37.00	9.3	60	23.4	QP	N	GND
0.610000	37.00	9.3	56	19.0	QP	N	GND
0.690000	38.70	9.3	56	17.3	QP	N	GND

MEASUREMENT RESULT: "agc fin2"

2020/8/6 23:32


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.162000	33.10	9.3	55	22.3	AV	N	GND
0.210000	31.00	9.3	53	22.2	AV	N	GND
0.250000	26.30	9.3	52	25.5	AV	N	GND
0.290000	24.30	9.3	51	26.2	AV	N	GND
0.618000	24.50	9.3	46	21.5	AV	N	GND
0.690000	23.00	9.3	46	23.0	AV	N	GND


RESULT: PASS




APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

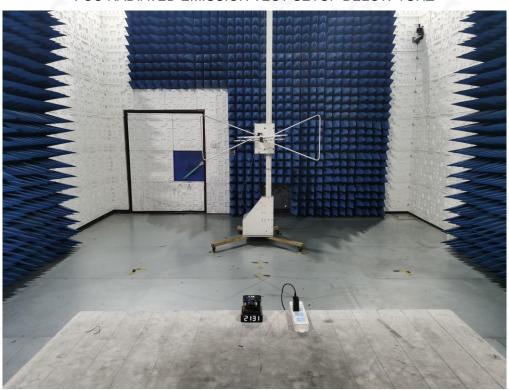


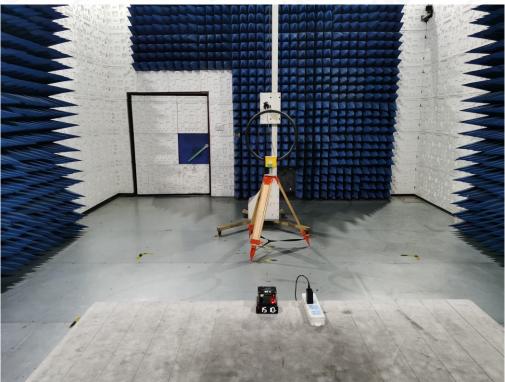






FCC LINE CONDUCTED EMISSION TEST SETUP

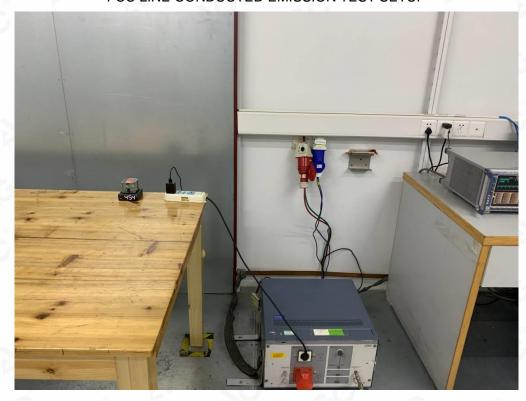



APPENDIX B: PHOTOGRAPHS OF EUT

ALL VIEW OF EUT

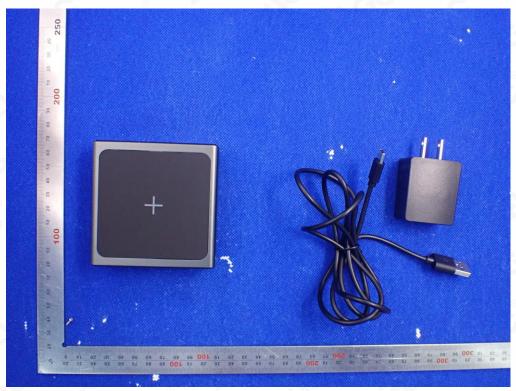


ADAPTER VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TOP VIEW OF EUT

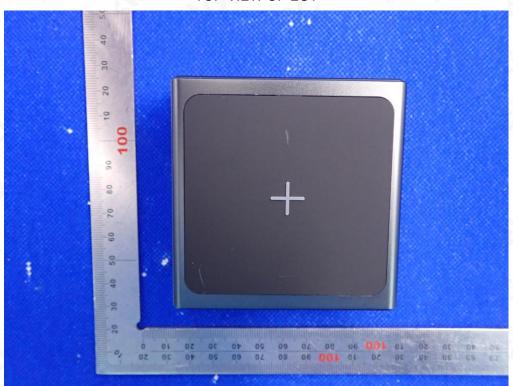


BOTTOM VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



FRONT VIEW OF EUT

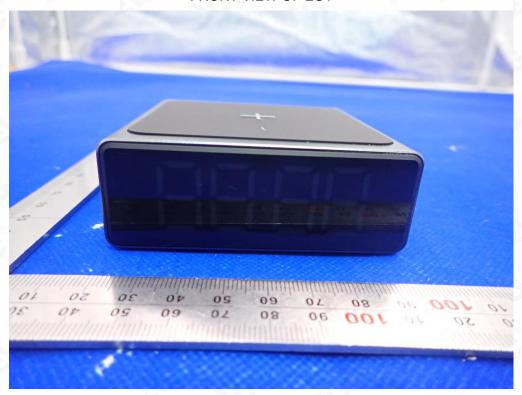


BACK VIEW OF EUT




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condition of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written permitted without the written permitted without the written permitted in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



LEFT VIEW OF EUT

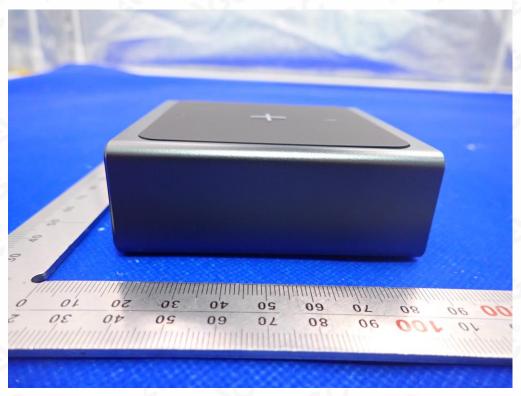

RIGHT VIEW OF EUT

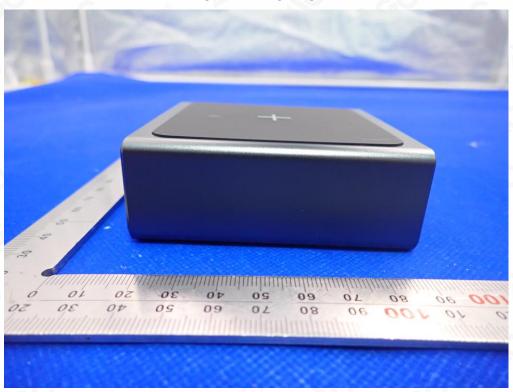


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condition of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written permitted without the written permitted without the written permitted in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



VIEW OF EUT (PORT)




OPEN VIEW OF EUT-1

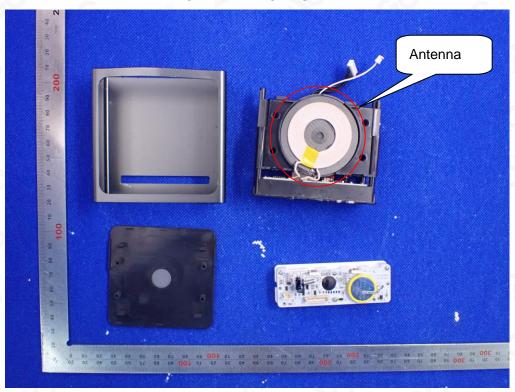


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



INTERNAL VIEW OF EUT-1

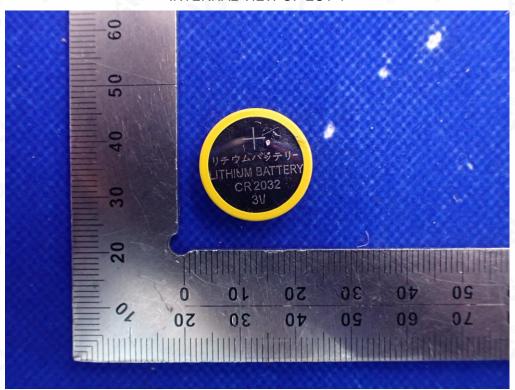

INTERNAL VIEW OF EUT-2

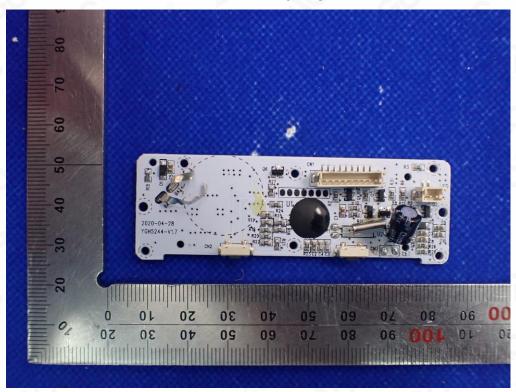


INTERNAL VIEW OF EUT-3


Complian Bedicated Festing/Inspection Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated periodicated periodicat The test results ce of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



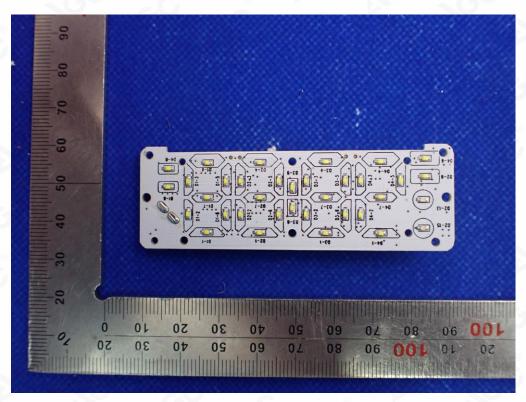


INTERNAL VIEW OF EUT-4

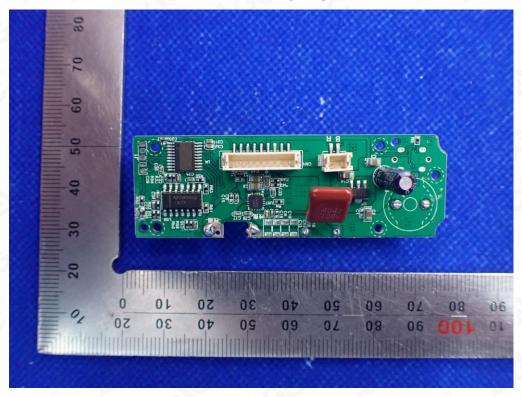




INTERNAL VIEW OF EUT-5

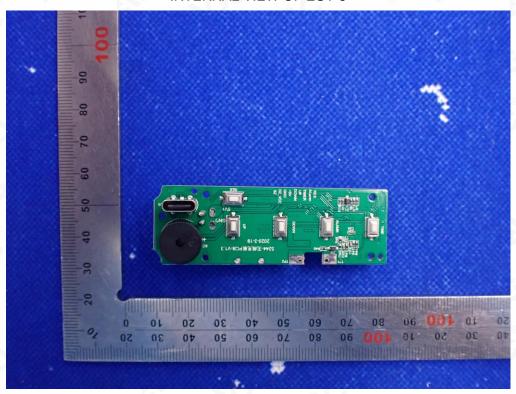

INTERNAL VIEW OF EUT-6

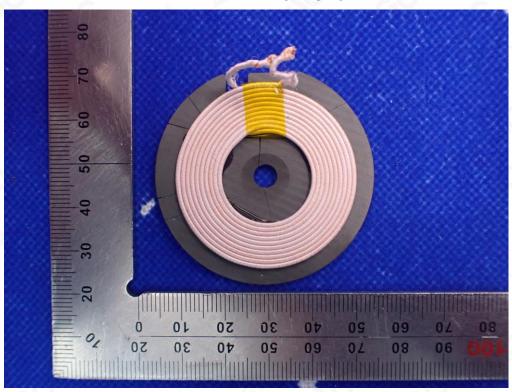

----END OF REPORT----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The non-CMA report issued by AGC is only permitted to be used by the client as internal reference use and shall not be used for public demonstration purpose.
- 5. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 10. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.