







# Radio Test Report

## FCC ID: 2AW68-D222AH

**Report No.** : TBR-C-202208-0271-23  
**Applicant** : Shenzhen SDMC Technology Co., Ltd.  
**Equipment Under Test (EUT)**  
**EUT Name** : D222AH Tri-band Wi-Fi 6E Extender  
**Model No.** : D222AH  
**Series Model No.** : ----  
**Brand Name** : Altice Labs  
**Sample ID** : 202208-0271-2-1#&202208-0271-2-2#  
**Receipt Date** : 2022-09-20  
**Test Date** : 2022-09-21 to 2023-03-08  
**Issue Date** : 2023-03-09  
**Standards** : FCC Part 15 Subpart E 15.407  
**Test Method** : ANSI C63.10: 2013  
KDB 662911 D01 Multiple Transmitter Output v02r01  
KDB 987594 D01 U-NII 6GHz General Requirements v01r02  
KDB 987594 D02 U-NII 6GHz EMC Measurement v01r01  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above.

**Witness Engineer** :   
**Engineer Supervisor** :   
**Engineer Manager** : 



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



# Contents

<b>CONTENTS</b> .....	<b>2</b>
<b>1. GENERAL INFORMATION ABOUT EUT</b> .....	<b>6</b>
1.1 Client Information.....	6
1.2 General Description of EUT (Equipment Under Test) .....	6
1.3 Block Diagram Showing the Configuration of System Tested.....	10
1.4 Description of Support Units .....	10
1.5 Description of Test Mode.....	11
1.6 Description of Test Software Setting .....	12
1.7 Measurement Uncertainty .....	14
1.8 Test Facility.....	14
<b>2. TEST SUMMARY</b> .....	<b>15</b>
<b>3. TEST SOFTWARE</b> .....	<b>15</b>
<b>4. TEST EQUIPMENT</b> .....	<b>16</b>
<b>5. CONDUCTED EMISSION TEST</b> .....	<b>17</b>
5.1 Test Standard and Limit.....	17
5.2 Test Setup.....	17
5.3 Test Procedure.....	17
5.4 Deviation From Test Standard.....	18
5.5 EUT Operating Mode .....	18
5.6 Test Data.....	18
<b>6. RADIATED AND CONDUCTED UNWANTED EMISSIONS</b> .....	<b>19</b>
6.1 Test Standard and Limit.....	19
6.2 Test Setup.....	20
6.3 Test Procedure.....	22
6.4 Deviation From Test Standard.....	23
6.5 EUT Operating Mode .....	23
6.6 Test Data.....	23
<b>7. RESTRICTED BANDS REQUIREMENT</b> .....	<b>24</b>
7.1 Test Standard and Limit.....	24
7.2 Test Setup.....	24
7.3 Test Procedure.....	25
7.4 Deviation From Test Standard.....	25
7.5 EUT Operating Mode .....	25
7.6 Test Data.....	25





<b>8.</b>	<b>BANDWIDTH TEST</b> .....	<b>26</b>
	8.1 Test Standard and Limit.....	26
	8.2 Test Setup.....	26
	8.3 Test Procedure.....	26
	8.4 Deviation From Test Standard.....	27
	8.5 EUT Operating Mode .....	27
	8.6 Test Data.....	27
<b>9.</b>	<b>MAXIMUM E.I.R.P.</b> .....	<b>28</b>
	9.1 Test Standard and Limit.....	28
	9.2 Test Setup.....	28
	9.3 Test Procedure.....	28
	9.4 Deviation From Test Standard.....	28
	9.5 EUT Operating Mode .....	28
	9.6 Test Data.....	28
<b>10.</b>	<b>E.I.R.P. SPECTRAL DENSITY TEST</b> .....	<b>29</b>
	10.1 Test Standard and Limit .....	29
	10.2 Test Setup.....	29
	10.3 Test Procedure.....	30
	10.4 Deviation From Test Standard.....	30
	10.5 Antenna Connected Construction.....	30
	10.6 Test Data.....	30
<b>11.</b>	<b>IN-BAND EMISSION(MASK)</b> .....	<b>31</b>
	11.1 Test Standard and Limit .....	31
	11.2 Test Setup.....	31
	11.3 Test Procedure.....	32
	11.4 Deviation From Test Standard.....	32
	11.5 Antenna Connected Construction.....	32
	11.6 Test Data.....	32
<b>12.</b>	<b>CONTENTION-BASED PROTOCOL</b> .....	<b>33</b>
	12.1 Test Standard and Limit .....	33
	12.2 Test Setup.....	33
	12.3 Test Procedure.....	33
	12.4 Deviation From Test Standard.....	34
	12.5 Antenna Connected Construction.....	34
	12.6 Test Data.....	34
<b>13.</b>	<b>FREQUENCY STABILITY</b> .....	<b>35</b>
	13.1 Test Standard and Limit .....	35
	13.2 Test Setup.....	35





13.3 Test Procedure.....	35
13.4 Deviation From Test Standard.....	36
13.5 Antenna Connected Construction.....	36
13.6 Test Data.....	36
<b>14. OPERATIONAL RESTRICTIONS FOR 6GHZ U-NII DEVICES .....</b>	<b>37</b>
14.1 Test Standard and Limit .....	37
14.2 Deviation From Test Standard.....	37
14.3 Antenna Connected Construction.....	37
14.4 Test Data.....	37
<b>15. ANTENNA REQUIREMENT.....</b>	<b>38</b>
15.1 Test Standard and Limit .....	38
15.2 Deviation From Test Standard.....	38
15.3 Antenna Connected Construction.....	38
15.4 Test Data.....	38
<b>ATTACHMENT A-- CONDUCTED EMISSION TEST DATA .....</b>	<b>39</b>
<b>ATTACHMENT B--UNWANTED EMISSIONS DATA .....</b>	<b>41</b>
<b>ATTACHMENT C--RESTRICTED BANDS REQUIREMENT DATA .....</b>	<b>382</b>
<b>ATTACHMENT D--BANDWIDTH TEST DATA.....</b>	<b>418</b>
<b>ATTACHMENT E--MAXIMUM E.I.R.P. AND E.I.R.P. SPECTRAL DENSITY .....</b>	<b>579</b>
<b>ATTACHMENT F--CONTENTION-BASED PROTOCOL.....</b>	<b>662</b>
<b>ATTACHMENT G--FREQUENCY STABILITY .....</b>	<b>675</b>
<b>ATTACHMENT H-- DUTY CYCLE.....</b>	<b>677</b>









# 1. General Information about EUT

## 1.1 Client Information

<b>Applicant</b>	:	Shenzhen SDMC Technology Co., Ltd.
<b>Address</b>	:	Room 1022, Floor 10, Building A, Customs Building, No. 2, Xin'an 3rd Road, Dalang Community, Xin'an Street, Bao'an District, Shenzhen, China
<b>Manufacturer</b>	:	Shenzhen SDMC Technology Co., Ltd.
<b>Address</b>	:	Room 1022, Floor 10, Building A, Customs Building, No. 2, Xin'an 3rd Road, Dalang Community, Xin'an Street, Bao'an District, Shenzhen, China

## 1.2 General Description of EUT (Equipment Under Test)

<b>EUT Name</b>	:	D222AH Tri-band Wi-Fi 6E Extender			
<b>HVIN/Models No.</b>	:	D222AH			
<b>Model Different</b>	:	N/A			
<b>Product Description</b>	:	Operation Frequency: U-NII-5: 5955MHz~6415MHz, U-NII-6: 6435MHz~6515MHz U-NII-7: 6535MHz~6875MHz, U-NII-8: 6895MHz~7095MHz			
		Antenna Gain:	See antenna information		
		Modulation Type:	802.11a: OFDM (QPSK, BPSK, 16QAM, 64QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)		
		Beamforming Function:	<input checked="" type="checkbox"/> With Beamforming <input type="checkbox"/> Without Beamforming		
		Device Type:	<input checked="" type="checkbox"/> Indoor Access Point	<input type="checkbox"/> Subordinate	
			<input type="checkbox"/> Indoor Client	<input type="checkbox"/> Standard Power	
			<input type="checkbox"/> Dual Client	<input type="checkbox"/> Access Point	
<input type="checkbox"/> Fixed Client	<input type="checkbox"/> Standard Client				
<b>Power Rating</b>	:	AC Adapter (Model: S024-1D120200VU): Input: 100-240V~, 50/60Hz, 0.6A Output: 12.0V~2.0A			
<b>Software Version</b>	:	N/A			
<b>Hardware Version</b>	:	N/A			
<b>Remark:</b>					
(1)The provided by the applicant, the verified for the RF conduction test provided by TOBY test lab. Antenna information provided by the applicant.					
(2)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.					



(3)Channel List:

5955-6415MHz(U-NII-5 band)				
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11a&ax(HE20)	1	5955	49	6195
	5	5975	53	6215
	9	5995	57	6235
	13	6015	61	6255
	17	6035	65	6275
	21	6055	69	6295
	25	6075	73	6315
	29	6095	77	6335
	33	6115	81	6355
	37	6135	85	6375
	41	6155	89	6395
	45	6175	93	6415
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11ax(HE40)	3	5965	51	6205
	11	6005	59	6245
	19	6045	67	6285
	27	6085	75	6325
	35	6125	83	6365
	43	6165	91	6405
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11ax(HE80)	7	5985	55	6225
	23	6065	71	6305
	39	6145	87	6385
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11ax(HE160)	15	6025	79	6345
	47	6185		





6425-6525MHz(U-NII-6 band)				
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11a&ax(HE20)	97	6435	109	6495
	101	6455	113	6515
	105	6475		
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11ax(HE40)	99	6445	*115	6525
	107	6485		
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11ax(HE80)	103	6465	*119	6545
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11ax(HE160)	*111	6505		
<b>*mean this is straddle channel.</b>				

6525-6885MHz(U-NII-7 band)				
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11a&ax(HE20)	117	6535	153	6715
	121	6555	157	6735
	125	6575	161	6755
	129	6595	165	6775
	133	6615	169	6795
	137	6635	173	6815
	141	6655	177	6835
	145	6675	181	6855
	149	6695	*185	6875
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11ax(HE40)	123	6565	163	6765
	131	6605	171	6805
	139	6645	179	6845
	147	6685	*187	6885
	155	6725		
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11ax(HE80)	135	6625	167	6785
	151	6705	*183	6865
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11ax(HE160)	143	6665	*175	6825
<b>*mean this is straddle channel.</b>				





6875-7125MHz(U-NII-8 band)				
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11a&ax(HE20)	189	6895	213	7015
	193	6915	217	7035
	197	6935	221	7055
	201	6955	225	7075
	205	6975	229	7095
	209	6995		
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11ax(HE40)	195	6925	219	7045
	203	6965	227	7085
	211	7005		
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11ax(HE80)	199	6945	215	7025
Bandwidth	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11ax(HE160)	207	6985	/	/


## (4)Antenna Information:

Band	Antenna Gain(dBi)			
	Antenna 1	Antenna 2	Antenna 3	Antenna 4
U-NII-5	4.54	6.16	5.73	4.62
U-NII-6	4.54	6.16	5.73	4.62
U-NII-7	4.54	6.16	5.73	4.62
U-NII-8	4.54	6.16	5.73	4.62
<b>Note:</b>				
<b>For Power:</b>				
<b>Beamforming Mode:</b>				
Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20} + 10^{\text{Chain2}/20} + 10^{\text{Chain3}/20})^2 / 4]$				
CDD Mode use max. antenna Gain				
<b>For PSD:</b>				
<b>CDD/Beamforming Mode:</b>				
Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20} + 10^{\text{Chain2}/20} + 10^{\text{Chain3}/20})^2 / 4]$				





### 1.3 Block Diagram Showing the Configuration of System Tested

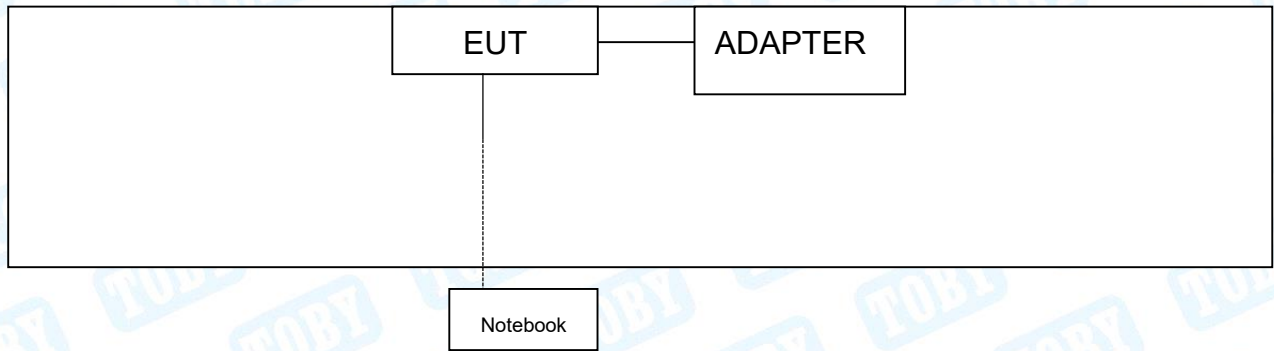

### 1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Used “√”
Notebook	Inspiron 5493	----	DELL	√
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	Yes	NO	1.0M	Accessory





### 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test		
Final Test Mode	Description	
Mode 1	TX ax Mode(6115MHz)	
For Radiated Test Below 1GHz		
Final Test Mode	Description	
Mode 2	TX ax Mode(6115MHz)	
For Radiated Above 1GHz and RF Conducted Test		
Test Band	Final Test Mode	Description
U-NII-5	Mode 3	TX Mode 802.11a Mode Channel 01/45/93
	Mode 4	TX Mode 802.11ax(HE20) Mode Channel 01/45/93
	Mode 5	TX Mode 802.11ax (HE40) Mode Channel 03/43/91
	Mode 6	TX Mode 802.11ax (HE80) Mode Channel 07/39/87
	Mode 7	TX Mode 802.11ax (HE160) Mode Channel 15/47/79
U-NII-6	Mode 8	TX Mode 802.11a Mode Channel 97/105/113
	Mode 9	TX Mode 802.11ax(HE20) Mode Channel 97/105/113
	Mode 10	TX Mode 802.11ax (HE40) Mode Channel 99/107/115
	Mode 11	TX Mode 802.11ax (HE80) Mode Channel 103/119
U-NII-7	Mode 12	TX Mode 802.11ax (HE160) Mode Channel 111
	Mode 13	TX Mode 802.11a Mode Channel 117/149/181/185
	Mode 14	TX Mode 802.11ax(HE20) Mode Channel 117/149/181/185
	Mode 15	TX Mode 802.11ax (HE40) Mode Channel 123/155/178/187
	Mode 16	TX Mode 802.11ax (HE80) Mode Channel 135/151/167/183
U-NII-8	Mode 17	TX Mode 802.11ax (HE160) Mode Channel 143/175
	Mode 18	TX Mode 802.11a Mode Channel 189/209/229
	Mode 19	TX Mode 802.11ax(HE20) Mode Channel 189/209/229
	Mode 20	TX Mode 802.11ax (HE40) Mode Channel 195/211/227
	Mode 21	TX Mode 802.11ax (HE80) Mode Channel 199/215
	Mode 22	TX Mode 802.11ax (HE160) Mode Channel 207

**Note:**

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate. According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:
- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.

Mode	Data Rate
A Mode-CDD	6Mbps
AX(HE20) Mode- BF	HE0NSS4
AX(HE40) Mode- BF	HE0NSS4
AX(HE80) Mode- BF	HE0NSS4
AX(HE160) Mode- BF	HE0NSS4
AX(HE20) Mode-CDD	HE0NSS1
AX(HE40) Mode-CDD	HE0NSS1
AX(HE80) Mode-CDD	HE0NSS1
AX(HE160) Mode-CDD	HE0NSS1

- (3) The EUT is considered a Mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.





## 1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

<b>Test Software: accessMtool</b>			
<b>U-NII-5</b>			
<b>Mode</b>	<b>Frequency(MHz)</b>	<b>Parameters</b>	
		<b>CDD Mode</b>	<b>BF Mode</b>
<b>802.11a</b>	5955	40	/
	6175	40	/
	6415	40	/
<b>802.11ax(HE20)</b>	5955	32	44
	6175	32	48
	6415	32	48
<b>802.11ax(HE40)</b>	5965	56	60
	6165	58	60
	6405	60	60
<b>802.11ax(HE80)</b>	5985	70	74
	6145	72	74
	6385	76	80
<b>802.11ax(HE160)</b>	6025	68	70
	6185	68	70
	6345	72	76
<b>U-NII-6</b>			
<b>Mode</b>	<b>Frequency(MHz)</b>	<b>Parameters</b>	
		<b>CDD Mode</b>	<b>BF Mode</b>
<b>802.11a</b>	6435	44	/
	6475	44	/
	6515	44	/
<b>802.11ax(HE20)</b>	6435	32	48
	6475	32	48
	6515	36	48
<b>802.11ax(HE40)</b>	6445	64	60
	6485	64	60
	6525	64	60
<b>802.11ax(HE80)</b>	6465	80	80
	6545	80	80
<b>802.11ax(HE160)</b>	6505	72	78





U-NII-7			
Mode	Frequency(MHz)	Parameters	
		CDD Mode	BF Mode
802.11a	6535	44	/
	6695	44	/
	6855	44	/
	6875	44	/
802.11ax(HE20)	6535	36	48
	6695	36	48
	6855	36	48
	6875	36	48
802.11ax(HE40)	6565	64	60
	6685	64	60
	6845	64	60
	6885	64	60
802.11ax(HE80)	6625	80	80
	6705	80	80
	6785	80	78
	6865	80	78
802.11ax(HE160)	6665	72	78
	6825	72	78
U-NII-8			
Mode	Frequency(MHz)	Parameters	
		CDD Mode	BF Mode
802.11a	6895	44	/
	6995	44	/
	7095	44	/
802.11ax(HE20)	6895	36	48
	6995	36	48
	7095	36	48
802.11ax(HE40)	6925	64	60
	6965	64	62
	7085	64	62
802.11ax(HE80)	6945	76	78
	7025	76	78
802.11ax(HE160)	6985	72	78





## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty ( $U_{Lab}$ )
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	$\pm 3.50$ dB $\pm 3.10$ dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	$\pm 4.60$ dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	$\pm 4.50$ dB
Radiated Emission	Level Accuracy: Above 1000MHz	$\pm 4.20$ dB
RF Power-Conducted	/	$\pm 0.95$ dB
Power Spectral Density-Conducted	/	$\pm 3$ dB
Occupied Bandwidth	/	$\pm 3.8\%$
Unwanted Emission-Conducted	/	$\pm 2.72$ dB

## 1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

### IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.





## 2. Test Summary

Standard Section	Test Item	Test Sample(s)	Test Mode	Judgment
15.407(b)(8)	Conducted Emission	202208-0271-2-1#	802.11ax BF	PASS
15.407(b)(5)(8)	Radiated Spurious Emission	202208-0271-2-1#	802.11a/ax CDD 802.11ax BF	PASS
15.407(b)(5)(8)	Conducted Spurious Emission	202208-0271-2-2#	802.11ax CDD	PASS
15.407(b)(6)	In-Band Emission(Mask)	202208-0271-2-2#	802.11ax CDD	PASS
15.407(a)(4/5/6/7/8)	Max E.I.R.P.	202208-0271-2-2#	802.11a/ax CDD 802.11ax BF	PASS
15.407(a)(10)	Emission Bandwidth Measurement	202208-0271-2-2#	802.11a/ax CDD	PASS
15.407(a)(4/5/6/7/8)	E.I.R.P Spectral Density	202208-0271-2-2#	802.11a/ax CDD 802.11ax BF	PASS
15.407(d)(6)	Contention-based Protocol	202208-0271-2-2#	/	PASS
15.407(g)	Frequency Stability	202208-0271-2-2#	802.11a/ax CDD	PASS
15.407(d)	Operational restrictions for 6GHz U-NII devices	202208-0271-2-2#	/	PASS
15.203	Antenna Requirement	202208-0271-2-2#	/	PASS
/	On Time and Duty Cycle	202208-0271-2-2#	802.11a/ax CDD 802.11ax BF	/

**Note:** (1) N/A is an abbreviation for Not Applicable.  
(2) Some test items only test the CDD test mode.  
(3) **CDD:** Cyclic Delay Diversity mode; **BF:** Beamforming Mode

## 3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
Radiation Emission	EZ-EMC	EZ	FA-03A2RE+
RF Test System	JS1120-3	Tonscend	V3.2.22





## 4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jun. 23, 2022	Jun. 22, 2023
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jun. 23, 2022	Jun. 22, 2023
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jun. 22, 2022	Jun. 21, 2023
LISN	Rohde & Schwarz	ENV216	101131	Jun. 22, 2022	Jun. 21, 2023
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 01, 2022	Aug. 31, 2023
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
EMI Test Receiver	Rohde & Schwarz	ESU-8	100472/008	Feb. 23, 2023	Feb. 22, 2024
Bilog Antenna	SCHWARZBECK	VULB 9168	1225	Dec. 05, 2021	Dec. 04, 2023
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2463	Feb. 26, 2022	Feb.25, 2024
Horn Antenna	SCHWARZBECK	BBHA 9170	1118	Jun. 26, 2022	Jun.25, 2024
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jun. 26, 2022	Jun.25, 2024
HF Amplifier	Tonscend	TAP9E6343	AP21C806117	Sep. 01, 2022	Aug. 31, 2023
HF Amplifier	Tonscend	TAP051845	AP21C806141	Sep. 01, 2022	Aug. 31, 2023
HF Amplifier	Tonscend	TAP0184050	AP21C806129	Sep. 01, 2022	Aug. 31, 2023
Pre-amplifier	HP	8449B	3008A00849	Feb. 23, 2023	Feb. 22, 2024
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 01, 2022	Aug. 31, 2023
Spectrum Analyzer	KEYSIGT	N9020B	MY60110172	Sep. 01, 2022	Aug. 31, 2023
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 01, 2022	Aug. 31, 2023
Analog Signal Generator	Agilent	N5181A	MY48180463	Sep. 01, 2022	Aug. 31, 2023
Vector Signal Generator	KEYSIGT	N5182B	MY59101429	Sep. 01, 2022	Aug. 31, 2023
Analog Signal Generator	KEYSIGHT	N5173B	MY61252685	Sep. 01, 2022	Aug. 31, 2023
Frequency Extender	KEYSIGHT	N5182BX07	MY59360126	Sep. 01, 2022	Aug. 31, 2023
Power Control Box	Tonsced	JS0806-4ADC	21C8060387	N/A	N/A
RF Control Unit	Tonsced	JS0806-2	21F8060439	Sep. 01, 2022	Aug. 31, 2023
Temperature and Humidity Chamber	ZhengHang	ZH-QTH-1500	ZH2107264	Jun. 22, 2022	Jun. 21, 2023





## 5. Conducted Emission Test

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard

#### FCC Part 15.207


#### 5.1.2 Test Limit

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

#### Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 5.2 Test Setup

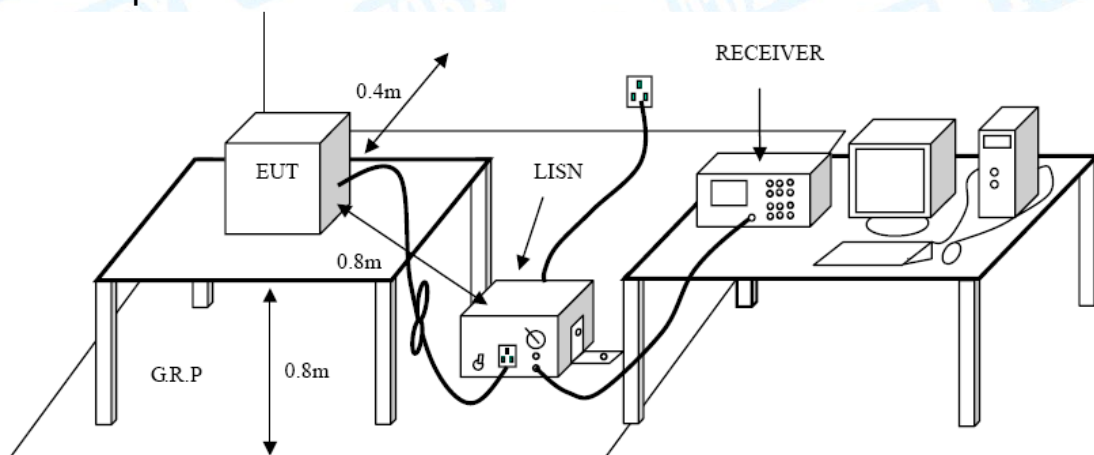

### 5.3 Test Procedure

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- The bandwidth of EMI test receiver is set at 9 kHz, and the test frequency band is from 0.15MHz to 30MHz.





#### 5.4 Deviation From Test Standard

No deviation

#### 5.5 EUT Operating Mode

Please refer to the description of test mode.

#### 5.6 Test Data

Please refer to the Attachment A inside test report.





## 6. Radiated and Conducted Unwanted Emissions

### 6.1 Test Standard and Limit

#### 6.1.1 Test Standard

**FCC Part 15.209 & FCC Part 15.407(b)**

#### 6.1.2 Test Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

General field strength limits at frequencies Below 30MHz		
Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30

**Note:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

General field strength limits at frequencies above 30 MHz		
Frequency (MHz)	Field strength (µV/m at 3 m)	Measurement Distance (meters)
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

General field strength limits at frequencies Above 1000MHz		
Frequency (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54

**Note:**  
 (1) The tighter limit applies at the band edges.  
 (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)

#### Limits of unwanted emission out of the restricted bands

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5925~7125	Peak: -7	88.2
	AVG: -27	68.2

**NOTE:**

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts)}$$

For above 1000MHz  $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2$ , for  $d=3$

**Note:** For above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.






Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--

## 6.2 Test Setup


### Radiated measurement

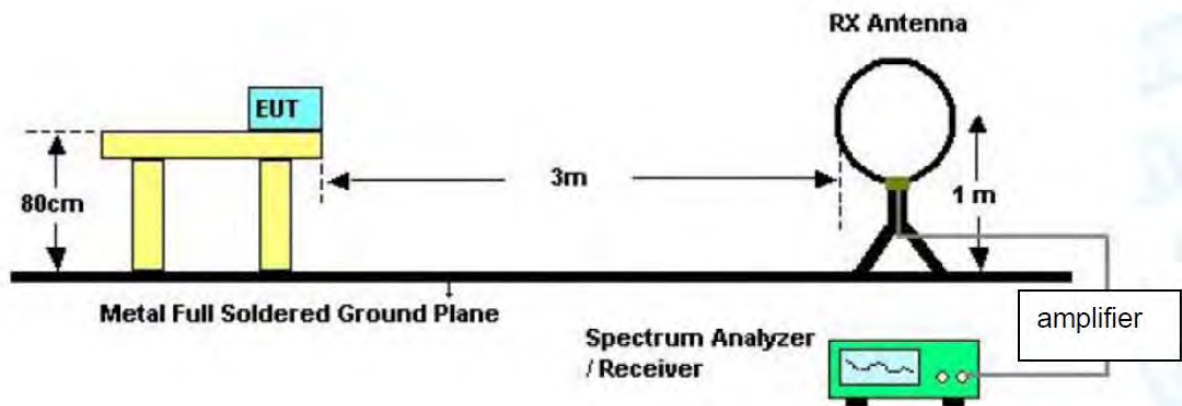


### Below 30MHz Test Setup






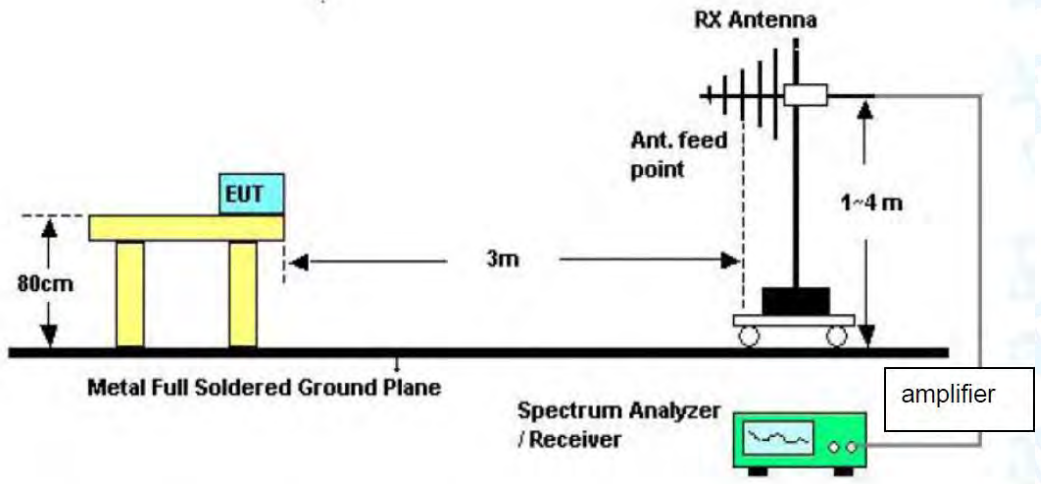

**Below 1000MHz Test Setup**

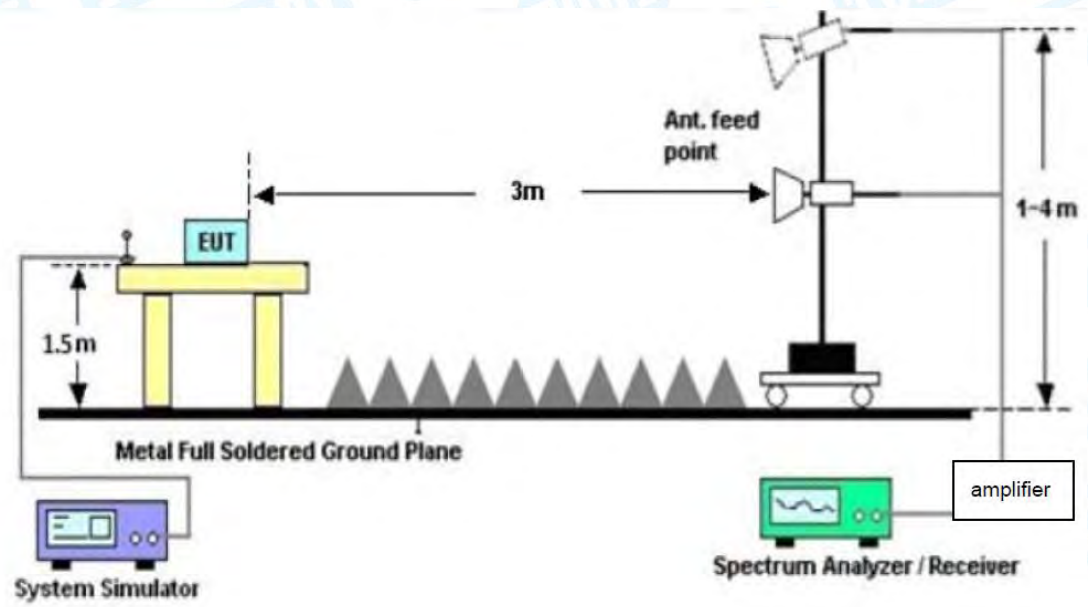

**Above 1GHz Test Setup  
Conducted measurement**

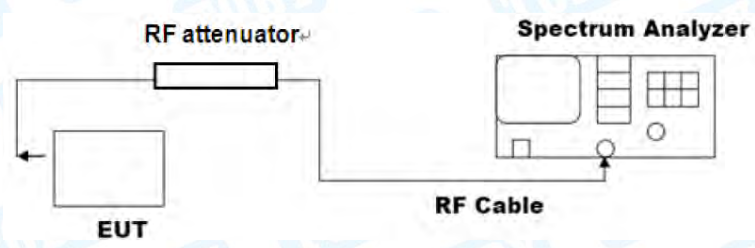



### 6.3 Test Procedure

#### ---Radiated measurement

● The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.

● Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.

● The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.

● The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

● If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.

● Testing frequency range 30MHz-1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection. Testing frequency range 9KHz-150Hz the measuring instrument use VBW=200Hz with Quasi-peak detection. Testing frequency range 9KHz-30MHz the measuring instrument use VBW=9kHz with Quasi-peak detection.

● Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

● For the actual test configuration, please see the test setup photo.

#### --- Conducted measurement

##### ● Reference level measurement

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to  $\geq 1.5$  times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.





Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

#### ● Emission level measurement

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \cdot \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

#### 6.4 Deviation From Test Standard

No deviation

#### 6.5 EUT Operating Mode

Please refer to the description of test mode.

#### 6.6 Test Data

Radiated measurement please refer to the Attachment B inside test report.

Conducted measurement please refer to the Attachment B.





## 7. Restricted Bands Requirement

### 7.1 Test Standard and Limit

#### 7.1.1 Test Standard

#### FCC Part 15.205 & FCC Part 15.407(b)(5)

#### 7.1.2 Test Limit

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5925~7125	Peak: -7	88.2
	AVG: -27	68.2

**NOTE:**


The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts)}$$


**Note:** For above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

### 7.2 Test Setup

#### Radiated measurement

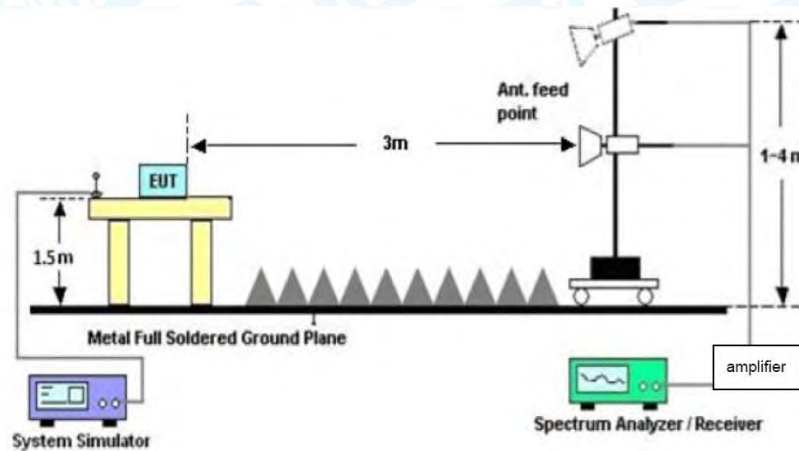

#### Conducted measurement

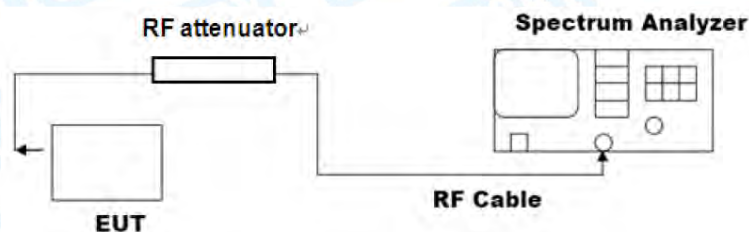



### 7.3 Test Procedure

#### ---Radiated measurement

● Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.

● The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.

● The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

● The Peak Value and average value both need to comply with applicable limit above 1 GHz.

● Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

● For the actual test configuration, please see the test setup photo.

#### --- Conducted measurement

a) Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 11.12.2.3 through 11.12.2.5 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP (see 11.12.2.6 for guidance on determining the applicable antenna gain).

c) Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies

≤30 MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies > 1000 MHz).

d) For MIMO devices, measure the power of each chain and sum the EIRP of all chains in linear terms (i.e., watts and mW).

e) Convert the resultant EIRP to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log d + 104.8$$

where

$E$  is the electric field strength in dBuV/m

EIRP is the equivalent isotropically radiated power in dBm

$d$  is the specified measurement distance in m

f) Compare the resultant electric field strength level with the applicable regulatory limit.

g) Perform the radiated spurious emission test.

### 7.4 Deviation From Test Standard

No deviation

### 7.5 EUT Operating Mode

Please refer to the description of test mode.

### 7.6 Test Data

Please refer to the Attachment C.





## 8. Bandwidth Test

### 8.1 Test Standard and Limit


#### 8.1.1 Test Standard

##### **FCC Part 15.407(a)(10)**

#### 8.1.2 Test Limit

The maximum transmitter channel bandwidth for U–NII devices in the 5.925–7.125 GHz band is 320 MHz.

### 8.2 Test Setup

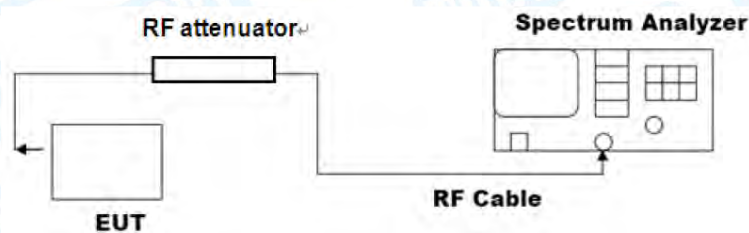

### 8.3 Test Procedure

#### ---Emission bandwidth

● The procedure for this method is as follows:

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

NOTE—The automatic bandwidth measurement capability of a spectrum analyzer or an EMI receiver may be employed if it implements the functionality described in the preceding items.





**---DTS bandwidth**

● The steps for the first option are as follows:

- a) Set RBW = 100 kHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**---occupied bandwidth**

● The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

**8.4 Deviation From Test Standard**

No deviation

**8.5 EUT Operating Mode**

Please refer to the description of test mode.

**8.6 Test Data**

Please refer to the Attachment D.





## 9. Maximum E.I.R.P.

### 9.1 Test Standard and Limit


#### 9.1.1 Test Standard

#### FCC Part 15.407(a)

#### 9.1.2 Test Limit

FCC Part 15 Subpart E(15.407) Limit			
Frequency	Device Type	e.i.r.p. spectral density	e.i.r.p.
5925-7125MHz	indoor access point	not exceed 5dBm/MHz	not exceed 30dBm
	subordinate device operating under the control of an indoor access point	not exceed -1dBm/MHz	not exceed 24dBm
5925–6425MHz and 6525–6875 MHz	client devices, except for fixed client devices	not exceed 17dBm/MHz	not exceed 30dBm; no more than 6 dB below its associated standard power
5925-7125MHz	client devices operating under the control of an indoor access point	not exceed -1dBm/MHz	not exceed 24dBm

### 9.2 Test Setup

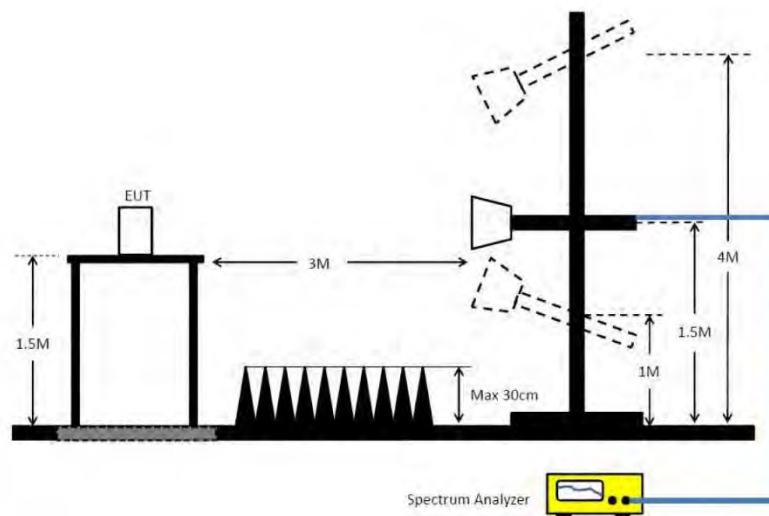

### 9.3 Test Procedure

- For radiated measurement. Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.

### 9.4 Deviation From Test Standard

No deviation

### 9.5 EUT Operating Mode

Please refer to the description of test mode.

### 9.6 Test Data

Please refer to the Attachment E.









### 10.3 Test Procedure

● Notwithstanding that some regulatory requirements refer to peak power spectral density (PPSD), in some cases the intent is to measure the maximum value of the time average of the power spectral density during a period of continuous transmission. The procedure for this method is as follows:

- a) Create an average power spectrum for the EUT operating mode being tested by following the instructions in 12.3.2 for measuring maximum conducted output power using a spectrum analyzer or EMI receiver; that is, select the appropriate test method (SA-1, SA-2, SA-3, or their respective alternatives) and apply it up to, but not including, the step labeled, "Compute power..." (This procedure is required even if the maximum conducted output power measurement was performed using the power meter method PM.)
- b) Use the peak search function on the instrument to find the peak of the spectrum.
- c) Make the following adjustments to the peak value of the spectrum, if applicable:
  - 1) If method SA-2 or SA-2A was used, then add  $[10 \log (1 / D)]$ , where D is the duty cycle, to the peak of the spectrum.
  - 2) If method SA-3A was used and the linear mode was used in step h) of 12.3.2.7, add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- d) The result is the PPSD.
- e) The procedure in item a) through item c) requires the use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified by some regulatory authorities.<sup>95</sup> This requirement also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth, the following adjustments to the procedures apply:
  - 1) Set  $RBW \geq 1 / T$ , where T is defined in 12.2 a).
  - 2) Set  $VBW \geq [3 * RBW]$ .
  - 3) Care shall be taken such that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.For radiated measurement. Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.

### 10.4 Deviation From Test Standard

No deviation

### 10.5 Antenna Connected Construction

Please refer to the description of test mode.

### 10.6 Test Data

Please refer to the Attachment E.





# 11. In-Band Emission(Mask)

## 11.1 Test Standard and Limit

### 11.1.1 Test Standard

**FCC Part 15.407(b)(6)**

### 11.1.2 Test Limit

Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center.

At frequencies between one megahertz outside an unlicensed device’s channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and onehalf times an unlicensed device’s channel bandwidth, the limits must be linearly interpolated between 28 dB and 40dB suppression.

Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.


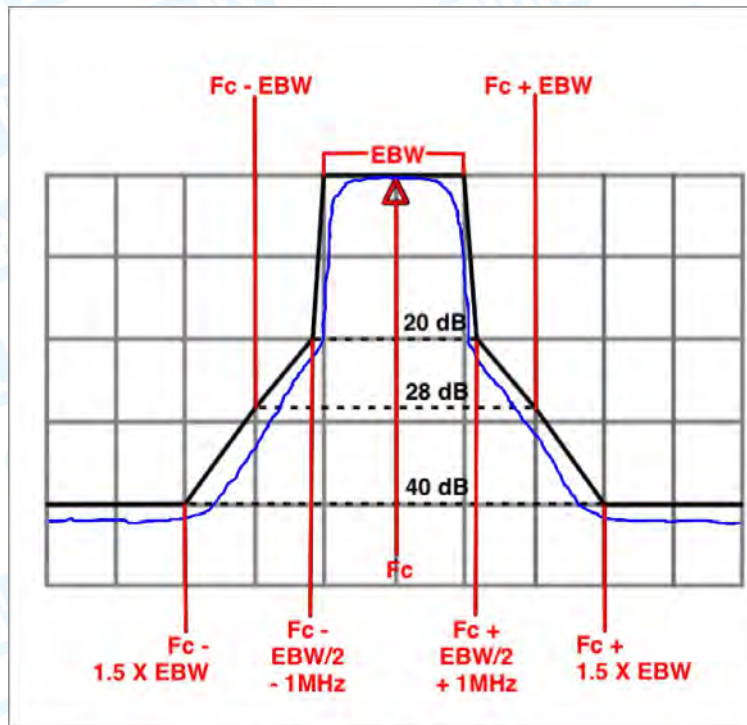


Figure 5. Generic Emission Mask

## 11.2 Test Setup



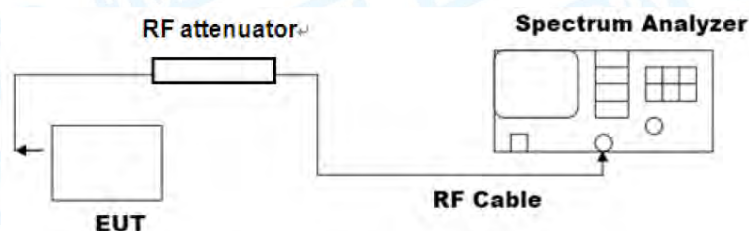

### 11.3 Test Procedure

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
  - a) Set the span to encompass the entire 26 dB EBW of the signal.
  - b) Set RBW = same RBW used for 26 dB EBW measurement.
  - c) Set VBW  $\geq 3 \times$  RBW
  - d) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
  - e) Sweep time = auto.
  - f) Detector = RMS (i.e., power averaging)
  - g) Trace average at least 100 traces in power averaging (rms) mode.
  - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
  - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
  - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
  - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

### 11.4 Deviation From Test Standard

No deviation

### 11.5 Antenna Connected Construction

Please refer to the description of test mode.

### 11.6 Test Data

Please refer to the Attachment G.





## 12. Contention-based Protocol

### 12.1 Test Standard and Limit

#### 12.1.1 Test Standard

##### FCC Part 15.407(d)(6)

#### 12.1.2 Test Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.

### 12.2 Test Setup

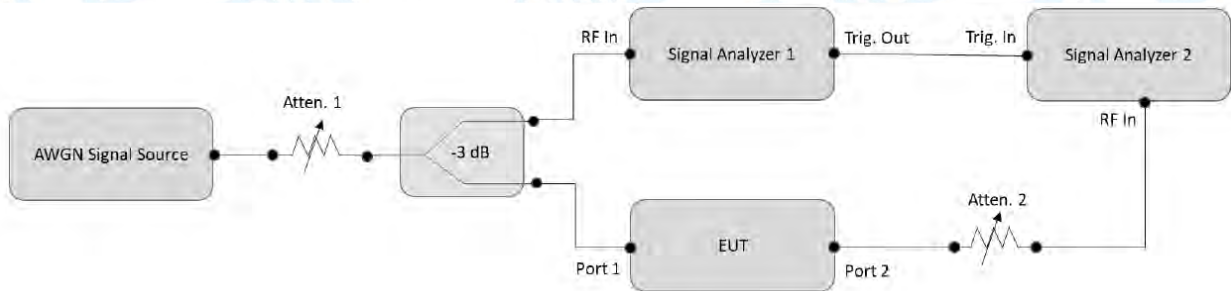


Figure 2. Contention-based protocol test setup, conducted method Step-by-Step Procedure, Conducted Setup

### 12.3 Test Procedure

To ensure the EUT is capable of detecting co-channel energy, the first step is to configure the EUT to transmit with a constant duty cycle. To simulate an incumbent signal, a signal generator (or similar source) that is capable of generating band-limited additive white Gaussian noise (AWGN) is required. Depending on the EUT antenna configuration, the AWGN signal can be provided to the EUT receiver via a conducted method (Figure 2) or a radiated method (Figure 3). Figure 2 shows the conducted test setup where a band-limited AWGN signal is generated at a very low power level and injected into the EUT's antenna port. The AWGN signal power level is then incrementally increased while the EUT transmission is monitored on a signal analyzer 2 to verify if the EUT can sense the AWGN signal and can subsequently cease its transmission. A triggered measurement, as shown in Figure 2, is optional, and assists with determining the time it takes the EUT to cease transmission (or vacate the channel) upon detecting RF energy. If the EUT has only one antenna port, then an AWGN signal source can be connected to the same antenna port.

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the





EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.

9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.

10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

## 12.4 Deviation From Test Standard

No deviation

## 12.5 Antenna Connected Construction

Please refer to the description of test mode.

## 12.6 Test Data

Please refer to the Attachment F.





## 13. Frequency Stability

### 13.1 Test Standard and Limit


#### 13.1.1 Test Standard

#### **FCC Part 15.407(g)**

#### 13.1.2 Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

### 13.2 Test Setup

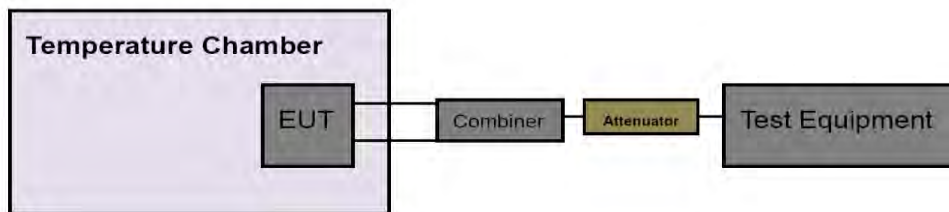

### 13.3 Test Procedure

#### **Frequency stability with respect to ambient temperature**

a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.

b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.

e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.

f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

g) Measure the frequency at each of frequencies specified in 5.6.

h) Switch OFF the EUT but do not switch OFF the oscillator heater.

i) Lower the chamber temperature by not more than 10°C, and allow the temperature inside the chamber to stabilize.

j) Repeat step f) through step i) down to the lowest specified temperature.





#### Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15°C to +25°C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

c) Measure the frequency at each of the frequencies specified in 5.6.

d) Repeat the above procedure at 85% and 115% of the nominal supply voltage as described in 5.13.

### 13.4 Deviation From Test Standard

No deviation

### 13.5 Antenna Connected Construction

Please refer to the description of test mode.

### 13.6 Test Data

Please refer to the Attachment G.





## 14. Operational restrictions for 6GHz U-NII devices

### 14.1 Test Standard and Limit

#### 14.1.1 Test Standard

##### **FCC Part 15.407(d)**

#### 14.1.2 Test Limit

##### **For FCC:**

(1) Operation of indoor access points / subordinate modes in the 5.925-7.125 GHz band is prohibited on oil platforms, cars, trains, boats, and aircraft, except that indoor access points / subordinate modes are permitted to operate in the 5.925-6.425 GHz bands in large aircraft while flying above 10,000 feet.

(2) Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.

(3) Transmitters operating under indoor access point / subordinate modes is limited to indoor locations.

(4) In the 5.925-7.125 GHz band, indoor access points / subordinate modes must bear the following statement in a conspicuous location on the device and in the user's manual: FCC regulations restrict operation of this device to indoor use only. The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.

(5) In the 5.925-7.125 GHz band, Access points may connect to other access points or subordinate devices.

(6) Indoor access points / subordinate modes operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

### 14.2 Deviation From Test Standard

No deviation

### 14.3 Antenna Connected Construction

Please refer to the description of test mode.

### 14.4 Test Data

Device is an indoor access point, / subordinate modes all restrictions are meet the FCC 15.407 (d).





## 15. Antenna Requirement

### 15.1 Test Standard and Limit

#### 15.1.1 Test Standard

##### **FCC Part 15.203**

#### 15.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.2 Deviation From Test Standard

No deviation

### 15.3 Antenna Connected Construction

The gains of the antenna used for transmitting is Ant.1: 4.54dBi, Ant.2: 6.16dBi, Ant.3: 5.73dBi, Ant.4: 4.62dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

### 15.4 Test Data

The EUT antenna is a PCB Antenna. It complies with the standard requirement.


<b>Antenna Type</b>
<input type="checkbox"/> Permanent attached antenna
<input checked="" type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna





## Attachment A-- Conducted Emission Test Data

<b>Temperature:</b>	23.4°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 120V 60Hz		
<b>Terminal:</b>	Line		
<b>Test Mode:</b>	Mode 1		
<b>Remark:</b>	Only worse case is reported.		

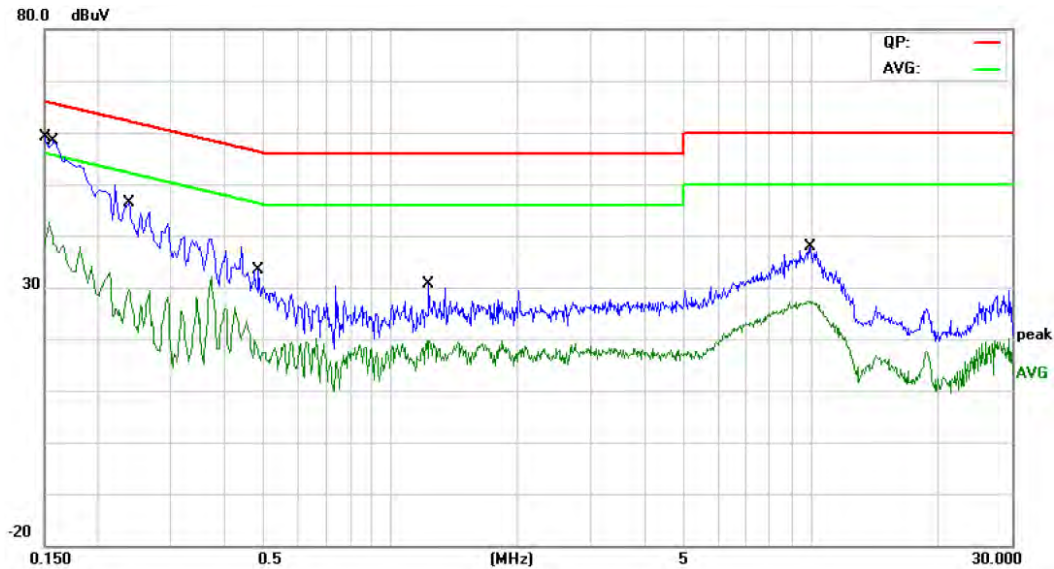

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1500	43.83	11.11	54.94	65.99	-11.05	QP
2		0.1500	26.65	11.11	37.76	55.99	-18.23	AVG
3	*	0.1580	44.74	11.09	55.83	65.56	-9.73	QP
4		0.1580	28.99	11.09	40.08	55.56	-15.48	AVG
5		0.2380	33.10	10.94	44.04	62.16	-18.12	QP
6		0.2380	18.90	10.94	29.84	52.16	-22.32	AVG
7		0.4860	12.28	10.93	23.21	56.24	-33.03	QP
8		0.4860	4.32	10.93	15.25	46.24	-30.99	AVG
9		1.2340	11.78	10.64	22.42	56.00	-33.58	QP
10		1.2340	7.36	10.64	18.00	46.00	-28.00	AVG
11		9.9540	21.08	10.14	31.22	60.00	-28.78	QP
12		9.9540	16.48	10.14	26.62	50.00	-23.38	AVG


**Remark:**

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)





<b>Temperature:</b>	23.4°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 120V 60Hz		
<b>Terminal:</b>	Neutral		
<b>Test Mode:</b>	Mode 1		
<b>Remark:</b>	Only worse case is reported.		

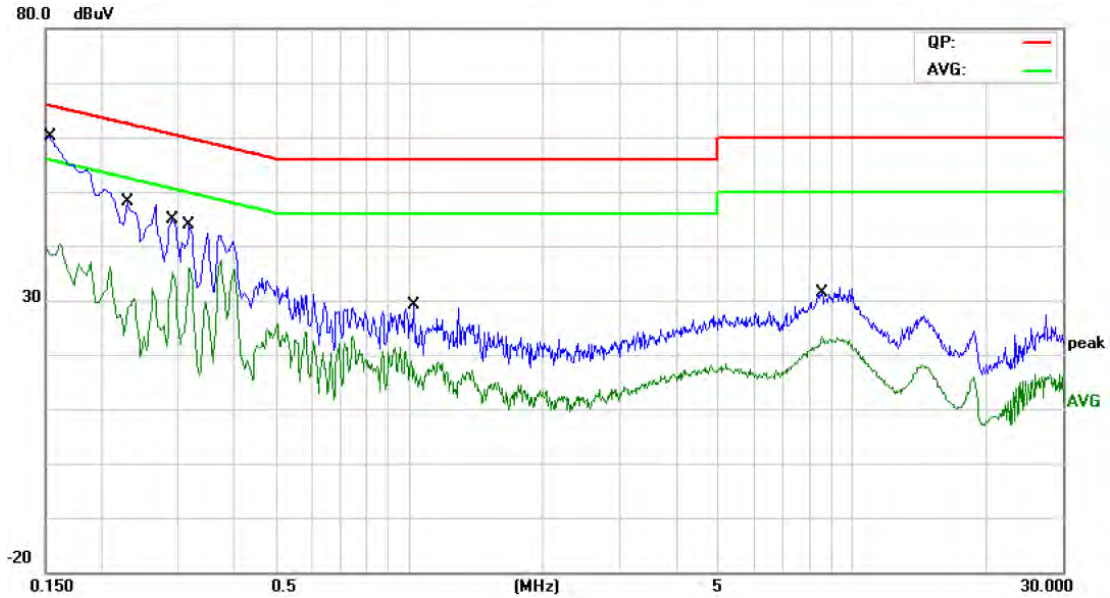

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	44.29	11.10	55.39	65.78	-10.39	QP
2		0.1539	28.48	11.10	39.58	55.78	-16.20	AVG
3		0.2300	30.86	10.96	41.82	62.45	-20.63	QP
4		0.2300	15.19	10.96	26.15	52.45	-26.30	AVG
5		0.2909	31.77	10.86	42.63	60.50	-17.87	QP
6		0.2909	23.37	10.86	34.23	50.50	-16.27	AVG
7		0.3180	31.01	10.87	41.88	59.76	-17.88	QP
8		0.3180	24.12	10.87	34.99	49.76	-14.77	AVG
9		1.0220	9.97	10.68	20.65	56.00	-35.35	QP
10		1.0220	3.80	10.68	14.48	46.00	-31.52	AVG
11		8.5580	15.59	10.09	25.68	60.00	-34.32	QP
12		8.5580	11.12	10.09	21.21	50.00	-28.79	AVG

**Remark:**

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)





## Attachment B--Unwanted Emissions Data

### ---Radiated Unwanted Emissions

#### 9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB  
Below the permissible value has no need to be reported.

#### 30MHz~1GHz

<b>Temperature:</b>	24.3℃	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 120V 60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	Mode 2		
<b>Remark:</b>	Only worse case is reported.		



No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	133.6188	43.33	-22.44	20.89	43.50	-22.61	QP	P
2	208.5803	47.41	-23.80	23.61	43.50	-19.89	QP	P
3	241.6763	48.89	-22.51	26.38	46.00	-19.62	QP	P
4	292.0583	46.37	-20.91	25.46	46.00	-20.54	QP	P
5 *	537.5891	46.59	-14.70	31.89	46.00	-14.11	QP	P
6	734.4913	36.90	-11.14	25.76	46.00	-20.24	QP	P

\*:Maximum data    x:Over limit    !:over margin


#### Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)





<b>Temperature:</b>	24.3°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 120V 60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	Mode 2		
<b>Remark:</b>	Only worse case is reported.		

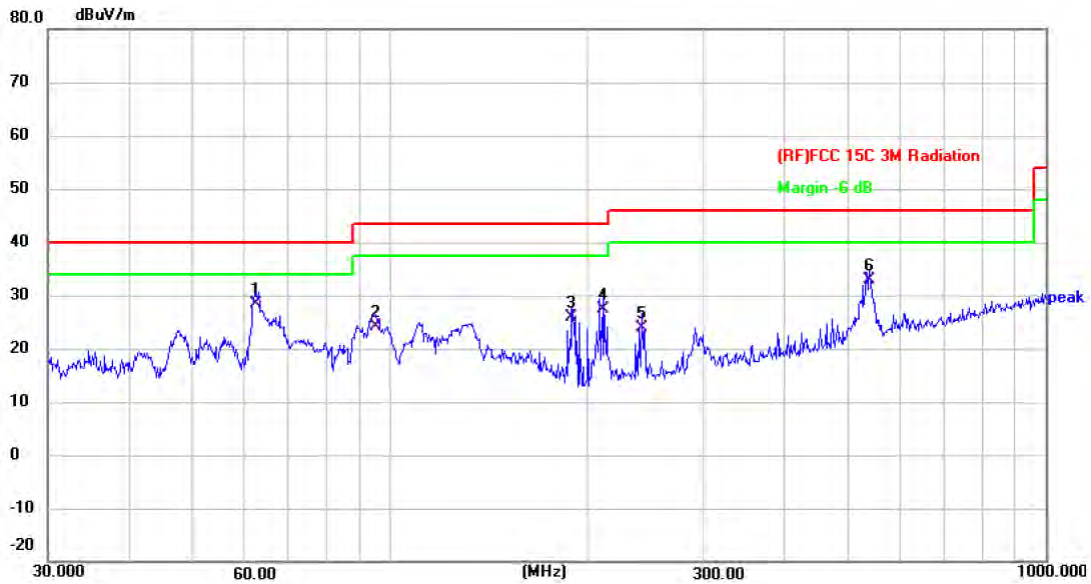

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	62.4314	52.14	-23.78	28.36	40.00	-11.64	QP	P
2	94.7601	50.09	-25.86	24.23	43.50	-19.27	QP	P
3	189.0743	49.31	-23.55	25.76	43.50	-17.74	QP	P
4	211.5265	51.05	-23.69	27.36	43.50	-16.14	QP	P
5	241.6763	46.29	-22.51	23.78	46.00	-22.22	QP	P
6	537.5891	47.48	-14.70	32.78	46.00	-13.22	QP	P

\*:Maximum data    x:Over limit    !:over margin

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)





**Above 1GHz**

<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11a Mode 5955MHz (U-NII-5) -CDD							
Horizontal								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11910.523	50.96	8.88	59.84	74.00	-14.16	peak	P
2 *	11910.645	41.14	8.88	50.02	54.00	-3.98	AVG	P
Vertical								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11910.421	50.05	8.88	58.93	74.00	-15.07	peak	P
2 *	11910.735	40.98	8.88	49.86	54.00	-4.14	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11a Mode 6175MHz (U-NII-5) -CDD							
Horizontal								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12350.567	51.04	8.82	59.86	74.00	-14.14	peak	P
2 *	12350.712	41.14	8.82	49.96	54.00	-4.04	AVG	P
Vertical								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12350.164	50.74	8.82	59.56	74.00	-14.44	peak	P
2 *	12350.635	41.30	8.82	50.12	54.00	-3.88	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11a Mode 6415MHz (U-NII-5) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12830.523	50.59	9.27	59.86	88.20	-28.34	peak	P
2 *	12830.637	41.06	9.27	50.33	68.20	-17.87	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12830.637	50.06	9.27	59.33	88.20	-28.87	peak	P
2 *	12830.836	40.85	9.27	50.12	68.20	-18.08	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5955MHz (U-NII-5) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11910.575	49.58	8.88	58.46	74.00	-15.54	peak	P
2 *	11910.784	40.65	8.88	49.53	54.00	-4.47	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11910.712	50.05	8.88	58.93	74.00	-15.07	peak	P
2 *	11910.835	40.78	8.88	49.66	54.00	-4.34	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 6175MHz (U-NII-5) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12350.214	41.51	8.82	50.33	54.00	-3.67	AVG	P
2	12350.747	50.54	8.82	59.36	74.00	-14.64	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12350.354	49.94	8.82	58.76	74.00	-15.24	peak	P
2 *	12350.825	41.00	8.82	49.82	54.00	-4.18	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								









<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5965MHz (U-NII-5) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11930.127	50.60	8.96	59.56	74.00	-14.44	peak	P
2 *	11930.367	41.18	8.96	50.14	54.00	-3.86	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11930.578	49.80	8.96	58.76	74.00	-15.24	peak	P
2 *	11930.635	40.89	8.96	49.85	54.00	-4.15	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 6165MHz (U-NII-5) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12330.178	50.35	8.90	59.25	74.00	-14.75	peak	P
2 *	12330.235	41.14	8.90	50.04	54.00	-3.96	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12330.125	41.21	8.90	50.11	54.00	-3.89	AVG	P
2	12330.534	50.62	8.90	59.52	74.00	-14.48	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 6405MHz (U-NII-5) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12810.257	40.24	9.34	49.58	68.20	-18.62	AVG	P
2	12810.635	49.94	9.34	59.28	88.20	-28.92	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12810.114	50.42	9.34	59.76	88.20	-28.44	peak	P
2 *	12810.357	40.34	9.34	49.68	68.20	-18.52	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 5985MHz (U-NII-5) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11970.137	50.77	9.09	59.86	74.00	-14.14	peak	P
2 *	11970.388	40.49	9.09	49.58	54.00	-4.42	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11970.389	40.77	9.09	49.86	54.00	-4.14	AVG	P
2	11970.714	50.76	9.09	59.85	74.00	-14.15	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								









<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 6385MHz (U-NII-5) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12770.397	40.38	9.45	49.83	68.20	-18.37	AVG	P
2	12770.828	50.18	9.45	59.63	88.20	-28.57	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12770.112	40.13	9.45	49.58	68.20	-18.62	AVG	P
2	12770.865	50.10	9.45	59.55	88.20	-28.65	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE160) Mode 6025MHz (U-NII-5) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12050.425	39.46	9.29	48.75	54.00	-5.25	AVG	P
2	12050.685	50.27	9.29	59.56	74.00	-14.44	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12050.566	49.27	9.29	58.56	74.00	-15.44	peak	P
2 *	12050.825	40.28	9.29	49.57	54.00	-4.43	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE160) Mode 6185MHz (U-NII-5) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12370.412	50.88	8.75	59.63	74.00	-14.37	peak	P
2 *	12370.435	39.78	8.75	48.53	54.00	-5.47	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12370.163	40.83	8.75	49.58	54.00	-4.42	AVG	P
2	12370.825	50.87	8.74	59.61	74.00	-14.39	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE160) Mode 6345MHz (U-NII-5) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12690.457	38.88	9.64	48.52	54.00	-5.48	AVG	P
2	12690.635	49.29	9.64	58.93	74.00	-15.07	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12690.588	38.80	9.64	48.44	54.00	-5.56	AVG	P
2	12690.616	48.88	9.64	58.52	74.00	-15.48	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11a Mode 6435MHz (U-NII-6) -CDD							
Horizontal								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12870.635	40.63	9.13	49.76	68.20	-18.44	AVG	P
2	12870.812	50.50	9.13	59.63	88.20	-28.57	peak	P
Vertical								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12870.134	41.05	9.14	50.19	68.20	-18.01	AVG	P
2	12870.632	50.55	9.13	59.68	88.20	-28.52	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11a Mode 6475MHz (U-NII-6) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12950.255	48.81	9.31	58.12	88.20	-30.08	peak	P
2 *	12950.652	40.47	9.31	49.78	68.20	-18.42	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12950.125	50.06	9.31	59.37	88.20	-28.83	peak	P
2 *	12950.823	40.55	9.31	49.86	68.20	-18.34	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11a Mode 6515MHz (U-NII-6) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13030.223	49.26	9.67	58.93	88.20	-29.27	peak	P
2 *	13030.367	39.49	9.67	49.16	68.20	-19.04	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13030.124	40.43	9.66	50.09	68.20	-18.11	AVG	P
2	13030.255	49.22	9.67	58.89	88.20	-29.31	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 6435MHz (U-NII-6) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12870.117	50.49	9.14	59.63	88.20	-28.57	peak	P
2 *	12870.457	40.73	9.13	49.86	68.20	-18.34	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12870.421	41.08	9.13	50.21	68.20	-17.99	AVG	P
2	12870.635	50.39	9.13	59.52	88.20	-28.68	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 6475MHz (U-NII-6) -CDD							
Horizontal								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12950.457	40.80	9.31	50.11	68.20	-18.09	AVG	P
2	12950.576	50.24	9.31	59.55	88.20	-28.65	peak	P
Vertical								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12950.575	40.75	9.31	50.06	68.20	-18.14	AVG	P
2	12950.638	50.27	9.31	59.58	88.20	-28.62	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 6515MHz (U-NII-6) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13030.196	49.96	9.67	59.63	88.20	-28.57	peak	P
2 *	13030.572	40.43	9.68	50.11	68.20	-18.09	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13030.658	40.54	9.68	50.22	68.20	-17.98	AVG	P
2	13030.752	50.00	9.68	59.68	88.20	-28.52	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 6445MHz (U-NII-6) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12890.114	50.45	9.07	59.52	88.20	-28.68	peak	P
2 *	12890.278	40.78	9.07	49.85	68.20	-18.35	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12890.114	50.48	9.07	59.55	88.20	-28.65	peak	P
2 *	12890.635	40.49	9.07	49.56	68.20	-18.64	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 6485MHz (U-NII-6) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12970.113	40.16	9.42	49.58	68.20	-18.62	AVG	P
2	12970.546	49.51	9.42	58.93	88.20	-29.27	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12970.144	50.14	9.42	59.56	88.20	-28.64	peak	P
2 *	12970.658	40.69	9.43	50.12	68.20	-18.08	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 6525MHz (U-NII-6) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13050.445	48.97	9.72	58.69	88.20	-29.51	peak	P
2 *	13050.566	38.87	9.72	48.59	68.20	-19.61	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13050.115	50.16	9.71	59.87	88.20	-28.33	peak	P
2 *	13050.897	39.97	9.72	49.69	68.20	-18.51	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 6465MHz (U-NII-6) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12930.114	49.51	9.21	58.72	88.20	-29.48	peak	P
2 *	12930.725	39.55	9.21	48.76	68.20	-19.44	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12930.637	49.91	9.21	59.12	88.20	-29.08	peak	P
2 *	12930.711	39.31	9.21	48.52	68.20	-19.68	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 6545MHz (U-NII-6) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13090.225	38.68	9.82	48.50	68.20	-19.70	AVG	P
2	13090.267	49.70	9.82	59.52	88.20	-28.68	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13090.525	38.13	9.82	47.95	68.20	-20.25	AVG	P
2	13090.752	48.70	9.82	58.52	88.20	-29.68	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE160) Mode 6505MHz (U-NII-6) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13010.235	40.01	9.62	49.63	68.20	-18.57	AVG	P
2	13010.443	49.91	9.62	59.53	88.20	-28.67	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13010.645	38.90	9.62	48.52	68.20	-19.68	AVG	P
2	13010.754	49.93	9.62	59.55	88.20	-28.65	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11a Mode 6535MHz (U-NII-7)-CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13070.257	40.09	9.77	49.86	68.20	-18.34	AVG	P
2	13070.532	49.86	9.77	59.63	88.20	-28.57	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13070.117	49.75	9.77	59.52	88.20	-28.68	peak	P
2 *	13070.638	38.98	9.77	48.75	68.20	-19.45	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11a Mode 6695MHz (U-NII-7) -CDD							
Horizontal								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13390.137	49.52	10.14	59.66	74.00	-14.34	peak	P
2 *	13390.145	40.11	10.14	50.25	54.00	-3.75	AVG	P
Vertical								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13390.244	40.03	10.14	50.17	54.00	-3.83	AVG	P
2	13390.555	49.75	10.14	59.89	74.00	-14.11	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11a Mode 6855MHz (U-NII-7) -CDD							
Horizontal								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13710.274	49.60	10.28	59.88	88.20	-28.32	peak	P
2 *	13710.376	40.35	10.28	50.63	68.20	-17.57	AVG	P
Vertical								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13710.443	49.63	10.28	59.91	88.20	-28.29	peak	P
2 *	13710.758	39.78	10.28	50.06	68.20	-18.14	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11a Mode 6875MHz (U-NII-7) -CDD							
Horizontal								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13750.113	49.65	10.21	59.86	88.20	-28.34	peak	P
2 *	13750.765	40.01	10.21	50.22	68.20	-17.98	AVG	P
Vertical								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13750.523	48.58	10.21	58.79	88.20	-29.41	peak	P
2 *	13750.568	39.57	10.21	49.78	68.20	-18.42	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 6535MHz (U-NII-7)-CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13070.198	39.79	9.77	49.56	68.20	-18.64	AVG	P
2	13070.576	49.48	9.77	59.25	88.20	-28.95	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13070.267	49.48	9.77	59.25	88.20	-28.95	peak	P
2 *	13070.568	40.37	9.77	50.14	68.20	-18.06	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 6695MHz (U-NII-7) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13390.578	49.71	10.14	59.85	74.00	-14.15	peak	P
2 *	13390.633	39.63	10.14	49.77	54.00	-4.23	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13390.441	49.22	10.14	59.36	74.00	-14.64	peak	P
2 *	13390.635	39.91	10.14	50.05	54.00	-3.95	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 6855MHz (U-NII-7) -CDD							
Horizontal								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13710.297	49.50	10.28	59.78	88.20	-28.42	peak	P
2 *	13710.563	39.28	10.28	49.56	68.20	-18.64	AVG	P
Vertical								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13710.227	49.48	10.28	59.76	88.20	-28.44	peak	P
2 *	13710.635	39.60	10.28	49.88	68.20	-18.32	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 6875MHz (U-NII-7) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13750.288	48.75	10.21	58.96	88.20	-29.24	peak	P
2 *	13750.637	39.64	10.21	49.85	68.20	-18.35	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13750.569	49.61	10.21	59.82	88.20	-28.38	peak	P
2 *	13750.677	39.37	10.21	49.58	68.20	-18.62	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 6565MHz (U-NII-7) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13130.635	40.01	9.84	49.85	68.20	-18.35	AVG	P
2	13130.825	50.03	9.84	59.87	88.20	-28.33	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13130.122	50.04	9.83	59.87	88.20	-28.33	peak	P
2 *	13130.520	40.29	9.83	50.12	68.20	-18.08	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 6685MHz (U-NII-7) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13370.407	40.02	10.06	50.08	54.00	-3.92	AVG	P
2	13370.457	49.57	10.06	59.63	74.00	-14.37	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13370.447	39.76	10.06	49.82	54.00	-4.18	AVG	P
2	13370.612	48.93	10.06	58.99	74.00	-15.01	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 6845MHz (U-NII-7) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13690.145	48.29	10.26	58.55	88.20	-29.65	peak	P
2 *	13690.447	39.59	10.26	49.85	68.20	-18.35	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13690.124	49.32	10.26	59.58	88.20	-28.62	peak	P
2 *	13690.836	38.31	10.26	48.57	68.20	-19.63	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 6885MHz (U-NII-7) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13770.058	39.91	10.17	50.08	68.20	-18.12	AVG	P
2	13770.638	49.46	10.17	59.63	88.20	-28.57	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13770.265	39.68	10.17	49.85	68.20	-18.35	AVG	P
2	13770.697	49.68	10.17	59.85	88.20	-28.35	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 6625MHz (U-NII-7) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13250.027	39.46	9.79	49.25	54.00	-4.75	AVG	P
2	13250.622	48.98	9.79	58.77	74.00	-15.23	peak	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13250.289	38.79	9.79	48.58	54.00	-5.42	AVG	P
2	13250.375	48.92	9.79	58.71	74.00	-15.29	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 6705MHz (U-NII-7) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13410.586	48.35	10.17	58.52	88.20	-29.68	peak	P
2 *	13410.837	38.56	10.17	48.73	68.20	-19.47	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13410.352	37.65	10.17	47.82	68.20	-20.38	AVG	P
2	13410.557	47.85	10.17	58.02	88.20	-30.18	peak	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								





<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 6785MHz (U-NII-7) -CDD							
Horizontal								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	13570.122	38.21	9.98	48.19	68.20	-20.01	AVG	P
2	13570.532	47.85	9.98	57.83	88.20	-30.37	peak	P
Vertical								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13570.127	49.88	9.98	59.86	88.20	-28.34	peak	P
2 *	13570.576	38.78	9.98	48.76	68.20	-19.44	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								



<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	48%					
<b>Test Voltage:</b>	AC 120V/60Hz							
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 6865MHz (U-NII-7) -CDD							
<b>Horizontal</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13730.557	49.20	10.25	59.45	88.20	-28.75	peak	P
2 *	13730.635	38.27	10.25	48.52	68.20	-19.68	AVG	P
<b>Vertical</b>								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13730.571	48.27	10.25	58.52	88.20	-29.68	peak	P
2 *	13730.638	39.31	10.25	49.56	68.20	-18.64	AVG	P
<b>Remark:</b>								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

