



Radio Test Report

FCC ID: 2AW68-D222AH

Report No. : TBR-C-202208-0271-2
Applicant : Shenzhen SDMC Technology Co., Ltd.
Equipment Under Test (EUT)
EUT Name : D222AH Tri-band Wi-Fi 6E Extender
Model No. : D222AH
Series Model No. : ---
Brand Name : Altice Labs
Sample ID : 202208-0271-2-1#&202208-0271-2-2#
Receipt Date : 2022-09-20
Test Date : 2022-09-21 to 2023-03-03
Issue Date : 2023-03-06
Standards : FCC Part 15 Subpart C 15.247
Test Method : ANSI C63.10: 2013
KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 662911 D01 Multiple Transmitter Output v02r01
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above.

Witness Engineer : 

Engineer Supervisor : 

Engineer Manager : 



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT.....	5
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test).....	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units.....	6
1.5 Description of Test Mode.....	7
1.6 Description of Test Software Setting.....	8
1.7 Measurement Uncertainty.....	9
1.8 Test Facility.....	9
2. TEST SUMMARY.....	10
3. TEST SOFTWARE.....	10
4. TEST EQUIPMENT.....	11
5. CONDUCTED EMISSION TEST.....	12
5.1 Test Standard and Limit.....	12
5.2 Test Setup.....	12
5.3 Test Procedure.....	12
5.4 Deviation From Test Standard.....	13
5.5 EUT Operating Mode.....	13
5.6 Test Data.....	13
6. RADIATED AND CONDUCTED UNWANTED EMISSIONS.....	14
6.1 Test Standard and Limit.....	14
6.2 Test Setup.....	15
6.3 Test Procedure.....	16
6.4 Deviation From Test Standard.....	17
6.5 EUT Operating Mode.....	17
6.6 Test Data.....	17
7. RESTRICTED BANDS REQUIREMENT.....	18
7.1 Test Standard and Limit.....	18
7.2 Test Setup.....	18
7.3 Test Procedure.....	19
7.4 Deviation From Test Standard.....	20
7.5 EUT Operating Mode.....	20



7.6 Test Data.....	20
8. BANDWIDTH TEST.....	21
8.1 Test Standard and Limit.....	21
8.2 Test Setup.....	21
8.3 Test Procedure.....	21
8.4 Deviation From Test Standard.....	22
8.5 EUT Operating Mode.....	22
8.6 Test Data.....	22
9. PEAK OUTPUT POWER.....	23
9.1 Test Standard and Limit.....	23
9.2 Test Setup.....	23
9.3 Test Procedure.....	23
9.4 Deviation From Test Standard.....	23
9.5 EUT Operating Mode.....	23
9.6 Test Data.....	23
10. POWER SPECTRAL DENSITY.....	24
10.1 Test Standard and Limit.....	24
10.2 Test Setup.....	24
10.3 Test Procedure.....	24
10.4 Deviation From Test Standard.....	24
10.5 Antenna Connected Construction.....	24
10.6 Test Data.....	24
11. ANTENNA REQUIREMENT.....	25
11.1 Test Standard and Limit.....	25
11.2 Deviation From Test Standard.....	25
11.3 Antenna Connected Construction.....	25
11.4 Test Data.....	25
ATTACHMENT A-- CONDUCTED EMISSION TEST DATA.....	26
ATTACHMENT B--UNWANTED EMISSIONS DATA.....	28
ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT TEST DATA.....	96



Revision History

Report No.	Version	Description	Issued Date
TBR-C-202208-0271-2	Rev.01	Initial issue of report	2023-03-06



1. General Information about EUT

1.1 Client Information

Applicant	:	Shenzhen SDMC Technology Co., Ltd.
Address	:	Room 1022, Floor 10, Building A, Customs Building, No. 2, Xin'an 3rd Road, Dalang Community, Xin'an Street, Bao'an District, Shenzhen, China
Manufacturer	:	Shenzhen SDMC Technology Co., Ltd.
Address	:	Room 1022, Floor 10, Building A, Customs Building, No. 2, Xin'an 3rd Road, Dalang Community, Xin'an Street, Bao'an District, Shenzhen, China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	D222AH Tri-band Wi-Fi 6E Extender	
HVIN/Models No.	:	D222AH	
Model Different	:	N/A	
Product Description	:	Operation Frequency:	802.11b/g/n(HT20)/VHT20/ax(HE20): 2412MHz~2462MHz 802.11n(HT40)/VHT40/ ax(HE40): 2422MHz~2452MHz
		Number of Channel:	802.11b/g/n(HT20)/VHT20/ax(HE20): 11 channels 802.11n(HT40)/VHT40/ ax(HE40): 7 channels
		Antenna Gain:	3.01dBi PCB Antenna 1 4.03dBi PCB Antenna 2
		Modulation Type:	802.11b: DSSS (DQPSK, DBPSK, CCK) 802.11g: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) VHT20&VHT40: OFDM (QPSK, BPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Power Rating	:	AC Adapter (Model: S024-1D120200VU): Input: 100-240V~, 50/60Hz, 0.6A Output: 12.0V=2.0A	
Software Version	:	N/A	
Hardware Version	:	N/A	
Remark:			
(1)The adapter provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.			
(2)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			
(3)Antenna information from antenna specification.			




(4)Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		

Note: CH 01~CH 11 for 20MHz Bandwidth
CH 03~CH 09 for 40MHz Bandwidth

1.3 Block Diagram Showing the Configuration of System Tested

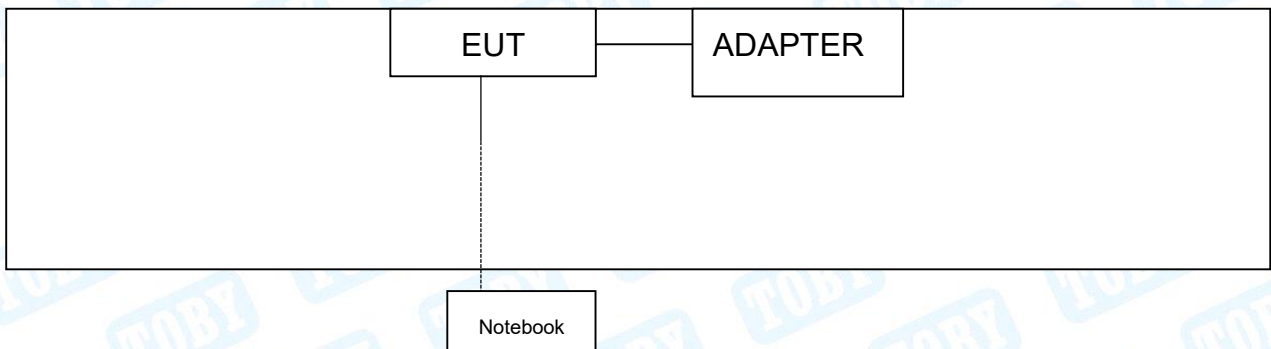

1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Used “√”
Notebook	Inspiron 5493	----	DELL	√
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	Yes	NO	1.0M	Accessory



1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Emission Test	
Final Test Mode	Description
Mode 1	TX b Mode Channel 01
For Radiated and RF Conducted Test	
Final Test Mode	Description
Mode 2	TX Mode b Mode Channel 01/06/11
Mode 3	TX Mode g Mode Channel 01/06/11
Mode 4	TX Mode n(HT20) Mode Channel 01/06/11
Mode 5	TX Mode n(HT40) Mode Channel 03/06/09
Mode 6	TX Mode VHT20 Mode Channel 01/06/11
Mode 7	TX Mode VHT40 Mode Channel 03/06/09
Mode 7	TX Mode ax(HE20) Mode Channel 01/06/11
Mode 8	TX Mode ax(HE40) Mode Channel 03/06/09
Remark : The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz) and VHT mode for 20 MHz (40 MHz), therefore the manufacturer will control the power for 802.11n/VHT mode is the same as the 802.11ax or more lower than it and investigated worst case to representative mode in test report.	

Note:

(1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

Mode	Data Rate
B Mode-SISO/CDD	1Mbps
G Mode-SISO/CDD	6Mbps
N(HT20) Mode-SDM/BF	MCS8
N(HT40) Mode-SDM/BF	MCS8
VHT20 Mode-SDM/BF	MCS0NSS2
VHT40 Mode-SDM/BF	MCS0NSS2
AX(HE20) Mode-SDM/BF	HE0NSS2
AX(HE40) Mode-SDM/BF	HE0NSS2
N(HT20) Mode-CDD	MCS0
N(HT40) Mode-CDD	MCS0
VHT20 Mode-CDD	MCS0NSS1
VHT40 Mode-CDD	MCS0NSS1
AX(HE20) Mode-CDD	HE0NSS1
AX(HE40) Mode-CDD	HE0NSS1

(2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.

(3) The EUT is considered a Mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.



1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

Test Software: accessMtool							
Test Mode: Continuously transmitting							
Mode	Channel	Parameters					
		SISO/SDM		CDD		BF	
		Ant.1	Ant.2	Ant.1	Ant.2	Ant.1	Ant.2
802.11b	01	84	86	84		/	
	06	84	86	84		/	
	11	84	86	84		/	
802.11g	01	80	76	80		/	
	06	80	76	80		/	
	11	80	76	80		/	
802.11n(HT20)	01	76		80		80	
	06	76		80		80	
	11	76		80		80	
802.11n(HT40)	03	68		72		72	
	06	68		72		72	
	09	68		72		72	
VHT20	01	80		80		80	
	06	80		80		80	
	11	80		80		80	
VHT40	03	68		68		68	
	06	68		68		68	
	09	68		68		68	
802.11ax(HE20)	01	72		68		68	
	06	72		68		68	
	11	72		68		68	
802.11ax(HE40)	03	64		68		68	
	06	64		68		68	
	09	64		68		68	



1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB
RF Power-Conducted	/	± 0.95 dB
Power Spectral Density-Conducted	/	± 3 dB
Occupied Bandwidth	/	$\pm 3.8\%$
Unwanted Emission-Conducted	/	± 2.72 dB

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.



2. Test Summary

Standard Section	Test Item	Test Sample(s)	Test Mode	Judgment
FCC 15.207(a)	Conducted Emission	202208-0271-2-1#	802.11b SISO	PASS
FCC 15.209 & 15.247(d)	Radiated Unwanted Emissions	202208-0271-2-1#	802.11b/g SISO 802.11n/ax/VHT20/VHT40 SDM 802.11b/g/n/ax/VHT20/VHT40 CDD 802.11n/ax/VHT20/VHT40 BF	PASS
FCC 15.203	Antenna Requirement	202208-0271-2-2#	/	PASS
FCC 15.247(a)(2)	6dB Bandwidth	202208-0271-2-2#	802.11b/g SISO 802.11n/ax/VHT20/VHT40 SDM	PASS
FCC 15.247(b)(3)	Peak Output Power	202208-0271-2-2#	802.11b/g SISO 802.11n/ax/VHT20/VHT40 SDM 802.11b/g/n/ax/VHT20/VHT40 CDD 802.11n/ax/VHT20/VHT40 BF	PASS
FCC 15.247(e)	Power Spectral Density	202208-0271-2-2#	802.11b/g SISO 802.11n/ax/VHT20/VHT40 SDM 802.11b/g/n/ax/VHT20/VHT40 CDD 802.11n/ax/VHT20/VHT40 BF	PASS
FCC 15.247(d)	Band Edge Measurements	202208-0271-2-2#	802.11b/g SISO 802.11n/ax/VHT20/VHT40 SDM	PASS
FCC 15.207(a)	Conducted Unwanted Emissions	202208-0271-2-2#	802.11b/g SISO 802.11n/ax/VHT20/VHT40 SDM	PASS
FCC 15.247(d) FCC 15.205	Emissions in Restricted Bands	202208-0271-2-2#	802.11b/g SISO 802.11n/ax/VHT20/VHT40 SDM 802.11b/g/n/ax/VHT20/VHT40 CDD 802.11n/ax/VHT20/VHT40 BF	PASS
/	On Time and Duty Cycle	202208-0271-2-2#	802.11b/g SISO 802.11n/ax/VHT20/VHT40 SDM 802.11n/ax/VHT20/VHT40 BF	/

Note: (1) N/A is an abbreviation for Not Applicable.
(2) Some test items only test the SISO/SDM test mode.
(3) **SISO**: Simple Input Simple Output Mode, **SDM**: Space Division Multiplex(MIMO) mode, **CDD**: Cyclic Delay Diversity mode
BF: Beamforming Mode

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
Radiation Emission	EZ-EMC	EZ	FA-03A2RE+
RF Test System	JS1120-3	Tonscend	V3.2.22



4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jun. 23, 2022	Jun. 22, 2023
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jun. 23, 2022	Jun. 22, 2023
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jun. 22, 2022	Jun. 21, 2023
LISN	Rohde & Schwarz	ENV216	101131	Jun. 22, 2022	Jun. 21, 2023
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 01, 2022	Aug. 31, 2023
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
EMI Test Receiver	Rohde & Schwarz	ESU-8	100472/008	Feb. 22, 2023	Feb.22, 2024
Bilog Antenna	SCHWARZBECK	VULB 9168	1225	Dec. 05, 2021	Dec. 04, 2023
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2463	Feb. 26, 2022	Feb.25, 2024
Horn Antenna	SCHWARZBECK	BBHA 9170	1118	Jun. 26, 2022	Jun.25, 2024
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jun. 26, 2022	Jun.25, 2024
HF Amplifier	Tonscend	TAP9E6343	AP21C806117	Sep. 01, 2022	Aug. 31, 2023
HF Amplifier	Tonscend	TAP051845	AP21C806141	Sep. 01, 2022	Aug. 31, 2023
HF Amplifier	Tonscend	TAP0184050	AP21C806129	Sep. 01, 2022	Aug. 31, 2023
Pre-amplifier	HP	8449B	3008A00849	Feb. 22, 2023	Feb.22, 2024
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 01, 2022	Aug. 31, 2023
Spectrum Analyzer	KEYSIGT	N9020B	MY60110172	Sep. 01, 2022	Aug. 31, 2023
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 01, 2022	Aug. 31, 2023
RF Control Unit	Tonsced	JS0806-2	21F8060439	Sep. 01, 2022	Aug. 31, 2023
Power Control Box	Tonsced	JS0806-4ADC	21C8060387	N/A	N/A



5. Conducted Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15.207


5.1.2 Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.2 Test Setup

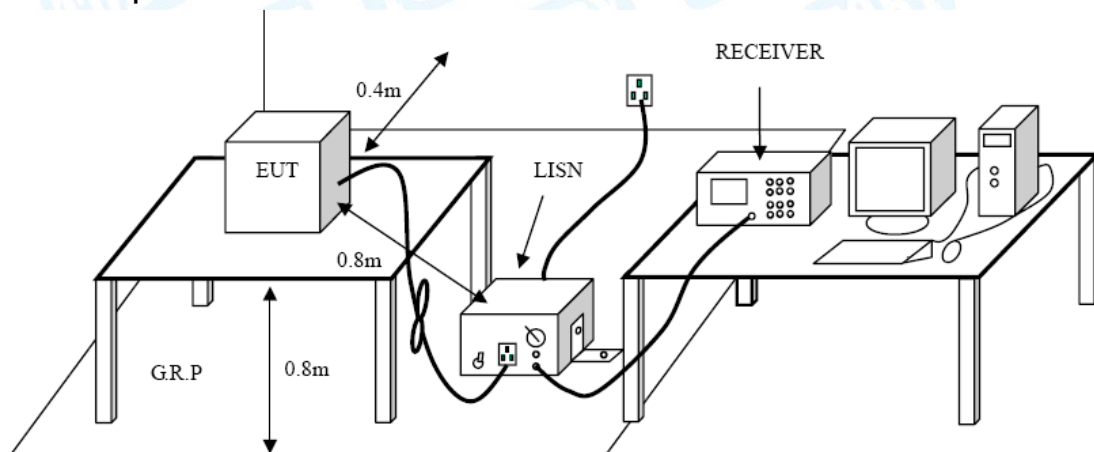

5.3 Test Procedure

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- The bandwidth of EMI test receiver is set at 9 kHz, and the test frequency band is from



0.15MHz to 30MHz.

5.4 Deviation From Test Standard

No deviation

5.5 EUT Operating Mode

Please refer to the description of test mode.

5.6 Test Data

Please refer to the Attachment A inside test report.



6. Radiated and Conducted Unwanted Emissions

6.1 Test Standard and Limit

6.1.1 Test Standard

FCC Part 15.209 & FCC Part 15.247(d)

6.1.2 Test Limit

General field strength limits at frequencies Below 30MHz		
Frequency (MHz)	Field Strength (microvolt/meter)**	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30

Note: 1, The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

General field strength limits at frequencies above 30 MHz		
Frequency (MHz)	Field strength (µV/m at 3 m)	Measurement Distance (meters)
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

General field strength limits at frequencies Above 1000MHz		
Frequency (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54


Note:
(1) The tighter limit applies at the band edges.
(2) Emission Level(dBuV/m)=20log Emission Level(uV/m)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.




6.2 Test Setup


Radiated measurement

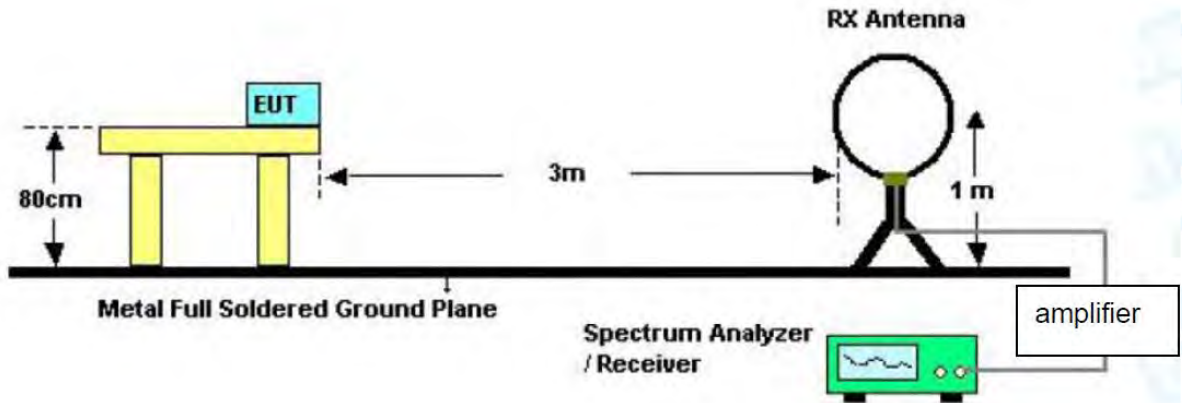

Below 30MHz Test Setup

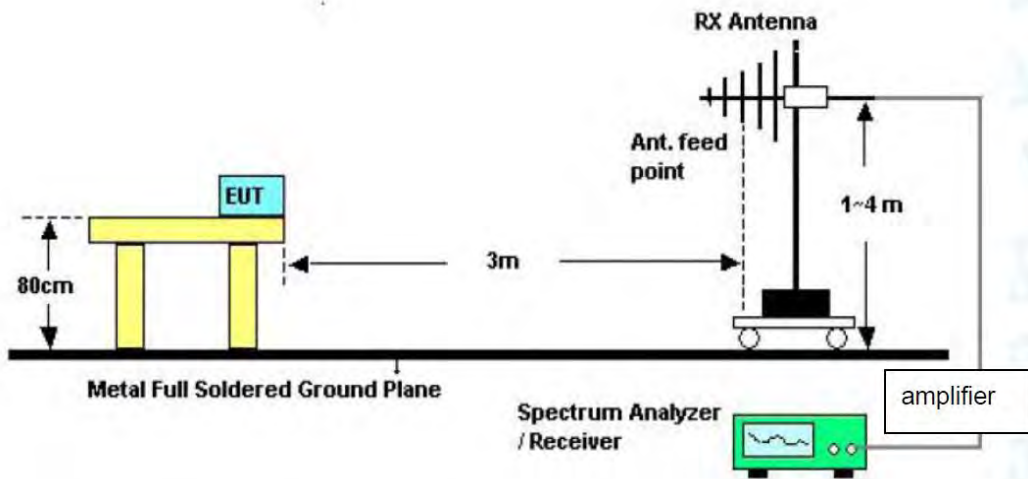


Below 1000MHz Test Setup

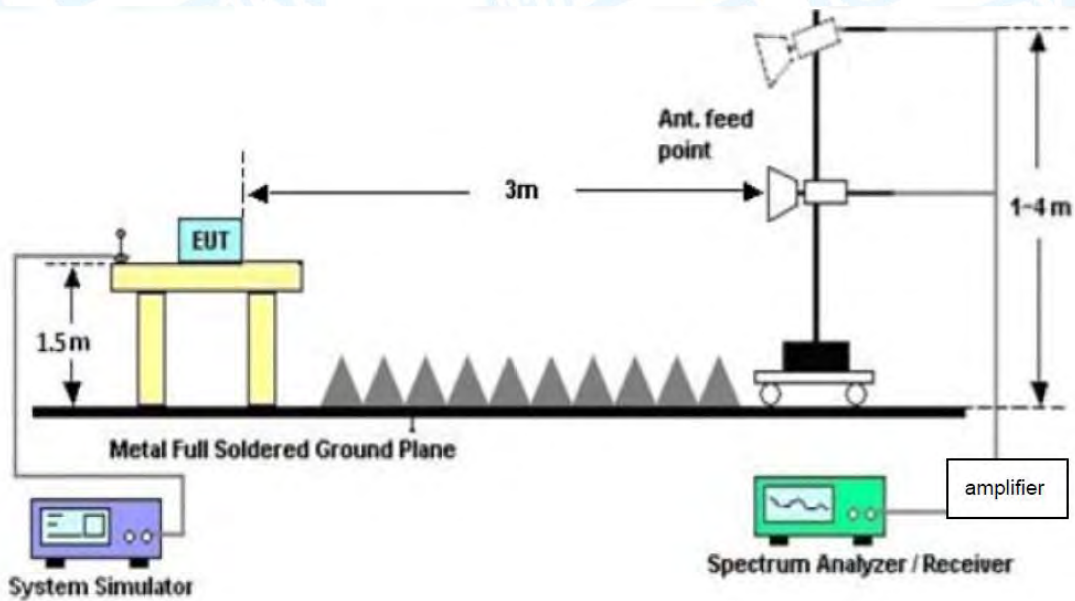

Above 1GHz Test Setup



Conducted measurement

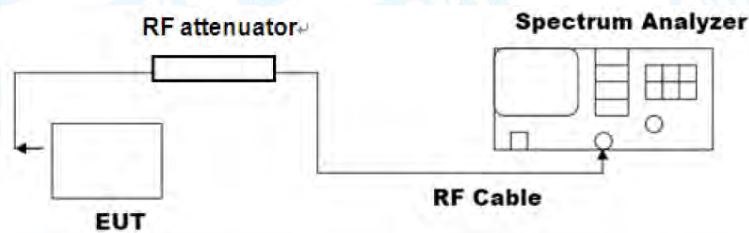

6.3 Test Procedure

---Radiated measurement

- The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- Testing frequency range 30MHz-1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection. Testing frequency range 9KHz-150Hz the measuring instrument use VBW=200Hz with Quasi-peak detection. Testing frequency range 9KHz-30MHz the measuring instrument use VBW=9kHz with Quasi-peak detection.
- Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- For the actual test configuration, please see the test setup photo.



--- Conducted measurement**● Reference level measurement**

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq [3 * RBW]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

● Emission level measurement

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 * RBW]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Mode

Please refer to the description of test mode.

6.6 Test Data

Radiated measurement please refer to the Attachment B inside test report.

Conducted measurement please refer to the external appendix report of 2.4G Wi-Fi.



7. Restricted Bands Requirement

7.1 Test Standard and Limit

7.1.1 Test Standard

FCC Part 15.205 & FCC Part 15.247(d)


7.1.2 Test Limit

Restricted Frequency Band (MHz)	Distance Meters(at 3m)	
	Peak (dBuV/m)	Average (dBuV/m)
2310 ~2390	74	54
2483.5 ~2500	74	54
	Peak (dBm) _{see 7.3 e)}	Average (dBm) _{see 7.3 e)}
2310 ~2390	-21.20	-41.20
2483.5 ~2500	-21.20	-41.20


Note: According the ANSI C63.10 11.12.2 antenna-port conducted measurements may also be used as an alternative to radiated measurements for determining compliance in the restricted frequency bands requirements. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case emissions is required.

7.2 Test Setup

Radiated measurement

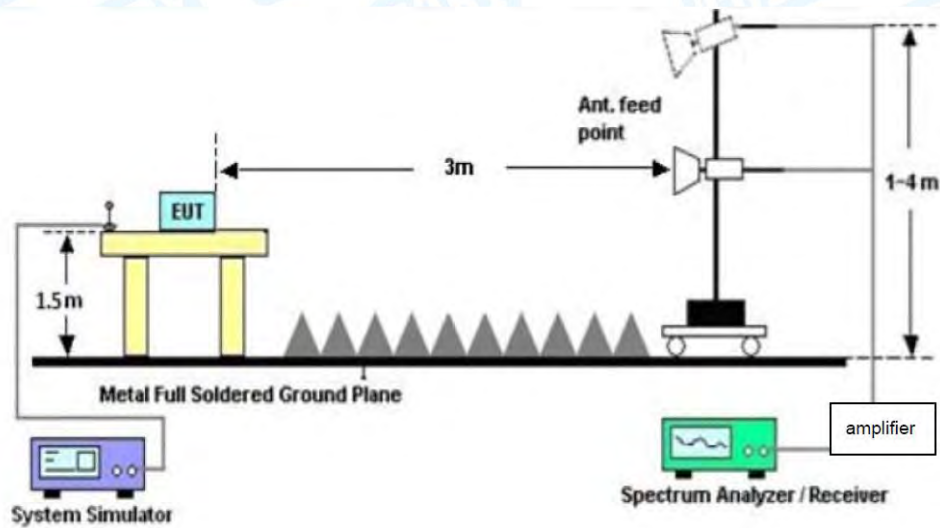

Conducted measurement

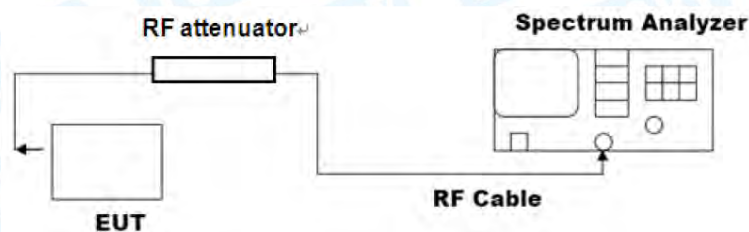

7.3 Test Procedure

---Radiated measurement

- Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- The Peak Value and average value both need to comply with applicable limit above 1 GHz.
- Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- For the actual test configuration, please see the test setup photo.

--- Conducted measurement

- a) Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 11.12.2.3 through 11.12.2.5 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP (see 11.12.2.6 for guidance on determining the applicable antenna gain).
- c) Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies ≤ 30 MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies > 1000 MHz).
- d) For MIMO devices, measure the power of each chain and sum the EIRP of all chains in linear terms (i.e., watts and mW).
- e) Convert the resultant EIRP to an equivalent electric field strength using the following relationship:

$$E = \sqrt{EIRP - 20 \log d + 104.8}$$



where

E is the electric field strength in dBuV/m

EIRP is the equivalent isotropically radiated power in dBm

d is the specified measurement distance in m

f) Compare the resultant electric field strength level with the applicable regulatory limit.

g) Perform the radiated spurious emission test.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Mode

Please refer to the description of test mode.

7.6 Test Data

Radiated measurement please refer to the Attachment C inside test report.

Conducted measurement please refer to the external appendix report of 2.4G Wi-Fi.



8. Bandwidth Test

8.1 Test Standard and Limit


8.1.1 Test Standard

FCC Part 15.247(d)

8.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
-6dB bandwidth (DTS bandwidth)	≥ 500 KHz	2400~2483.5

8.2 Test Setup

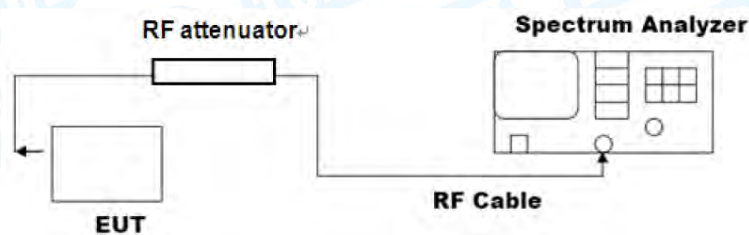

8.3 Test Procedure

---DTS bandwidth

● The steps for the first option are as follows:

- Set RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

---occupied bandwidth

● The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the



OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.

c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.

d) Step a) through step c) might require iteration to adjust within the specified range.

e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

8.4 Deviation From Test Standard

No deviation

8.5 EUT Operating Mode

Please refer to the description of test mode.

8.6 Test Data

Please refer to the external appendix report of 2.4G Wi-Fi.



9. Peak Output Power

9.1 Test Standard and Limit


9.1.1 Test Standard

FCC Part 15.247(b)(3)

9.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	not exceed 1 W or 30dBm	2400~2483.5

9.2 Test Setup

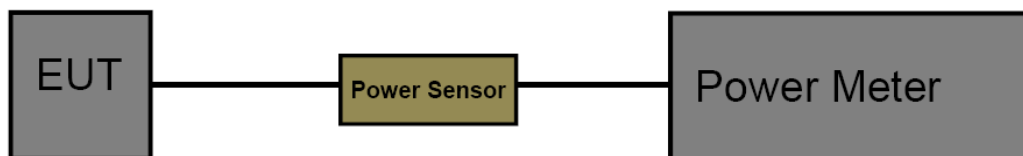

9.3 Test Procedure

● The EUT was connected to RF power meter via a broadband power sensor as show the block above. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.

9.4 Deviation From Test Standard

No deviation

9.5 EUT Operating Mode

Please refer to the description of test mode.

9.6 Test Data

Please refer to the external appendix report of 2.4G Wi-Fi.



10. Power Spectral Density

10.1 Test Standard and Limit

10.1.1 Test Standard


RSS 247 5.2(b)

FCC Part 15.247(e)

10.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

10.2 Test Setup

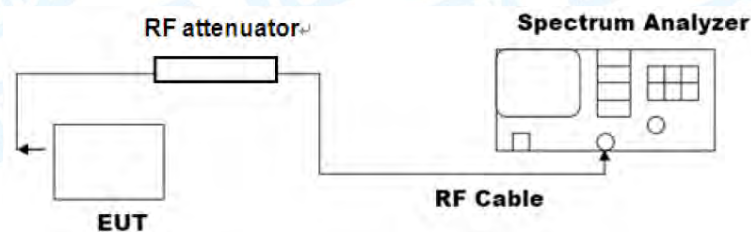

10.3 Test Procedure

● The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq [3 * \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

10.4 Deviation From Test Standard

No deviation

10.5 Antenna Connected Construction

Please refer to the description of test mode.

10.6 Test Data

Please refer to the external appendix report of 2.4G Wi-Fi.



11. Antenna Requirement

11.1 Test Standard and Limit

11.1.1 Test Standard

FCC Part 15.203

11.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

11.2 Deviation From Test Standard

No deviation

11.3 Antenna Connected Construction

The gains of the antenna used for transmitting is Ant.1: 3.01dBi; Ant.2: 4.03dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

11.4 Test Data


The EUT antenna is a PCB Antenna. It complies with the standard requirement.

Antenna Type
<input type="checkbox"/> Permanent attached antenna
<input checked="" type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna



Attachment A-- Conducted Emission Test Data

Temperature:	24.3°C	Relative Humidity:	43%
Test Voltage:	AC 120V/60Hz		
Terminal:	Line		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

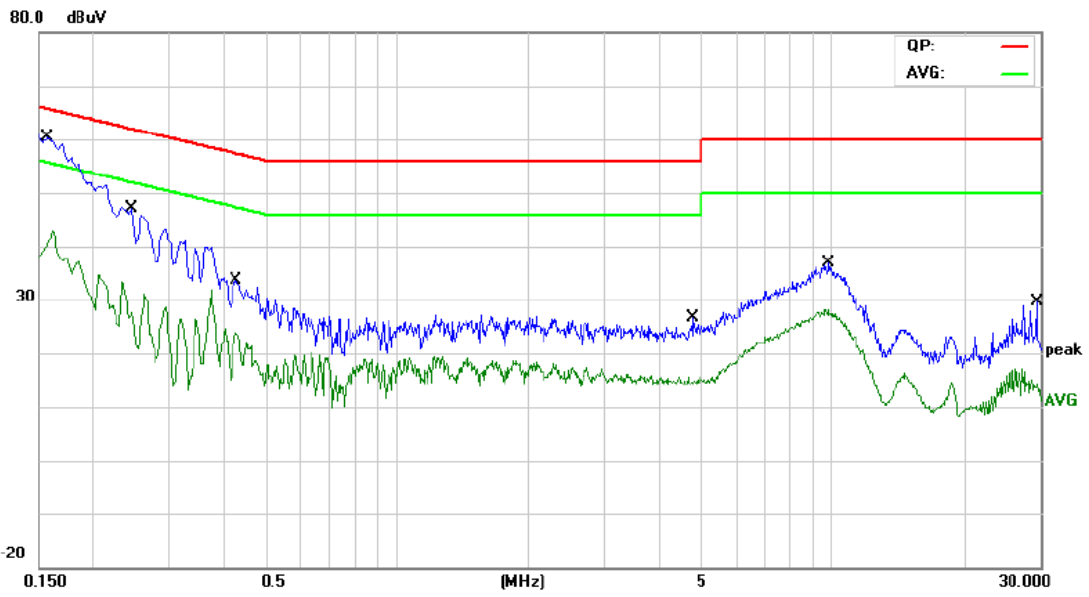


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	44.11	10.98	55.09	65.99	-10.90	QP
2		0.1500	28.70	10.98	39.68	55.99	-16.31	AVG
3		0.1758	39.73	11.05	50.78	64.68	-13.90	QP
4		0.1758	25.20	11.05	36.25	54.68	-18.43	AVG
5		0.2900	30.23	10.98	41.21	60.52	-19.31	QP
6		0.2900	20.52	10.98	31.50	50.52	-19.02	AVG
7		0.3780	22.05	10.91	32.96	58.32	-25.36	QP
8		0.3780	10.60	10.91	21.51	48.32	-26.81	AVG
9		0.5100	16.98	10.92	27.90	56.00	-28.10	QP
10		0.5100	9.78	10.92	20.70	46.00	-25.30	AVG
11		14.2900	18.35	10.34	28.69	60.00	-31.31	QP
12		14.2900	12.66	10.34	23.00	50.00	-27.00	AVG

Remark:
 1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
 2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



Temperature:	24.3°C	Relative Humidity:	43%
Test Voltage:	AC 120V/60Hz		
Terminal:	Neutral		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

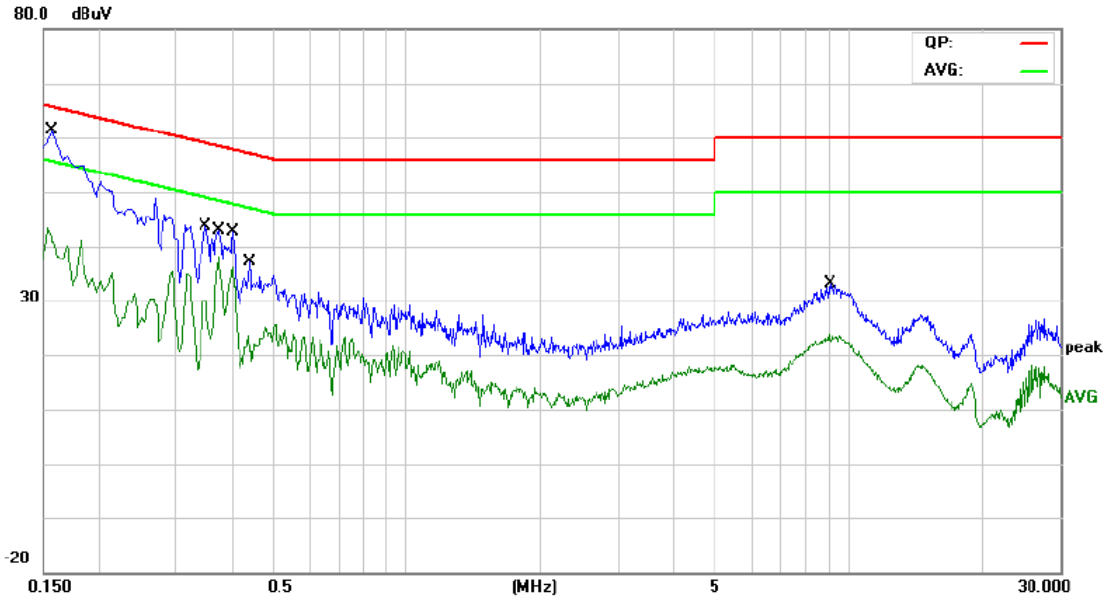

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1580	45.19	11.00	56.19	65.56	-9.37	QP
2		0.1580	29.47	11.00	40.47	55.56	-15.09	AVG
3		0.3500	23.57	10.93	34.50	58.96	-24.46	QP
4		0.3500	15.10	10.93	26.03	48.96	-22.93	AVG
5		0.3740	28.61	10.91	39.52	58.41	-18.89	QP
6		0.3740	26.03	10.91	36.94	48.41	-11.47	AVG
7		0.4020	26.40	10.89	37.29	57.81	-20.52	QP
8		0.4020	24.13	10.89	35.02	47.81	-12.79	AVG
9		0.4420	17.14	10.91	28.05	57.02	-28.97	QP
10		0.4420	6.25	10.91	17.16	47.02	-29.86	AVG
11		9.0860	16.58	10.14	26.72	60.00	-33.28	QP
12		9.0860	11.81	10.14	21.95	50.00	-28.05	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



Attachment B--Unwanted Emissions Data

---Radiated Unwanted Emissions

9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB Below the permissible value has no need to be reported.

30MHz~1GHz

Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	133.1511	44.43	-22.47	21.96	43.50	-21.54	QP
2	189.0743	44.56	-23.55	21.01	43.50	-22.49	QP
3	208.5803	46.12	-23.80	22.32	43.50	-21.18	QP
4	241.6763	47.63	-22.51	25.12	46.00	-20.88	QP
5	303.5437	46.87	-20.62	26.25	46.00	-19.75	QP
6 *	537.5891	42.59	-14.70	27.89	46.00	-18.11	QP


*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

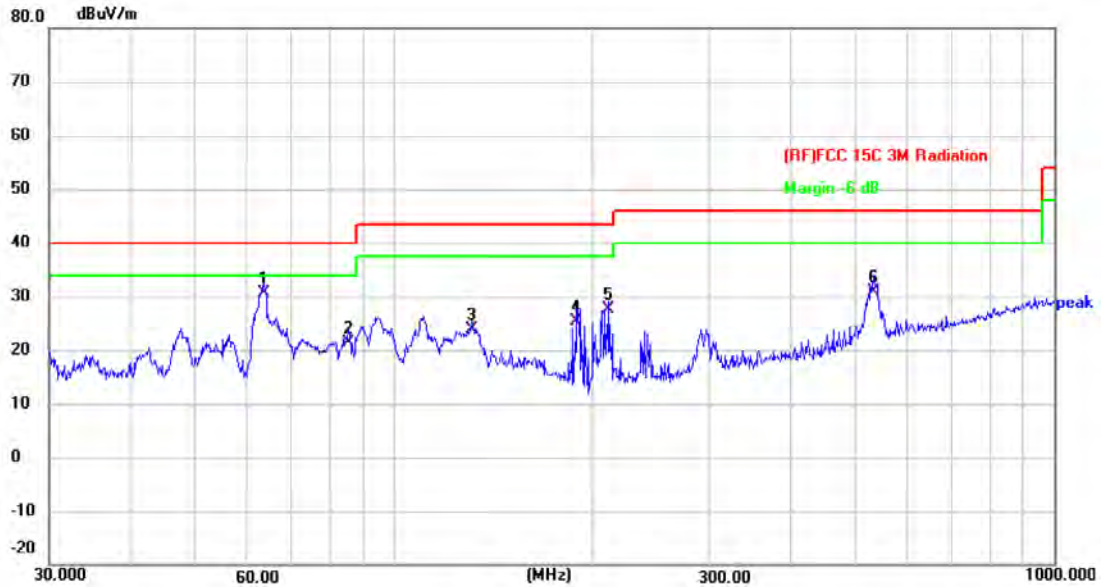

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	63.5356	54.53	-23.85	30.68	40.00	-9.32	QP
2	85.2980	47.89	-26.55	21.34	40.00	-18.66	QP
3	131.2965	46.48	-22.59	23.89	43.50	-19.61	QP
4	189.0743	48.91	-23.55	25.36	43.50	-18.14	QP
5	211.5265	51.29	-23.69	27.60	43.50	-15.90	QP
6	531.9635	45.83	-14.85	30.98	46.00	-15.02	QP

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



Above 1GHz

Temperature:	23.9°C	Relative Humidity:	54%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX B Mode 2412MHz Ant.1-SISO							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4824.625	55.93	-9.99	45.94	54.00	-8.06	AVG	P
2	4824.695	63.64	-9.99	53.65	74.00	-20.35	peak	P
3	7236.424	62.56	-4.88	57.68	74.00	-16.32	peak	P
4 *	7236.529	53.84	-4.88	48.96	54.00	-5.04	AVG	P
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 								

Temperature:	23.9°C	Relative Humidity:	54%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX B Mode 2412MHz Ant.1-SISO							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4824.162	64.35	-9.99	54.36	74.00	-19.64	peak	P
2	4824.952	55.61	-9.99	45.62	54.00	-8.38	AVG	P
3	7236.525	62.40	-4.88	57.52	74.00	-16.48	peak	P
4 *	7236.623	54.50	-4.88	49.62	54.00	-4.38	AVG	P
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 								



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX B Mode 2437MHz Ant.1-SISO																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.287</td> <td>53.81</td> <td>-9.90</td> <td>43.91</td> <td>54.00</td> <td>-10.09</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.652</td> <td>63.61</td> <td>-9.90</td> <td>53.71</td> <td>74.00</td> <td>-20.29</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7311.451</td> <td>54.51</td> <td>-4.74</td> <td>49.77</td> <td>54.00</td> <td>-4.23</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7311.568</td> <td>63.16</td> <td>-4.74</td> <td>58.42</td> <td>74.00</td> <td>-15.58</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.287	53.81	-9.90	43.91	54.00	-10.09	AVG	P	2	4874.652	63.61	-9.90	53.71	74.00	-20.29	peak	P	3 *	7311.451	54.51	-4.74	49.77	54.00	-4.23	AVG	P	4	7311.568	63.16	-4.74	58.42	74.00	-15.58	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4874.287	53.81	-9.90	43.91	54.00	-10.09	AVG	P																																								
2	4874.652	63.61	-9.90	53.71	74.00	-20.29	peak	P																																								
3 *	7311.451	54.51	-4.74	49.77	54.00	-4.23	AVG	P																																								
4	7311.568	63.16	-4.74	58.42	74.00	-15.58	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX B Mode 2437MHz Ant.1-SISO																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.624</td> <td>55.26</td> <td>-9.90</td> <td>45.36</td> <td>54.00</td> <td>-8.64</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.718</td> <td>64.57</td> <td>-9.90</td> <td>54.67</td> <td>74.00</td> <td>-19.33</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7311.618</td> <td>62.93</td> <td>-4.74</td> <td>58.19</td> <td>74.00</td> <td>-15.81</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7311.629</td> <td>53.33</td> <td>-4.74</td> <td>48.59</td> <td>54.00</td> <td>-5.41</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.624	55.26	-9.90	45.36	54.00	-8.64	AVG	P	2	4874.718	64.57	-9.90	54.67	74.00	-19.33	peak	P	3	7311.618	62.93	-4.74	58.19	74.00	-15.81	peak	P	4 *	7311.629	53.33	-4.74	48.59	54.00	-5.41	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4874.624	55.26	-9.90	45.36	54.00	-8.64	AVG	P																																								
2	4874.718	64.57	-9.90	54.67	74.00	-19.33	peak	P																																								
3	7311.618	62.93	-4.74	58.19	74.00	-15.81	peak	P																																								
4 *	7311.629	53.33	-4.74	48.59	54.00	-5.41	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX B Mode 2462MHz Ant.1-SISO																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.424</td> <td>55.33</td> <td>-9.78</td> <td>45.55</td> <td>54.00</td> <td>-8.45</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.431</td> <td>63.47</td> <td>-9.78</td> <td>53.69</td> <td>74.00</td> <td>-20.31</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7386.481</td> <td>53.87</td> <td>-4.61</td> <td>49.26</td> <td>54.00</td> <td>-4.74</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7386.348</td> <td>62.60</td> <td>-4.61</td> <td>57.99</td> <td>74.00</td> <td>-16.01</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.424	55.33	-9.78	45.55	54.00	-8.45	AVG	P	2	4924.431	63.47	-9.78	53.69	74.00	-20.31	peak	P	3 *	7386.481	53.87	-4.61	49.26	54.00	-4.74	AVG	P	4	7386.348	62.60	-4.61	57.99	74.00	-16.01	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.424	55.33	-9.78	45.55	54.00	-8.45	AVG	P																																								
2	4924.431	63.47	-9.78	53.69	74.00	-20.31	peak	P																																								
3 *	7386.481	53.87	-4.61	49.26	54.00	-4.74	AVG	P																																								
4	7386.348	62.60	-4.61	57.99	74.00	-16.01	peak	P																																								
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit.																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX B Mode 2462MHz Ant.1-SISO																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.662</td> <td>54.94</td> <td>-9.78</td> <td>45.16</td> <td>54.00</td> <td>-8.84</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.751</td> <td>64.64</td> <td>-9.78</td> <td>54.86</td> <td>74.00</td> <td>-19.14</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7386.598</td> <td>64.38</td> <td>-4.61</td> <td>59.77</td> <td>74.00</td> <td>-14.23</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7386.627</td> <td>54.63</td> <td>-4.61</td> <td>50.02</td> <td>54.00</td> <td>-3.98</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.662	54.94	-9.78	45.16	54.00	-8.84	AVG	P	2	4924.751	64.64	-9.78	54.86	74.00	-19.14	peak	P	3	7386.598	64.38	-4.61	59.77	74.00	-14.23	peak	P	4 *	7386.627	54.63	-4.61	50.02	54.00	-3.98	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.662	54.94	-9.78	45.16	54.00	-8.84	AVG	P																																								
2	4924.751	64.64	-9.78	54.86	74.00	-19.14	peak	P																																								
3	7386.598	64.38	-4.61	59.77	74.00	-14.23	peak	P																																								
4 *	7386.627	54.63	-4.61	50.02	54.00	-3.98	AVG	P																																								
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit.																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX G Mode 2412MHz Ant.1-SISO																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.394</td> <td>54.65</td> <td>-9.99</td> <td>44.66</td> <td>54.00</td> <td>-9.34</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4824.596</td> <td>63.70</td> <td>-9.99</td> <td>53.71</td> <td>74.00</td> <td>-20.29</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7236.578</td> <td>63.17</td> <td>-4.88</td> <td>58.29</td> <td>74.00</td> <td>-15.71</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7236.387</td> <td>54.54</td> <td>-4.88</td> <td>49.66</td> <td>54.00</td> <td>-4.34</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4824.394	54.65	-9.99	44.66	54.00	-9.34	AVG	P	2	4824.596	63.70	-9.99	53.71	74.00	-20.29	peak	P	3	7236.578	63.17	-4.88	58.29	74.00	-15.71	peak	P	4 *	7236.387	54.54	-4.88	49.66	54.00	-4.34	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4824.394	54.65	-9.99	44.66	54.00	-9.34	AVG	P																																								
2	4824.596	63.70	-9.99	53.71	74.00	-20.29	peak	P																																								
3	7236.578	63.17	-4.88	58.29	74.00	-15.71	peak	P																																								
4 *	7236.387	54.54	-4.88	49.66	54.00	-4.34	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX G Mode 2412MHz Ant.1-SISO																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.468</td> <td>64.88</td> <td>-9.99</td> <td>54.89</td> <td>74.00</td> <td>-19.11</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4824.639</td> <td>55.73</td> <td>-9.99</td> <td>45.74</td> <td>54.00</td> <td>-8.26</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7236.545</td> <td>53.67</td> <td>-4.88</td> <td>48.79</td> <td>54.00</td> <td>-5.21</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7236.449</td> <td>63.25</td> <td>-4.88</td> <td>58.37</td> <td>74.00</td> <td>-15.63</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4824.468	64.88	-9.99	54.89	74.00	-19.11	peak	P	2	4824.639	55.73	-9.99	45.74	54.00	-8.26	AVG	P	3 *	7236.545	53.67	-4.88	48.79	54.00	-5.21	AVG	P	4	7236.449	63.25	-4.88	58.37	74.00	-15.63	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4824.468	64.88	-9.99	54.89	74.00	-19.11	peak	P																																								
2	4824.639	55.73	-9.99	45.74	54.00	-8.26	AVG	P																																								
3 *	7236.545	53.67	-4.88	48.79	54.00	-5.21	AVG	P																																								
4	7236.449	63.25	-4.88	58.37	74.00	-15.63	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX G Mode 2437MHz Ant.1-SISO																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.635</td> <td>64.19</td> <td>-9.90</td> <td>54.29</td> <td>74.00</td> <td>-19.71</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.684</td> <td>54.16</td> <td>-9.90</td> <td>44.26</td> <td>54.00</td> <td>-9.74</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7311.714</td> <td>62.36</td> <td>-4.74</td> <td>57.62</td> <td>74.00</td> <td>-16.38</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7311.985</td> <td>54.50</td> <td>-4.74</td> <td>49.76</td> <td>54.00</td> <td>-4.24</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.635	64.19	-9.90	54.29	74.00	-19.71	peak	P	2	4874.684	54.16	-9.90	44.26	54.00	-9.74	AVG	P	3	7311.714	62.36	-4.74	57.62	74.00	-16.38	peak	P	4 *	7311.985	54.50	-4.74	49.76	54.00	-4.24	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4874.635	64.19	-9.90	54.29	74.00	-19.71	peak	P																																								
2	4874.684	54.16	-9.90	44.26	54.00	-9.74	AVG	P																																								
3	7311.714	62.36	-4.74	57.62	74.00	-16.38	peak	P																																								
4 *	7311.985	54.50	-4.74	49.76	54.00	-4.24	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX G Mode 2437MHz Ant.1-SISO																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.336</td> <td>64.19</td> <td>-9.90</td> <td>54.29</td> <td>74.00</td> <td>-19.71</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.784</td> <td>55.02</td> <td>-9.90</td> <td>45.12</td> <td>54.00</td> <td>-8.88</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7311.184</td> <td>54.35</td> <td>-4.74</td> <td>49.61</td> <td>54.00</td> <td>-4.39</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7311.458</td> <td>63.50</td> <td>-4.74</td> <td>58.76</td> <td>74.00</td> <td>-15.24</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.336	64.19	-9.90	54.29	74.00	-19.71	peak	P	2	4874.784	55.02	-9.90	45.12	54.00	-8.88	AVG	P	3 *	7311.184	54.35	-4.74	49.61	54.00	-4.39	AVG	P	4	7311.458	63.50	-4.74	58.76	74.00	-15.24	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4874.336	64.19	-9.90	54.29	74.00	-19.71	peak	P																																								
2	4874.784	55.02	-9.90	45.12	54.00	-8.88	AVG	P																																								
3 *	7311.184	54.35	-4.74	49.61	54.00	-4.39	AVG	P																																								
4	7311.458	63.50	-4.74	58.76	74.00	-15.24	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX G Mode 2462MHz Ant.1-SISO																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.464</td> <td>66.66</td> <td>-9.78</td> <td>56.88</td> <td>74.00</td> <td>-17.12</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.578</td> <td>54.46</td> <td>-9.78</td> <td>44.68</td> <td>54.00</td> <td>-9.32</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7386.127</td> <td>63.06</td> <td>-4.61</td> <td>58.45</td> <td>74.00</td> <td>-15.55</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7386.665</td> <td>53.37</td> <td>-4.61</td> <td>48.76</td> <td>54.00</td> <td>-5.24</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.464	66.66	-9.78	56.88	74.00	-17.12	peak	P	2	4924.578	54.46	-9.78	44.68	54.00	-9.32	AVG	P	3	7386.127	63.06	-4.61	58.45	74.00	-15.55	peak	P	4 *	7386.665	53.37	-4.61	48.76	54.00	-5.24	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.464	66.66	-9.78	56.88	74.00	-17.12	peak	P																																								
2	4924.578	54.46	-9.78	44.68	54.00	-9.32	AVG	P																																								
3	7386.127	63.06	-4.61	58.45	74.00	-15.55	peak	P																																								
4 *	7386.665	53.37	-4.61	48.76	54.00	-5.24	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX G Mode 2462MHz Ant.1-SISO																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.362</td> <td>64.04</td> <td>-9.78</td> <td>54.26</td> <td>74.00</td> <td>-19.74</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.649</td> <td>55.67</td> <td>-9.78</td> <td>45.89</td> <td>54.00</td> <td>-8.11</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7386.264</td> <td>63.37</td> <td>-4.61</td> <td>58.76</td> <td>74.00</td> <td>-15.24</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7386.457</td> <td>54.29</td> <td>-4.61</td> <td>49.68</td> <td>54.00</td> <td>-4.32</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.362	64.04	-9.78	54.26	74.00	-19.74	peak	P	2	4924.649	55.67	-9.78	45.89	54.00	-8.11	AVG	P	3	7386.264	63.37	-4.61	58.76	74.00	-15.24	peak	P	4 *	7386.457	54.29	-4.61	49.68	54.00	-4.32	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.362	64.04	-9.78	54.26	74.00	-19.74	peak	P																																								
2	4924.649	55.67	-9.78	45.89	54.00	-8.11	AVG	P																																								
3	7386.264	63.37	-4.61	58.76	74.00	-15.24	peak	P																																								
4 *	7386.457	54.29	-4.61	49.68	54.00	-4.32	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX n(HT20) Mode 2412MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.184</td> <td>56.28</td> <td>-9.99</td> <td>46.29</td> <td>54.00</td> <td>-7.71</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4824.265</td> <td>65.70</td> <td>-9.99</td> <td>55.71</td> <td>74.00</td> <td>-18.29</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7236.127</td> <td>53.87</td> <td>-4.88</td> <td>48.99</td> <td>54.00</td> <td>-5.01</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7236.455</td> <td>64.29</td> <td>-4.88</td> <td>59.41</td> <td>74.00</td> <td>-14.59</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4824.184	56.28	-9.99	46.29	54.00	-7.71	AVG	P	2	4824.265	65.70	-9.99	55.71	74.00	-18.29	peak	P	3 *	7236.127	53.87	-4.88	48.99	54.00	-5.01	AVG	P	4	7236.455	64.29	-4.88	59.41	74.00	-14.59	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4824.184	56.28	-9.99	46.29	54.00	-7.71	AVG	P																																								
2	4824.265	65.70	-9.99	55.71	74.00	-18.29	peak	P																																								
3 *	7236.127	53.87	-4.88	48.99	54.00	-5.01	AVG	P																																								
4	7236.455	64.29	-4.88	59.41	74.00	-14.59	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX n(HT20) Mode 2412MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.485</td> <td>57.25</td> <td>-9.99</td> <td>47.26</td> <td>54.00</td> <td>-6.74</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4824.627</td> <td>65.28</td> <td>-9.99</td> <td>55.29</td> <td>74.00</td> <td>-18.71</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7236.545</td> <td>62.57</td> <td>-4.88</td> <td>57.69</td> <td>74.00</td> <td>-16.31</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7236.654</td> <td>54.51</td> <td>-4.88</td> <td>49.63</td> <td>54.00</td> <td>-4.37</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4824.485	57.25	-9.99	47.26	54.00	-6.74	AVG	P	2	4824.627	65.28	-9.99	55.29	74.00	-18.71	peak	P	3	7236.545	62.57	-4.88	57.69	74.00	-16.31	peak	P	4 *	7236.654	54.51	-4.88	49.63	54.00	-4.37	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4824.485	57.25	-9.99	47.26	54.00	-6.74	AVG	P																																								
2	4824.627	65.28	-9.99	55.29	74.00	-18.71	peak	P																																								
3	7236.545	62.57	-4.88	57.69	74.00	-16.31	peak	P																																								
4 *	7236.654	54.51	-4.88	49.63	54.00	-4.37	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX n(HT20) Mode 2437MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.167</td> <td>66.17</td> <td>-9.90</td> <td>56.27</td> <td>74.00</td> <td>-17.73</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.685</td> <td>56.18</td> <td>-9.90</td> <td>46.28</td> <td>54.00</td> <td>-7.72</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7311.345</td> <td>54.75</td> <td>-4.74</td> <td>50.01</td> <td>54.00</td> <td>-3.99</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7311.677</td> <td>63.43</td> <td>-4.74</td> <td>58.69</td> <td>74.00</td> <td>-15.31</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.167	66.17	-9.90	56.27	74.00	-17.73	peak	P	2	4874.685	56.18	-9.90	46.28	54.00	-7.72	AVG	P	3 *	7311.345	54.75	-4.74	50.01	54.00	-3.99	AVG	P	4	7311.677	63.43	-4.74	58.69	74.00	-15.31	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4874.167	66.17	-9.90	56.27	74.00	-17.73	peak	P																																								
2	4874.685	56.18	-9.90	46.28	54.00	-7.72	AVG	P																																								
3 *	7311.345	54.75	-4.74	50.01	54.00	-3.99	AVG	P																																								
4	7311.677	63.43	-4.74	58.69	74.00	-15.31	peak	P																																								
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit.																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX n(HT20) Mode 2437MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.145</td> <td>55.15</td> <td>-9.90</td> <td>45.25</td> <td>54.00</td> <td>-8.75</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.669</td> <td>66.13</td> <td>-9.90</td> <td>56.23</td> <td>74.00</td> <td>-17.77</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7311.127</td> <td>54.37</td> <td>-4.74</td> <td>49.63</td> <td>54.00</td> <td>-4.37</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7311.552</td> <td>63.37</td> <td>-4.74</td> <td>58.63</td> <td>74.00</td> <td>-15.37</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.145	55.15	-9.90	45.25	54.00	-8.75	AVG	P	2	4874.669	66.13	-9.90	56.23	74.00	-17.77	peak	P	3 *	7311.127	54.37	-4.74	49.63	54.00	-4.37	AVG	P	4	7311.552	63.37	-4.74	58.63	74.00	-15.37	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4874.145	55.15	-9.90	45.25	54.00	-8.75	AVG	P																																								
2	4874.669	66.13	-9.90	56.23	74.00	-17.77	peak	P																																								
3 *	7311.127	54.37	-4.74	49.63	54.00	-4.37	AVG	P																																								
4	7311.552	63.37	-4.74	58.63	74.00	-15.37	peak	P																																								
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit.																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX n(HT20) Mode 2462MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.318</td> <td>56.05</td> <td>-9.78</td> <td>46.27</td> <td>54.00</td> <td>-7.73</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.658</td> <td>65.41</td> <td>-9.78</td> <td>55.63</td> <td>74.00</td> <td>-18.37</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7386.243</td> <td>54.47</td> <td>-4.61</td> <td>49.86</td> <td>54.00</td> <td>-4.14</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7386.694</td> <td>63.27</td> <td>-4.61</td> <td>58.66</td> <td>74.00</td> <td>-15.34</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.318	56.05	-9.78	46.27	54.00	-7.73	AVG	P	2	4924.658	65.41	-9.78	55.63	74.00	-18.37	peak	P	3 *	7386.243	54.47	-4.61	49.86	54.00	-4.14	AVG	P	4	7386.694	63.27	-4.61	58.66	74.00	-15.34	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.318	56.05	-9.78	46.27	54.00	-7.73	AVG	P																																								
2	4924.658	65.41	-9.78	55.63	74.00	-18.37	peak	P																																								
3 *	7386.243	54.47	-4.61	49.86	54.00	-4.14	AVG	P																																								
4	7386.694	63.27	-4.61	58.66	74.00	-15.34	peak	P																																								
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit.																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX n(HT20) Mode 2462MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.326</td> <td>55.07</td> <td>-9.78</td> <td>45.29</td> <td>54.00</td> <td>-8.71</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.334</td> <td>65.05</td> <td>-9.78</td> <td>55.27</td> <td>74.00</td> <td>-18.73</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7386.278</td> <td>63.30</td> <td>-4.61</td> <td>58.69</td> <td>74.00</td> <td>-15.31</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7386.348</td> <td>53.17</td> <td>-4.61</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.326	55.07	-9.78	45.29	54.00	-8.71	AVG	P	2	4924.334	65.05	-9.78	55.27	74.00	-18.73	peak	P	3	7386.278	63.30	-4.61	58.69	74.00	-15.31	peak	P	4 *	7386.348	53.17	-4.61	48.56	54.00	-5.44	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.326	55.07	-9.78	45.29	54.00	-8.71	AVG	P																																								
2	4924.334	65.05	-9.78	55.27	74.00	-18.73	peak	P																																								
3	7386.278	63.30	-4.61	58.69	74.00	-15.31	peak	P																																								
4 *	7386.348	53.17	-4.61	48.56	54.00	-5.44	AVG	P																																								
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit.																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX n(HT40) Mode 2422MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.324</td> <td>65.40</td> <td>-9.94</td> <td>55.46</td> <td>74.00</td> <td>-18.54</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4844.452</td> <td>55.58</td> <td>-9.94</td> <td>45.64</td> <td>54.00</td> <td>-8.36</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7266.648</td> <td>62.88</td> <td>-4.82</td> <td>58.06</td> <td>74.00</td> <td>-15.94</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7266.631</td> <td>53.59</td> <td>-4.82</td> <td>48.77</td> <td>54.00</td> <td>-5.23</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4844.324	65.40	-9.94	55.46	74.00	-18.54	peak	P	2	4844.452	55.58	-9.94	45.64	54.00	-8.36	AVG	P	3	7266.648	62.88	-4.82	58.06	74.00	-15.94	peak	P	4 *	7266.631	53.59	-4.82	48.77	54.00	-5.23	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4844.324	65.40	-9.94	55.46	74.00	-18.54	peak	P																																								
2	4844.452	55.58	-9.94	45.64	54.00	-8.36	AVG	P																																								
3	7266.648	62.88	-4.82	58.06	74.00	-15.94	peak	P																																								
4 *	7266.631	53.59	-4.82	48.77	54.00	-5.23	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX n(HT40) Mode 2422MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.127</td> <td>65.91</td> <td>-9.94</td> <td>55.97</td> <td>74.00</td> <td>-18.03</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4844.715</td> <td>56.47</td> <td>-9.94</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7266.445</td> <td>63.61</td> <td>-4.82</td> <td>58.79</td> <td>74.00</td> <td>-15.21</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7266.524</td> <td>54.51</td> <td>-4.82</td> <td>49.69</td> <td>54.00</td> <td>-4.31</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4844.127	65.91	-9.94	55.97	74.00	-18.03	peak	P	2	4844.715	56.47	-9.94	46.53	54.00	-7.47	AVG	P	3	7266.445	63.61	-4.82	58.79	74.00	-15.21	peak	P	4 *	7266.524	54.51	-4.82	49.69	54.00	-4.31	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4844.127	65.91	-9.94	55.97	74.00	-18.03	peak	P																																								
2	4844.715	56.47	-9.94	46.53	54.00	-7.47	AVG	P																																								
3	7266.445	63.61	-4.82	58.79	74.00	-15.21	peak	P																																								
4 *	7266.524	54.51	-4.82	49.69	54.00	-4.31	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX n(HT40) Mode 2437MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.123</td> <td>66.07</td> <td>-9.90</td> <td>56.17</td> <td>74.00</td> <td>-17.83</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.784</td> <td>56.01</td> <td>-9.90</td> <td>46.11</td> <td>54.00</td> <td>-7.89</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7311.456</td> <td>64.39</td> <td>-4.74</td> <td>59.65</td> <td>74.00</td> <td>-14.35</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7311.966</td> <td>54.87</td> <td>-4.74</td> <td>50.13</td> <td>54.00</td> <td>-3.87</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.123	66.07	-9.90	56.17	74.00	-17.83	peak	P	2	4874.784	56.01	-9.90	46.11	54.00	-7.89	AVG	P	3	7311.456	64.39	-4.74	59.65	74.00	-14.35	peak	P	4 *	7311.966	54.87	-4.74	50.13	54.00	-3.87	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4874.123	66.07	-9.90	56.17	74.00	-17.83	peak	P																																								
2	4874.784	56.01	-9.90	46.11	54.00	-7.89	AVG	P																																								
3	7311.456	64.39	-4.74	59.65	74.00	-14.35	peak	P																																								
4 *	7311.966	54.87	-4.74	50.13	54.00	-3.87	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX n(HT40) Mode 2437MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.442</td> <td>66.13</td> <td>-9.90</td> <td>56.23</td> <td>74.00</td> <td>-17.77</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.677</td> <td>55.35</td> <td>-9.90</td> <td>45.45</td> <td>54.00</td> <td>-8.55</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7311.344</td> <td>54.86</td> <td>-4.74</td> <td>50.12</td> <td>54.00</td> <td>-3.88</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7311.586</td> <td>64.42</td> <td>-4.74</td> <td>59.68</td> <td>74.00</td> <td>-14.32</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.442	66.13	-9.90	56.23	74.00	-17.77	peak	P	2	4874.677	55.35	-9.90	45.45	54.00	-8.55	AVG	P	3 *	7311.344	54.86	-4.74	50.12	54.00	-3.88	AVG	P	4	7311.586	64.42	-4.74	59.68	74.00	-14.32	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4874.442	66.13	-9.90	56.23	74.00	-17.77	peak	P																																								
2	4874.677	55.35	-9.90	45.45	54.00	-8.55	AVG	P																																								
3 *	7311.344	54.86	-4.74	50.12	54.00	-3.88	AVG	P																																								
4	7311.586	64.42	-4.74	59.68	74.00	-14.32	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX n(HT40) Mode 2452MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.127</td> <td>56.60</td> <td>-9.84</td> <td>46.76</td> <td>54.00</td> <td>-7.24</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4904.512</td> <td>65.20</td> <td>-9.84</td> <td>55.36</td> <td>74.00</td> <td>-18.64</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7356.568</td> <td>63.39</td> <td>-4.66</td> <td>58.73</td> <td>74.00</td> <td>-15.27</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7356.568</td> <td>54.88</td> <td>-4.66</td> <td>50.22</td> <td>54.00</td> <td>-3.78</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4904.127	56.60	-9.84	46.76	54.00	-7.24	AVG	P	2	4904.512	65.20	-9.84	55.36	74.00	-18.64	peak	P	3	7356.568	63.39	-4.66	58.73	74.00	-15.27	peak	P	4 *	7356.568	54.88	-4.66	50.22	54.00	-3.78	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4904.127	56.60	-9.84	46.76	54.00	-7.24	AVG	P																																								
2	4904.512	65.20	-9.84	55.36	74.00	-18.64	peak	P																																								
3	7356.568	63.39	-4.66	58.73	74.00	-15.27	peak	P																																								
4 *	7356.568	54.88	-4.66	50.22	54.00	-3.78	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX n(HT40) Mode 2452MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.178</td> <td>64.80</td> <td>-9.84</td> <td>54.96</td> <td>74.00</td> <td>-19.04</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4904.678</td> <td>54.96</td> <td>-9.84</td> <td>45.12</td> <td>54.00</td> <td>-8.88</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7356.344</td> <td>64.52</td> <td>-4.66</td> <td>59.86</td> <td>74.00</td> <td>-14.14</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7356.855</td> <td>54.76</td> <td>-4.66</td> <td>50.10</td> <td>54.00</td> <td>-3.90</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4904.178	64.80	-9.84	54.96	74.00	-19.04	peak	P	2	4904.678	54.96	-9.84	45.12	54.00	-8.88	AVG	P	3	7356.344	64.52	-4.66	59.86	74.00	-14.14	peak	P	4 *	7356.855	54.76	-4.66	50.10	54.00	-3.90	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4904.178	64.80	-9.84	54.96	74.00	-19.04	peak	P																																								
2	4904.678	54.96	-9.84	45.12	54.00	-8.88	AVG	P																																								
3	7356.344	64.52	-4.66	59.86	74.00	-14.14	peak	P																																								
4 *	7356.855	54.76	-4.66	50.10	54.00	-3.90	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX VHT20 Mode 2412MHz Ant.1+2-SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4824.237	58.57	-9.99	48.58	54.00	-5.42	AVG	P
2	4824.512	67.12	-9.99	57.13	74.00	-16.87	peak	P
3	7311.354	63.96	-4.61	59.35	74.00	-14.65	peak	P
4 *	7311.421	53.54	-4.61	48.93	54.00	-5.07	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX VHT20 Mode 2412MHz Ant.1+2-SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4824.117	67.68	-9.99	57.69	74.00	-16.31	peak	P
2	4824.687	57.94	-9.99	47.95	54.00	-6.05	AVG	P
3	7311.259	64.24	-4.61	59.63	74.00	-14.37	peak	P
4 *	7311.259	53.77	-4.61	49.16	54.00	-4.84	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX VHT20 Mode 2437MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.318</td> <td>67.86</td> <td>-9.90</td> <td>57.96</td> <td>74.00</td> <td>-16.04</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>4874.635</td> <td>58.43</td> <td>-9.90</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7311.525</td> <td>62.44</td> <td>-4.61</td> <td>57.83</td> <td>74.00</td> <td>-16.17</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4</td> <td>7311.785</td> <td>52.77</td> <td>-4.61</td> <td>48.16</td> <td>54.00</td> <td>-5.84</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.318	67.86	-9.90	57.96	74.00	-16.04	peak	P	2 *	4874.635	58.43	-9.90	48.53	54.00	-5.47	AVG	P	3	7311.525	62.44	-4.61	57.83	74.00	-16.17	peak	P	4	7311.785	52.77	-4.61	48.16	54.00	-5.84	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4874.318	67.86	-9.90	57.96	74.00	-16.04	peak	P																																								
2 *	4874.635	58.43	-9.90	48.53	54.00	-5.47	AVG	P																																								
3	7311.525	62.44	-4.61	57.83	74.00	-16.17	peak	P																																								
4	7311.785	52.77	-4.61	48.16	54.00	-5.84	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX VHT20 Mode 2437MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.146</td> <td>57.43</td> <td>-9.90</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.532</td> <td>68.06</td> <td>-9.90</td> <td>58.16</td> <td>74.00</td> <td>-15.84</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7311.243</td> <td>63.34</td> <td>-4.61</td> <td>58.73</td> <td>74.00</td> <td>-15.27</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7311.536</td> <td>53.14</td> <td>-4.61</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.146	57.43	-9.90	47.53	54.00	-6.47	AVG	P	2	4874.532	68.06	-9.90	58.16	74.00	-15.84	peak	P	3	7311.243	63.34	-4.61	58.73	74.00	-15.27	peak	P	4 *	7311.536	53.14	-4.61	48.53	54.00	-5.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4874.146	57.43	-9.90	47.53	54.00	-6.47	AVG	P																																								
2	4874.532	68.06	-9.90	58.16	74.00	-15.84	peak	P																																								
3	7311.243	63.34	-4.61	58.73	74.00	-15.27	peak	P																																								
4 *	7311.536	53.14	-4.61	48.53	54.00	-5.47	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX VHT20 Mode 2462MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.239</td> <td>57.97</td> <td>-9.78</td> <td>48.19</td> <td>54.00</td> <td>-5.81</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.685</td> <td>68.21</td> <td>-9.78</td> <td>58.43</td> <td>74.00</td> <td>-15.57</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7386.251</td> <td>63.20</td> <td>-4.47</td> <td>58.73</td> <td>74.00</td> <td>-15.27</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7386.597</td> <td>53.59</td> <td>-4.47</td> <td>49.12</td> <td>54.00</td> <td>-4.88</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.239	57.97	-9.78	48.19	54.00	-5.81	AVG	P	2	4924.685	68.21	-9.78	58.43	74.00	-15.57	peak	P	3	7386.251	63.20	-4.47	58.73	74.00	-15.27	peak	P	4 *	7386.597	53.59	-4.47	49.12	54.00	-4.88	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.239	57.97	-9.78	48.19	54.00	-5.81	AVG	P																																								
2	4924.685	68.21	-9.78	58.43	74.00	-15.57	peak	P																																								
3	7386.251	63.20	-4.47	58.73	74.00	-15.27	peak	P																																								
4 *	7386.597	53.59	-4.47	49.12	54.00	-4.88	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX VHT20 Mode 2462MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.576</td> <td>57.97</td> <td>-9.78</td> <td>48.19</td> <td>54.00</td> <td>-5.81</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.658</td> <td>67.71</td> <td>-9.78</td> <td>57.93</td> <td>74.00</td> <td>-16.07</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7386.227</td> <td>52.99</td> <td>-4.47</td> <td>48.52</td> <td>54.00</td> <td>-5.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7386.367</td> <td>62.00</td> <td>-4.47</td> <td>57.53</td> <td>74.00</td> <td>-16.47</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.576	57.97	-9.78	48.19	54.00	-5.81	AVG	P	2	4924.658	67.71	-9.78	57.93	74.00	-16.07	peak	P	3 *	7386.227	52.99	-4.47	48.52	54.00	-5.48	AVG	P	4	7386.367	62.00	-4.47	57.53	74.00	-16.47	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.576	57.97	-9.78	48.19	54.00	-5.81	AVG	P																																								
2	4924.658	67.71	-9.78	57.93	74.00	-16.07	peak	P																																								
3 *	7386.227	52.99	-4.47	48.52	54.00	-5.48	AVG	P																																								
4	7386.367	62.00	-4.47	57.53	74.00	-16.47	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX VHT40 Mode 2422MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.238</td> <td>68.46</td> <td>-9.94</td> <td>58.52</td> <td>74.00</td> <td>-15.48</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4844.537</td> <td>57.32</td> <td>-9.94</td> <td>47.38</td> <td>54.00</td> <td>-6.62</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7266.175</td> <td>64.25</td> <td>-4.69</td> <td>59.56</td> <td>74.00</td> <td>-14.44</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7266.694</td> <td>53.38</td> <td>-4.69</td> <td>48.69</td> <td>54.00</td> <td>-5.31</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4844.238	68.46	-9.94	58.52	74.00	-15.48	peak	P	2	4844.537	57.32	-9.94	47.38	54.00	-6.62	AVG	P	3	7266.175	64.25	-4.69	59.56	74.00	-14.44	peak	P	4 *	7266.694	53.38	-4.69	48.69	54.00	-5.31	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4844.238	68.46	-9.94	58.52	74.00	-15.48	peak	P																																								
2	4844.537	57.32	-9.94	47.38	54.00	-6.62	AVG	P																																								
3	7266.175	64.25	-4.69	59.56	74.00	-14.44	peak	P																																								
4 *	7266.694	53.38	-4.69	48.69	54.00	-5.31	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX VHT40 Mode 2422MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.113</td> <td>57.32</td> <td>-9.94</td> <td>47.38</td> <td>54.00</td> <td>-6.62</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4844.341</td> <td>68.07</td> <td>-9.94</td> <td>58.13</td> <td>74.00</td> <td>-15.87</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7266.254</td> <td>62.85</td> <td>-4.69</td> <td>58.16</td> <td>74.00</td> <td>-15.84</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7266.514</td> <td>52.22</td> <td>-4.69</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4844.113	57.32	-9.94	47.38	54.00	-6.62	AVG	P	2	4844.341	68.07	-9.94	58.13	74.00	-15.87	peak	P	3	7266.254	62.85	-4.69	58.16	74.00	-15.84	peak	P	4 *	7266.514	52.22	-4.69	47.53	54.00	-6.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4844.113	57.32	-9.94	47.38	54.00	-6.62	AVG	P																																								
2	4844.341	68.07	-9.94	58.13	74.00	-15.87	peak	P																																								
3	7266.254	62.85	-4.69	58.16	74.00	-15.84	peak	P																																								
4 *	7266.514	52.22	-4.69	47.53	54.00	-6.47	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX VHT40 Mode 2437MHz Ant.1+2-SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.214	67.88	-9.90	57.98	74.00	-16.02	peak	P
2	4874.535	57.25	-9.90	47.35	54.00	-6.65	AVG	P
3 *	7311.542	54.14	-4.61	49.53	54.00	-4.47	AVG	P
4	7311.564	63.53	-4.61	58.92	74.00	-15.08	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX VHT40 Mode 2437MHz Ant.1+2-SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.635	68.33	-9.90	58.43	74.00	-15.57	peak	P
2 *	4874.635	59.53	-9.90	49.63	54.00	-4.37	AVG	P
3	7311.378	53.16	-4.61	48.55	54.00	-5.45	AVG	P
4	7311.623	62.19	-4.61	57.58	74.00	-16.42	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX VHT40 Mode 2452MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.571</td> <td>57.72</td> <td>-9.84</td> <td>47.88</td> <td>54.00</td> <td>-6.12</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4904.635</td> <td>67.96</td> <td>-9.84</td> <td>58.12</td> <td>74.00</td> <td>-15.88</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7356.278</td> <td>53.15</td> <td>-4.52</td> <td>48.63</td> <td>54.00</td> <td>-5.37</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7356.625</td> <td>62.04</td> <td>-4.52</td> <td>57.52</td> <td>74.00</td> <td>-16.48</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4904.571	57.72	-9.84	47.88	54.00	-6.12	AVG	P	2	4904.635	67.96	-9.84	58.12	74.00	-15.88	peak	P	3 *	7356.278	53.15	-4.52	48.63	54.00	-5.37	AVG	P	4	7356.625	62.04	-4.52	57.52	74.00	-16.48	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4904.571	57.72	-9.84	47.88	54.00	-6.12	AVG	P																																								
2	4904.635	67.96	-9.84	58.12	74.00	-15.88	peak	P																																								
3 *	7356.278	53.15	-4.52	48.63	54.00	-5.37	AVG	P																																								
4	7356.625	62.04	-4.52	57.52	74.00	-16.48	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX VHT40 Mode 2452MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.147</td> <td>67.27</td> <td>-9.84</td> <td>57.43</td> <td>74.00</td> <td>-16.57</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4904.535</td> <td>58.40</td> <td>-9.84</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7356.454</td> <td>54.34</td> <td>-4.52</td> <td>49.82</td> <td>54.00</td> <td>-4.18</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7356.574</td> <td>62.90</td> <td>-4.52</td> <td>58.38</td> <td>74.00</td> <td>-15.62</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4904.147	67.27	-9.84	57.43	74.00	-16.57	peak	P	2	4904.535	58.40	-9.84	48.56	54.00	-5.44	AVG	P	3 *	7356.454	54.34	-4.52	49.82	54.00	-4.18	AVG	P	4	7356.574	62.90	-4.52	58.38	74.00	-15.62	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4904.147	67.27	-9.84	57.43	74.00	-16.57	peak	P																																								
2	4904.535	58.40	-9.84	48.56	54.00	-5.44	AVG	P																																								
3 *	7356.454	54.34	-4.52	49.82	54.00	-4.18	AVG	P																																								
4	7356.574	62.90	-4.52	58.38	74.00	-15.62	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX ax(HE20) Mode 2412MHz Ant.1+2 -SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.126</td> <td>65.61</td> <td>-9.99</td> <td>55.62</td> <td>74.00</td> <td>-18.38</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4824.662</td> <td>56.55</td> <td>-9.99</td> <td>46.56</td> <td>54.00</td> <td>-7.44</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7236.345</td> <td>54.59</td> <td>-4.88</td> <td>49.71</td> <td>54.00</td> <td>-4.29</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7236.657</td> <td>63.52</td> <td>-4.88</td> <td>58.64</td> <td>74.00</td> <td>-15.36</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4824.126	65.61	-9.99	55.62	74.00	-18.38	peak	P	2	4824.662	56.55	-9.99	46.56	54.00	-7.44	AVG	P	3 *	7236.345	54.59	-4.88	49.71	54.00	-4.29	AVG	P	4	7236.657	63.52	-4.88	58.64	74.00	-15.36	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4824.126	65.61	-9.99	55.62	74.00	-18.38	peak	P																																								
2	4824.662	56.55	-9.99	46.56	54.00	-7.44	AVG	P																																								
3 *	7236.345	54.59	-4.88	49.71	54.00	-4.29	AVG	P																																								
4	7236.657	63.52	-4.88	58.64	74.00	-15.36	peak	P																																								
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit.																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX ax(HE20) Mode 2412MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.165</td> <td>64.55</td> <td>-9.99</td> <td>54.56</td> <td>74.00</td> <td>-19.44</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4824.645</td> <td>56.18</td> <td>-9.99</td> <td>46.19</td> <td>54.00</td> <td>-7.81</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7236.353</td> <td>54.90</td> <td>-4.88</td> <td>50.02</td> <td>54.00</td> <td>-3.98</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7236.454</td> <td>64.54</td> <td>-4.88</td> <td>59.66</td> <td>74.00</td> <td>-14.34</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4824.165	64.55	-9.99	54.56	74.00	-19.44	peak	P	2	4824.645	56.18	-9.99	46.19	54.00	-7.81	AVG	P	3 *	7236.353	54.90	-4.88	50.02	54.00	-3.98	AVG	P	4	7236.454	64.54	-4.88	59.66	74.00	-14.34	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4824.165	64.55	-9.99	54.56	74.00	-19.44	peak	P																																								
2	4824.645	56.18	-9.99	46.19	54.00	-7.81	AVG	P																																								
3 *	7236.353	54.90	-4.88	50.02	54.00	-3.98	AVG	P																																								
4	7236.454	64.54	-4.88	59.66	74.00	-14.34	peak	P																																								
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit.																																																



Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX ax(HE20) Mode 2437MHz Ant.1+2-SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.171	55.17	-9.90	45.27	54.00	-8.73	AVG	P
2	4874.265	64.19	-9.90	54.29	74.00	-19.71	peak	P
3	7311.685	63.90	-4.74	59.16	74.00	-14.84	peak	P
4 *	7311.851	54.11	-4.74	49.37	54.00	-4.63	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX ax(HE20) Mode 2437MHz Ant.1+2-SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.412	56.44	-9.90	46.54	54.00	-7.46	AVG	P
2	4874.657	65.35	-9.90	55.45	74.00	-18.55	peak	P
3	7311.117	63.41	-4.74	58.67	74.00	-15.33	peak	P
4 *	7311.627	54.08	-4.74	49.34	54.00	-4.66	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX ax(HE20) Mode 2462MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.144</td> <td>66.16</td> <td>-9.78</td> <td>56.38</td> <td>74.00</td> <td>-17.62</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.542</td> <td>57.31</td> <td>-9.78</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7386.612</td> <td>62.54</td> <td>-4.61</td> <td>57.93</td> <td>74.00</td> <td>-16.07</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7386.668</td> <td>53.40</td> <td>-4.61</td> <td>48.79</td> <td>54.00</td> <td>-5.21</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.144	66.16	-9.78	56.38	74.00	-17.62	peak	P	2	4924.542	57.31	-9.78	47.53	54.00	-6.47	AVG	P	3	7386.612	62.54	-4.61	57.93	74.00	-16.07	peak	P	4 *	7386.668	53.40	-4.61	48.79	54.00	-5.21	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.144	66.16	-9.78	56.38	74.00	-17.62	peak	P																																								
2	4924.542	57.31	-9.78	47.53	54.00	-6.47	AVG	P																																								
3	7386.612	62.54	-4.61	57.93	74.00	-16.07	peak	P																																								
4 *	7386.668	53.40	-4.61	48.79	54.00	-5.21	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX ax(HE20) Mode 2462MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.541</td> <td>56.23</td> <td>-9.78</td> <td>46.45</td> <td>54.00</td> <td>-7.55</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.711</td> <td>64.24</td> <td>-9.78</td> <td>54.46</td> <td>74.00</td> <td>-19.54</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7386.458</td> <td>54.38</td> <td>-4.61</td> <td>49.77</td> <td>54.00</td> <td>-4.23</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7386.534</td> <td>64.29</td> <td>-4.61</td> <td>59.68</td> <td>74.00</td> <td>-14.32</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.541	56.23	-9.78	46.45	54.00	-7.55	AVG	P	2	4924.711	64.24	-9.78	54.46	74.00	-19.54	peak	P	3 *	7386.458	54.38	-4.61	49.77	54.00	-4.23	AVG	P	4	7386.534	64.29	-4.61	59.68	74.00	-14.32	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.541	56.23	-9.78	46.45	54.00	-7.55	AVG	P																																								
2	4924.711	64.24	-9.78	54.46	74.00	-19.54	peak	P																																								
3 *	7386.458	54.38	-4.61	49.77	54.00	-4.23	AVG	P																																								
4	7386.534	64.29	-4.61	59.68	74.00	-14.32	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX ax(HE40) Mode 2422MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.337</td> <td>56.40</td> <td>-9.94</td> <td>46.46</td> <td>54.00</td> <td>-7.54</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4844.567</td> <td>67.38</td> <td>-9.94</td> <td>57.44</td> <td>74.00</td> <td>-16.56</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7266.644</td> <td>63.61</td> <td>-4.82</td> <td>58.79</td> <td>74.00</td> <td>-15.21</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7266.645</td> <td>54.43</td> <td>-4.82</td> <td>49.61</td> <td>54.00</td> <td>-4.39</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4844.337	56.40	-9.94	46.46	54.00	-7.54	AVG	P	2	4844.567	67.38	-9.94	57.44	74.00	-16.56	peak	P	3	7266.644	63.61	-4.82	58.79	74.00	-15.21	peak	P	4 *	7266.645	54.43	-4.82	49.61	54.00	-4.39	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4844.337	56.40	-9.94	46.46	54.00	-7.54	AVG	P																																								
2	4844.567	67.38	-9.94	57.44	74.00	-16.56	peak	P																																								
3	7266.644	63.61	-4.82	58.79	74.00	-15.21	peak	P																																								
4 *	7266.645	54.43	-4.82	49.61	54.00	-4.39	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX ax(HE40) Mode 2422MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.127</td> <td>55.62</td> <td>-9.94</td> <td>45.68</td> <td>54.00</td> <td>-8.32</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4844.541</td> <td>66.68</td> <td>-9.94</td> <td>56.74</td> <td>74.00</td> <td>-17.26</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7266.254</td> <td>54.36</td> <td>-4.82</td> <td>49.54</td> <td>54.00</td> <td>-4.46</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7266.534</td> <td>63.17</td> <td>-4.82</td> <td>58.35</td> <td>74.00</td> <td>-15.65</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4844.127	55.62	-9.94	45.68	54.00	-8.32	AVG	P	2	4844.541	66.68	-9.94	56.74	74.00	-17.26	peak	P	3 *	7266.254	54.36	-4.82	49.54	54.00	-4.46	AVG	P	4	7266.534	63.17	-4.82	58.35	74.00	-15.65	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4844.127	55.62	-9.94	45.68	54.00	-8.32	AVG	P																																								
2	4844.541	66.68	-9.94	56.74	74.00	-17.26	peak	P																																								
3 *	7266.254	54.36	-4.82	49.54	54.00	-4.46	AVG	P																																								
4	7266.534	63.17	-4.82	58.35	74.00	-15.65	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX ax(HE40) Mode 2437MHz Ant.1+2-SDM		
Remark:	<ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.476	55.46	-9.90	45.56	54.00	-8.44	AVG	P
2	4874.521	66.17	-9.90	56.27	74.00	-17.73	peak	P
3 *	7311.568	54.50	-4.74	49.76	54.00	-4.24	AVG	P
4	7311.657	64.42	-4.74	59.68	74.00	-14.32	peak	P

Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX ax(HE40) Mode 2437MHz Ant.1+2-SDM		
Remark:	<ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.127	67.53	-9.90	57.63	74.00	-16.37	peak	P
2	4874.635	56.43	-9.90	46.53	54.00	-7.47	AVG	P
3	7311.113	60.41	-4.74	55.67	74.00	-18.33	peak	P
4 *	7311.564	53.70	-4.74	48.96	54.00	-5.04	AVG	P



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX ax(HE40) Mode 2452MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.178</td> <td>65.30</td> <td>-9.84</td> <td>55.46</td> <td>74.00</td> <td>-18.54</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4904.657</td> <td>56.36</td> <td>-9.84</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7356.658</td> <td>63.29</td> <td>-4.66</td> <td>58.63</td> <td>74.00</td> <td>-15.37</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7356.756</td> <td>54.21</td> <td>-4.66</td> <td>49.55</td> <td>54.00</td> <td>-4.45</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4904.178	65.30	-9.84	55.46	74.00	-18.54	peak	P	2	4904.657	56.36	-9.84	46.52	54.00	-7.48	AVG	P	3	7356.658	63.29	-4.66	58.63	74.00	-15.37	peak	P	4 *	7356.756	54.21	-4.66	49.55	54.00	-4.45	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4904.178	65.30	-9.84	55.46	74.00	-18.54	peak	P																																								
2	4904.657	56.36	-9.84	46.52	54.00	-7.48	AVG	P																																								
3	7356.658	63.29	-4.66	58.63	74.00	-15.37	peak	P																																								
4 *	7356.756	54.21	-4.66	49.55	54.00	-4.45	AVG	P																																								
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit.																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX ax(HE40) Mode 2452MHz Ant.1+2-SDM																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.384</td> <td>55.58</td> <td>-9.84</td> <td>45.74</td> <td>54.00</td> <td>-8.26</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4904.531</td> <td>66.27</td> <td>-9.84</td> <td>56.43</td> <td>74.00</td> <td>-17.57</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7356.558</td> <td>64.52</td> <td>-4.66</td> <td>59.86</td> <td>74.00</td> <td>-14.14</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7356.715</td> <td>53.43</td> <td>-4.66</td> <td>48.77</td> <td>54.00</td> <td>-5.23</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4904.384	55.58	-9.84	45.74	54.00	-8.26	AVG	P	2	4904.531	66.27	-9.84	56.43	74.00	-17.57	peak	P	3	7356.558	64.52	-4.66	59.86	74.00	-14.14	peak	P	4 *	7356.715	53.43	-4.66	48.77	54.00	-5.23	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4904.384	55.58	-9.84	45.74	54.00	-8.26	AVG	P																																								
2	4904.531	66.27	-9.84	56.43	74.00	-17.57	peak	P																																								
3	7356.558	64.52	-4.66	59.86	74.00	-14.14	peak	P																																								
4 *	7356.715	53.43	-4.66	48.77	54.00	-5.23	AVG	P																																								
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit.																																																



Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4824.124	62.95	-9.99	52.96	74.00	-21.04	peak	P
2	4824.356	56.52	-9.99	46.53	54.00	-7.47	AVG	P
3	7236.455	62.11	-4.88	57.23	74.00	-16.77	peak	P
4 *	7236.678	53.51	-4.88	48.63	54.00	-5.37	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4824.345	65.34	-9.99	55.35	74.00	-18.65	peak	P
2	4824.654	56.11	-9.99	46.12	54.00	-7.88	AVG	P
3 *	7236.432	53.81	-4.88	48.93	54.00	-5.07	AVG	P
4	7236.457	61.20	-4.88	56.32	74.00	-17.68	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	23.9°C	Relative Humidity:	54%																																																		
Test Voltage:	AC 120V/60Hz																																																				
Ant. Pol.	Horizontal																																																				
Test Mode:	TX B Mode 2437MHz Ant.1+2-CDD																																																				
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.351</td> <td>54.43</td> <td>-9.90</td> <td>44.53</td> <td>54.00</td> <td>-9.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.531</td> <td>64.53</td> <td>-9.90</td> <td>54.63</td> <td>74.00</td> <td>-19.37</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7311.213</td> <td>53.43</td> <td>-4.74</td> <td>48.69</td> <td>54.00</td> <td>-5.31</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7311.554</td> <td>62.57</td> <td>-4.74</td> <td>57.83</td> <td>74.00</td> <td>-16.17</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.351	54.43	-9.90	44.53	54.00	-9.47	AVG	P	2	4874.531	64.53	-9.90	54.63	74.00	-19.37	peak	P	3 *	7311.213	53.43	-4.74	48.69	54.00	-5.31	AVG	P	4	7311.554	62.57	-4.74	57.83	74.00	-16.17	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																													
1	4874.351	54.43	-9.90	44.53	54.00	-9.47	AVG	P																																													
2	4874.531	64.53	-9.90	54.63	74.00	-19.37	peak	P																																													
3 *	7311.213	53.43	-4.74	48.69	54.00	-5.31	AVG	P																																													
4	7311.554	62.57	-4.74	57.83	74.00	-16.17	peak	P																																													
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																					

Temperature:	23.9°C	Relative Humidity:	54%																																																		
Test Voltage:	AC 120V/60Hz																																																				
Ant. Pol.	Vertical																																																				
Test Mode:	TX B Mode 2437MHz Ant.1+2-CDD																																																				
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.241</td> <td>54.86</td> <td>-9.90</td> <td>44.96</td> <td>54.00</td> <td>-9.04</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.712</td> <td>65.53</td> <td>-9.90</td> <td>55.63</td> <td>74.00</td> <td>-18.37</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7311.215</td> <td>62.70</td> <td>-4.74</td> <td>57.96</td> <td>74.00</td> <td>-16.04</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7311.442</td> <td>53.43</td> <td>-4.74</td> <td>48.69</td> <td>54.00</td> <td>-5.31</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.241	54.86	-9.90	44.96	54.00	-9.04	AVG	P	2	4874.712	65.53	-9.90	55.63	74.00	-18.37	peak	P	3	7311.215	62.70	-4.74	57.96	74.00	-16.04	peak	P	4 *	7311.442	53.43	-4.74	48.69	54.00	-5.31	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																													
1	4874.241	54.86	-9.90	44.96	54.00	-9.04	AVG	P																																													
2	4874.712	65.53	-9.90	55.63	74.00	-18.37	peak	P																																													
3	7311.215	62.70	-4.74	57.96	74.00	-16.04	peak	P																																													
4 *	7311.442	53.43	-4.74	48.69	54.00	-5.31	AVG	P																																													
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																					



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX B Mode 2462MHz Ant.1+2-CDD																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.234</td> <td>64.30</td> <td>-9.78</td> <td>54.52</td> <td>74.00</td> <td>-19.48</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.241</td> <td>56.31</td> <td>-9.78</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7386.224</td> <td>62.24</td> <td>-4.61</td> <td>57.63</td> <td>74.00</td> <td>-16.37</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7386.341</td> <td>53.17</td> <td>-4.61</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.234	64.30	-9.78	54.52	74.00	-19.48	peak	P	2	4924.241	56.31	-9.78	46.53	54.00	-7.47	AVG	P	3	7386.224	62.24	-4.61	57.63	74.00	-16.37	peak	P	4 *	7386.341	53.17	-4.61	48.56	54.00	-5.44	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.234	64.30	-9.78	54.52	74.00	-19.48	peak	P																																								
2	4924.241	56.31	-9.78	46.53	54.00	-7.47	AVG	P																																								
3	7386.224	62.24	-4.61	57.63	74.00	-16.37	peak	P																																								
4 *	7386.341	53.17	-4.61	48.56	54.00	-5.44	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX B Mode 2462MHz Ant.1+2-CDD																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.652</td> <td>64.99</td> <td>-9.78</td> <td>55.21</td> <td>74.00</td> <td>-18.79</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.771</td> <td>56.10</td> <td>-9.78</td> <td>46.32</td> <td>54.00</td> <td>-7.68</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7386.117</td> <td>54.24</td> <td>-4.61</td> <td>49.63</td> <td>54.00</td> <td>-4.37</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7386.254</td> <td>63.57</td> <td>-4.61</td> <td>58.96</td> <td>74.00</td> <td>-15.04</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.652	64.99	-9.78	55.21	74.00	-18.79	peak	P	2	4924.771	56.10	-9.78	46.32	54.00	-7.68	AVG	P	3 *	7386.117	54.24	-4.61	49.63	54.00	-4.37	AVG	P	4	7386.254	63.57	-4.61	58.96	74.00	-15.04	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.652	64.99	-9.78	55.21	74.00	-18.79	peak	P																																								
2	4924.771	56.10	-9.78	46.32	54.00	-7.68	AVG	P																																								
3 *	7386.117	54.24	-4.61	49.63	54.00	-4.37	AVG	P																																								
4	7386.254	63.57	-4.61	58.96	74.00	-15.04	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2412MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4824.157	55.22	-9.99	45.23	54.00	-8.77	AVG	P
2	4824.512	64.51	-9.99	54.52	74.00	-19.48	peak	P
3	7236.123	62.74	-4.88	57.86	74.00	-16.14	peak	P
4 *	7236.725	53.41	-4.88	48.53	54.00	-5.47	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2412MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4824.652	56.22	-9.99	46.23	54.00	-7.77	AVG	P
2	4824.885	63.62	-9.99	53.63	74.00	-20.37	peak	P
3 *	7236.321	53.21	-4.88	48.33	54.00	-5.67	AVG	P
4	7236.655	62.16	-4.88	57.28	74.00	-16.72	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2437MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.625	55.12	-9.90	45.22	54.00	-8.78	AVG	P
2	4874.726	65.03	-9.90	55.13	74.00	-18.87	peak	P
3	7311.145	61.61	-4.74	56.87	74.00	-17.13	peak	P
4 *	7311.924	54.62	-4.74	49.88	54.00	-4.12	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2437MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.332	54.13	-9.90	44.23	54.00	-9.77	AVG	P
2	4874.574	65.52	-9.90	55.62	74.00	-18.38	peak	P
3 *	7311.241	53.73	-4.74	48.99	54.00	-5.01	AVG	P
4	7311.825	62.67	-4.74	57.93	74.00	-16.07	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	23.9°C	Relative Humidity:	54%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX G Mode 2462MHz Ant.1+2-CDD							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4924.251	67.29	-9.78	57.51	74.00	-16.49	peak	P
2	4924.547	55.30	-9.78	45.52	54.00	-8.48	AVG	P
3	7386.257	63.15	-4.61	58.54	74.00	-15.46	peak	P
4 *	7386.642	52.73	-4.61	48.12	54.00	-5.88	AVG	P
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	54%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX G Mode 2462MHz Ant.1+2-CDD							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4924.242	55.03	-9.78	45.25	54.00	-8.75	AVG	P
2	4924.412	64.41	-9.78	54.63	74.00	-19.37	peak	P
3 *	7386.542	53.60	-4.61	48.99	54.00	-5.01	AVG	P
4	7386.652	62.47	-4.61	57.86	74.00	-16.14	peak	P
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.								
5. No report for the emission which more than 20dB below the prescribed limit.								



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX n(HT20) Mode 2412MHz Ant.1+2-CDD																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.145</td> <td>64.51</td> <td>-9.99</td> <td>54.52</td> <td>74.00</td> <td>-19.48</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4824.557</td> <td>57.52</td> <td>-9.99</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7236.385</td> <td>53.63</td> <td>-4.88</td> <td>48.75</td> <td>54.00</td> <td>-5.25</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7236.574</td> <td>63.34</td> <td>-4.88</td> <td>58.46</td> <td>74.00</td> <td>-15.54</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4824.145	64.51	-9.99	54.52	74.00	-19.48	peak	P	2	4824.557	57.52	-9.99	47.53	54.00	-6.47	AVG	P	3 *	7236.385	53.63	-4.88	48.75	54.00	-5.25	AVG	P	4	7236.574	63.34	-4.88	58.46	74.00	-15.54	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4824.145	64.51	-9.99	54.52	74.00	-19.48	peak	P																																								
2	4824.557	57.52	-9.99	47.53	54.00	-6.47	AVG	P																																								
3 *	7236.385	53.63	-4.88	48.75	54.00	-5.25	AVG	P																																								
4	7236.574	63.34	-4.88	58.46	74.00	-15.54	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX n(HT20) Mode 2412MHz Ant.1+2-CDD																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.325</td> <td>57.52</td> <td>-9.99</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4824.524</td> <td>64.51</td> <td>-9.99</td> <td>54.52</td> <td>74.00</td> <td>-19.48</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7236.278</td> <td>61.71</td> <td>-4.88</td> <td>56.83</td> <td>74.00</td> <td>-17.17</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7236.625</td> <td>53.60</td> <td>-4.88</td> <td>48.72</td> <td>54.00</td> <td>-5.28</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4824.325	57.52	-9.99	47.53	54.00	-6.47	AVG	P	2	4824.524	64.51	-9.99	54.52	74.00	-19.48	peak	P	3	7236.278	61.71	-4.88	56.83	74.00	-17.17	peak	P	4 *	7236.625	53.60	-4.88	48.72	54.00	-5.28	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4824.325	57.52	-9.99	47.53	54.00	-6.47	AVG	P																																								
2	4824.524	64.51	-9.99	54.52	74.00	-19.48	peak	P																																								
3	7236.278	61.71	-4.88	56.83	74.00	-17.17	peak	P																																								
4 *	7236.625	53.60	-4.88	48.72	54.00	-5.28	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX n(HT20) Mode 2437MHz Ant.1+2-CDD																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.521</td> <td>55.89</td> <td>-9.90</td> <td>45.99</td> <td>54.00</td> <td>-8.01</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.545</td> <td>67.38</td> <td>-9.90</td> <td>57.48</td> <td>74.00</td> <td>-16.52</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7311.324</td> <td>54.95</td> <td>-4.74</td> <td>50.21</td> <td>54.00</td> <td>-3.79</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7311.345</td> <td>62.70</td> <td>-4.74</td> <td>57.96</td> <td>74.00</td> <td>-16.04</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.521	55.89	-9.90	45.99	54.00	-8.01	AVG	P	2	4874.545	67.38	-9.90	57.48	74.00	-16.52	peak	P	3 *	7311.324	54.95	-4.74	50.21	54.00	-3.79	AVG	P	4	7311.345	62.70	-4.74	57.96	74.00	-16.04	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4874.521	55.89	-9.90	45.99	54.00	-8.01	AVG	P																																								
2	4874.545	67.38	-9.90	57.48	74.00	-16.52	peak	P																																								
3 *	7311.324	54.95	-4.74	50.21	54.00	-3.79	AVG	P																																								
4	7311.345	62.70	-4.74	57.96	74.00	-16.04	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX n(HT20) Mode 2437MHz Ant.1+2-CDD																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.251</td> <td>65.55</td> <td>-9.90</td> <td>55.65</td> <td>74.00</td> <td>-18.35</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4874.754</td> <td>55.42</td> <td>-9.90</td> <td>45.52</td> <td>54.00</td> <td>-8.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7311.087</td> <td>53.33</td> <td>-4.74</td> <td>48.59</td> <td>54.00</td> <td>-5.41</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7311.652</td> <td>62.60</td> <td>-4.74</td> <td>57.86</td> <td>74.00</td> <td>-16.14</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4874.251	65.55	-9.90	55.65	74.00	-18.35	peak	P	2	4874.754	55.42	-9.90	45.52	54.00	-8.48	AVG	P	3 *	7311.087	53.33	-4.74	48.59	54.00	-5.41	AVG	P	4	7311.652	62.60	-4.74	57.86	74.00	-16.14	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4874.251	65.55	-9.90	55.65	74.00	-18.35	peak	P																																								
2	4874.754	55.42	-9.90	45.52	54.00	-8.48	AVG	P																																								
3 *	7311.087	53.33	-4.74	48.59	54.00	-5.41	AVG	P																																								
4	7311.652	62.60	-4.74	57.86	74.00	-16.14	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2462MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4924.247	55.41	-9.78	45.63	54.00	-8.37	AVG	P
2	4924.551	65.63	-9.78	55.85	74.00	-18.15	peak	P
3 *	7386.254	53.30	-4.61	48.69	54.00	-5.31	AVG	P
4	7386.745	62.50	-4.61	57.89	74.00	-16.11	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2462MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4924.254	65.03	-9.78	55.25	74.00	-18.75	peak	P
2	4924.745	56.31	-9.78	46.53	54.00	-7.47	AVG	P
3	7386.352	63.15	-4.61	58.54	74.00	-15.46	peak	P
4 *	7386.574	52.47	-4.61	47.86	54.00	-6.14	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX n(HT40) Mode 2422MHz Ant.1+2-CDD																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.542</td> <td>56.46</td> <td>-9.94</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4844.574</td> <td>66.79</td> <td>-9.94</td> <td>56.85</td> <td>74.00</td> <td>-17.15</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7266.227</td> <td>61.87</td> <td>-4.82</td> <td>57.05</td> <td>74.00</td> <td>-16.95</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7266.854</td> <td>52.40</td> <td>-4.82</td> <td>47.58</td> <td>54.00</td> <td>-6.42</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4844.542	56.46	-9.94	46.52	54.00	-7.48	AVG	P	2	4844.574	66.79	-9.94	56.85	74.00	-17.15	peak	P	3	7266.227	61.87	-4.82	57.05	74.00	-16.95	peak	P	4 *	7266.854	52.40	-4.82	47.58	54.00	-6.42	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4844.542	56.46	-9.94	46.52	54.00	-7.48	AVG	P																																								
2	4844.574	66.79	-9.94	56.85	74.00	-17.15	peak	P																																								
3	7266.227	61.87	-4.82	57.05	74.00	-16.95	peak	P																																								
4 *	7266.854	52.40	-4.82	47.58	54.00	-6.42	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX n(HT40) Mode 2422MHz Ant.1+2-CDD																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.175</td> <td>66.32</td> <td>-9.94</td> <td>56.38</td> <td>74.00</td> <td>-17.62</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4844.234</td> <td>56.51</td> <td>-9.94</td> <td>46.57</td> <td>54.00</td> <td>-7.43</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3 *</td> <td>7266.175</td> <td>53.58</td> <td>-4.82</td> <td>48.76</td> <td>54.00</td> <td>-5.24</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7266.287</td> <td>62.67</td> <td>-4.82</td> <td>57.85</td> <td>74.00</td> <td>-16.15</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4844.175	66.32	-9.94	56.38	74.00	-17.62	peak	P	2	4844.234	56.51	-9.94	46.57	54.00	-7.43	AVG	P	3 *	7266.175	53.58	-4.82	48.76	54.00	-5.24	AVG	P	4	7266.287	62.67	-4.82	57.85	74.00	-16.15	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4844.175	66.32	-9.94	56.38	74.00	-17.62	peak	P																																								
2	4844.234	56.51	-9.94	46.57	54.00	-7.43	AVG	P																																								
3 *	7266.175	53.58	-4.82	48.76	54.00	-5.24	AVG	P																																								
4	7266.287	62.67	-4.82	57.85	74.00	-16.15	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT40) Mode 2437MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.241	58.42	-9.90	48.52	54.00	-5.48	AVG	P
2	4874.754	67.44	-9.90	57.54	74.00	-16.46	peak	P
3	7311.358	53.26	-4.74	48.52	74.00	-25.48	peak	P
4 *	7311.754	54.51	-4.74	49.77	54.00	-4.23	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT40) Mode 2437MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.241	58.42	-9.90	48.52	54.00	-5.48	AVG	P
2	4874.754	67.44	-9.90	57.54	74.00	-16.46	peak	P
3	7311.358	63.26	-4.74	58.52	74.00	-15.48	peak	P
4 *	7311.754	54.51	-4.74	49.77	54.00	-4.23	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX n(HT40) Mode 2452MHz Ant.1+2-CDD																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.422</td> <td>66.36</td> <td>-9.84</td> <td>56.52</td> <td>74.00</td> <td>-17.48</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4904.745</td> <td>57.36</td> <td>-9.84</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7356.321</td> <td>63.40</td> <td>-4.66</td> <td>58.74</td> <td>74.00</td> <td>-15.26</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7356.325</td> <td>54.52</td> <td>-4.66</td> <td>49.86</td> <td>54.00</td> <td>-4.14</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4904.422	66.36	-9.84	56.52	74.00	-17.48	peak	P	2	4904.745	57.36	-9.84	47.52	54.00	-6.48	AVG	P	3	7356.321	63.40	-4.66	58.74	74.00	-15.26	peak	P	4 *	7356.325	54.52	-4.66	49.86	54.00	-4.14	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4904.422	66.36	-9.84	56.52	74.00	-17.48	peak	P																																								
2	4904.745	57.36	-9.84	47.52	54.00	-6.48	AVG	P																																								
3	7356.321	63.40	-4.66	58.74	74.00	-15.26	peak	P																																								
4 *	7356.325	54.52	-4.66	49.86	54.00	-4.14	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX n(HT40) Mode 2452MHz Ant.1+2-CDD																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.175</td> <td>66.69</td> <td>-9.84</td> <td>56.85</td> <td>74.00</td> <td>-17.15</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2</td> <td>4904.562</td> <td>56.19</td> <td>-9.84</td> <td>46.35</td> <td>54.00</td> <td>-7.65</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7356.562</td> <td>63.37</td> <td>-4.66</td> <td>58.71</td> <td>74.00</td> <td>-15.29</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4 *</td> <td>7356.625</td> <td>53.62</td> <td>-4.66</td> <td>48.96</td> <td>54.00</td> <td>-5.04</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4904.175	66.69	-9.84	56.85	74.00	-17.15	peak	P	2	4904.562	56.19	-9.84	46.35	54.00	-7.65	AVG	P	3	7356.562	63.37	-4.66	58.71	74.00	-15.29	peak	P	4 *	7356.625	53.62	-4.66	48.96	54.00	-5.04	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4904.175	66.69	-9.84	56.85	74.00	-17.15	peak	P																																								
2	4904.562	56.19	-9.84	46.35	54.00	-7.65	AVG	P																																								
3	7356.562	63.37	-4.66	58.71	74.00	-15.29	peak	P																																								
4 *	7356.625	53.62	-4.66	48.96	54.00	-5.04	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																



Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX VHT20 Mode 2412MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4824.324	58.75	-9.99	48.76	54.00	-5.24	AVG	P
2	4824.532	68.50	-9.99	58.51	74.00	-15.49	peak	P
3 *	7236.244	53.67	-4.75	48.92	54.00	-5.08	AVG	P
4	7236.641	63.43	-4.75	58.68	74.00	-15.32	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX VHT20 Mode 2412MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4824.362	68.48	-9.99	58.49	74.00	-15.51	peak	P
2	4824.652	57.95	-9.99	47.96	54.00	-6.04	AVG	P
3 *	7236.456	53.87	-4.75	49.12	54.00	-4.88	AVG	P
4	7236.527	64.12	-4.75	59.37	74.00	-14.63	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX VHT20 Mode 2437MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.638	58.41	-9.90	48.51	54.00	-5.49	AVG	P
2	4874.885	67.39	-9.90	57.49	74.00	-16.51	peak	P
3	7311.522	63.57	-4.61	58.96	74.00	-15.04	peak	P
4 *	7311.724	53.26	-4.61	48.65	54.00	-5.35	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX VHT20 Mode 2437MHz Ant.1+2-CDD		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.596	67.38	-9.90	57.48	74.00	-16.52	peak	P
2	4874.628	57.49	-9.90	47.59	54.00	-6.41	AVG	P
3	7311.224	63.36	-4.61	58.75	74.00	-15.25	peak	P
4 *	7311.527	52.86	-4.61	48.25	54.00	-5.75	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Horizontal																																															
Test Mode:	TX VHT20 Mode 2462MHz Ant.1+2-CDD																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.524</td> <td>68.57</td> <td>-9.78</td> <td>58.79</td> <td>74.00</td> <td>-15.21</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>4924.771</td> <td>58.74</td> <td>-9.78</td> <td>48.96</td> <td>54.00</td> <td>-5.04</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>3</td> <td>7386.178</td> <td>52.74</td> <td>-4.47</td> <td>48.27</td> <td>54.00</td> <td>-5.73</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>4</td> <td>7386.524</td> <td>63.92</td> <td>-4.47</td> <td>59.45</td> <td>74.00</td> <td>-14.55</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	4924.524	68.57	-9.78	58.79	74.00	-15.21	peak	P	2 *	4924.771	58.74	-9.78	48.96	54.00	-5.04	AVG	P	3	7386.178	52.74	-4.47	48.27	54.00	-5.73	AVG	P	4	7386.524	63.92	-4.47	59.45	74.00	-14.55	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1	4924.524	68.57	-9.78	58.79	74.00	-15.21	peak	P																																								
2 *	4924.771	58.74	-9.78	48.96	54.00	-5.04	AVG	P																																								
3	7386.178	52.74	-4.47	48.27	54.00	-5.73	AVG	P																																								
4	7386.524	63.92	-4.47	59.45	74.00	-14.55	peak	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

Temperature:	23.9°C	Relative Humidity:	54%																																													
Test Voltage:	AC 120V/60Hz																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX VHT20 Mode 2462MHz Ant.1+2-CDD																																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4924.625</td> <td>59.53</td> <td>-9.78</td> <td>49.75</td> <td>54.00</td> <td>-4.25</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>4924.848</td> <td>68.77</td> <td>-9.78</td> <td>58.99</td> <td>74.00</td> <td>-15.01</td> <td>peak</td> <td>P</td> </tr> <tr> <td>3</td> <td>7386.257</td> <td>63.40</td> <td>-4.47</td> <td>58.93</td> <td>74.00</td> <td>-15.07</td> <td>peak</td> <td>P</td> </tr> <tr> <td>4</td> <td>7386.455</td> <td>53.22</td> <td>-4.47</td> <td>48.75</td> <td>54.00</td> <td>-5.25</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	4924.625	59.53	-9.78	49.75	54.00	-4.25	AVG	P	2	4924.848	68.77	-9.78	58.99	74.00	-15.01	peak	P	3	7386.257	63.40	-4.47	58.93	74.00	-15.07	peak	P	4	7386.455	53.22	-4.47	48.75	54.00	-5.25	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																																								
1 *	4924.625	59.53	-9.78	49.75	54.00	-4.25	AVG	P																																								
2	4924.848	68.77	-9.78	58.99	74.00	-15.01	peak	P																																								
3	7386.257	63.40	-4.47	58.93	74.00	-15.07	peak	P																																								
4	7386.455	53.22	-4.47	48.75	54.00	-5.25	AVG	P																																								
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency. 5. No report for the emission which more than 20dB below the prescribed limit. 																																																

