

Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2452MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2455.800	97.96	6.88	104.84	Fundamental Frequency		peak
2 *	2455.800	89.55	6.88	96.43			AVG
3	2483.500	53.43	6.97	60.40	74.00	-13.60	peak
4	2483.500	43.43	6.97	50.40	54.00	-3.60	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX VHT20 Mode 2412MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

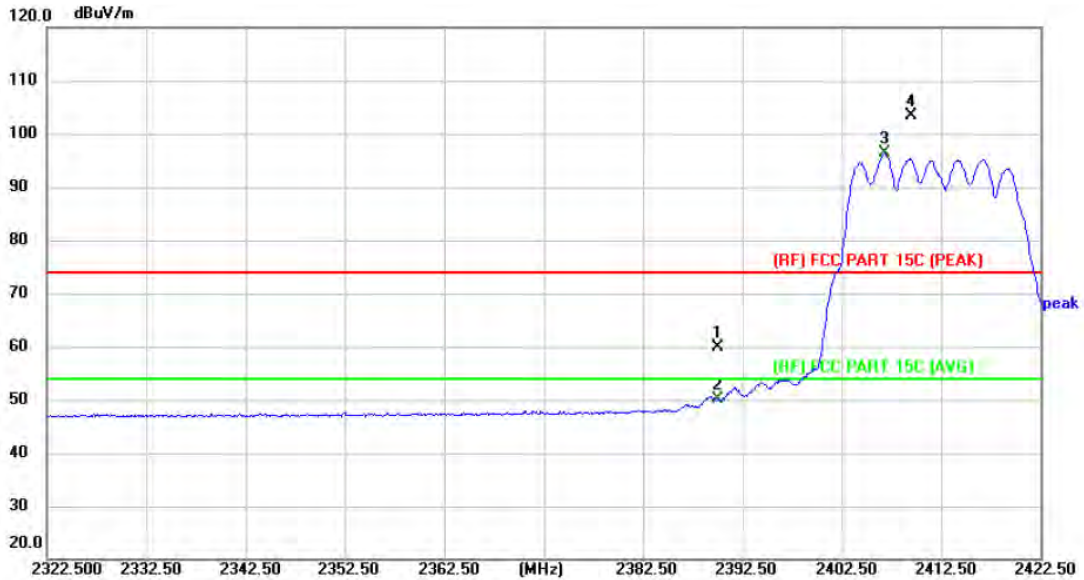


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	55.52	4.34	59.86	74.00	-14.14	peak
2	2390.000	45.67	4.34	50.01	54.00	-3.99	AVG
3 *	2406.800	91.88	4.39	96.27	Fundamental Frequency		AVG
4 X	2409.500	99.00	4.39	103.39		peak	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX VHT20 Mode 2412MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

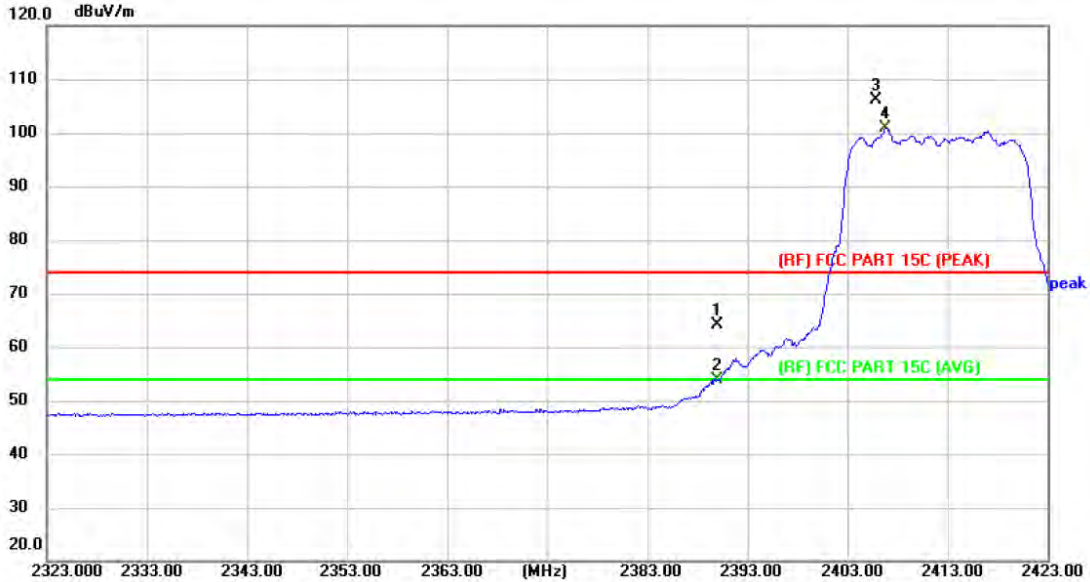


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	59.85	4.34	64.19	74.00	-9.81	peak
2	2390.000	49.42	4.34	53.76	54.00	-0.24	AVG
3 X	2405.800	101.72	4.38	106.10	Fundamental Frequency		peak
4 *	2406.800	96.41	4.39	100.80		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX VHT20 Mode 2462MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

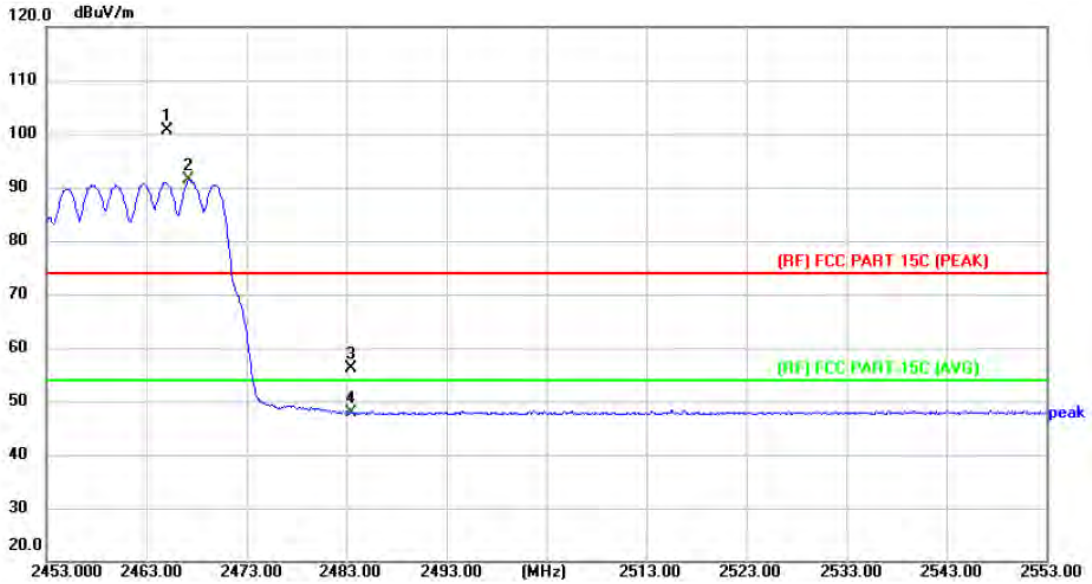


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2465.100	96.06	4.59	100.65	Fundamental Frequency		peak
2 *	2467.200	86.79	4.60	91.39			AVG
3	2483.500	51.45	4.65	56.10	74.00	-17.90	peak
4	2483.500	43.23	4.65	47.88	54.00	-6.12	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX VHT20 Mode 2462MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

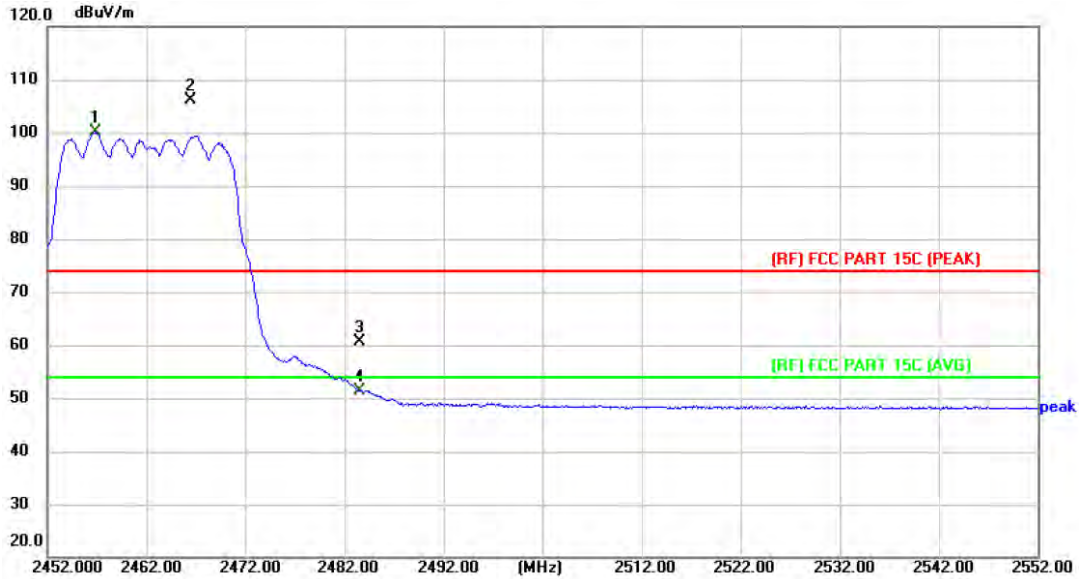


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	2456.800	95.47	4.56	100.03	Fundamental Frequency		AVG
2 X	2466.500	101.58	4.60	106.18			peak
3	2483.500	55.92	4.65	60.57	74.00	-13.43	peak
4	2483.500	46.84	4.65	51.49	54.00	-2.51	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX VHT40 Mode 2422MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

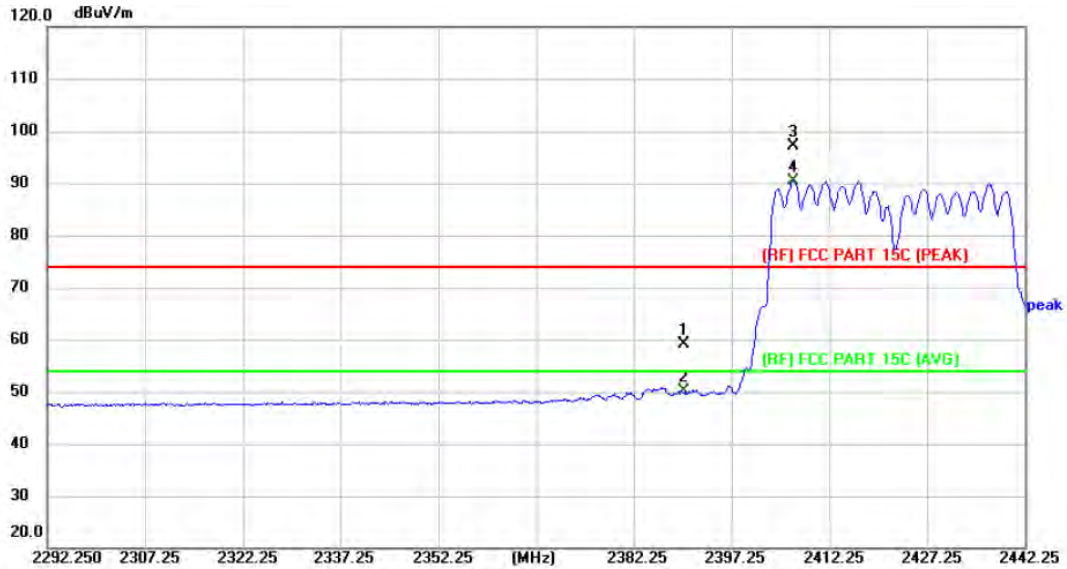


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	54.74	4.34	59.08	74.00	-14.92	peak
2	2390.000	45.82	4.34	50.16	54.00	-3.84	AVG
3 X	2406.700	92.73	4.39	97.12	Fundamental Frequency		peak
4 *	2406.700	86.11	4.39	90.50		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX VHT40 Mode 2422MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

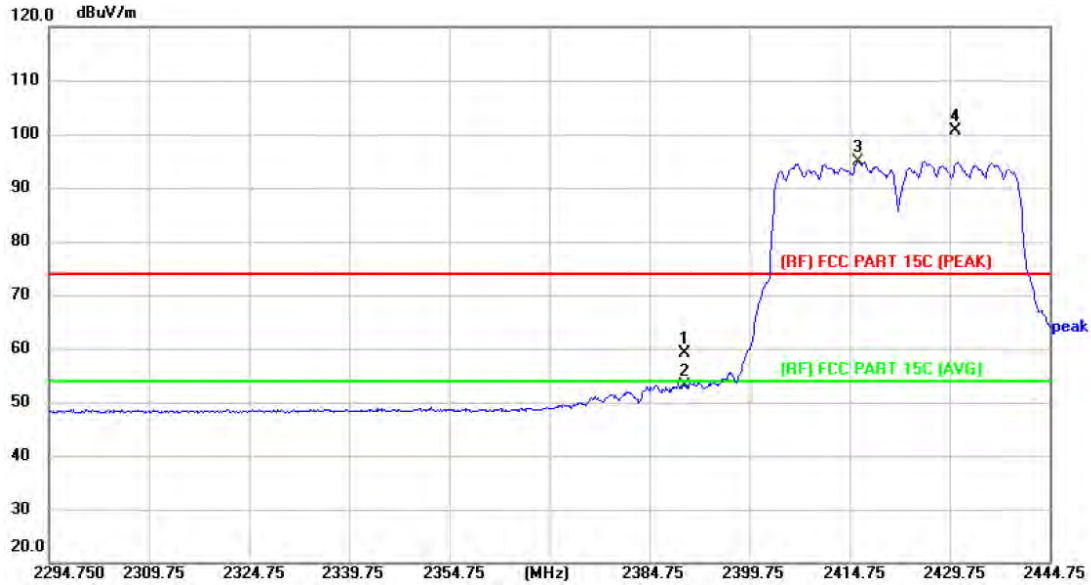


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	54.80	4.34	59.14	74.00	-14.86	peak
2	2390.000	48.83	4.34	53.17	54.00	-0.83	AVG
3 *	2415.950	90.50	4.42	94.92	Fundamental Frequency		AVG
4 X	2430.650	96.29	4.46	100.75			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX VHT40 Mode 2452MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

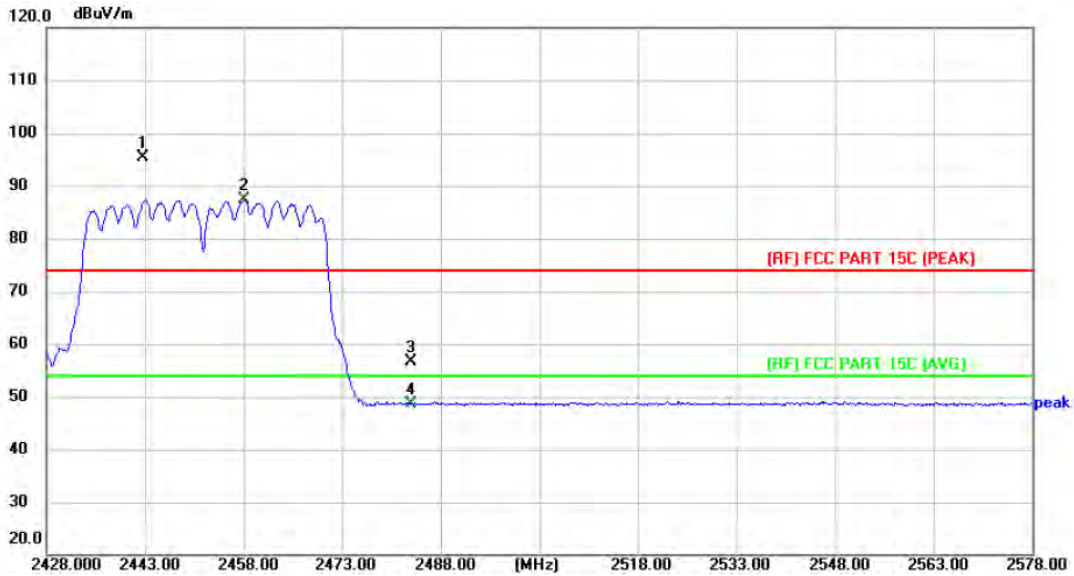


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2442.700	90.90	4.51	95.41	Fundamental Frequency		peak
2 *	2458.150	82.83	4.57	87.40			AVG
3	2483.500	51.96	4.65	56.61	74.00	-17.39	peak
4	2483.500	43.95	4.65	48.60	54.00	-5.40	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX VHT40 Mode 2452MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

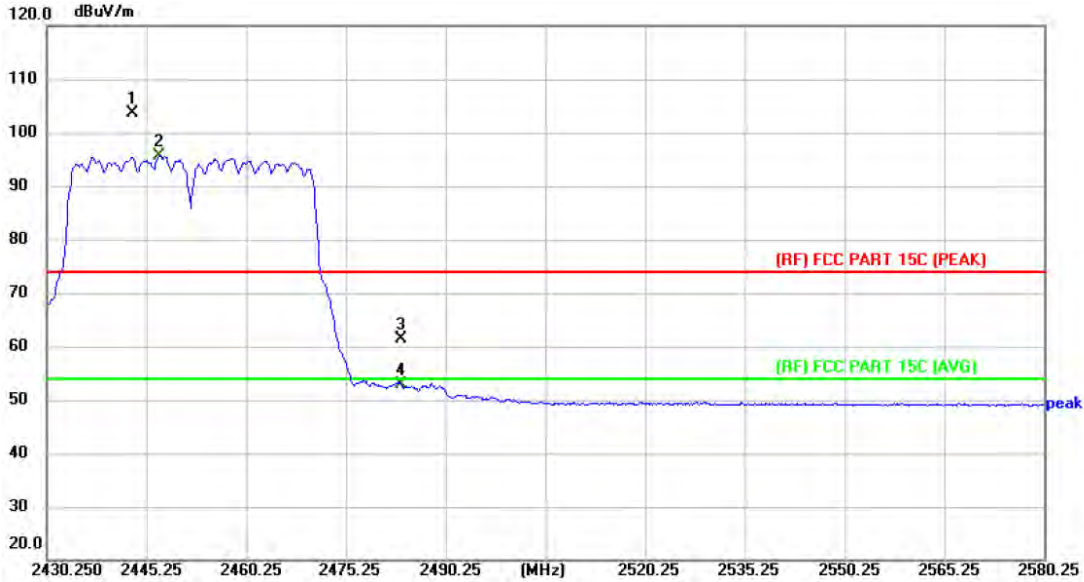


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2443.150	99.19	4.51	103.70	Fundamental Frequency		peak
2 *	2447.200	91.14	4.52	95.66			AVG
3	2483.500	56.75	4.65	61.40	74.00	-12.60	peak
4	2483.500	48.34	4.65	52.99	54.00	-1.01	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX AX(HE20) Mode 2412MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

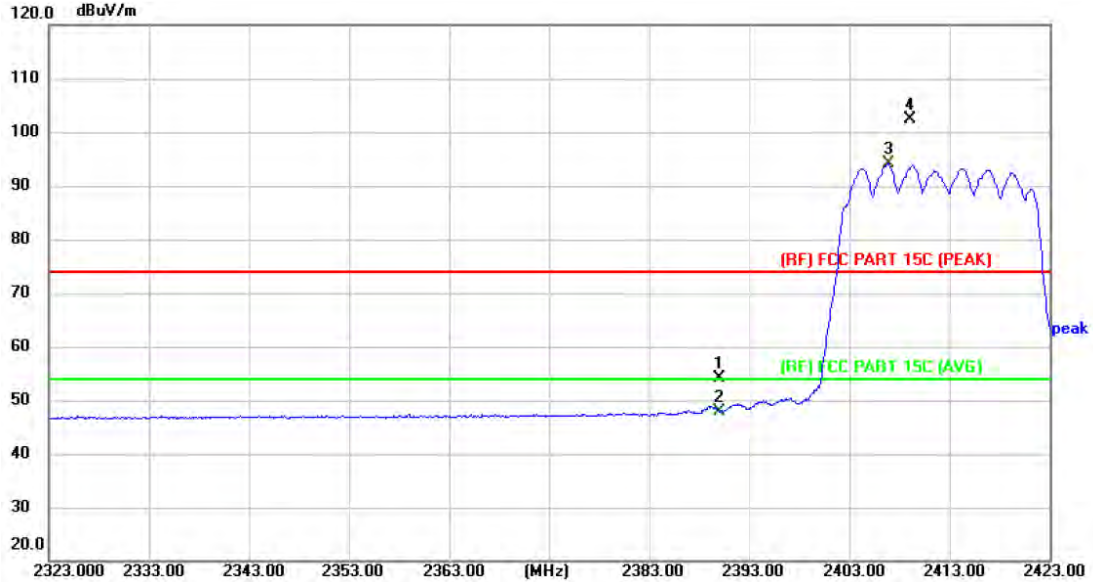


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	49.75	4.34	54.09	74.00	-19.91	peak
2	2390.000	43.66	4.34	48.00	54.00	-6.00	AVG
3 *	2406.900	89.79	4.39	94.18	Fundamental Frequency		AVG
4 X	2409.000	98.02	4.39	102.41			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX AX(HE20) Mode 2412MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

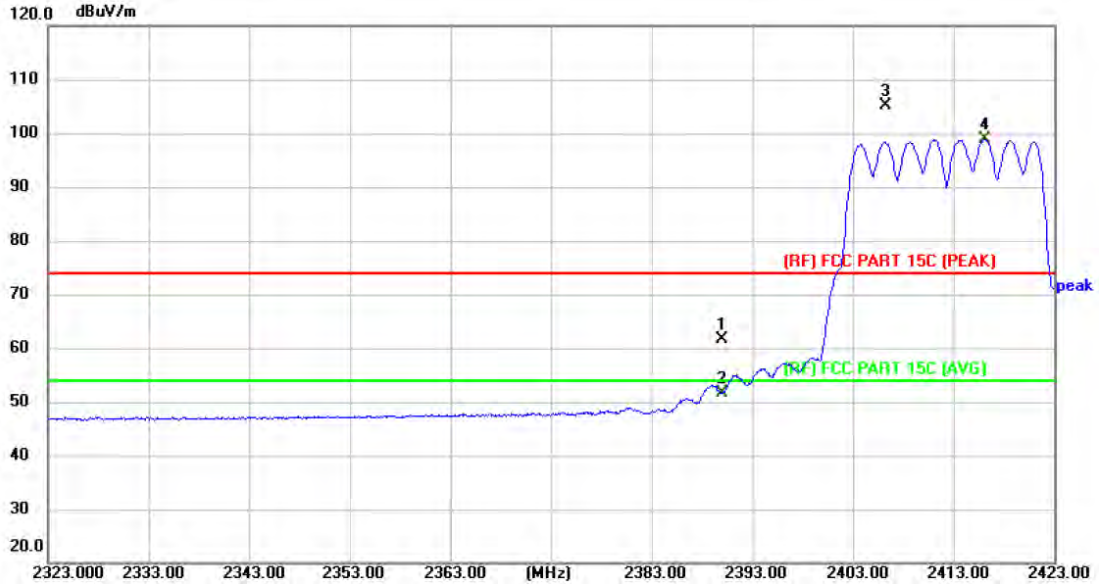


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	57.25	4.34	61.59	74.00	-12.41	peak
2	2390.000	47.29	4.34	51.63	54.00	-2.37	AVG
3 X	2406.300	100.72	4.39	105.11	Fundamental Frequency		peak
4 *	2416.100	94.42	4.42	98.84		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX AX(HE20) Mode 2462MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

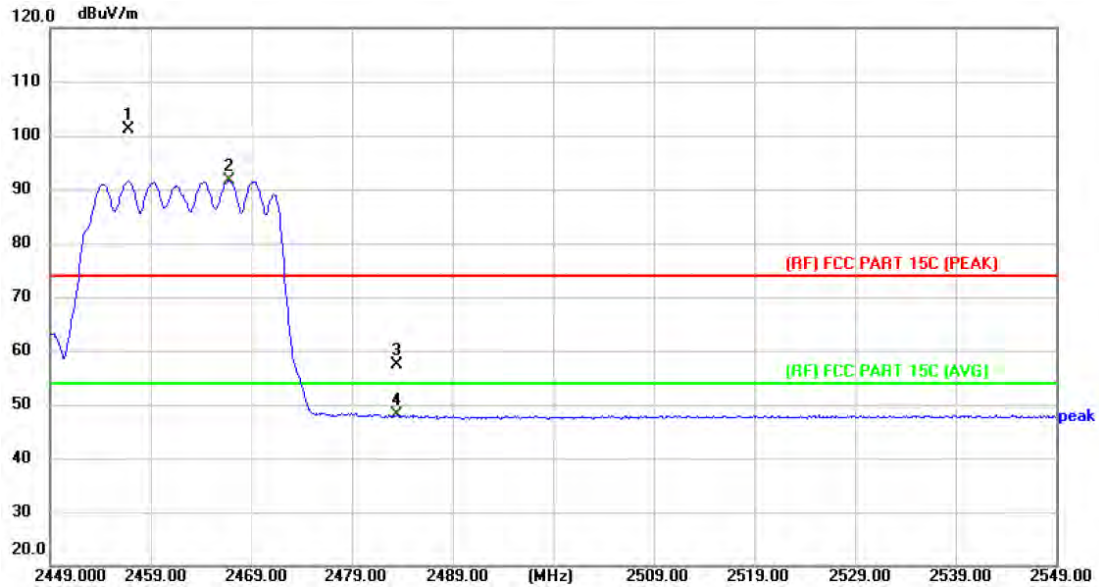


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2456.800	96.69	4.56	101.25	Fundamental Frequency		peak
2 *	2466.800	86.97	4.60	91.57			AVG
3	2483.500	52.77	4.65	57.42	74.00	-16.58	peak
4	2483.500	43.38	4.65	48.03	54.00	-5.97	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX AX(HE20) Mode 2462MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

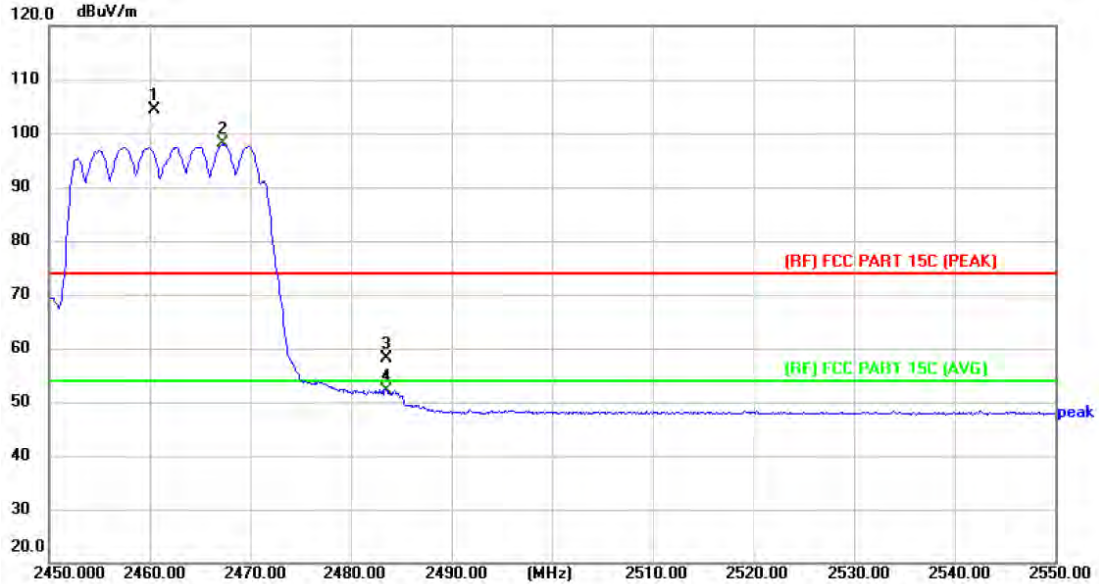


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2460.400	99.90	4.57	104.47	Fundamental Frequency		peak
2 *	2467.300	93.42	4.60	98.02			AVG
3	2483.500	53.37	4.65	58.02	74.00	-15.98	peak
4	2483.500	47.40	4.65	52.05	54.00	-1.95	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX AX(HE40) Mode 2422MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

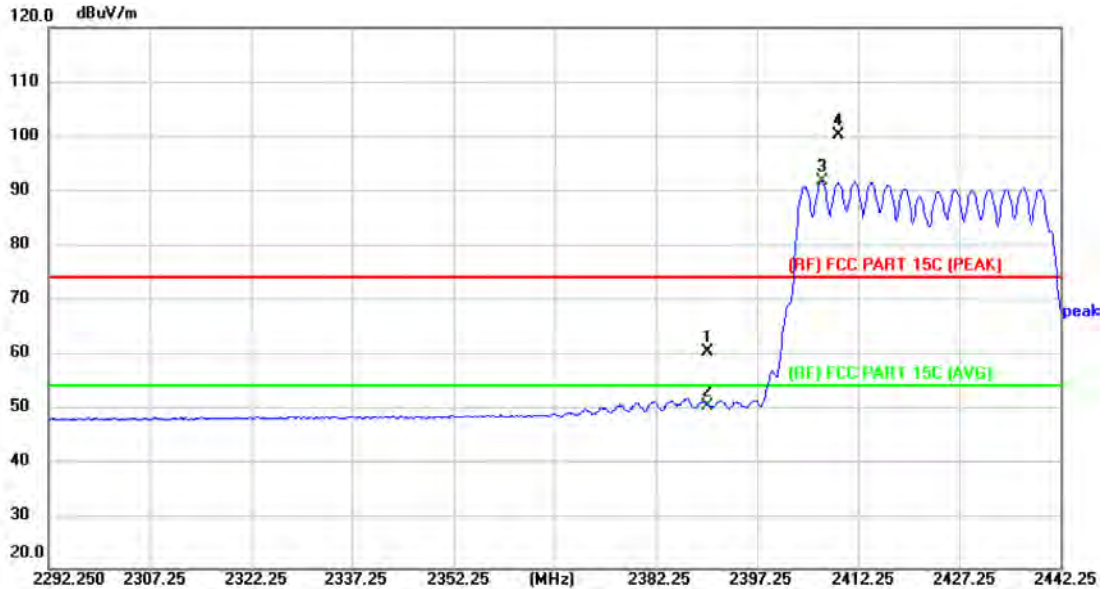


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	55.89	4.34	60.23	74.00	-13.77	peak
2	2390.000	45.82	4.34	50.16	54.00	-3.84	AVG
3 *	2406.850	87.19	4.39	91.58	Fundamental Frequency		AVG
4 X	2409.400	95.78	4.39	100.17		peak	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX AX(HE40) Mode 2422MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

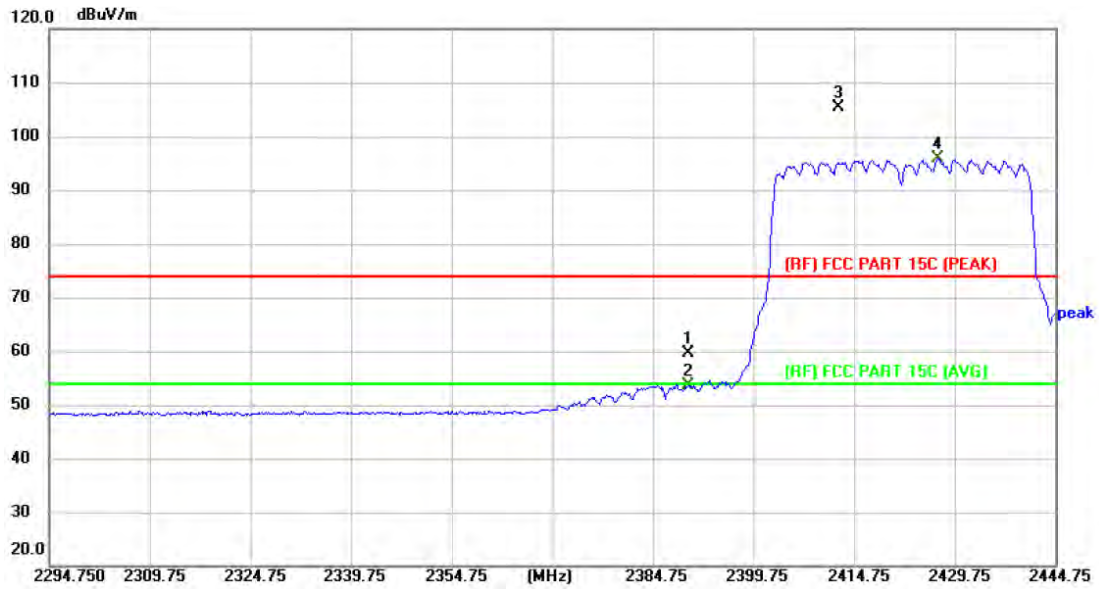


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	55.32	4.34	59.66	74.00	-14.34	peak
2	2390.000	49.20	4.34	53.54	54.00	-0.46	AVG
3 X	2412.350	101.04	4.41	105.45	Fundamental Frequency		peak
4 *	2427.200	91.33	4.46	95.79			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX AX(HE40) Mode 2452MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

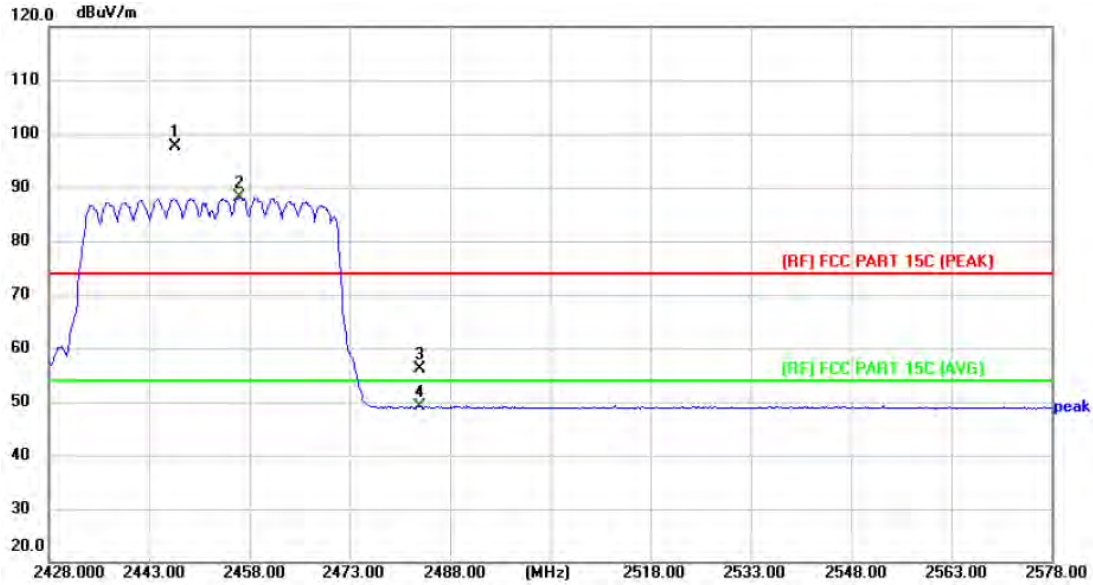


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2446.900	93.00	4.52	97.52	Fundamental Frequency		peak
2 *	2456.500	83.66	4.56	88.22			AVG
3	2483.500	51.54	4.65	56.19	74.00	-17.81	peak
4	2483.500	44.38	4.65	49.03	54.00	-4.97	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX AX(HE40) Mode 2452MHz Ant.1+2-CDD		
Remark:	Only worse case is reported.		

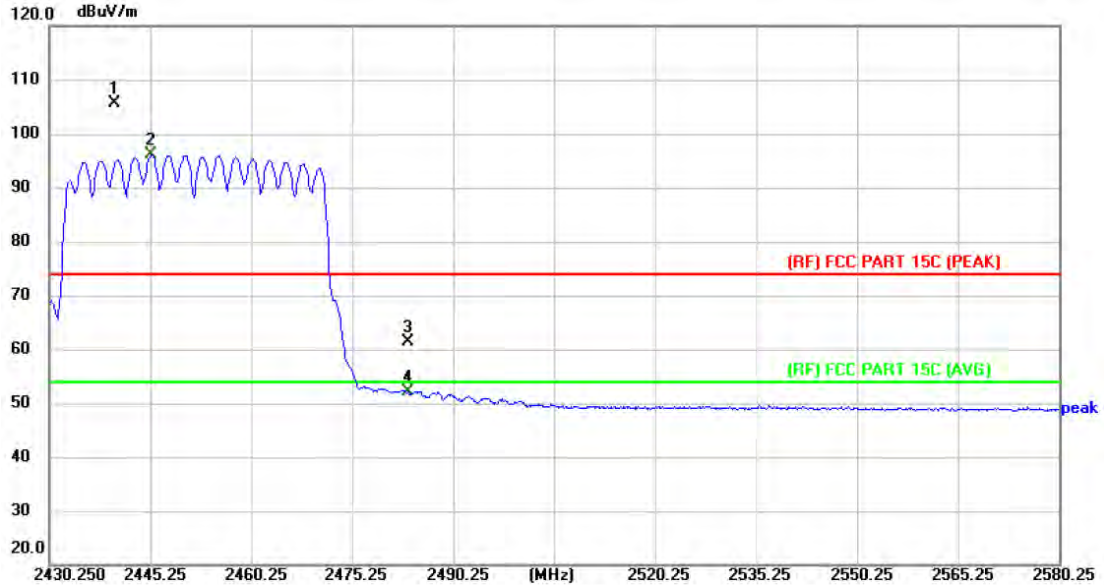


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2440.000	101.06	4.50	105.56	Fundamental Frequency		peak
2 *	2445.400	91.59	4.52	96.11			AVG
3	2483.500	56.72	4.65	61.37	74.00	-12.63	peak
4	2483.500	47.44	4.65	52.09	54.00	-1.91	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2412MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

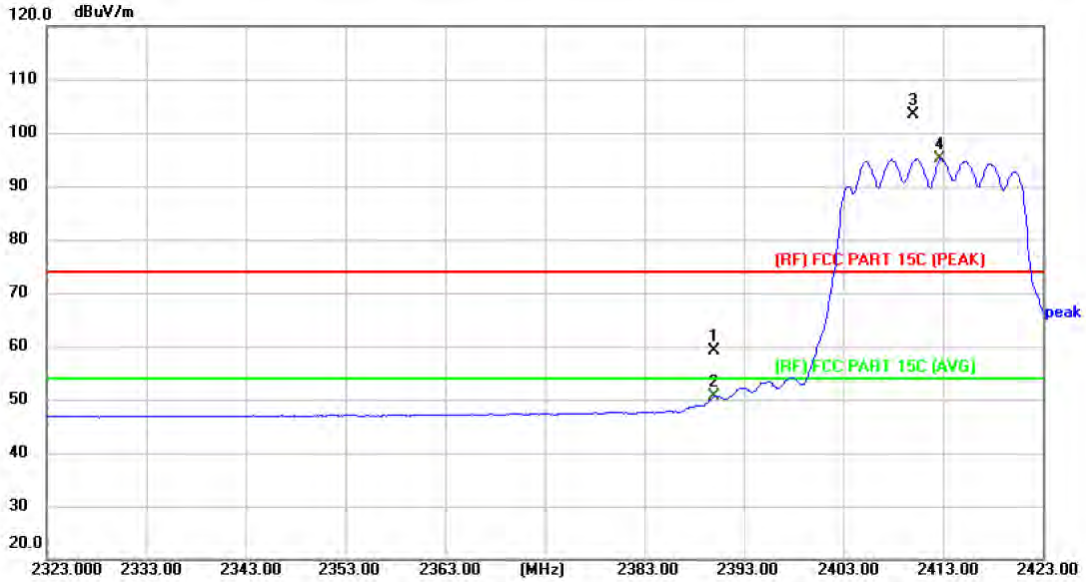


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	54.84	4.34	59.18	74.00	-14.82	peak
2	2390.000	46.23	4.34	50.57	54.00	-3.43	AVG
3 X	2410.000	99.08	4.39	103.47	Fundamental Frequency		peak
4 *	2412.700	90.75	4.41	95.16		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2412MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

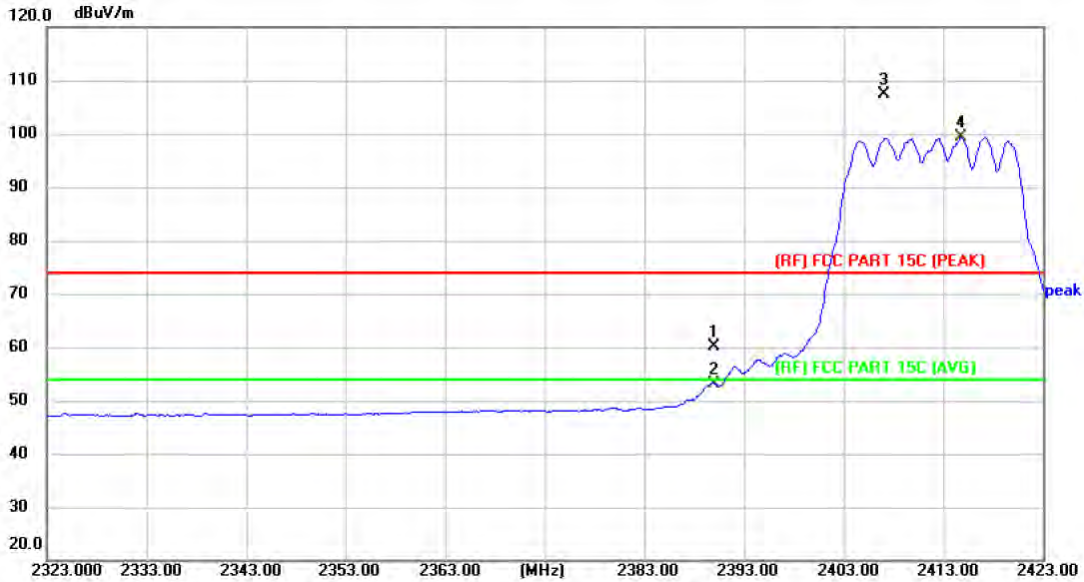


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	55.84	4.34	60.18	74.00	-13.82	peak
2	2390.000	48.87	4.34	53.21	54.00	-0.79	AVG
3 X	2407.100	103.00	4.39	107.39	Fundamental Frequency		peak
4 *	2414.800	94.91	4.42	99.33		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2462MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

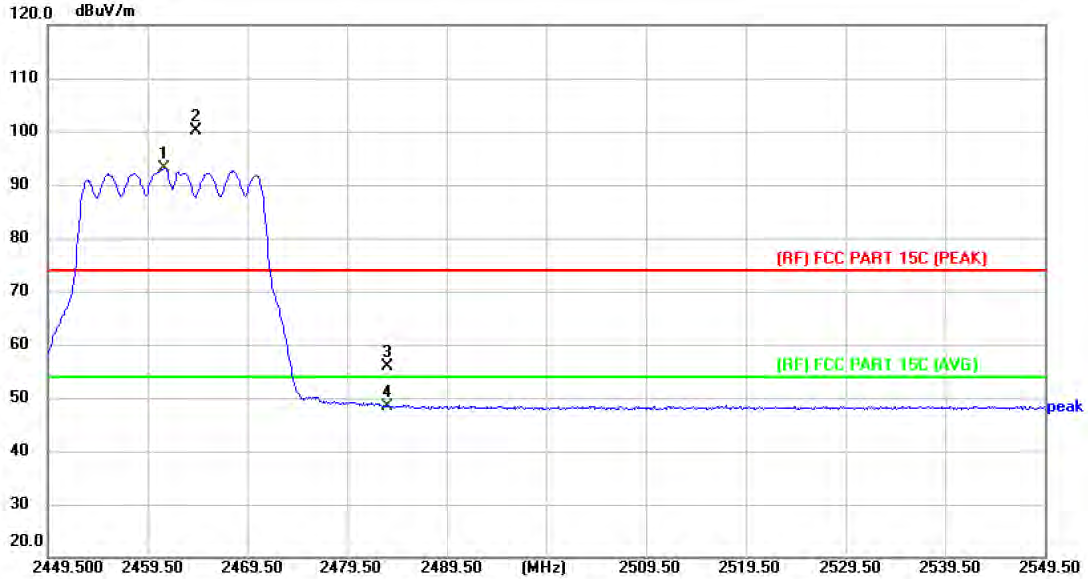


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	2461.200	88.55	4.58	93.13	Fundamental Frequency		AVG
2 X	2464.400	95.60	4.58	100.18			peak
3	2483.500	51.29	4.65	55.94	74.00	-18.06	peak
4	2483.500	43.62	4.65	48.27	54.00	-5.73	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2462MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

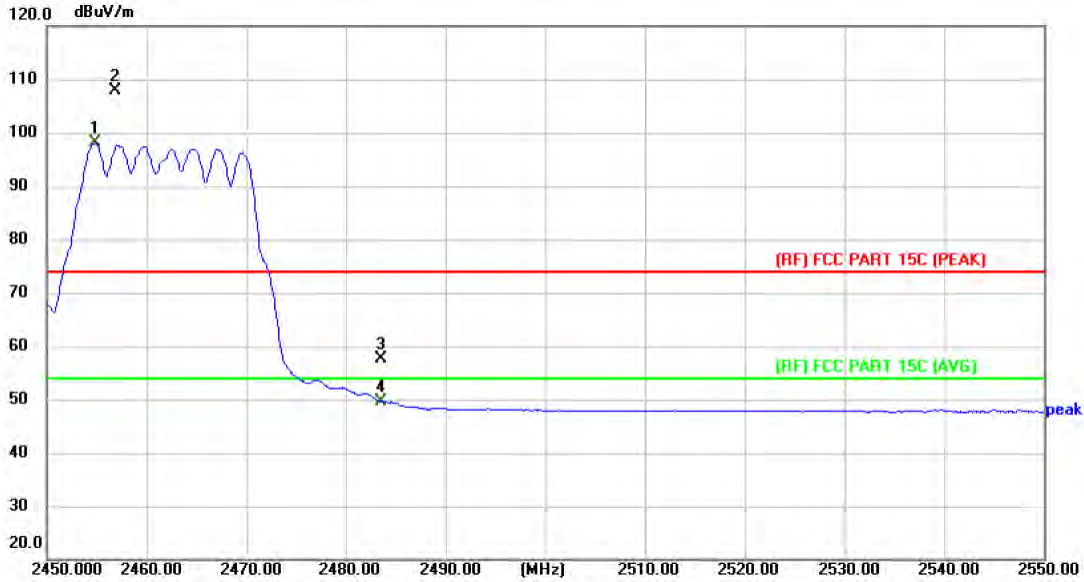


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	2454.900	93.50	4.55	98.05	Fundamental Frequency		AVG
2 X	2456.900	103.35	4.56	107.91			peak
3	2483.500	53.02	4.65	57.67	74.00	-16.33	peak
4	2483.500	44.97	4.65	49.62	54.00	-4.38	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2422MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

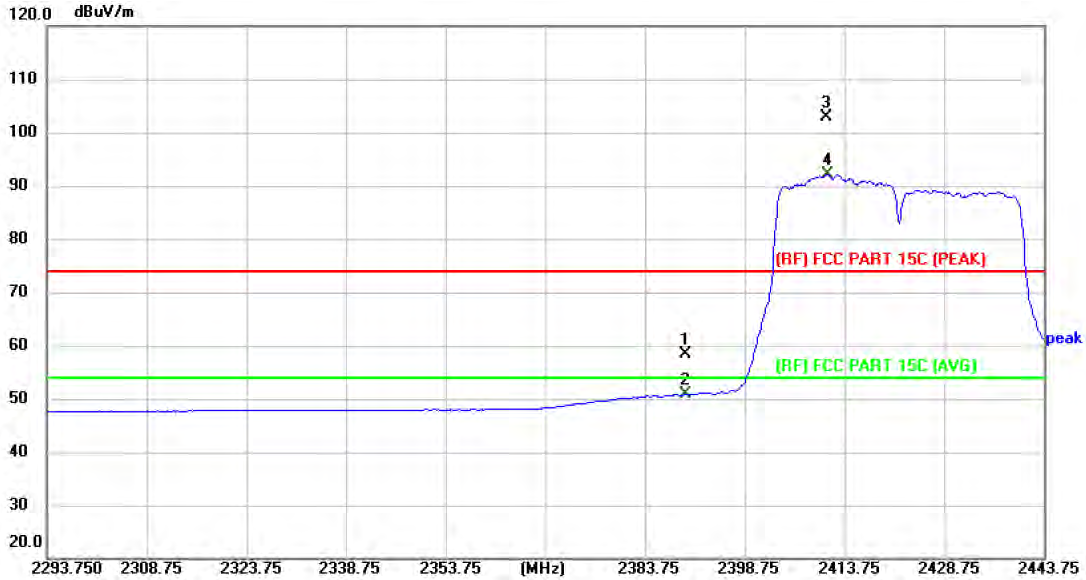


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	54.07	4.34	58.41	74.00	-15.59	peak
2	2390.000	46.48	4.34	50.82	54.00	-3.18	AVG
3 X	2411.050	98.44	4.40	102.84	Fundamental Frequency		peak
4 *	2411.200	87.84	4.40	92.24		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2422MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

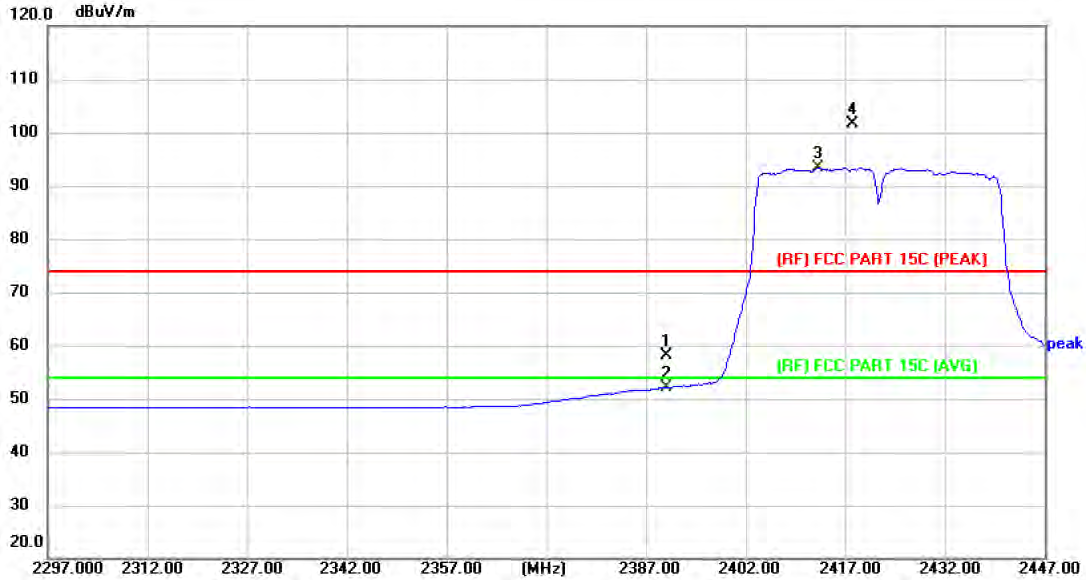


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	53.73	4.34	58.07	74.00	-15.93	peak
2	2390.000	47.69	4.34	52.03	54.00	-1.97	AVG
3 *	2412.800	89.05	4.41	93.46	Fundamental Frequency		AVG
4 X	2418.050	97.29	4.42	101.71			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2452MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

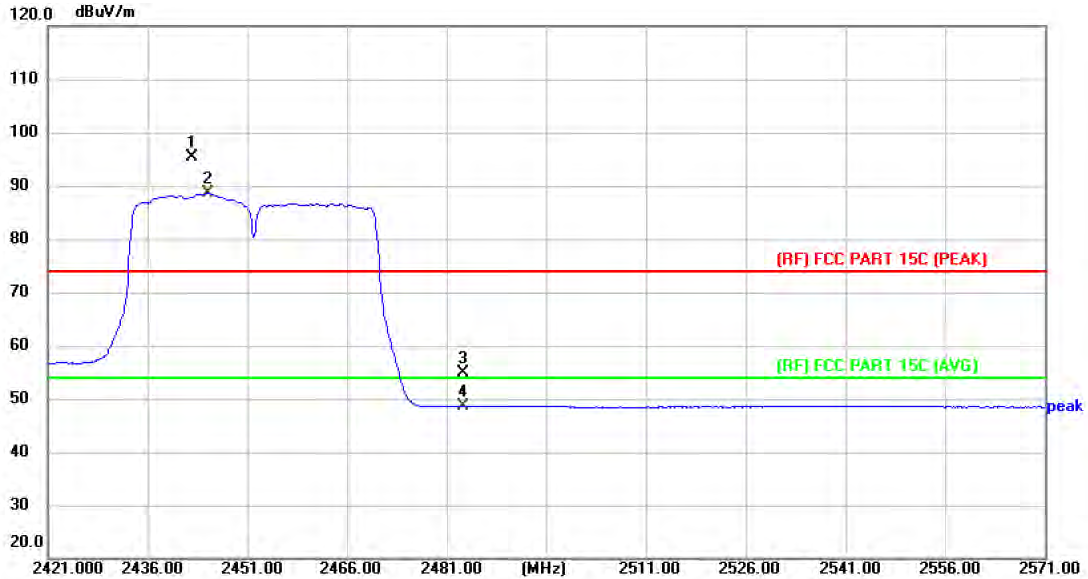


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2442.850	90.86	4.51	95.37	Fundamental Frequency		peak
2 *	2445.000	84.10	4.52	88.62			AVG
3	2483.500	50.21	4.65	54.86	74.00	-19.14	peak
4	2483.500	43.99	4.65	48.64	54.00	-5.36	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2452MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

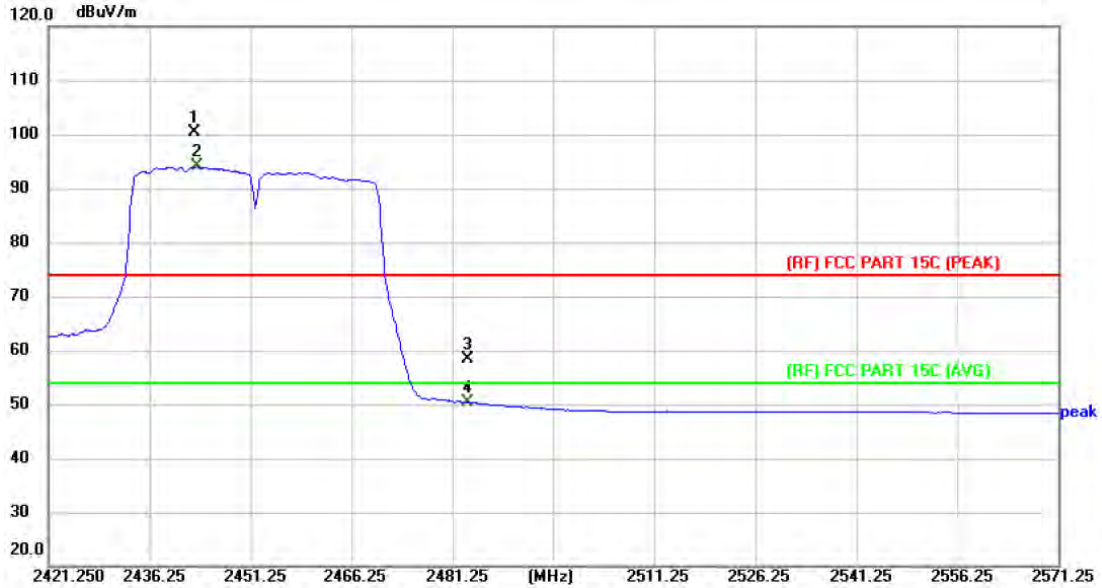


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2442.850	95.83	4.51	100.34	Fundamental Frequency		peak
2 *	2443.300	89.50	4.51	94.01			AVG
3	2483.500	53.82	4.65	58.47	74.00	-15.53	peak
4	2483.500	45.80	4.65	50.45	54.00	-3.55	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX VHT20 Mode 2412MHz Ant. 1+2-BF		
Remark:	Only worse case is reported.		

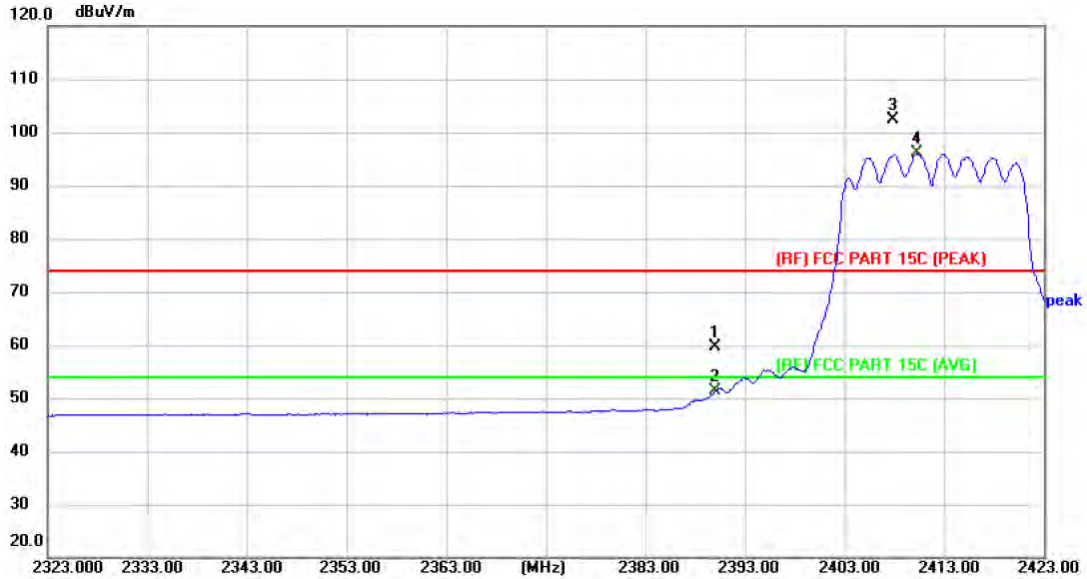


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	55.30	4.34	59.64	74.00	-14.36	peak
2	2390.000	46.94	4.34	51.28	54.00	-2.72	AVG
3 X	2407.800	98.02	4.39	102.41	Fundamental Frequency		peak
4 *	2410.200	91.63	4.39	96.02		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX VHT20 Mode 2412MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

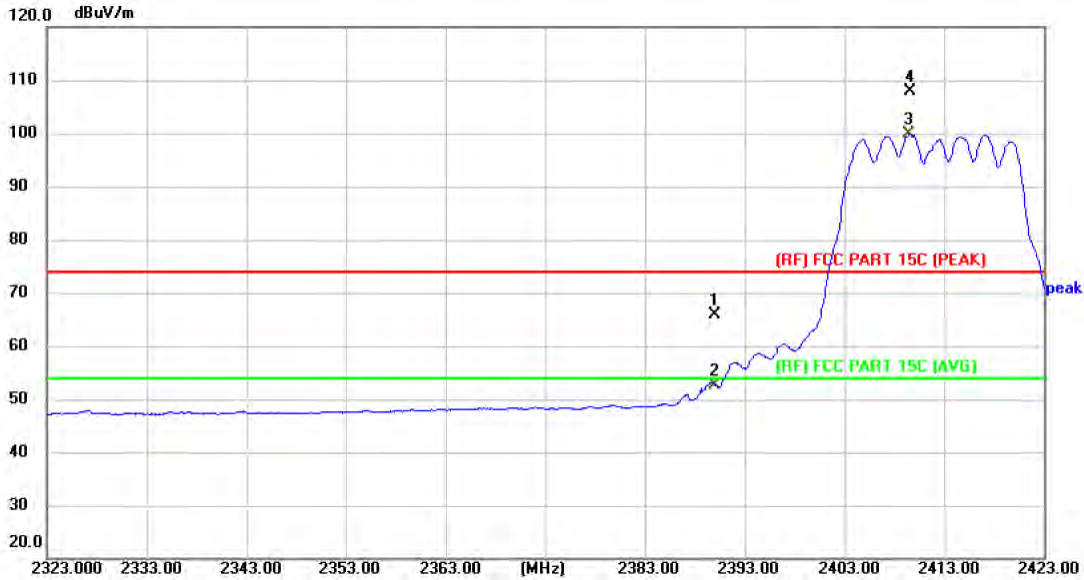


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	61.49	4.34	65.83	74.00	-8.17	peak
2	2390.000	48.40	4.34	52.74	54.00	-1.26	AVG
3 *	2409.500	95.40	4.39	99.79	Fundamental Frequency		AVG
4 X	2409.600	103.58	4.39	107.97		peak	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX VHT20 Mode 2462MHz Ant. 1+2-BF		
Remark:	Only worse case is reported.		

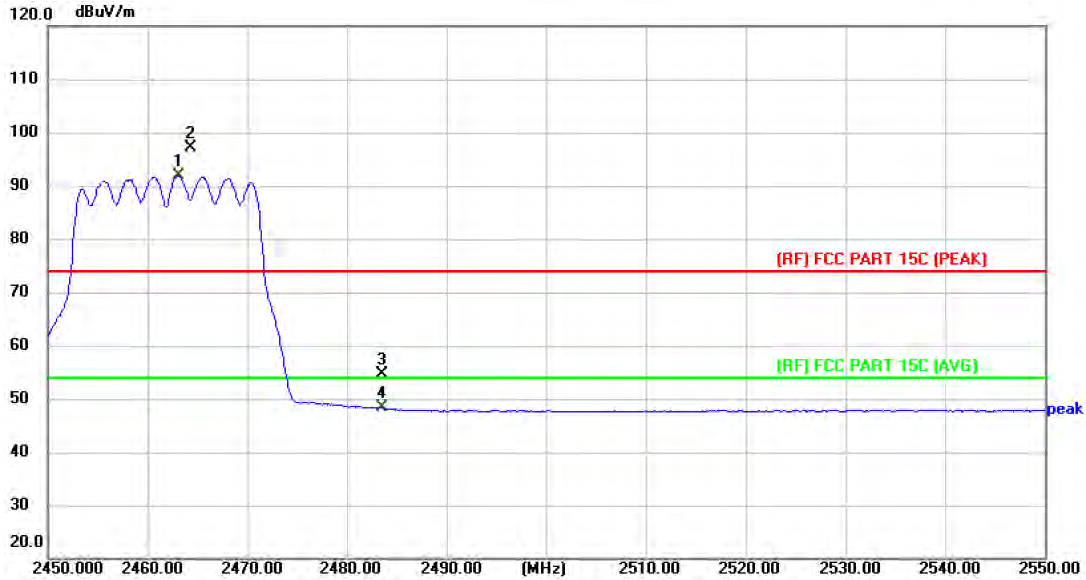


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	2463.100	87.35	4.58	91.93	Fundamental Frequency		AVG
2 X	2464.300	92.49	4.58	97.07			peak
3	2483.500	49.98	4.65	54.63	74.00	-19.37	peak
4	2483.500	43.61	4.65	48.26	54.00	-5.74	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX VHT20 Mode 2462MHz Ant. 1+2-BF		
Remark:	Only worse case is reported.		

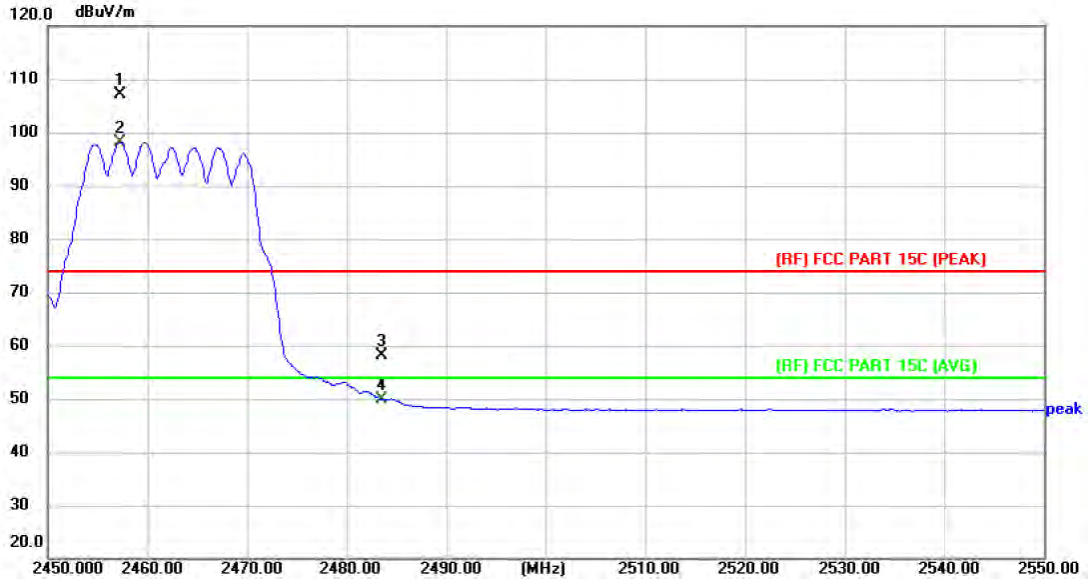


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2457.300	102.50	4.56	107.06	Fundamental Frequency		peak
2 *	2457.300	93.66	4.56	98.22			AVG
3	2483.500	53.50	4.65	58.15	74.00	-15.85	peak
4	2483.500	45.32	4.65	49.97	54.00	-4.03	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX VHT40 Mode 2422MHz Ant. 1+2-BF		
Remark:	Only worse case is reported.		

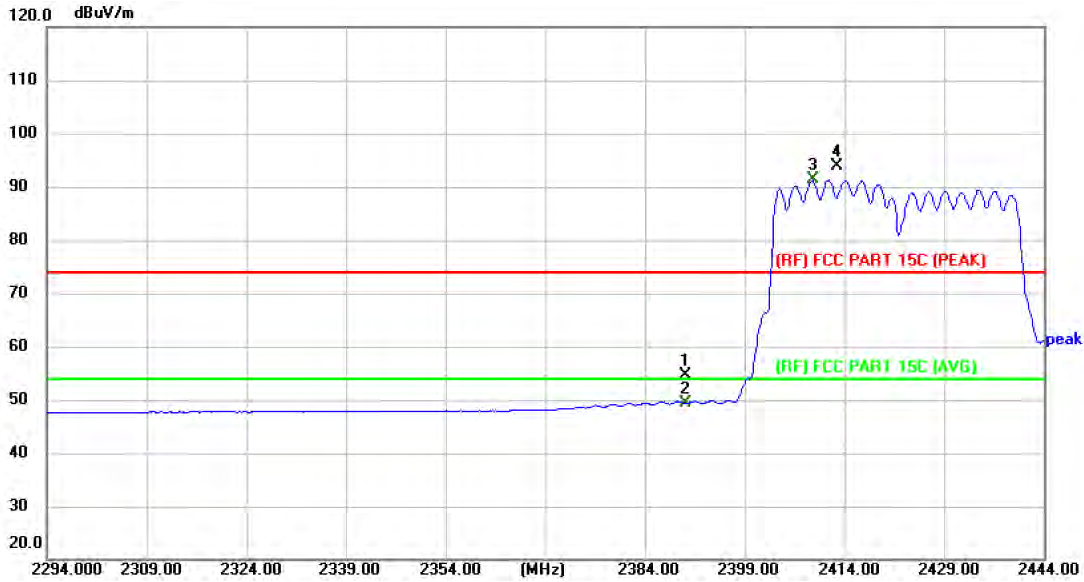


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	50.17	4.34	54.51	74.00	-19.49	peak
2	2390.000	44.97	4.34	49.31	54.00	-4.69	AVG
3 *	2409.200	86.87	4.39	91.26	Fundamental Frequency		AVG
4 X	2412.800	89.52	4.41	93.93		peak	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX VHT40 Mode 2422MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

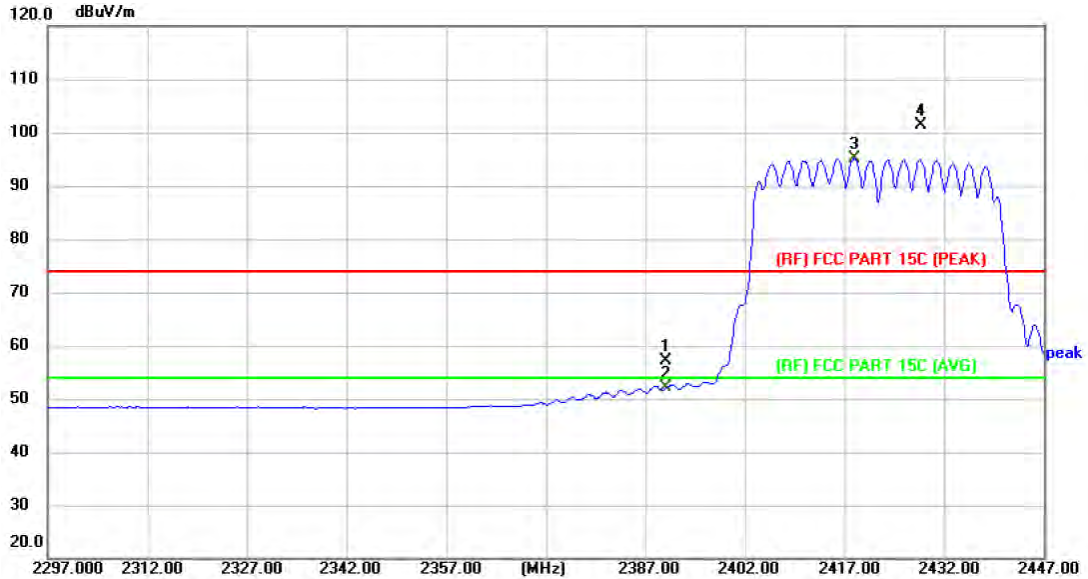


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	52.77	4.34	57.11	74.00	-16.89	peak
2	2390.000	47.68	4.34	52.02	54.00	-1.98	AVG
3 *	2418.500	90.76	4.42	95.18	Fundamental Frequency		AVG
4 X	2428.400	96.80	4.46	101.26			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX VHT40 Mode 2452MHz Ant. 1+2-BF		
Remark:	Only worse case is reported.		

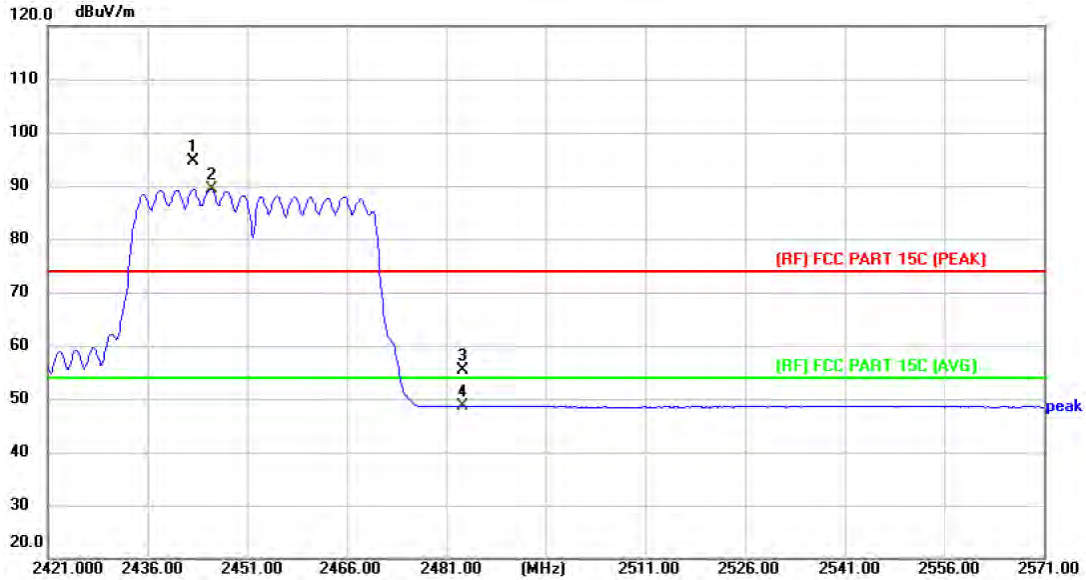


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2442.900	90.12	4.51	94.63	Fundamental Frequency		peak
2 *	2445.600	84.87	4.52	89.39			AVG
3	2483.500	50.70	4.65	55.35	74.00	-18.65	peak
4	2483.500	43.96	4.65	48.61	54.00	-5.39	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX VHT40 Mode 2452MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

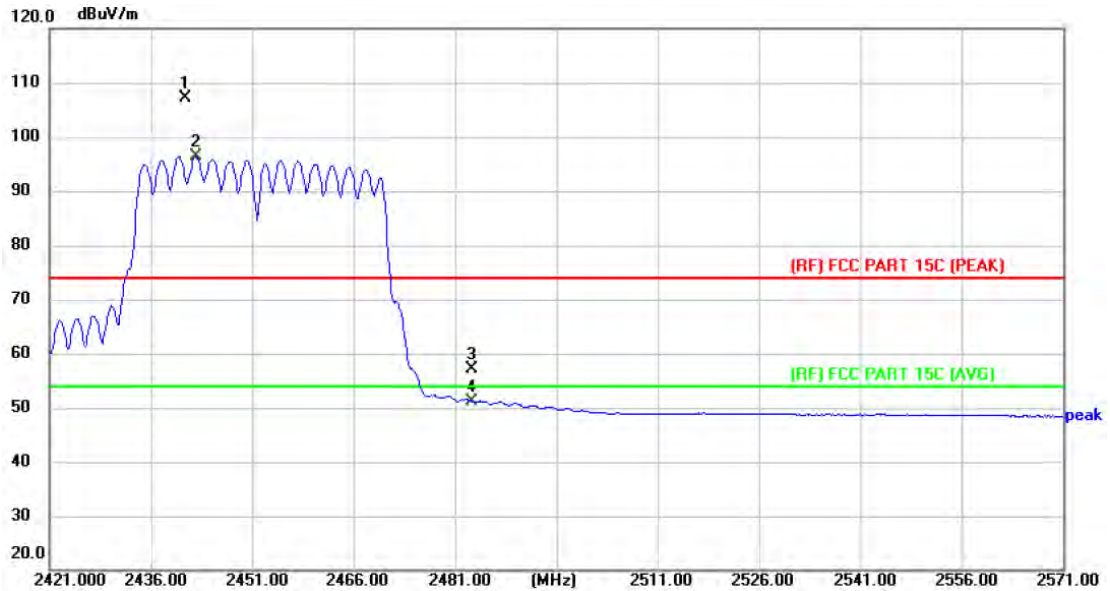


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2441.100	102.60	4.50	107.10	Fundamental Frequency		peak
2 *	2442.600	91.87	4.51	96.38			AVG
3	2483.500	52.48	4.65	57.13	74.00	-16.87	peak
4	2483.500	46.53	4.65	51.18	54.00	-2.82	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX AX(HE20) Mode 2412MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

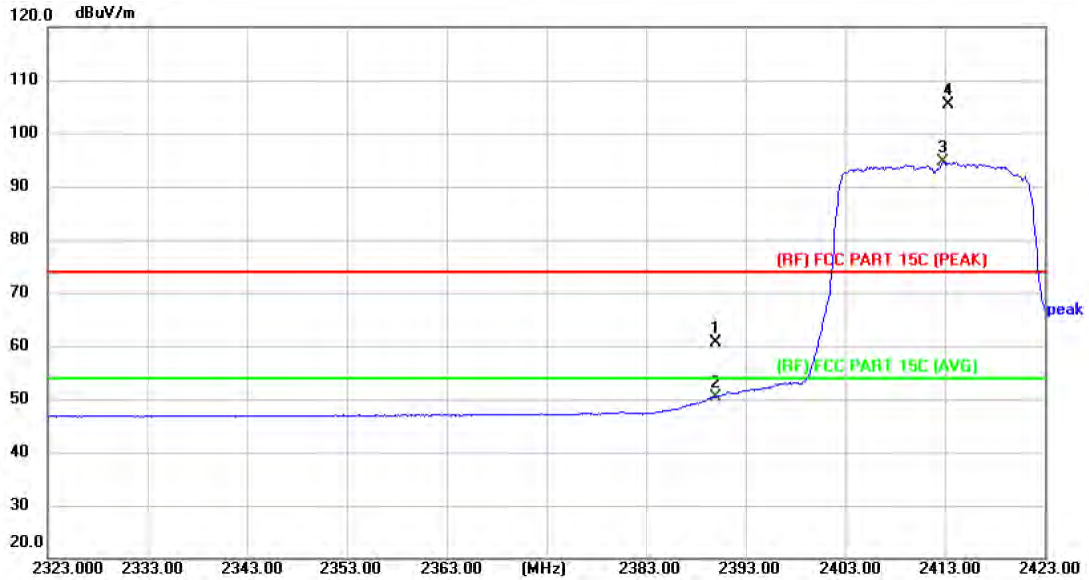


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	56.35	4.34	60.69	74.00	-13.31	peak
2	2390.000	46.07	4.34	50.41	54.00	-3.59	AVG
3 *	2412.800	90.18	4.41	94.59	Fundamental Frequency		AVG
4 X	2413.300	101.02	4.41	105.43			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX AX(HE20) Mode 2412MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

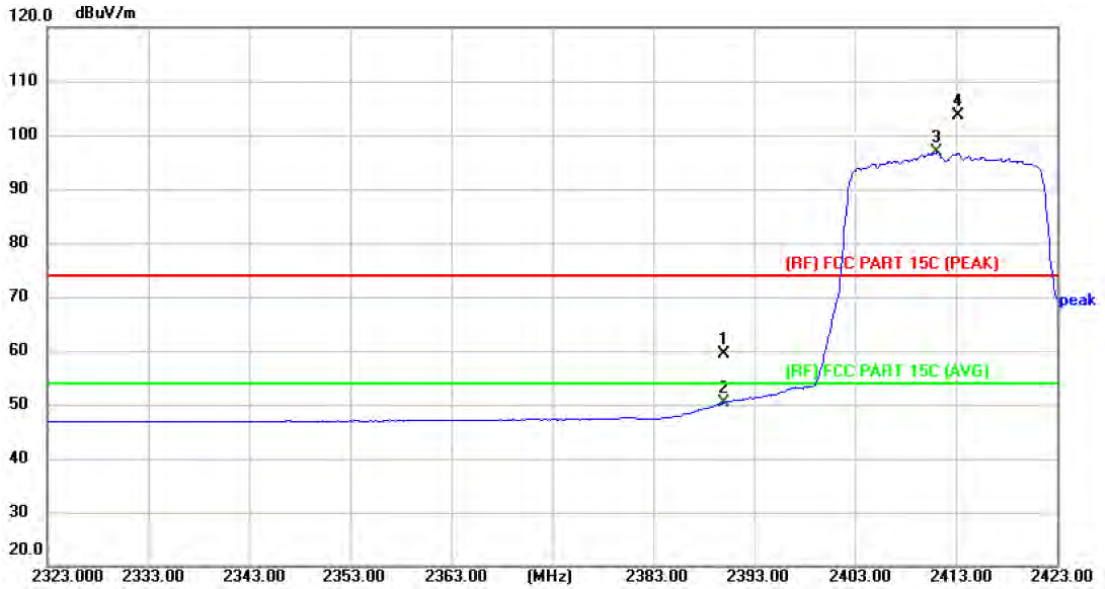


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	55.07	4.34	59.41	74.00	-14.59	peak
2	2390.000	46.02	4.34	50.36	54.00	-3.64	AVG
3 *	2411.000	92.38	4.40	96.78	Fundamental Frequency		AVG
4 X	2413.200	99.23	4.41	103.64			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX AX(HE20) Mode 2462MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

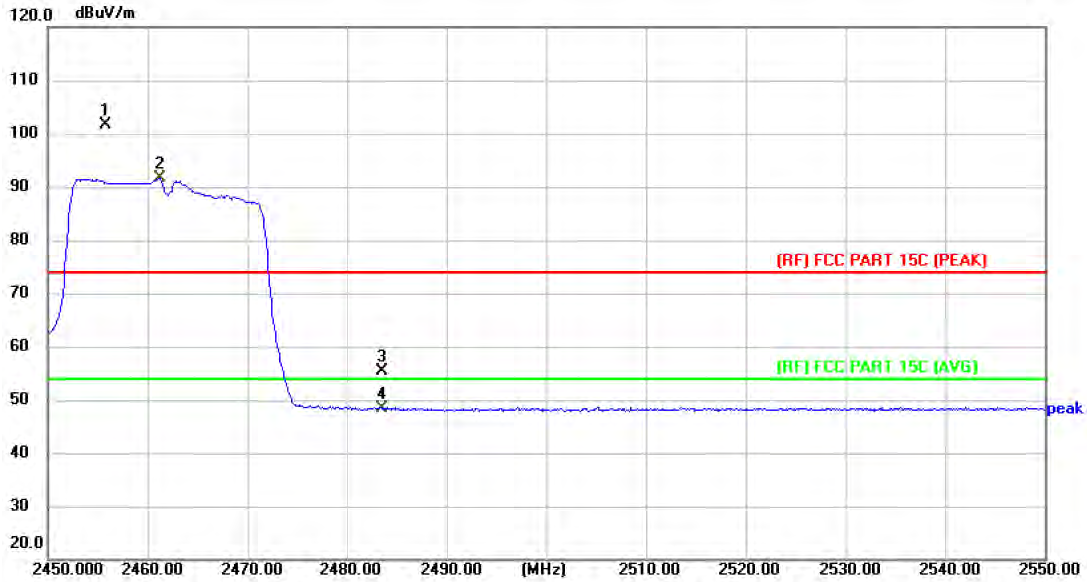


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2455.800	97.08	4.55	101.63	Fundamental Frequency		peak
2 *	2461.200	87.06	4.58	91.64			AVG
3	2483.500	50.63	4.65	55.28	74.00	-18.72	peak
4	2483.500	43.73	4.65	48.38	54.00	-5.62	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX AX(HE20) Mode 2462MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

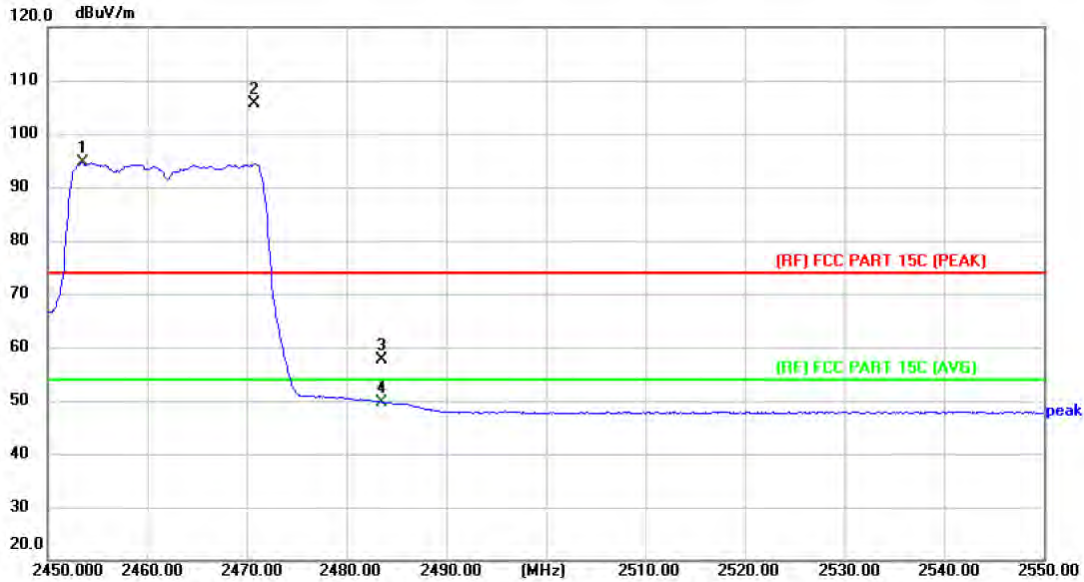


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	2453.500	90.05	4.55	94.60	Fundamental Frequency		AVG
2 X	2470.700	100.95	4.61	105.56			peak
3	2483.500	53.08	4.65	57.73	74.00	-16.27	peak
4	2483.500	45.08	4.65	49.73	54.00	-4.27	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX AX(HE40) Mode 2422MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

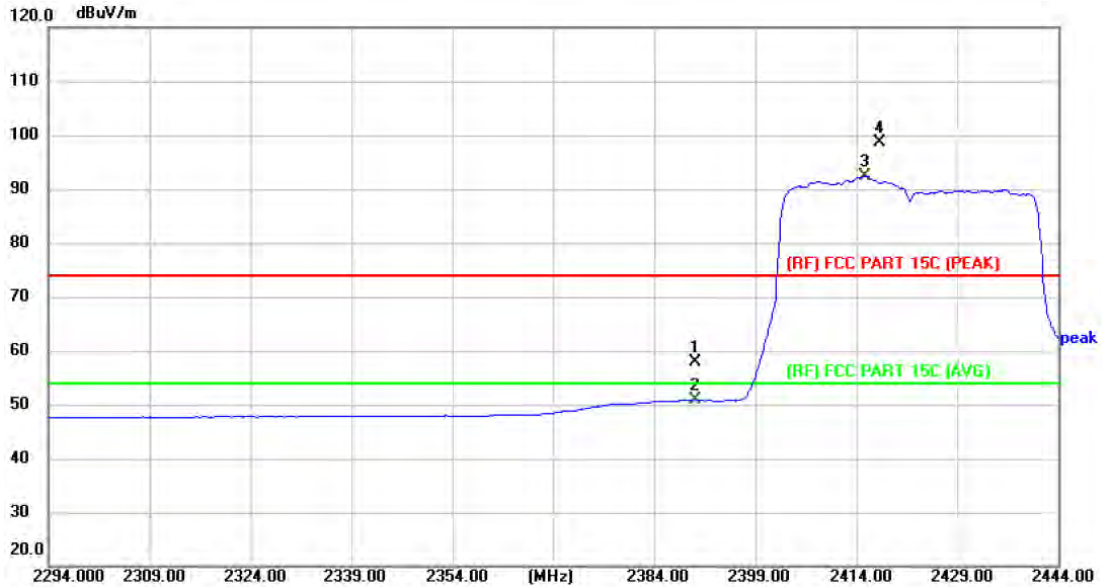


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	53.63	4.34	57.97	74.00	-16.03	peak
2	2390.000	46.42	4.34	50.76	54.00	-3.24	AVG
3 *	2415.200	87.99	4.42	92.41	Fundamental Frequency		AVG
4 X	2417.450	94.10	4.42	98.52			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX AX(HE40) Mode 2422MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

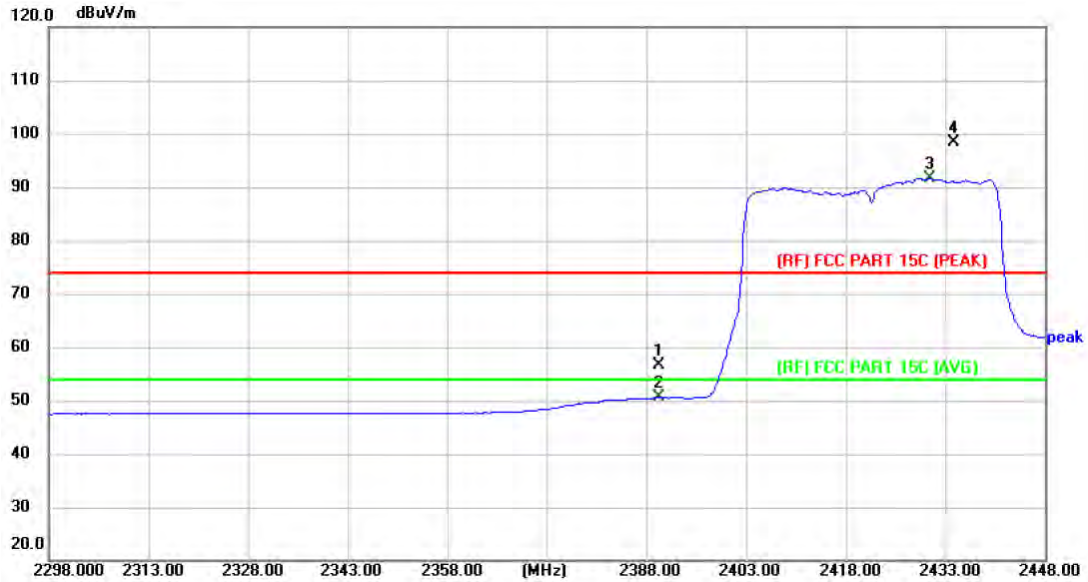


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	52.36	4.34	56.70	74.00	-17.30	peak
2	2390.000	46.20	4.34	50.54	54.00	-3.46	AVG
3 *	2430.750	87.24	4.46	91.70	Fundamental Frequency		AVG
4 X	2434.200	93.89	4.47	98.36			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX AX(HE40) Mode 2452MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

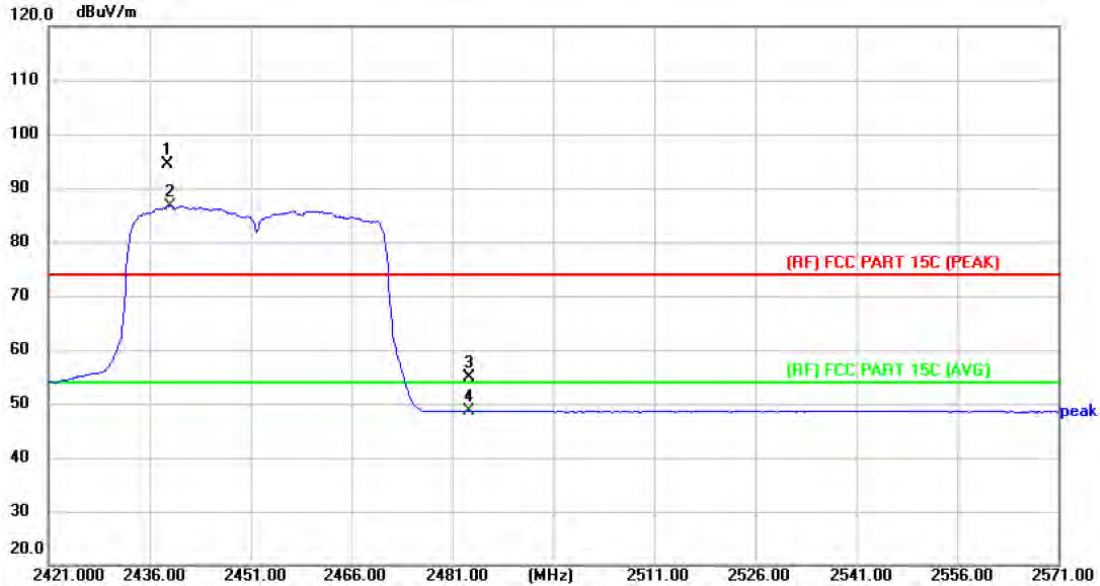


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2438.700	89.81	4.49	94.30	74.00	-19.09	peak
2 *	2439.000	82.11	4.49	86.60			Fundamental Frequency
3	2483.500	50.26	4.65	54.91	54.00	-5.40	peak
4	2483.500	43.95	4.65	48.60	54.00	-5.40	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.4°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX AX(HE40) Mode 2452MHz Ant.1+2-BF		
Remark:	Only worse case is reported.		

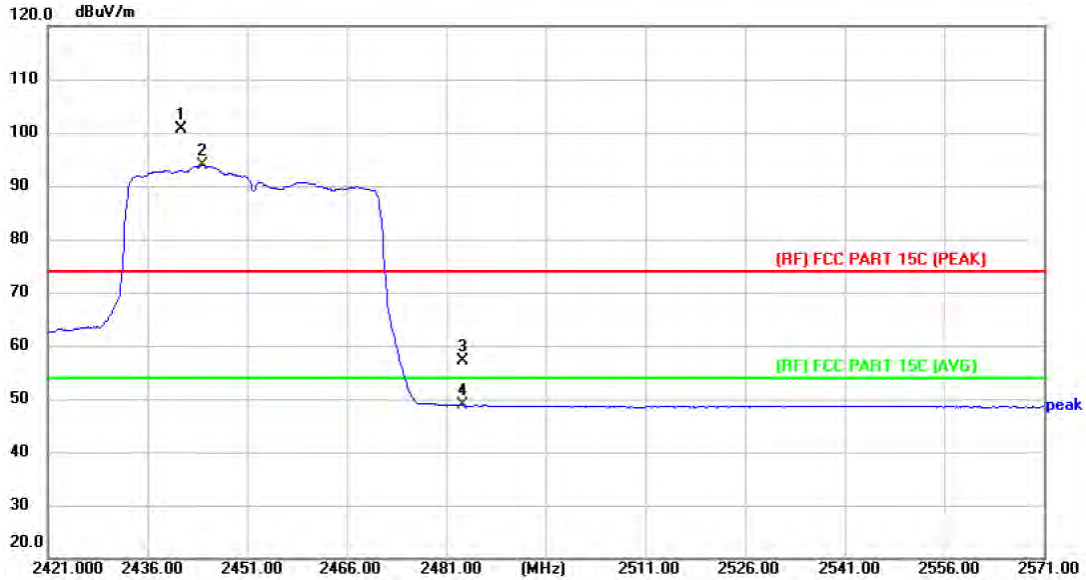

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	2441.100	96.01	4.50	100.51	Fundamental Frequency		peak
2 *	2444.250	89.31	4.52	93.83			AVG
3	2483.500	52.44	4.65	57.09	74.00	-16.91	peak
4	2483.500	44.13	4.65	48.78	54.00	-5.22	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

-----END OF REPORT-----

