



Radio Test Report

FCC ID: 2AW68-D222AH

Report No. : TBR-C-202208-0271-21
Applicant : Shenzhen SDMC Technology Co., Ltd.
Equipment Under Test (EUT)
EUT Name : D222AH Tri-band Wi-Fi 6E Extender
Model No. : D222AH
Series Model No. : ----
Brand Name : Altice Labs
Sample ID : 202208-0271-2-1#&202208-0271-2-2#
Receipt Date : 2022-09-20
Test Date : 2022-09-21 to 2023-03-09
Issue Date : 2023-03-09
Standards : FCC Part 15 Subpart E 15.407
Test Method : ANSI C63.10: 2013
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above.

Witness Engineer : 
Seven Wu
Engineer Supervisor : 
Ivan Su
Engineer Manager : 
Ray Lai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS	2
REVISION HISTORY	5
1. GENERAL INFORMATION ABOUT EUT	6
1.1 Client Information.....	6
1.2 General Description of EUT (Equipment Under Test)	6
1.3 Block Diagram Showing the Configuration of System Tested.....	8
1.4 Description of Support Units	8
1.5 Description of Test Mode.....	9
1.6 Description of Test Software Setting	11
1.7 Measurement Uncertainty	13
1.8 Test Facility.....	14
2. TEST SUMMARY	15
3. TEST SOFTWARE	15
4. TEST EQUIPMENT	16
5. CONDUCTED EMISSION TEST	17
5.1 Test Standard and Limit.....	17
5.2 Test Setup.....	17
5.3 Test Procedure.....	17
5.4 Deviation From Test Standard.....	17
5.5 EUT Operating Mode	18
5.6 Test Data.....	18
6. RADIATED AND CONDUCTED UNWANTED EMISSIONS	19
6.1 Test Standard and Limit.....	19
6.2 Test Setup.....	20
6.3 Test Procedure.....	21
6.4 Deviation From Test Standard.....	23
6.5 EUT Operating Mode	23
6.6 Test Data.....	23
7. RESTRICTED BANDS REQUIREMENT	24
7.1 Test Standard and Limit.....	24
7.2 Test Setup.....	25
7.3 Test Procedure.....	25
7.4 Deviation From Test Standard.....	26



7.5 EUT Operating Mode	26
7.6 Test Data	26
8. BANDWIDTH TEST	27
8.1 Test Standard and Limit	27
8.2 Test Setup	27
8.3 Test Procedure	27
8.4 Deviation From Test Standard	29
8.5 EUT Operating Mode	29
8.6 Test Data	29
9. MAXIMUM CONDUCTED OUTPUT POWER	30
9.1 Test Standard and Limit	30
9.2 Test Setup	30
9.3 Test Procedure	31
9.4 Deviation From Test Standard	31
9.5 EUT Operating Mode	31
9.6 Test Data	31
10. POWER SPECTRAL DENSITY TEST	32
10.1 Test Standard and Limit	32
10.2 Test Setup	32
10.3 Test Procedure	32
10.4 Deviation From Test Standard	33
10.5 Antenna Connected Construction	33
10.6 Test Data	33
11. FREQUENCY STABILITY	34
11.1 Test Standard and Limit	34
11.2 Test Setup	34
11.3 Test Procedure	34
11.4 Deviation From Test Standard	35
11.5 Antenna Connected Construction	35
11.6 Test Data	35
12. ANTENNA REQUIREMENT	36
12.1 Test Standard and Limit	36
12.2 Deviation From Test Standard	36
12.3 Antenna Connected Construction	36
12.4 Test Data	36
ATTACHMENT A-- CONDUCTED EMISSION TEST DATA	37



ATTACHMENT B--UNWANTED EMISSIONS DATA39
ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT TEST DATA.....321



1. General Information about EUT

1.1 Client Information

Applicant	:	Shenzhen SDMC Technology Co., Ltd.
Address	:	Room 1022, Floor 10, Building A, Customs Building, No. 2, Xin'an 3rd Road, Dalang Community, Xin'an Street, Bao'an District, Shenzhen, China
Manufacturer	:	Shenzhen SDMC Technology Co., Ltd.
Address	:	Room 1022, Floor 10, Building A, Customs Building, No. 2, Xin'an 3rd Road, Dalang Community, Xin'an Street, Bao'an District, Shenzhen, China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	D222AH Tri-band Wi-Fi 6E Extender		
Models No.	:	D222AH		
Model Different	:	N/A		
Product Description	:	Operation Frequency: U-NII-1: 5180MHz~5240MHz, U-NII-2A: 5250MHz~5320MHz U-NII-2C: 5500MHz~5720MHz, U-NII-3: 5745MHz~5825MHz		
	Antenna Gain:	PCB Antenna	Ant. 1	Ant. 2
		Band(U-NII-1):	3.61dBi	4.49dBi
		Band(U-NII-2A):	3.61dBi	4.49dBi
		Band(U-NII-2C):	3.61dBi	4.49dBi
	Band(U-NII-3):	3.61dBi	4.49dBi	
Modulation Type:	802.11a: OFDM (QPSK, BPSK, 16QAM, 64QAM) 802.11n: OFDM (QPSK, BPSK, 16QAM, 64QAM) 802.11ac: OFDM (QPSK, BPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)			
Power Rating	:	AC Adapter (Model: S024-1D120200VU): Input: 100-240V~, 50/60Hz, 0.6A Output: 12.0V=2.0A		
Software Version	:	N/A		
Hardware Version	:	N/A		
Remark:				
(1)The adapter provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.				
(2)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.				
(3)Antenna information from antenna specification.				




(4)Channel List:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5180~5240MHz (U-NII-1)	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz		
For 20 MHz Bandwidth, use channel 36, 40, 44, 48. For 40 MHz Bandwidth, use channel 38, 46. For 80 MHz Bandwidth, use channel 42.				
Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5320 MHz (U-NII-2A)	50	5250 MHz	58	5290MHz
	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310MHz
	56	5280MHz	64	5320 MHz
For 20 MHz Bandwidth, use channel 52, 56, 60, 64. For 40 MHz Bandwidth, use channel 54, 62. For 80 MHz Bandwidth, use channel 58. For 160 MHz Bandwidth, use channel 50.				
Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5500~5720 MHz (U-NII-2C)	100	5500 MHz	122	5610 MHz
	102	5510 MHz	124	5620 MHz
	104	5520 MHz	126	5630 MHz
	106	5530 MHz	128	5640 MHz
	108	5540 MHz	132	5660 MHz
	110	5550 MHz	134	5670 MHz
	112	5560 MHz	136	5680 MHz
	114	5570 MHz	138	5690 MHz
	116	5580 MHz	140	5700 MHz
	118	5590 MHz	142	5710 MHz
	120	5600 MHz	144	5720 MHz
For 20 MHz Bandwidth, use channel 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144 For 40 MHz Bandwidth, use channel 102, 110, 118, 126, 134, 142 For 80 MHz Bandwidth, use channel 106, 122, 138. For 160 MHz Bandwidth, use channel 114.				
Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5745~5825MHz (U-NII-3)	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz
For 20 MHz Bandwidth, use channel 149, 153, 157, 161, 165. For 40 MHz Bandwidth, use channel 151, 159. For 80 MHz Bandwidth, use channel 155.				



1.3 Block Diagram Showing the Configuration of System Tested

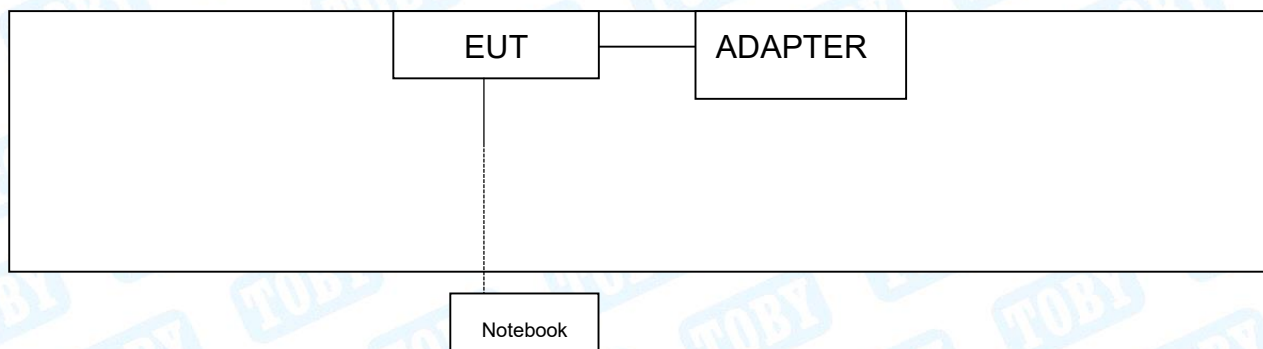

1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Used “√”
Notebook	Inspiron 5493	----	DELL	√
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	Yes	NO	1.0M	Accessory



1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test		
Final Test Mode	Description	
Mode 1	TX a Mode(5180MHz)	
For Radiated Test Below 1GHz		
Final Test Mode	Description	
Mode 2	TX a Mode(5180MHz)	
For Radiated Above 1GHz and RF Conducted Test		
Test Band	Final Test Mode	Description
U-NII-1	Mode 3	TX Mode 802.11a Mode Channel 36/40/48
	Mode 4	TX Mode 802.11n(HT20) Mode Channel 36/40/48
	Mode 5	TX Mode 802.11ac(VHT20) Mode Channel 36/40/48
	Mode 6	TX Mode 802.11ax(HE20) Mode Channel 36/40/48
	Mode 7	TX Mode 802.11n(HT40) Mode Channel 38/46
	Mode 8	TX Mode 802.11ac(VHT40) Mode Channel 38/46
	Mode 9	TX Mode 802.11ax(HE40) Mode Channel 38/46
	Mode 10	TX Mode 802.11ac(VHT80) Mode Channel 42
U-NII-2A	Mode 11	TX Mode 802.11ax(HE80) Mode Channel 42
	Mode 12	TX Mode 802.11a Mode Channel 52/56/64
	Mode 13	TX Mode 802.11n(HT20) Mode Channel 52/56/64
	Mode 14	TX Mode 802.11ac(VHT20) Mode Channel 52/56/64
	Mode 15	TX Mode 802.11ax(HE20) Mode Channel 52/56/64
	Mode 16	TX Mode 802.11n(HT40) Mode Channel 54/62
	Mode 17	TX Mode 802.11ac(VHT40) Mode Channel 54/62
	Mode 18	TX Mode 802.11ax(HE40) Mode Channel 54/62
	Mode 19	TX Mode 802.11ac(VHT80) Mode Channel 58
	Mode 20	TX Mode 802.11ax(HE80) Mode Channel 58
U-NII-2C	Mode 21	TX Mode 802.11ac(VHT160) Mode Channel 50
	Mode 22	TX Mode 802.11ax(HE160) Mode Channel 50
	Mode 23	TX Mode 802.11a Mode Channel 100/116/144
	Mode 24	TX Mode 802.11n(HT20) Mode Channel 100/116/144
	Mode 25	TX Mode 802.11ac(VHT20) Mode Channel 100/116/144
	Mode 26	TX Mode 802.11ax(HE20) Mode Channel 100/116/144
	Mode 27	TX Mode 802.11n(HT40) Mode Channel 102/110/142
	Mode 28	TX Mode 802.11ac(VHT40) Mode Channel 102/110/142
	Mode 29	TX Mode 802.11ax(HE40) Mode Channel 102/110/142
	Mode 23	TX Mode 802.11ac(VHT80) Mode Channel 106/138
U-NII-3	Mode 24	TX Mode 802.11ax(HE80) Mode Channel 106/138
	Mode 25	TX Mode 802.11ac(VHT160) Mode Channel 114
	Mode 26	TX Mode 802.11ax(HE160) Mode Channel 114
	Mode 27	TX Mode 802.11a Mode Channel 149/157/165
	Mode 28	TX Mode 802.11n(HT20) Mode Channel 149/157/165
	Mode 29	TX Mode 802.11ac(VHT20) Mode Channel 149/157/165
	Mode 30	TX Mode 802.11ax(HE20) Mode Channel 149/157/165
	Mode 31	TX Mode 802.11n(HT40) Mode Channel 151/159
Mode 32	TX Mode 802.11ac(VHT40) Mode Channel 151/159	
Mode 33	TX Mode 802.11ax(HE40) Mode Channel 151/159	
Mode 34	TX Mode 802.11ac(VHT80) Mode Channel 155	
Mode 35	TX Mode 802.11ax(HE80) Mode Channel 155	



Note:

(1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

Mode	Data Rate
A Mode-SISO/CDD	6Mbps
N(HT20) Mode-SDM/BF	MCS8
N(HT40) Mode-SDM/BF	MCS8
AC(VHT20) Mode-SDM/BF	MCS0NSS2
AC(VHT40) Mode-SDM/BF	MCS0NSS2
AC(VHT80) Mode-SDM/BF	MCS0NSS2
AC(VHT160) Mode-SDM/BF	MCS0NSS2
AX(HE20) Mode-SDM/BF	HE0NSS2
AX(HE40) Mode-SDM/BF	HE0NSS2
AX(HE80) Mode-SDM/BF	HE0NSS2
AX(HE160) Mode-SDM/BF	HE0NSS2
N(HT20) Mode-CDD	MCS0
N(HT40) Mode-CDD	MCS0
AC(VHT20) Mode-CDD	MCS0NSS1
AC(VHT40) Mode-CDD F	MCS0NSS1
AC(VHT80) Mode-CDD	MCS0NSS1
AC(VHT160) Mode-CDD	MCS0NSS1
AX(HE20) Mode-CDD	HE0NSS1
AX(HE40) Mode-CDD	HE0NSS1
AX(HE80) Mode-CDD	HE0NSS1
AX(HE160) Mode-CDD	HE0NSS1

(2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.

(3) The EUT is considered a Mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.



1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

Test Software: accessMtool							
U-NII-1 for FCC							
Mode	Frequency (MHz)	Parameters					
		SISO/SDM		CDD		BF	
		Ant.1	Ant.2	Ant.1	Ant.2	Ant.1	Ant.2
802.11a	5180	92	98	92		/	
	5200	92	98	92		/	
	5240	92	98	92		/	
802.11n(HT20)	5180	84		80		80	
	5200	84		80		80	
	5240	84		80		80	
802.11ac(VHT20)	5180	86		80		80	
	5200	86		80		80	
	5240	86		80		80	
802.11ax(HE20)	5180	86		84		84	
	5200	86		84		84	
	5240	86		84		84	
802.11n(HT40)	5190	86		80		80	
	5230	86		80		80	
802.11ac(VHT40)	5190	86		80		80	
	5230	86		80		80	
802.11ax(HE40)	5190	86		80		80	
	5230	86		80		80	
802.11ac(VHT80)	5210	86		87		87	
802.11ax(HE80)	5210	86		86		86	
U-NII-2A							
Mode	Frequency (MHz)	Parameters					
		SISO/SDM		CDD		BF	
		Ant.1	Ant.2	Ant.1	Ant.2	Ant.1	Ant.2
802.11a	5260	82	82	80		/	
	5280	82	82	80		/	
	5320	82	82	80		/	
802.11n(HT20)	5260	76		80		80	
	5280	76		80		80	
	5320	76		80		80	
802.11ac(VHT20)	5260	78		80		80	
	5280	78		80		80	
	5320	78		80		80	
802.11ax(HE20)	5260	78		80		80	
	5280	78		80		80	
	5320	78		80		80	
802.11n(HT40)	5270	80		80		80	
	5310	80		80		80	
802.11ac(VHT40)	5270	80		80		80	
	5310	80		80		80	
802.11ax(HE40)	5270	80		84		84	
	5310	80		84		84	
802.11ac(VHT80)	5290	80		80		80	
802.11ax(HE80)	5290	80		80		80	
802.11ac(VHT160)	5250	80		80		80	
802.11ax(HE160)	5250	80		80		80	



U-NII-2C							
Mode	Frequency (MHz)	Parameters					
		SISO/SDM		CDD		BF	
		Ant.1	Ant.2	Ant.1	Ant.2	Ant.1	Ant.2
802.11a	5500	82	80		80		/
	5580	82	80		80		/
	5700	82	80		80		/
	5720	82	80		80		/
802.11n(HT20)	5500		80		82		82
	5580		80		82		82
	5700		80		82		82
	5720		80		82		82
802.11ac(VHT20)	5500		76		80		80
	5580		76		80		80
	5700		76		80		80
	5720		76		80		80
802.11ax(HE20)	5500		80		80		80
	5580		80		80		80
	5700		80		80		80
	5720		80		80		80
802.11n(HT40)	5510		80		82		82
	5550		80		82		82
	5670		80		82		82
	5710		80		82		82
802.11ac(VHT40)	5510		80		84		84
	5550		80		84		84
	5670		80		84		84
	5710		80		84		84
802.11ax(HE40)	5510		80		84		84
	5550		80		84		84
	5670		80		84		84
	5710		80		84		84
802.11ac(VHT80)	5530		80		86		80
	5610		80		86		80
	5690		80		86		80
802.11ax(HE80)	5530		80		86		80
	5610		80		86		80
	5690		80		86		80
802.11ac(VHT160)	5570		80		80		80
802.11ax(HE160)	5570		80		80		80



U-NII-3							
Mode	Frequency (MHz)	Parameters(SISO/SDM/BF)					
		Ant.1		Ant.2		Ant.1	
		Ant.1	Ant.2	Ant.1	Ant.2	Ant.1	Ant.2
802.11a	5745	98	98	98			/
	5785	98	98	98			/
	5825	98	98	98			/
802.11n(HT20)	5745	86		86		86	
	5785	86		86		86	
	5825	86		86		86	
802.11ac(VHT20)	5745	86		86		86	
	5785	86		86		86	
	5825	86		86		86	
802.11ax(HE20)	5745	86		86		86	
	5785	86		86		86	
	5825	86		86		86	
802.11n(HT40)	5755	86		86		86	
	5795	86		86		86	
802.11ac(VHT40)	5755	86		86		86	
	5795	86		86		86	
802.11ax(HE40)	5755	86		86		86	
	5795	86		86		86	
802.11ac(VHT80)	5775	86		86		86	
802.11ax(HE80)	5775	86		86		86	

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB
RF Power-Conducted	/	± 0.95 dB
Power Spectral Density-Conducted	/	± 3 dB
Occupied Bandwidth	/	$\pm 3.8\%$
Unwanted Emission-Conducted	/	± 2.72 dB



1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.



2. Test Summary

Standard Section	Test Item	Test Sample(s)	Test Mode	Judgment
FCC 15.207(a)	Conducted Emission	202208-0271-2-1#	802.11a SISO	PASS
FCC 15.209 & 15.407(b)	Radiated Unwanted Emissions	202208-0271-2-1#	802.11a SISO 802.11n/ac/ax SDM 802.11a/n/ac/ax CDD 802.11n/ac/ax BF	PASS
FCC 15.203	Antenna Requirement	202208-0271-2-2#	/	PASS
FCC 15.407(a)	-26dB Emission Bandwidth	202208-0271-2-2#	802.11a SISO 802.11n/ac/ax SDM	PASS
FCC 15.407(a)	99% Occupied Bandwidth	202208-0271-2-2#	802.11a SISO 802.11n/ac/ax SDM	PASS
FCC 15.407(e)	-6dB Min Emission Bandwidth	202208-0271-2-2#	802.11a SISO 802.11n/ac/ax SDM	PASS
FCC 15.407(a)	Maximum Conducted Output Power	202208-0271-2-2#	802.11a SISO 802.11n/ac/ax SDM	PASS
FCC 15.407(a)	Power Spectral Density	202208-0271-2-2#	802.11a SISO 802.11n/ac/ax SDM 802.11a/n/ac/ax CDD 802.11n/ac/ax BF	PASS
FCC 15.407(b)& 15.205	Emissions in Restricted Bands	202208-0271-2-2#	802.11a SISO 802.11n/ac/ax SDM 802.11a/n/ac/ax CDD 802.11n/ac/ax BF	PASS
FCC 15.407(b)&15.209	Conducted Unwanted Emissions	202208-0271-2-2#	802.11a SISO 802.11n/ac/ax SDM	PASS
FCC 15.407(g)	Frequency Stability	202208-0271-2-2#	802.11a SISO 802.11n/ac/ax SDM	PASS
/	On Time and Duty Cycle	202208-0271-2-2#	802.11a SISO 802.11n/ac/ax SDM 802.11a/n/ac/ax CDD 802.11n/ac/ax BF	/

Note: (1) N/A is an abbreviation for Not Applicable.
(2) Some test items only test the SISO/SDM test mode.
(3) **SISO:** Simple Input Simple Output Mode, **SDM:** Space Division Multiplex(MIMO) mode, **CDD:** Cyclic Delay Diversity mode
BF: Beamforming Mode

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
Radiation Emission	EZ-EMC	EZ	FA-03A2RE+
RF Test System	JS1120-3	Tonscend	V3.2.22



4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jun. 23, 2022	Jun. 22, 2023
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jun. 23, 2022	Jun. 22, 2023
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jun. 22, 2022	Jun. 21, 2023
LISN	Rohde & Schwarz	ENV216	101131	Jun. 22, 2022	Jun. 21, 2023
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 01, 2022	Aug. 31, 2023
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
EMI Test Receiver	Rohde & Schwarz	ESU-8	100472/008	Feb. 23, 2023	Feb. 22, 2024
Bilog Antenna	SCHWARZBECK	VULB 9168	1225	Dec. 05, 2021	Dec. 04, 2023
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2463	Feb. 26, 2022	Feb.25, 2024
Horn Antenna	SCHWARZBECK	BBHA 9170	1118	Jun. 26, 2022	Jun.25, 2024
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jun. 26, 2022	Jun.25, 2024
HF Amplifier	Tonsced	TAP9E6343	AP21C806117	Sep. 01, 2022	Aug. 31, 2023
HF Amplifier	Tonsced	TAP051845	AP21C806141	Sep. 01, 2022	Aug. 31, 2023
HF Amplifier	Tonsced	TAP0184050	AP21C806129	Sep. 01, 2022	Aug. 31, 2023
Pre-amplifier	HP	8449B	3008A00849	Feb. 23, 2023	Feb. 22, 2024
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 01, 2022	Aug. 31, 2023
Spectrum Analyzer	KEYSIGT	N9020B	MY60110172	Sep. 01, 2022	Aug. 31, 2023
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 01, 2022	Aug. 31, 2023
Power Control Box	Tonsced	JS0806-4ADC	21C8060387	N/A	N/A
RF Control Unit	Tonsced	JS0806-2	21F8060439	Sep. 01, 2022	Aug. 31, 2023
Temperature and Humidity Chamber	ZhengHang	ZH-QTH-1500	ZH2107264	Jun. 22, 2022	Jun. 21, 2023



5. Conducted Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15.207


5.1.2 Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.2 Test Setup

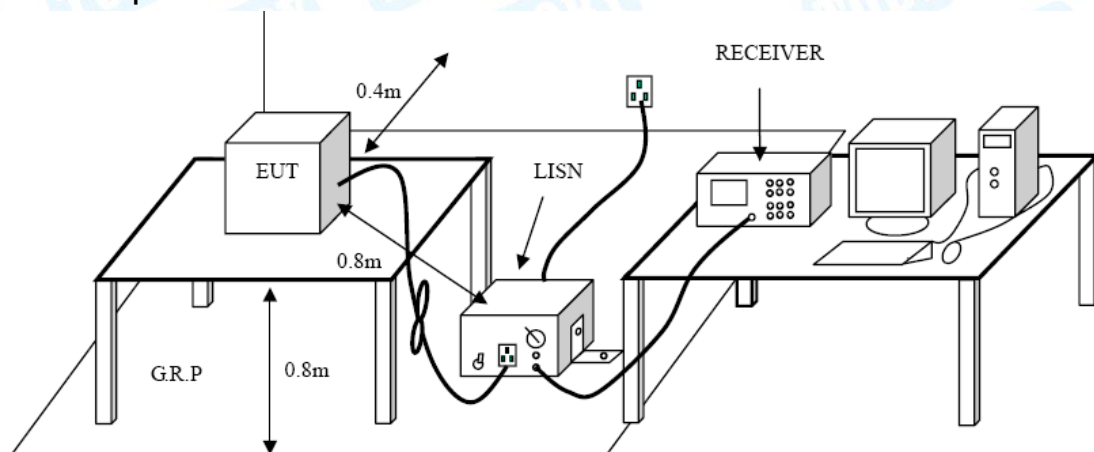

5.3 Test Procedure

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- The bandwidth of EMI test receiver is set at 9 kHz, and the test frequency band is from 0.15MHz to 30MHz.

5.4 Deviation From Test Standard

No deviation



5.5 EUT Operating Mode

Please refer to the description of test mode.

5.6 Test Data

Please refer to the Attachment A inside test report.



6. Radiated and Conducted Unwanted Emissions

6.1 Test Standard and Limit

6.1.1 Test Standard

FCC Part 15.209 & FCC Part 15.407(b)

6.1.2 Test Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

General field strength limits at frequencies Below 30MHz		
Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30

Note: 1, The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

General field strength limits at frequencies above 30 MHz		
Frequency (MHz)	Field strength (µV/m at 3 m)	Measurement Distance (meters)
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

General field strength limits at frequencies Above 1000MHz		
Frequency (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54

Note:
 (1) The tighter limit applies at the band edges.
 (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)
 (3) For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3

NOTE:

1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:




$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts)}$$

2, According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.


3, For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

6.2 Test Setup

Radiated measurement

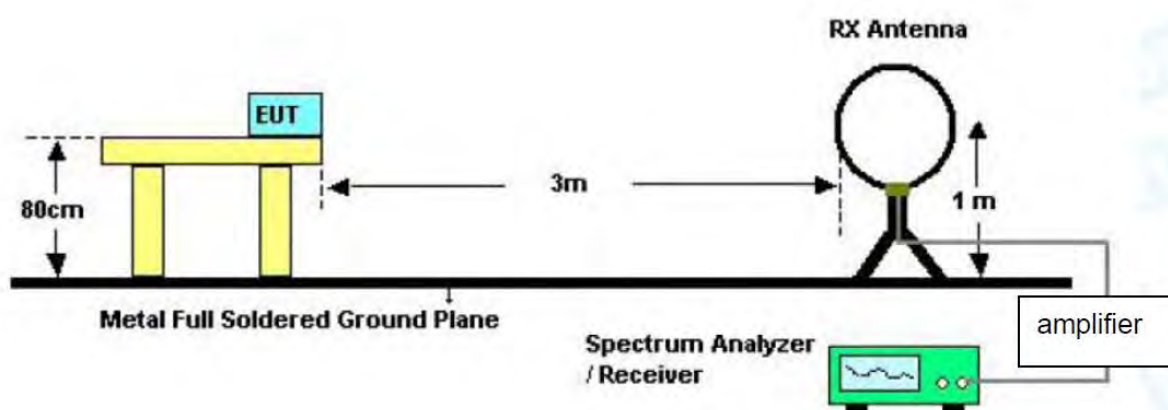


Below 30MHz Test Setup

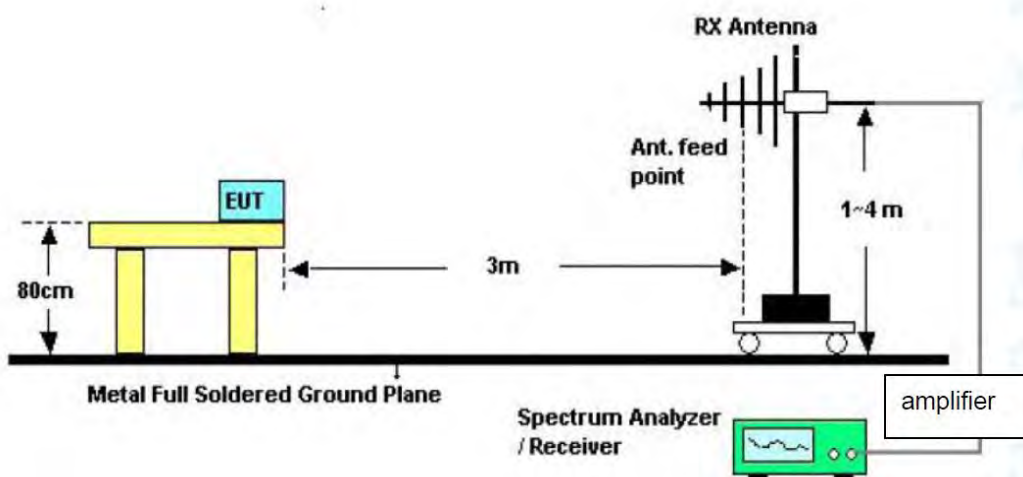


Below 1000MHz Test Setup



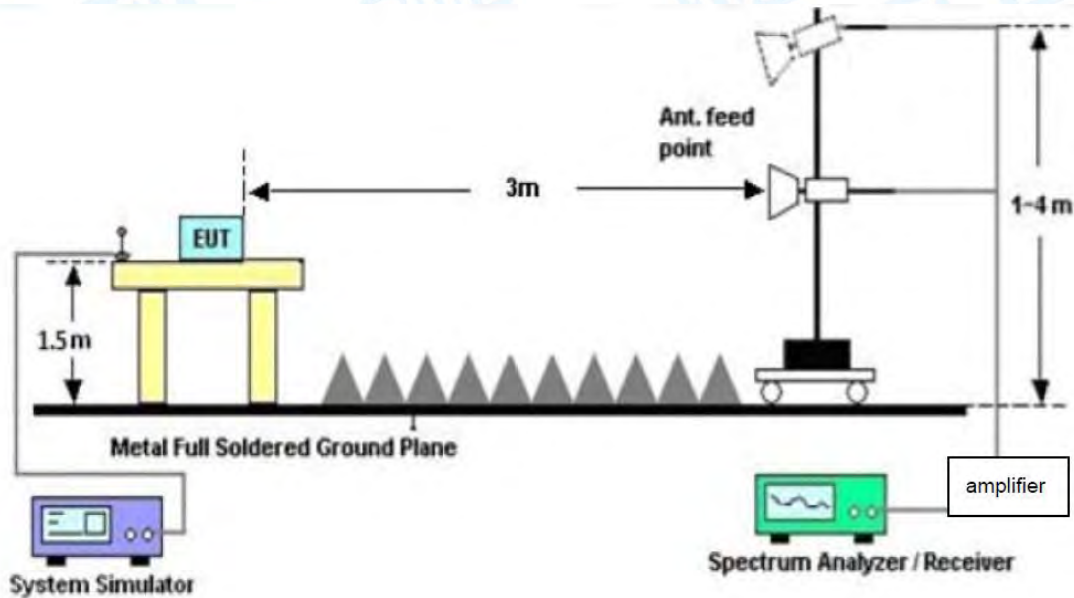

Above 1GHz Test Setup

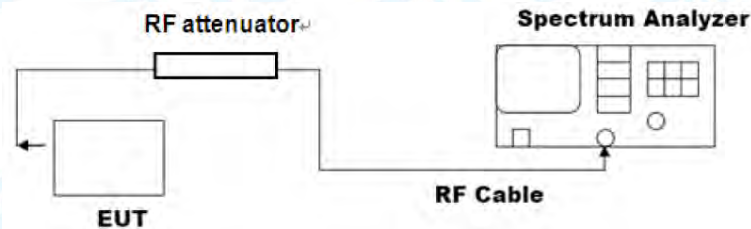

Conducted measurement

6.3 Test Procedure

---Radiated measurement

- The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to



comply with applicable limit above 1 GHz.

● Testing frequency range 30MHz-1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection. Testing frequency range 9KHz-150Hz the measuring instrument use VBW=200Hz with Quasi-peak detection. Testing frequency range 9KHz-30MHz the measuring instrument use VBW=9kHz with Quasi-peak detection.

● Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

● For the actual test configuration, please see the test setup photo.

--- Conducted measurement

● Reference level measurement

Establish a reference level by using the following procedure:

- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the $VBW \geq [3 * RBW]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

● Emission level measurement

Establish an emission level by using the following procedure:

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the $VBW \geq [3 * RBW]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.



6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Mode

Please refer to the description of test mode.

6.6 Test Data

Radiated measurement please refer to the Attachment B inside test report.

Conducted measurement please refer to the external appendix report of 5G Wi-Fi.



7. Restricted Bands Requirement

7.1 Test Standard and Limit

7.1.1 Test Standard

FCC Part 15.205 & FCC Part 15.407(b)

7.1.2 Test Limit

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3

NOTE:

1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts)}$$


2, According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

Note: According the ANSI C63.10 11.12.2 antenna-port conducted measurements may also be used as an alternative to radiated measurements for determining compliance in the restricted frequency bands requirements. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case emissions is required.




7.2 Test Setup

Radiated measurement

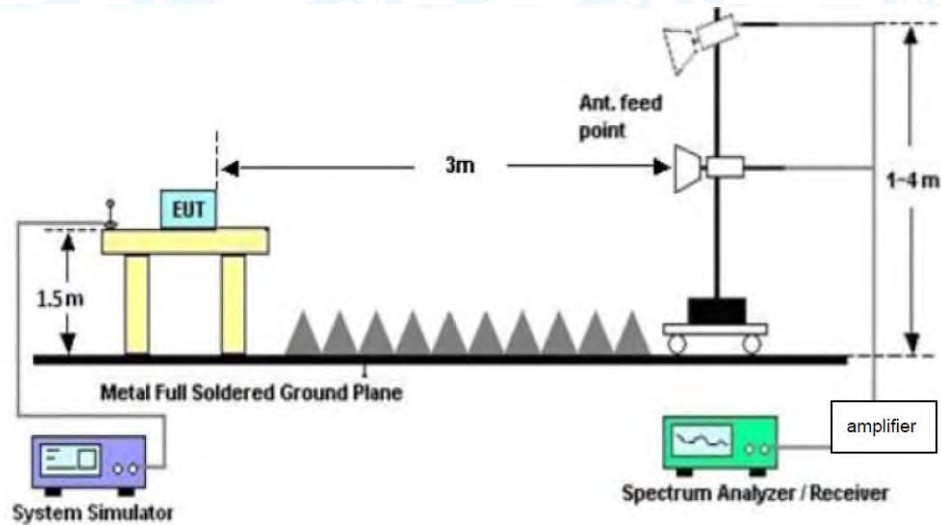

Conducted measurement

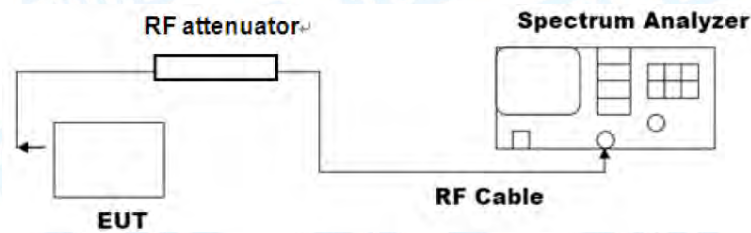

7.3 Test Procedure

---Radiated measurement

- Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- The Peak Value and average value both need to comply with applicable limit above 1 GHz.
- Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- For the actual test configuration, please see the test setup photo.



--- Conducted measurement

- a) Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 11.12.2.3 through 11.12.2.5 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP (see 11.12.2.6 for guidance on determining the applicable antenna gain).
- c) Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies ≤ 30 MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies > 1000 MHz).
- d) For MIMO devices, measure the power of each chain and sum the EIRP of all chains in linear terms (i.e., watts and mW).
- e) Convert the resultant EIRP to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log d + 104.8$$

where

E is the electric field strength in dBuV/m

EIRP is the equivalent isotropically radiated power in dBm

d is the specified measurement distance in m

- f) Compare the resultant electric field strength level with the applicable regulatory limit.
- g) Perform the radiated spurious emission test.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Mode

Please refer to the description of test mode.

7.6 Test Data

Please refer to the Attachment C inside test report.



8. Bandwidth Test

8.1 Test Standard and Limit


8.1.1 Test Standard

FCC Part 15.407(a) & FCC Part 15.407(e)

8.1.2 Test Limit

Test Item	Limit	Frequency Range (MHz)
26 dB Bandwidth	N/A	5150~5250
		5250~5350
		5470~5725
6 dB Bandwidth	$\geq 500\text{kHz}$	5725~5850
99% Bandwidth	N/A	5150~5250
		5250~5350
		5470~5725
		5725~5850

8.2 Test Setup

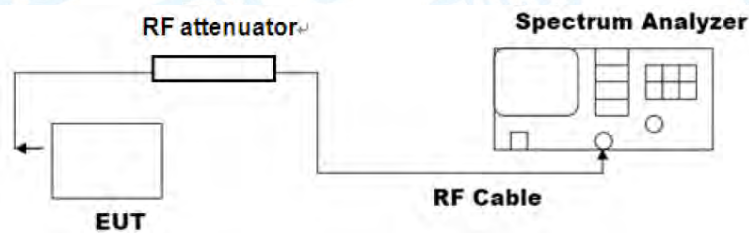

8.3 Test Procedure

---Emission bandwidth

● The procedure for this method is as follows:

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

NOTE—The automatic bandwidth measurement capability of a spectrum analyzer or an EMI receiver may be employed if it implements the functionality described in the preceding items.



---DTS bandwidth

● The steps for the first option are as follows:

- a) Set RBW = 100 kHz.
- b) Set the VBW $\geq [3 \cdot \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

---occupied bandwidth

● The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The



process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

8.4 Deviation From Test Standard

No deviation

8.5 EUT Operating Mode

Please refer to the description of test mode.

8.6 Test Data

Please refer to the external appendix report of 5G Wi-Fi.



9. Maximum Conducted Output Power

9.1 Test Standard and Limit

9.1.1 Test Standard


FCC Part 15.407(a)

9.1.2 Test Limit


FCC Part 15 Subpart E(15.407)				
Limit	Frequency Range(MHz)			
	5150~5250	5250~5350	5470~5725	5725~5850
Max Conducted TX Power	Master Device: 1 Watt(30dBm) Client Device: 250mW(24dBm)	24dBm (250 mW) or 11 dBm+ 10 log B, whichever is lower (B= 26-dB emission BW)		1 Watt (30dBm)
Max E.I.R.P	4 W (36 dBm) with 6 dBi antenna 200 W (53 dBm) for fixed P-t-P application with 23 dBiantenna Additional rule for outdoor operation: Max_EIRP< 125 mW(21 dBm) at any elevation angle > 30°from horizon	1 W (30 dBm) with 6 dBi antenna		4 W (36 dBm) with 6 dBi antenna
TPC	NO	YES, if Max_EIRP ≥ 500 mW (27 dBm) and able to lower EIRP below 24dBm NO, if Max_EIRP < 500mW (27dBm)		NO

9.2 Test Setup

For channel straddling 5720MHz & 5710MHz & 5690MHz



For Other Channel



9.3 Test Procedure

For channel straddling 5720MHz & 5710MHz & 5690MHz

- a) Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.
- b) Set RBW = 1 MHz.
- c) Set VBW \geq 3 MHz.
- d) Number of points in sweep \geq [2 X span / RBW]. (This gives bin-to-bin spacing \leq RBW / 2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98%, use a video trigger with the trigger level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle \geq 98%, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.

For Other Channel

- The EUT was connected to RF power meter via a broadband power sensor as show the block above. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.

9.4 Deviation From Test Standard

No deviation

9.5 EUT Operating Mode

Please refer to the description of test mode.

9.6 Test Data

Please refer to the external appendix report of 5G Wi-Fi.



10. Power Spectral Density Test

10.1 Test Standard and Limit


10.1.1 Test Standard

FCC Part 15.407(a)

10.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	Master Device: 17dBm/MHz Client Device: 11dBm/MHz	5150~5250
	11dBm/MHz	5250~5350
	11dBm/MHz	5470~5725
	30dBm/500kHz	5725~5850

10.2 Test Setup

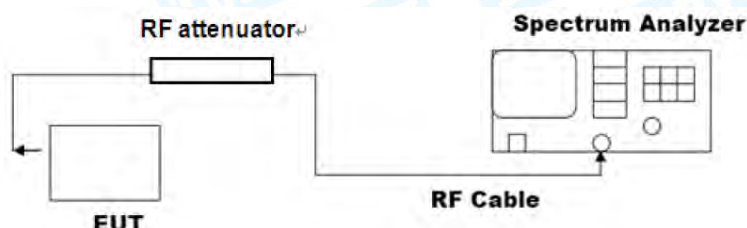

10.3 Test Procedure

● Notwithstanding that some regulatory requirements refer to peak power spectral density (PPSD), in some cases the intent is to measure the maximum value of the time average of the power spectral density during a period of continuous transmission. The procedure for this method is as follows:

- a) Create an average power spectrum for the EUT operating mode being tested by following the instructions in 12.3.2 for measuring maximum conducted output power using a spectrum analyzer or EMI receiver; that is, select the appropriate test method (SA-1, SA-2, SA-3, or their respective alternatives) and apply it up to, but not including, the step labeled, "Compute power...".(This procedure is required even if the maximum conducted output power measurement was performed using the power meter method PM.)
- b) Use the peak search function on the instrument to find the peak of the spectrum.
- c) Make the following adjustments to the peak value of the spectrum, if applicable:
 - 1) If method SA-2 or SA-2A was used, then add $[10 \log (1 / D)]$, where D is the duty cycle, to the peak of the spectrum.



- 2) If method SA-3A was used and the linear mode was used in step h) of 12.3.2.7, add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- d) The result is the PPSD.
- e) The procedure in item a) through item c) requires the use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified by some regulatory authorities.⁹⁵ This requirement also permits use of resolution bandwidths less than 1 MHz"provided that the measured power is integrated to show the total power over the measurement bandwidth"(i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth, the following adjustments to the procedures apply:
- 1) Set $RBW \geq 1 / T$, where T is defined in 12.2 a).
 - 2) Set $VBW \geq [3 * RBW]$.
 - 3) Care shall be taken such that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

10.4 Deviation From Test Standard

No deviation

10.5 Antenna Connected Construction

Please refer to the description of test mode.

10.6 Test Data

Please refer to the external appendix report of 5G Wi-Fi.



11. Frequency Stability

11.1 Test Standard and Limit


11.1.1 Test Standard

FCC Part 15.407(g)

11.1.2 Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

11.2 Test Setup

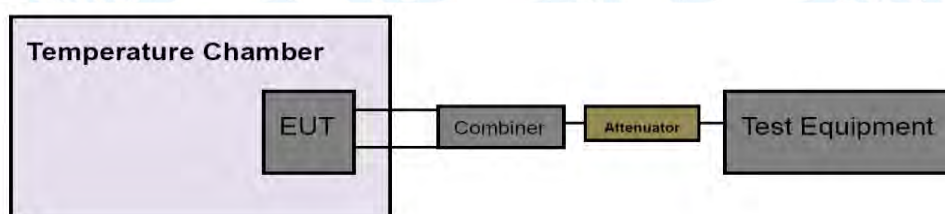

11.3 Test Procedure

Frequency stability with respect to ambient temperature

a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.

b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.

e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.

f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

g) Measure the frequency at each of frequencies specified in 5.6.

h) Switch OFF the EUT but do not switch OFF the oscillator heater.



- i) Lower the chamber temperature by not more than 10°C, and allow the temperature inside the chamber to stabilize.
- j) Repeat step f) through step i) down to the lowest specified temperature.

Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15°C to +25°C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

- a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

- b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

- c) Measure the frequency at each of the frequencies specified in 5.6.

- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage as described in 5.13.

11.4 Deviation From Test Standard

No deviation

11.5 Antenna Connected Construction

Please refer to the description of test mode.

11.6 Test Data

Please refer to the external appendix report of 5G Wi-Fi.



12. Antenna Requirement

12.1 Test Standard and Limit

12.1.1 Test Standard

FCC Part 15.203

12.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

12.2 Deviation From Test Standard

No deviation

12.3 Antenna Connected Construction

The max. gains of the antenna used for transmitting is Ant.1: 3.61dBi/ Ant.2: 4.49dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

12.4 Test Data


The EUT antenna is a PCB Antenna. It complies with the standard requirement.

Antenna Type
<input type="checkbox"/> Permanent attached antenna
<input checked="" type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna



Attachment A-- Conducted Emission Test Data

Temperature:	24.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V 60Hz		
Terminal:	Line		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

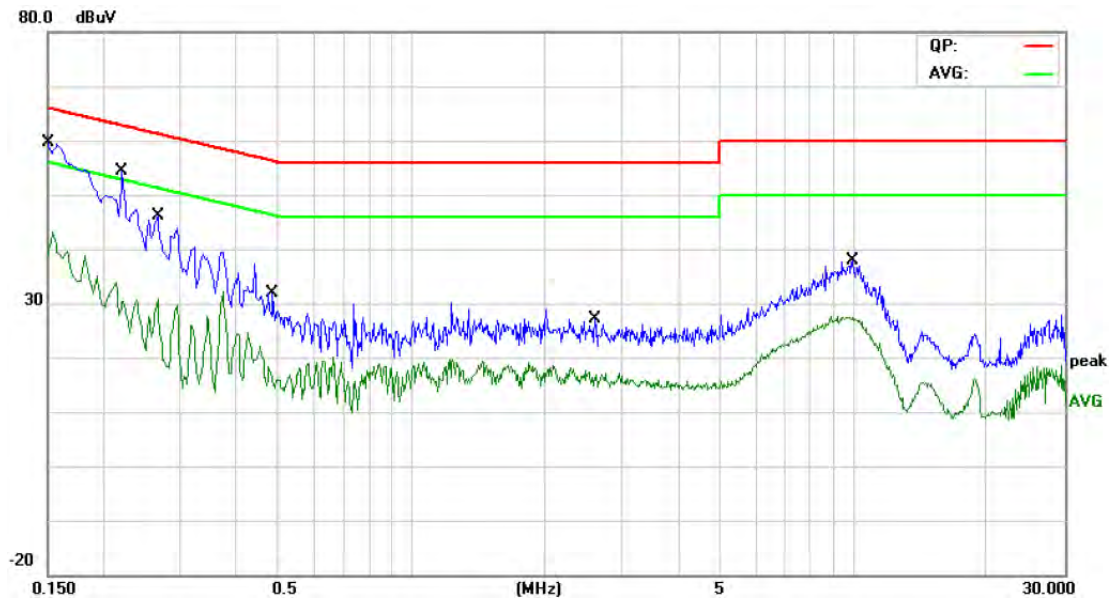

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1500	43.91	11.11	55.02	65.99	-10.97	QP
2		0.1500	26.76	11.11	37.87	55.99	-18.12	AVG
3		0.2220	31.28	10.97	42.25	62.74	-20.49	QP
4		0.2220	15.12	10.97	26.09	52.74	-26.65	AVG
5		0.2660	30.25	10.90	41.15	61.24	-20.09	QP
6		0.2660	17.26	10.90	28.16	51.24	-23.08	AVG
7		0.4860	12.37	10.93	23.30	56.24	-32.94	QP
8		0.4860	4.38	10.93	15.31	46.24	-30.93	AVG
9		2.6060	9.40	10.31	19.71	56.00	-36.29	QP
10		2.6060	4.72	10.31	15.03	46.00	-30.97	AVG
11		9.9540	21.00	10.14	31.14	60.00	-28.86	QP
12		9.9540	16.49	10.14	26.63	50.00	-23.37	AVG


Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)

2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



Temperature:	24.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V 60Hz		
Terminal:	Neutral		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

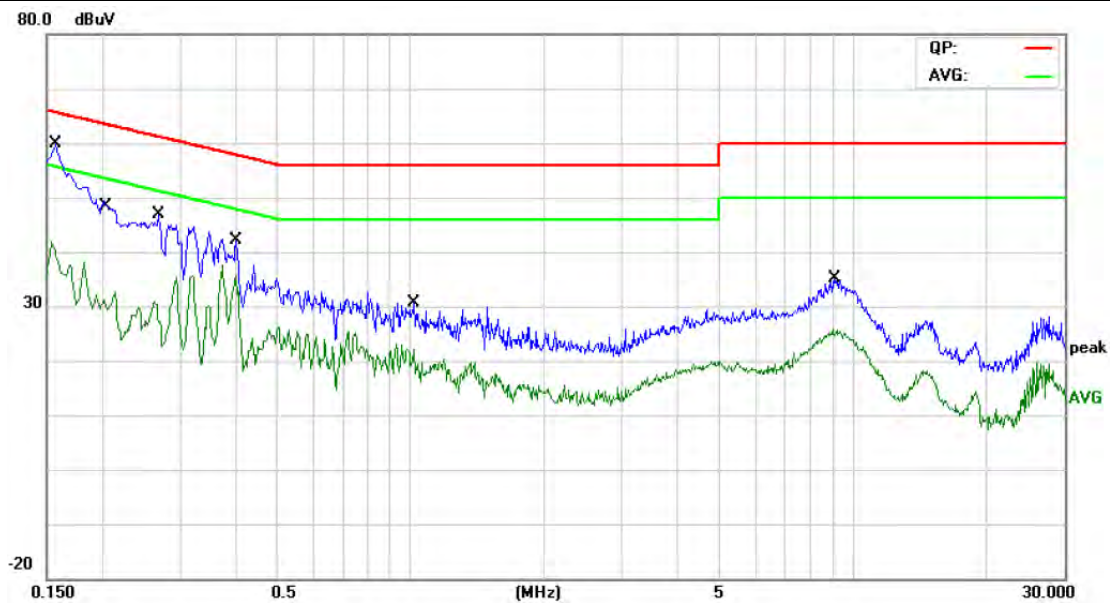

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1580	45.15	11.00	56.15	65.56	-9.41	QP
2		0.1580	29.40	11.00	40.40	55.56	-15.16	AVG
3		0.2072	36.52	11.11	47.63	63.31	-15.68	QP
4		0.2072	21.89	11.11	33.00	53.31	-20.31	AVG
5		0.2700	27.12	11.01	38.13	61.12	-22.99	QP
6		0.2700	14.74	11.01	25.75	51.12	-25.37	AVG
7		0.4020	26.39	10.89	37.28	57.81	-20.53	QP
8		0.4020	24.03	10.89	34.92	47.81	-12.89	AVG
9		1.0180	11.57	10.70	22.27	56.00	-33.73	QP
10		1.0180	5.66	10.70	16.36	46.00	-29.64	AVG
11		9.0860	16.70	10.14	26.84	60.00	-33.16	QP
12		9.0860	11.76	10.14	21.90	50.00	-28.10	AVG

Remark:
 1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
 2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



Attachment B--Unwanted Emissions Data

---Radiated Unwanted Emissions

9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB Below the permissible value has no need to be reported.

30MHz~1GHz

Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V 60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2		
Remark:	Only worse case is reported.		



No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	132.6850	43.39	-22.50	20.89	43.50	-22.61	QP	P
2	208.5803	47.26	-23.80	23.46	43.50	-20.04	QP	P
3 *	241.6763	51.12	-22.51	28.61	46.00	-17.39	QP	P
4	300.3672	45.39	-20.64	24.75	46.00	-21.25	QP	P
5	535.7073	41.89	-14.76	27.13	46.00	-18.87	QP	P
6	787.8513	35.76	-10.13	25.63	46.00	-20.37	QP	P

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBUV/m) = Corr. (dB/m) + Read Level (dBUV)
3. Margin (dB) = QuasiPeak (dBUV/m) - Limit QPK(dBUV/m)



Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V 60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2		
Remark:	Only worse case is reported.		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	62.6507	55.69	-23.80	31.89	40.00	-8.11	QP	P
2	95.4270	50.10	-25.79	24.31	43.50	-19.19	QP	P
3	189.0743	49.44	-23.55	25.89	43.50	-17.61	QP	P
4	211.5265	51.58	-23.69	27.89	43.50	-15.61	QP	P
5	241.6763	49.15	-22.51	26.64	46.00	-19.36	QP	P
6	533.8321	48.69	-14.80	33.89	46.00	-12.11	QP	P

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



Above 1GHz

5180MHz-5240MHz(U-NII-1)

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)-SISO		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10360.325	48.20	6.06	54.26	68.30	-14.04	peak	P
2 *	10360.457	40.32	6.06	46.38	54.00	-7.62	AVG	P

Remark:
Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
 5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1) -SISO		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10360.457	41.50	6.06	47.56	54.00	-6.44	AVG	P
2	10360.658	50.68	6.06	56.74	68.30	-11.56	peak	P

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
 5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.174</td> <td>49.34</td> <td>6.29</td> <td>55.63</td> <td>68.30</td> <td>-12.67</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10400.644</td> <td>40.23</td> <td>6.29</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10400.174	49.34	6.29	55.63	68.30	-12.67	peak	P	2 *	10400.644	40.23	6.29	46.52	54.00	-7.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10400.174	49.34	6.29	55.63	68.30	-12.67	peak	P																						
2 *	10400.644	40.23	6.29	46.52	54.00	-7.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.253</td> <td>49.57</td> <td>6.29</td> <td>55.86</td> <td>68.30</td> <td>-12.44</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10400.657</td> <td>40.42</td> <td>6.29</td> <td>46.71</td> <td>54.00</td> <td>-7.29</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10400.253	49.57	6.29	55.86	68.30	-12.44	peak	P	2 *	10400.657	40.42	6.29	46.71	54.00	-7.29	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10400.253	49.57	6.29	55.86	68.30	-12.44	peak	P																						
2 *	10400.657	40.42	6.29	46.71	54.00	-7.29	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.245</td> <td>49.87</td> <td>6.36</td> <td>56.23</td> <td>68.30</td> <td>-12.07</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10480.387</td> <td>40.35</td> <td>6.36</td> <td>46.71</td> <td>54.00</td> <td>-7.29</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10480.245	49.87	6.36	56.23	68.30	-12.07	peak	P	2 *	10480.387	40.35	6.36	46.71	54.00	-7.29	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10480.245	49.87	6.36	56.23	68.30	-12.07	peak	P																						
2 *	10480.387	40.35	6.36	46.71	54.00	-7.29	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10480.447</td> <td>39.35</td> <td>6.36</td> <td>45.71</td> <td>54.00</td> <td>-8.29</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10480.687</td> <td>49.76</td> <td>6.36</td> <td>56.12</td> <td>68.30</td> <td>-12.18</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10480.447	39.35	6.36	45.71	54.00	-8.29	AVG	P	2	10480.687	49.76	6.36	56.12	68.30	-12.18	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10480.447	39.35	6.36	45.71	54.00	-8.29	AVG	P																						
2	10480.687	49.76	6.36	56.12	68.30	-12.18	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)-SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.317</td> <td>50.72</td> <td>6.06</td> <td>56.78</td> <td>68.30</td> <td>-11.52</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10360.786</td> <td>41.50</td> <td>6.06</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10360.317	50.72	6.06	56.78	68.30	-11.52	peak	P	2 *	10360.786	41.50	6.06	47.56	54.00	-6.44	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10360.317	50.72	6.06	56.78	68.30	-11.52	peak	P																						
2 *	10360.786	41.50	6.06	47.56	54.00	-6.44	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertial																													
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.287</td> <td>50.39</td> <td>6.06</td> <td>56.45</td> <td>68.30</td> <td>-11.85</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10360.341</td> <td>41.50</td> <td>6.06</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10360.287	50.39	6.06	56.45	68.30	-11.85	peak	P	2 *	10360.341	41.50	6.06	47.56	54.00	-6.44	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10360.287	50.39	6.06	56.45	68.30	-11.85	peak	P																						
2 *	10360.341	41.50	6.06	47.56	54.00	-6.44	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.325</td> <td>49.60</td> <td>6.29</td> <td>55.89</td> <td>68.30</td> <td>-12.41</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10400.387</td> <td>40.30</td> <td>6.29</td> <td>46.59</td> <td>54.00</td> <td>-7.41</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10400.325	49.60	6.29	55.89	68.30	-12.41	peak	P	2 *	10400.387	40.30	6.29	46.59	54.00	-7.41	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10400.325	49.60	6.29	55.89	68.30	-12.41	peak	P																						
2 *	10400.387	40.30	6.29	46.59	54.00	-7.41	AVG	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.315</td> <td>50.44</td> <td>6.29</td> <td>56.73</td> <td>68.30</td> <td>-11.57</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10400.786</td> <td>41.26</td> <td>6.29</td> <td>47.55</td> <td>54.00</td> <td>-6.45</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10400.315	50.44	6.29	56.73	68.30	-11.57	peak	P	2 *	10400.786	41.26	6.29	47.55	54.00	-6.45	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10400.315	50.44	6.29	56.73	68.30	-11.57	peak	P																						
2 *	10400.786	41.26	6.29	47.55	54.00	-6.45	AVG	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10480.228</td> <td>39.92</td> <td>6.36</td> <td>46.28</td> <td>54.00</td> <td>-7.72</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10480.382</td> <td>48.20</td> <td>6.36</td> <td>54.56</td> <td>68.30</td> <td>-13.74</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10480.228	39.92	6.36	46.28	54.00	-7.72	AVG	P	2	10480.382	48.20	6.36	54.56	68.30	-13.74	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10480.228	39.92	6.36	46.28	54.00	-7.72	AVG	P																						
2	10480.382	48.20	6.36	54.56	68.30	-13.74	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.668</td> <td>50.83</td> <td>6.36</td> <td>57.19</td> <td>68.30</td> <td>-11.11</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10480.677</td> <td>40.39</td> <td>6.36</td> <td>46.75</td> <td>54.00</td> <td>-7.25</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10480.668	50.83	6.36	57.19	68.30	-11.11	peak	P	2 *	10480.677	40.39	6.36	46.75	54.00	-7.25	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10480.668	50.83	6.36	57.19	68.30	-11.11	peak	P																						
2 *	10480.677	40.39	6.36	46.75	54.00	-7.25	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10360.147</td> <td>40.19</td> <td>6.06</td> <td>46.25</td> <td>54.00</td> <td>-7.75</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10360.328</td> <td>50.78</td> <td>6.06</td> <td>56.84</td> <td>68.30</td> <td>-11.46</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10360.147	40.19	6.06	46.25	54.00	-7.75	AVG	P	2	10360.328	50.78	6.06	56.84	68.30	-11.46	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10360.147	40.19	6.06	46.25	54.00	-7.75	AVG	P																						
2	10360.328	50.78	6.06	56.84	68.30	-11.46	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.296</td> <td>50.22</td> <td>6.06</td> <td>56.28</td> <td>68.30</td> <td>-12.02</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10360.956</td> <td>41.45</td> <td>6.06</td> <td>47.51</td> <td>54.00</td> <td>-6.49</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10360.296	50.22	6.06	56.28	68.30	-12.02	peak	P	2 *	10360.956	41.45	6.06	47.51	54.00	-6.49	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10360.296	50.22	6.06	56.28	68.30	-12.02	peak	P																						
2 *	10360.956	41.45	6.06	47.51	54.00	-6.49	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10400.441</td> <td>40.29</td> <td>6.29</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10400.652</td> <td>50.77</td> <td>6.29</td> <td>57.06</td> <td>68.30</td> <td>-11.24</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10400.441	40.29	6.29	46.58	54.00	-7.42	AVG	P	2	10400.652	50.77	6.29	57.06	68.30	-11.24	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10400.441	40.29	6.29	46.58	54.00	-7.42	AVG	P																						
2	10400.652	50.77	6.29	57.06	68.30	-11.24	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10400.336</td> <td>39.53</td> <td>6.29</td> <td>45.82</td> <td>54.00</td> <td>-8.18</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10400.785</td> <td>49.90</td> <td>6.29</td> <td>56.19</td> <td>68.30</td> <td>-12.11</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10400.336	39.53	6.29	45.82	54.00	-8.18	AVG	P	2	10400.785	49.90	6.29	56.19	68.30	-12.11	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10400.336	39.53	6.29	45.82	54.00	-8.18	AVG	P																						
2	10400.785	49.90	6.29	56.19	68.30	-12.11	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ac(VHT20) Mode 5240MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.445</td> <td>50.93</td> <td>6.36</td> <td>57.29</td> <td>68.30</td> <td>-11.01</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10480.625</td> <td>39.77</td> <td>6.36</td> <td>46.13</td> <td>54.00</td> <td>-7.87</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10480.445	50.93	6.36	57.29	68.30	-11.01	peak	P	2 *	10480.625	39.77	6.36	46.13	54.00	-7.87	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10480.445	50.93	6.36	57.29	68.30	-11.01	peak	P																						
2 *	10480.625	39.77	6.36	46.13	54.00	-7.87	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10480.374</td> <td>38.83</td> <td>6.36</td> <td>45.19</td> <td>54.00</td> <td>-8.81</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10480.659</td> <td>49.90</td> <td>6.36</td> <td>56.26</td> <td>68.30</td> <td>-12.04</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10480.374	38.83	6.36	45.19	54.00	-8.81	AVG	P	2	10480.659	49.90	6.36	56.26	68.30	-12.04	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10480.374	38.83	6.36	45.19	54.00	-8.81	AVG	P																						
2	10480.659	49.90	6.36	56.26	68.30	-12.04	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ax(HE20) Mode 5180MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10360.123</td> <td>40.39</td> <td>6.06</td> <td>46.45</td> <td>54.00</td> <td>-7.55</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10360.235</td> <td>50.39</td> <td>6.06</td> <td>56.45</td> <td>68.30</td> <td>-11.85</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10360.123	40.39	6.06	46.45	54.00	-7.55	AVG	P	2	10360.235	50.39	6.06	56.45	68.30	-11.85	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10360.123	40.39	6.06	46.45	54.00	-7.55	AVG	P																						
2	10360.235	50.39	6.06	56.45	68.30	-11.85	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11 ax(HE20) Mode 5180MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.386</td> <td>49.57</td> <td>6.06</td> <td>55.63</td> <td>68.30</td> <td>-12.67</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10360.674</td> <td>41.46</td> <td>6.06</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10360.386	49.57	6.06	55.63	68.30	-12.67	peak	P	2 *	10360.674	41.46	6.06	47.52	54.00	-6.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10360.386	49.57	6.06	55.63	68.30	-12.67	peak	P																						
2 *	10360.674	41.46	6.06	47.52	54.00	-6.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ax(HE20) Mode 5200MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.274</td> <td>51.17</td> <td>6.29</td> <td>57.46</td> <td>68.30</td> <td>-10.84</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10400.574</td> <td>40.24</td> <td>6.29</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10400.274	51.17	6.29	57.46	68.30	-10.84	peak	P	2 *	10400.574	40.24	6.29	46.53	54.00	-7.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10400.274	51.17	6.29	57.46	68.30	-10.84	peak	P																						
2 *	10400.574	40.24	6.29	46.53	54.00	-7.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11 ax(HE20) Mode 5200MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10400.125</td> <td>39.57</td> <td>6.29</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10400.395</td> <td>50.23</td> <td>6.29</td> <td>56.52</td> <td>68.30</td> <td>-11.78</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10400.125	39.57	6.29	45.86	54.00	-8.14	AVG	P	2	10400.395	50.23	6.29	56.52	68.30	-11.78	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10400.125	39.57	6.29	45.86	54.00	-8.14	AVG	P																						
2	10400.395	50.23	6.29	56.52	68.30	-11.78	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ax(HE20) Mode 5240MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10480.232</td> <td>39.47</td> <td>6.36</td> <td>45.83</td> <td>54.00</td> <td>-8.17</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10480.648</td> <td>50.06</td> <td>6.36</td> <td>56.42</td> <td>68.30</td> <td>-11.88</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10480.232	39.47	6.36	45.83	54.00	-8.17	AVG	P	2	10480.648	50.06	6.36	56.42	68.30	-11.88	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10480.232	39.47	6.36	45.83	54.00	-8.17	AVG	P																						
2	10480.648	50.06	6.36	56.42	68.30	-11.88	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE20) Mode 5240MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.385</td> <td>50.49</td> <td>6.36</td> <td>56.85</td> <td>68.30</td> <td>-11.45</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10480.457</td> <td>40.22</td> <td>6.36</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10480.385	50.49	6.36	56.85	68.30	-11.45	peak	P	2 *	10480.457	40.22	6.36	46.58	54.00	-7.42	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10480.385	50.49	6.36	56.85	68.30	-11.45	peak	P																						
2 *	10480.457	40.22	6.36	46.58	54.00	-7.42	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.377</td> <td>50.14</td> <td>6.14</td> <td>56.28</td> <td>68.30</td> <td>-12.02</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10380.653</td> <td>40.89</td> <td>6.14</td> <td>47.03</td> <td>54.00</td> <td>-6.97</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10380.377	50.14	6.14	56.28	68.30	-12.02	peak	P	2 *	10380.653	40.89	6.14	47.03	54.00	-6.97	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10380.377	50.14	6.14	56.28	68.30	-12.02	peak	P																						
2 *	10380.653	40.89	6.14	47.03	54.00	-6.97	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.269</td> <td>50.61</td> <td>6.14</td> <td>56.75</td> <td>68.30</td> <td>-11.55</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10380.882</td> <td>40.41</td> <td>6.14</td> <td>46.55</td> <td>54.00</td> <td>-7.45</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10380.269	50.61	6.14	56.75	68.30	-11.55	peak	P	2 *	10380.882	40.41	6.14	46.55	54.00	-7.45	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10380.269	50.61	6.14	56.75	68.30	-11.55	peak	P																						
2 *	10380.882	40.41	6.14	46.55	54.00	-7.45	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.259</td> <td>49.93</td> <td>6.32</td> <td>56.25</td> <td>68.30</td> <td>-12.05</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10460.357</td> <td>40.53</td> <td>6.32</td> <td>46.85</td> <td>54.00</td> <td>-7.15</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10460.259	49.93	6.32	56.25	68.30	-12.05	peak	P	2 *	10460.357	40.53	6.32	46.85	54.00	-7.15	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10460.259	49.93	6.32	56.25	68.30	-12.05	peak	P																						
2 *	10460.357	40.53	6.32	46.85	54.00	-7.15	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.113</td> <td>50.96</td> <td>6.32</td> <td>57.28</td> <td>68.30</td> <td>-11.02</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10460.451</td> <td>40.50</td> <td>6.32</td> <td>46.82</td> <td>54.00</td> <td>-7.18</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10460.113	50.96	6.32	57.28	68.30	-11.02	peak	P	2 *	10460.451	40.50	6.32	46.82	54.00	-7.18	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10460.113	50.96	6.32	57.28	68.30	-11.02	peak	P																						
2 *	10460.451	40.50	6.32	46.82	54.00	-7.18	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.254</td> <td>49.97</td> <td>6.14</td> <td>56.11</td> <td>68.30</td> <td>-12.19</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10380.345</td> <td>39.72</td> <td>6.14</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10380.254	49.97	6.14	56.11	68.30	-12.19	peak	P	2 *	10380.345	39.72	6.14	45.86	54.00	-8.14	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10380.254	49.97	6.14	56.11	68.30	-12.19	peak	P																						
2 *	10380.345	39.72	6.14	45.86	54.00	-8.14	AVG	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10380.264</td> <td>40.39</td> <td>6.14</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10380.388</td> <td>50.57</td> <td>6.14</td> <td>56.71</td> <td>68.30</td> <td>-11.59</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10380.264	40.39	6.14	46.53	54.00	-7.47	AVG	P	2	10380.388	50.57	6.14	56.71	68.30	-11.59	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10380.264	40.39	6.14	46.53	54.00	-7.47	AVG	P																						
2	10380.388	50.57	6.14	56.71	68.30	-11.59	peak	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.441</td> <td>50.05</td> <td>6.32</td> <td>56.37</td> <td>68.30</td> <td>-11.93</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10460.454</td> <td>40.20</td> <td>6.32</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10460.441	50.05	6.32	56.37	68.30	-11.93	peak	P	2 *	10460.454	40.20	6.32	46.52	54.00	-7.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10460.441	50.05	6.32	56.37	68.30	-11.93	peak	P																						
2 *	10460.454	40.20	6.32	46.52	54.00	-7.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.341</td> <td>49.64</td> <td>6.32</td> <td>55.96</td> <td>68.30</td> <td>-12.34</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10460.389</td> <td>39.86</td> <td>6.32</td> <td>46.18</td> <td>54.00</td> <td>-7.82</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10460.341	49.64	6.32	55.96	68.30	-12.34	peak	P	2 *	10460.389	39.86	6.32	46.18	54.00	-7.82	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10460.341	49.64	6.32	55.96	68.30	-12.34	peak	P																						
2 *	10460.389	39.86	6.32	46.18	54.00	-7.82	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ax(HE40) Mode 5190MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.569</td> <td>49.55</td> <td>6.14</td> <td>55.69</td> <td>68.30</td> <td>-12.61</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10380.892</td> <td>39.54</td> <td>6.14</td> <td>45.68</td> <td>54.00</td> <td>-8.32</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10380.569	49.55	6.14	55.69	68.30	-12.61	peak	P	2 *	10380.892	39.54	6.14	45.68	54.00	-8.32	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10380.569	49.55	6.14	55.69	68.30	-12.61	peak	P																						
2 *	10380.892	39.54	6.14	45.68	54.00	-8.32	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11 ax(HE40) Mode 5190MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.341</td> <td>50.39</td> <td>6.14</td> <td>56.53</td> <td>68.30</td> <td>-11.77</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10380.451</td> <td>39.88</td> <td>6.14</td> <td>46.02</td> <td>54.00</td> <td>-7.98</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10380.341	50.39	6.14	56.53	68.30	-11.77	peak	P	2 *	10380.451	39.88	6.14	46.02	54.00	-7.98	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10380.341	50.39	6.14	56.53	68.30	-11.77	peak	P																						
2 *	10380.451	39.88	6.14	46.02	54.00	-7.98	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5230MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10460.338</td> <td>39.64</td> <td>6.32</td> <td>45.96</td> <td>54.00</td> <td>-8.04</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10460.754</td> <td>50.07</td> <td>6.32</td> <td>56.39</td> <td>68.30</td> <td>-11.91</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10460.338	39.64	6.32	45.96	54.00	-8.04	AVG	P	2	10460.754	50.07	6.32	56.39	68.30	-11.91	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10460.338	39.64	6.32	45.96	54.00	-8.04	AVG	P																						
2	10460.754	50.07	6.32	56.39	68.30	-11.91	peak	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5230MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.474</td> <td>50.74</td> <td>6.32</td> <td>57.06</td> <td>68.30</td> <td>-11.24</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10460.781</td> <td>39.83</td> <td>6.32</td> <td>46.15</td> <td>54.00</td> <td>-7.85</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10460.474	50.74	6.32	57.06	68.30	-11.24	peak	P	2 *	10460.781	39.83	6.32	46.15	54.00	-7.85	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10460.474	50.74	6.32	57.06	68.30	-11.24	peak	P																						
2 *	10460.781	39.83	6.32	46.15	54.00	-7.85	AVG	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.145</td> <td>50.58</td> <td>6.25</td> <td>56.83</td> <td>68.30</td> <td>-11.47</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10420.451</td> <td>39.67</td> <td>6.25</td> <td>45.92</td> <td>54.00</td> <td>-8.08</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10420.145	50.58	6.25	56.83	68.30	-11.47	peak	P	2 *	10420.451	39.67	6.25	45.92	54.00	-8.08	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10420.145	50.58	6.25	56.83	68.30	-11.47	peak	P																						
2 *	10420.451	39.67	6.25	45.92	54.00	-8.08	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10420.356</td> <td>40.57</td> <td>6.25</td> <td>46.82</td> <td>54.00</td> <td>-7.18</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10420.358</td> <td>50.86</td> <td>6.25</td> <td>57.11</td> <td>68.30</td> <td>-11.19</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10420.356	40.57	6.25	46.82	54.00	-7.18	AVG	P	2	10420.358	50.86	6.25	57.11	68.30	-11.19	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10420.356	40.57	6.25	46.82	54.00	-7.18	AVG	P																						
2	10420.358	50.86	6.25	57.11	68.30	-11.19	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE80) Mode 5210MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.145</td> <td>50.00</td> <td>6.25</td> <td>56.25</td> <td>68.30</td> <td>-12.05</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10420.371</td> <td>40.61</td> <td>6.25</td> <td>46.86</td> <td>54.00</td> <td>-7.14</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10420.145	50.00	6.25	56.25	68.30	-12.05	peak	P	2 *	10420.371	40.61	6.25	46.86	54.00	-7.14	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10420.145	50.00	6.25	56.25	68.30	-12.05	peak	P																						
2 *	10420.371	40.61	6.25	46.86	54.00	-7.14	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE80) Mode 5210MHz (U-NII-1) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.344</td> <td>49.97</td> <td>6.25</td> <td>56.22</td> <td>68.30</td> <td>-12.08</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10420.674</td> <td>39.64</td> <td>6.25</td> <td>45.89</td> <td>54.00</td> <td>-8.11</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10420.344	49.97	6.25	56.22	68.30	-12.08	peak	P	2 *	10420.674	39.64	6.25	45.89	54.00	-8.11	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10420.344	49.97	6.25	56.22	68.30	-12.08	peak	P																						
2 *	10420.674	39.64	6.25	45.89	54.00	-8.11	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



5250MHz-5320MHz(U-NII-2A)

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A) -SISO		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10520.673	50.32	6.39	56.71	68.30	-11.59	peak	P
2 *	10520.744	39.26	6.39	45.65	54.00	-8.35	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A) -SISO		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10520.364	49.05	6.40	55.45	68.30	-12.85	peak	P
2 *	10520.675	40.34	6.39	46.73	54.00	-7.27	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10560.548</td> <td>49.73</td> <td>6.38</td> <td>56.11</td> <td>68.30</td> <td>-12.19</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10560.718</td> <td>40.00</td> <td>6.38</td> <td>46.38</td> <td>54.00</td> <td>-7.62</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10560.548	49.73	6.38	56.11	68.30	-12.19	peak	P	2 *	10560.718	40.00	6.38	46.38	54.00	-7.62	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10560.548	49.73	6.38	56.11	68.30	-12.19	peak	P																						
2 *	10560.718	40.00	6.38	46.38	54.00	-7.62	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10560.324</td> <td>49.38</td> <td>6.38</td> <td>55.76</td> <td>68.30</td> <td>-12.54</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10560.546</td> <td>39.48</td> <td>6.38</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10560.324	49.38	6.38	55.76	68.30	-12.54	peak	P	2 *	10560.546	39.48	6.38	45.86	54.00	-8.14	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10560.324	49.38	6.38	55.76	68.30	-12.54	peak	P																						
2 *	10560.546	39.48	6.38	45.86	54.00	-8.14	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10640.427</td> <td>39.75</td> <td>6.63</td> <td>46.38</td> <td>54.00</td> <td>-7.62</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10640.689</td> <td>49.16</td> <td>6.63</td> <td>55.79</td> <td>68.30</td> <td>-12.51</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10640.427	39.75	6.63	46.38	54.00	-7.62	AVG	P	2	10640.689	49.16	6.63	55.79	68.30	-12.51	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10640.427	39.75	6.63	46.38	54.00	-7.62	AVG	P																						
2	10640.689	49.16	6.63	55.79	68.30	-12.51	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.124</td> <td>49.75</td> <td>6.62</td> <td>56.37</td> <td>68.30</td> <td>-11.93</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10640.357</td> <td>40.22</td> <td>6.63</td> <td>46.85</td> <td>54.00</td> <td>-7.15</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10640.124	49.75	6.62	56.37	68.30	-11.93	peak	P	2 *	10640.357	40.22	6.63	46.85	54.00	-7.15	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10640.124	49.75	6.62	56.37	68.30	-11.93	peak	P																						
2 *	10640.357	40.22	6.63	46.85	54.00	-7.15	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10520.628</td> <td>39.80</td> <td>6.39</td> <td>46.19</td> <td>54.00</td> <td>-7.81</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10520.717</td> <td>50.69</td> <td>6.39</td> <td>57.08</td> <td>68.30</td> <td>-11.22</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10520.628	39.80	6.39	46.19	54.00	-7.81	AVG	P	2	10520.717	50.69	6.39	57.08	68.30	-11.22	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10520.628	39.80	6.39	46.19	54.00	-7.81	AVG	P																						
2	10520.717	50.69	6.39	57.08	68.30	-11.22	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10520.141</td> <td>39.89</td> <td>6.40</td> <td>46.29</td> <td>54.00</td> <td>-7.71</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10520.679</td> <td>50.69</td> <td>6.39</td> <td>57.08</td> <td>68.30</td> <td>-11.22</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10520.141	39.89	6.40	46.29	54.00	-7.71	AVG	P	2	10520.679	50.69	6.39	57.08	68.30	-11.22	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10520.141	39.89	6.40	46.29	54.00	-7.71	AVG	P																						
2	10520.679	50.69	6.39	57.08	68.30	-11.22	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10560.119</td> <td>39.44</td> <td>6.38</td> <td>45.82</td> <td>54.00</td> <td>-8.18</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10560.628</td> <td>50.40</td> <td>6.38</td> <td>56.78</td> <td>68.30</td> <td>-11.52</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10560.119	39.44	6.38	45.82	54.00	-8.18	AVG	P	2	10560.628	50.40	6.38	56.78	68.30	-11.52	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10560.119	39.44	6.38	45.82	54.00	-8.18	AVG	P																						
2	10560.628	50.40	6.38	56.78	68.30	-11.52	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10560.297</td> <td>38.91</td> <td>6.38</td> <td>45.29</td> <td>54.00</td> <td>-8.71</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10560.548</td> <td>50.98</td> <td>6.38</td> <td>57.36</td> <td>68.30</td> <td>-10.94</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10560.297	38.91	6.38	45.29	54.00	-8.71	AVG	P	2	10560.548	50.98	6.38	57.36	68.30	-10.94	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10560.297	38.91	6.38	45.29	54.00	-8.71	AVG	P																						
2	10560.548	50.98	6.38	57.36	68.30	-10.94	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10640.297</td> <td>39.20</td> <td>6.63</td> <td>45.83</td> <td>54.00</td> <td>-8.17</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10640.457</td> <td>49.56</td> <td>6.63</td> <td>56.19</td> <td>68.30</td> <td>-12.11</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10640.297	39.20	6.63	45.83	54.00	-8.17	AVG	P	2	10640.457	49.56	6.63	56.19	68.30	-12.11	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10640.297	39.20	6.63	45.83	54.00	-8.17	AVG	P																						
2	10640.457	49.56	6.63	56.19	68.30	-12.11	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10640.658</td> <td>40.19</td> <td>6.63</td> <td>46.82</td> <td>54.00</td> <td>-7.18</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10640.682</td> <td>50.17</td> <td>6.63</td> <td>56.80</td> <td>68.30</td> <td>-11.50</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10640.658	40.19	6.63	46.82	54.00	-7.18	AVG	P	2	10640.682	50.17	6.63	56.80	68.30	-11.50	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10640.658	40.19	6.63	46.82	54.00	-7.18	AVG	P																						
2	10640.682	50.17	6.63	56.80	68.30	-11.50	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5260MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.267</td> <td>50.15</td> <td>6.40</td> <td>56.55</td> <td>68.30</td> <td>-11.75</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10520.417</td> <td>40.19</td> <td>6.40</td> <td>46.59</td> <td>54.00</td> <td>-7.41</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10520.267	50.15	6.40	56.55	68.30	-11.75	peak	P	2 *	10520.417	40.19	6.40	46.59	54.00	-7.41	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10520.267	50.15	6.40	56.55	68.30	-11.75	peak	P																						
2 *	10520.417	40.19	6.40	46.59	54.00	-7.41	AVG	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5260MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.628</td> <td>49.90</td> <td>6.39</td> <td>56.29</td> <td>68.30</td> <td>-12.01</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10520.628</td> <td>40.66</td> <td>6.39</td> <td>47.05</td> <td>54.00</td> <td>-6.95</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10520.628	49.90	6.39	56.29	68.30	-12.01	peak	P	2 *	10520.628	40.66	6.39	47.05	54.00	-6.95	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10520.628	49.90	6.39	56.29	68.30	-12.01	peak	P																						
2 *	10520.628	40.66	6.39	47.05	54.00	-6.95	AVG	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5280MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10560.447</td> <td>51.45</td> <td>6.38</td> <td>57.83</td> <td>68.30</td> <td>-10.47</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10560.545</td> <td>40.37</td> <td>6.38</td> <td>46.75</td> <td>54.00</td> <td>-7.25</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10560.447	51.45	6.38	57.83	68.30	-10.47	peak	P	2 *	10560.545	40.37	6.38	46.75	54.00	-7.25	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10560.447	51.45	6.38	57.83	68.30	-10.47	peak	P																						
2 *	10560.545	40.37	6.38	46.75	54.00	-7.25	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5280MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10560.599</td> <td>50.91</td> <td>6.38</td> <td>57.29</td> <td>68.30</td> <td>-11.01</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10560.661</td> <td>39.44</td> <td>6.38</td> <td>45.82</td> <td>54.00</td> <td>-8.18</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10560.599	50.91	6.38	57.29	68.30	-11.01	peak	P	2 *	10560.661	39.44	6.38	45.82	54.00	-8.18	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10560.599	50.91	6.38	57.29	68.30	-11.01	peak	P																						
2 *	10560.661	39.44	6.38	45.82	54.00	-8.18	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ac(VHT20) Mode 5320MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10640.575</td> <td>39.26</td> <td>6.63</td> <td>45.89</td> <td>54.00</td> <td>-8.11</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10640.598</td> <td>49.66</td> <td>6.63</td> <td>56.29</td> <td>68.30</td> <td>-12.01</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10640.575	39.26	6.63	45.89	54.00	-8.11	AVG	P	2	10640.598	49.66	6.63	56.29	68.30	-12.01	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10640.575	39.26	6.63	45.89	54.00	-8.11	AVG	P																						
2	10640.598	49.66	6.63	56.29	68.30	-12.01	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5320MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.114</td> <td>50.21</td> <td>6.62</td> <td>56.83</td> <td>68.30</td> <td>-11.47</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10640.645</td> <td>39.25</td> <td>6.63</td> <td>45.88</td> <td>54.00</td> <td>-8.12</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10640.114	50.21	6.62	56.83	68.30	-11.47	peak	P	2 *	10640.645	39.25	6.63	45.88	54.00	-8.12	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10640.114	50.21	6.62	56.83	68.30	-11.47	peak	P																						
2 *	10640.645	39.25	6.63	45.88	54.00	-8.12	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE20) Mode 5260MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.117</td> <td>50.48</td> <td>6.40</td> <td>56.88</td> <td>68.30</td> <td>-11.42</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10520.685</td> <td>39.83</td> <td>6.39</td> <td>46.22</td> <td>54.00</td> <td>-7.78</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10520.117	50.48	6.40	56.88	68.30	-11.42	peak	P	2 *	10520.685	39.83	6.39	46.22	54.00	-7.78	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10520.117	50.48	6.40	56.88	68.30	-11.42	peak	P																						
2 *	10520.685	39.83	6.39	46.22	54.00	-7.78	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE20) Mode 5260MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10520.128</td> <td>40.32</td> <td>6.40</td> <td>46.72</td> <td>54.00</td> <td>-7.28</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10520.398</td> <td>49.28</td> <td>6.40</td> <td>55.68</td> <td>68.30</td> <td>-12.62</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10520.128	40.32	6.40	46.72	54.00	-7.28	AVG	P	2	10520.398	49.28	6.40	55.68	68.30	-12.62	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10520.128	40.32	6.40	46.72	54.00	-7.28	AVG	P																						
2	10520.398	49.28	6.40	55.68	68.30	-12.62	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE20) Mode 5280MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10560.237</td> <td>40.03</td> <td>6.38</td> <td>46.41</td> <td>54.00</td> <td>-7.59</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10560.454</td> <td>49.18</td> <td>6.38</td> <td>55.56</td> <td>68.30</td> <td>-12.74</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10560.237	40.03	6.38	46.41	54.00	-7.59	AVG	P	2	10560.454	49.18	6.38	55.56	68.30	-12.74	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10560.237	40.03	6.38	46.41	54.00	-7.59	AVG	P																						
2	10560.454	49.18	6.38	55.56	68.30	-12.74	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE20) Mode 5280MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10560.134</td> <td>40.84</td> <td>6.38</td> <td>47.22</td> <td>54.00</td> <td>-6.78</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10560.441</td> <td>51.45</td> <td>6.38</td> <td>57.83</td> <td>68.30</td> <td>-10.47</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10560.134	40.84	6.38	47.22	54.00	-6.78	AVG	P	2	10560.441	51.45	6.38	57.83	68.30	-10.47	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10560.134	40.84	6.38	47.22	54.00	-6.78	AVG	P																						
2	10560.441	51.45	6.38	57.83	68.30	-10.47	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE20) Mode 5320MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.115</td> <td>51.20</td> <td>6.62</td> <td>57.82</td> <td>68.30</td> <td>-10.48</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10640.357</td> <td>39.05</td> <td>6.63</td> <td>45.68</td> <td>54.00</td> <td>-8.32</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10640.115	51.20	6.62	57.82	68.30	-10.48	peak	P	2 *	10640.357	39.05	6.63	45.68	54.00	-8.32	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10640.115	51.20	6.62	57.82	68.30	-10.48	peak	P																						
2 *	10640.357	39.05	6.63	45.68	54.00	-8.32	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE20) Mode 5320MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10640.117</td> <td>39.96</td> <td>6.62</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10640.455</td> <td>49.79</td> <td>6.63</td> <td>56.42</td> <td>68.30</td> <td>-11.88</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10640.117	39.96	6.62	46.58	54.00	-7.42	AVG	P	2	10640.455	49.79	6.63	56.42	68.30	-11.88	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10640.117	39.96	6.62	46.58	54.00	-7.42	AVG	P																						
2	10640.455	49.79	6.63	56.42	68.30	-11.88	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10540.323</td> <td>38.89</td> <td>6.39</td> <td>45.28</td> <td>54.00</td> <td>-8.72</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10540.371</td> <td>50.06</td> <td>6.39</td> <td>56.45</td> <td>68.30</td> <td>-11.85</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10540.323	38.89	6.39	45.28	54.00	-8.72	AVG	P	2	10540.371	50.06	6.39	56.45	68.30	-11.85	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10540.323	38.89	6.39	45.28	54.00	-8.72	AVG	P																						
2	10540.371	50.06	6.39	56.45	68.30	-11.85	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10540.371</td> <td>39.85</td> <td>6.39</td> <td>46.24</td> <td>54.00</td> <td>-7.76</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10540.561</td> <td>49.86</td> <td>6.39</td> <td>56.25</td> <td>68.30</td> <td>-12.05</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10540.371	39.85	6.39	46.24	54.00	-7.76	AVG	P	2	10540.561	49.86	6.39	56.25	68.30	-12.05	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10540.371	39.85	6.39	46.24	54.00	-7.76	AVG	P																						
2	10540.561	49.86	6.39	56.25	68.30	-12.05	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.134</td> <td>49.68</td> <td>6.50</td> <td>56.18</td> <td>68.30</td> <td>-12.12</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10620.218</td> <td>39.37</td> <td>6.50</td> <td>45.87</td> <td>54.00</td> <td>-8.13</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10620.134	49.68	6.50	56.18	68.30	-12.12	peak	P	2 *	10620.218	39.37	6.50	45.87	54.00	-8.13	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10620.134	49.68	6.50	56.18	68.30	-12.12	peak	P																						
2 *	10620.218	39.37	6.50	45.87	54.00	-8.13	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.127</td> <td>49.62</td> <td>6.50</td> <td>56.12</td> <td>68.30</td> <td>-12.18</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10620.384</td> <td>40.03</td> <td>6.50</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10620.127	49.62	6.50	56.12	68.30	-12.18	peak	P	2 *	10620.384	40.03	6.50	46.53	54.00	-7.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10620.127	49.62	6.50	56.12	68.30	-12.18	peak	P																						
2 *	10620.384	40.03	6.50	46.53	54.00	-7.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.387</td> <td>50.15</td> <td>6.39</td> <td>56.54</td> <td>68.30</td> <td>-11.76</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10540.454</td> <td>40.67</td> <td>6.39</td> <td>47.06</td> <td>54.00</td> <td>-6.94</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10540.387	50.15	6.39	56.54	68.30	-11.76	peak	P	2 *	10540.454	40.67	6.39	47.06	54.00	-6.94	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10540.387	50.15	6.39	56.54	68.30	-11.76	peak	P																						
2 *	10540.454	40.67	6.39	47.06	54.00	-6.94	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.237</td> <td>49.29</td> <td>6.39</td> <td>55.68</td> <td>68.30</td> <td>-12.62</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10540.685</td> <td>40.34</td> <td>6.39</td> <td>46.73</td> <td>54.00</td> <td>-7.27</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10540.237	49.29	6.39	55.68	68.30	-12.62	peak	P	2 *	10540.685	40.34	6.39	46.73	54.00	-7.27	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10540.237	49.29	6.39	55.68	68.30	-12.62	peak	P																						
2 *	10540.685	40.34	6.39	46.73	54.00	-7.27	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.467</td> <td>51.16</td> <td>6.50</td> <td>57.66</td> <td>68.30</td> <td>-10.64</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10620.617</td> <td>39.36</td> <td>6.50</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10620.467	51.16	6.50	57.66	68.30	-10.64	peak	P	2 *	10620.617	39.36	6.50	45.86	54.00	-8.14	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10620.467	51.16	6.50	57.66	68.30	-10.64	peak	P																						
2 *	10620.617	39.36	6.50	45.86	54.00	-8.14	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.445</td> <td>49.88</td> <td>6.50</td> <td>56.38</td> <td>68.30</td> <td>-11.92</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10620.543</td> <td>40.35</td> <td>6.50</td> <td>46.85</td> <td>54.00</td> <td>-7.15</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10620.445	49.88	6.50	56.38	68.30	-11.92	peak	P	2 *	10620.543	40.35	6.50	46.85	54.00	-7.15	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10620.445	49.88	6.50	56.38	68.30	-11.92	peak	P																						
2 *	10620.543	40.35	6.50	46.85	54.00	-7.15	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5270MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10540.349</td> <td>40.13</td> <td>6.39</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10540.818</td> <td>50.32</td> <td>6.39</td> <td>56.71</td> <td>68.30</td> <td>-11.59</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10540.349	40.13	6.39	46.52	54.00	-7.48	AVG	P	2	10540.818	50.32	6.39	56.71	68.30	-11.59	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10540.349	40.13	6.39	46.52	54.00	-7.48	AVG	P																						
2	10540.818	50.32	6.39	56.71	68.30	-11.59	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5270MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.245</td> <td>49.74</td> <td>6.39</td> <td>56.13</td> <td>68.30</td> <td>-12.17</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10540.782</td> <td>39.37</td> <td>6.39</td> <td>45.76</td> <td>54.00</td> <td>-8.24</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10540.245	49.74	6.39	56.13	68.30	-12.17	peak	P	2 *	10540.782	39.37	6.39	45.76	54.00	-8.24	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10540.245	49.74	6.39	56.13	68.30	-12.17	peak	P																						
2 *	10540.782	39.37	6.39	45.76	54.00	-8.24	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5310MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10620.457</td> <td>39.86</td> <td>6.50</td> <td>46.36</td> <td>54.00</td> <td>-7.64</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10620.464</td> <td>49.72</td> <td>6.50</td> <td>56.22</td> <td>68.30</td> <td>-12.08</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10620.457	39.86	6.50	46.36	54.00	-7.64	AVG	P	2	10620.464	49.72	6.50	56.22	68.30	-12.08	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10620.457	39.86	6.50	46.36	54.00	-7.64	AVG	P																						
2	10620.464	49.72	6.50	56.22	68.30	-12.08	peak	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5310MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.317</td> <td>50.08</td> <td>6.50</td> <td>56.58</td> <td>68.30</td> <td>-11.72</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10620.365</td> <td>39.36</td> <td>6.50</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10620.317	50.08	6.50	56.58	68.30	-11.72	peak	P	2 *	10620.365	39.36	6.50	45.86	54.00	-8.14	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10620.317	50.08	6.50	56.58	68.30	-11.72	peak	P																						
2 *	10620.365	39.36	6.50	45.86	54.00	-8.14	AVG	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.328</td> <td>50.43</td> <td>6.38</td> <td>56.81</td> <td>68.30</td> <td>-11.49</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10580.369</td> <td>40.19</td> <td>6.38</td> <td>46.57</td> <td>54.00</td> <td>-7.43</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10580.328	50.43	6.38	56.81	68.30	-11.49	peak	P	2 *	10580.369	40.19	6.38	46.57	54.00	-7.43	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10580.328	50.43	6.38	56.81	68.30	-11.49	peak	P																						
2 *	10580.369	40.19	6.38	46.57	54.00	-7.43	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10580.345</td> <td>39.41</td> <td>6.38</td> <td>45.79</td> <td>54.00</td> <td>-8.21</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10580.464</td> <td>50.50</td> <td>6.38</td> <td>56.88</td> <td>68.30</td> <td>-11.42</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10580.345	39.41	6.38	45.79	54.00	-8.21	AVG	P	2	10580.464	50.50	6.38	56.88	68.30	-11.42	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10580.345	39.41	6.38	45.79	54.00	-8.21	AVG	P																						
2	10580.464	50.50	6.38	56.88	68.30	-11.42	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE80) Mode 5290MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.554</td> <td>50.75</td> <td>6.38</td> <td>57.13</td> <td>68.30</td> <td>-11.17</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10580.684</td> <td>40.15</td> <td>6.38</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10580.554	50.75	6.38	57.13	68.30	-11.17	peak	P	2 *	10580.684	40.15	6.38	46.53	54.00	-7.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10580.554	50.75	6.38	57.13	68.30	-11.17	peak	P																						
2 *	10580.684	40.15	6.38	46.53	54.00	-7.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE80) Mode 5290MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.215</td> <td>50.45</td> <td>6.38</td> <td>56.83</td> <td>68.30</td> <td>-11.47</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10580.453</td> <td>39.31</td> <td>6.38</td> <td>45.69</td> <td>54.00</td> <td>-8.31</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10580.215	50.45	6.38	56.83	68.30	-11.47	peak	P	2 *	10580.453	39.31	6.38	45.69	54.00	-8.31	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10580.215	50.45	6.38	56.83	68.30	-11.47	peak	P																						
2 *	10580.453	39.31	6.38	45.69	54.00	-8.31	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT160) Mode 5250MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10500.399</td> <td>51.29</td> <td>6.40</td> <td>57.69</td> <td>68.30</td> <td>-10.61</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10500.457</td> <td>40.19</td> <td>6.40</td> <td>46.59</td> <td>54.00</td> <td>-7.41</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10500.399	51.29	6.40	57.69	68.30	-10.61	peak	P	2 *	10500.457	40.19	6.40	46.59	54.00	-7.41	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10500.399	51.29	6.40	57.69	68.30	-10.61	peak	P																						
2 *	10500.457	40.19	6.40	46.59	54.00	-7.41	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT160) Mode 5250MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10500.357</td> <td>41.13</td> <td>6.40</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10500.678</td> <td>50.53</td> <td>6.40</td> <td>56.93</td> <td>68.30</td> <td>-11.37</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10500.357	41.13	6.40	47.53	54.00	-6.47	AVG	P	2	10500.678	50.53	6.40	56.93	68.30	-11.37	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10500.357	41.13	6.40	47.53	54.00	-6.47	AVG	P																						
2	10500.678	50.53	6.40	56.93	68.30	-11.37	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE160) Mode 5250MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10500.567</td> <td>40.13</td> <td>6.40</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10500.968</td> <td>51.28</td> <td>6.40</td> <td>57.68</td> <td>68.30</td> <td>-10.62</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10500.567	40.13	6.40	46.53	54.00	-7.47	AVG	P	2	10500.968	51.28	6.40	57.68	68.30	-10.62	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10500.567	40.13	6.40	46.53	54.00	-7.47	AVG	P																						
2	10500.968	51.28	6.40	57.68	68.30	-10.62	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE160) Mode 5250MHz (U-NII-2A) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10500.683</td> <td>50.32</td> <td>6.40</td> <td>56.72</td> <td>68.30</td> <td>-11.58</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10500.716</td> <td>40.56</td> <td>6.40</td> <td>46.96</td> <td>54.00</td> <td>-7.04</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10500.683	50.32	6.40	56.72	68.30	-11.58	peak	P	2 *	10500.716	40.56	6.40	46.96	54.00	-7.04	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10500.683	50.32	6.40	56.72	68.30	-11.58	peak	P																						
2 *	10500.716	40.56	6.40	46.96	54.00	-7.04	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



5500MHz-5720MHz(U-NII-2C)

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)-SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11000.224</td> <td>38.41</td> <td>8.17</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11000.236</td> <td>48.11</td> <td>8.17</td> <td>56.28</td> <td>68.30</td> <td>-12.02</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11000.224	38.41	8.17	46.58	54.00	-7.42	AVG	P	2	11000.236	48.11	8.17	56.28	68.30	-12.02	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11000.224	38.41	8.17	46.58	54.00	-7.42	AVG	P																						
2	11000.236	48.11	8.17	56.28	68.30	-12.02	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.351</td> <td>47.65</td> <td>8.17</td> <td>55.82</td> <td>68.30</td> <td>-12.48</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11000.662</td> <td>38.64</td> <td>8.17</td> <td>46.81</td> <td>54.00</td> <td>-7.19</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11000.351	47.65	8.17	55.82	68.30	-12.48	peak	P	2 *	11000.662	38.64	8.17	46.81	54.00	-7.19	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11000.351	47.65	8.17	55.82	68.30	-12.48	peak	P																						
2 *	11000.662	38.64	8.17	46.81	54.00	-7.19	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C) -SISO		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11160.625	47.97	7.84	55.81	68.30	-12.49	peak	P
2 *	11160.742	38.45	7.84	46.29	54.00	-7.71	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C) -SISO		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11160.541	47.85	7.84	55.69	68.30	-12.61	peak	P
2 *	11160.662	37.85	7.84	45.69	54.00	-8.31	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.628</td> <td>47.30</td> <td>8.98</td> <td>56.28</td> <td>68.30</td> <td>-12.02</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11400.715</td> <td>36.89</td> <td>8.98</td> <td>45.87</td> <td>54.00</td> <td>-8.13</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11400.628	47.30	8.98	56.28	68.30	-12.02	peak	P	2 *	11400.715	36.89	8.98	45.87	54.00	-8.13	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11400.628	47.30	8.98	56.28	68.30	-12.02	peak	P																						
2 *	11400.715	36.89	8.98	45.87	54.00	-8.13	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.618</td> <td>46.90</td> <td>8.98</td> <td>55.88</td> <td>68.30</td> <td>-12.42</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11400.625</td> <td>37.54</td> <td>8.98</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11400.618	46.90	8.98	55.88	68.30	-12.42	peak	P	2 *	11400.625	37.54	8.98	46.52	54.00	-7.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11400.618	46.90	8.98	55.88	68.30	-12.42	peak	P																						
2 *	11400.625	37.54	8.98	46.52	54.00	-7.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5720MHz (U-NII-2C) -SISO		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11440.453	46.15	8.99	55.14	68.30	-13.16	peak	P
2 *	11440.657	37.76	8.99	46.75	54.00	-7.25	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5720MHz (U-NII-2C) -SISO		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11440.331	36.87	8.99	45.86	54.00	-8.14	AVG	P
2	11440.427	47.13	8.99	56.12	68.30	-12.18	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5500MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.268</td> <td>49.09</td> <td>8.17</td> <td>57.26</td> <td>68.30</td> <td>-11.04</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11000.337</td> <td>38.41</td> <td>8.17</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11000.268	49.09	8.17	57.26	68.30	-11.04	peak	P	2 *	11000.337	38.41	8.17	46.58	54.00	-7.42	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11000.268	49.09	8.17	57.26	68.30	-11.04	peak	P																						
2 *	11000.337	38.41	8.17	46.58	54.00	-7.42	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11 n(HT20) Mode 5500MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.453</td> <td>48.15</td> <td>8.17</td> <td>56.32</td> <td>68.30</td> <td>-11.98</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11000.488</td> <td>39.02</td> <td>8.17</td> <td>47.19</td> <td>54.00</td> <td>-6.81</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11000.453	48.15	8.17	56.32	68.30	-11.98	peak	P	2 *	11000.488	39.02	8.17	47.19	54.00	-6.81	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11000.453	48.15	8.17	56.32	68.30	-11.98	peak	P																						
2 *	11000.488	39.02	8.17	47.19	54.00	-6.81	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11160.891</td> <td>38.34</td> <td>7.84</td> <td>46.18</td> <td>54.00</td> <td>-7.82</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11160.893</td> <td>48.38</td> <td>7.84</td> <td>56.22</td> <td>68.30</td> <td>-12.08</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11160.891	38.34	7.84	46.18	54.00	-7.82	AVG	P	2	11160.893	48.38	7.84	56.22	68.30	-12.08	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11160.891	38.34	7.84	46.18	54.00	-7.82	AVG	P																						
2	11160.893	48.38	7.84	56.22	68.30	-12.08	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11160.349</td> <td>39.05</td> <td>7.84</td> <td>46.89</td> <td>54.00</td> <td>-7.11</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11160.597</td> <td>49.44</td> <td>7.84</td> <td>57.28</td> <td>68.30</td> <td>-11.02</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11160.349	39.05	7.84	46.89	54.00	-7.11	AVG	P	2	11160.597	49.44	7.84	57.28	68.30	-11.02	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11160.349	39.05	7.84	46.89	54.00	-7.11	AVG	P																						
2	11160.597	49.44	7.84	57.28	68.30	-11.02	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5700MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11400.227</td> <td>37.39</td> <td>8.98</td> <td>46.37</td> <td>54.00</td> <td>-7.63</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11400.327</td> <td>48.26</td> <td>8.98</td> <td>57.24</td> <td>68.30</td> <td>-11.06</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11400.227	37.39	8.98	46.37	54.00	-7.63	AVG	P	2	11400.327	48.26	8.98	57.24	68.30	-11.06	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11400.227	37.39	8.98	46.37	54.00	-7.63	AVG	P																						
2	11400.327	48.26	8.98	57.24	68.30	-11.06	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5700MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.329</td> <td>48.23</td> <td>8.98</td> <td>57.21</td> <td>68.30</td> <td>-11.09</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11400.628</td> <td>36.31</td> <td>8.98</td> <td>45.29</td> <td>54.00</td> <td>-8.71</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11400.329	48.23	8.98	57.21	68.30	-11.09	peak	P	2 *	11400.628	36.31	8.98	45.29	54.00	-8.71	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11400.329	48.23	8.98	57.21	68.30	-11.09	peak	P																						
2 *	11400.628	36.31	8.98	45.29	54.00	-8.71	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5720MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.338</td> <td>48.10</td> <td>8.99</td> <td>57.09</td> <td>68.30</td> <td>-11.21</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11440.785</td> <td>37.52</td> <td>8.99</td> <td>46.51</td> <td>54.00</td> <td>-7.49</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11440.338	48.10	8.99	57.09	68.30	-11.21	peak	P	2 *	11440.785	37.52	8.99	46.51	54.00	-7.49	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11440.338	48.10	8.99	57.09	68.30	-11.21	peak	P																						
2 *	11440.785	37.52	8.99	46.51	54.00	-7.49	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5720MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.245</td> <td>47.69</td> <td>8.99</td> <td>56.68</td> <td>68.30</td> <td>-11.62</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11440.367</td> <td>38.29</td> <td>8.99</td> <td>47.28</td> <td>54.00</td> <td>-6.72</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11440.245	47.69	8.99	56.68	68.30	-11.62	peak	P	2 *	11440.367	38.29	8.99	47.28	54.00	-6.72	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11440.245	47.69	8.99	56.68	68.30	-11.62	peak	P																						
2 *	11440.367	38.29	8.99	47.28	54.00	-6.72	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5500MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11000.386</td> <td>38.41</td> <td>8.17</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11000.745</td> <td>49.64</td> <td>8.17</td> <td>57.81</td> <td>68.30</td> <td>-10.49</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11000.386	38.41	8.17	46.58	54.00	-7.42	AVG	P	2	11000.745	49.64	8.17	57.81	68.30	-10.49	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11000.386	38.41	8.17	46.58	54.00	-7.42	AVG	P																						
2	11000.745	49.64	8.17	57.81	68.30	-10.49	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11 ac(VHT20) Mode 5500MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11000.441</td> <td>37.69</td> <td>8.17</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11000.526</td> <td>49.24</td> <td>8.17</td> <td>57.41</td> <td>68.30</td> <td>-10.89</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11000.441	37.69	8.17	45.86	54.00	-8.14	AVG	P	2	11000.526	49.24	8.17	57.41	68.30	-10.89	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11000.441	37.69	8.17	45.86	54.00	-8.14	AVG	P																						
2	11000.526	49.24	8.17	57.41	68.30	-10.89	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ac(VHT20) Mode 5580MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.267</td> <td>50.41</td> <td>7.84</td> <td>58.25</td> <td>68.30</td> <td>-10.05</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11160.267</td> <td>38.54</td> <td>7.84</td> <td>46.38</td> <td>54.00</td> <td>-7.62</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11160.267	50.41	7.84	58.25	68.30	-10.05	peak	P	2 *	11160.267	38.54	7.84	46.38	54.00	-7.62	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11160.267	50.41	7.84	58.25	68.30	-10.05	peak	P																						
2 *	11160.267	38.54	7.84	46.38	54.00	-7.62	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11 ac(VHT20) Mode 5580MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.445</td> <td>48.74</td> <td>7.84</td> <td>56.58</td> <td>68.30</td> <td>-11.72</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11160.658</td> <td>39.72</td> <td>7.84</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11160.445	48.74	7.84	56.58	68.30	-11.72	peak	P	2 *	11160.658	39.72	7.84	47.56	54.00	-6.44	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11160.445	48.74	7.84	56.58	68.30	-11.72	peak	P																						
2 *	11160.658	39.72	7.84	47.56	54.00	-6.44	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(VHT20) Mode 5720MHz (U-NII-2C) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11400.317	36.87	8.98	45.85	54.00	-8.15	AVG	P
2	11400.457	48.25	8.98	57.23	68.30	-11.07	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(VHT20) Mode 5720MHz (U-NII-2C) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11400.451	37.80	8.98	46.78	54.00	-7.22	AVG	P
2	11400.646	48.28	8.98	57.26	68.30	-11.04	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ax(HE20) Mode 5500MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11000.127</td> <td>37.55</td> <td>8.17</td> <td>45.72</td> <td>54.00</td> <td>-8.28</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11000.454</td> <td>48.54</td> <td>8.17</td> <td>56.71</td> <td>68.30</td> <td>-11.59</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11000.127	37.55	8.17	45.72	54.00	-8.28	AVG	P	2	11000.454	48.54	8.17	56.71	68.30	-11.59	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11000.127	37.55	8.17	45.72	54.00	-8.28	AVG	P																						
2	11000.454	48.54	8.17	56.71	68.30	-11.59	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11 ax(HE20) Mode 5500MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11000.178</td> <td>38.41</td> <td>8.17</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11000.228</td> <td>48.87</td> <td>8.17</td> <td>57.04</td> <td>68.30</td> <td>-11.26</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11000.178	38.41	8.17	46.58	54.00	-7.42	AVG	P	2	11000.228	48.87	8.17	57.04	68.30	-11.26	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11000.178	38.41	8.17	46.58	54.00	-7.42	AVG	P																						
2	11000.228	48.87	8.17	57.04	68.30	-11.26	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ax(HE20) Mode 5580MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.117</td> <td>48.98</td> <td>7.84</td> <td>56.82</td> <td>68.30</td> <td>-11.48</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11160.356</td> <td>38.05</td> <td>7.84</td> <td>45.89</td> <td>54.00</td> <td>-8.11</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11160.117	48.98	7.84	56.82	68.30	-11.48	peak	P	2 *	11160.356	38.05	7.84	45.89	54.00	-8.11	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11160.117	48.98	7.84	56.82	68.30	-11.48	peak	P																						
2 *	11160.356	38.05	7.84	45.89	54.00	-8.11	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11 ax(HE20) Mode 5580MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11160.384</td> <td>38.74</td> <td>7.84</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11160.457</td> <td>48.44</td> <td>7.84</td> <td>56.28</td> <td>68.30</td> <td>-12.02</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11160.384	38.74	7.84	46.58	54.00	-7.42	AVG	P	2	11160.457	48.44	7.84	56.28	68.30	-12.02	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11160.384	38.74	7.84	46.58	54.00	-7.42	AVG	P																						
2	11160.457	48.44	7.84	56.28	68.30	-12.02	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ax(HE20) Mode 5700MHz (U-NII-2C) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11400.127	37.40	8.98	46.38	54.00	-7.62	AVG	P
2	11400.421	48.84	8.98	57.82	68.30	-10.48	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ax(HE20) Mode 5700MHz (U-NII-2C) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11400.237	37.57	8.98	46.55	54.00	-7.45	AVG	P
2	11400.328	47.76	8.98	56.74	68.30	-11.56	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ax(HE20) Mode 5720MHz (U-NII-2C) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11440.338	47.54	8.99	56.53	68.30	-11.77	peak	P
2 *	11440.685	38.06	8.99	47.05	54.00	-6.95	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ax(HE20) Mode 5720MHz (U-NII-2C) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11440.127	37.54	8.99	46.53	54.00	-7.47	AVG	P
2	11440.452	48.53	8.99	57.52	68.30	-10.78	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.174</td> <td>47.60</td> <td>8.09</td> <td>55.69</td> <td>68.30</td> <td>-12.61</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11020.658</td> <td>38.13</td> <td>8.08</td> <td>46.21</td> <td>54.00</td> <td>-7.79</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11020.174	47.60	8.09	55.69	68.30	-12.61	peak	P	2 *	11020.658	38.13	8.08	46.21	54.00	-7.79	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11020.174	47.60	8.09	55.69	68.30	-12.61	peak	P																						
2 *	11020.658	38.13	8.08	46.21	54.00	-7.79	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11020.127</td> <td>37.30</td> <td>8.09</td> <td>45.39</td> <td>54.00</td> <td>-8.61</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11020.441</td> <td>48.34</td> <td>8.08</td> <td>56.42</td> <td>68.30</td> <td>-11.88</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11020.127	37.30	8.09	45.39	54.00	-8.61	AVG	P	2	11020.441	48.34	8.08	56.42	68.30	-11.88	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11020.127	37.30	8.09	45.39	54.00	-8.61	AVG	P																						
2	11020.441	48.34	8.08	56.42	68.30	-11.88	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11100.548	48.76	7.76	56.52	68.30	-11.78	peak	P
2 *	11100.841	38.81	7.76	46.57	54.00	-7.43	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11100.188	48.95	7.76	56.71	68.30	-11.59	peak	P
2 *	11100.677	39.92	7.76	47.68	54.00	-6.32	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT40) Mode 5670MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.177</td> <td>46.95</td> <td>8.91</td> <td>55.86</td> <td>68.30</td> <td>-12.44</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11340.385</td> <td>37.37</td> <td>8.91</td> <td>46.28</td> <td>54.00</td> <td>-7.72</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11340.177	46.95	8.91	55.86	68.30	-12.44	peak	P	2 *	11340.385	37.37	8.91	46.28	54.00	-7.72	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11340.177	46.95	8.91	55.86	68.30	-12.44	peak	P																						
2 *	11340.385	37.37	8.91	46.28	54.00	-7.72	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT40) Mode 5670MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11340.371</td> <td>37.31</td> <td>8.91</td> <td>46.22</td> <td>54.00</td> <td>-7.78</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11340.454</td> <td>49.27</td> <td>8.91</td> <td>58.18</td> <td>68.30</td> <td>-10.12</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11340.371	37.31	8.91	46.22	54.00	-7.78	AVG	P	2	11340.454	49.27	8.91	58.18	68.30	-10.12	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11340.371	37.31	8.91	46.22	54.00	-7.78	AVG	P																						
2	11340.454	49.27	8.91	58.18	68.30	-10.12	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5710MHz (U-NII-2C) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11420.234	47.37	8.98	56.35	68.30	-11.95	peak	P
2 *	11420.578	36.78	8.98	45.76	54.00	-8.24	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5710MHz (U-NII-2C) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11420.528	47.40	8.98	56.38	68.30	-11.92	peak	P
2 *	11420.685	36.80	8.98	45.78	54.00	-8.22	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11020.574</td> <td>38.45</td> <td>8.08</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11020.674</td> <td>48.78</td> <td>8.08</td> <td>56.86</td> <td>68.30</td> <td>-11.44</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11020.574	38.45	8.08	46.53	54.00	-7.47	AVG	P	2	11020.674	48.78	8.08	56.86	68.30	-11.44	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11020.574	38.45	8.08	46.53	54.00	-7.47	AVG	P																						
2	11020.674	48.78	8.08	56.86	68.30	-11.44	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11020.417</td> <td>38.51</td> <td>8.08</td> <td>46.59</td> <td>54.00</td> <td>-7.41</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11020.457</td> <td>48.30</td> <td>8.08</td> <td>56.38</td> <td>68.30</td> <td>-11.92</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11020.417	38.51	8.08	46.59	54.00	-7.41	AVG	P	2	11020.457	48.30	8.08	56.38	68.30	-11.92	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11020.417	38.51	8.08	46.59	54.00	-7.41	AVG	P																						
2	11020.457	48.30	8.08	56.38	68.30	-11.92	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.414</td> <td>48.62</td> <td>7.76</td> <td>56.38</td> <td>68.30</td> <td>-11.92</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11100.854</td> <td>39.29</td> <td>7.76</td> <td>47.05</td> <td>54.00</td> <td>-6.95</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11100.414	48.62	7.76	56.38	68.30	-11.92	peak	P	2 *	11100.854	39.29	7.76	47.05	54.00	-6.95	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11100.414	48.62	7.76	56.38	68.30	-11.92	peak	P																						
2 *	11100.854	39.29	7.76	47.05	54.00	-6.95	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11100.378</td> <td>38.10</td> <td>7.76</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11100.685</td> <td>49.79</td> <td>7.76</td> <td>57.55</td> <td>68.30</td> <td>-10.75</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11100.378	38.10	7.76	45.86	54.00	-8.14	AVG	P	2	11100.685	49.79	7.76	57.55	68.30	-10.75	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11100.378	38.10	7.76	45.86	54.00	-8.14	AVG	P																						
2	11100.685	49.79	7.76	57.55	68.30	-10.75	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.445</td> <td>48.05</td> <td>8.91</td> <td>56.96</td> <td>68.30</td> <td>-11.34</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11340.674</td> <td>37.61</td> <td>8.91</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11340.445	48.05	8.91	56.96	68.30	-11.34	peak	P	2 *	11340.674	37.61	8.91	46.52	54.00	-7.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11340.445	48.05	8.91	56.96	68.30	-11.34	peak	P																						
2 *	11340.674	37.61	8.91	46.52	54.00	-7.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	47%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.374</td> <td>48.71</td> <td>8.91</td> <td>57.62</td> <td>68.30</td> <td>-10.68</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11340.521</td> <td>37.62</td> <td>8.91</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11340.374	48.71	8.91	57.62	68.30	-10.68	peak	P	2 *	11340.521	37.62	8.91	46.53	54.00	-7.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11340.374	48.71	8.91	57.62	68.30	-10.68	peak	P																						
2 *	11340.521	37.62	8.91	46.53	54.00	-7.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5710MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.378</td> <td>47.93</td> <td>8.98</td> <td>56.91</td> <td>68.30</td> <td>-11.39</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11420.545</td> <td>36.88</td> <td>8.98</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11420.378	47.93	8.98	56.91	68.30	-11.39	peak	P	2 *	11420.545	36.88	8.98	45.86	54.00	-8.14	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11420.378	47.93	8.98	56.91	68.30	-11.39	peak	P																						
2 *	11420.545	36.88	8.98	45.86	54.00	-8.14	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	47%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5710MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11420.624</td> <td>36.90</td> <td>8.98</td> <td>45.88</td> <td>54.00</td> <td>-8.12</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11420.655</td> <td>48.25</td> <td>8.98</td> <td>57.23</td> <td>68.30</td> <td>-11.07</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11420.624	36.90	8.98	45.88	54.00	-8.12	AVG	P	2	11420.655	48.25	8.98	57.23	68.30	-11.07	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11420.624	36.90	8.98	45.88	54.00	-8.12	AVG	P																						
2	11420.655	48.25	8.98	57.23	68.30	-11.07	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5510MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11020.558</td> <td>38.50</td> <td>8.08</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11020.781</td> <td>47.61</td> <td>8.08</td> <td>55.69</td> <td>68.30</td> <td>-12.61</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11020.558	38.50	8.08	46.58	54.00	-7.42	AVG	P	2	11020.781	47.61	8.08	55.69	68.30	-12.61	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11020.558	38.50	8.08	46.58	54.00	-7.42	AVG	P																						
2	11020.781	47.61	8.08	55.69	68.30	-12.61	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5510MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.245</td> <td>49.48</td> <td>8.08</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11020.547</td> <td>37.78</td> <td>8.08</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11020.245	49.48	8.08	57.56	68.30	-10.74	peak	P	2 *	11020.547	37.78	8.08	45.86	54.00	-8.14	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11020.245	49.48	8.08	57.56	68.30	-10.74	peak	P																						
2 *	11020.547	37.78	8.08	45.86	54.00	-8.14	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5550MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.574</td> <td>49.06</td> <td>7.76</td> <td>56.82</td> <td>68.30</td> <td>-11.48</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11100.647</td> <td>38.03</td> <td>7.76</td> <td>45.79</td> <td>54.00</td> <td>-8.21</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11100.574	49.06	7.76	56.82	68.30	-11.48	peak	P	2 *	11100.647	38.03	7.76	45.79	54.00	-8.21	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11100.574	49.06	7.76	56.82	68.30	-11.48	peak	P																						
2 *	11100.647	38.03	7.76	45.79	54.00	-8.21	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5550MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.337</td> <td>49.85</td> <td>7.76</td> <td>57.61</td> <td>68.30</td> <td>-10.69</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11100.968</td> <td>39.12</td> <td>7.76</td> <td>46.88</td> <td>54.00</td> <td>-7.12</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11100.337	49.85	7.76	57.61	68.30	-10.69	peak	P	2 *	11100.968	39.12	7.76	46.88	54.00	-7.12	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11100.337	49.85	7.76	57.61	68.30	-10.69	peak	P																						
2 *	11100.968	39.12	7.76	46.88	54.00	-7.12	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5670MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.397</td> <td>46.77</td> <td>8.91</td> <td>55.68</td> <td>68.30</td> <td>-12.62</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11340.865</td> <td>37.91</td> <td>8.91</td> <td>46.82</td> <td>54.00</td> <td>-7.18</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11340.397	46.77	8.91	55.68	68.30	-12.62	peak	P	2 *	11340.865	37.91	8.91	46.82	54.00	-7.18	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11340.397	46.77	8.91	55.68	68.30	-12.62	peak	P																						
2 *	11340.865	37.91	8.91	46.82	54.00	-7.18	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	47%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5670MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11340.127</td> <td>38.39</td> <td>8.91</td> <td>47.30</td> <td>54.00</td> <td>-6.70</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11340.555</td> <td>47.48</td> <td>8.91</td> <td>56.39</td> <td>68.30</td> <td>-11.91</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11340.127	38.39	8.91	47.30	54.00	-6.70	AVG	P	2	11340.555	47.48	8.91	56.39	68.30	-11.91	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11340.127	38.39	8.91	47.30	54.00	-6.70	AVG	P																						
2	11340.555	47.48	8.91	56.39	68.30	-11.91	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5710MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.454</td> <td>47.41</td> <td>8.98</td> <td>56.39</td> <td>68.30</td> <td>-11.91</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11420.454</td> <td>38.08</td> <td>8.98</td> <td>47.06</td> <td>54.00</td> <td>-6.94</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11420.454	47.41	8.98	56.39	68.30	-11.91	peak	P	2 *	11420.454	38.08	8.98	47.06	54.00	-6.94	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11420.454	47.41	8.98	56.39	68.30	-11.91	peak	P																						
2 *	11420.454	38.08	8.98	47.06	54.00	-6.94	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	47%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5710MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.324</td> <td>48.13</td> <td>8.98</td> <td>57.11</td> <td>68.30</td> <td>-11.19</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11420.628</td> <td>36.88</td> <td>8.98</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11420.324	48.13	8.98	57.11	68.30	-11.19	peak	P	2 *	11420.628	36.88	8.98	45.86	54.00	-8.14	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11420.324	48.13	8.98	57.11	68.30	-11.19	peak	P																						
2 *	11420.628	36.88	8.98	45.86	54.00	-8.14	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.587</td> <td>49.60</td> <td>7.92</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11060.641</td> <td>38.80</td> <td>7.91</td> <td>46.71</td> <td>54.00</td> <td>-7.29</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11060.587	49.60	7.92	57.52	68.30	-10.78	peak	P	2 *	11060.641	38.80	7.91	46.71	54.00	-7.29	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11060.587	49.60	7.92	57.52	68.30	-10.78	peak	P																						
2 *	11060.641	38.80	7.91	46.71	54.00	-7.29	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11060.337</td> <td>38.67</td> <td>7.92</td> <td>46.59</td> <td>54.00</td> <td>-7.41</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11060.648</td> <td>50.25</td> <td>7.91</td> <td>58.16</td> <td>68.30</td> <td>-10.14</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11060.337	38.67	7.92	46.59	54.00	-7.41	AVG	P	2	11060.648	50.25	7.91	58.16	68.30	-10.14	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11060.337	38.67	7.92	46.59	54.00	-7.41	AVG	P																						
2	11060.648	50.25	7.91	58.16	68.30	-10.14	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11220.418</td> <td>49.28</td> <td>8.10</td> <td>57.38</td> <td>68.30</td> <td>-10.92</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11220.637</td> <td>38.45</td> <td>8.10</td> <td>46.55</td> <td>54.00</td> <td>-7.45</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11220.418	49.28	8.10	57.38	68.30	-10.92	peak	P	2 *	11220.637	38.45	8.10	46.55	54.00	-7.45	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11220.418	49.28	8.10	57.38	68.30	-10.92	peak	P																						
2 *	11220.637	38.45	8.10	46.55	54.00	-7.45	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11220.489</td> <td>49.32</td> <td>8.10</td> <td>57.42</td> <td>68.30</td> <td>-10.88</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11220.677</td> <td>38.93</td> <td>8.10</td> <td>47.03</td> <td>54.00</td> <td>-6.97</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11220.489	49.32	8.10	57.42	68.30	-10.88	peak	P	2 *	11220.677	38.93	8.10	47.03	54.00	-6.97	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11220.489	49.32	8.10	57.42	68.30	-10.88	peak	P																						
2 *	11220.677	38.93	8.10	47.03	54.00	-6.97	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT80) Mode 5690MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.541</td> <td>47.23</td> <td>8.96</td> <td>56.19</td> <td>68.30</td> <td>-12.11</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11380.774</td> <td>36.85</td> <td>8.96</td> <td>45.81</td> <td>54.00</td> <td>-8.19</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11380.541	47.23	8.96	56.19	68.30	-12.11	peak	P	2 *	11380.774	36.85	8.96	45.81	54.00	-8.19	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11380.541	47.23	8.96	56.19	68.30	-12.11	peak	P																						
2 *	11380.774	36.85	8.96	45.81	54.00	-8.19	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT80) Mode 5690MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11380.369</td> <td>37.91</td> <td>8.96</td> <td>46.87</td> <td>54.00</td> <td>-7.13</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11380.671</td> <td>49.76</td> <td>8.96</td> <td>58.72</td> <td>68.30</td> <td>-9.58</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11380.369	37.91	8.96	46.87	54.00	-7.13	AVG	P	2	11380.671	49.76	8.96	58.72	68.30	-9.58	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11380.369	37.91	8.96	46.87	54.00	-7.13	AVG	P																						
2	11380.671	49.76	8.96	58.72	68.30	-9.58	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11060.137</td> <td>38.94</td> <td>7.92</td> <td>46.86</td> <td>54.00</td> <td>-7.14</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11060.154</td> <td>48.61</td> <td>7.92</td> <td>56.53</td> <td>68.30</td> <td>-11.77</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11060.137	38.94	7.92	46.86	54.00	-7.14	AVG	P	2	11060.154	48.61	7.92	56.53	68.30	-11.77	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11060.137	38.94	7.92	46.86	54.00	-7.14	AVG	P																						
2	11060.154	48.61	7.92	56.53	68.30	-11.77	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11060.335</td> <td>39.24</td> <td>7.92</td> <td>47.16</td> <td>54.00</td> <td>-6.84</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11060.771</td> <td>48.97</td> <td>7.91</td> <td>56.88</td> <td>68.30</td> <td>-11.42</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11060.335	39.24	7.92	47.16	54.00	-6.84	AVG	P	2	11060.771	48.97	7.91	56.88	68.30	-11.42	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11060.335	39.24	7.92	47.16	54.00	-6.84	AVG	P																						
2	11060.771	48.97	7.91	56.88	68.30	-11.42	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.578</td> <td>49.44</td> <td>7.92</td> <td>57.36</td> <td>68.30</td> <td>-10.94</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11060.681</td> <td>37.86</td> <td>7.91</td> <td>45.77</td> <td>54.00</td> <td>-8.23</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11060.578	49.44	7.92	57.36	68.30	-10.94	peak	P	2 *	11060.681	37.86	7.91	45.77	54.00	-8.23	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11060.578	49.44	7.92	57.36	68.30	-10.94	peak	P																						
2 *	11060.681	37.86	7.91	45.77	54.00	-8.23	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11220.255</td> <td>49.04</td> <td>8.10</td> <td>57.14</td> <td>68.30</td> <td>-11.16</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11220.757</td> <td>38.43</td> <td>8.10</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11220.255	49.04	8.10	57.14	68.30	-11.16	peak	P	2 *	11220.757	38.43	8.10	46.53	54.00	-7.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11220.255	49.04	8.10	57.14	68.30	-11.16	peak	P																						
2 *	11220.757	38.43	8.10	46.53	54.00	-7.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE80) Mode 5690MHz (U-NII-2C) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11380.544	37.89	8.96	46.85	54.00	-7.15	AVG	P
2	11380.658	48.90	8.96	57.86	68.30	-10.44	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE80) Mode 5690MHz (U-NII-2C) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11380.257	37.92	8.96	46.88	54.00	-7.12	AVG	P
2	11380.698	47.75	8.96	56.71	68.30	-11.59	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT160) Mode 5570MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11140.693</td> <td>49.03</td> <td>7.83</td> <td>56.86</td> <td>68.30</td> <td>-11.44</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11140.733</td> <td>37.86</td> <td>7.83</td> <td>45.69</td> <td>54.00</td> <td>-8.31</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11140.693	49.03	7.83	56.86	68.30	-11.44	peak	P	2 *	11140.733	37.86	7.83	45.69	54.00	-8.31	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11140.693	49.03	7.83	56.86	68.30	-11.44	peak	P																						
2 *	11140.733	37.86	7.83	45.69	54.00	-8.31	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT160) Mode 5570MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11140.257</td> <td>38.70</td> <td>7.83</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11140.776</td> <td>49.83</td> <td>7.83</td> <td>57.66</td> <td>68.30</td> <td>-10.64</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11140.257	38.70	7.83	46.53	54.00	-7.47	AVG	P	2	11140.776	49.83	7.83	57.66	68.30	-10.64	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11140.257	38.70	7.83	46.53	54.00	-7.47	AVG	P																						
2	11140.776	49.83	7.83	57.66	68.30	-10.64	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE160) Mode 5570MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11140.397</td> <td>49.00</td> <td>7.83</td> <td>56.83</td> <td>68.30</td> <td>-11.47</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11140.458</td> <td>38.90</td> <td>7.83</td> <td>46.73</td> <td>54.00</td> <td>-7.27</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11140.397	49.00	7.83	56.83	68.30	-11.47	peak	P	2 *	11140.458	38.90	7.83	46.73	54.00	-7.27	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11140.397	49.00	7.83	56.83	68.30	-11.47	peak	P																						
2 *	11140.458	38.90	7.83	46.73	54.00	-7.27	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE160) Mode 5570MHz (U-NII-2C) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11140.546</td> <td>39.70</td> <td>7.83</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11140.667</td> <td>49.02</td> <td>7.83</td> <td>56.85</td> <td>68.30</td> <td>-11.45</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11140.546	39.70	7.83	47.53	54.00	-6.47	AVG	P	2	11140.667	49.02	7.83	56.85	68.30	-11.45	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11140.546	39.70	7.83	47.53	54.00	-6.47	AVG	P																						
2	11140.667	49.02	7.83	56.85	68.30	-11.45	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



5745MHz-5825MHz(U-NII-3)

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)-SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.325</td> <td>46.37</td> <td>8.99</td> <td>55.36</td> <td>68.30</td> <td>-12.94</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11490.685</td> <td>37.54</td> <td>8.99</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11490.325	46.37	8.99	55.36	68.30	-12.94	peak	P	2 *	11490.685	37.54	8.99	46.53	54.00	-7.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11490.325	46.37	8.99	55.36	68.30	-12.94	peak	P																						
2 *	11490.685	37.54	8.99	46.53	54.00	-7.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11490.544</td> <td>36.73</td> <td>8.99</td> <td>45.72</td> <td>54.00</td> <td>-8.28</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11490.716</td> <td>47.12</td> <td>8.99</td> <td>56.11</td> <td>68.30</td> <td>-12.19</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11490.544	36.73	8.99	45.72	54.00	-8.28	AVG	P	2	11490.716	47.12	8.99	56.11	68.30	-12.19	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11490.544	36.73	8.99	45.72	54.00	-8.28	AVG	P																						
2	11490.716	47.12	8.99	56.11	68.30	-12.19	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11570.312</td> <td>37.83</td> <td>8.75</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11570.657</td> <td>47.67</td> <td>8.75</td> <td>56.42</td> <td>68.30</td> <td>-11.88</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11570.312	37.83	8.75	46.58	54.00	-7.42	AVG	P	2	11570.657	47.67	8.75	56.42	68.30	-11.88	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11570.312	37.83	8.75	46.58	54.00	-7.42	AVG	P																						
2	11570.657	47.67	8.75	56.42	68.30	-11.88	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.268</td> <td>48.37</td> <td>8.75</td> <td>57.12</td> <td>68.30</td> <td>-11.18</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11570.753</td> <td>36.93</td> <td>8.75</td> <td>45.68</td> <td>54.00</td> <td>-8.32</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11570.268	48.37	8.75	57.12	68.30	-11.18	peak	P	2 *	11570.753	36.93	8.75	45.68	54.00	-8.32	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11570.268	48.37	8.75	57.12	68.30	-11.18	peak	P																						
2 *	11570.753	36.93	8.75	45.68	54.00	-8.32	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11650.237</td> <td>37.48</td> <td>8.70</td> <td>46.18</td> <td>54.00</td> <td>-7.82</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11650.544</td> <td>46.75</td> <td>8.70</td> <td>55.45</td> <td>68.30</td> <td>-12.85</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11650.237	37.48	8.70	46.18	54.00	-7.82	AVG	P	2	11650.544	46.75	8.70	55.45	68.30	-12.85	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11650.237	37.48	8.70	46.18	54.00	-7.82	AVG	P																						
2	11650.544	46.75	8.70	55.45	68.30	-12.85	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3) -SISO																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.476</td> <td>46.66</td> <td>8.70</td> <td>55.36</td> <td>68.30</td> <td>-12.94</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11650.654</td> <td>36.75</td> <td>8.70</td> <td>45.45</td> <td>54.00</td> <td>-8.55</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11650.476	46.66	8.70	55.36	68.30	-12.94	peak	P	2 *	11650.654	36.75	8.70	45.45	54.00	-8.55	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11650.476	46.66	8.70	55.36	68.30	-12.94	peak	P																						
2 *	11650.654	36.75	8.70	45.45	54.00	-8.55	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.597</td> <td>47.74</td> <td>8.99</td> <td>56.73</td> <td>68.30</td> <td>-11.57</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11490.964</td> <td>36.84</td> <td>8.99</td> <td>45.83</td> <td>54.00</td> <td>-8.17</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11490.597	47.74	8.99	56.73	68.30	-11.57	peak	P	2 *	11490.964	36.84	8.99	45.83	54.00	-8.17	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11490.597	47.74	8.99	56.73	68.30	-11.57	peak	P																						
2 *	11490.964	36.84	8.99	45.83	54.00	-8.17	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.335</td> <td>48.20</td> <td>8.99</td> <td>57.19</td> <td>68.30</td> <td>-11.11</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11490.828</td> <td>37.83</td> <td>8.99</td> <td>46.82</td> <td>54.00</td> <td>-7.18</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11490.335	48.20	8.99	57.19	68.30	-11.11	peak	P	2 *	11490.828	37.83	8.99	46.82	54.00	-7.18	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11490.335	48.20	8.99	57.19	68.30	-11.11	peak	P																						
2 *	11490.828	37.83	8.99	46.82	54.00	-7.18	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)-SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.329</td> <td>48.49</td> <td>8.75</td> <td>57.24</td> <td>68.30</td> <td>-11.06</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11570.891</td> <td>37.76</td> <td>8.75</td> <td>46.51</td> <td>54.00</td> <td>-7.49</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11570.329	48.49	8.75	57.24	68.30	-11.06	peak	P	2 *	11570.891	37.76	8.75	46.51	54.00	-7.49	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11570.329	48.49	8.75	57.24	68.30	-11.06	peak	P																						
2 *	11570.891	37.76	8.75	46.51	54.00	-7.49	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11570.398</td> <td>37.24</td> <td>8.75</td> <td>45.99</td> <td>54.00</td> <td>-8.01</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11570.652</td> <td>47.51</td> <td>8.75</td> <td>56.26</td> <td>68.30</td> <td>-12.04</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11570.398	37.24	8.75	45.99	54.00	-8.01	AVG	P	2	11570.652	47.51	8.75	56.26	68.30	-12.04	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11570.398	37.24	8.75	45.99	54.00	-8.01	AVG	P																						
2	11570.652	47.51	8.75	56.26	68.30	-12.04	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11650.265	49.51	8.70	58.21	68.30	-10.09	peak	P
2 *	11650.554	38.39	8.70	47.09	54.00	-6.91	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11650.349	48.01	8.70	56.71	68.30	-11.59	peak	P
2 *	11650.455	37.52	8.70	46.22	54.00	-7.78	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11490.537</td> <td>38.53</td> <td>8.99</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11490.645</td> <td>47.53</td> <td>8.99</td> <td>56.52</td> <td>68.30</td> <td>-11.78</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11490.537	38.53	8.99	47.52	54.00	-6.48	AVG	P	2	11490.645	47.53	8.99	56.52	68.30	-11.78	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11490.537	38.53	8.99	47.52	54.00	-6.48	AVG	P																						
2	11490.645	47.53	8.99	56.52	68.30	-11.78	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11490.123</td> <td>37.53</td> <td>8.99</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11490.327</td> <td>46.63</td> <td>8.99</td> <td>55.62</td> <td>68.30</td> <td>-12.68</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11490.123	37.53	8.99	46.52	54.00	-7.48	AVG	P	2	11490.327	46.63	8.99	55.62	68.30	-12.68	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11490.123	37.53	8.99	46.52	54.00	-7.48	AVG	P																						
2	11490.327	46.63	8.99	55.62	68.30	-12.68	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11570.574</td> <td>37.77</td> <td>8.75</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11570.648</td> <td>48.48</td> <td>8.75</td> <td>57.23</td> <td>68.30</td> <td>-11.07</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11570.574	37.77	8.75	46.52	54.00	-7.48	AVG	P	2	11570.648	48.48	8.75	57.23	68.30	-11.07	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11570.574	37.77	8.75	46.52	54.00	-7.48	AVG	P																						
2	11570.648	48.48	8.75	57.23	68.30	-11.07	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.547</td> <td>47.82</td> <td>8.75</td> <td>56.57</td> <td>68.30</td> <td>-11.73</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11570.657</td> <td>36.97</td> <td>8.75</td> <td>45.72</td> <td>54.00</td> <td>-8.28</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11570.547	47.82	8.75	56.57	68.30	-11.73	peak	P	2 *	11570.657	36.97	8.75	45.72	54.00	-8.28	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11570.547	47.82	8.75	56.57	68.30	-11.73	peak	P																						
2 *	11570.657	36.97	8.75	45.72	54.00	-8.28	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.324</td> <td>48.02</td> <td>8.70</td> <td>56.72</td> <td>68.30</td> <td>-11.58</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11650.431</td> <td>38.83</td> <td>8.70</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11650.324	48.02	8.70	56.72	68.30	-11.58	peak	P	2 *	11650.431	38.83	8.70	47.53	54.00	-6.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11650.324	48.02	8.70	56.72	68.30	-11.58	peak	P																						
2 *	11650.431	38.83	8.70	47.53	54.00	-6.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.246</td> <td>48.42</td> <td>8.70</td> <td>57.12</td> <td>68.30</td> <td>-11.18</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11650.958</td> <td>37.82</td> <td>8.70</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11650.246	48.42	8.70	57.12	68.30	-11.18	peak	P	2 *	11650.958	37.82	8.70	46.52	54.00	-7.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11650.246	48.42	8.70	57.12	68.30	-11.18	peak	P																						
2 *	11650.958	37.82	8.70	46.52	54.00	-7.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11490.116	37.53	8.99	46.52	54.00	-7.48	AVG	P
2	11490.544	48.46	8.99	57.45	68.30	-10.85	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11490.127	47.87	8.99	56.86	68.30	-11.44	peak	P
2 *	11490.345	36.29	8.99	45.28	54.00	-8.72	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE20) Mode 5785MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.398</td> <td>48.02</td> <td>8.75</td> <td>56.77</td> <td>68.30</td> <td>-11.53</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11570.685</td> <td>37.11</td> <td>8.75</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11570.398	48.02	8.75	56.77	68.30	-11.53	peak	P	2 *	11570.685	37.11	8.75	45.86	54.00	-8.14	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11570.398	48.02	8.75	56.77	68.30	-11.53	peak	P																						
2 *	11570.685	37.11	8.75	45.86	54.00	-8.14	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE20) Mode 5785MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.454</td> <td>48.81</td> <td>8.75</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11570.668</td> <td>37.80</td> <td>8.75</td> <td>46.55</td> <td>54.00</td> <td>-7.45</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11570.454	48.81	8.75	57.56	68.30	-10.74	peak	P	2 *	11570.668	37.80	8.75	46.55	54.00	-7.45	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11570.454	48.81	8.75	57.56	68.30	-10.74	peak	P																						
2 *	11570.668	37.80	8.75	46.55	54.00	-7.45	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11650.133</td> <td>37.87</td> <td>8.70</td> <td>46.57</td> <td>54.00</td> <td>-7.43</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11650.578</td> <td>48.93</td> <td>8.70</td> <td>57.63</td> <td>68.30</td> <td>-10.67</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11650.133	37.87	8.70	46.57	54.00	-7.43	AVG	P	2	11650.578	48.93	8.70	57.63	68.30	-10.67	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11650.133	37.87	8.70	46.57	54.00	-7.43	AVG	P																						
2	11650.578	48.93	8.70	57.63	68.30	-10.67	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.113</td> <td>47.88</td> <td>8.70</td> <td>56.58</td> <td>68.30</td> <td>-11.72</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11650.359</td> <td>38.83</td> <td>8.70</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11650.113	47.88	8.70	56.58	68.30	-11.72	peak	P	2 *	11650.359	38.83	8.70	47.53	54.00	-6.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11650.113	47.88	8.70	56.58	68.30	-11.72	peak	P																						
2 *	11650.359	38.83	8.70	47.53	54.00	-6.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.338</td> <td>47.91</td> <td>8.95</td> <td>56.86</td> <td>68.30</td> <td>-11.44</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11510.685</td> <td>38.08</td> <td>8.95</td> <td>47.03</td> <td>54.00</td> <td>-6.97</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11510.338	47.91	8.95	56.86	68.30	-11.44	peak	P	2 *	11510.685	38.08	8.95	47.03	54.00	-6.97	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11510.338	47.91	8.95	56.86	68.30	-11.44	peak	P																						
2 *	11510.685	38.08	8.95	47.03	54.00	-6.97	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11510.257</td> <td>37.93</td> <td>8.95</td> <td>46.88</td> <td>54.00</td> <td>-7.12</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11510.628</td> <td>48.07</td> <td>8.95</td> <td>57.02</td> <td>68.30</td> <td>-11.28</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11510.257	37.93	8.95	46.88	54.00	-7.12	AVG	P	2	11510.628	48.07	8.95	57.02	68.30	-11.28	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11510.257	37.93	8.95	46.88	54.00	-7.12	AVG	P																						
2	11510.628	48.07	8.95	57.02	68.30	-11.28	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11590.667</td> <td>37.29</td> <td>8.69</td> <td>45.98</td> <td>54.00</td> <td>-8.02</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11590.678</td> <td>48.77</td> <td>8.69</td> <td>57.46</td> <td>68.30</td> <td>-10.84</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11590.667	37.29	8.69	45.98	54.00	-8.02	AVG	P	2	11590.678	48.77	8.69	57.46	68.30	-10.84	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11590.667	37.29	8.69	45.98	54.00	-8.02	AVG	P																						
2	11590.678	48.77	8.69	57.46	68.30	-10.84	peak	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.442</td> <td>48.08</td> <td>8.69</td> <td>56.77</td> <td>68.30</td> <td>-11.53</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11590.895</td> <td>37.66</td> <td>8.69</td> <td>46.35</td> <td>54.00</td> <td>-7.65</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11590.442	48.08	8.69	56.77	68.30	-11.53	peak	P	2 *	11590.895	37.66	8.69	46.35	54.00	-7.65	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11590.442	48.08	8.69	56.77	68.30	-11.53	peak	P																						
2 *	11590.895	37.66	8.69	46.35	54.00	-7.65	AVG	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														



Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11510.385	37.76	8.95	46.71	54.00	-7.29	AVG	P
2	11510.658	46.73	8.95	55.68	68.30	-12.62	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3) -SDM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11510.128	47.42	8.95	56.37	68.30	-11.93	peak	P
2 *	11510.545	37.58	8.95	46.53	54.00	-7.47	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.357</td> <td>48.85</td> <td>8.69</td> <td>57.54</td> <td>68.30</td> <td>-10.76</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11590.564</td> <td>37.89</td> <td>8.69</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11590.357	48.85	8.69	57.54	68.30	-10.76	peak	P	2 *	11590.564	37.89	8.69	46.58	54.00	-7.42	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11590.357	48.85	8.69	57.54	68.30	-10.76	peak	P																						
2 *	11590.564	37.89	8.69	46.58	54.00	-7.42	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11590.143</td> <td>37.69</td> <td>8.69</td> <td>46.38</td> <td>54.00</td> <td>-7.62</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11590.245</td> <td>47.66</td> <td>8.69</td> <td>56.35</td> <td>68.30</td> <td>-11.95</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11590.143	37.69	8.69	46.38	54.00	-7.62	AVG	P	2	11590.245	47.66	8.69	56.35	68.30	-11.95	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11590.143	37.69	8.69	46.38	54.00	-7.62	AVG	P																						
2	11590.245	47.66	8.69	56.35	68.30	-11.95	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.641</td> <td>47.86</td> <td>8.95</td> <td>56.81</td> <td>68.30</td> <td>-11.49</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11510.658</td> <td>38.28</td> <td>8.95</td> <td>47.23</td> <td>54.00</td> <td>-6.77</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11510.641	47.86	8.95	56.81	68.30	-11.49	peak	P	2 *	11510.658	38.28	8.95	47.23	54.00	-6.77	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11510.641	47.86	8.95	56.81	68.30	-11.49	peak	P																						
2 *	11510.658	38.28	8.95	47.23	54.00	-6.77	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.226</td> <td>47.77</td> <td>8.95</td> <td>56.72</td> <td>68.30</td> <td>-11.58</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11510.378</td> <td>37.34</td> <td>8.95</td> <td>46.29</td> <td>54.00</td> <td>-7.71</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11510.226	47.77	8.95	56.72	68.30	-11.58	peak	P	2 *	11510.378	37.34	8.95	46.29	54.00	-7.71	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11510.226	47.77	8.95	56.72	68.30	-11.58	peak	P																						
2 *	11510.378	37.34	8.95	46.29	54.00	-7.71	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11590.287</td> <td>37.69</td> <td>8.69</td> <td>46.38</td> <td>54.00</td> <td>-7.62</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11590.388</td> <td>48.70</td> <td>8.69</td> <td>57.39</td> <td>68.30</td> <td>-10.91</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11590.287	37.69	8.69	46.38	54.00	-7.62	AVG	P	2	11590.388	48.70	8.69	57.39	68.30	-10.91	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11590.287	37.69	8.69	46.38	54.00	-7.62	AVG	P																						
2	11590.388	48.70	8.69	57.39	68.30	-10.91	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11590.517</td> <td>38.86</td> <td>8.69</td> <td>47.55</td> <td>54.00</td> <td>-6.45</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11590.788</td> <td>48.17</td> <td>8.69</td> <td>56.86</td> <td>68.30</td> <td>-11.44</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11590.517	38.86	8.69	47.55	54.00	-6.45	AVG	P	2	11590.788	48.17	8.69	56.86	68.30	-11.44	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11590.517	38.86	8.69	47.55	54.00	-6.45	AVG	P																						
2	11590.788	48.17	8.69	56.86	68.30	-11.44	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.374</td> <td>47.17</td> <td>8.95</td> <td>56.12</td> <td>68.30</td> <td>-12.18</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11510.667</td> <td>38.66</td> <td>8.95</td> <td>47.61</td> <td>54.00</td> <td>-6.39</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11510.374	47.17	8.95	56.12	68.30	-12.18	peak	P	2 *	11510.667	38.66	8.95	47.61	54.00	-6.39	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11510.374	47.17	8.95	56.12	68.30	-12.18	peak	P																						
2 *	11510.667	38.66	8.95	47.61	54.00	-6.39	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.578</td> <td>48.41</td> <td>8.95</td> <td>57.36</td> <td>68.30</td> <td>-10.94</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11510.643</td> <td>37.88</td> <td>8.95</td> <td>46.83</td> <td>54.00</td> <td>-7.17</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11510.578	48.41	8.95	57.36	68.30	-10.94	peak	P	2 *	11510.643	37.88	8.95	46.83	54.00	-7.17	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11510.578	48.41	8.95	57.36	68.30	-10.94	peak	P																						
2 *	11510.643	37.88	8.95	46.83	54.00	-7.17	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11510.352</td> <td>38.14</td> <td>8.95</td> <td>47.09</td> <td>54.00</td> <td>-6.91</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11510.464</td> <td>48.51</td> <td>8.95</td> <td>57.46</td> <td>68.30</td> <td>-10.84</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11510.352	38.14	8.95	47.09	54.00	-6.91	AVG	P	2	11510.464	48.51	8.95	57.46	68.30	-10.84	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11510.352	38.14	8.95	47.09	54.00	-6.91	AVG	P																						
2	11510.464	48.51	8.95	57.46	68.30	-10.84	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) -SDM																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.348</td> <td>47.88</td> <td>8.95</td> <td>56.83</td> <td>68.30</td> <td>-11.47</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11510.547</td> <td>38.13</td> <td>8.95</td> <td>47.08</td> <td>54.00</td> <td>-6.92</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11510.348	47.88	8.95	56.83	68.30	-11.47	peak	P	2 *	11510.547	38.13	8.95	47.08	54.00	-6.92	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11510.348	47.88	8.95	56.83	68.30	-11.47	peak	P																						
2 *	11510.547	38.13	8.95	47.08	54.00	-6.92	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



5180MHz-5240MHz(U-NII-1)

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)-CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10360.541</td> <td>41.46</td> <td>6.06</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10360.758</td> <td>49.57</td> <td>6.06</td> <td>55.63</td> <td>68.30</td> <td>-12.67</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10360.541	41.46	6.06	47.52	54.00	-6.48	AVG	P	2	10360.758	49.57	6.06	55.63	68.30	-12.67	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10360.541	41.46	6.06	47.52	54.00	-6.48	AVG	P																						
2	10360.758	49.57	6.06	55.63	68.30	-12.67	peak	P																						
<p>Remark: Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.</p>																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.412</td> <td>51.46</td> <td>6.06</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10360.542</td> <td>42.19</td> <td>6.06</td> <td>48.25</td> <td>54.00</td> <td>-5.75</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10360.412	51.46	6.06	57.52	68.30	-10.78	peak	P	2 *	10360.542	42.19	6.06	48.25	54.00	-5.75	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10360.412	51.46	6.06	57.52	68.30	-10.78	peak	P																						
2 *	10360.542	42.19	6.06	48.25	54.00	-5.75	AVG	P																						
<p>Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.</p>																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.472</td> <td>48.92</td> <td>6.21</td> <td>55.13</td> <td>68.30</td> <td>-13.17</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10400.547</td> <td>39.04</td> <td>6.21</td> <td>45.25</td> <td>54.00</td> <td>-8.75</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10400.472	48.92	6.21	55.13	68.30	-13.17	peak	P	2 *	10400.547	39.04	6.21	45.25	54.00	-8.75	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10400.472	48.92	6.21	55.13	68.30	-13.17	peak	P																						
2 *	10400.547	39.04	6.21	45.25	54.00	-8.75	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.147</td> <td>51.03</td> <td>6.21</td> <td>57.24</td> <td>68.30</td> <td>-11.06</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10400.568</td> <td>41.32</td> <td>6.21</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10400.147	51.03	6.21	57.24	68.30	-11.06	peak	P	2 *	10400.568	41.32	6.21	47.53	54.00	-6.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10400.147	51.03	6.21	57.24	68.30	-11.06	peak	P																						
2 *	10400.568	41.32	6.21	47.53	54.00	-6.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10480.421</td> <td>39.20</td> <td>6.36</td> <td>45.56</td> <td>54.00</td> <td>-8.44</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10480.542</td> <td>51.16</td> <td>6.36</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10480.421	39.20	6.36	45.56	54.00	-8.44	AVG	P	2	10480.542	51.16	6.36	57.52	68.30	-10.78	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10480.421	39.20	6.36	45.56	54.00	-8.44	AVG	P																						
2	10480.542	51.16	6.36	57.52	68.30	-10.78	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.456</td> <td>51.16</td> <td>6.36</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10480.545</td> <td>40.17</td> <td>6.36</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10480.456	51.16	6.36	57.52	68.30	-10.78	peak	P	2 *	10480.545	40.17	6.36	46.53	54.00	-7.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10480.456	51.16	6.36	57.52	68.30	-10.78	peak	P																						
2 *	10480.545	40.17	6.36	46.53	54.00	-7.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.542</td> <td>51.06</td> <td>6.06</td> <td>57.12</td> <td>68.30</td> <td>-11.18</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10360.562</td> <td>40.47</td> <td>6.06</td> <td>46.53</td> <td>54.00</td> <td>-7.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10360.542	51.06	6.06	57.12	68.30	-11.18	peak	P	2 *	10360.562	40.47	6.06	46.53	54.00	-7.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10360.542	51.06	6.06	57.12	68.30	-11.18	peak	P																						
2 *	10360.562	40.47	6.06	46.53	54.00	-7.47	AVG	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.542</td> <td>51.36</td> <td>6.06</td> <td>57.42</td> <td>68.30</td> <td>-10.88</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10360.654</td> <td>40.46</td> <td>6.06</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10360.542	51.36	6.06	57.42	68.30	-10.88	peak	P	2 *	10360.654	40.46	6.06	46.52	54.00	-7.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10360.542	51.36	6.06	57.42	68.30	-10.88	peak	P																						
2 *	10360.654	40.46	6.06	46.52	54.00	-7.48	AVG	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10400.114</td> <td>39.33</td> <td>6.21</td> <td>45.54</td> <td>54.00</td> <td>-8.46</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10400.562</td> <td>50.31</td> <td>6.21</td> <td>56.52</td> <td>68.30</td> <td>-11.78</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10400.114	39.33	6.21	45.54	54.00	-8.46	AVG	P	2	10400.562	50.31	6.21	56.52	68.30	-11.78	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10400.114	39.33	6.21	45.54	54.00	-8.46	AVG	P																						
2	10400.562	50.31	6.21	56.52	68.30	-11.78	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.475</td> <td>51.21</td> <td>6.21</td> <td>57.42</td> <td>68.30</td> <td>-10.88</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10400.652</td> <td>40.31</td> <td>6.21</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10400.475	51.21	6.21	57.42	68.30	-10.88	peak	P	2 *	10400.652	40.31	6.21	46.52	54.00	-7.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10400.475	51.21	6.21	57.42	68.30	-10.88	peak	P																						
2 *	10400.652	40.31	6.21	46.52	54.00	-7.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10480.143</td> <td>41.17</td> <td>6.36</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10480.351</td> <td>49.99</td> <td>6.36</td> <td>56.35</td> <td>68.30</td> <td>-11.95</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10480.143	41.17	6.36	47.53	54.00	-6.47	AVG	P	2	10480.351	49.99	6.36	56.35	68.30	-11.95	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10480.143	41.17	6.36	47.53	54.00	-6.47	AVG	P																						
2	10480.351	49.99	6.36	56.35	68.30	-11.95	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.451</td> <td>50.16</td> <td>6.36</td> <td>56.52</td> <td>68.30</td> <td>-11.78</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10480.854</td> <td>41.17</td> <td>6.36</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10480.451	50.16	6.36	56.52	68.30	-11.78	peak	P	2 *	10480.854	41.17	6.36	47.53	54.00	-6.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10480.451	50.16	6.36	56.52	68.30	-11.78	peak	P																						
2 *	10480.854	41.17	6.36	47.53	54.00	-6.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.354</td> <td>51.53</td> <td>6.06</td> <td>57.59</td> <td>68.30</td> <td>-10.71</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10360.557</td> <td>41.78</td> <td>6.06</td> <td>47.84</td> <td>54.00</td> <td>-6.16</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10360.354	51.53	6.06	57.59	68.30	-10.71	peak	P	2 *	10360.557	41.78	6.06	47.84	54.00	-6.16	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10360.354	51.53	6.06	57.59	68.30	-10.71	peak	P																						
2 *	10360.557	41.78	6.06	47.84	54.00	-6.16	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.567</td> <td>51.36</td> <td>6.06</td> <td>57.42</td> <td>68.30</td> <td>-10.88</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10360.955</td> <td>40.83</td> <td>6.06</td> <td>46.89</td> <td>54.00</td> <td>-7.11</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10360.567	51.36	6.06	57.42	68.30	-10.88	peak	P	2 *	10360.955	40.83	6.06	46.89	54.00	-7.11	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10360.567	51.36	6.06	57.42	68.30	-10.88	peak	P																						
2 *	10360.955	40.83	6.06	46.89	54.00	-7.11	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10400.487</td> <td>41.34</td> <td>6.21</td> <td>47.55</td> <td>54.00</td> <td>-6.45</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10400.564</td> <td>51.70</td> <td>6.21</td> <td>57.91</td> <td>68.30</td> <td>-10.39</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10400.487	41.34	6.21	47.55	54.00	-6.45	AVG	P	2	10400.564	51.70	6.21	57.91	68.30	-10.39	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10400.487	41.34	6.21	47.55	54.00	-6.45	AVG	P																						
2	10400.564	51.70	6.21	57.91	68.30	-10.39	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10400.544</td> <td>40.31</td> <td>6.21</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10400.653</td> <td>51.62</td> <td>6.21</td> <td>57.83</td> <td>68.30</td> <td>-10.47</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10400.544	40.31	6.21	46.52	54.00	-7.48	AVG	P	2	10400.653	51.62	6.21	57.83	68.30	-10.47	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10400.544	40.31	6.21	46.52	54.00	-7.48	AVG	P																						
2	10400.653	51.62	6.21	57.83	68.30	-10.47	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ac(VHT20) Mode 5240MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.387</td> <td>50.09</td> <td>6.36</td> <td>56.45</td> <td>68.30</td> <td>-11.85</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10480.459</td> <td>40.77</td> <td>6.36</td> <td>47.13</td> <td>54.00</td> <td>-6.87</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10480.387	50.09	6.36	56.45	68.30	-11.85	peak	P	2 *	10480.459	40.77	6.36	47.13	54.00	-6.87	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10480.387	50.09	6.36	56.45	68.30	-11.85	peak	P																						
2 *	10480.459	40.77	6.36	47.13	54.00	-6.87	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.422</td> <td>50.76</td> <td>6.36</td> <td>57.12</td> <td>68.30</td> <td>-11.18</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10480.574</td> <td>40.46</td> <td>6.36</td> <td>46.82</td> <td>54.00</td> <td>-7.18</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10480.422	50.76	6.36	57.12	68.30	-11.18	peak	P	2 *	10480.574	40.46	6.36	46.82	54.00	-7.18	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10480.422	50.76	6.36	57.12	68.30	-11.18	peak	P																						
2 *	10480.574	40.46	6.36	46.82	54.00	-7.18	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ax(HE20) Mode 5180MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.365</td> <td>51.06</td> <td>6.06</td> <td>57.12</td> <td>68.30</td> <td>-11.18</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10360.411</td> <td>41.46</td> <td>6.06</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10360.365	51.06	6.06	57.12	68.30	-11.18	peak	P	2 *	10360.411	41.46	6.06	47.52	54.00	-6.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10360.365	51.06	6.06	57.12	68.30	-11.18	peak	P																						
2 *	10360.411	41.46	6.06	47.52	54.00	-6.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11 ax(HE20) Mode 5180MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.122</td> <td>50.46</td> <td>6.06</td> <td>56.52</td> <td>68.30</td> <td>-11.78</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10360.657</td> <td>40.16</td> <td>6.06</td> <td>46.22</td> <td>54.00</td> <td>-7.78</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10360.122	50.46	6.06	56.52	68.30	-11.78	peak	P	2 *	10360.657	40.16	6.06	46.22	54.00	-7.78	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10360.122	50.46	6.06	56.52	68.30	-11.78	peak	P																						
2 *	10360.657	40.16	6.06	46.22	54.00	-7.78	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ax(HE20) Mode 5200MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10400.284</td> <td>41.32</td> <td>6.21</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>10400.413</td> <td>50.97</td> <td>6.21</td> <td>57.18</td> <td>68.30</td> <td>-11.12</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	10400.284	41.32	6.21	47.53	54.00	-6.47	AVG	P	2	10400.413	50.97	6.21	57.18	68.30	-11.12	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	10400.284	41.32	6.21	47.53	54.00	-6.47	AVG	P																						
2	10400.413	50.97	6.21	57.18	68.30	-11.12	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11 ax(HE20) Mode 5200MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.453</td> <td>51.04</td> <td>6.21</td> <td>57.25</td> <td>68.30</td> <td>-11.05</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10400.625</td> <td>40.31</td> <td>6.21</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10400.453	51.04	6.21	57.25	68.30	-11.05	peak	P	2 *	10400.625	40.31	6.21	46.52	54.00	-7.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10400.453	51.04	6.21	57.25	68.30	-11.05	peak	P																						
2 *	10400.625	40.31	6.21	46.52	54.00	-7.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11 ax(HE20) Mode 5240MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.119</td> <td>51.47</td> <td>6.36</td> <td>57.83</td> <td>68.30</td> <td>-10.47</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10480.544</td> <td>40.22</td> <td>6.36</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10480.119	51.47	6.36	57.83	68.30	-10.47	peak	P	2 *	10480.544	40.22	6.36	46.58	54.00	-7.42	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10480.119	51.47	6.36	57.83	68.30	-10.47	peak	P																						
2 *	10480.544	40.22	6.36	46.58	54.00	-7.42	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	26°C	Relative Humidity:	54%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE20) Mode 5240MHz (U-NII-1) -CDD																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.553</td> <td>51.20</td> <td>6.36</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>10480.624</td> <td>41.27</td> <td>6.36</td> <td>47.63</td> <td>54.00</td> <td>-6.37</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	10480.553	51.20	6.36	57.56	68.30	-10.74	peak	P	2 *	10480.624	41.27	6.36	47.63	54.00	-6.37	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	10480.553	51.20	6.36	57.56	68.30	-10.74	peak	P																						
2 *	10480.624	41.27	6.36	47.63	54.00	-6.37	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

