

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.113</td> <td>50.12</td> <td>8.09</td> <td>58.21</td> <td>68.30</td> <td>-10.09</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11020.561</td> <td>39.44</td> <td>8.08</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11020.113	50.12	8.09	58.21	68.30	-10.09	peak	P	2 *	11020.561	39.44	8.08	47.52	54.00	-6.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11020.113	50.12	8.09	58.21	68.30	-10.09	peak	P																						
2 *	11020.561	39.44	8.08	47.52	54.00	-6.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.456</td> <td>50.63</td> <td>8.08</td> <td>58.71</td> <td>68.30</td> <td>-9.59</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11020.635</td> <td>40.45</td> <td>8.08</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11020.456	50.63	8.08	58.71	68.30	-9.59	peak	P	2 *	11020.635	40.45	8.08	48.53	54.00	-5.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11020.456	50.63	8.08	58.71	68.30	-9.59	peak	P																						
2 *	11020.635	40.45	8.08	48.53	54.00	-5.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11100.457</td> <td>40.77</td> <td>7.76</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11100.715</td> <td>50.36</td> <td>7.76</td> <td>58.12</td> <td>68.30</td> <td>-10.18</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11100.457	40.77	7.76	48.53	54.00	-5.47	AVG	P	2	11100.715	50.36	7.76	58.12	68.30	-10.18	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11100.457	40.77	7.76	48.53	54.00	-5.47	AVG	P																						
2	11100.715	50.36	7.76	58.12	68.30	-10.18	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.168</td> <td>49.66</td> <td>7.76</td> <td>57.42</td> <td>68.30</td> <td>-10.88</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11100.425</td> <td>39.77</td> <td>7.76</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11100.168	49.66	7.76	57.42	68.30	-10.88	peak	P	2 *	11100.425	39.77	7.76	47.53	54.00	-6.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11100.168	49.66	7.76	57.42	68.30	-10.88	peak	P																						
2 *	11100.425	39.77	7.76	47.53	54.00	-6.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11340.425</td> <td>39.81</td> <td>8.91</td> <td>48.72</td> <td>54.00</td> <td>-5.28</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11340.635</td> <td>49.84</td> <td>8.91</td> <td>58.75</td> <td>68.30</td> <td>-9.55</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11340.425	39.81	8.91	48.72	54.00	-5.28	AVG	P	2	11340.635	49.84	8.91	58.75	68.30	-9.55	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11340.425	39.81	8.91	48.72	54.00	-5.28	AVG	P																						
2	11340.635	49.84	8.91	58.75	68.30	-9.55	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	47%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11340.356</td> <td>39.36</td> <td>8.91</td> <td>48.27</td> <td>54.00</td> <td>-5.73</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11340.653</td> <td>48.60</td> <td>8.91</td> <td>57.51</td> <td>68.30</td> <td>-10.79</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11340.356	39.36	8.91	48.27	54.00	-5.73	AVG	P	2	11340.653	48.60	8.91	57.51	68.30	-10.79	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11340.356	39.36	8.91	48.27	54.00	-5.73	AVG	P																						
2	11340.653	48.60	8.91	57.51	68.30	-10.79	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5710MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11420.126</td> <td>38.95</td> <td>8.98</td> <td>47.93</td> <td>54.00</td> <td>-6.07</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11420.685</td> <td>48.60</td> <td>8.98</td> <td>57.58</td> <td>68.30</td> <td>-10.72</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11420.126	38.95	8.98	47.93	54.00	-6.07	AVG	P	2	11420.685	48.60	8.98	57.58	68.30	-10.72	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11420.126	38.95	8.98	47.93	54.00	-6.07	AVG	P																						
2	11420.685	48.60	8.98	57.58	68.30	-10.72	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	47%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5710MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.354</td> <td>47.85</td> <td>8.98</td> <td>56.83</td> <td>68.30</td> <td>-11.47</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11420.685</td> <td>39.58</td> <td>8.98</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11420.354	47.85	8.98	56.83	68.30	-11.47	peak	P	2 *	11420.685	39.58	8.98	48.56	54.00	-5.44	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11420.354	47.85	8.98	56.83	68.30	-11.47	peak	P																						
2 *	11420.685	39.58	8.98	48.56	54.00	-5.44	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5510MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.687</td> <td>49.74</td> <td>8.08</td> <td>57.82</td> <td>68.30</td> <td>-10.48</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11020.775</td> <td>40.48</td> <td>8.08</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11020.687	49.74	8.08	57.82	68.30	-10.48	peak	P	2 *	11020.775	40.48	8.08	48.56	54.00	-5.44	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11020.687	49.74	8.08	57.82	68.30	-10.48	peak	P																						
2 *	11020.775	40.48	8.08	48.56	54.00	-5.44	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5510MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.745</td> <td>49.78</td> <td>8.08</td> <td>57.86</td> <td>68.30</td> <td>-10.44</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11020.986</td> <td>39.45</td> <td>8.08</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11020.745	49.78	8.08	57.86	68.30	-10.44	peak	P	2 *	11020.986	39.45	8.08	47.53	54.00	-6.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11020.745	49.78	8.08	57.86	68.30	-10.44	peak	P																						
2 *	11020.986	39.45	8.08	47.53	54.00	-6.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5550MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11100.457</td> <td>38.09</td> <td>7.76</td> <td>45.85</td> <td>54.00</td> <td>-8.15</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11100.685</td> <td>49.40</td> <td>7.76</td> <td>57.16</td> <td>68.30</td> <td>-11.14</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11100.457	38.09	7.76	45.85	54.00	-8.15	AVG	P	2	11100.685	49.40	7.76	57.16	68.30	-11.14	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11100.457	38.09	7.76	45.85	54.00	-8.15	AVG	P																						
2	11100.685	49.40	7.76	57.16	68.30	-11.14	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5550MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.685</td> <td>50.98</td> <td>7.76</td> <td>58.74</td> <td>68.30</td> <td>-9.56</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11100.754</td> <td>40.35</td> <td>7.76</td> <td>48.11</td> <td>54.00</td> <td>-5.89</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11100.685	50.98	7.76	58.74	68.30	-9.56	peak	P	2 *	11100.754	40.35	7.76	48.11	54.00	-5.89	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11100.685	50.98	7.76	58.74	68.30	-9.56	peak	P																						
2 *	11100.754	40.35	7.76	48.11	54.00	-5.89	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5670MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11340.567</td> <td>39.26</td> <td>8.91</td> <td>48.17</td> <td>54.00</td> <td>-5.83</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11340.679</td> <td>49.78</td> <td>8.91</td> <td>58.69</td> <td>68.30</td> <td>-9.61</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11340.567	39.26	8.91	48.17	54.00	-5.83	AVG	P	2	11340.679	49.78	8.91	58.69	68.30	-9.61	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11340.567	39.26	8.91	48.17	54.00	-5.83	AVG	P																						
2	11340.679	49.78	8.91	58.69	68.30	-9.61	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	47%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5670MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.478</td> <td>49.56</td> <td>8.91</td> <td>58.47</td> <td>68.30</td> <td>-9.83</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11340.634</td> <td>39.63</td> <td>8.91</td> <td>48.54</td> <td>54.00</td> <td>-5.46</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11340.478	49.56	8.91	58.47	68.30	-9.83	peak	P	2 *	11340.634	39.63	8.91	48.54	54.00	-5.46	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11340.478	49.56	8.91	58.47	68.30	-9.83	peak	P																						
2 *	11340.634	39.63	8.91	48.54	54.00	-5.46	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5710MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11420.374</td> <td>38.58</td> <td>8.98</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11420.687</td> <td>49.73</td> <td>8.98</td> <td>58.71</td> <td>68.30</td> <td>-9.59</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11420.374	38.58	8.98	47.56	54.00	-6.44	AVG	P	2	11420.687	49.73	8.98	58.71	68.30	-9.59	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11420.374	38.58	8.98	47.56	54.00	-6.44	AVG	P																						
2	11420.687	49.73	8.98	58.71	68.30	-9.59	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	47%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5710MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11420.467</td> <td>38.54</td> <td>8.98</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11420.633</td> <td>49.47</td> <td>8.98</td> <td>58.45</td> <td>68.30</td> <td>-9.85</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11420.467	38.54	8.98	47.52	54.00	-6.48	AVG	P	2	11420.633	49.47	8.98	58.45	68.30	-9.85	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11420.467	38.54	8.98	47.52	54.00	-6.48	AVG	P																						
2	11420.633	49.47	8.98	58.45	68.30	-9.85	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.522</td> <td>49.60</td> <td>7.92</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11060.824</td> <td>39.35</td> <td>7.91</td> <td>47.26</td> <td>54.00</td> <td>-6.74</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11060.522	49.60	7.92	57.52	68.30	-10.78	peak	P	2 *	11060.824	39.35	7.91	47.26	54.00	-6.74	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11060.522	49.60	7.92	57.52	68.30	-10.78	peak	P																						
2 *	11060.824	39.35	7.91	47.26	54.00	-6.74	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.537</td> <td>49.71</td> <td>7.92</td> <td>57.63</td> <td>68.30</td> <td>-10.67</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11060.652</td> <td>40.82</td> <td>7.91</td> <td>48.73</td> <td>54.00</td> <td>-5.27</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11060.537	49.71	7.92	57.63	68.30	-10.67	peak	P	2 *	11060.652	40.82	7.91	48.73	54.00	-5.27	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11060.537	49.71	7.92	57.63	68.30	-10.67	peak	P																						
2 *	11060.652	40.82	7.91	48.73	54.00	-5.27	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11220.451</td> <td>39.75</td> <td>8.10</td> <td>47.85</td> <td>54.00</td> <td>-6.15</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11220.745</td> <td>49.42</td> <td>8.10</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11220.451	39.75	8.10	47.85	54.00	-6.15	AVG	P	2	11220.745	49.42	8.10	57.52	68.30	-10.78	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11220.451	39.75	8.10	47.85	54.00	-6.15	AVG	P																						
2	11220.745	49.42	8.10	57.52	68.30	-10.78	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11220.357</td> <td>49.18</td> <td>8.10</td> <td>57.28</td> <td>68.30</td> <td>-11.02</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11220.696</td> <td>39.43</td> <td>8.10</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11220.357	49.18	8.10	57.28	68.30	-11.02	peak	P	2 *	11220.696	39.43	8.10	47.53	54.00	-6.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11220.357	49.18	8.10	57.28	68.30	-11.02	peak	P																						
2 *	11220.696	39.43	8.10	47.53	54.00	-6.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT80) Mode 5690MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.574</td> <td>49.06</td> <td>8.96</td> <td>58.02</td> <td>68.30</td> <td>-10.28</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11380.657</td> <td>38.57</td> <td>8.96</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11380.574	49.06	8.96	58.02	68.30	-10.28	peak	P	2 *	11380.657	38.57	8.96	47.53	54.00	-6.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11380.574	49.06	8.96	58.02	68.30	-10.28	peak	P																						
2 *	11380.657	38.57	8.96	47.53	54.00	-6.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT80) Mode 5690MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.572</td> <td>47.61</td> <td>8.96</td> <td>56.57</td> <td>68.30</td> <td>-11.73</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11380.637</td> <td>39.56</td> <td>8.96</td> <td>48.52</td> <td>54.00</td> <td>-5.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11380.572	47.61	8.96	56.57	68.30	-11.73	peak	P	2 *	11380.637	39.56	8.96	48.52	54.00	-5.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11380.572	47.61	8.96	56.57	68.30	-11.73	peak	P																						
2 *	11380.637	39.56	8.96	48.52	54.00	-5.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.685</td> <td>50.81</td> <td>7.91</td> <td>58.72</td> <td>68.30</td> <td>-9.58</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11060.687</td> <td>38.94</td> <td>7.91</td> <td>46.85</td> <td>54.00</td> <td>-7.15</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11060.685	50.81	7.91	58.72	68.30	-9.58	peak	P	2 *	11060.687	38.94	7.91	46.85	54.00	-7.15	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11060.685	50.81	7.91	58.72	68.30	-9.58	peak	P																						
2 *	11060.687	38.94	7.91	46.85	54.00	-7.15	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11060.657</td> <td>40.61</td> <td>7.91</td> <td>48.52</td> <td>54.00</td> <td>-5.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11060.667</td> <td>49.35</td> <td>7.91</td> <td>57.26</td> <td>68.30</td> <td>-11.04</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11060.657	40.61	7.91	48.52	54.00	-5.48	AVG	P	2	11060.667	49.35	7.91	57.26	68.30	-11.04	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11060.657	40.61	7.91	48.52	54.00	-5.48	AVG	P																						
2	11060.667	49.35	7.91	57.26	68.30	-11.04	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.127</td> <td>49.36</td> <td>7.92</td> <td>57.28</td> <td>68.30</td> <td>-11.02</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11060.227</td> <td>39.61</td> <td>7.92</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11060.127	49.36	7.92	57.28	68.30	-11.02	peak	P	2 *	11060.227	39.61	7.92	47.53	54.00	-6.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11060.127	49.36	7.92	57.28	68.30	-11.02	peak	P																						
2 *	11060.227	39.61	7.92	47.53	54.00	-6.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11220.417</td> <td>40.53</td> <td>8.10</td> <td>48.63</td> <td>54.00</td> <td>-5.37</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11220.567</td> <td>49.42</td> <td>8.10</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11220.417	40.53	8.10	48.63	54.00	-5.37	AVG	P	2	11220.567	49.42	8.10	57.52	68.30	-10.78	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11220.417	40.53	8.10	48.63	54.00	-5.37	AVG	P																						
2	11220.567	49.42	8.10	57.52	68.30	-10.78	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE80) Mode 5690MHz (U-NII-2C) -BF		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11380.114	49.67	8.96	58.63	68.30	-9.67	peak	P
2 *	11380.635	38.63	8.96	47.59	54.00	-6.41	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	24.3°C	Relative Humidity:	52%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE80) Mode 5690MHz (U-NII-2C) -BF		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11380.352	38.73	8.96	47.69	68.30	-20.61	peak	P
2 *	11380.587	39.56	8.96	48.52	54.00	-5.48	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT160) Mode 5570MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11140.247</td> <td>39.70</td> <td>7.83</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11140.257</td> <td>50.63</td> <td>7.83</td> <td>58.46</td> <td>68.30</td> <td>-9.84</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11140.247	39.70	7.83	47.53	54.00	-6.47	AVG	P	2	11140.257	50.63	7.83	58.46	68.30	-9.84	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11140.247	39.70	7.83	47.53	54.00	-6.47	AVG	P																						
2	11140.257	50.63	7.83	58.46	68.30	-9.84	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT160) Mode 5570MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11140.541</td> <td>40.73</td> <td>7.83</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11140.635</td> <td>49.10</td> <td>7.83</td> <td>56.93</td> <td>68.30</td> <td>-11.37</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11140.541	40.73	7.83	48.56	54.00	-5.44	AVG	P	2	11140.635	49.10	7.83	56.93	68.30	-11.37	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11140.541	40.73	7.83	48.56	54.00	-5.44	AVG	P																						
2	11140.635	49.10	7.83	56.93	68.30	-11.37	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE160) Mode 5570MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11140.134</td> <td>40.54</td> <td>7.83</td> <td>48.37</td> <td>54.00</td> <td>-5.63</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11140.624</td> <td>50.63</td> <td>7.83</td> <td>58.46</td> <td>68.30</td> <td>-9.84</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11140.134	40.54	7.83	48.37	54.00	-5.63	AVG	P	2	11140.624	50.63	7.83	58.46	68.30	-9.84	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11140.134	40.54	7.83	48.37	54.00	-5.63	AVG	P																						
2	11140.624	50.63	7.83	58.46	68.30	-9.84	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE160) Mode 5570MHz (U-NII-2C) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11140.523</td> <td>39.73</td> <td>7.83</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11140.685</td> <td>50.53</td> <td>7.83</td> <td>58.36</td> <td>68.30</td> <td>-9.94</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11140.523	39.73	7.83	47.56	54.00	-6.44	AVG	P	2	11140.685	50.53	7.83	58.36	68.30	-9.94	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11140.523	39.73	7.83	47.56	54.00	-6.44	AVG	P																						
2	11140.685	50.53	7.83	58.36	68.30	-9.94	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



5745MHz-5825MHz(U-NII-3)

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.456</td> <td>47.86</td> <td>8.99</td> <td>56.85</td> <td>68.30</td> <td>-11.45</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11490.579</td> <td>37.72</td> <td>8.99</td> <td>46.71</td> <td>54.00</td> <td>-7.29</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11490.456	47.86	8.99	56.85	68.30	-11.45	peak	P	2 *	11490.579	37.72	8.99	46.71	54.00	-7.29	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11490.456	47.86	8.99	56.85	68.30	-11.45	peak	P																						
2 *	11490.579	37.72	8.99	46.71	54.00	-7.29	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.243</td> <td>48.25</td> <td>8.99</td> <td>57.24</td> <td>68.30</td> <td>-11.06</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11490.842</td> <td>39.20</td> <td>8.99</td> <td>48.19</td> <td>54.00</td> <td>-5.81</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11490.243	48.25	8.99	57.24	68.30	-11.06	peak	P	2 *	11490.842	39.20	8.99	48.19	54.00	-5.81	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11490.243	48.25	8.99	57.24	68.30	-11.06	peak	P																						
2 *	11490.842	39.20	8.99	48.19	54.00	-5.81	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3) -BF		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11570.424	39.78	8.75	48.53	54.00	-5.47	AVG	P
2	11570.637	48.87	8.75	57.62	68.30	-10.68	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	24.3°C	Relative Humidity:	52%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3) -BF		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11570.456	38.77	8.75	47.52	54.00	-6.48	AVG	P
2	11570.884	48.87	8.75	57.62	68.30	-10.68	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.579</td> <td>47.74</td> <td>8.70</td> <td>56.44</td> <td>68.30</td> <td>-11.86</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11650.638</td> <td>38.88</td> <td>8.70</td> <td>47.58</td> <td>54.00</td> <td>-6.42</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11650.579	47.74	8.70	56.44	68.30	-11.86	peak	P	2 *	11650.638	38.88	8.70	47.58	54.00	-6.42	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11650.579	47.74	8.70	56.44	68.30	-11.86	peak	P																						
2 *	11650.638	38.88	8.70	47.58	54.00	-6.42	AVG	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.652</td> <td>48.72</td> <td>8.70</td> <td>57.42</td> <td>68.30</td> <td>-10.88</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11650.821</td> <td>38.86</td> <td>8.70</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11650.652	48.72	8.70	57.42	68.30	-10.88	peak	P	2 *	11650.821	38.86	8.70	47.56	54.00	-6.44	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11650.652	48.72	8.70	57.42	68.30	-10.88	peak	P																						
2 *	11650.821	38.86	8.70	47.56	54.00	-6.44	AVG	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11490.685</td> <td>38.54</td> <td>8.99</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11490.745</td> <td>47.29</td> <td>8.99</td> <td>56.28</td> <td>68.30</td> <td>-12.02</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11490.685	38.54	8.99	47.53	54.00	-6.47	AVG	P	2	11490.745	47.29	8.99	56.28	68.30	-12.02	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11490.685	38.54	8.99	47.53	54.00	-6.47	AVG	P																						
2	11490.745	47.29	8.99	56.28	68.30	-12.02	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.475</td> <td>48.43</td> <td>8.99</td> <td>57.42</td> <td>68.30</td> <td>-10.88</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11490.652</td> <td>38.64</td> <td>8.99</td> <td>47.63</td> <td>54.00</td> <td>-6.37</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11490.475	48.43	8.99	57.42	68.30	-10.88	peak	P	2 *	11490.652	38.64	8.99	47.63	54.00	-6.37	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11490.475	48.43	8.99	57.42	68.30	-10.88	peak	P																						
2 *	11490.652	38.64	8.99	47.63	54.00	-6.37	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11570.568</td> <td>38.50</td> <td>8.75</td> <td>47.25</td> <td>54.00</td> <td>-6.75</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11570.788</td> <td>48.69</td> <td>8.75</td> <td>57.44</td> <td>68.30</td> <td>-10.86</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11570.568	38.50	8.75	47.25	54.00	-6.75	AVG	P	2	11570.788	48.69	8.75	57.44	68.30	-10.86	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11570.568	38.50	8.75	47.25	54.00	-6.75	AVG	P																						
2	11570.788	48.69	8.75	57.44	68.30	-10.86	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.653</td> <td>49.68</td> <td>8.75</td> <td>58.43</td> <td>68.30</td> <td>-9.87</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11570.696</td> <td>38.82</td> <td>8.75</td> <td>47.57</td> <td>54.00</td> <td>-6.43</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11570.653	49.68	8.75	58.43	68.30	-9.87	peak	P	2 *	11570.696	38.82	8.75	47.57	54.00	-6.43	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11570.653	49.68	8.75	58.43	68.30	-9.87	peak	P																						
2 *	11570.696	38.82	8.75	47.57	54.00	-6.43	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.334</td> <td>49.76</td> <td>8.70</td> <td>58.46</td> <td>68.30</td> <td>-9.84</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11650.756</td> <td>38.82</td> <td>8.70</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11650.334	49.76	8.70	58.46	68.30	-9.84	peak	P	2 *	11650.756	38.82	8.70	47.52	54.00	-6.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11650.334	49.76	8.70	58.46	68.30	-9.84	peak	P																						
2 *	11650.756	38.82	8.70	47.52	54.00	-6.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.457</td> <td>49.42</td> <td>8.70</td> <td>58.12</td> <td>68.30</td> <td>-10.18</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11650.689</td> <td>38.83</td> <td>8.70</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11650.457	49.42	8.70	58.12	68.30	-10.18	peak	P	2 *	11650.689	38.83	8.70	47.53	54.00	-6.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11650.457	49.42	8.70	58.12	68.30	-10.18	peak	P																						
2 *	11650.689	38.83	8.70	47.53	54.00	-6.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.236</td> <td>48.53</td> <td>8.99</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11490.269</td> <td>39.57</td> <td>8.99</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11490.236	48.53	8.99	57.52	68.30	-10.78	peak	P	2 *	11490.269	39.57	8.99	48.56	54.00	-5.44	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11490.236	48.53	8.99	57.52	68.30	-10.78	peak	P																						
2 *	11490.269	39.57	8.99	48.56	54.00	-5.44	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11490.548</td> <td>38.54</td> <td>8.99</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11490.935</td> <td>49.77</td> <td>8.99</td> <td>58.76</td> <td>68.30</td> <td>-9.54</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11490.548	38.54	8.99	47.53	54.00	-6.47	AVG	P	2	11490.935	49.77	8.99	58.76	68.30	-9.54	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11490.548	38.54	8.99	47.53	54.00	-6.47	AVG	P																						
2	11490.935	49.77	8.99	58.76	68.30	-9.54	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE20) Mode 5785MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11570.411</td> <td>39.21</td> <td>8.75</td> <td>47.96</td> <td>54.00</td> <td>-6.04</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11570.657</td> <td>49.49</td> <td>8.75</td> <td>58.24</td> <td>68.30</td> <td>-10.06</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11570.411	39.21	8.75	47.96	54.00	-6.04	AVG	P	2	11570.657	49.49	8.75	58.24	68.30	-10.06	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11570.411	39.21	8.75	47.96	54.00	-6.04	AVG	P																						
2	11570.657	49.49	8.75	58.24	68.30	-10.06	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE20) Mode 5785MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.337</td> <td>48.81</td> <td>8.75</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11570.635</td> <td>38.77</td> <td>8.75</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11570.337	48.81	8.75	57.56	68.30	-10.74	peak	P	2 *	11570.635	38.77	8.75	47.52	54.00	-6.48	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11570.337	48.81	8.75	57.56	68.30	-10.74	peak	P																						
2 *	11570.635	38.77	8.75	47.52	54.00	-6.48	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11650.123</td> <td>39.44</td> <td>8.70</td> <td>48.14</td> <td>54.00</td> <td>-5.86</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11650.655</td> <td>48.84</td> <td>8.70</td> <td>57.54</td> <td>68.30</td> <td>-10.76</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11650.123	39.44	8.70	48.14	54.00	-5.86	AVG	P	2	11650.655	48.84	8.70	57.54	68.30	-10.76	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11650.123	39.44	8.70	48.14	54.00	-5.86	AVG	P																						
2	11650.655	48.84	8.70	57.54	68.30	-10.76	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11650.447</td> <td>38.86</td> <td>8.70</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11650.563</td> <td>49.82</td> <td>8.70</td> <td>58.52</td> <td>68.30</td> <td>-9.78</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11650.447	38.86	8.70	47.56	54.00	-6.44	AVG	P	2	11650.563	49.82	8.70	58.52	68.30	-9.78	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11650.447	38.86	8.70	47.56	54.00	-6.44	AVG	P																						
2	11650.563	49.82	8.70	58.52	68.30	-9.78	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.456</td> <td>49.30</td> <td>8.95</td> <td>58.25</td> <td>68.30</td> <td>-10.05</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11510.653</td> <td>38.61</td> <td>8.95</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11510.456	49.30	8.95	58.25	68.30	-10.05	peak	P	2 *	11510.653	38.61	8.95	47.56	54.00	-6.44	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11510.456	49.30	8.95	58.25	68.30	-10.05	peak	P																						
2 *	11510.653	38.61	8.95	47.56	54.00	-6.44	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)-BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11510.254</td> <td>38.57</td> <td>8.95</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11510.653</td> <td>48.73</td> <td>8.95</td> <td>57.68</td> <td>68.30</td> <td>-10.62</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11510.254	38.57	8.95	47.52	54.00	-6.48	AVG	P	2	11510.653	48.73	8.95	57.68	68.30	-10.62	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11510.254	38.57	8.95	47.52	54.00	-6.48	AVG	P																						
2	11510.653	48.73	8.95	57.68	68.30	-10.62	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11590.114</td> <td>38.83</td> <td>8.69</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11590.656</td> <td>49.77</td> <td>8.69</td> <td>58.46</td> <td>68.30</td> <td>-9.84</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11590.114	38.83	8.69	47.52	54.00	-6.48	AVG	P	2	11590.656	49.77	8.69	58.46	68.30	-9.84	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11590.114	38.83	8.69	47.52	54.00	-6.48	AVG	P																						
2	11590.656	49.77	8.69	58.46	68.30	-9.84	peak	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11590.167</td> <td>38.94</td> <td>8.69</td> <td>47.63</td> <td>54.00</td> <td>-6.37</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11590.635</td> <td>49.55</td> <td>8.69</td> <td>58.24</td> <td>68.30</td> <td>-10.06</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11590.167	38.94	8.69	47.63	54.00	-6.37	AVG	P	2	11590.635	49.55	8.69	58.24	68.30	-10.06	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11590.167	38.94	8.69	47.63	54.00	-6.37	AVG	P																						
2	11590.635	49.55	8.69	58.24	68.30	-10.06	peak	P																						
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.568</td> <td>48.90</td> <td>8.95</td> <td>57.85</td> <td>68.30</td> <td>-10.45</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11510.657</td> <td>39.58</td> <td>8.95</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11510.568	48.90	8.95	57.85	68.30	-10.45	peak	P	2 *	11510.657	39.58	8.95	48.53	54.00	-5.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11510.568	48.90	8.95	57.85	68.30	-10.45	peak	P																						
2 *	11510.657	39.58	8.95	48.53	54.00	-5.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11510.357</td> <td>39.61</td> <td>8.95</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11510.865</td> <td>49.76</td> <td>8.95</td> <td>58.71</td> <td>68.30</td> <td>-9.59</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11510.357	39.61	8.95	48.56	54.00	-5.44	AVG	P	2	11510.865	49.76	8.95	58.71	68.30	-9.59	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11510.357	39.61	8.95	48.56	54.00	-5.44	AVG	P																						
2	11510.865	49.76	8.95	58.71	68.30	-9.59	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11590.546</td> <td>40.06</td> <td>8.69</td> <td>48.75</td> <td>54.00</td> <td>-5.25</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11590.679</td> <td>48.87</td> <td>8.69</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11590.546	40.06	8.69	48.75	54.00	-5.25	AVG	P	2	11590.679	48.87	8.69	57.56	68.30	-10.74	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11590.546	40.06	8.69	48.75	54.00	-5.25	AVG	P																						
2	11590.679	48.87	8.69	57.56	68.30	-10.74	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11590.564</td> <td>40.06</td> <td>8.69</td> <td>48.75</td> <td>54.00</td> <td>-5.25</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11590.697</td> <td>49.43</td> <td>8.69</td> <td>58.12</td> <td>68.30</td> <td>-10.18</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11590.564	40.06	8.69	48.75	54.00	-5.25	AVG	P	2	11590.697	49.43	8.69	58.12	68.30	-10.18	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11590.564	40.06	8.69	48.75	54.00	-5.25	AVG	P																						
2	11590.697	49.43	8.69	58.12	68.30	-10.18	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.146</td> <td>49.21</td> <td>8.95</td> <td>58.16</td> <td>68.30</td> <td>-10.14</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11510.357</td> <td>38.58</td> <td>8.95</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11510.146	49.21	8.95	58.16	68.30	-10.14	peak	P	2 *	11510.357	38.58	8.95	47.53	54.00	-6.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11510.146	49.21	8.95	58.16	68.30	-10.14	peak	P																						
2 *	11510.357	38.58	8.95	47.53	54.00	-6.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11510.134</td> <td>39.24</td> <td>8.95</td> <td>48.19</td> <td>54.00</td> <td>-5.81</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11510.638</td> <td>49.79</td> <td>8.95</td> <td>58.74</td> <td>68.30</td> <td>-9.56</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11510.134	39.24	8.95	48.19	54.00	-5.81	AVG	P	2	11510.638	49.79	8.95	58.74	68.30	-9.56	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11510.134	39.24	8.95	48.19	54.00	-5.81	AVG	P																						
2	11510.638	49.79	8.95	58.74	68.30	-9.56	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11590.567</td> <td>39.85</td> <td>8.69</td> <td>48.54</td> <td>54.00</td> <td>-5.46</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11590.635</td> <td>48.57</td> <td>8.69</td> <td>57.26</td> <td>68.30</td> <td>-11.04</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11590.567	39.85	8.69	48.54	54.00	-5.46	AVG	P	2	11590.635	48.57	8.69	57.26	68.30	-11.04	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11590.567	39.85	8.69	48.54	54.00	-5.46	AVG	P																						
2	11590.635	48.57	8.69	57.26	68.30	-11.04	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.257</td> <td>48.87</td> <td>8.69</td> <td>57.56</td> <td>68.30</td> <td>-10.74</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11590.637</td> <td>39.84</td> <td>8.69</td> <td>48.53</td> <td>54.00</td> <td>-5.47</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11590.257	48.87	8.69	57.56	68.30	-10.74	peak	P	2 *	11590.637	39.84	8.69	48.53	54.00	-5.47	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11590.257	48.87	8.69	57.56	68.30	-10.74	peak	P																						
2 *	11590.637	39.84	8.69	48.53	54.00	-5.47	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.579</td> <td>49.61</td> <td>8.95</td> <td>58.56</td> <td>68.30</td> <td>-9.74</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11510.725</td> <td>38.98</td> <td>8.95</td> <td>47.93</td> <td>54.00</td> <td>-6.07</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11510.579	49.61	8.95	58.56	68.30	-9.74	peak	P	2 *	11510.725	38.98	8.95	47.93	54.00	-6.07	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11510.579	49.61	8.95	58.56	68.30	-9.74	peak	P																						
2 *	11510.725	38.98	8.95	47.93	54.00	-6.07	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														

Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11510.567</td> <td>39.64</td> <td>8.95</td> <td>48.59</td> <td>54.00</td> <td>-5.41</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11510.699</td> <td>48.57</td> <td>8.95</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11510.567	39.64	8.95	48.59	54.00	-5.41	AVG	P	2	11510.699	48.57	8.95	57.52	68.30	-10.78	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11510.567	39.64	8.95	48.59	54.00	-5.41	AVG	P																						
2	11510.699	48.57	8.95	57.52	68.30	-10.78	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Horizontal																													
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.137</td> <td>48.57</td> <td>8.95</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>peak</td> <td>P</td> </tr> <tr> <td>2 *</td> <td>11510.259</td> <td>38.63</td> <td>8.95</td> <td>47.58</td> <td>54.00</td> <td>-6.42</td> <td>AVG</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1	11510.137	48.57	8.95	57.52	68.30	-10.78	peak	P	2 *	11510.259	38.63	8.95	47.58	54.00	-6.42	AVG	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1	11510.137	48.57	8.95	57.52	68.30	-10.78	peak	P																						
2 *	11510.259	38.63	8.95	47.58	54.00	-6.42	AVG	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														


Temperature:	24.3°C	Relative Humidity:	52%																											
Test Voltage:	AC 120V/60Hz																													
Ant. Pol.	Vertical																													
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) -BF																													
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>P/F</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11510.457</td> <td>38.57</td> <td>8.95</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>AVG</td> <td>P</td> </tr> <tr> <td>2</td> <td>11510.967</td> <td>49.78</td> <td>8.95</td> <td>58.73</td> <td>68.30</td> <td>-9.57</td> <td>peak</td> <td>P</td> </tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	1 *	11510.457	38.57	8.95	47.52	54.00	-6.48	AVG	P	2	11510.967	49.78	8.95	58.73	68.30	-9.57	peak	P
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F																						
1 *	11510.457	38.57	8.95	47.52	54.00	-6.48	AVG	P																						
2	11510.967	49.78	8.95	58.73	68.30	-9.57	peak	P																						
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																														



Attachment C-- Restricted Bands Requirement Test Data

Radiation Test

Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)-SISO		
Remark:			

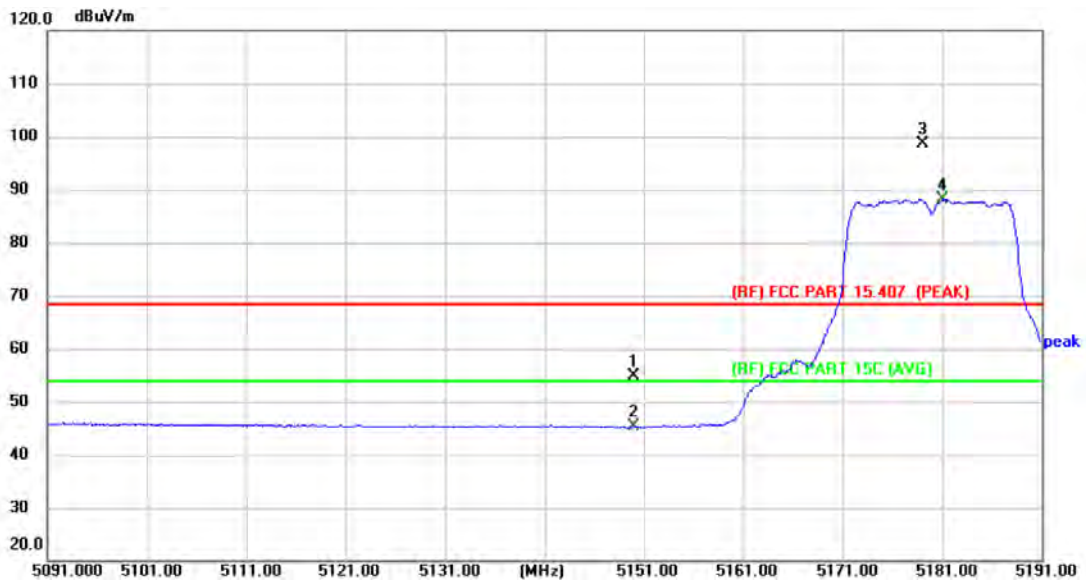


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	48.93	5.84	54.77	68.30	-13.53	peak
2	5150.000	39.49	5.84	45.33	54.00	-8.67	AVG
3 X	5179.100	92.62	5.90	98.52	Fundamental Frequency		peak
4 *	5181.100	82.23	5.89	88.12		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1) -SISO		
Remark:			

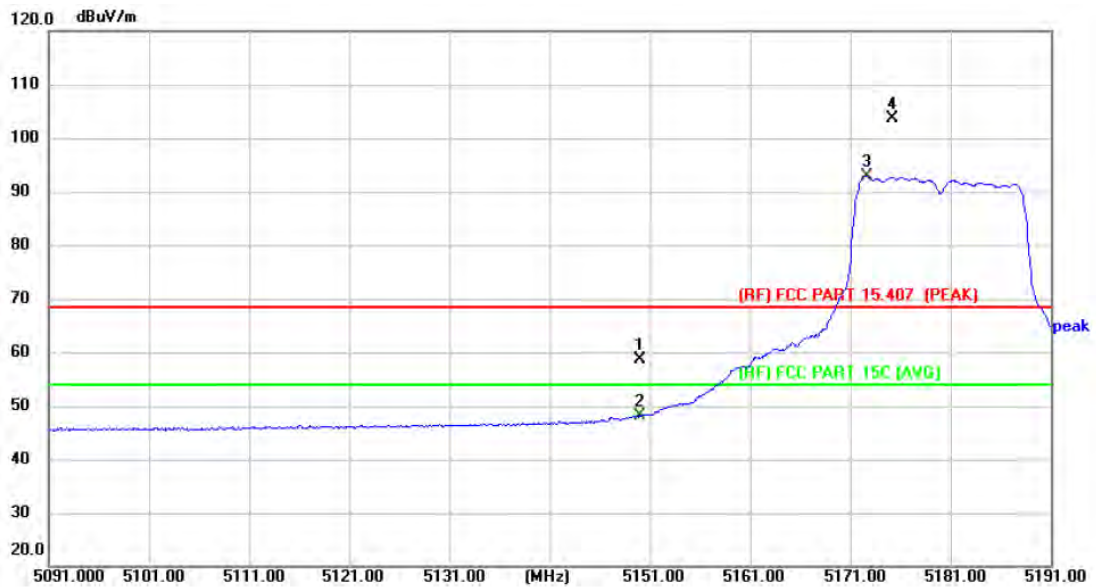


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	52.73	5.84	58.57	68.30	-9.73	peak
2	5150.000	42.30	5.84	48.14	54.00	-5.86	AVG
3 *	5172.600	87.02	5.88	92.90	Fundamental Frequency		AVG
4 X	5175.200	97.70	5.89	103.59			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A) -SISO		
Remark:			

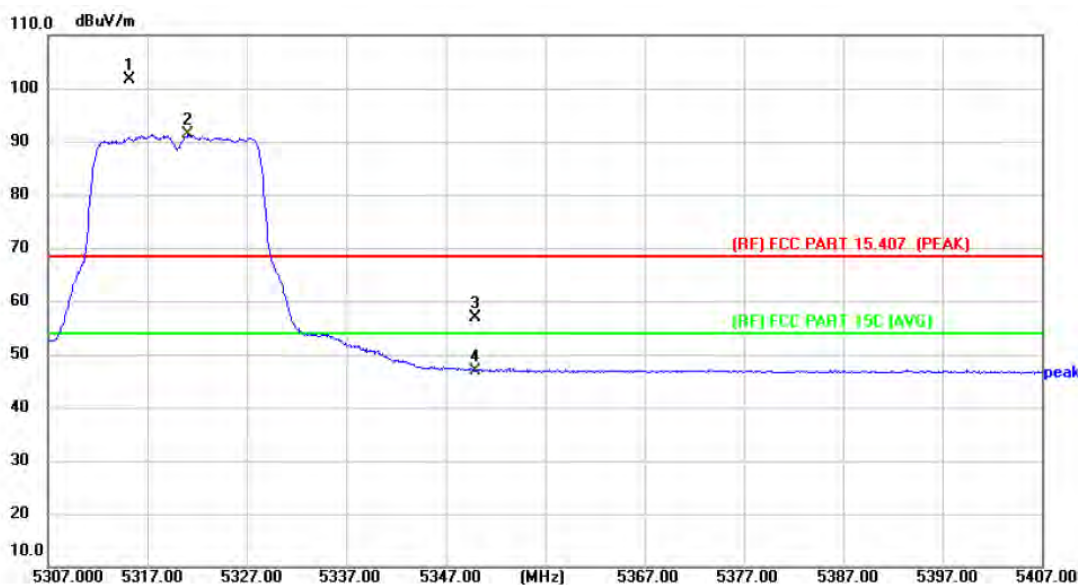


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5315.200	95.56	5.98	101.54	68.30	-11.47	peak
2 *	5321.100	85.28	6.00	91.28			AVG
3	5350.000	50.71	6.12	56.83	68.30	-11.47	peak
4	5350.000	40.81	6.12	46.93	54.00	-7.07	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A) -SISO		
Remark:			

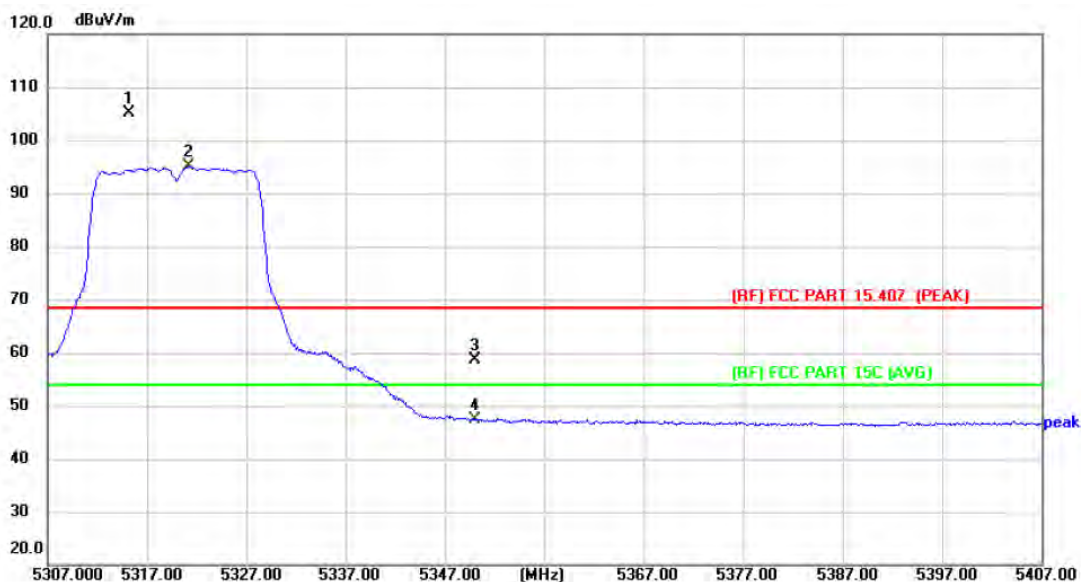


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5315.200	99.24	5.98	105.22	Fundamental Frequency		peak
2 *	5321.200	89.10	6.00	95.10			AVG
3	5350.000	52.57	6.12	58.69	68.30	-9.61	peak
4	5350.000	41.26	6.12	47.38	54.00	-6.62	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) -SDM		
Remark:			

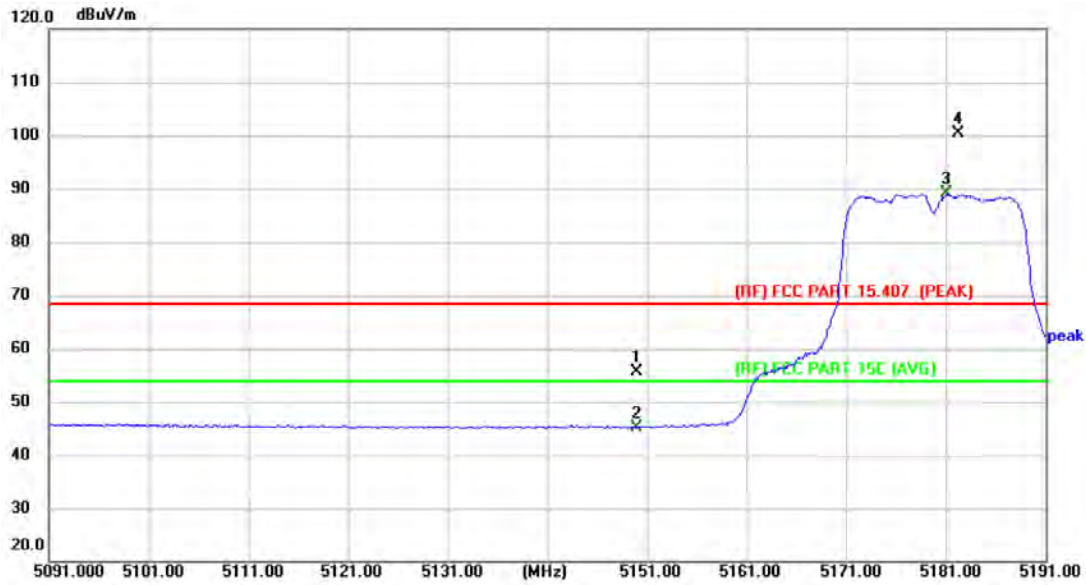


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	49.78	5.84	55.62	68.30	-12.68	peak
2	5150.000	39.35	5.84	45.19	54.00	-8.81	AVG
3 *	5181.100	83.21	5.89	89.10	Fundamental Frequency		AVG
4 X	5182.300	94.50	5.90	100.40			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) -SDM		
Remark:			

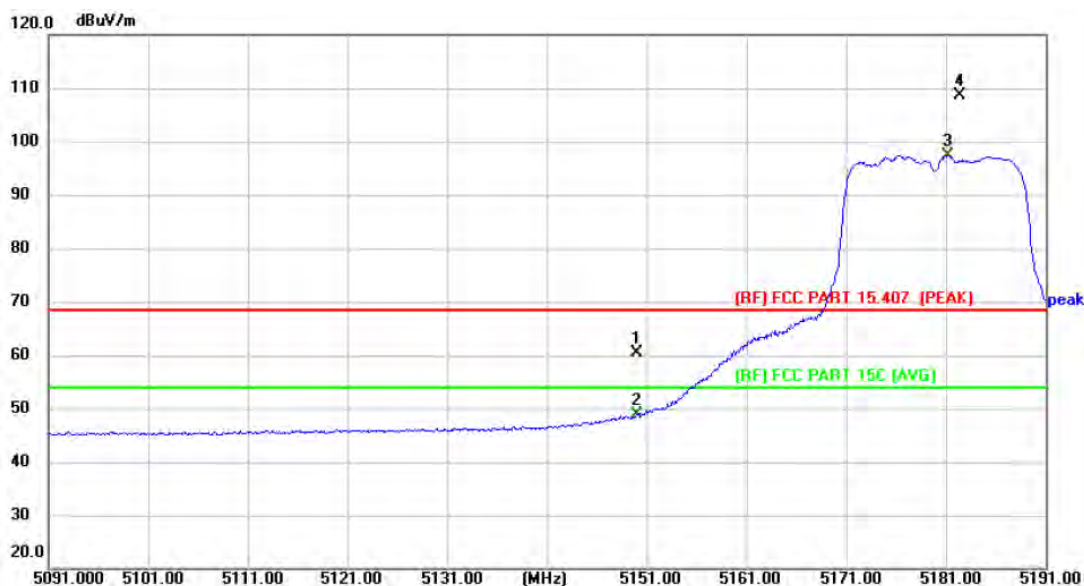


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	54.66	5.84	60.50	68.30	-7.80	peak
2	5150.000	43.05	5.84	48.89	54.00	-5.11	AVG
3 *	5181.200	91.52	5.89	97.41	Fundamental Frequency		AVG
4 X	5182.400	102.85	5.90	108.75			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A) -SDM		
Remark:			

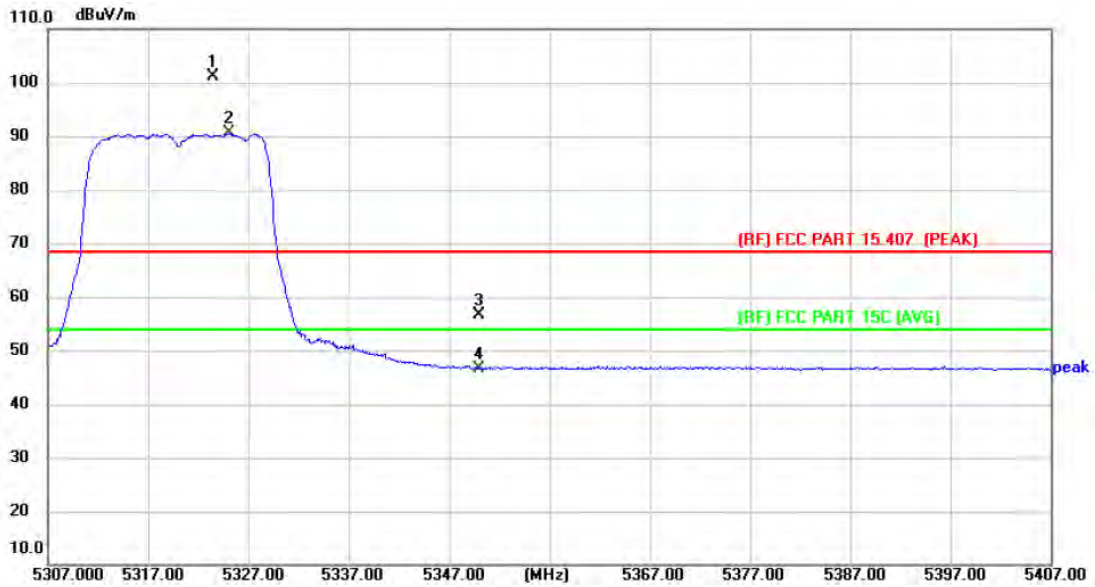


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5323.500	95.01	6.02	101.03	Fundamental Frequency		peak
2 *	5325.000	84.58	6.02	90.60			AVG
3	5350.000	50.54	6.12	56.66	68.30	-11.64	peak
4	5350.000	40.61	6.12	46.73	54.00	-7.27	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A) -SDM		
Remark:			

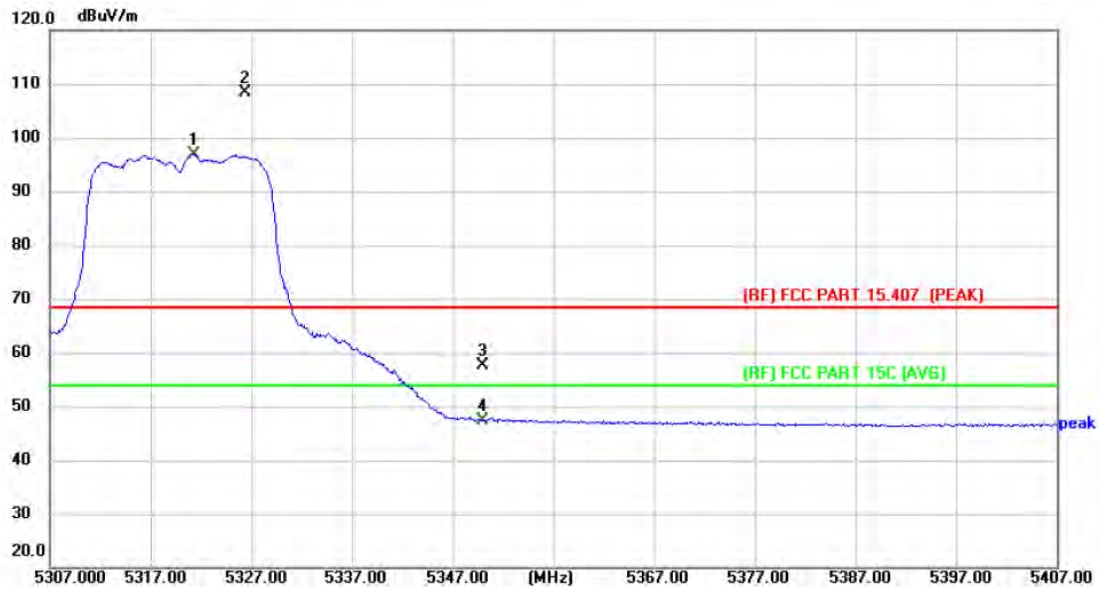


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5321.300	90.97	6.00	96.97	Fundamental Frequency		AVG
2 X	5326.400	102.24	6.03	108.27			peak
3	5350.000	51.47	6.12	57.59	68.30	-10.71	peak
4	5350.000	41.34	6.12	47.46	54.00	-6.54	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) -SDM		
Remark:			

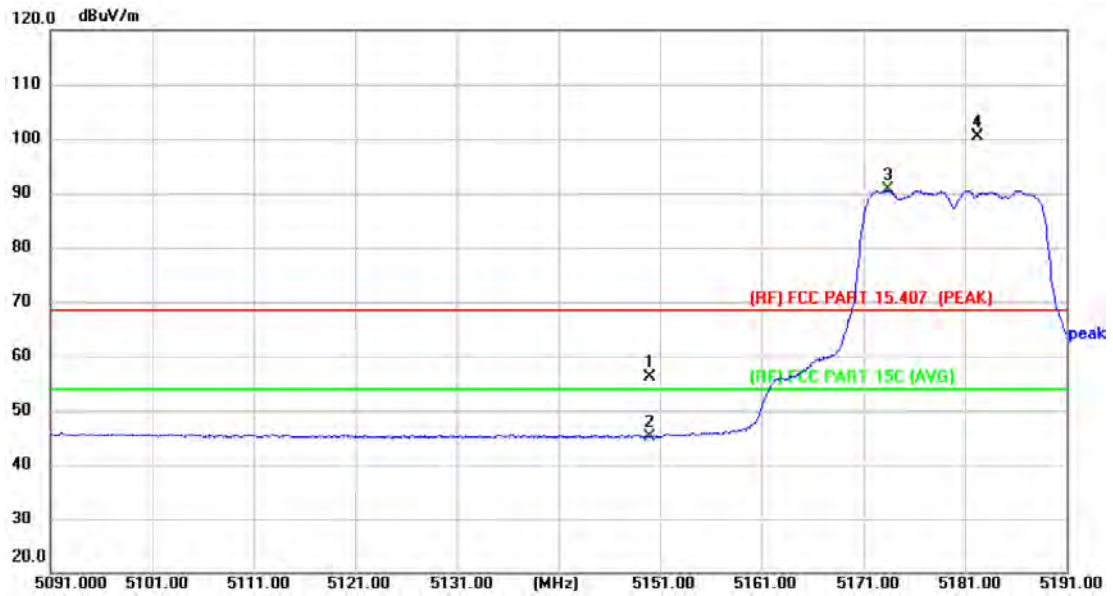


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	50.36	5.84	56.20	68.30	-12.10	peak
2	5150.000	39.32	5.84	45.16	54.00	-8.84	AVG
3 *	5173.400	84.65	5.89	90.54	Fundamental Frequency		AVG
4 X	5182.200	94.47	5.90	100.37		peak	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) -SDM		
Remark:			

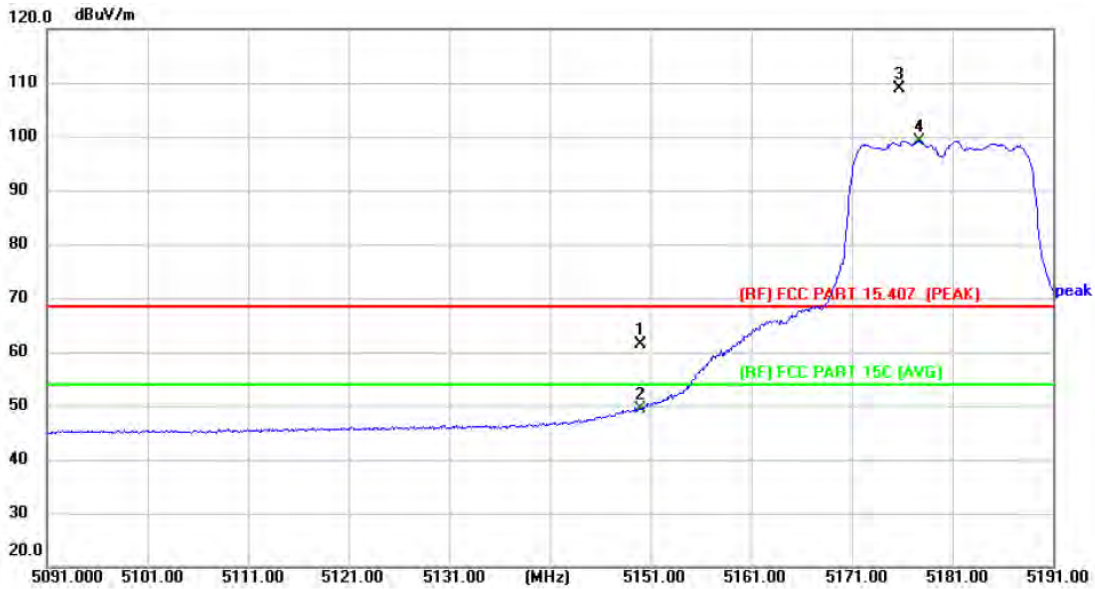


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	55.48	5.84	61.32	68.30	-6.98	peak
2	5150.000	43.49	5.84	49.33	54.00	-4.67	AVG
3 X	5175.700	102.95	5.89	108.84	Fundamental Frequency		peak
4 *	5177.700	93.33	5.90	99.23		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A) -SDM		
Remark:			

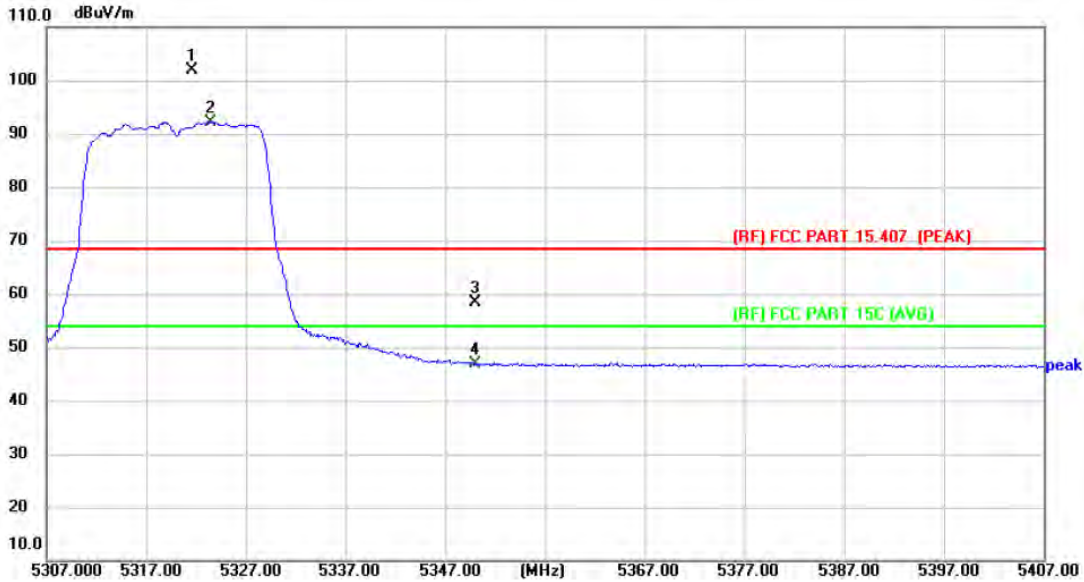


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5321.600	95.95	6.00	101.95	Fundamental Frequency		peak
2 *	5323.500	86.19	6.02	92.21			AVG
3	5350.000	52.19	6.12	58.31	68.30	-9.99	peak
4	5350.000	40.65	6.12	46.77	54.00	-7.23	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A) -SDM		
Remark:			

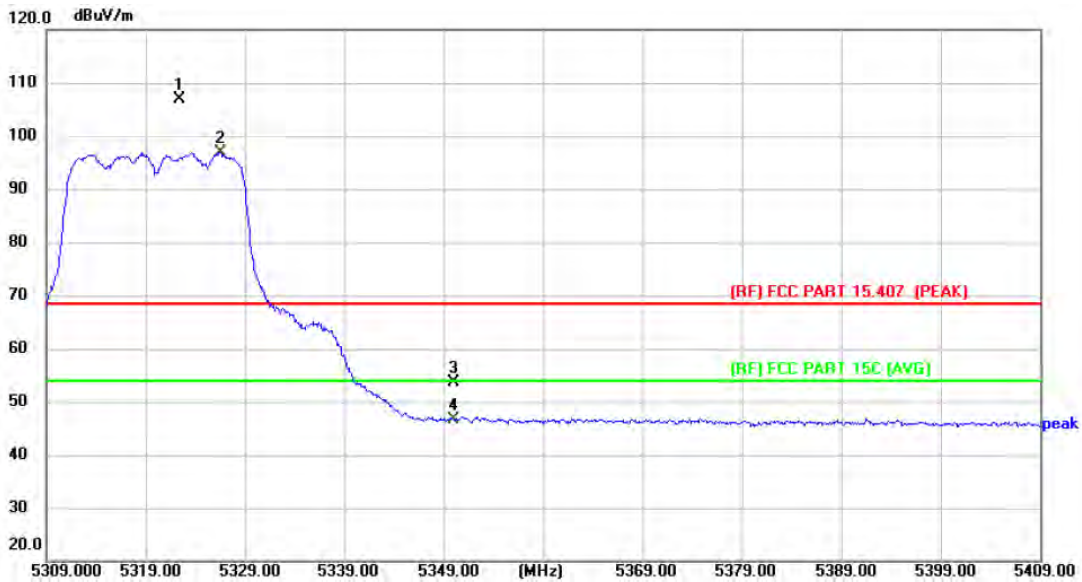


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5322.400	100.95	6.00	106.95	Fundamental Frequency		peak
2 *	5326.500	90.97	6.03	97.00			AVG
3	5350.000	47.53	6.12	53.65	68.30	-14.65	peak
4	5350.000	40.60	6.12	46.72	54.00	-7.28	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE20) Mode 5180 MHz (U-NII-1) -SDM		
Remark:			

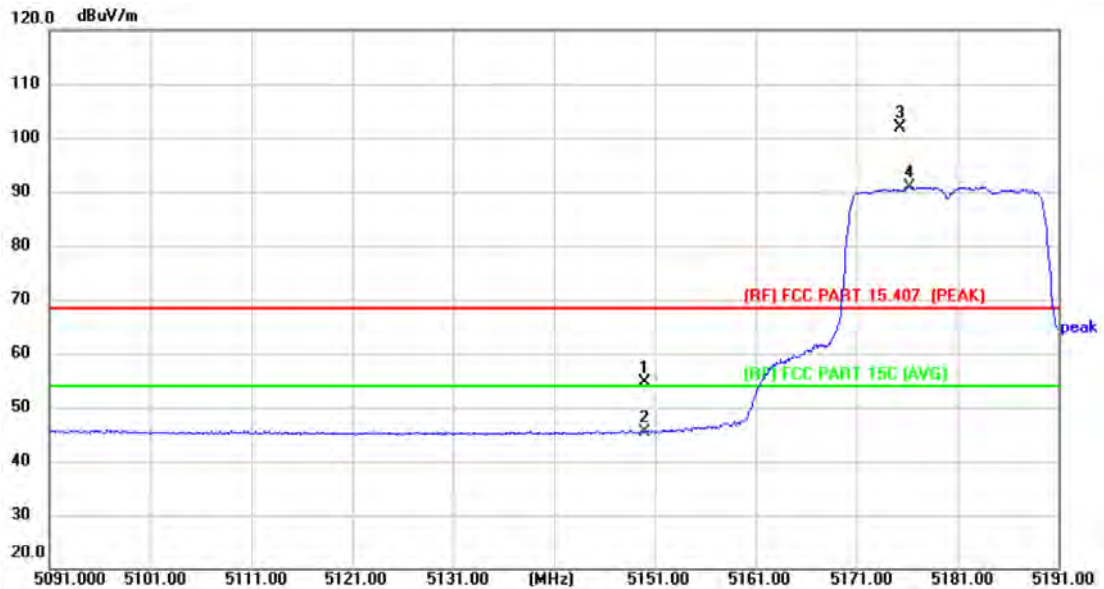


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	48.78	5.84	54.62	68.30	-13.68	peak
2	5150.000	39.58	5.84	45.42	54.00	-8.58	AVG
3 X	5175.300	95.96	5.89	101.85	Fundamental Frequency		peak
4 *	5176.200	85.00	5.89	90.89			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE20) Mode 5180 MHz (U-NII-1) -SDM		
Remark:			

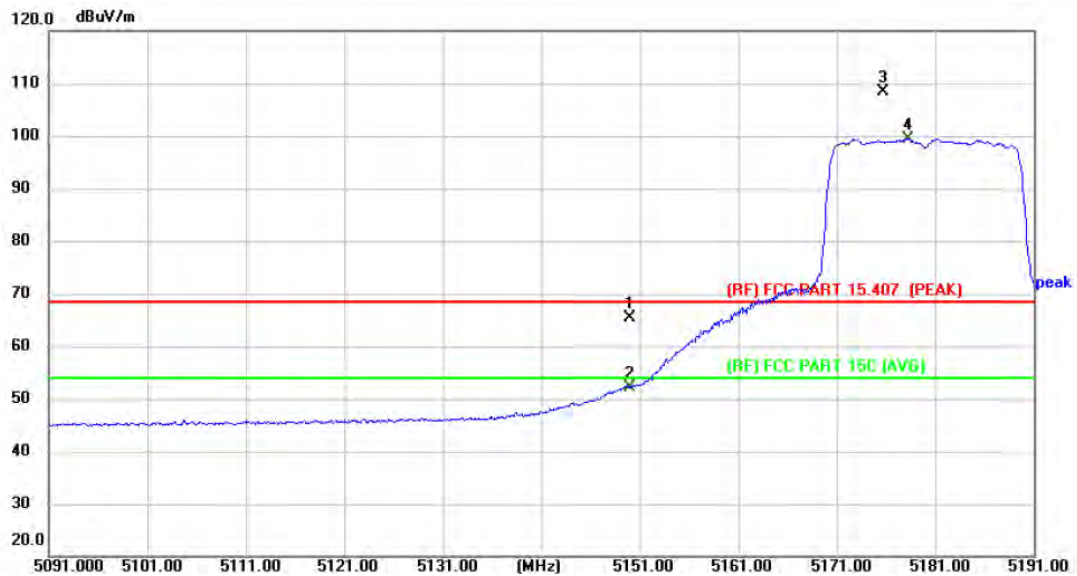


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	59.45	5.84	65.29	68.30	-3.01	peak
2	5150.000	46.38	5.84	52.22	54.00	-1.78	AVG
3 X	5175.700	102.54	5.89	108.43	Fundamental Frequency		peak
4 *	5178.300	93.56	5.90	99.46		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE20) Mode 5320 MHz (U-NII-2A) -SDM		
Remark:			

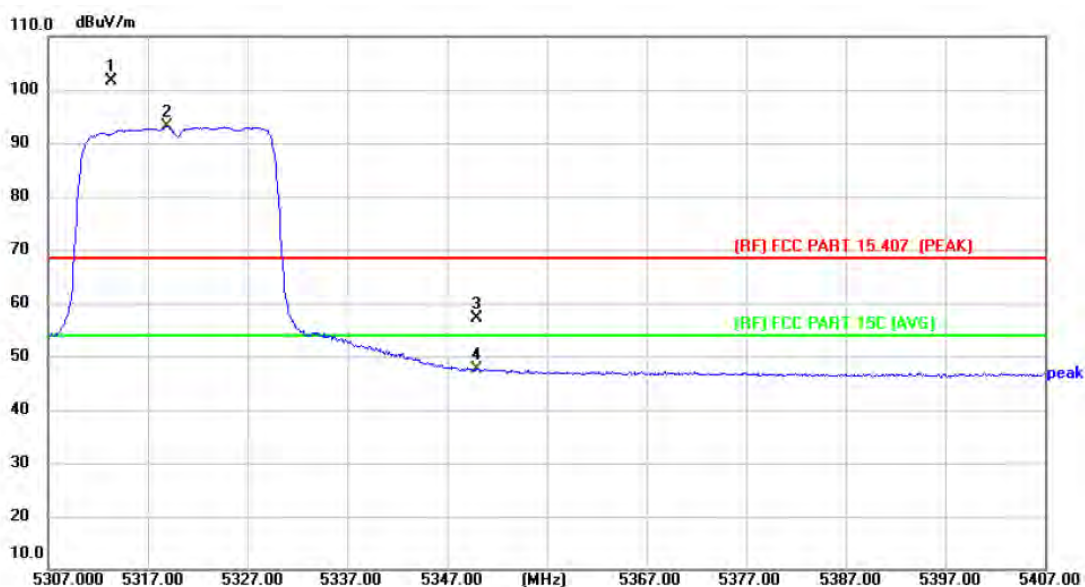


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5313.300	95.62	5.97	101.59	Fundamental Frequency		peak
2 *	5318.900	87.11	6.00	93.11			AVG
3	5350.000	50.99	6.12	57.11	68.30	-11.19	peak
4	5350.000	41.47	6.12	47.59	54.00	-6.41	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE20) Mode 5320 MHz (U-NII-2A) -SDM		
Remark:			

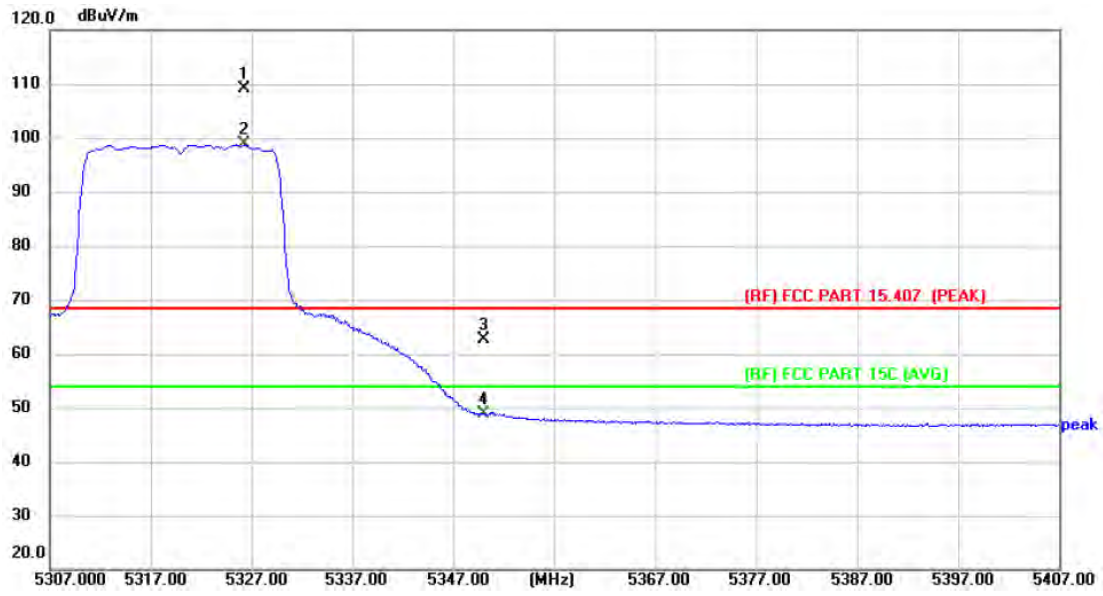


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5326.200	103.13	6.03	109.16	Fundamental Frequency		peak
2 *	5326.200	92.83	6.03	98.86			AVG
3	5350.000	56.52	6.12	62.64	68.30	-5.66	peak
4	5350.000	42.64	6.12	48.76	54.00	-5.24	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) -SDM		
Remark:			

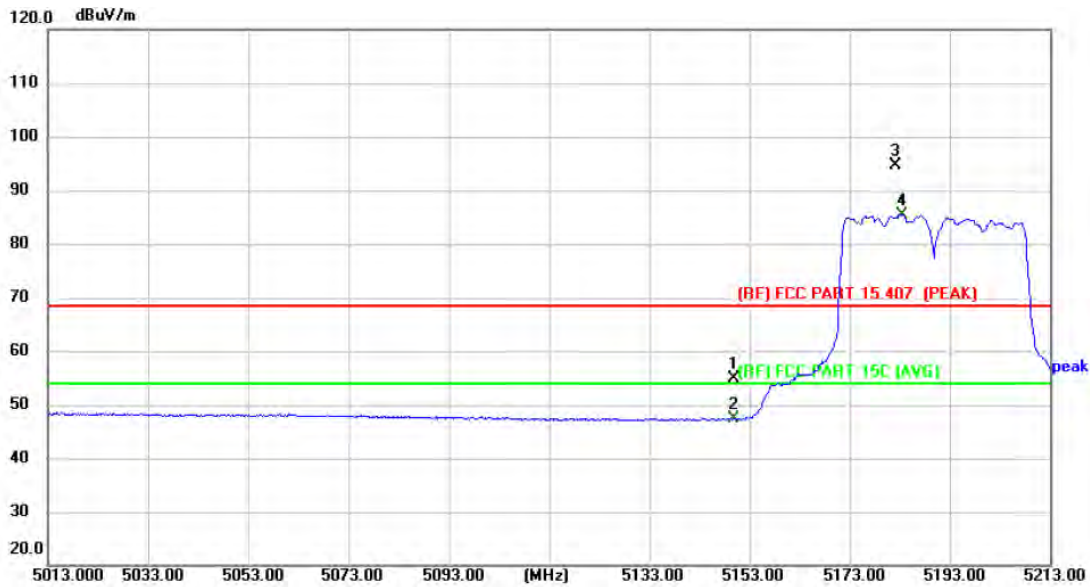


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	49.10	5.84	54.94	68.30	-13.36	peak
2	5150.000	41.54	5.84	47.38	54.00	-6.62	AVG
3 X	5182.200	88.69	5.90	94.59	Fundamental Frequency		peak
4 *	5183.400	79.50	5.90	85.40			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) -SDM		
Remark:			

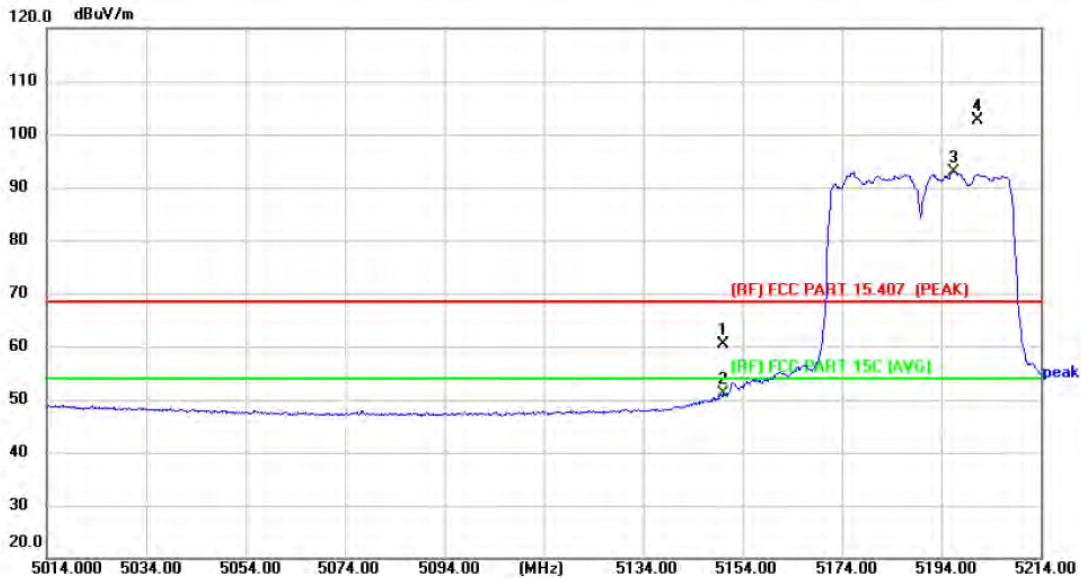


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	54.60	5.84	60.44	68.30	-7.86	peak
2	5150.000	45.17	5.84	51.01	54.00	-2.99	AVG
3 *	5196.400	87.05	5.92	92.97	Fundamental Frequency		AVG
4 X	5201.200	96.74	5.93	102.67			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) -SDM		
Remark:			

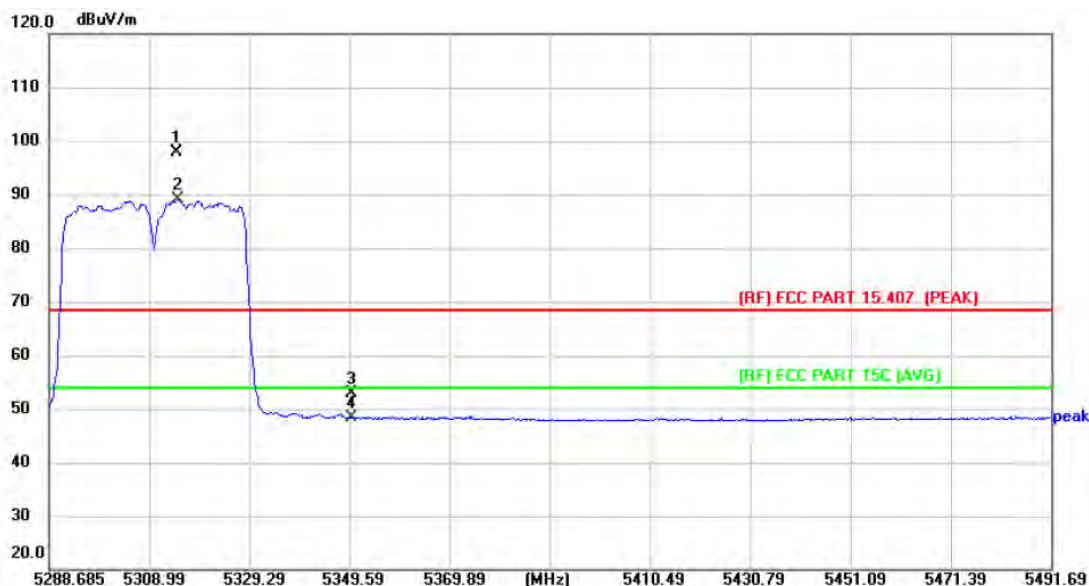


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5314.466	91.93	5.97	97.90	Fundamental Frequency		peak
2 *	5314.872	83.09	5.98	89.07			AVG
3	5350.000	46.68	6.12	52.80	68.30	-15.50	peak
4	5350.000	42.27	6.12	48.39	54.00	-5.61	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) -SDM		
Remark:			

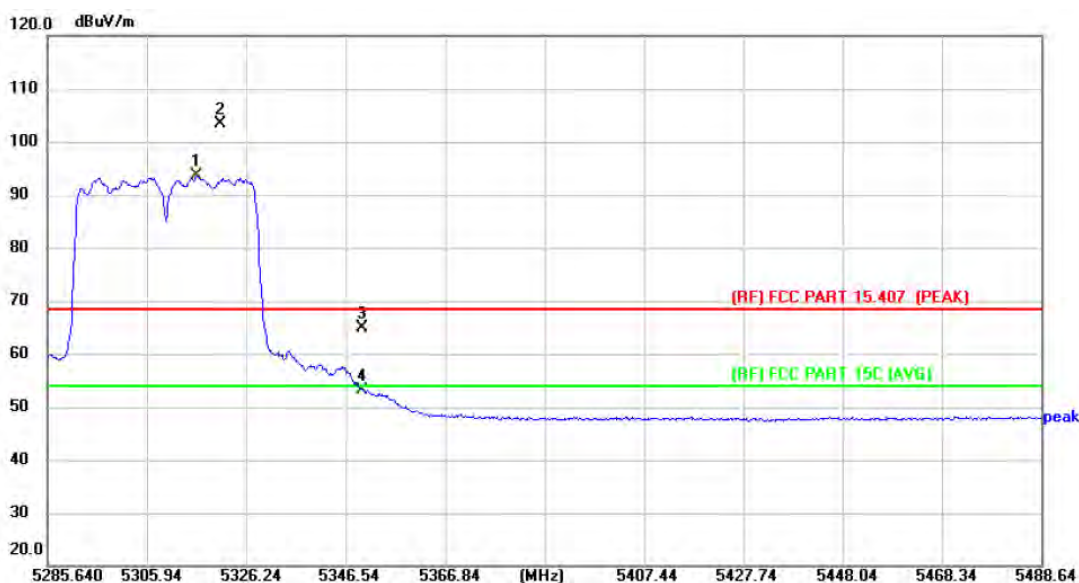

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5316.090	87.57	5.99	93.56	Fundamental Frequency		AVG
2 X	5320.962	97.36	6.00	103.36			peak
3	5350.000	58.74	6.12	64.86	68.30	-3.44	peak
4	5350.000	46.92	6.12	53.04	54.00	-0.96	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) -SDM		
Remark:			




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	49.01	5.84	54.85	68.30	-13.45	peak
2	5150.000	41.42	5.84	47.26	54.00	-6.74	AVG
3 X	5182.200	89.11	5.90	95.01	Fundamental Frequency		peak
4 *	5186.200	81.33	5.91	87.24		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) -SDM		
Remark:			

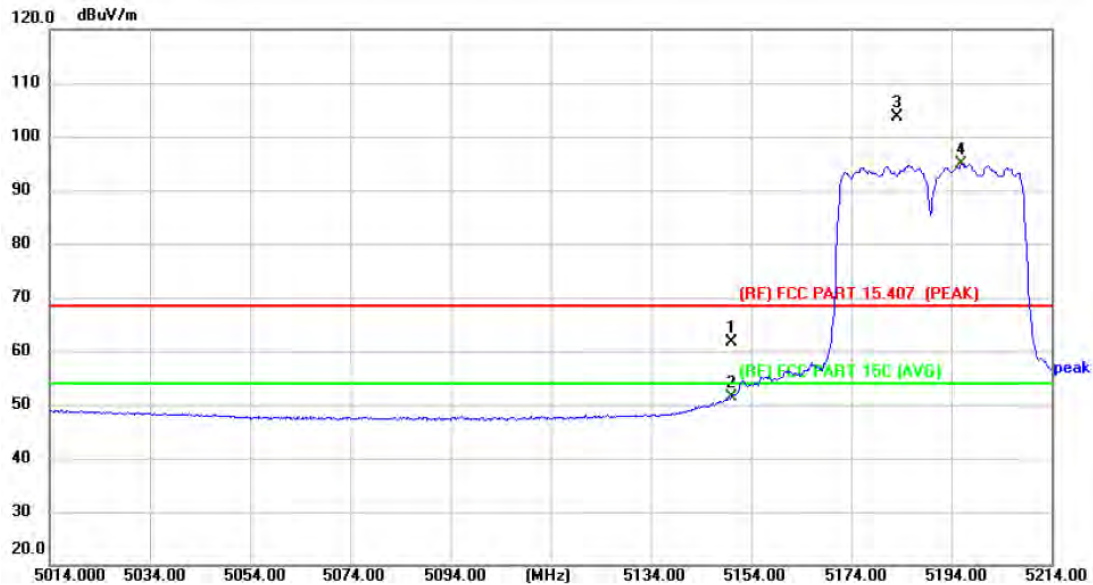


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	55.79	5.84	61.63	68.30	-6.67	peak
2	5150.000	45.65	5.84	51.49	54.00	-2.51	AVG
3 X	5183.200	97.75	5.90	103.65	Fundamental Frequency		peak
4 *	5196.000	88.97	5.92	94.89		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) -SDM		
Remark:			

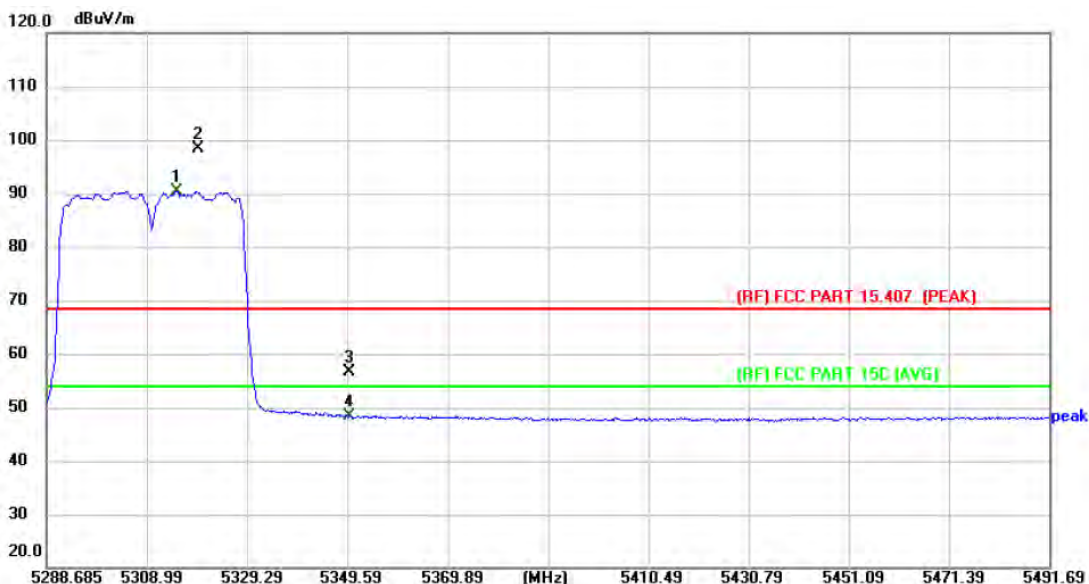


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5315.075	84.52	5.98	90.50	Fundamental Frequency		AVG
2 X	5319.338	92.41	6.01	98.42			peak
3	5350.000	50.52	6.12	56.64	68.30	-11.66	peak
4	5350.000	42.35	6.12	48.47	54.00	-5.53	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) -SDM		
Remark:			

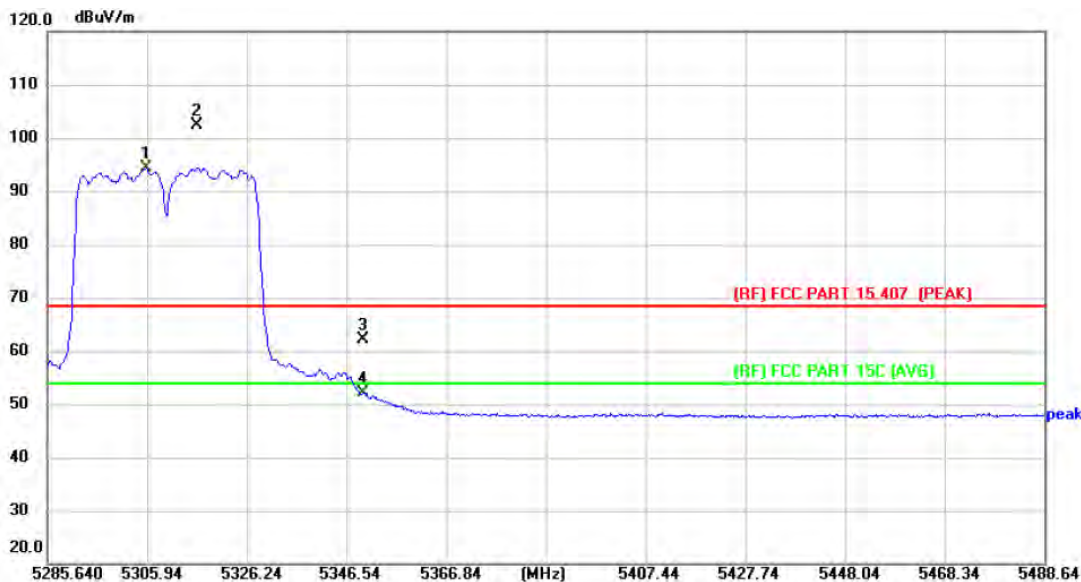


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5305.737	88.41	5.94	94.35	Fundamental Frequency		AVG
2 X	5316.090	96.34	5.99	102.33			peak
3	5350.000	56.04	6.12	62.16	68.30	-6.14	peak
4	5350.000	46.06	6.12	52.18	54.00	-1.82	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1) -SDM		
Remark:			

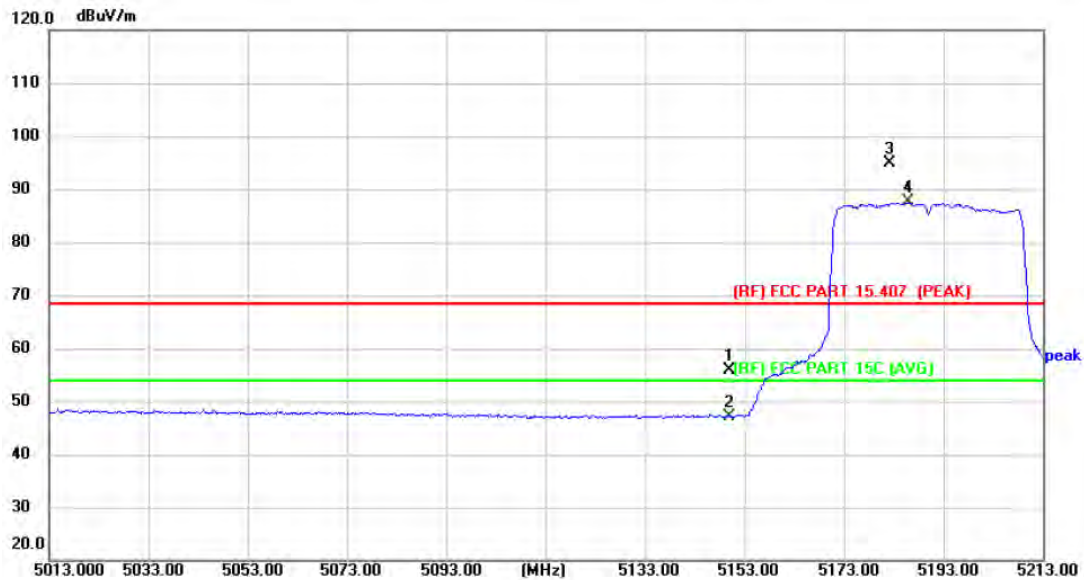


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	50.03	5.84	55.87	68.30	-12.43	peak
2	5150.000	41.40	5.84	47.24	54.00	-6.76	AVG
3 X	5182.200	88.98	5.90	94.88	Fundamental Frequency		peak
4 *	5185.800	81.71	5.91	87.62			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1) -SDM		
Remark:			

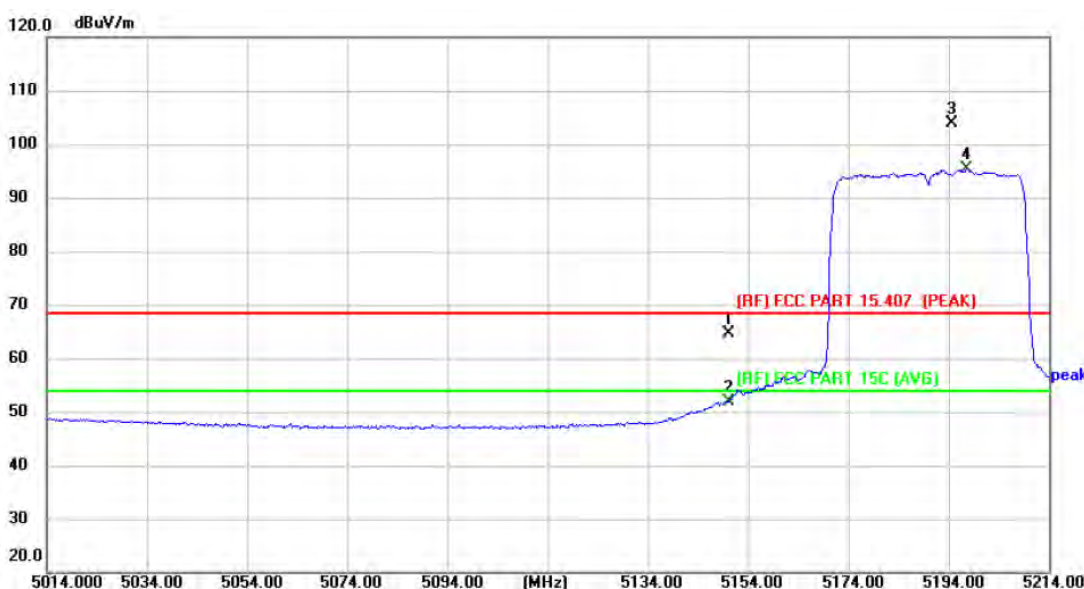


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	58.71	5.84	64.55	68.30	-3.75	peak
2	5150.000	46.16	5.84	52.00	54.00	-2.00	AVG
3 X	5194.600	97.91	5.93	103.84	Fundamental Frequency		peak
4 *	5197.600	89.42	5.92	95.34		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE40) Mode 5310 MHz (U-NII-2A) -SDM		
Remark:			

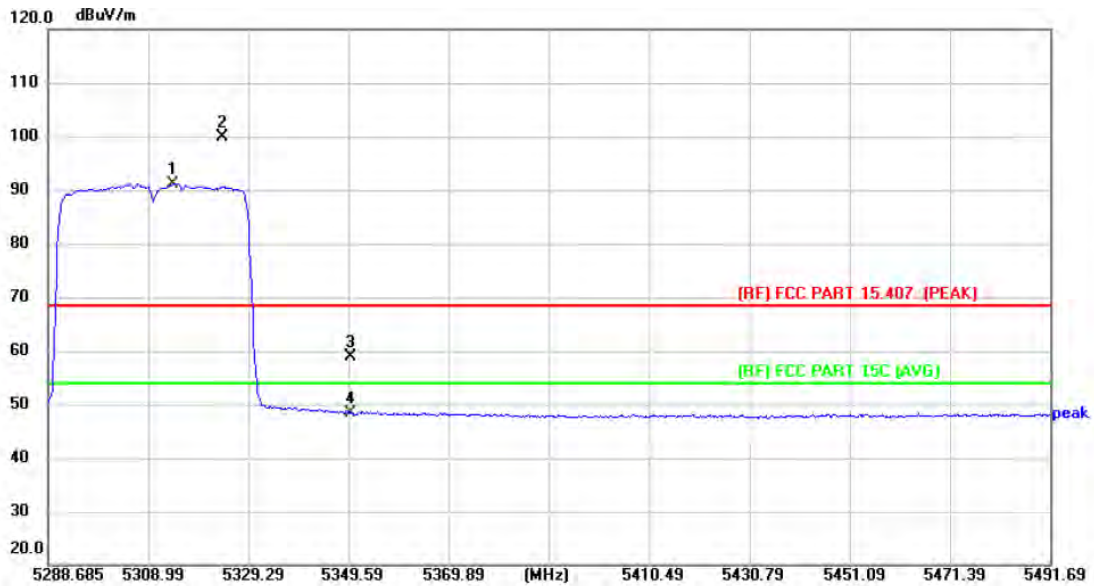


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5314.060	85.28	5.97	91.25	Fundamental Frequency		AVG
2 X	5324.007	93.79	6.02	99.81			peak
3	5350.000	52.77	6.12	58.89	68.30	-9.41	peak
4	5350.000	42.36	6.12	48.48	54.00	-5.52	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE40) Mode 5310 MHz (U-NII-2A) -SDM		
Remark:			

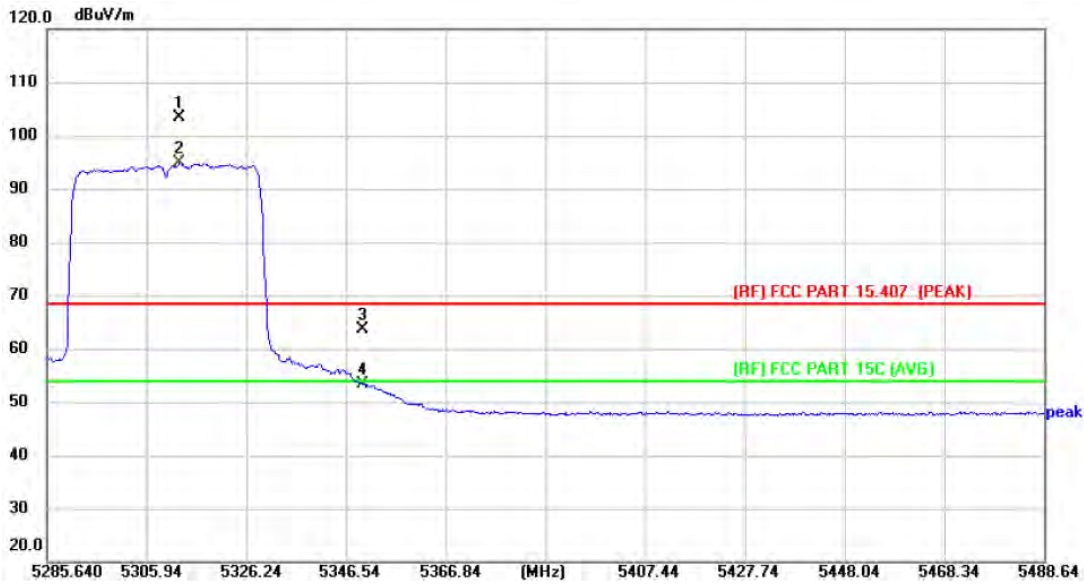


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5312.436	97.44	5.98	103.42	Fundamental Frequency		peak
2 *	5312.639	88.94	5.97	94.91			AVG
3	5350.000	57.57	6.12	63.69	68.30	-4.61	peak
4	5350.000	47.18	6.12	53.30	54.00	-0.70	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) -SDM		
Remark:			

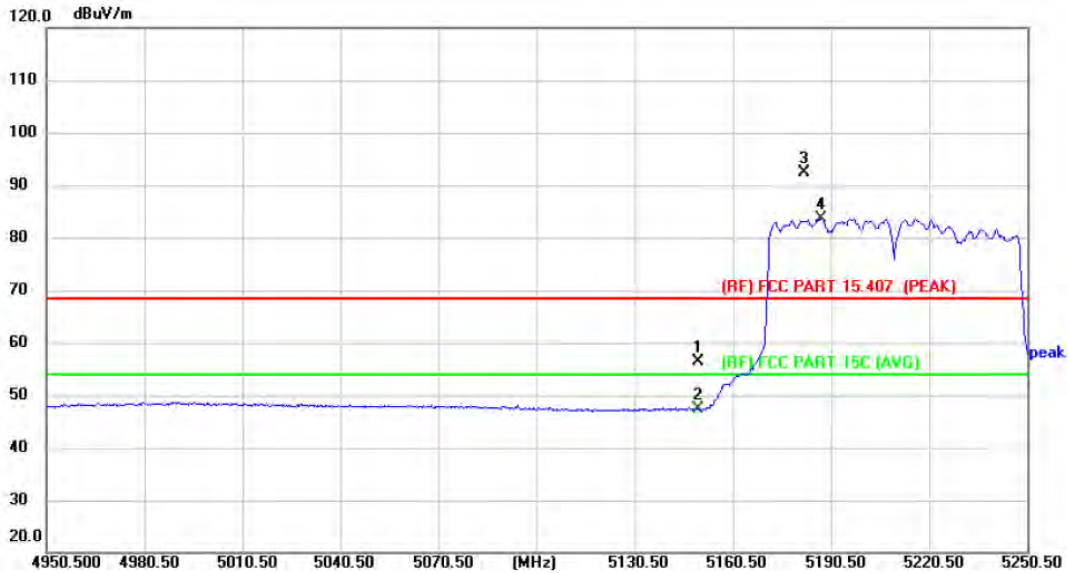


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	50.65	5.84	56.49	68.30	-11.81	peak
2	5150.000	41.57	5.84	47.41	54.00	-6.59	AVG
3 X	5182.400	86.60	5.90	92.50	Fundamental Frequency		peak
4 *	5187.500	77.72	5.91	83.63			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) -SDM		
Remark:			

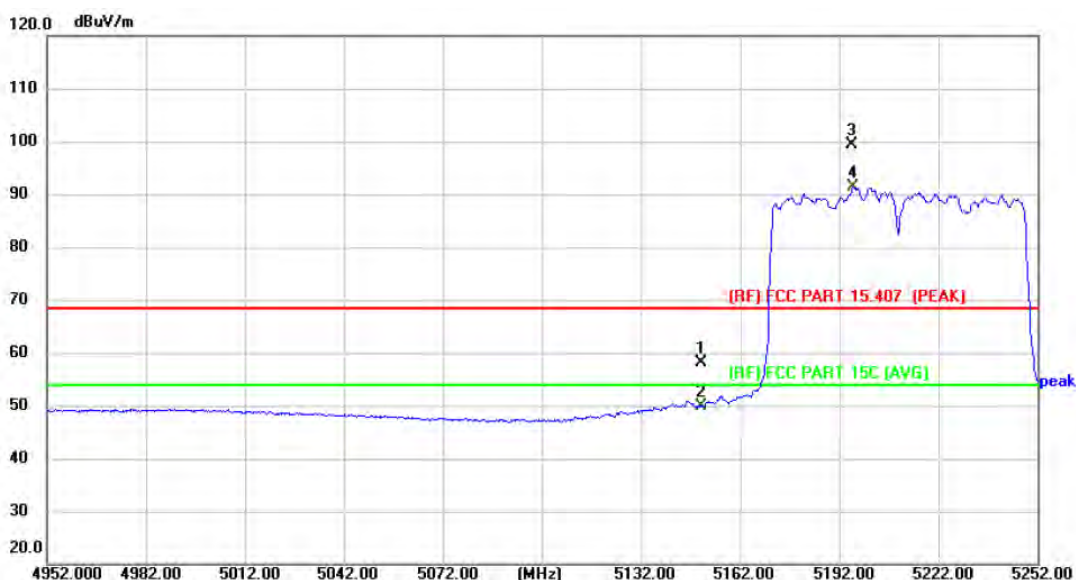


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	52.22	5.84	58.06	68.30	-10.24	peak
2	5150.000	44.04	5.84	49.88	54.00	-4.12	AVG
3 X	5195.600	93.41	5.93	99.34	Fundamental Frequency		peak
4 *	5196.200	85.34	5.92	91.26			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) -SDM		
Remark:			

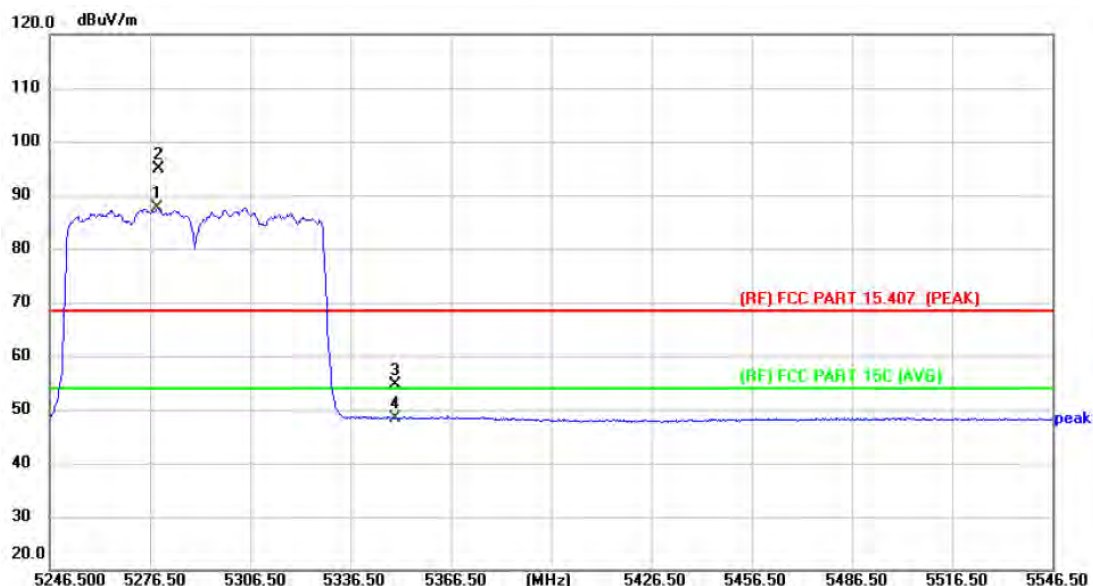


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5278.600	81.67	5.93	87.60	Fundamental Frequency		AVG
2 X	5278.900	88.87	5.93	94.80			peak
3	5350.000	48.56	6.12	54.68	68.30	-13.62	peak
4	5350.000	42.38	6.12	48.50	54.00	-5.50	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) -SDM		
Remark:			

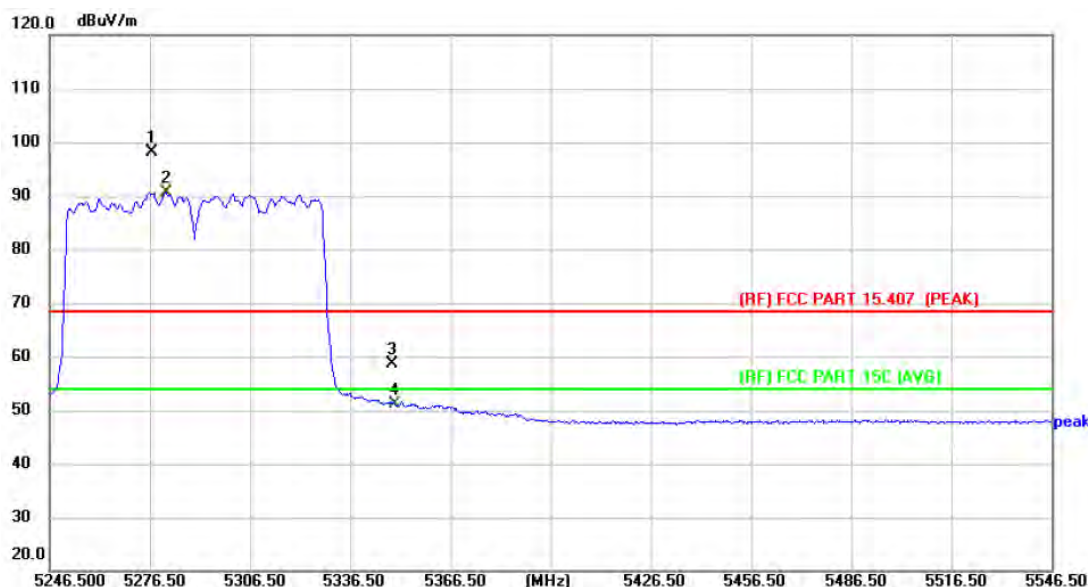


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5277.100	92.31	5.92	98.23	Fundamental Frequency		peak
2 *	5281.300	84.64	5.92	90.56			AVG
3	5349.360	52.44	6.12	58.56	68.30	-9.74	peak
4	5350.000	44.98	6.12	51.10	54.00	-2.90	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE80) Mode 5210 MHz (U-NII-1) -SDM		
Remark:			

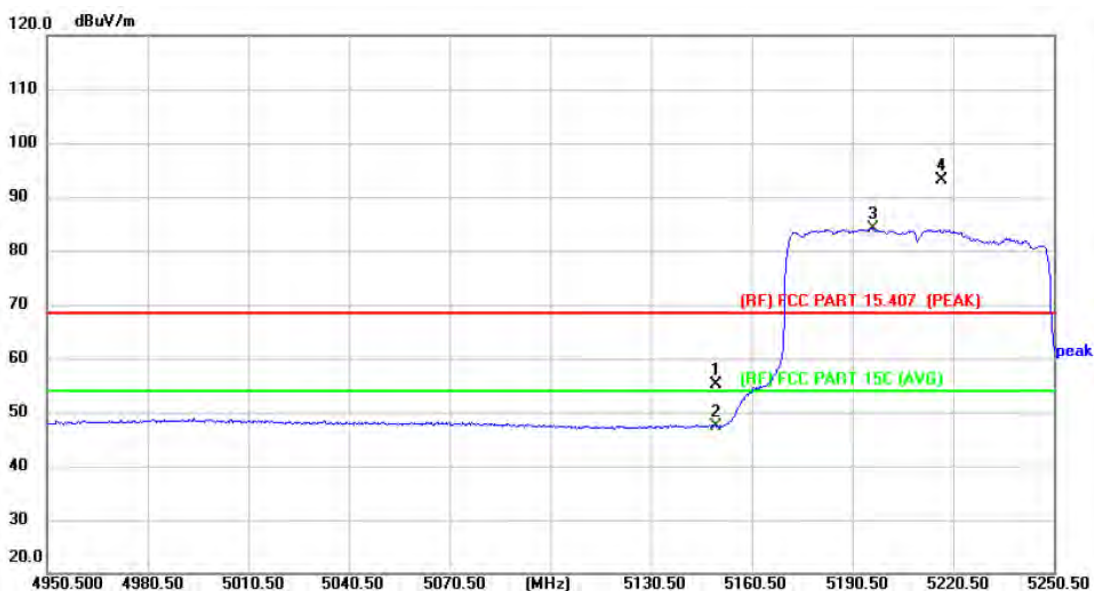


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	49.39	5.84	55.23	68.30	-13.07	peak
2	5150.000	41.53	5.84	47.37	54.00	-6.63	AVG
3 *	5196.500	78.31	5.92	84.23	Fundamental Frequency		AVG
4 X	5216.900	87.22	5.93	93.15			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE80) Mode 5210 MHz (U-NII-1) -SDM		
Remark:			

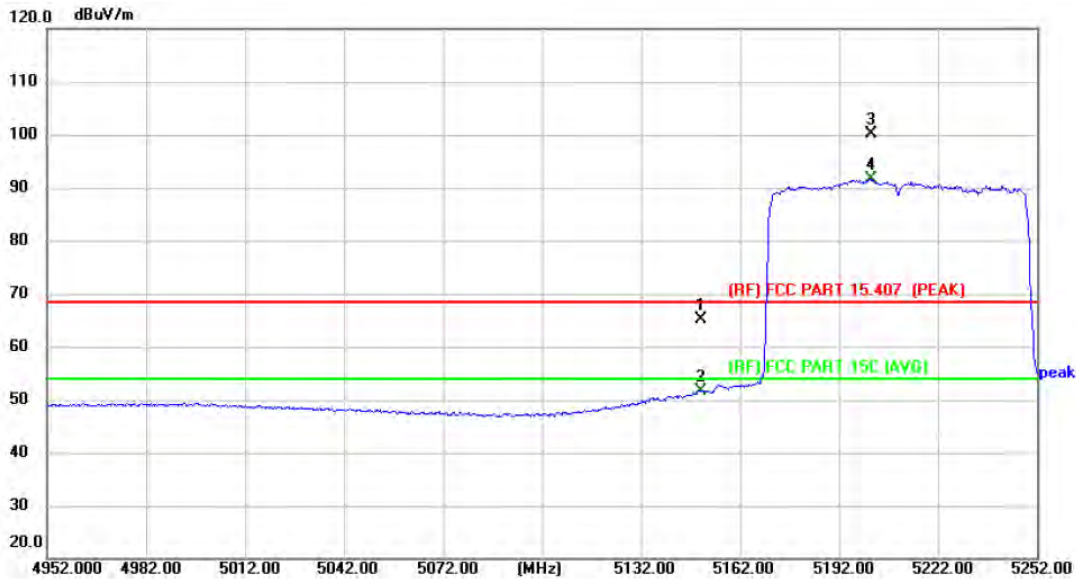


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	59.32	5.84	65.16	68.30	-3.14	peak
2	5150.000	45.81	5.84	51.65	54.00	-2.35	AVG
3 X	5201.600	94.13	5.93	100.06	Fundamental Frequency		peak
4 *	5201.900	85.68	5.93	91.61			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE80) Mode 5290 MHz (U-NII-2A) -SDM		
Remark:			

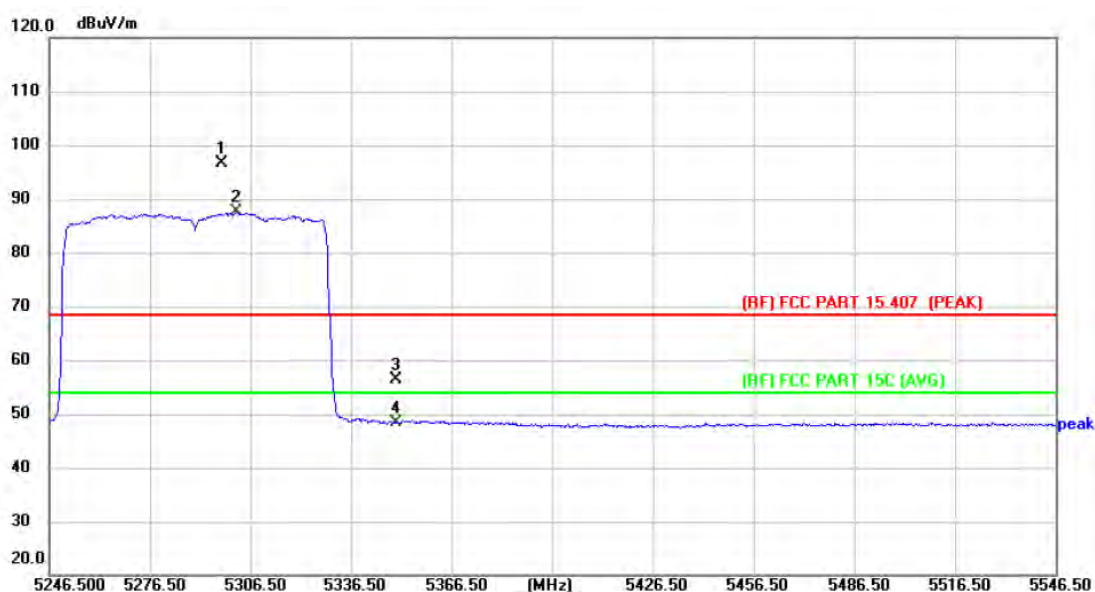


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5297.800	90.64	5.91	96.55	68.30	-11.95	peak
2 *	5302.300	81.69	5.94	87.63			Fundamental Frequency
3	5350.000	50.23	6.12	56.35	68.30	-11.95	peak
4	5350.000	42.37	6.12	48.49	54.00	-5.51	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE80) Mode 5290 MHz (U-NII-2A) -SDM		
Remark:			

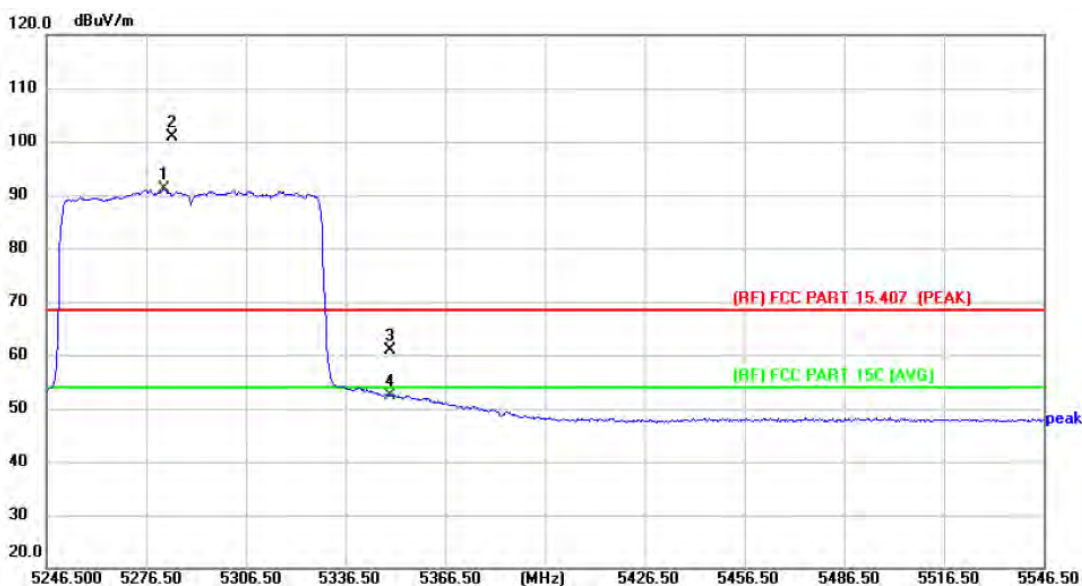


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5281.900	85.23	5.92	91.15	Fundamental Frequency		AVG
2 X	5284.300	94.88	5.92	100.80			peak
3	5350.000	54.79	6.12	60.91	68.30	-7.39	peak
4	5350.000	46.33	6.12	52.45	54.00	-1.55	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT160) Mode 5250 MHz (U-NII-2A) -SDM		
Remark:			

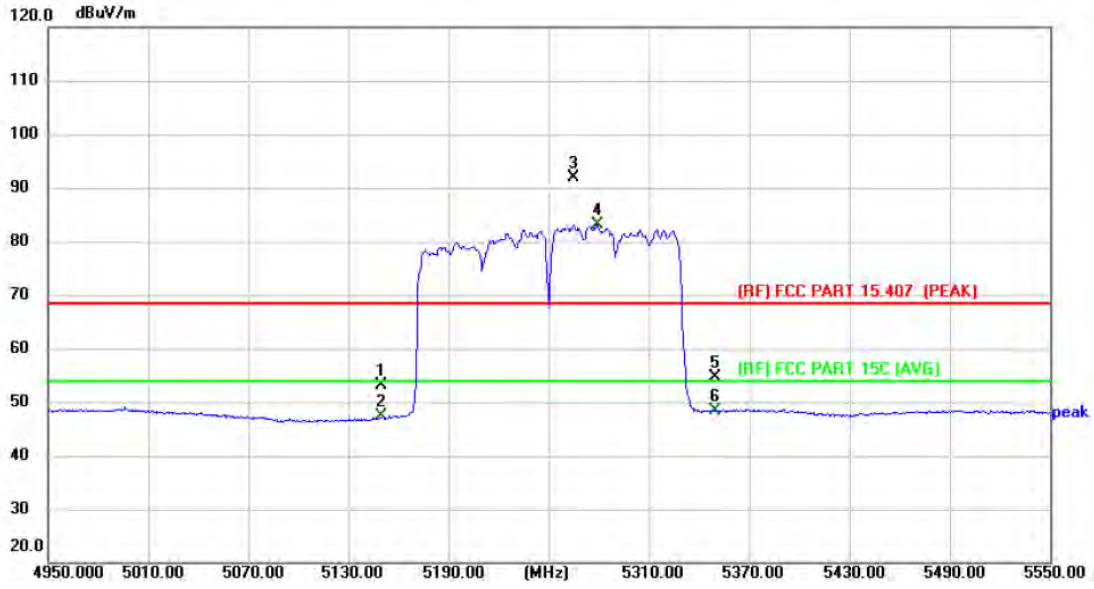


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	47.33	5.84	53.17	68.30	-15.13	peak
2	5150.000	41.51	5.84	47.35	54.00	-6.65	AVG
3 X	5264.400	85.92	5.92	91.84	Fundamental Frequency		peak
4 *	5278.800	77.25	5.93	83.18		AVG	
5	5350.000	48.43	6.12	54.55	68.30	-13.75	peak
6	5350.000	42.18	6.12	48.30	54.00	-5.70	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT160) Mode 5250 MHz (U-NII-2A) -SDM		
Remark:			

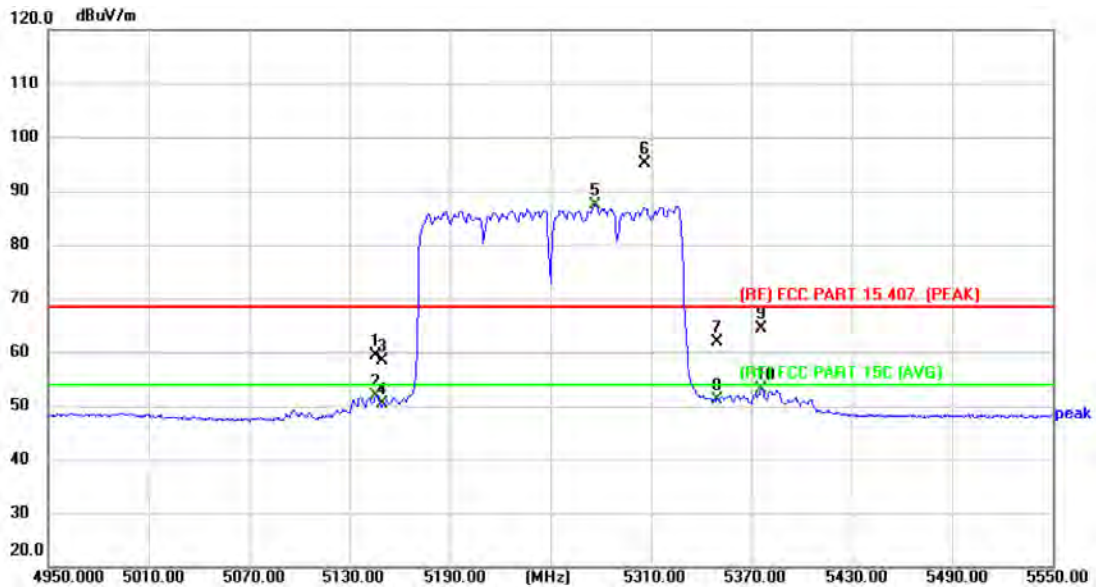


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5145.600	53.48	5.84	59.32	68.30	-8.98	peak
2	5145.600	46.08	5.84	51.92	54.00	-2.08	AVG
3	5150.000	52.46	5.84	58.30	68.30	-10.00	peak
4	5150.000	44.42	5.84	50.26	54.00	-3.74	AVG
5 *	5277.000	81.55	5.92	87.47	Fundamental Frequency		AVG
6 X	5306.400	89.19	5.95	95.14			peak
7	5350.000	55.76	6.12	61.88	68.30	-6.42	peak
8	5350.000	45.03	6.12	51.15	54.00	-2.85	AVG
9	5376.000	58.12	6.23	64.35	68.30	-3.95	peak
10	5376.000	46.84	6.23	53.07	54.00	-0.93	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE160) Mode 5250 MHz (U-NII-2A) -SDM		
Remark:			

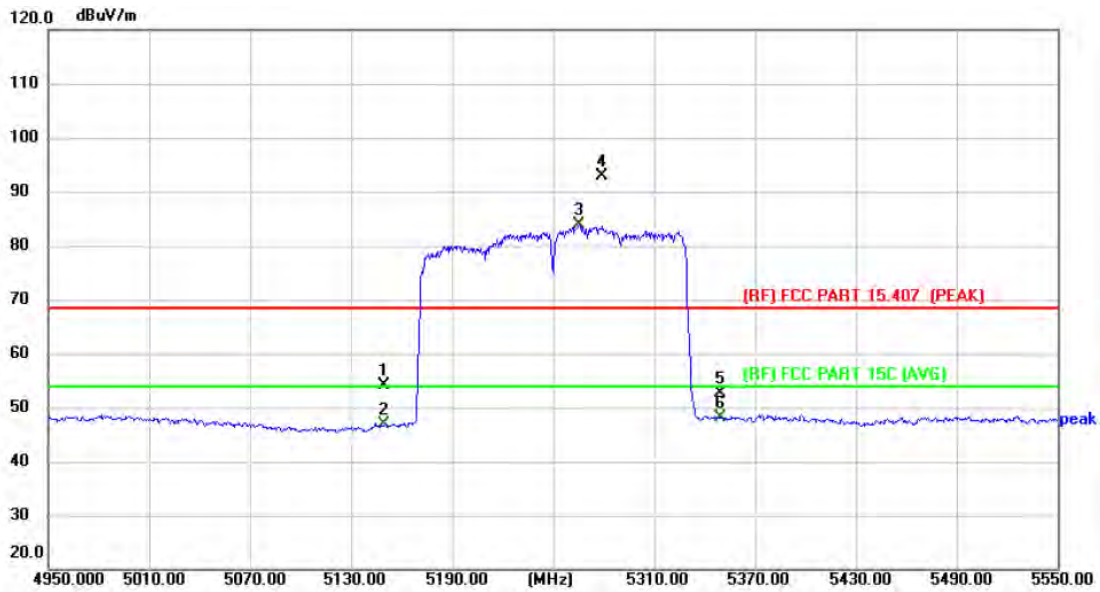


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	48.31	5.84	54.15	68.30	-14.15	peak
2	5150.000	41.05	5.84	46.89	54.00	-7.11	AVG
3 *	5265.600	77.85	5.92	83.77	Fundamental Frequency		AVG
4 X	5279.400	86.84	5.92	92.76			peak
5	5350.000	46.43	6.12	52.55	68.30	-15.75	peak
6	5350.000	41.89	6.12	48.01	54.00	-5.99	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE160) Mode 5250 MHz (U-NII-2A) -SDM		
Remark:			

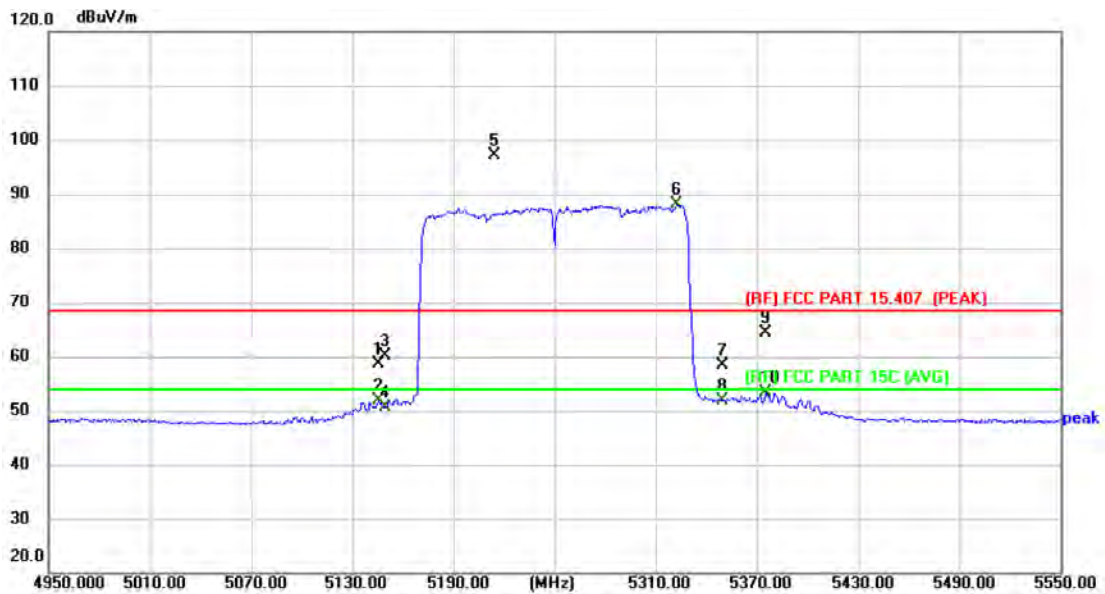


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5145.600	52.83	5.84	58.67	68.30	-9.63	peak
2	5145.600	45.96	5.84	51.80	54.00	-2.20	AVG
3	5150.000	54.41	5.84	60.25	68.30	-8.05	peak
4	5150.000	44.75	5.84	50.59	54.00	-3.41	AVG
5 X	5214.000	91.30	5.92	97.22	Fundamental Frequency		peak
6 *	5322.600	82.05	6.01	88.06			AVG
7	5350.000	52.34	6.12	58.46	68.30	-9.84	peak
8	5350.000	45.72	6.12	51.84	54.00	-2.16	AVG
9	5375.400	58.12	6.23	64.35	68.30	-3.95	peak
10	5375.400	47.22	6.23	53.45	54.00	-0.55	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C) -SISO		
Remark:			

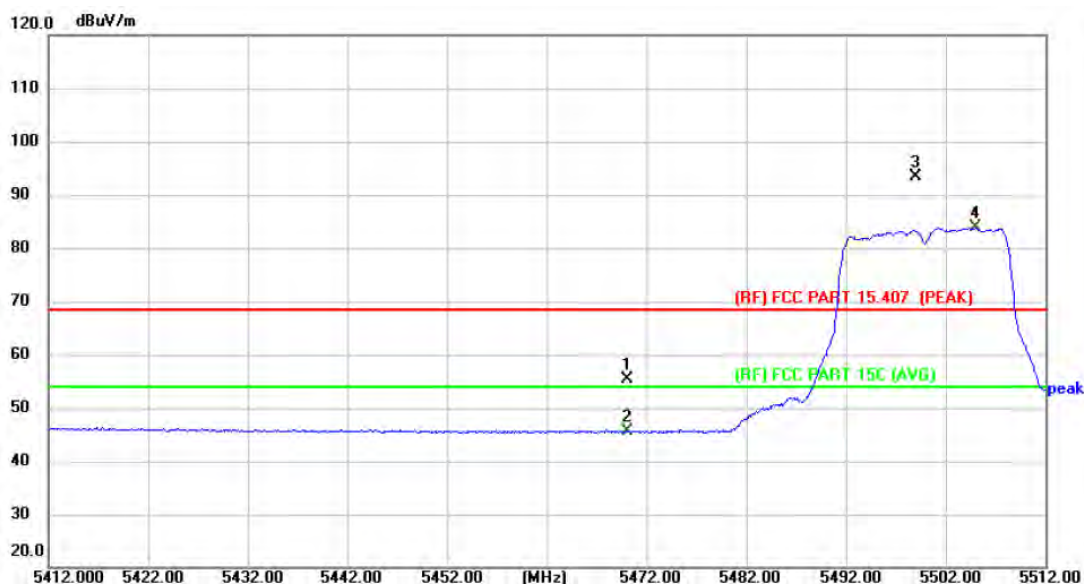


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	48.75	6.55	55.30	68.30	-13.00	peak
2	5470.000	39.14	6.55	45.69	54.00	-8.31	AVG
3 X	5499.000	86.87	6.63	93.50	Fundamental Frequency		peak
4 *	5505.000	77.25	6.62	83.87		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)-SISO		
Remark:			

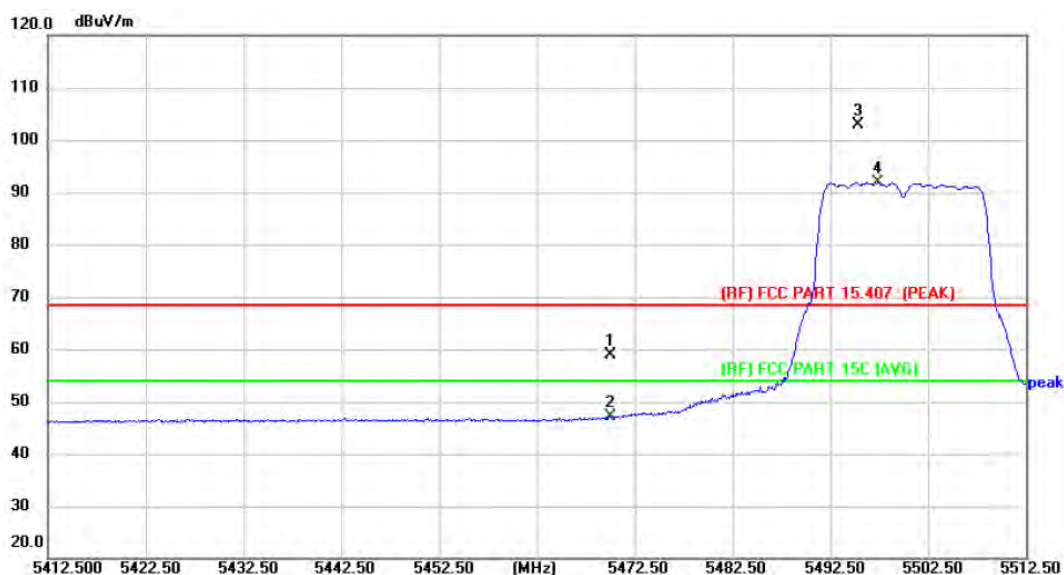


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	52.40	6.55	58.95	68.30	-9.35	peak
2	5470.000	40.58	6.55	47.13	54.00	-6.87	AVG
3 X	5495.300	96.24	6.62	102.86	Fundamental Frequency		peak
4 *	5497.400	85.26	6.62	91.88			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5700 MHz (U-NII-2C) -SISO		
Remark:			

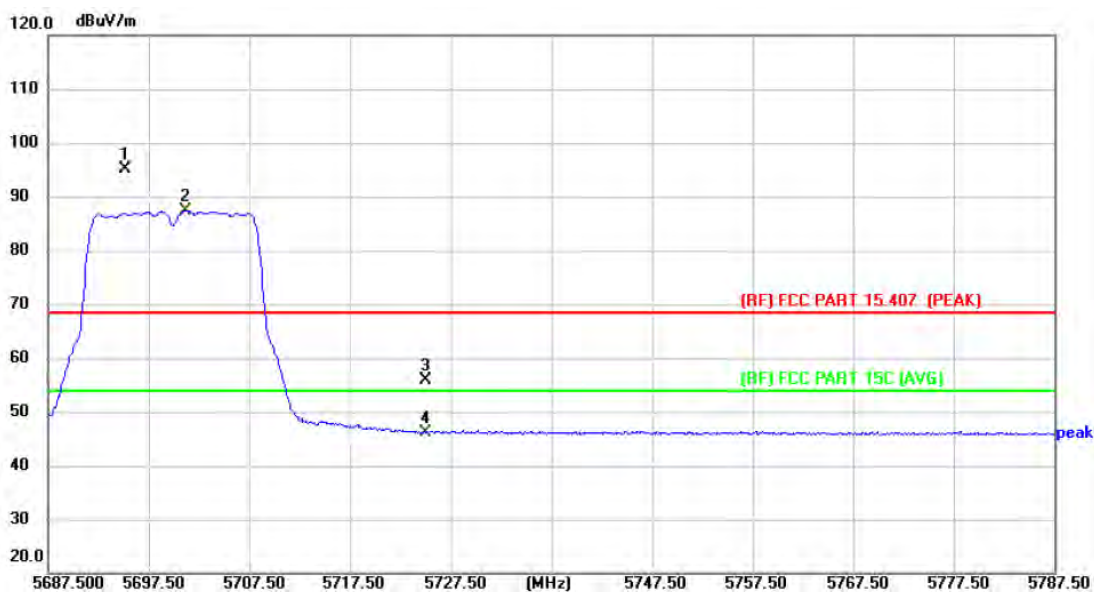


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5695.200	88.53	6.52	95.05	Fundamental Frequency		peak
2 *	5701.200	80.88	6.52	87.40			AVG
3	5725.000	49.38	6.46	55.84	68.30	-12.46	peak
4	5725.000	39.74	6.46	46.20	54.00	-7.80	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5700 MHz (U-NII-2C) -SISO		
Remark:			

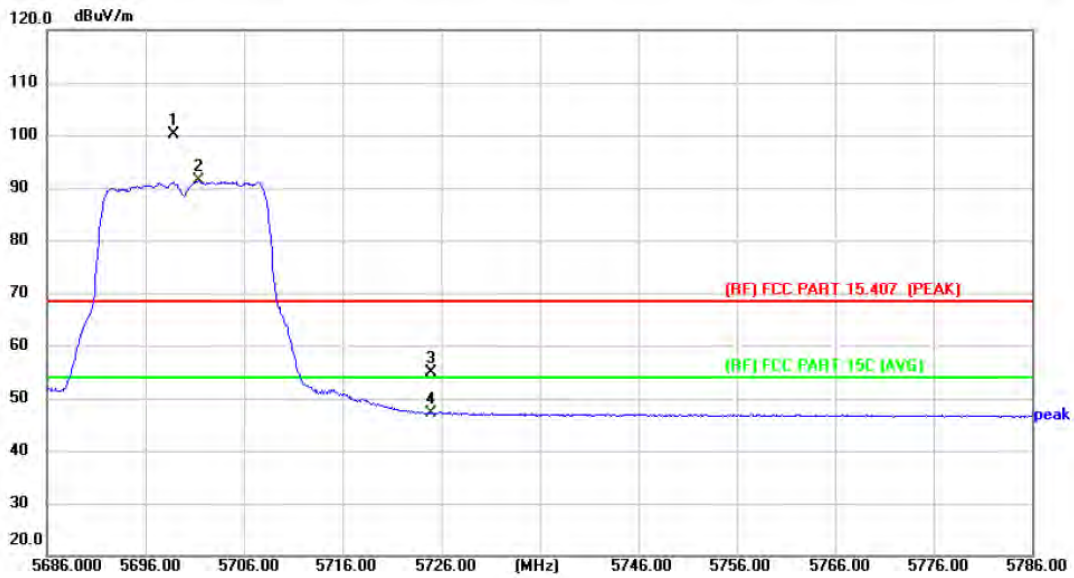


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5698.800	93.66	6.52	100.18	Fundamental Frequency		peak
2 *	5701.400	84.74	6.52	91.26			AVG
3	5725.000	48.38	6.46	54.84	68.30	-13.46	peak
4	5725.000	40.76	6.46	47.22	54.00	-6.78	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) -SDM		
Remark:			

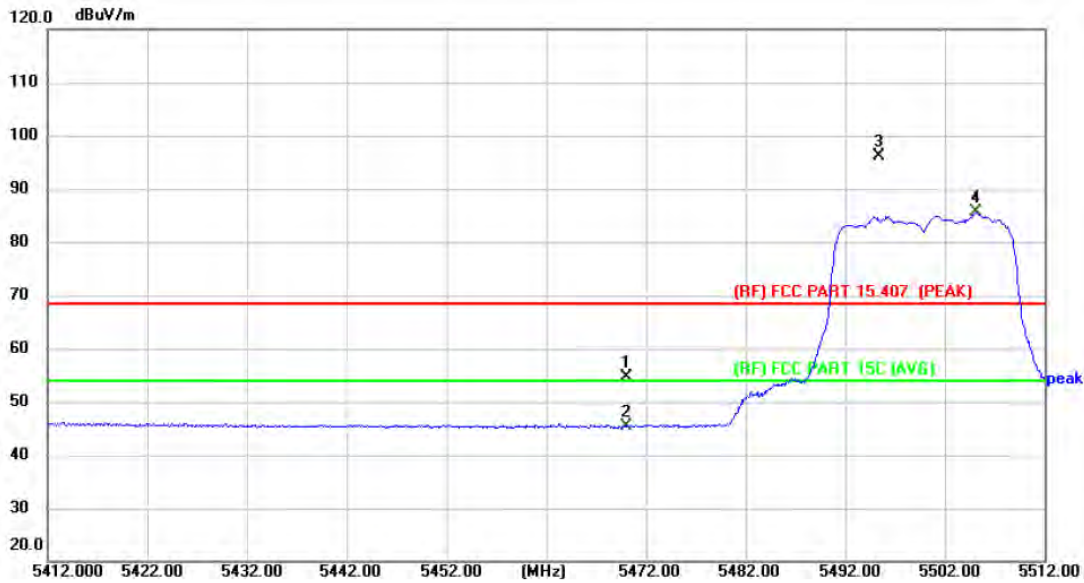


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	48.02	6.55	54.57	68.30	-13.73	peak
2	5470.000	38.91	6.55	45.46	54.00	-8.54	AVG
3 X	5495.400	89.43	6.62	96.05	Fundamental Frequency		peak
4 *	5505.100	78.94	6.62	85.56			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) -SDM		
Remark:			

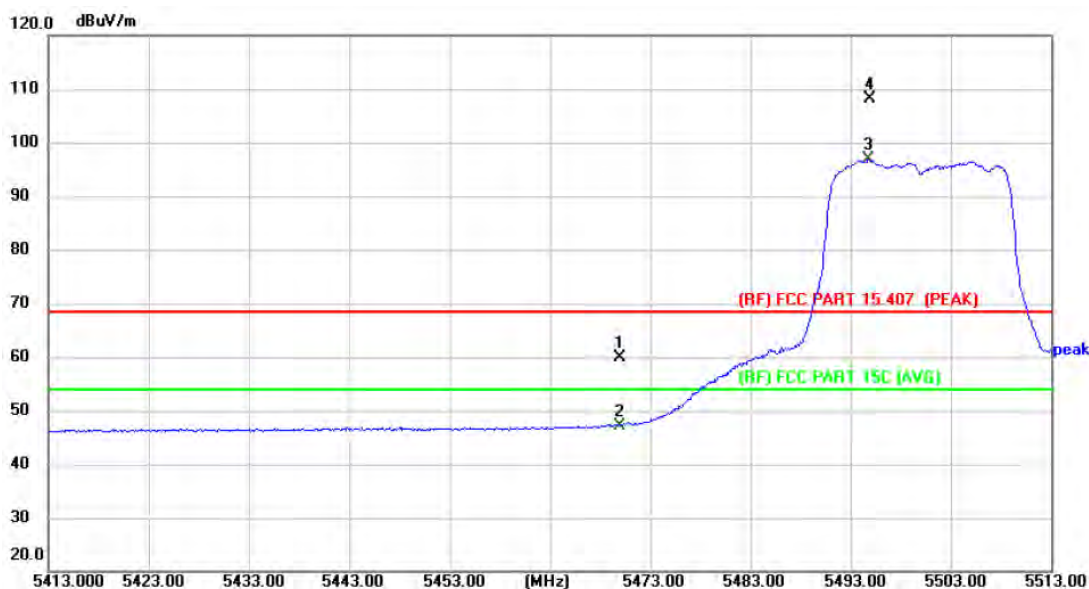


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	53.28	6.55	59.83	68.30	-8.47	peak
2	5470.000	40.66	6.55	47.21	54.00	-6.79	AVG
3 *	5494.800	90.32	6.62	96.94	Fundamental Frequency		AVG
4 X	5494.900	101.61	6.62	108.23			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C) -SDM		
Remark:			

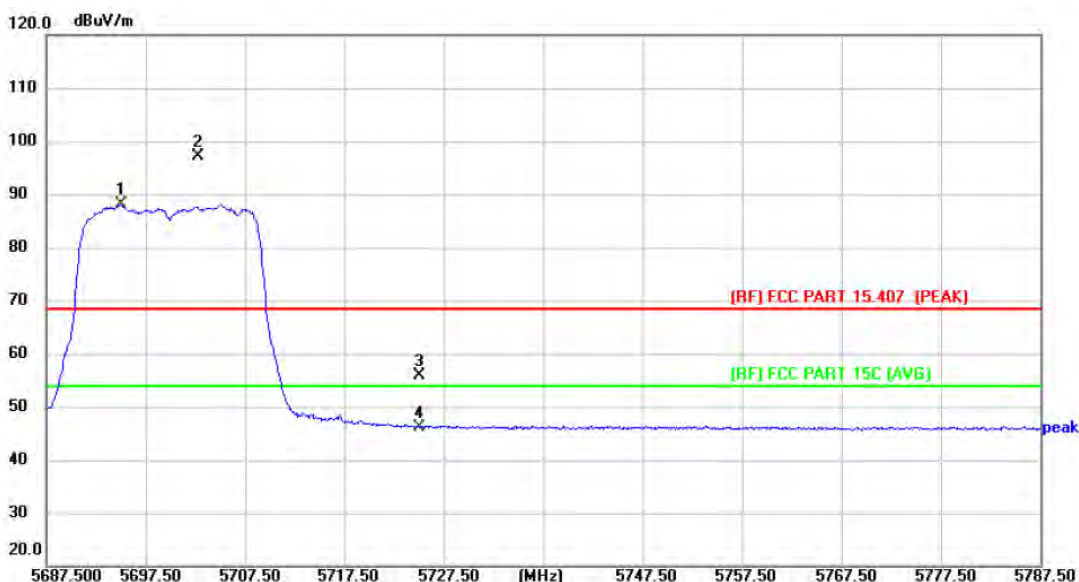


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5695.000	81.58	6.52	88.10	Fundamental Frequency		AVG
2 X	5702.800	90.51	6.52	97.03			peak
3	5725.000	49.49	6.46	55.95	68.30	-12.35	peak
4	5725.000	39.79	6.46	46.25	54.00	-7.75	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C) -SDM		
Remark:			

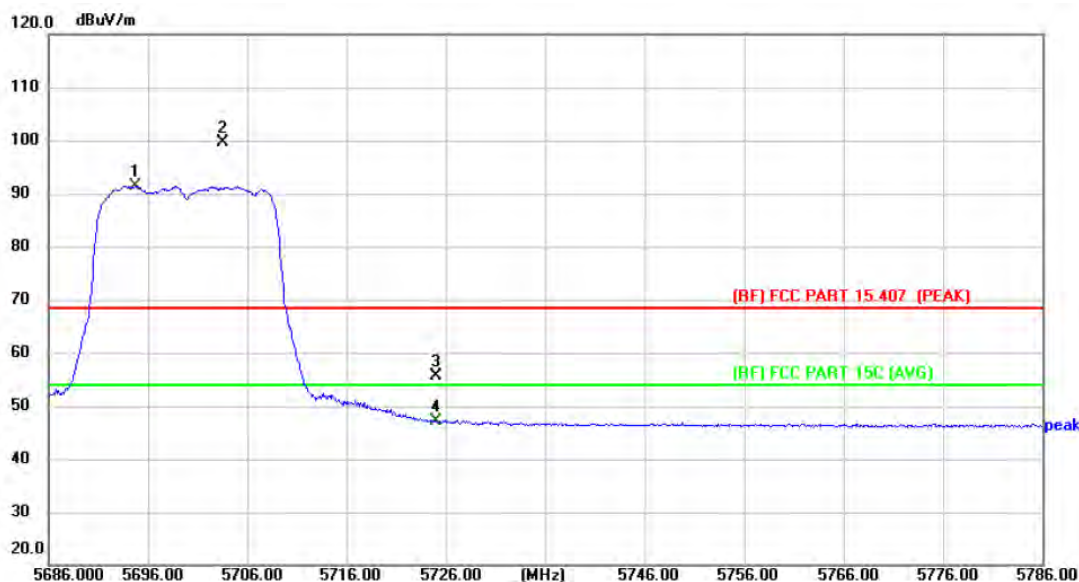


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5694.700	84.93	6.52	91.45	Fundamental Frequency		AVG
2 X	5703.500	93.14	6.52	99.66			peak
3	5725.000	49.09	6.46	55.55	68.30	-12.75	peak
4	5725.000	40.57	6.46	47.03	54.00	-6.97	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) -SDM		
Remark:			

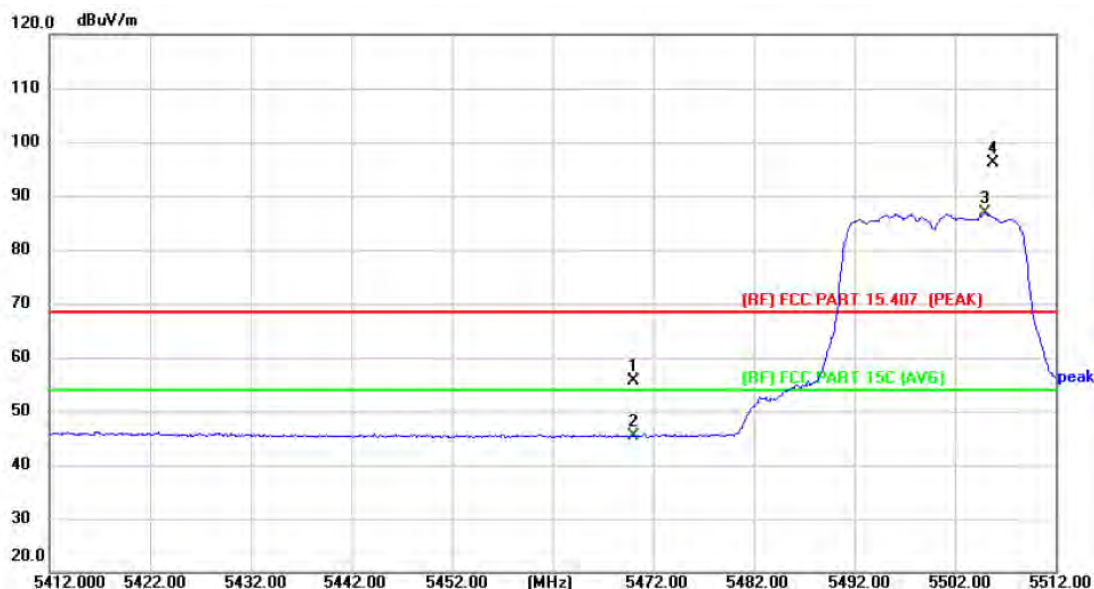


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	49.08	6.55	55.63	68.30	-12.67	peak
2	5470.000	38.95	6.55	45.50	54.00	-8.50	AVG
3 *	5505.000	80.20	6.62	86.82	Fundamental Frequency		AVG
4 X	5505.800	89.41	6.62	96.03			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) -SDM		
Remark:			

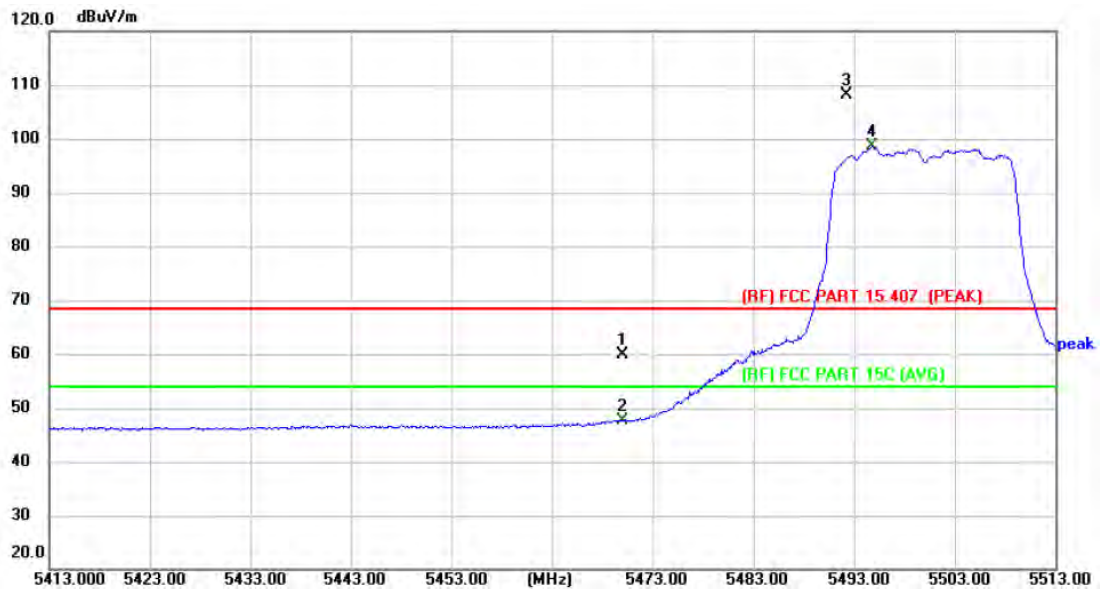


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	53.42	6.55	59.97	68.30	-8.33	peak
2	5470.000	41.05	6.55	47.60	54.00	-6.40	AVG
3 X	5492.300	101.62	6.61	108.23	Fundamental Frequency		peak
4 *	5494.800	92.00	6.62	98.62		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C) -SDM		
Remark:			

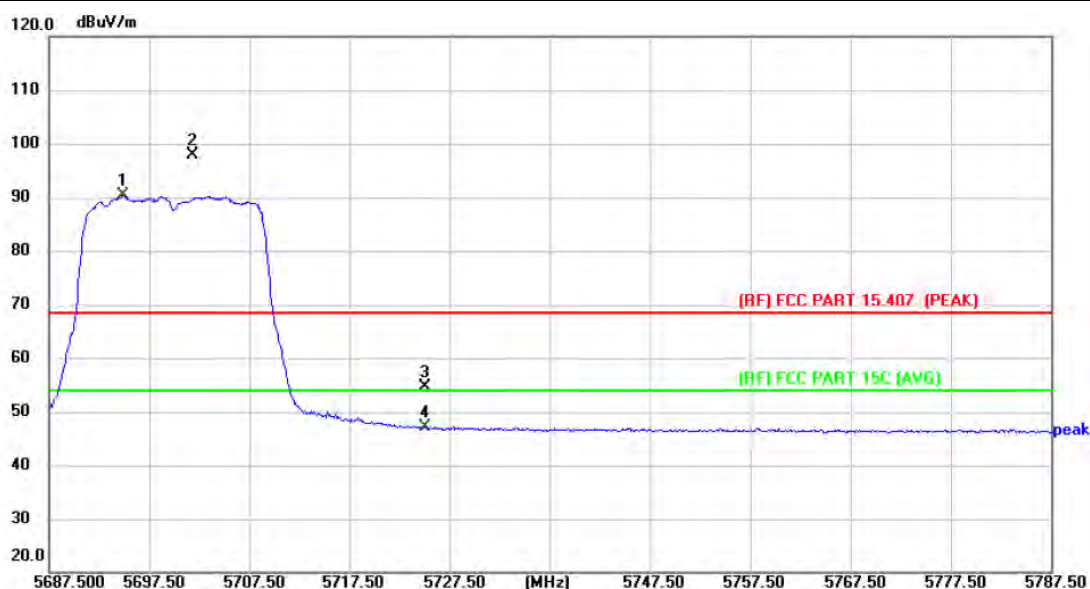


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5694.900	83.80	6.52	90.32	Fundamental Frequency		AVG
2 X	5701.800	91.46	6.52	97.98			peak
3	5725.000	48.26	6.46	54.72	68.30	-13.58	peak
4	5725.000	40.70	6.46	47.16	54.00	-6.84	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C) -SDM		
Remark:			

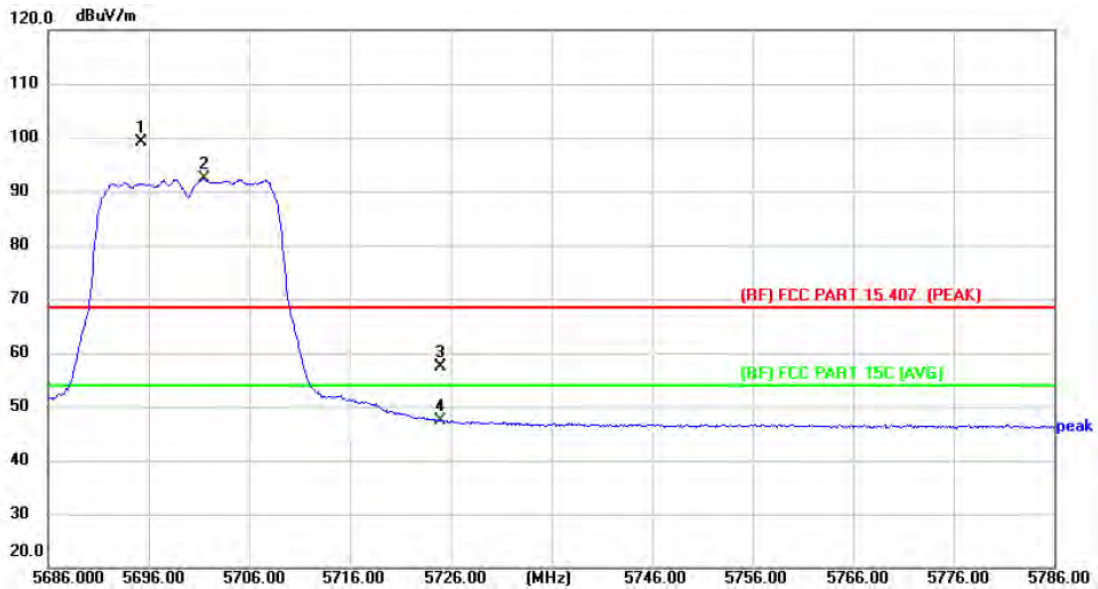


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5695.300	92.55	6.52	99.07	Fundamental Frequency		peak
2 *	5701.500	85.83	6.52	92.35			AVG
3	5725.000	51.03	6.46	57.49	68.30	-10.81	peak
4	5725.000	40.92	6.46	47.38	54.00	-6.62	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C) -SDM		
Remark:			

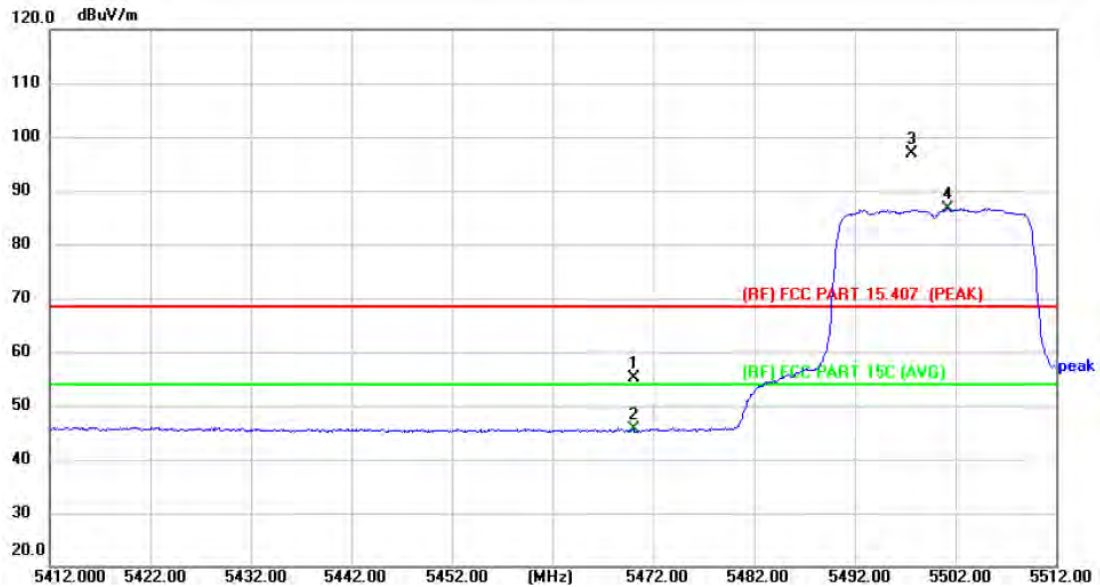


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	48.60	6.55	55.15	68.30	-13.15	peak
2	5470.000	38.96	6.55	45.51	54.00	-8.49	AVG
3 X	5497.600	90.30	6.62	96.92	Fundamental Frequency		peak
4 *	5501.300	79.96	6.63	86.59			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C) -SDM		
Remark:			

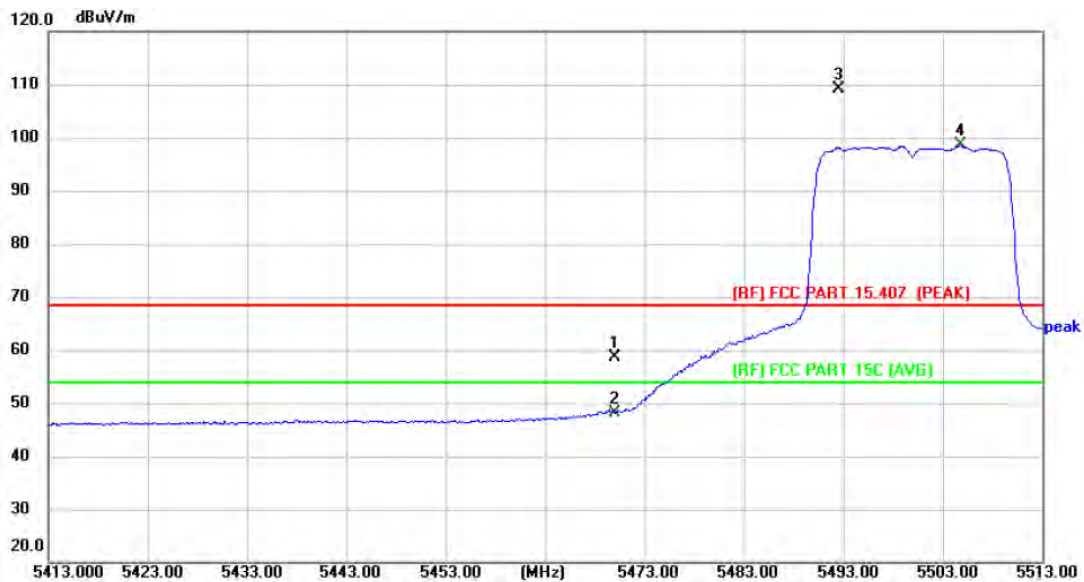


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	52.20	6.55	58.75	68.30	-9.55	peak
2	5470.000	41.63	6.55	48.18	54.00	-5.82	AVG
3 X	5492.500	102.54	6.61	109.15	Fundamental Frequency		peak
4 *	5504.800	91.89	6.62	98.51			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE20) Mode 5700 MHz (U-NII-2C) -SDM		
Remark:			

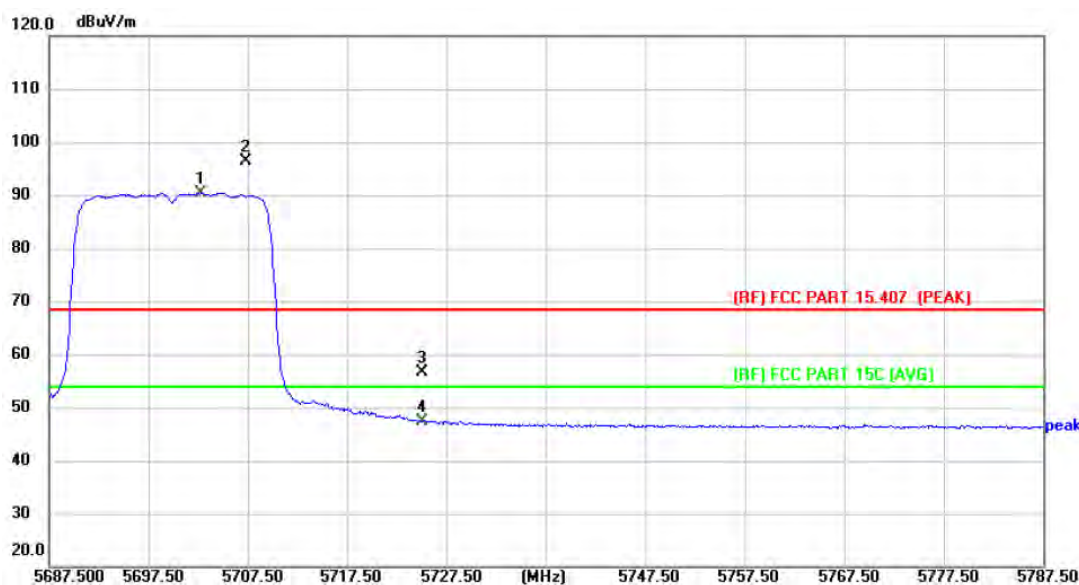


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5702.800	83.95	6.52	90.47	Fundamental Frequency		AVG
2 X	5707.300	90.00	6.50	96.50			peak
3	5725.000	50.14	6.46	56.60	68.30	-11.70	peak
4	5725.000	40.96	6.46	47.42	54.00	-6.58	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE20) Mode 5700 MHz (U-NII-2C) -SDM		
Remark:			

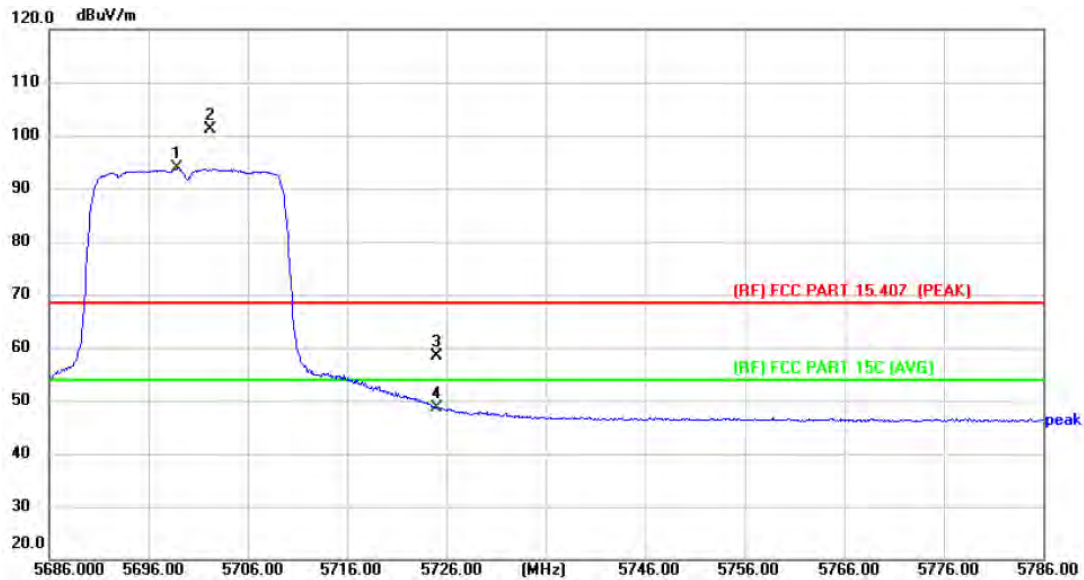

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5698.900	87.28	6.52	93.80	Fundamental Frequency		AVG
2 X	5702.200	94.53	6.52	101.05			peak
3	5725.000	51.83	6.46	58.29	68.30	-10.01	peak
4	5725.000	42.22	6.46	48.68	54.00	-5.32	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) -SDM		
Remark:			




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	49.30	6.55	55.85	68.30	-12.45	peak
2	5470.000	41.20	6.55	47.75	54.00	-6.25	AVG
3 X	5501.000	86.94	6.63	93.57	Fundamental Frequency		peak
4 *	5524.800	77.47	6.59	84.06			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) -SDM		
Remark:			

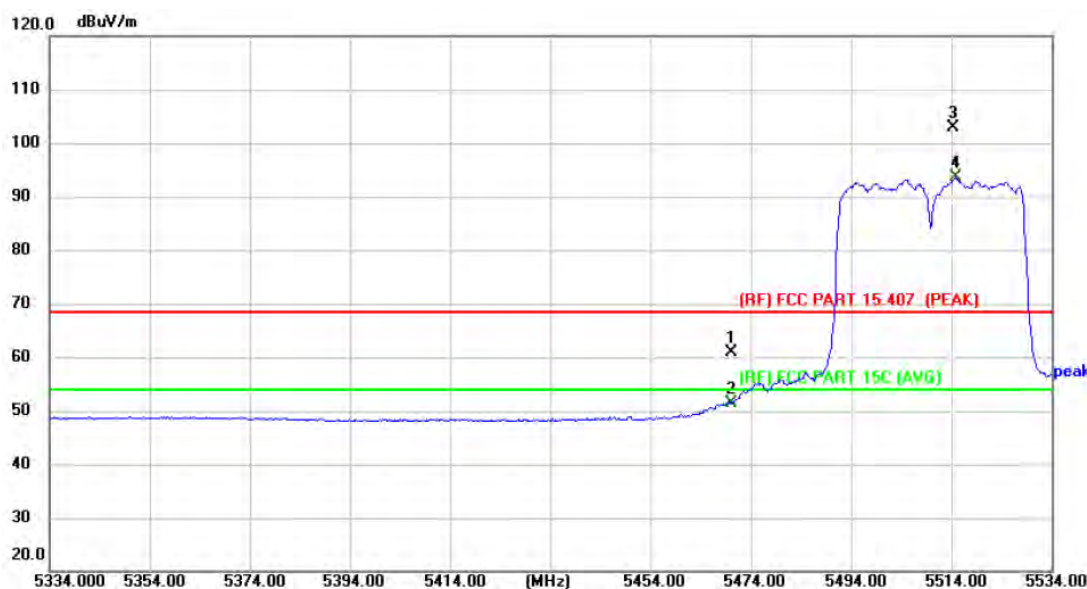


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	54.33	6.55	60.88	68.30	-7.42	peak
2	5470.000	44.82	6.55	51.37	54.00	-2.63	AVG
3 X	5514.400	96.38	6.60	102.98	Fundamental Frequency		peak
4 *	5515.000	86.92	6.60	93.52			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C) -SDM		
Remark:			

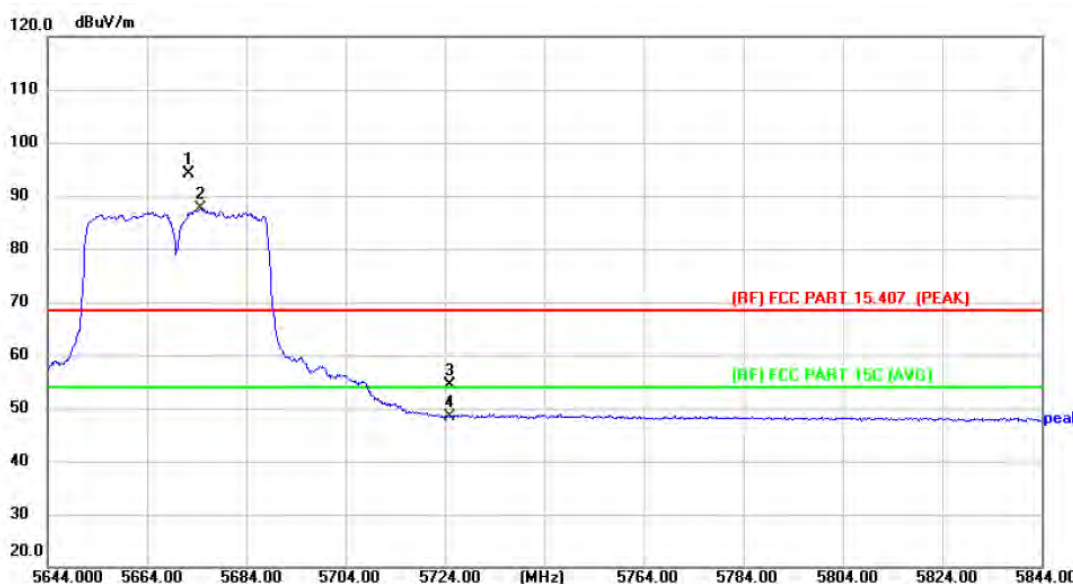


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5672.400	87.53	6.50	94.03	Fundamental Frequency		peak
2 *	5674.800	81.24	6.51	87.75			AVG
3	5725.000	47.84	6.46	54.30	68.30	-14.00	peak
4	5725.000	41.95	6.46	48.41	54.00	-5.59	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C) -SDM		
Remark:			

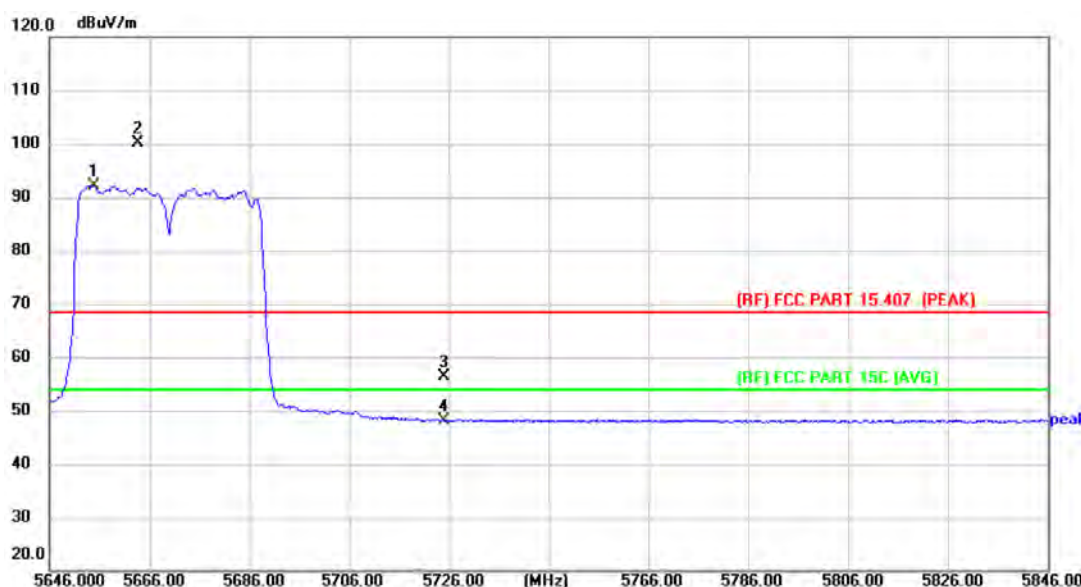


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5654.800	85.71	6.50	92.21	Fundamental Frequency		AVG
2 X	5663.800	93.67	6.50	100.17			peak
3	5725.000	49.80	6.46	56.26	68.30	-12.04	peak
4	5725.000	41.72	6.46	48.18	54.00	-5.82	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) -SDM		
Remark:			

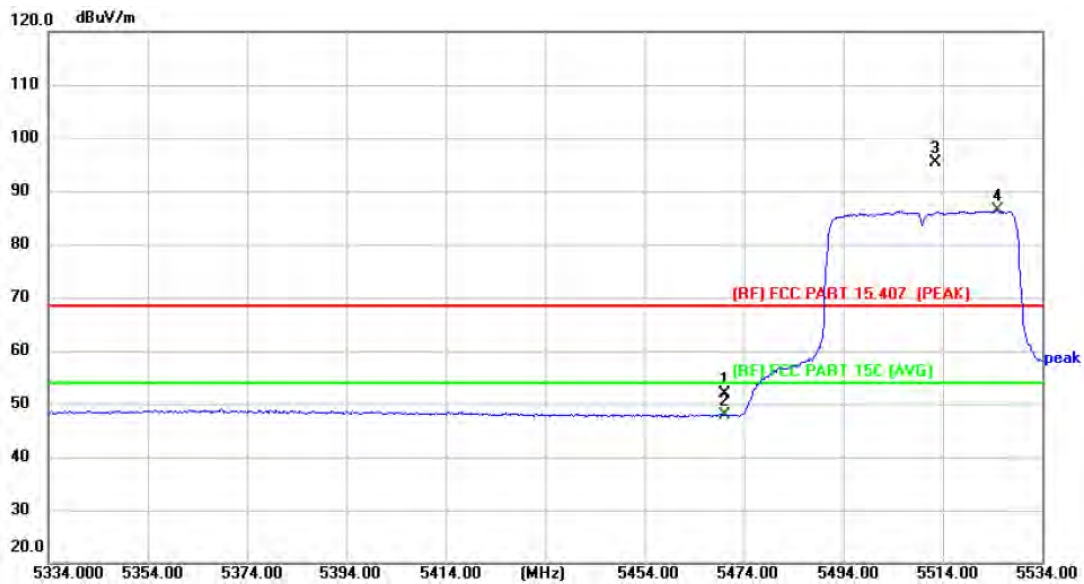


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	45.22	6.55	51.77	68.30	-16.53	peak
2	5470.000	41.40	6.55	47.95	54.00	-6.05	AVG
3 X	5512.400	88.84	6.62	95.46	Fundamental Frequency		peak
4 *	5525.000	79.81	6.59	86.40		AVG	

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) -SDM		
Remark:			

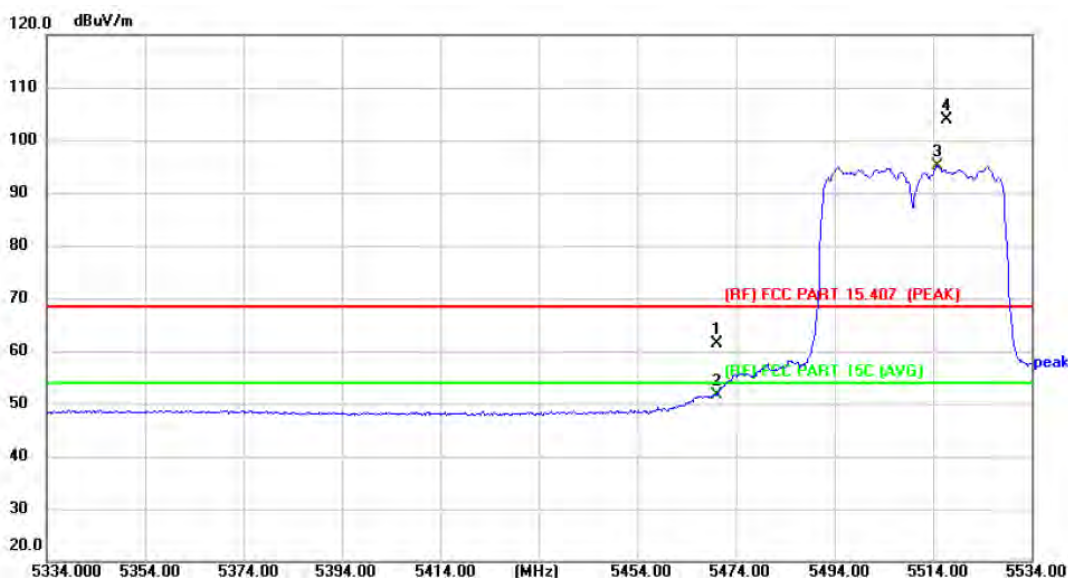


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	54.84	6.55	61.39	68.30	-6.91	peak
2	5470.000	45.18	6.55	51.73	54.00	-2.27	AVG
3 *	5515.000	88.61	6.60	95.21	Fundamental Frequency		AVG
4 X	5516.800	97.39	6.60	103.99			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C) -SDM		
Remark:			

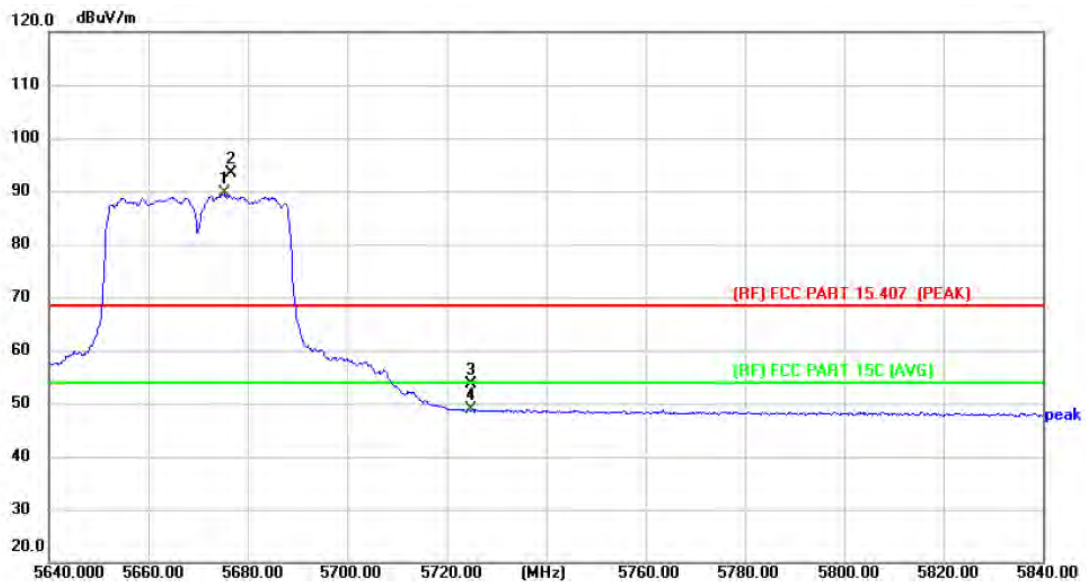


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5675.200	83.00	6.51	89.51	Fundamental Frequency		AVG
2 X	5676.600	86.79	6.51	93.30			peak
3	5725.000	47.17	6.46	53.63	68.30	-14.67	peak
4	5725.000	42.33	6.46	48.79	54.00	-5.21	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C) -SDM		
Remark:			

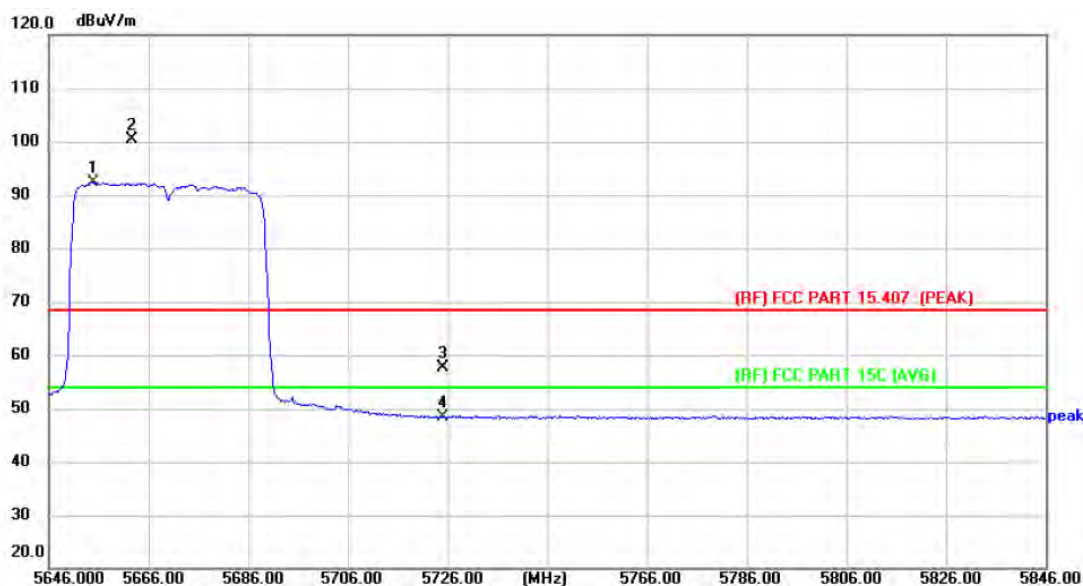


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5654.800	85.86	6.50	92.36	Fundamental Frequency		AVG
2 X	5662.600	93.98	6.50	100.48			peak
3	5725.000	51.21	6.46	57.67	68.30	-10.63	peak
4	5725.000	41.96	6.46	48.42	54.00	-5.58	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE40)) Mode 5510 MHz (U-NII-2C) -SDM		
Remark:			

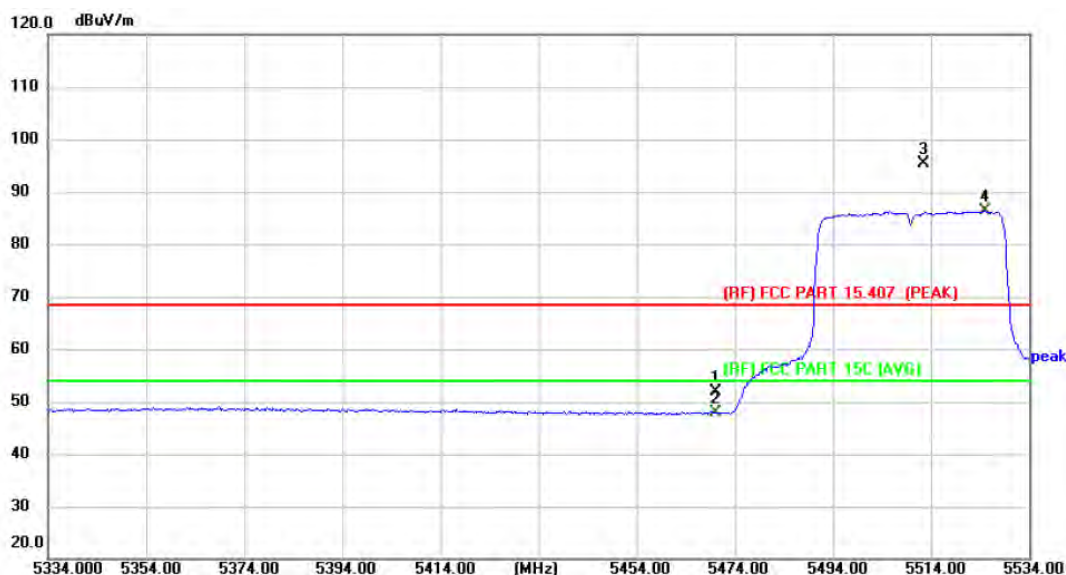


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	45.22	6.55	51.77	68.30	-16.53	peak
2	5470.000	41.40	6.55	47.95	54.00	-6.05	AVG
3 X	5512.400	88.84	6.62	95.46	Fundamental Frequency		peak
4 *	5525.000	79.81	6.59	86.40			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE40) Mode 5510 MHz (U-NII-2C) -SDM		
Remark:			

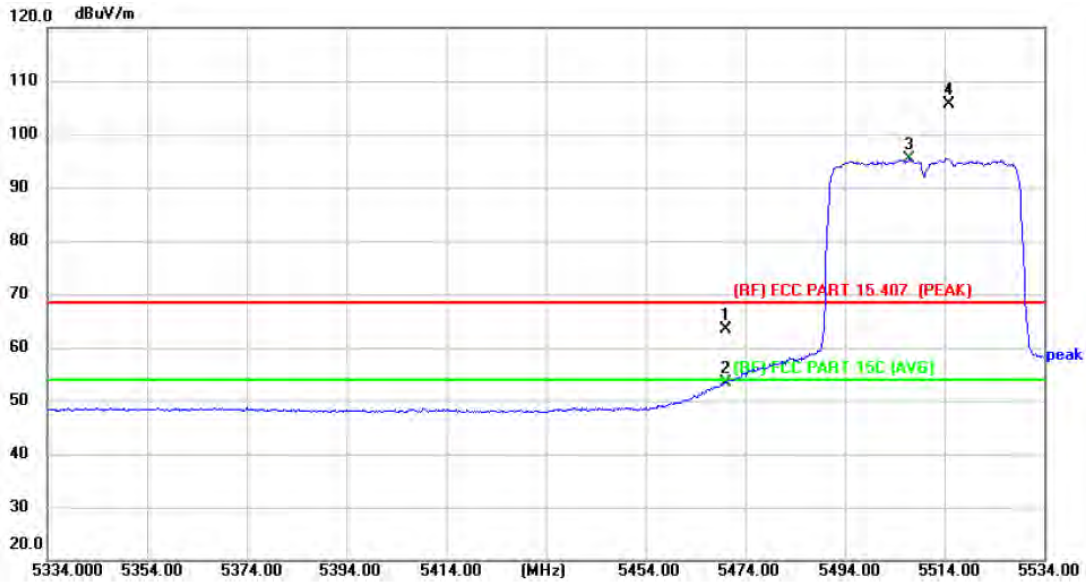


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	56.84	6.55	63.39	68.30	-4.91	peak
2	5470.000	46.85	6.55	53.40	54.00	-0.60	AVG
3 *	5507.000	88.82	6.62	95.44	Fundamental Frequency		AVG
4 X	5514.800	98.96	6.60	105.56			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE40) Mode 5670 MHz (U-NII-2C) -SDM		
Remark:			

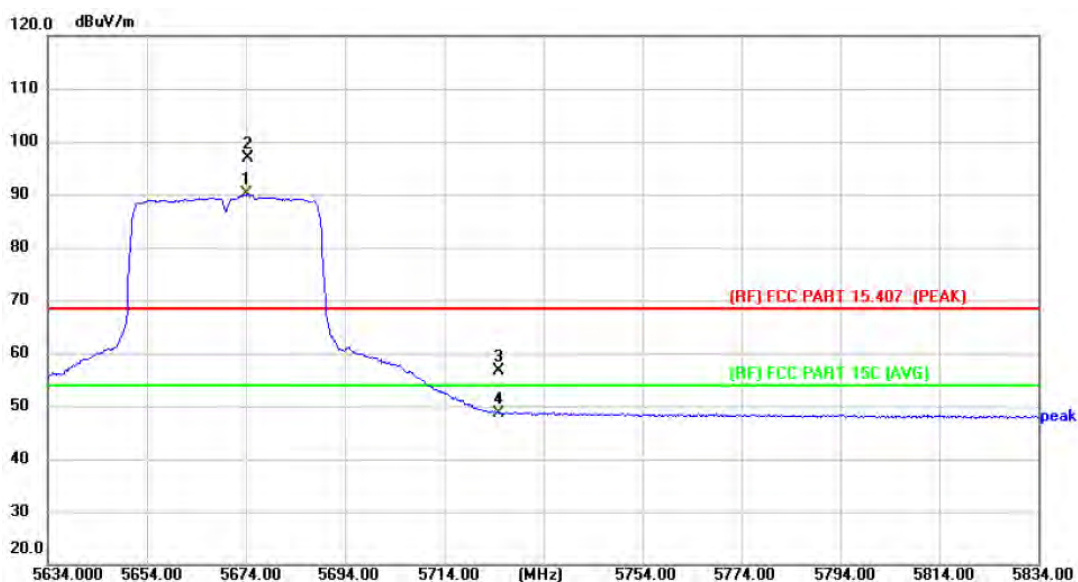


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5674.000	83.59	6.51	90.10	Fundamental Frequency		AVG
2 X	5674.400	90.32	6.51	96.83			peak
3	5725.000	50.22	6.46	56.68	68.30	-11.62	peak
4	5725.000	42.13	6.46	48.59	54.00	-5.41	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE40) Mode 5670 MHz (U-NII-2C) -SDM		
Remark:			

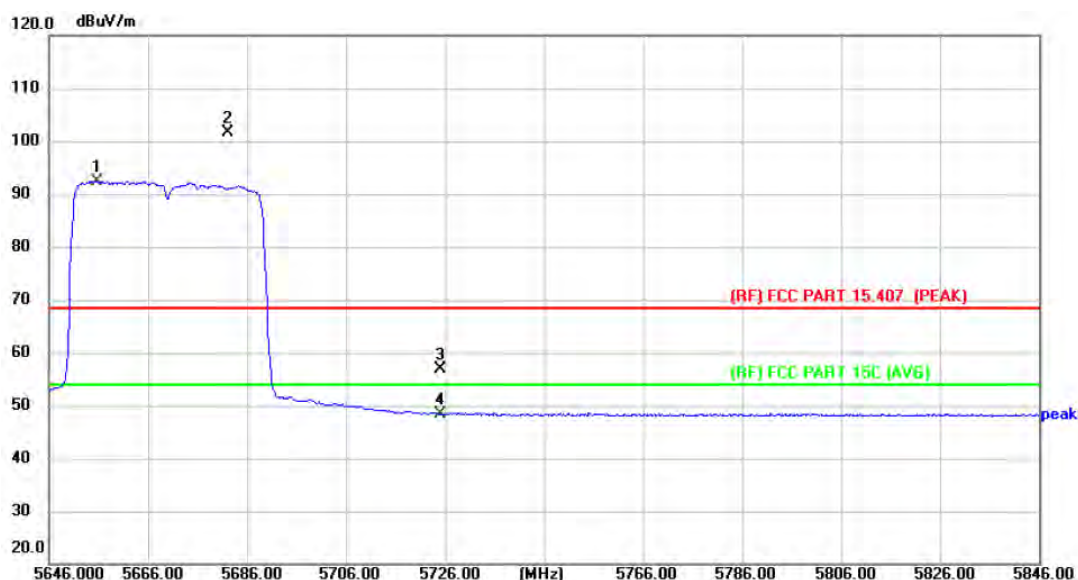


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5655.600	85.89	6.50	92.39	Fundamental Frequency		AVG
2 X	5682.200	95.04	6.51	101.55			peak
3	5725.000	50.38	6.46	56.84	68.30	-11.46	peak
4	5725.000	41.90	6.46	48.36	54.00	-5.64	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) -SDM		
Remark:			

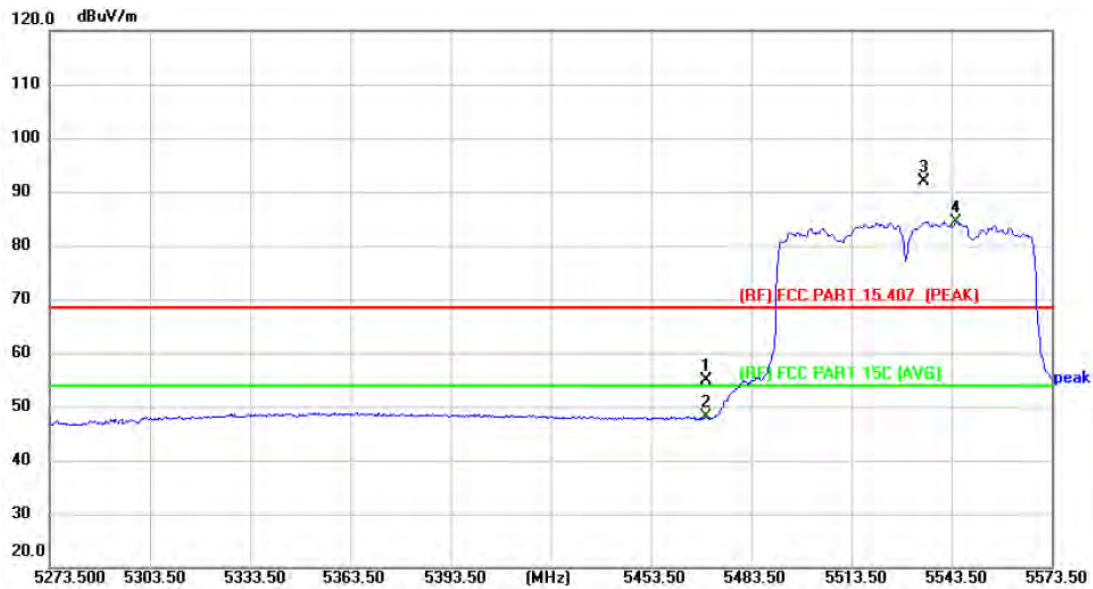


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	48.43	6.55	54.98	68.30	-13.32	peak
2	5470.000	41.48	6.55	48.03	54.00	-5.97	AVG
3 X	5535.400	85.31	6.58	91.89	Fundamental Frequency		peak
4 *	5545.000	77.82	6.56	84.38			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) -SDM		
Remark:			

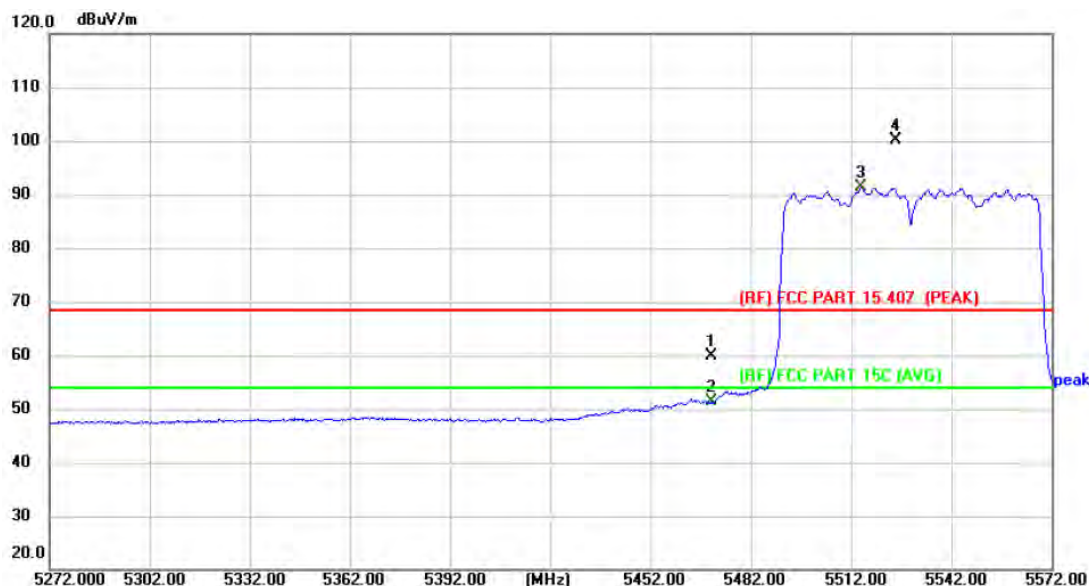


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	53.33	6.55	59.88	68.30	-8.42	peak
2	5470.000	44.82	6.55	51.37	54.00	-2.63	AVG
3 *	5515.000	84.68	6.60	91.28	Fundamental Frequency		AVG
4 X	5525.200	93.55	6.59	100.14			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C) -SDM		
Remark:			

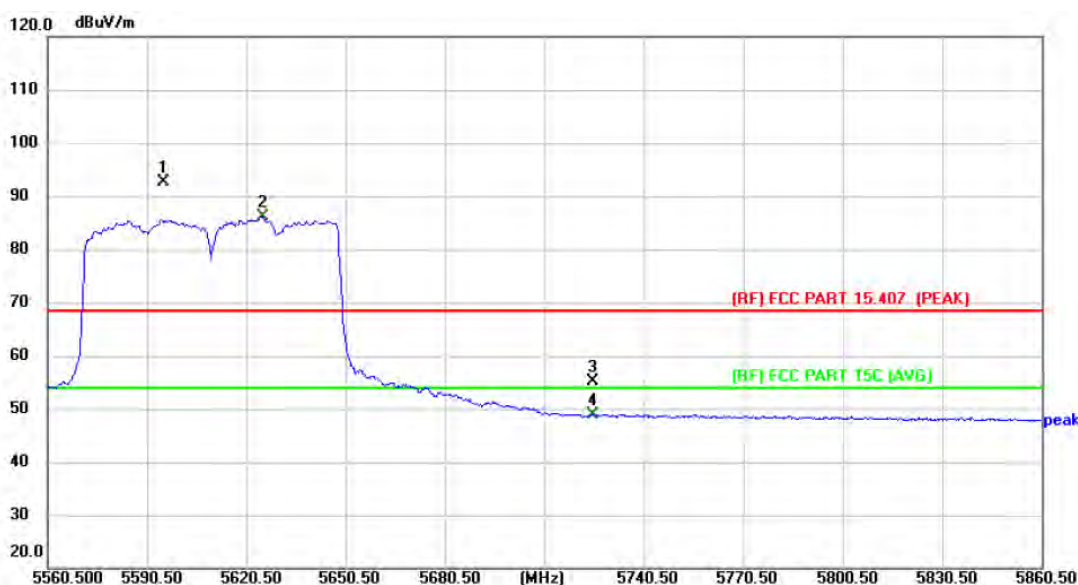


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5595.300	86.18	6.49	92.67	Fundamental Frequency		peak
2 *	5625.300	79.72	6.49	86.21			AVG
3	5725.000	48.77	6.46	55.23	68.30	-13.07	peak
4	5725.000	42.38	6.46	48.84	54.00	-5.16	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C) -SDM		
Remark:			

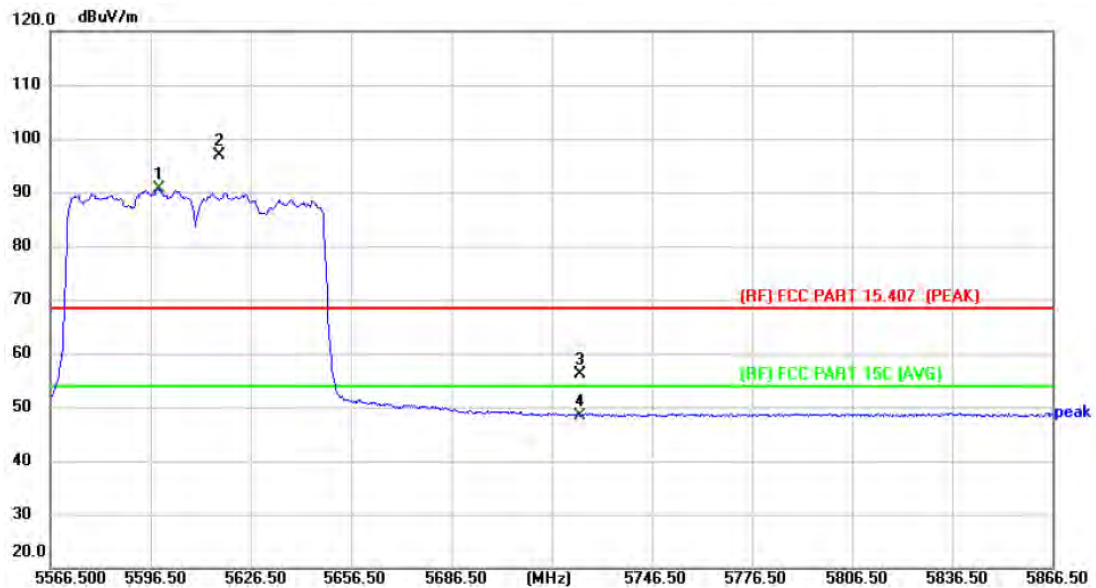


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5598.900	84.10	6.48	90.58	Fundamental Frequency		AVG
2 X	5617.200	90.44	6.48	96.92			peak
3	5725.000	49.64	6.46	56.10	68.30	-12.20	peak
4	5725.000	41.96	6.46	48.42	54.00	-5.58	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE80) Mode 5530 MHz (U-NII-2C) -SDM		
Remark:			

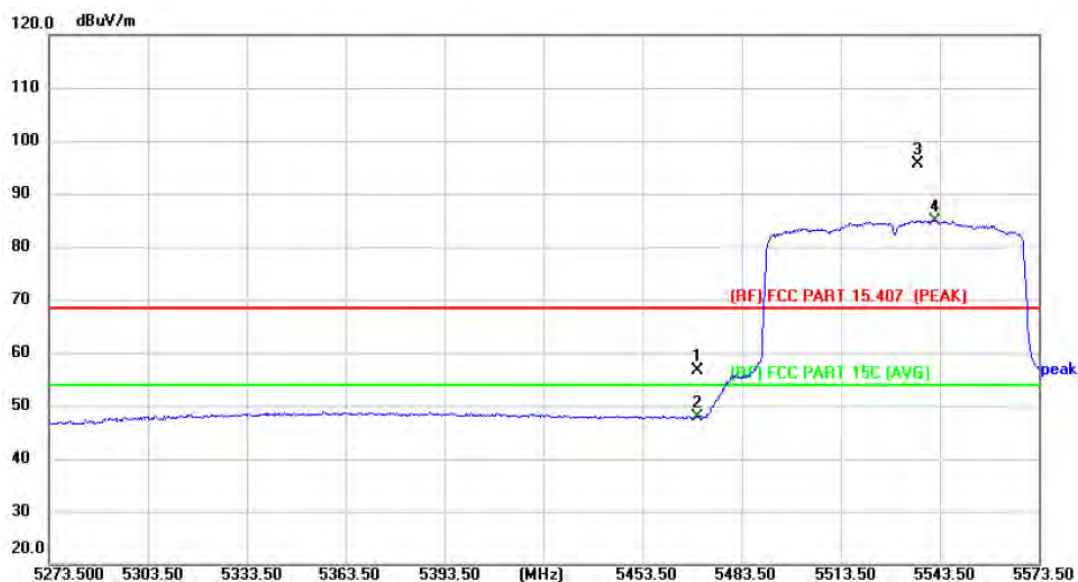


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	49.97	6.55	56.52	68.30	-11.78	peak
2	5470.000	41.36	6.55	47.91	54.00	-6.09	AVG
3 X	5536.900	88.98	6.58	95.56	Fundamental Frequency		peak
4 *	5542.000	78.40	6.56	84.96			AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE80) Mode 5530 MHz (U-NII-2C) -SDM		
Remark:			

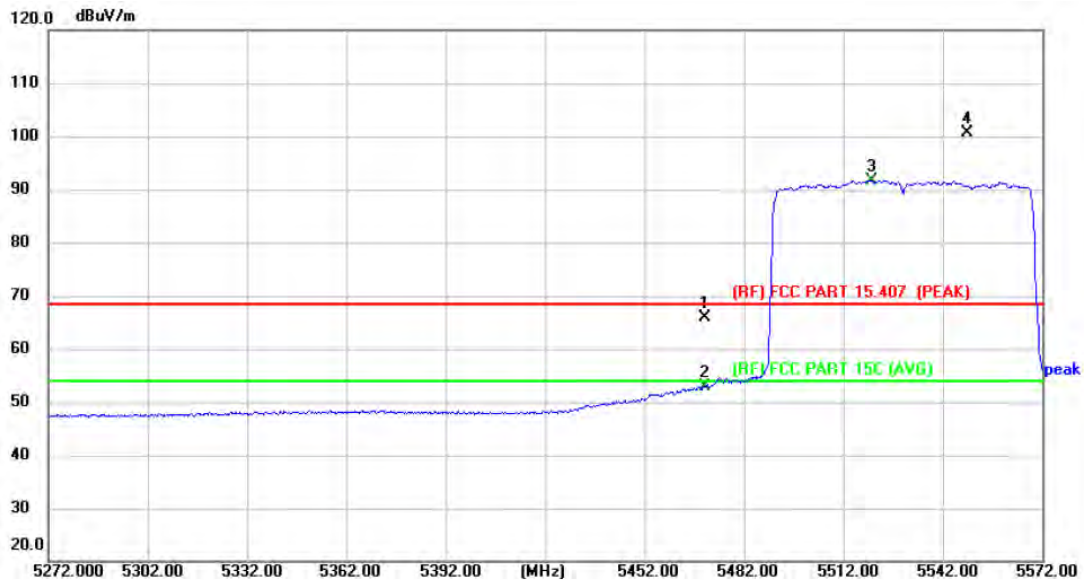


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	59.39	6.55	65.94	68.30	-2.36	peak
2	5470.000	46.23	6.55	52.78	54.00	-1.22	AVG
3 *	5520.700	85.13	6.60	91.73	Fundamental Frequency		AVG
4 X	5549.200	94.07	6.55	100.62			peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE80) Mode 5610 MHz (U-NII-2C) -SDM		
Remark:			

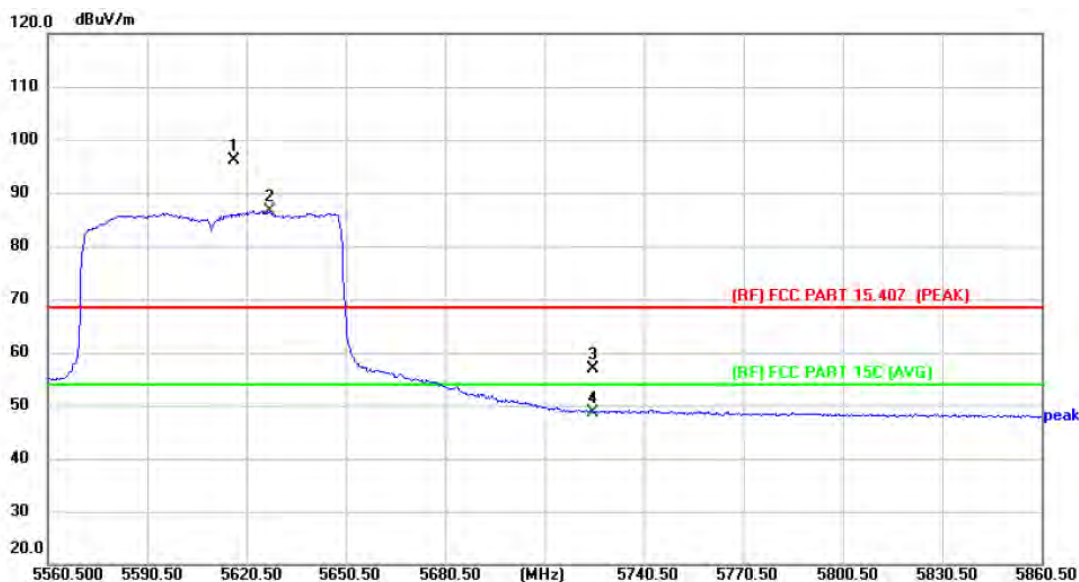


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5616.600	89.73	6.48	96.21	Fundamental Frequency		peak
2 *	5627.400	80.19	6.49	86.68			AVG
3	5725.000	50.31	6.46	56.77	68.30	-11.53	peak
4	5725.000	42.25	6.46	48.71	54.00	-5.29	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE80) Mode 5610 MHz (U-NII-2C) -SDM		
Remark:			

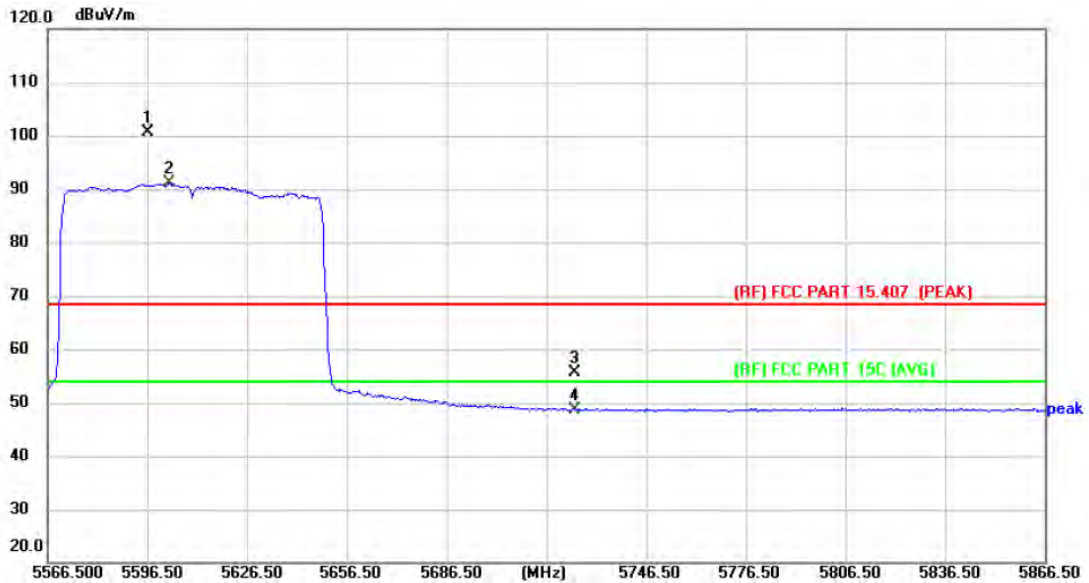


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5596.800	94.06	6.48	100.54	Fundamental Frequency		peak
2 *	5603.100	84.65	6.49	91.14		AVG	
3	5725.000	49.23	6.46	55.69	68.30	-12.61	peak
4	5725.000	42.20	6.46	48.66	54.00	-5.34	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT160) Mode 5570 MHz (U-NII-2C) -SDM		
Remark:			

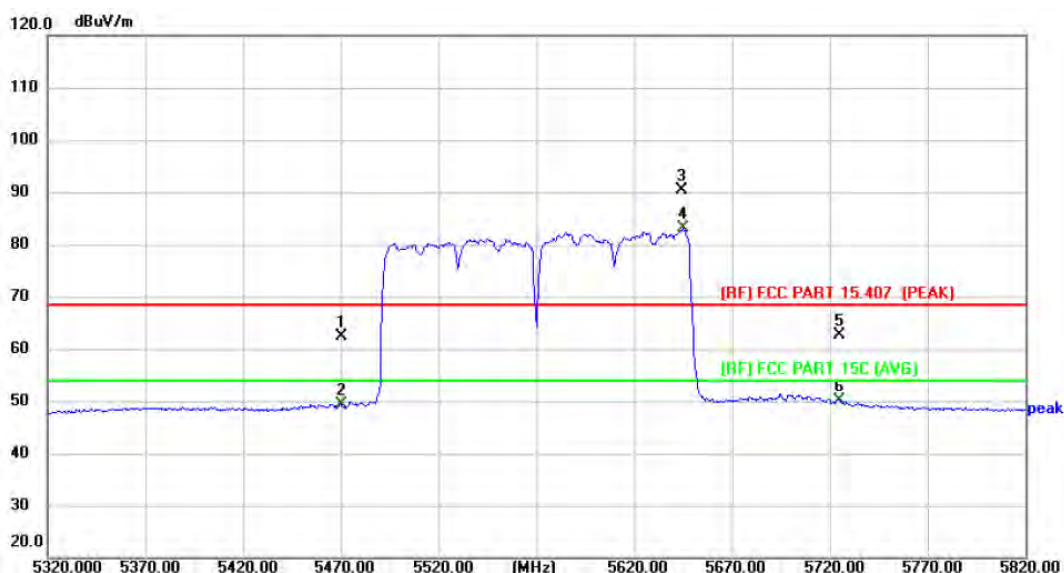


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	55.85	6.55	62.40	68.30	-5.90	peak
2	5470.000	42.85	6.55	49.40	54.00	-4.60	AVG
3 X	5644.500	83.79	6.50	90.29	Fundamental Frequency		peak
4 *	5645.000	76.57	6.50	83.07		AVG	
5	5725.000	56.13	6.46	62.59	68.30	-5.71	peak
6	5725.000	43.68	6.46	50.14	54.00	-3.86	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT160) Mode 5570 MHz (U-NII-2C) -SDM		
Remark:			

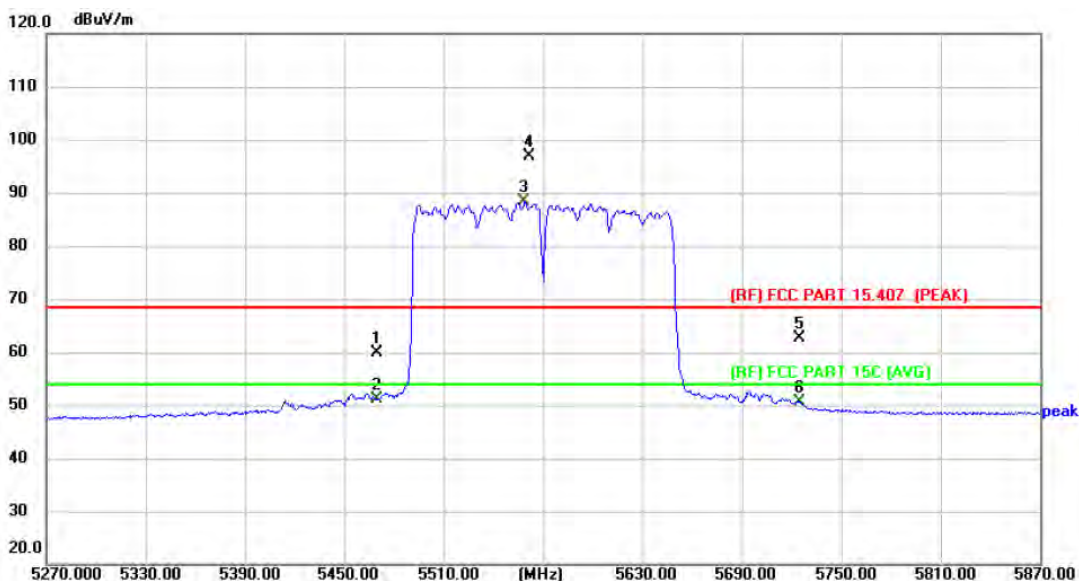


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	53.31	6.55	59.86	68.30	-8.44	peak
2	5470.000	44.51	6.55	51.06	54.00	-2.94	AVG
3 *	5558.600	81.86	6.55	88.41	Fundamental Frequency		AVG
4 X	5561.600	90.25	6.55	96.80			peak
5	5725.000	56.26	6.46	62.72	68.30	-5.58	peak
6	5725.000	44.05	6.46	50.51	54.00	-3.49	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE160) Mode 5570 MHz (U-NII-2C) -SDM		
Remark:			

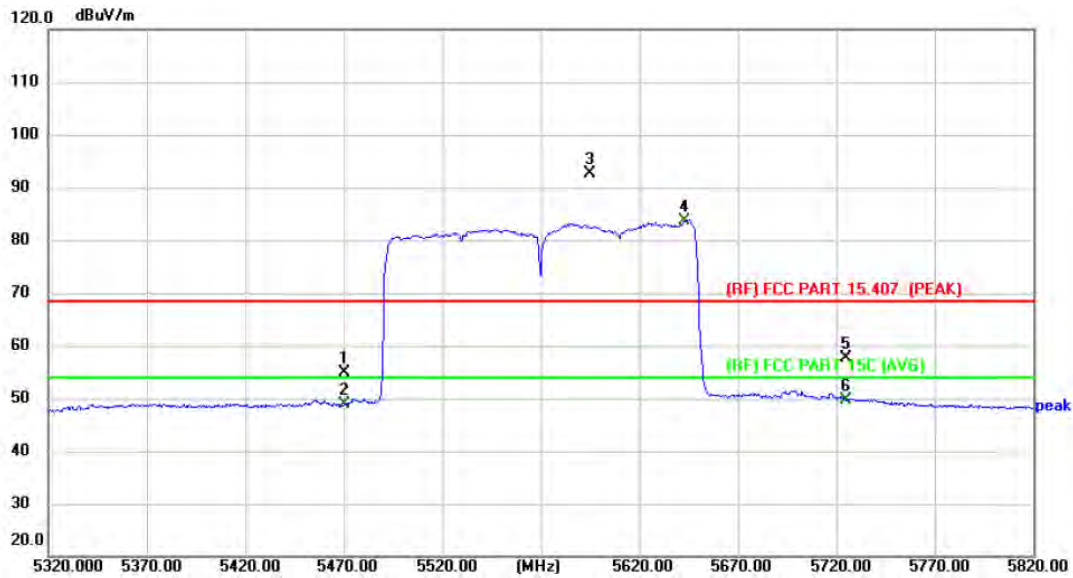


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	48.40	6.55	54.95	68.30	-13.35	peak
2	5470.000	42.21	6.55	48.76	54.00	-5.24	AVG
3 X	5595.000	86.12	6.49	92.61	Fundamental Frequency		peak
4 *	5643.000	77.12	6.50	83.62			AVG
5	5725.000	51.25	6.46	57.71	68.30	-10.59	peak
6	5725.000	43.07	6.46	49.53	54.00	-4.47	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE160) Mode 5570 MHz (U-NII-2C) -SDM		
Remark:			

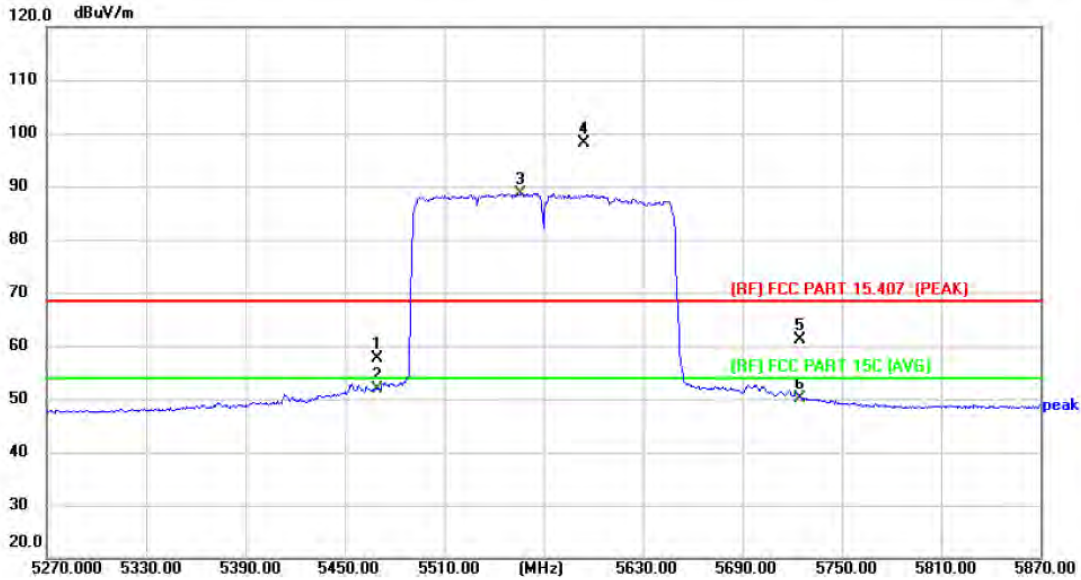


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	51.00	6.55	57.55	68.30	-10.75	peak
2	5470.000	45.41	6.55	51.96	54.00	-2.04	AVG
3 *	5556.200	82.06	6.55	88.61	Fundamental Frequency		AVG
4 X	5594.600	91.71	6.49	98.20		peak	
5	5725.000	54.78	6.46	61.24	68.30	-7.06	peak
6	5725.000	43.63	6.46	50.09	54.00	-3.91	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3) -SISO		
Remark:			

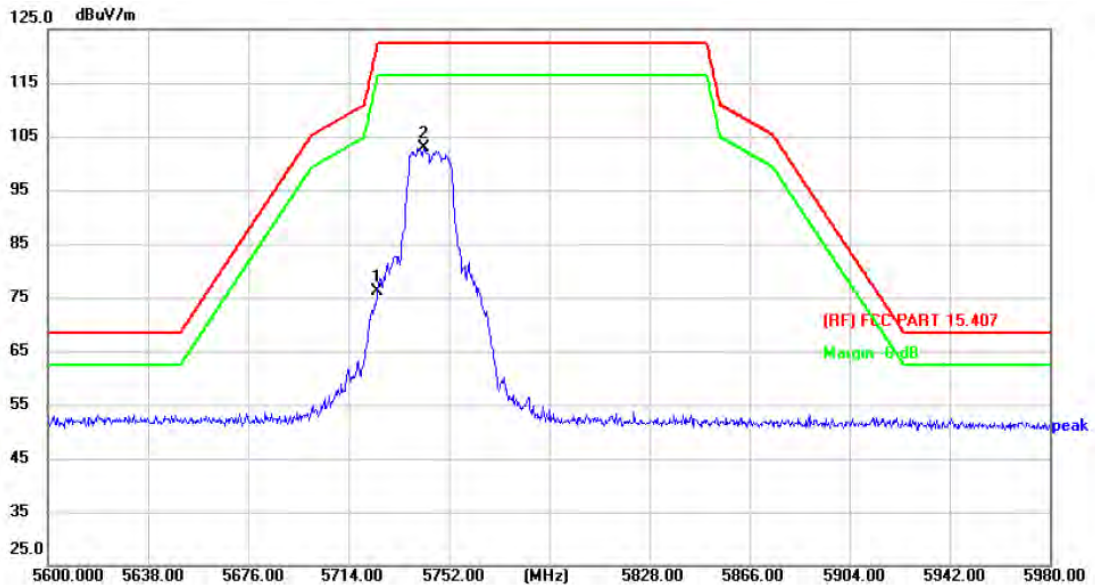


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	74.64	1.46	76.10	122.30	-46.20	peak
2 *	5742.500	101.55	1.42	102.97	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	22.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3) -SISO		
Remark:			

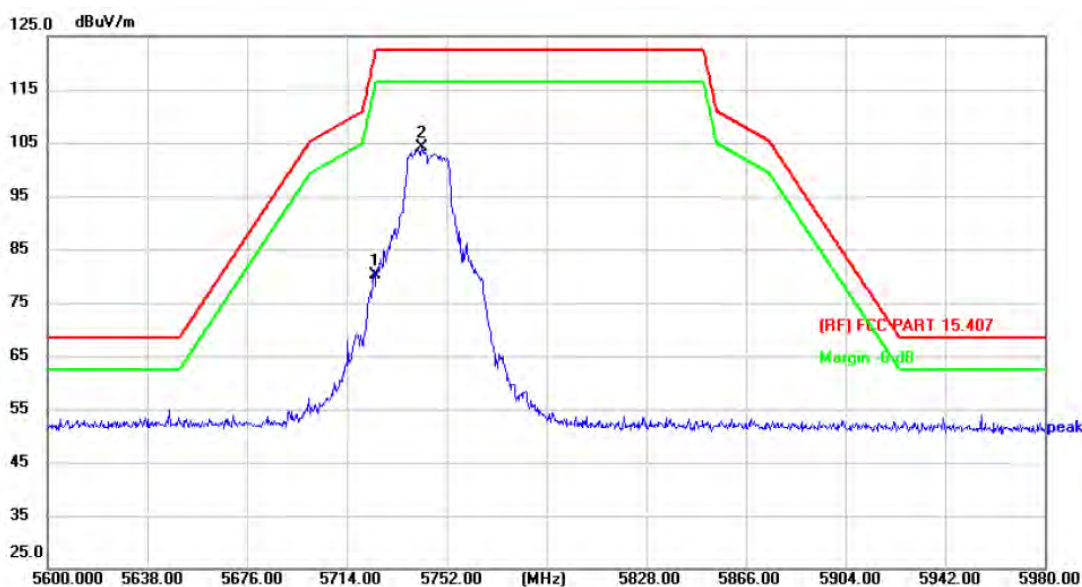

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	78.70	1.46	80.16	122.30	-42.14	peak
2 *	5742.500	102.72	1.42	104.14	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

