


<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11a Mode 5825 MHz (U-NII-3) -SISO		
<b>Remark:</b>			

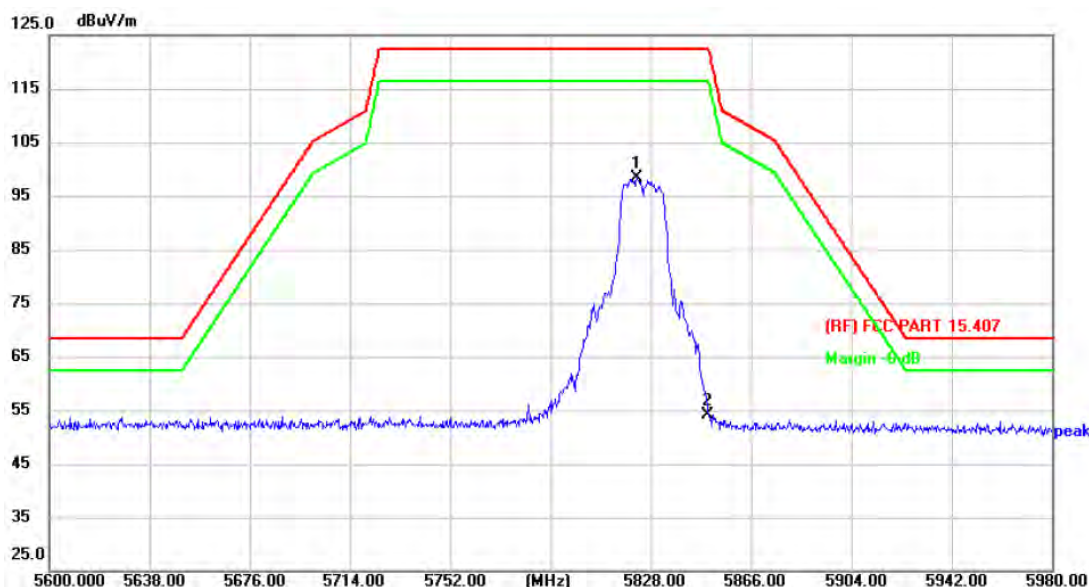


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5822.680	97.15	1.26	98.41	Fundamental Frequency		peak
2	5850.000	52.92	1.25	54.17	122.30	-68.13	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11a Mode 5825 MHz (U-NII-3) -SISO		
<b>Remark:</b>			

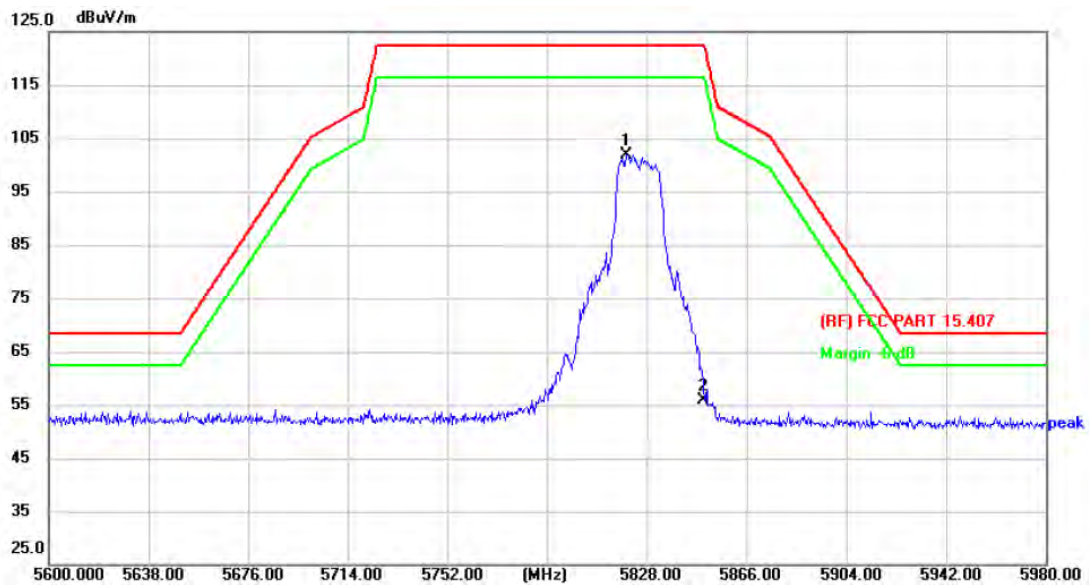

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5820.020	100.70	1.27	101.97	Fundamental Frequency		peak
2	5850.000	54.68	1.25	55.93			122.30


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

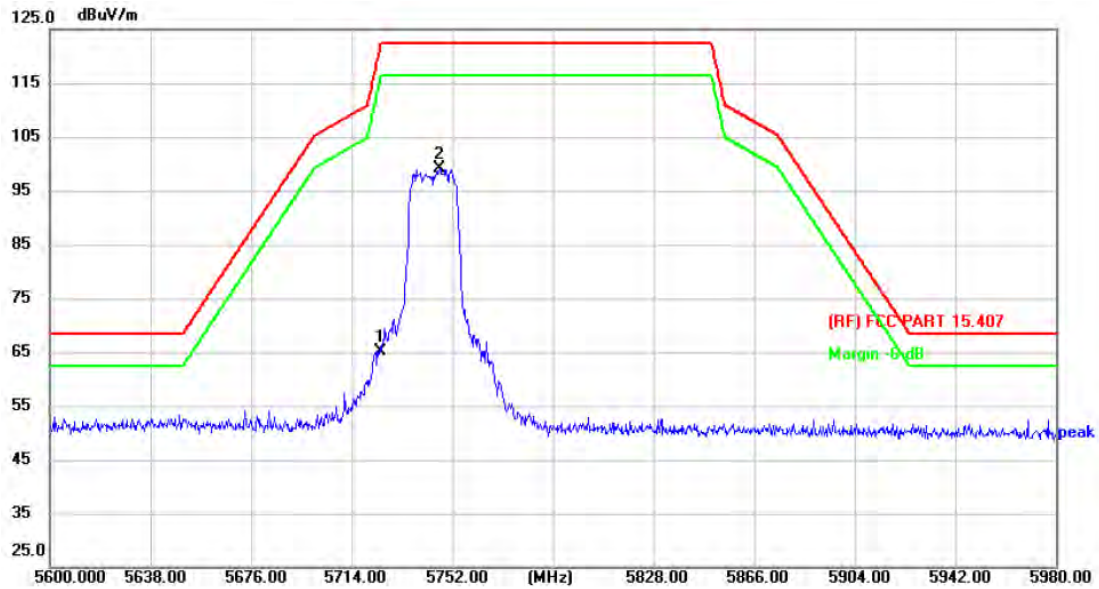


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	63.73	1.46	65.19	122.30	-57.11	peak
2 *	5747.060	97.79	1.40	99.19	Fundamental Frequency		peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

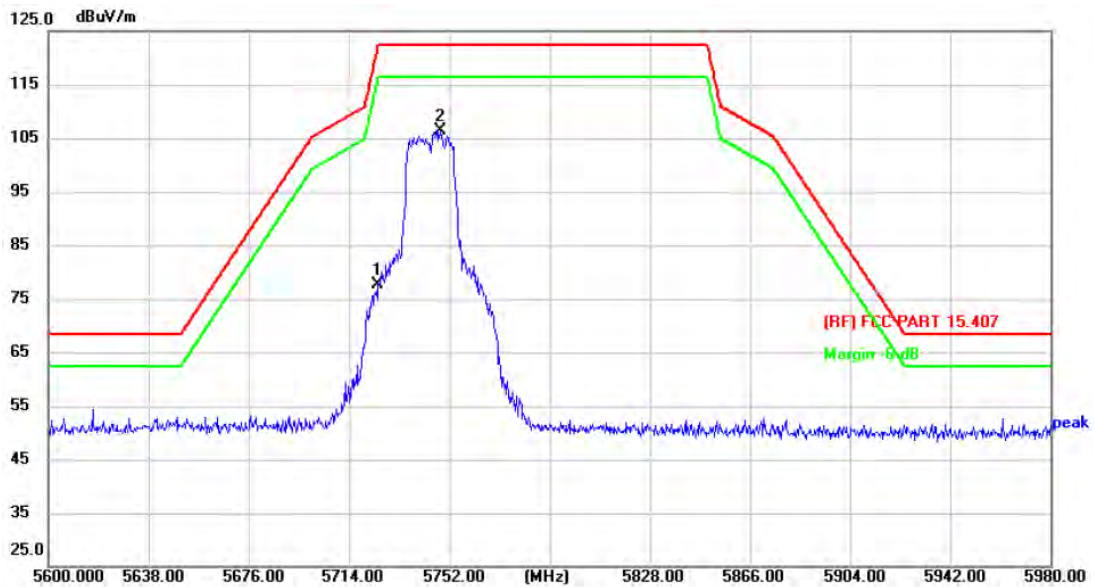

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	76.07	1.46	77.53	122.30	-44.77	peak
2 *	5748.580	104.91	1.40	106.31	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

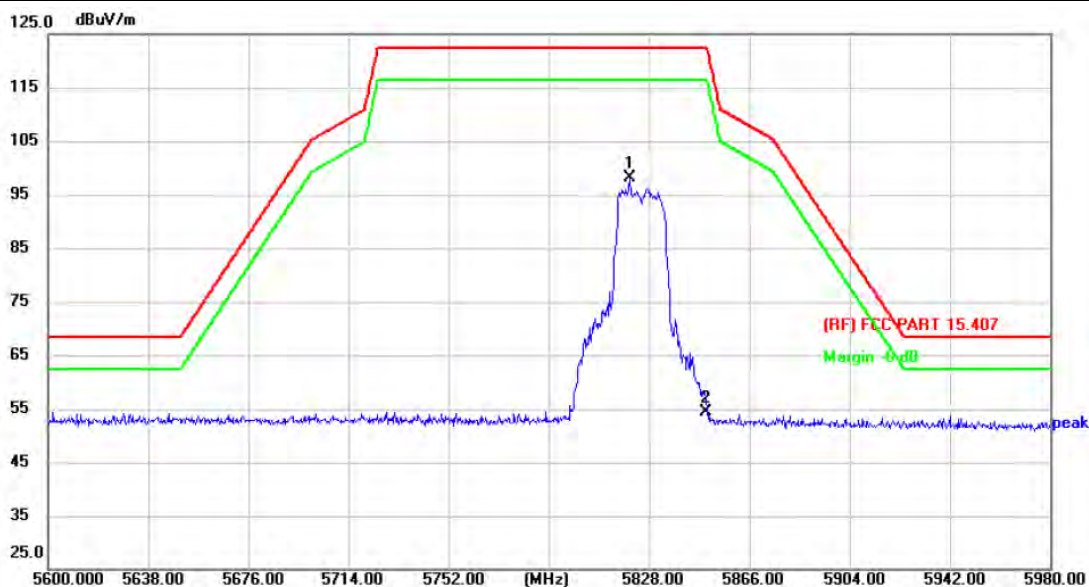


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5820.400	96.75	1.27	98.02	Fundamental Frequency		peak
2	5850.000	53.22	1.25	54.47	122.30	-67.83	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

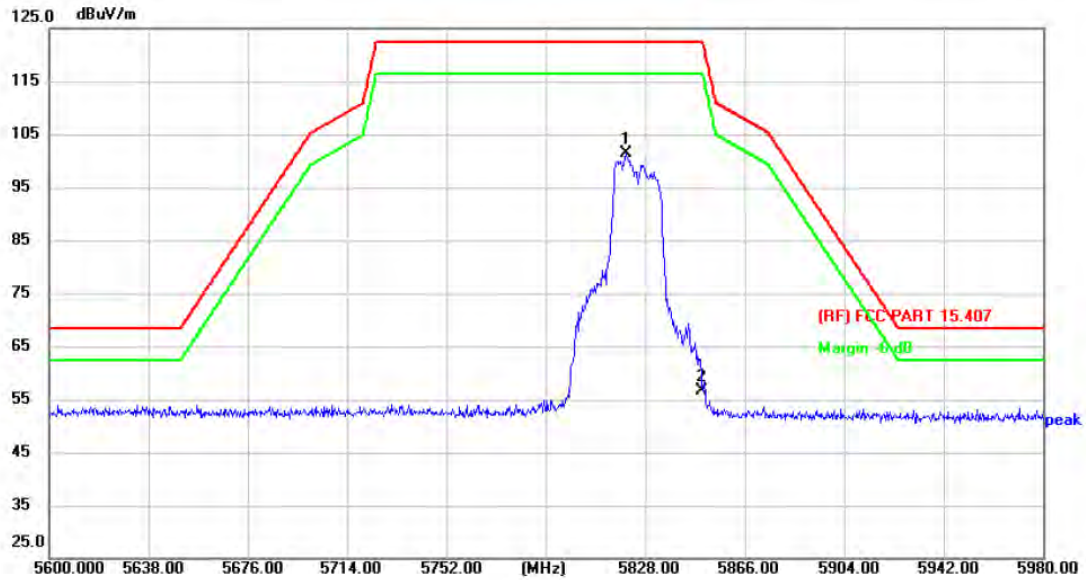

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5820.400	100.04	1.27	101.31	Fundamental Frequency		peak
2	5850.000	55.38	1.25	56.63	122.30	-65.67	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

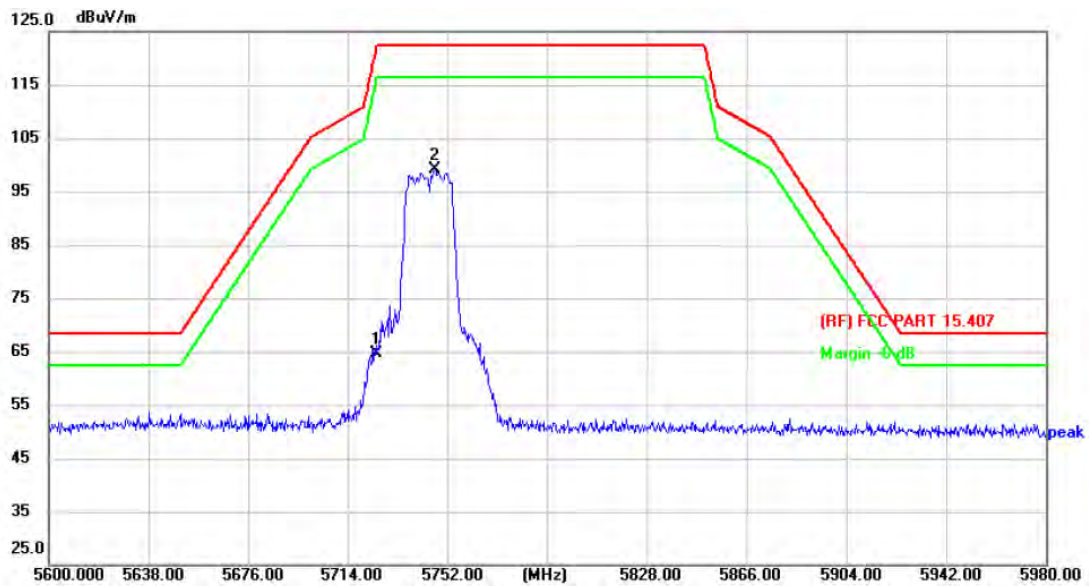


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	63.18	1.46	64.64	122.30	-57.66	peak
2 *	5747.060	97.75	1.40	99.15	Fundamental Frequency		peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

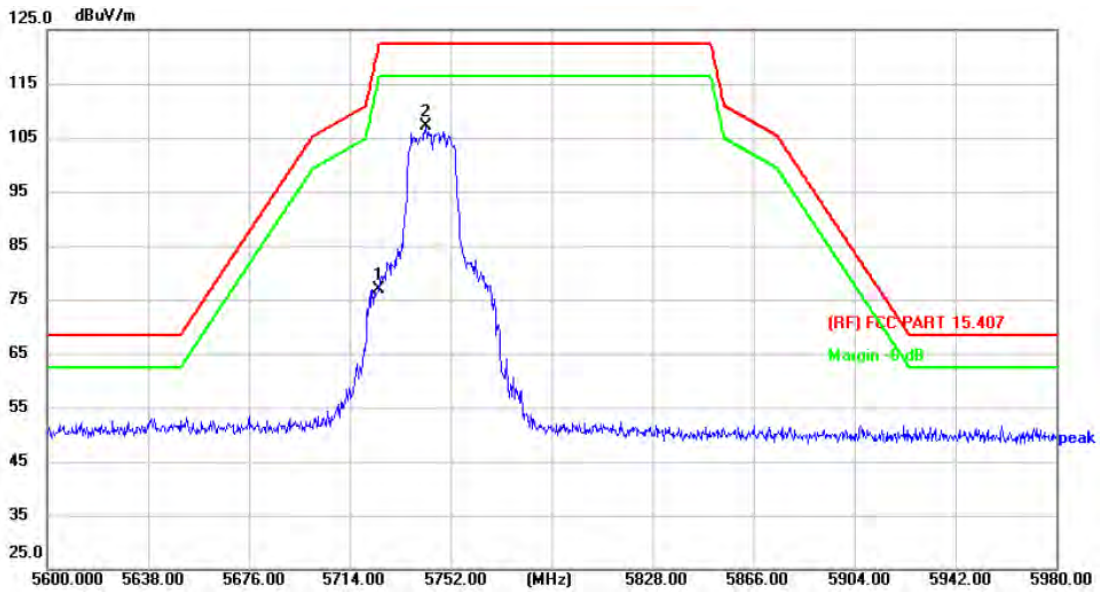

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	75.53	1.46	76.99	122.30	-45.31	peak
2 *	5742.500	105.62	1.42	107.04	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

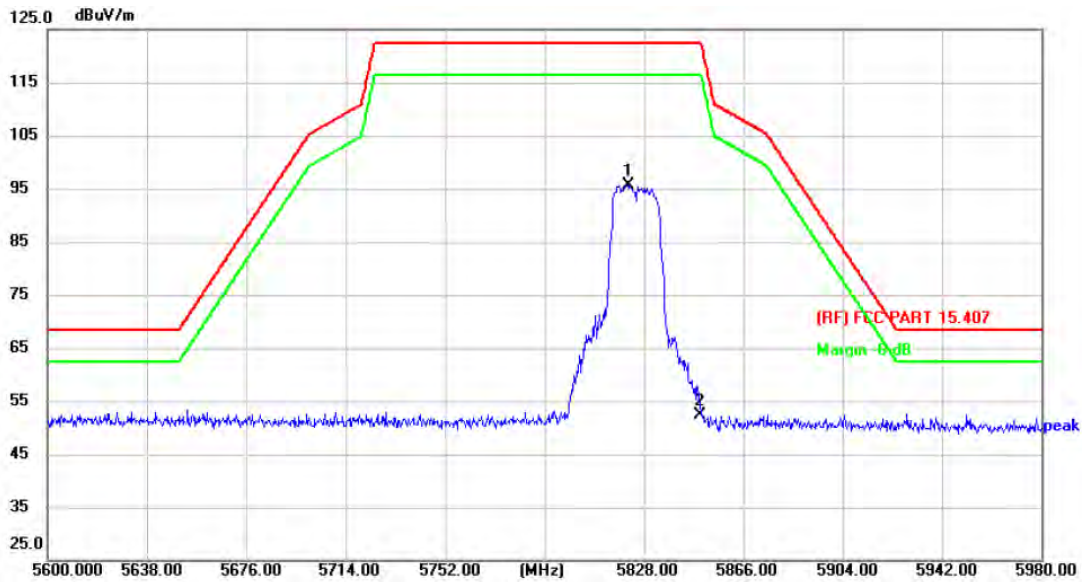


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5821.920	94.42	1.26	95.68	Fundamental Frequency		peak
2	5850.000	51.11	1.25	52.36			122.30

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

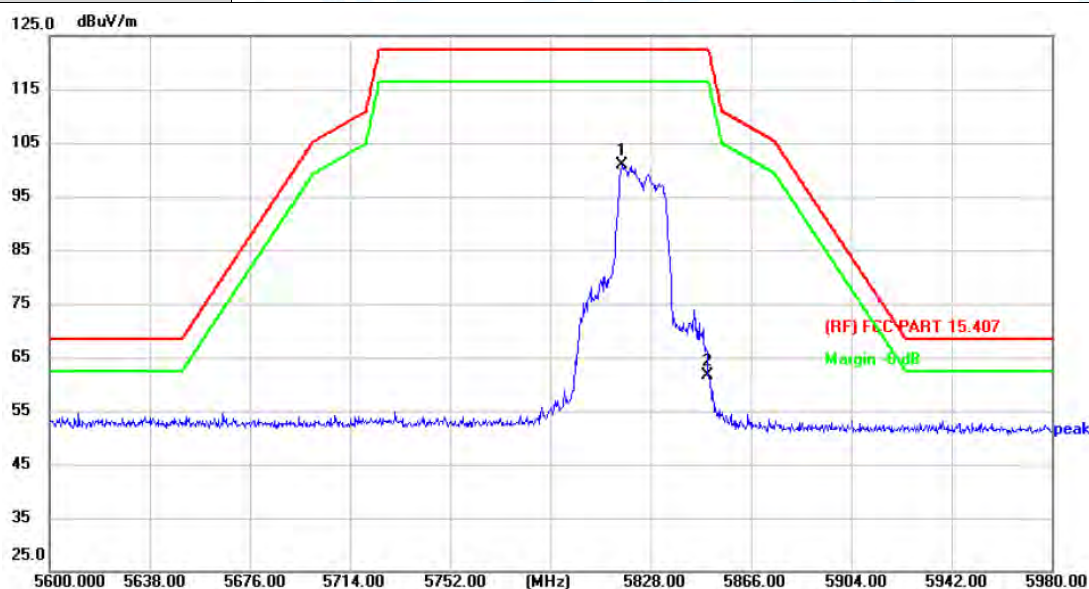

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5816.980	99.52	1.27	100.79	Fundamental Frequency		peak
2	5850.000	60.44	1.25	61.69			122.30


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5745 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

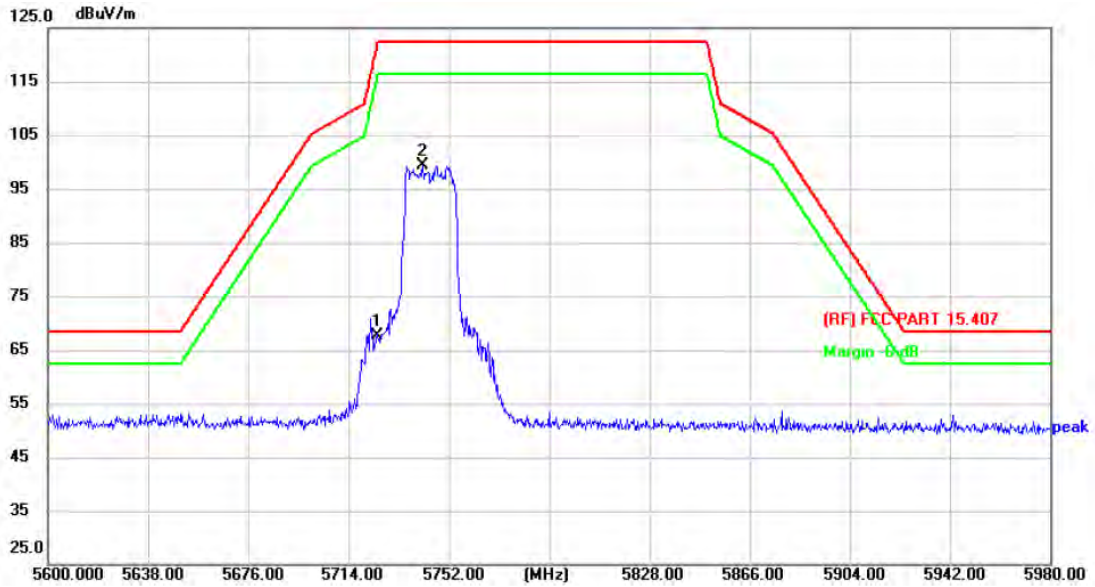


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	66.24	1.46	67.70	122.30	-54.60	peak
2 *	5742.120	97.86	1.42	99.28	Fundamental Frequency		peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5745 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

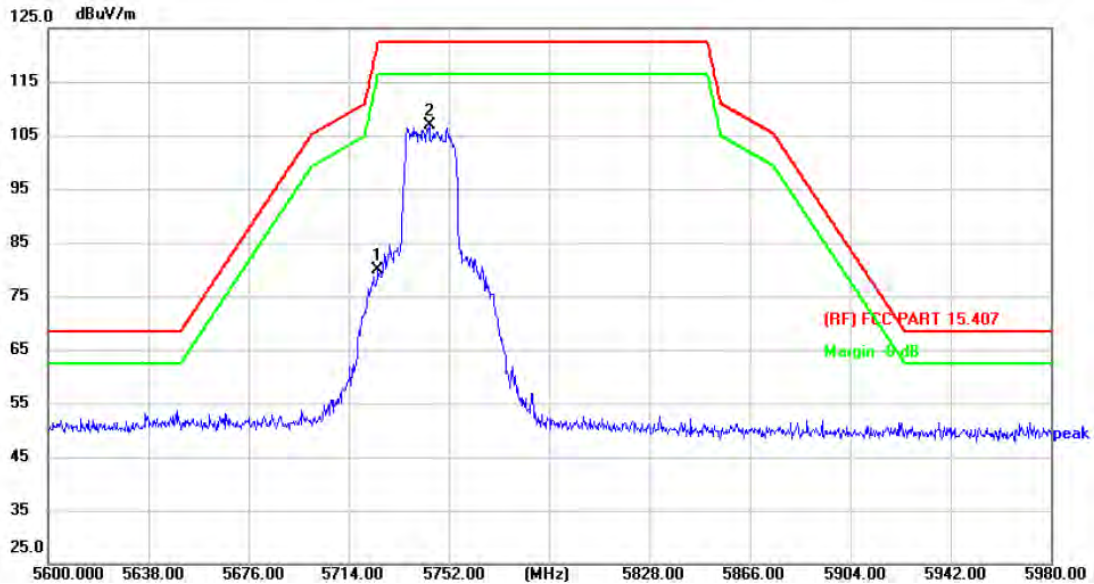

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	78.52	1.46	79.98	Fundamental Frequency		peak
2 *	5744.400	105.54	1.41	106.95			122.30


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5825 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

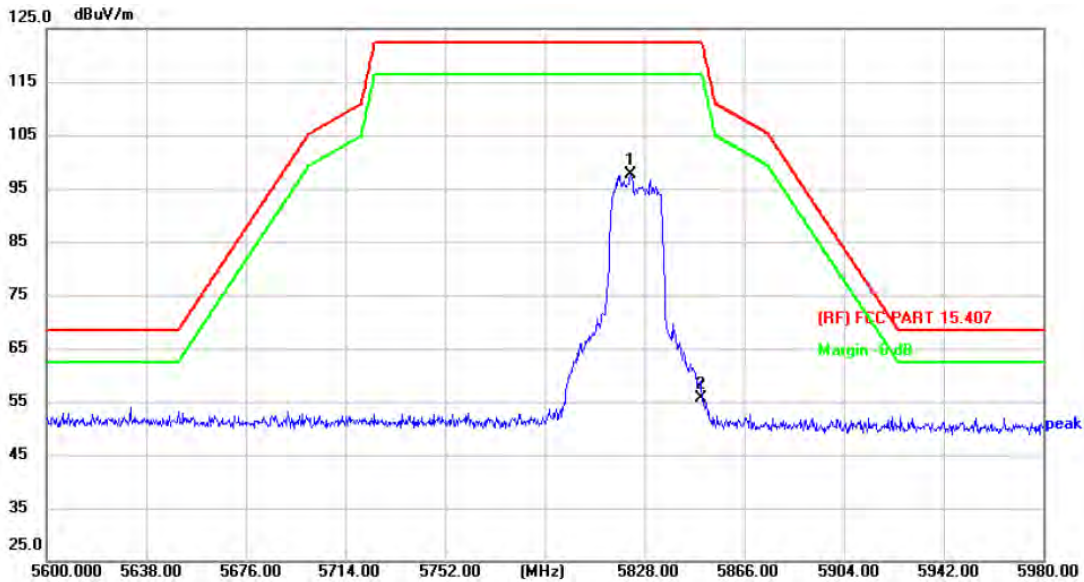


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5822.680	96.27	1.26	97.53	Fundamental Frequency		peak
2	5850.000	54.30	1.25	55.55			122.30

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5825 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

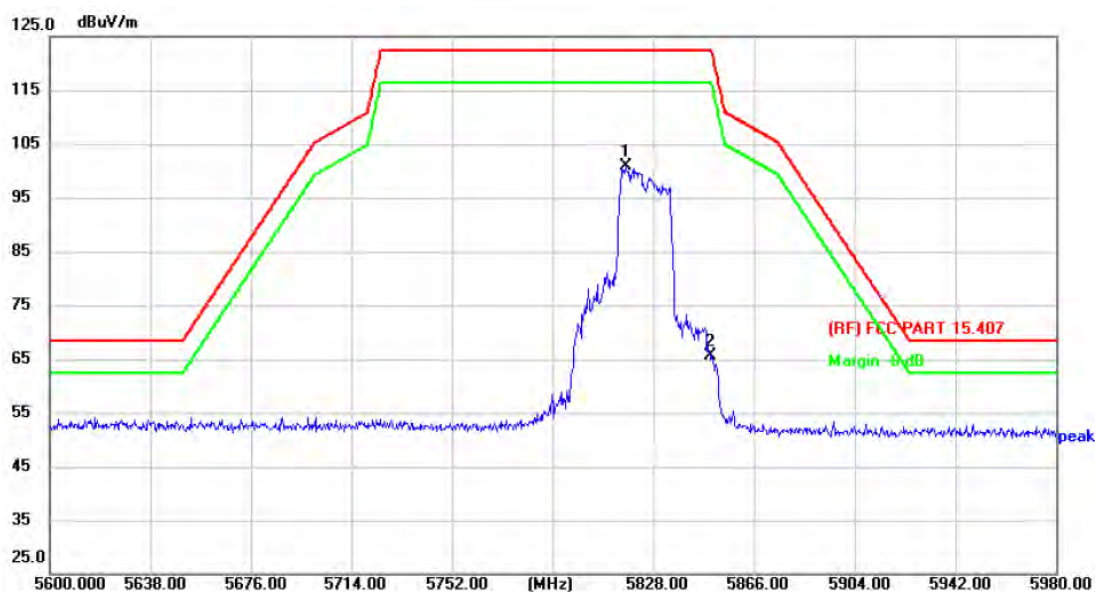

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5817.360	99.60	1.27	100.87	Fundamental Frequency		peak
2	5850.000	64.40	1.25	65.65			122.30


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

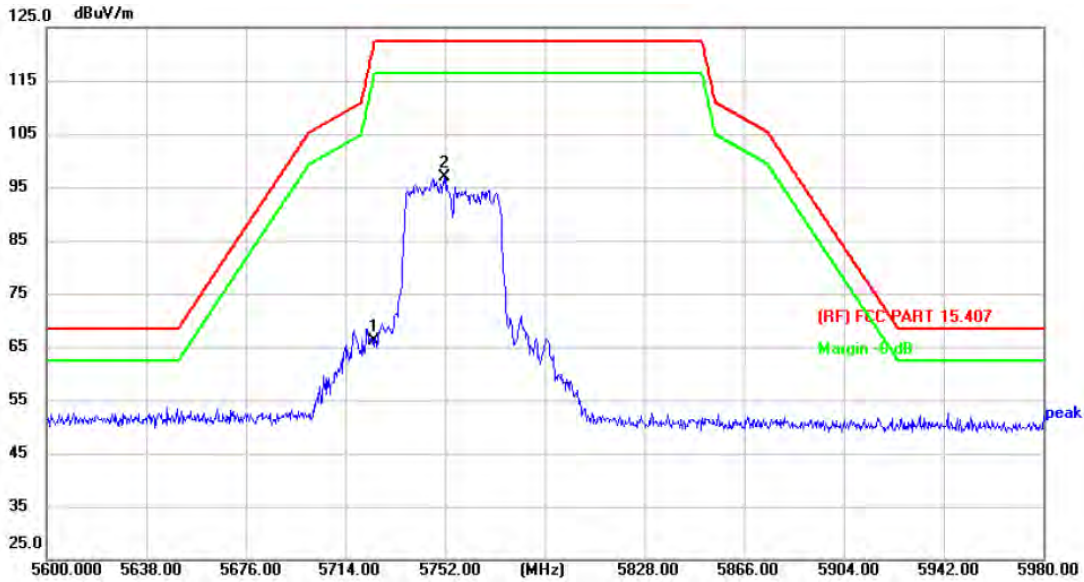


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	64.79	1.46	66.25	122.30	-56.05	peak
2 *	5751.620	95.37	1.40	96.77	Fundamental Frequency		peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

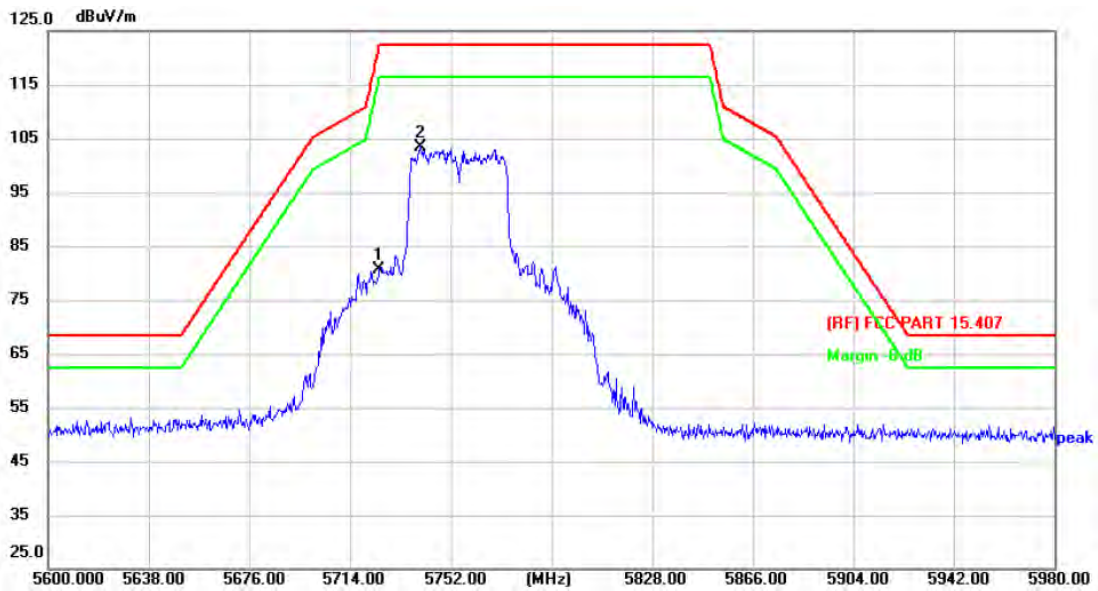

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	79.12	1.46	80.58	122.30	-41.72	peak
2 *	5740.600	102.08	1.42	103.50	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

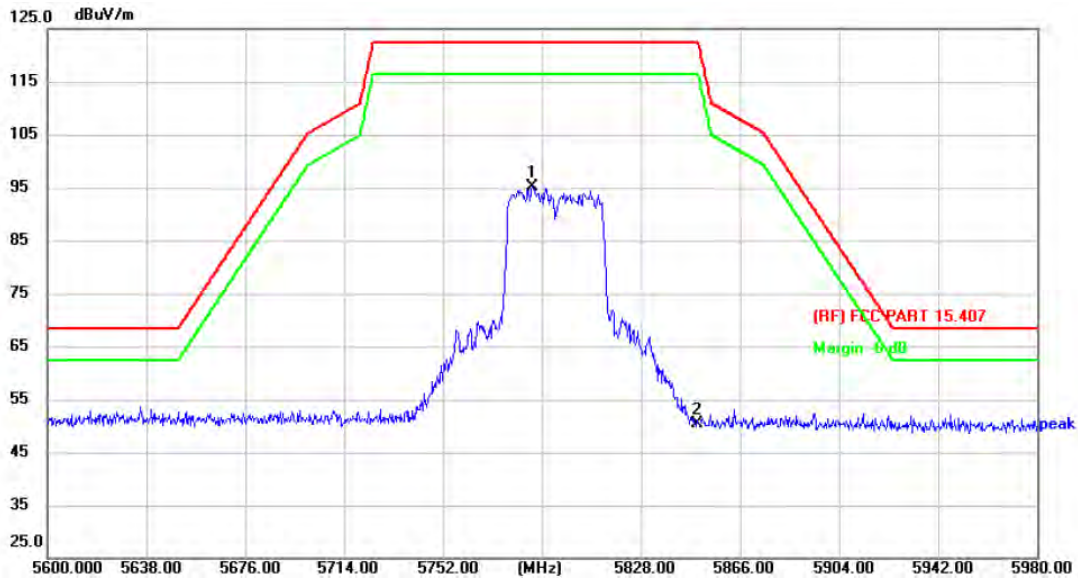


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5786.200	93.76	1.32	95.08	Fundamental Frequency	-71.98	peak
2	5850.000	49.07	1.25	50.32			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

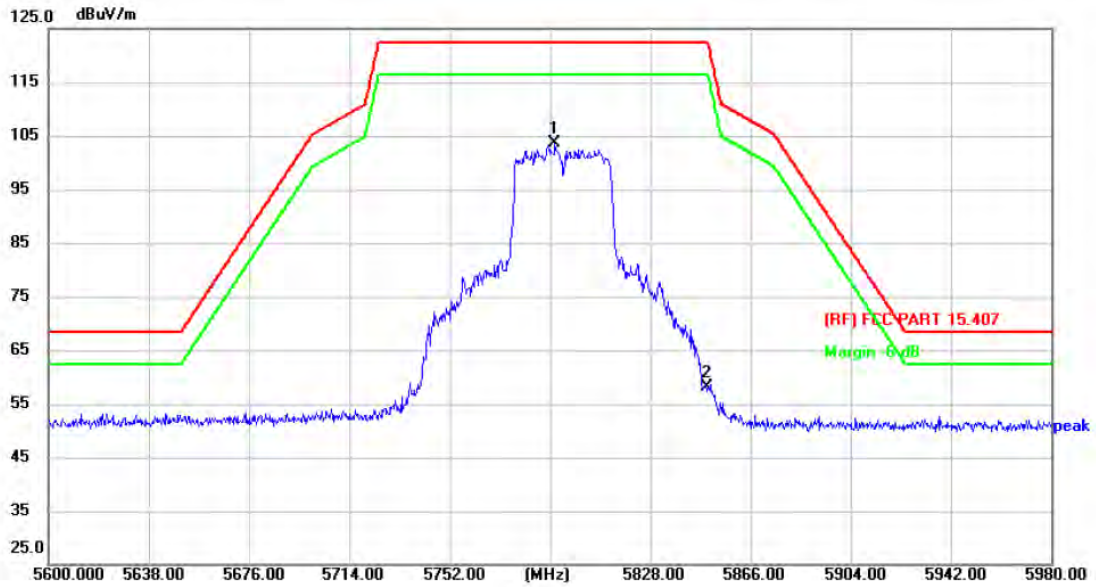

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5791.900	102.28	1.30	103.58	Fundamental Frequency	-64.19	peak
2	5850.000	56.86	1.25	58.11			peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

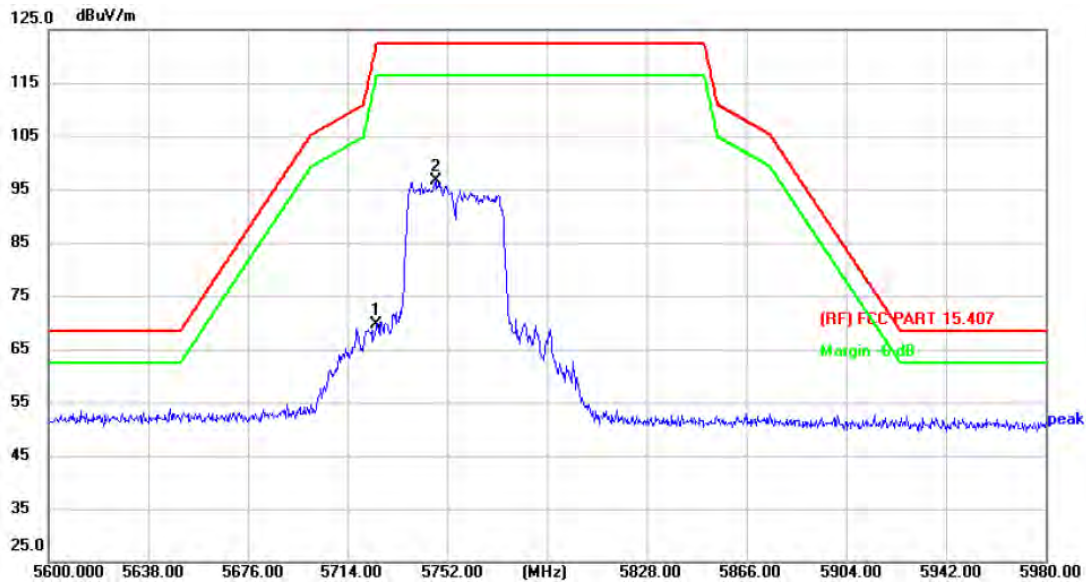


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	68.14	1.46	69.60	122.30	-52.70	peak
2 *	5747.440	95.19	1.40	96.59	Fundamental Frequency		peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

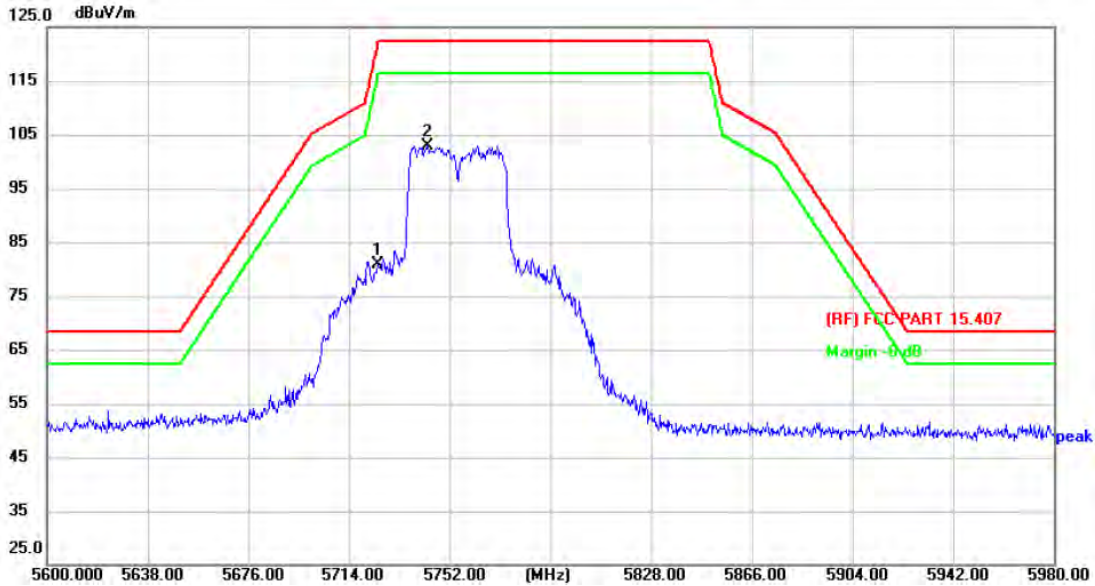

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	79.32	1.46	80.78	122.30	-41.52	peak
2 *	5743.640	101.54	1.42	102.96	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

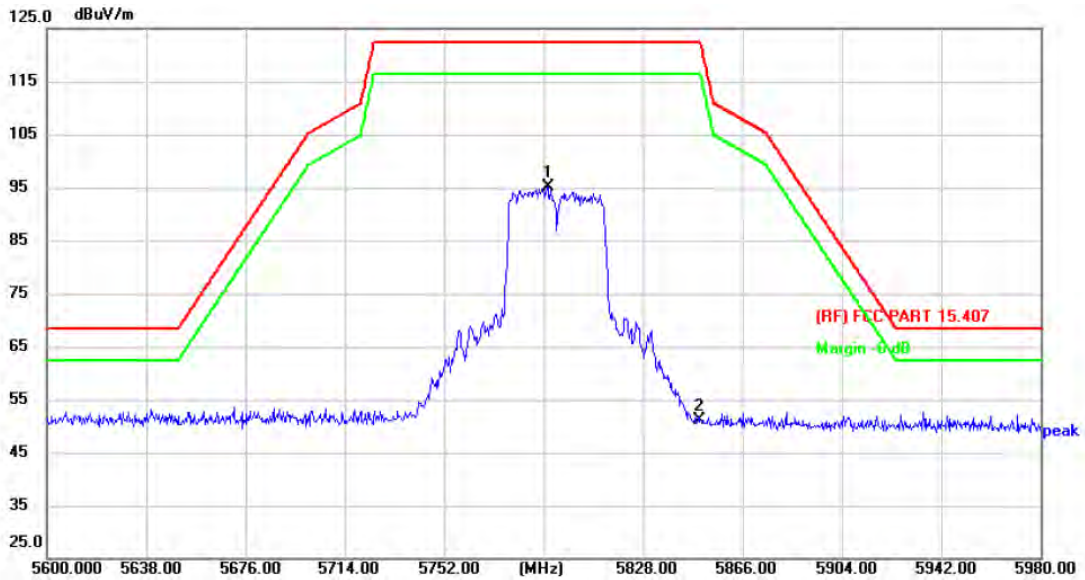


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5791.520	93.76	1.30	95.06	Fundamental Frequency		peak
2	5850.000	49.94	1.25	51.19	122.30	-71.11	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

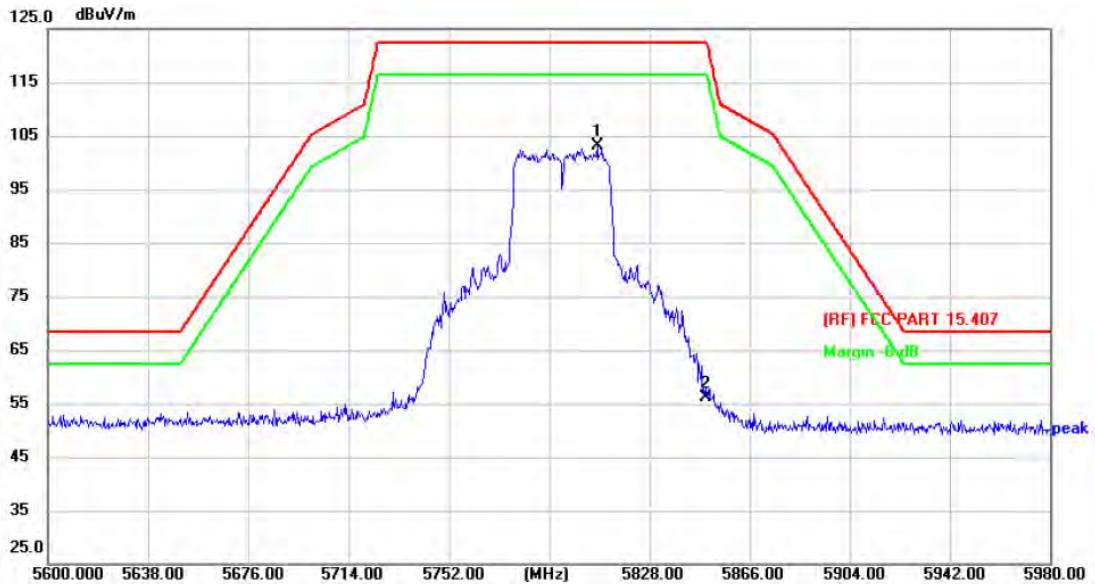

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5808.240	101.80	1.28	103.08	Fundamental Frequency		peak
2	5850.000	54.89	1.25	56.14	122.30	-66.16	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5755 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

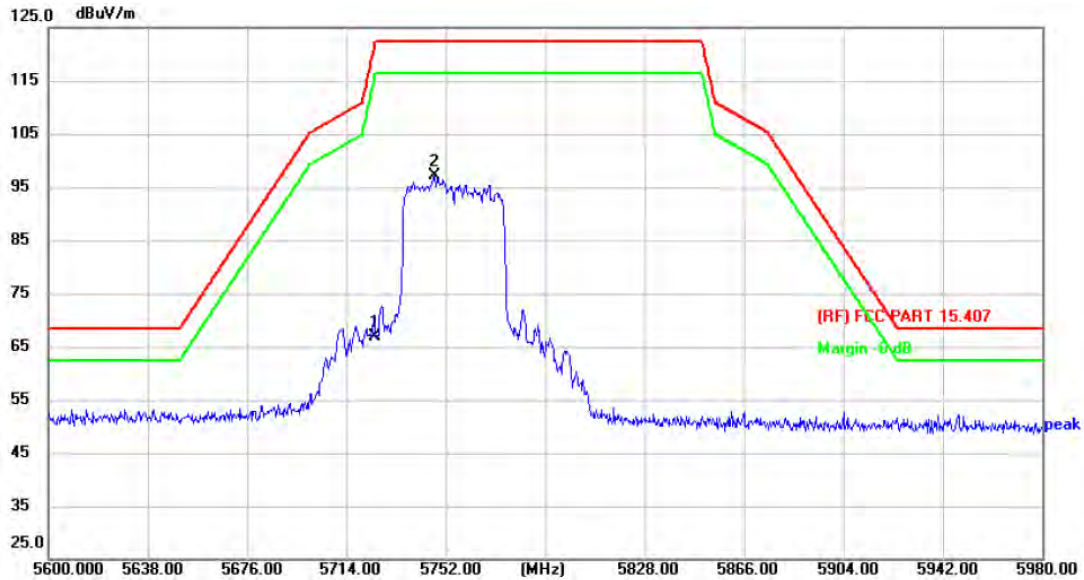


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	65.45	1.46	66.91	122.30	-55.39	peak
2 *	5747.820	95.62	1.40	97.02	Fundamental Frequency		peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5755 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

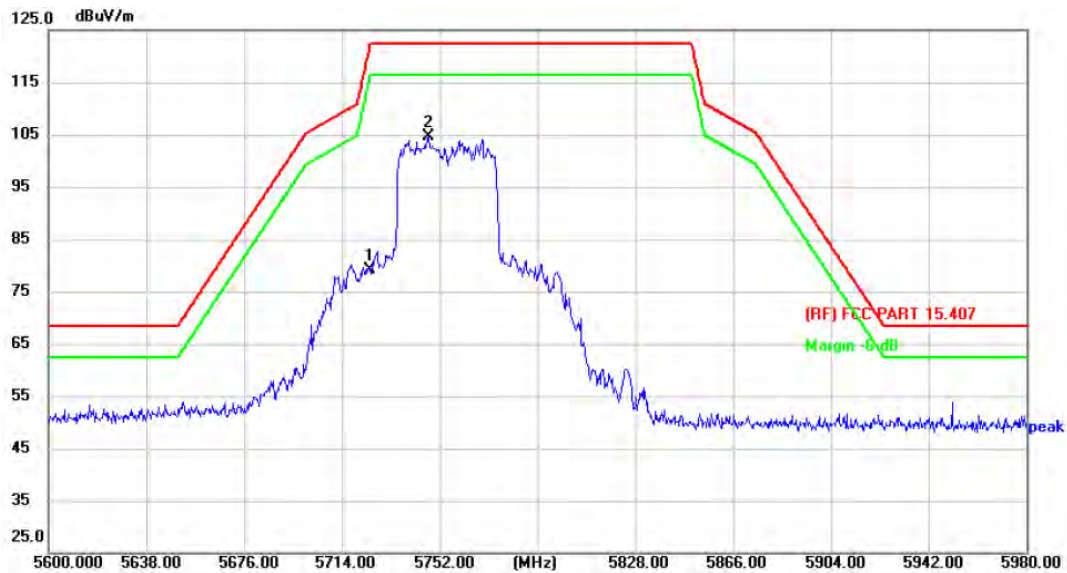

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	77.55	1.46	79.01	122.30	-43.29	peak
2 *	5747.440	103.12	1.40	104.52	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5795 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

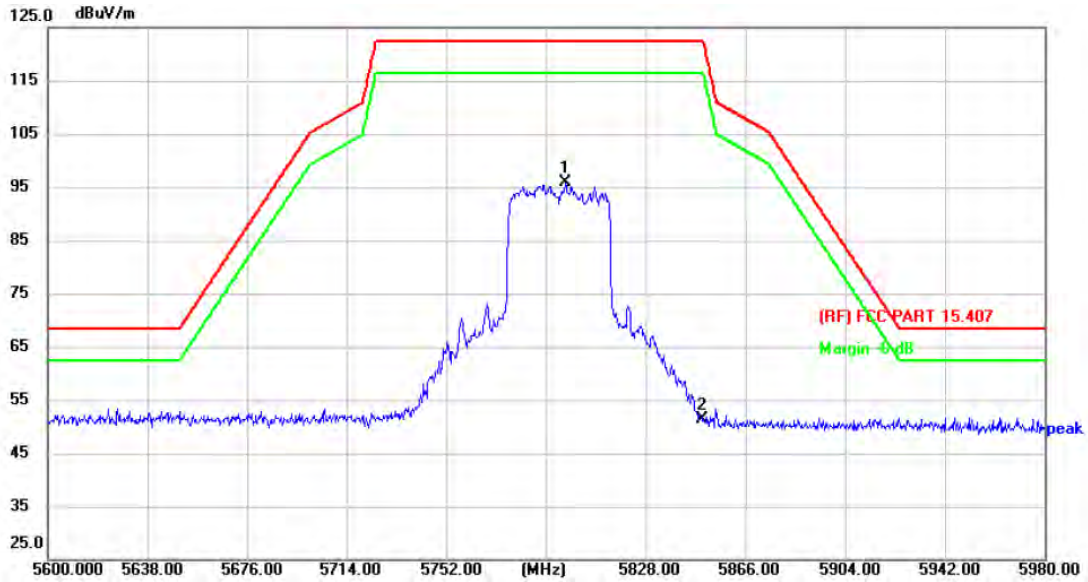


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5797.220	94.53	1.28	95.81	Fundamental Frequency	-71.03	peak
2	5850.000	50.02	1.25	51.27			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5795 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

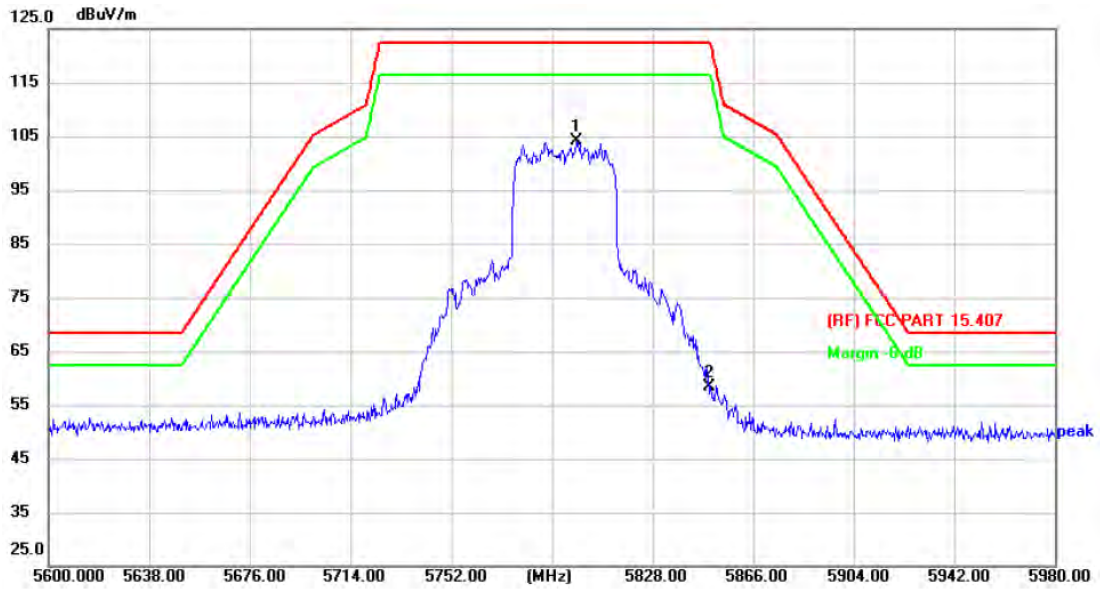

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5799.500	102.76	1.28	104.04	Fundamental Frequency		peak
2	5850.000	57.01	1.25	58.26	122.30	-64.04	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

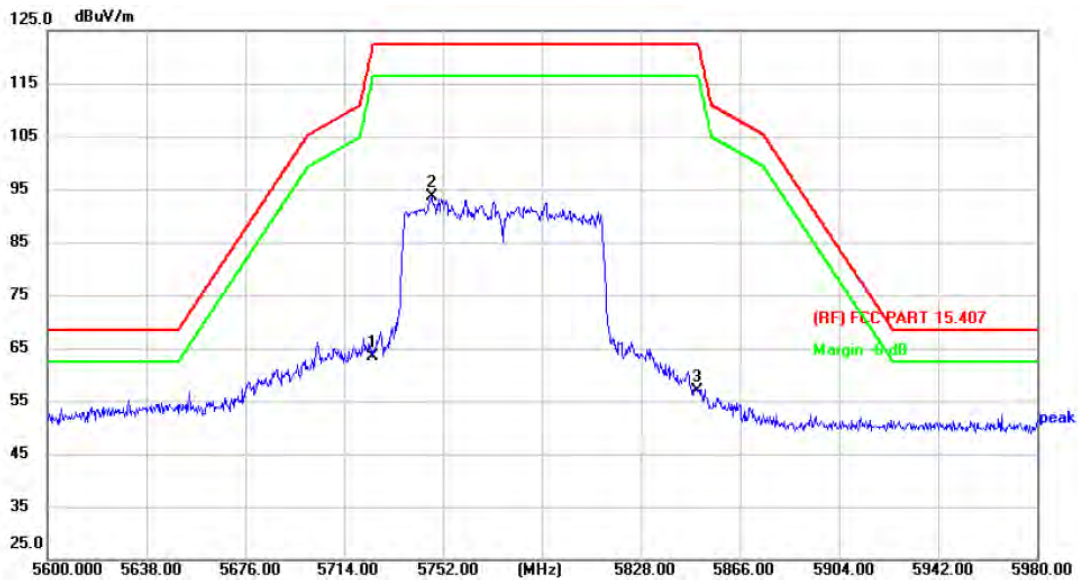


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	5725.000	61.85	1.46	63.31	122.30	-58.99	peak
2 *	5747.440	92.20	1.40	93.60	Fundamental Frequency		peak
3	5850.000	55.61	1.25	56.86	122.30	-65.44	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBUV/m) = Corr. (dB/m) + Read Level (dBUV)
3. Margin (dB) = Peak/AVG (dBUV/m) - Limit PK/AVG(dBUV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

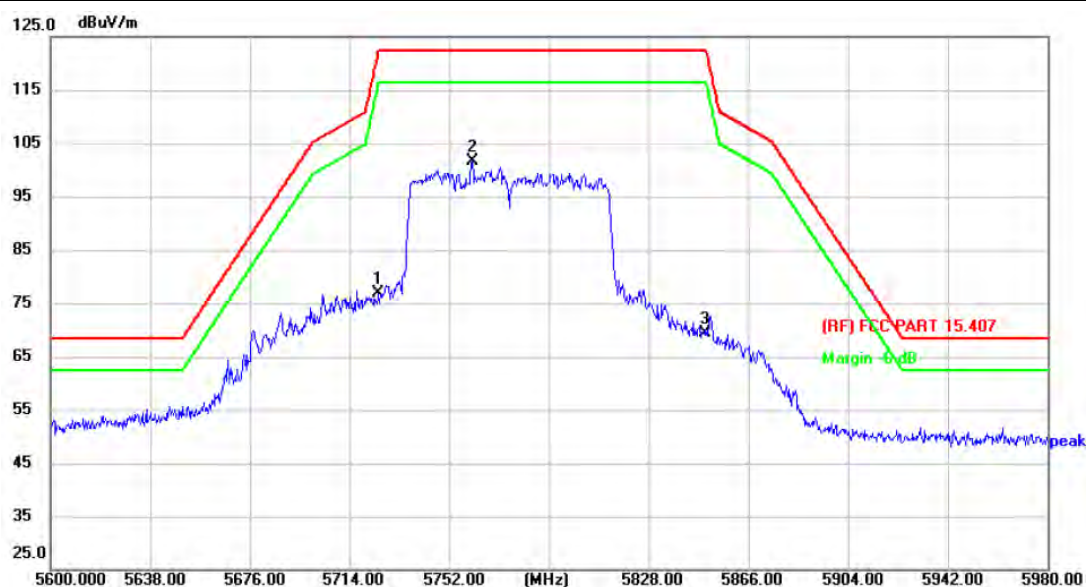

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	75.52	1.46	76.98	122.30	-45.32	peak
2 *	5760.740	100.16	1.38	101.54	Fundamental Frequency		peak
3	5850.000	68.18	1.25	69.43	122.30	-52.87	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 5775 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

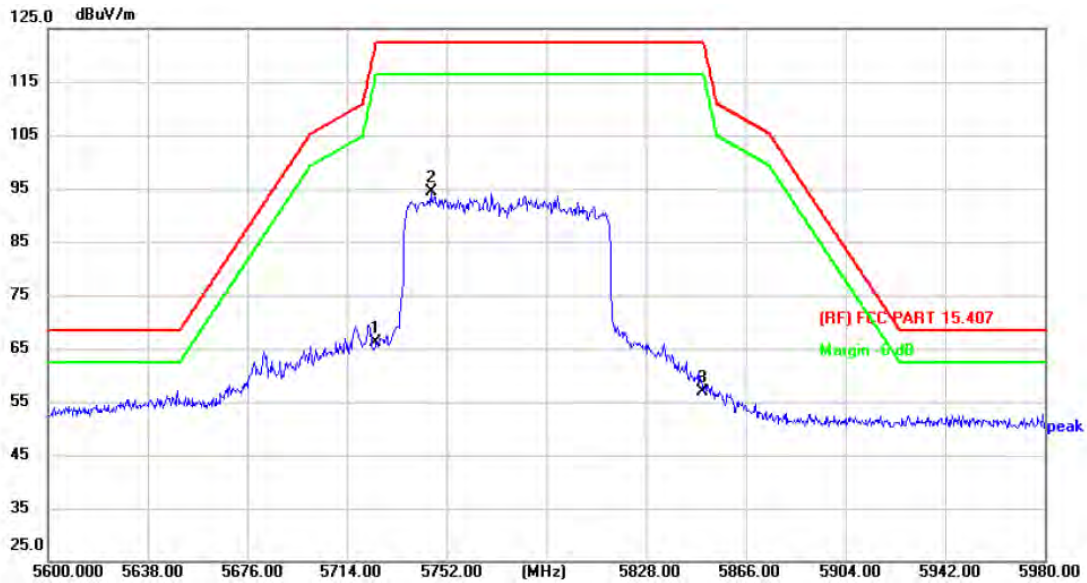


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	64.66	1.46	66.12	122.30	-56.18	peak
2 *	5745.920	92.94	1.40	94.34	Fundamental Frequency		peak
3	5850.000	55.71	1.25	56.96	122.30	-65.34	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 5775 MHz (U-NII-3) -SDM		
<b>Remark:</b>			

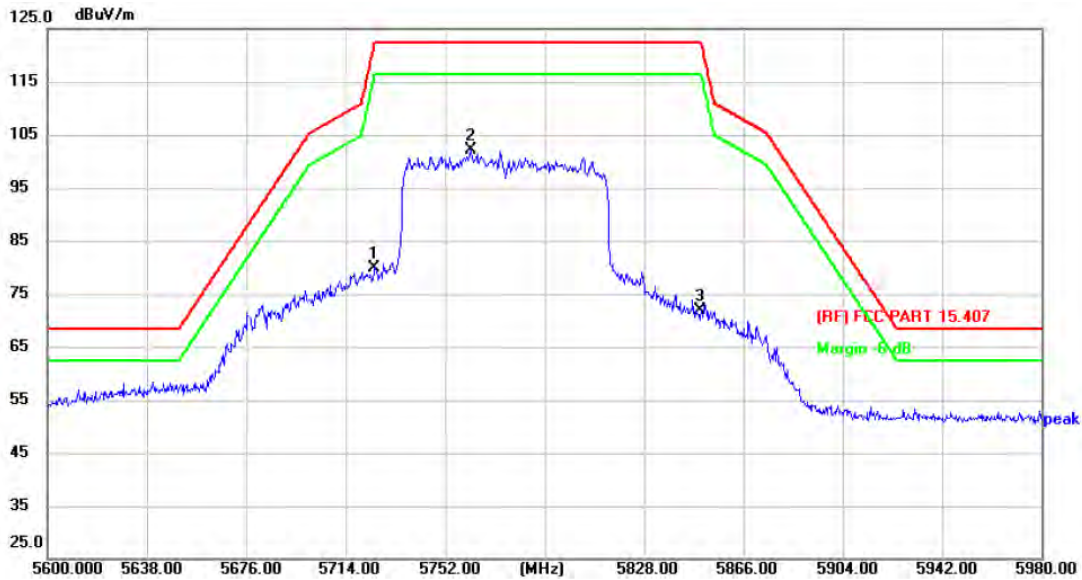

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	78.34	1.46	79.80	122.30	-42.50	peak
2 *	5761.880	100.83	1.38	102.21	Fundamental Frequency		peak
3	5850.000	70.70	1.25	71.95	122.30	-50.35	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11a Mode 5180 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

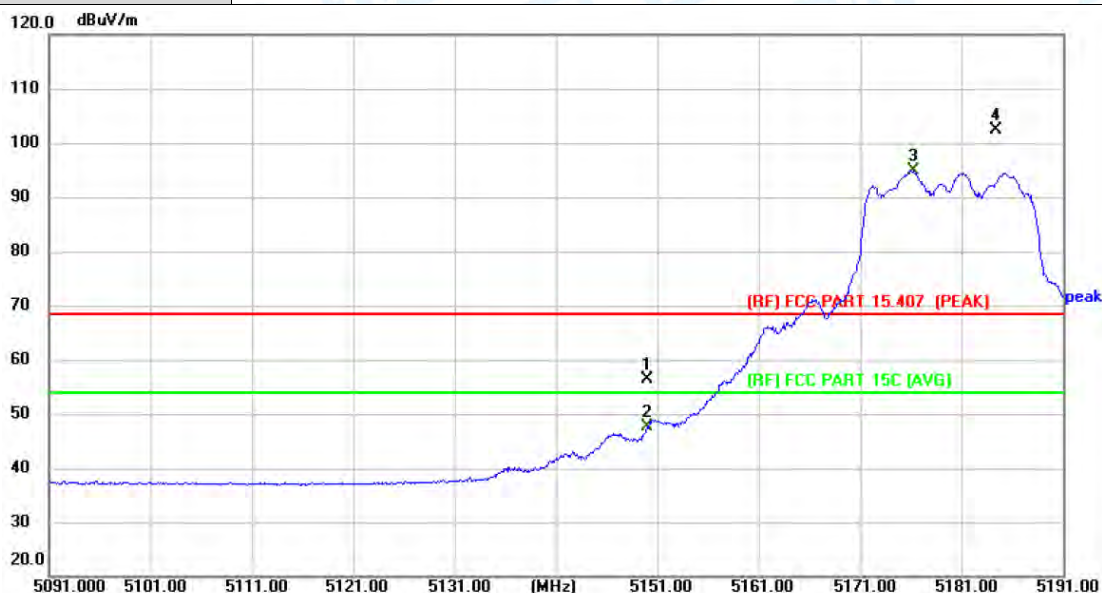


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	52.47	3.91	56.38	68.30	-11.92	peak
2	5150.000	43.72	3.91	47.63	54.00	-6.37	AVG
3 *	5176.200	90.79	4.01	94.80	Fundamental Frequency		AVG
4 X	5184.400	98.25	4.03	102.28			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11a Mode 5180 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

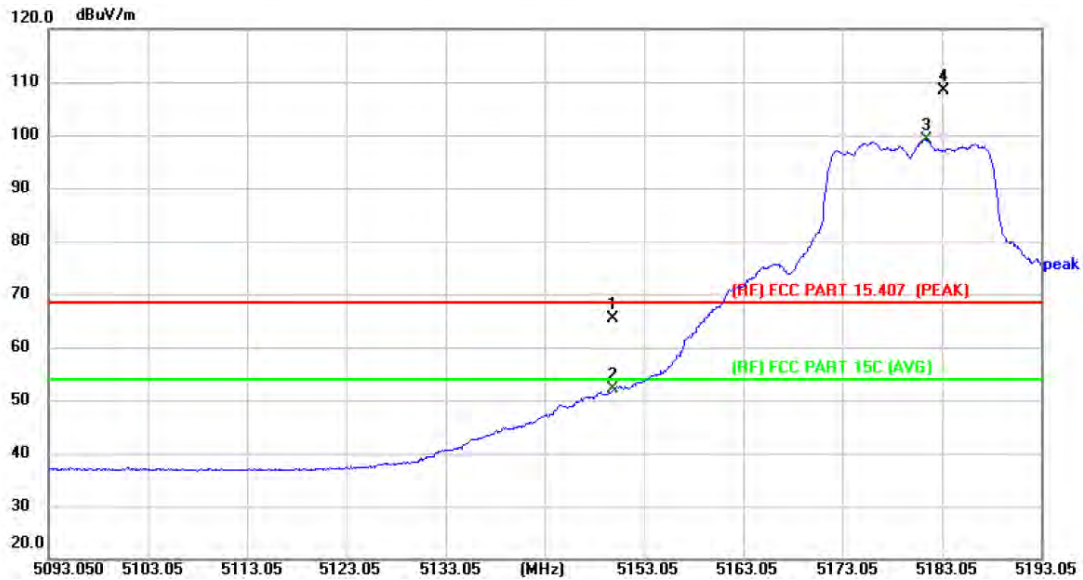

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	61.40	3.91	65.31	68.30	-2.99	peak
2	5150.000	48.10	3.91	52.01	54.00	-1.99	AVG
3 *	5181.450	95.12	4.03	99.15	Fundamental Frequency		AVG
4 X	5183.250	104.29	4.03	108.32			peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11a Mode 5320 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

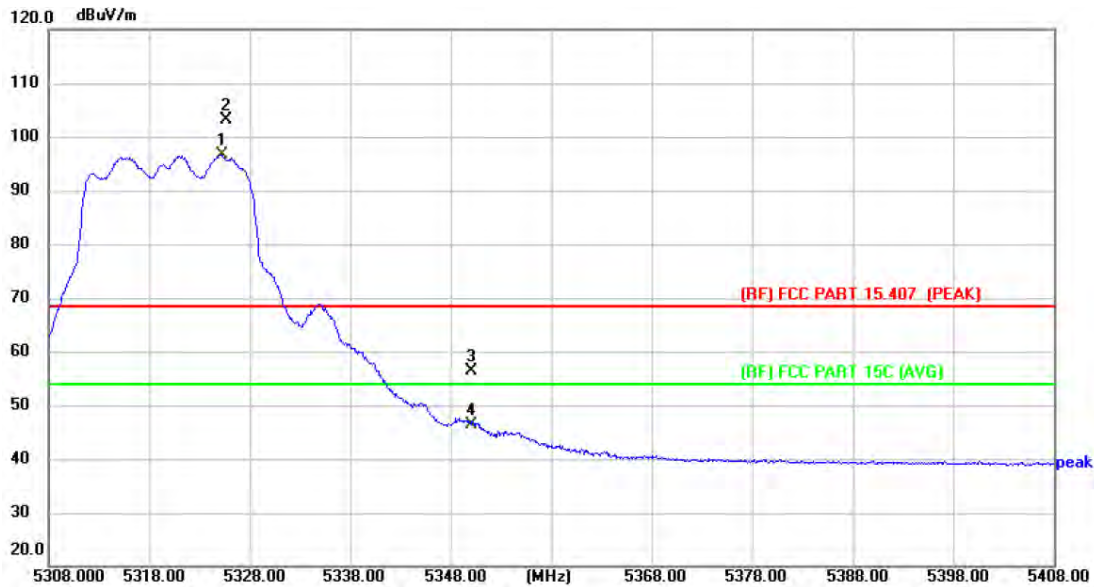


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5325.200	92.30	4.41	96.71	Fundamental Frequency		AVG
2 X	5325.600	98.69	4.41	103.10			peak
3	5350.000	51.75	4.55	56.30	68.30	-12.00	peak
4	5350.000	41.93	4.55	46.48	54.00	-7.52	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11a Mode 5320 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

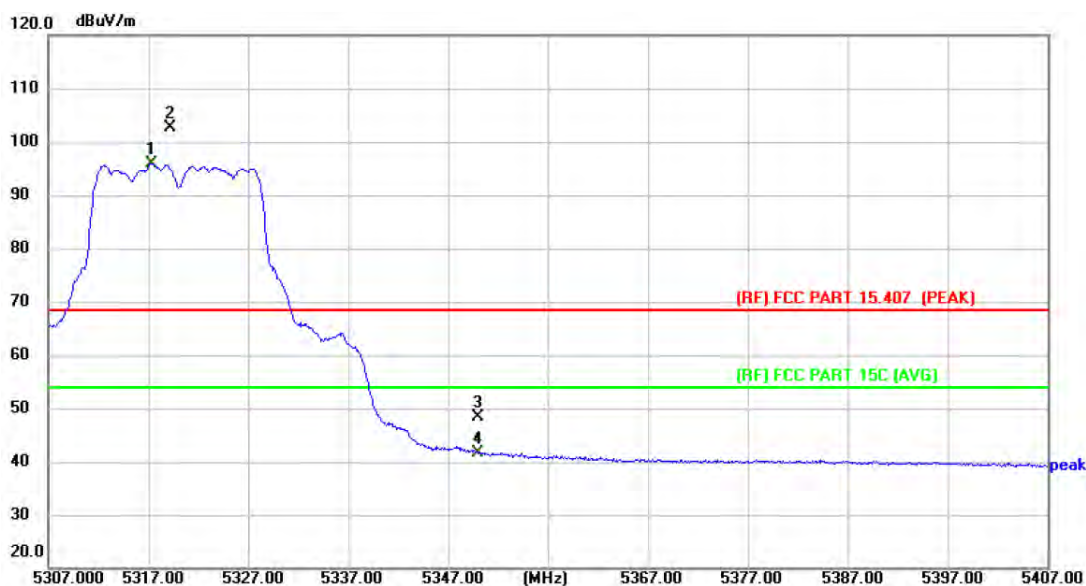

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5317.300	91.55	4.36	95.91	Fundamental Frequency		AVG
2 X	5319.200	98.27	4.38	102.65			peak
3	5350.000	43.83	4.55	48.38	68.30	-19.92	peak
4	5350.000	37.19	4.55	41.74	54.00	-12.26	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

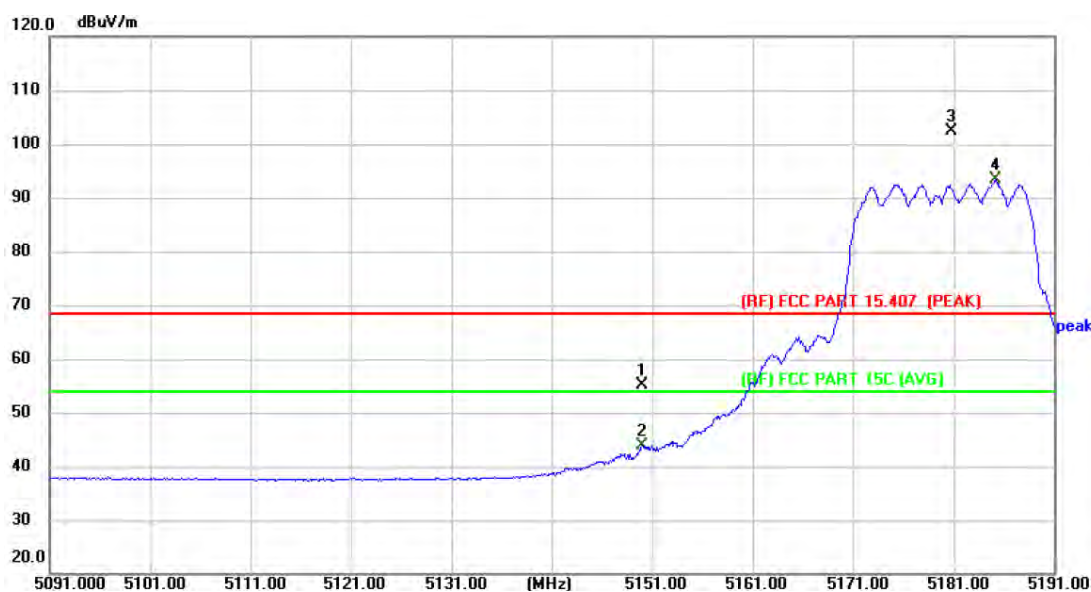


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	51.21	3.91	55.12	68.30	-13.18	peak
2	5150.000	39.93	3.91	43.84	54.00	-10.16	AVG
3 X	5180.800	98.38	4.02	102.40	Fundamental Frequency		peak
4 *	5185.200	89.28	4.03	93.31		AVG	

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

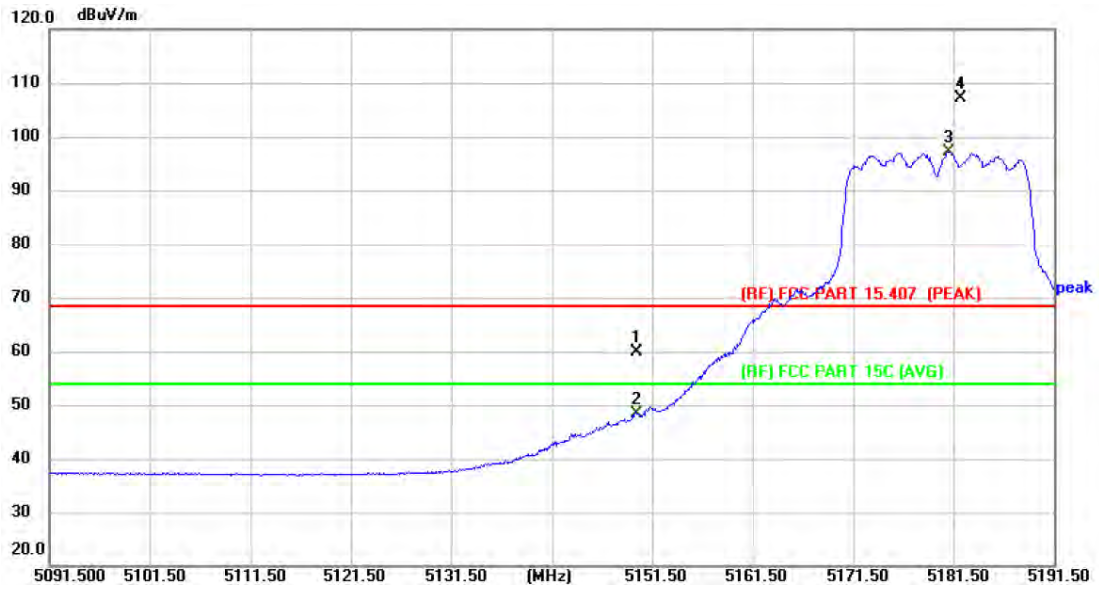

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	55.93	3.91	59.84	68.30	-8.46	peak
2	5150.000	44.38	3.91	48.29	54.00	-5.71	AVG
3 *	5181.000	93.18	4.02	97.20	Fundamental Frequency		AVG
4 X	5182.200	103.05	4.03	107.08			peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

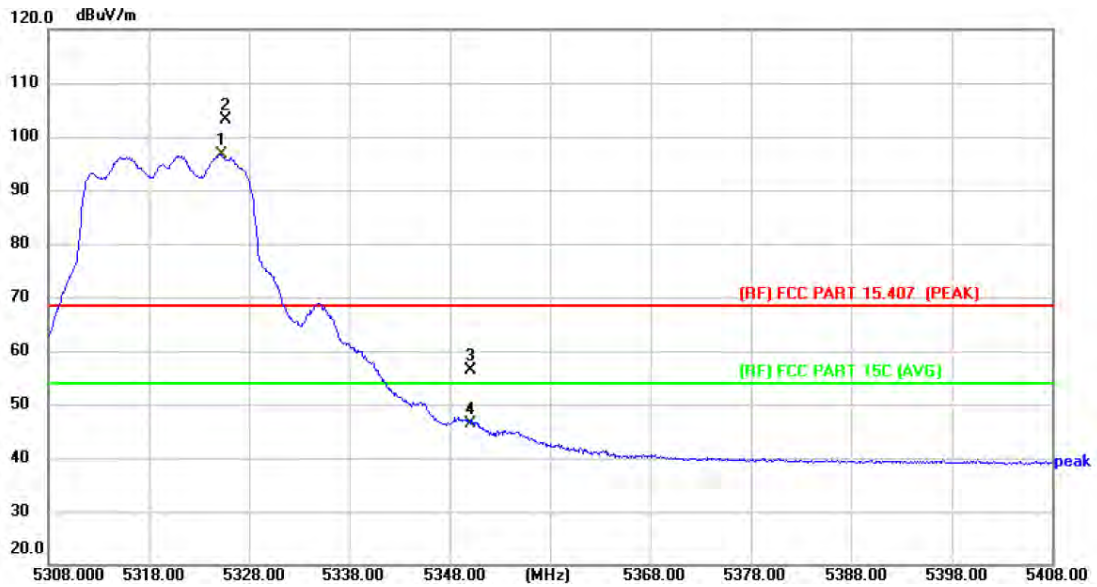


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5325.200	92.30	4.41	96.71	Fundamental Frequency		AVG
2 X	5325.600	98.69	4.41	103.10			peak
3	5350.000	51.75	4.55	56.30	68.30	-12.00	peak
4	5350.000	41.93	4.55	46.48	54.00	-7.52	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

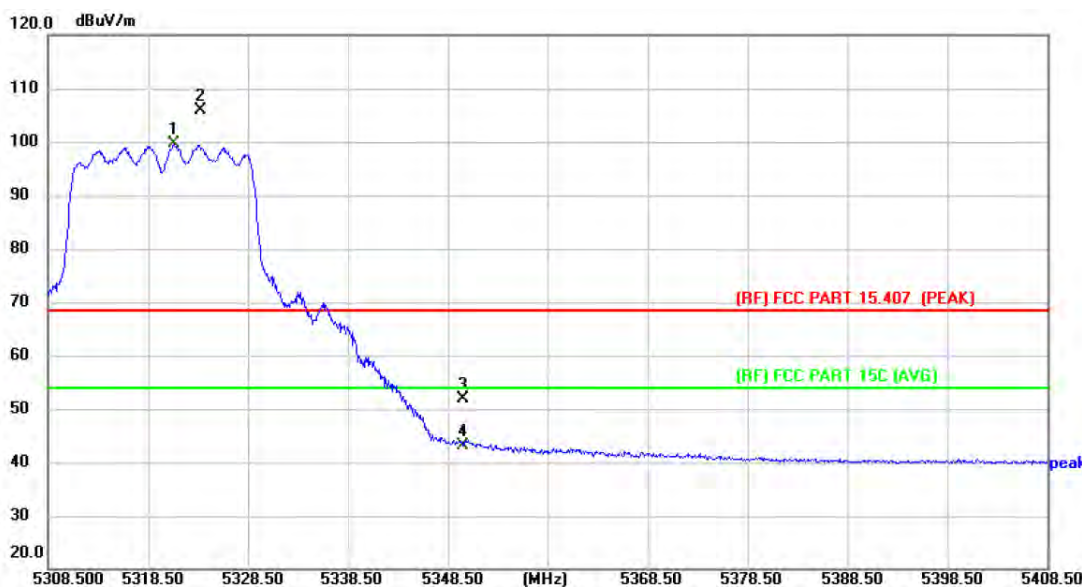

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5321.100	95.22	4.38	99.60	Fundamental Frequency		AVG
2 X	5323.700	101.50	4.40	105.90			peak
3	5350.000	47.36	4.55	51.91	68.30	-16.39	peak
4	5350.000	38.66	4.55	43.21	54.00	-10.79	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

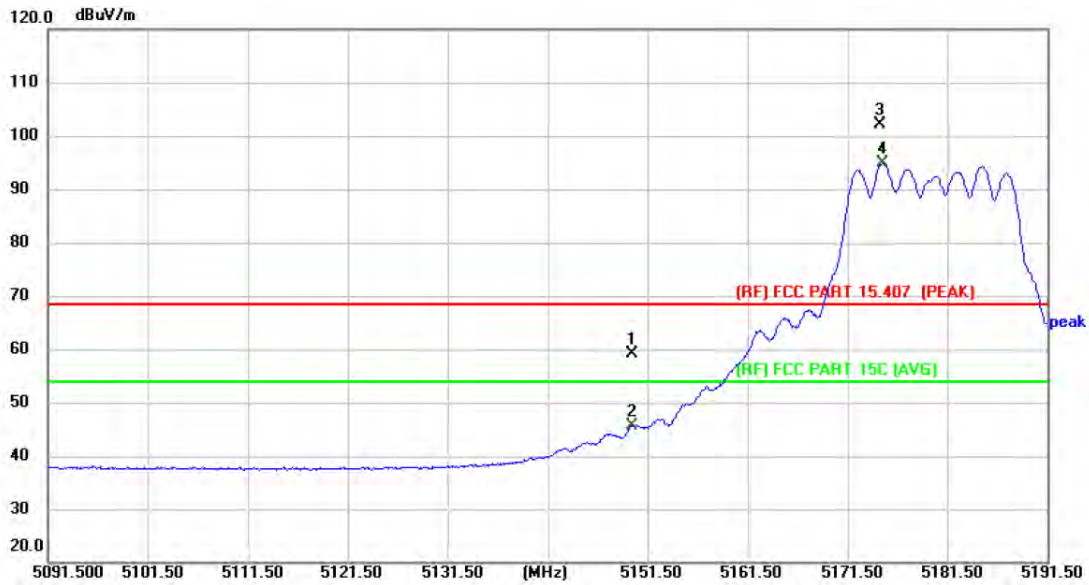


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	55.19	3.91	59.10	68.30	-9.20	peak
2	5150.000	41.61	3.91	45.52	54.00	-8.48	AVG
3 X	5174.700	98.25	4.00	102.25	Fundamental Frequency		peak
4 *	5175.000	90.80	4.01	94.81		AVG	

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

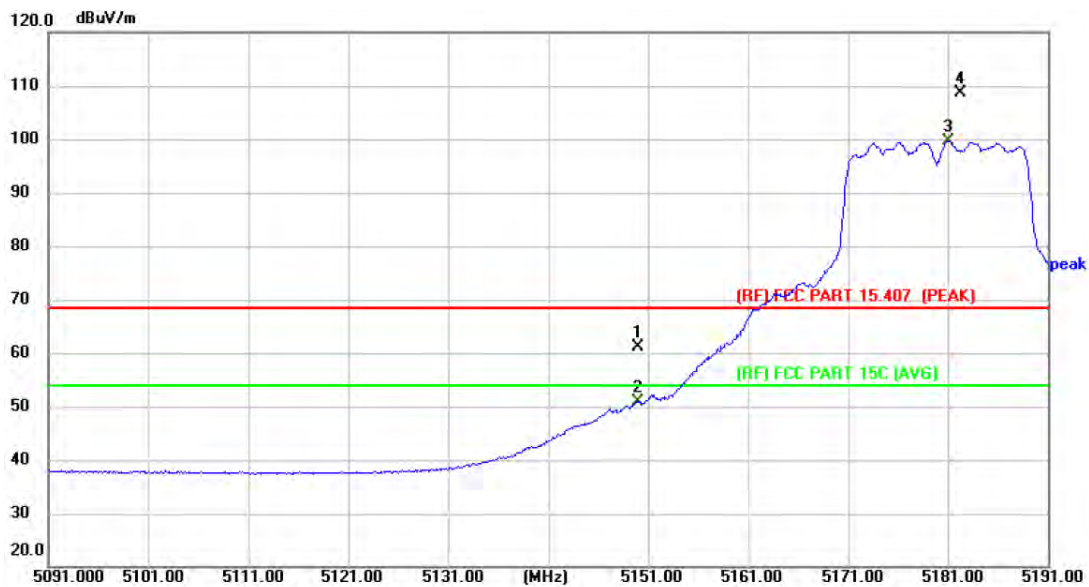

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	57.28	3.91	61.19	68.30	-7.11	peak
2	5150.000	47.09	3.91	51.00	54.00	-3.00	AVG
3 *	5181.000	95.72	4.02	99.74	Fundamental Frequency		AVG
4 X	5182.200	104.56	4.03	108.59			peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

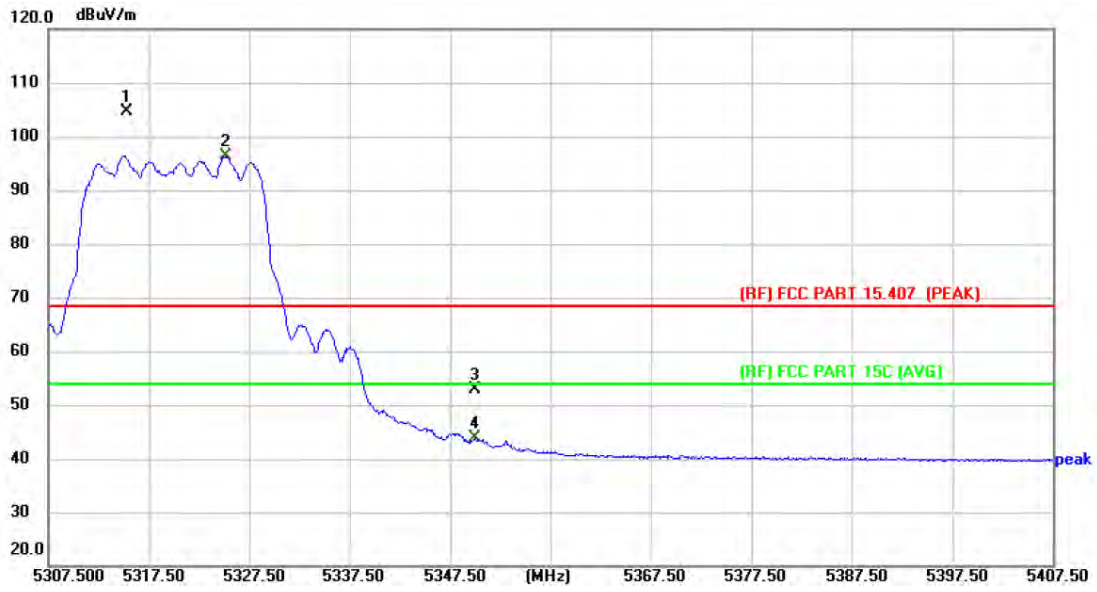


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5315.300	100.25	4.35	104.60	Fundamental Frequency		peak
2 *	5325.100	91.91	4.41	96.32			AVG
3	5350.000	48.42	4.55	52.97	68.30	-15.33	peak
4	5350.000	39.21	4.55	43.76	54.00	-10.24	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

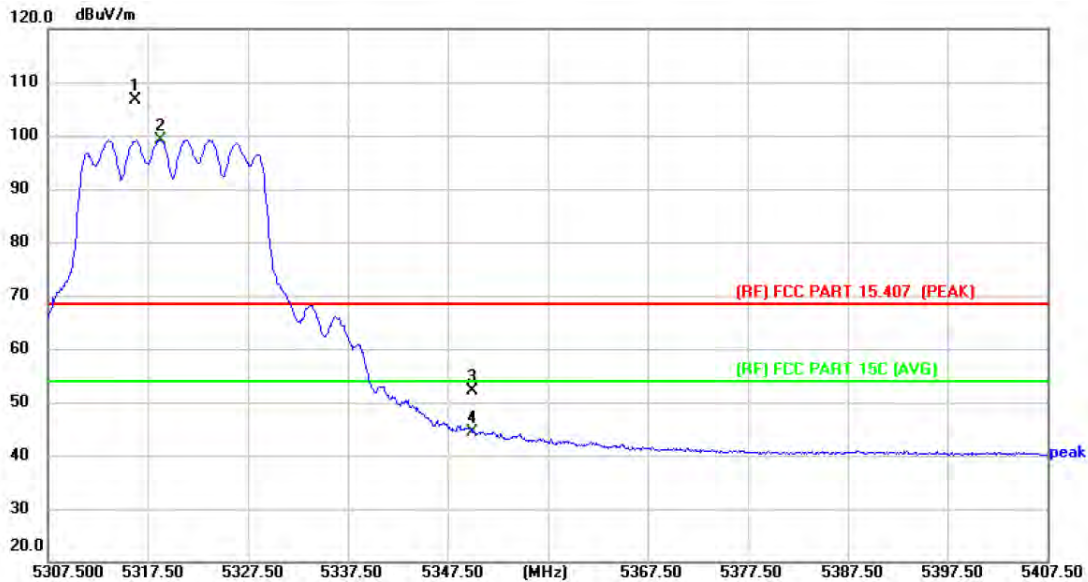

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5316.200	102.27	4.36	106.63	Fundamental Frequency		peak
2 *	5318.800	94.80	4.37	99.17			AVG
3	5350.000	47.51	4.55	52.06	68.30	-16.24	peak
4	5350.000	39.72	4.55	44.27	54.00	-9.73	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5180 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

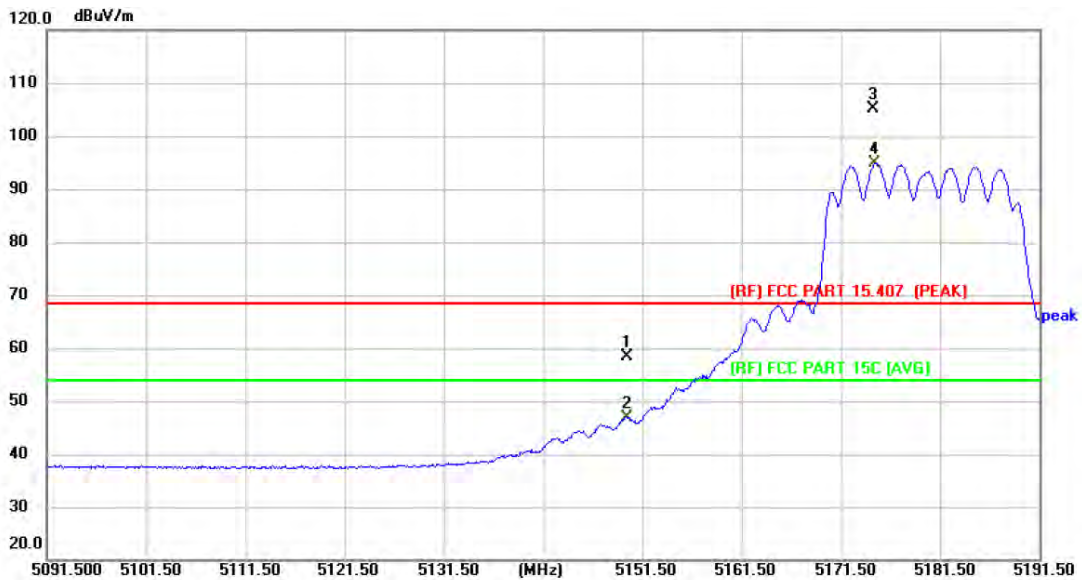


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	54.46	3.91	58.37	68.30	-9.93	peak
2	5150.000	43.00	3.91	46.91	54.00	-7.09	AVG
3 X	5174.700	101.14	4.00	105.14	Fundamental Frequency		peak
4 *	5174.900	90.86	4.01	94.87			AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5180 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

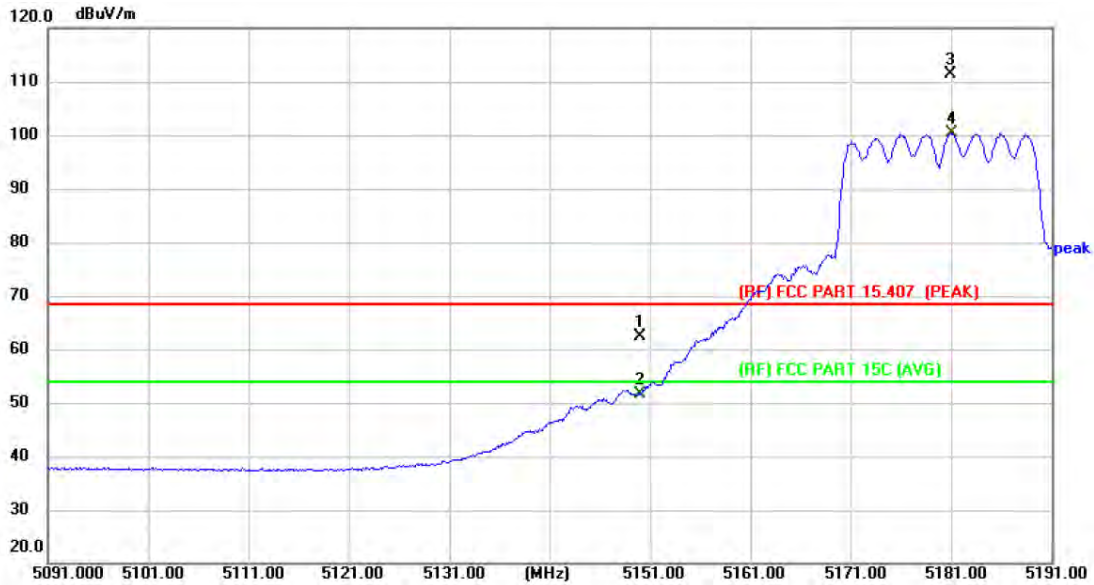

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	58.53	3.91	62.44	68.30	-5.86	peak
2	5150.000	47.81	3.91	51.72	54.00	-2.28	AVG
3 X	5180.900	107.40	4.02	111.42	Fundamental Frequency		peak
4 *	5181.000	96.38	4.02	100.40			AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5320 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

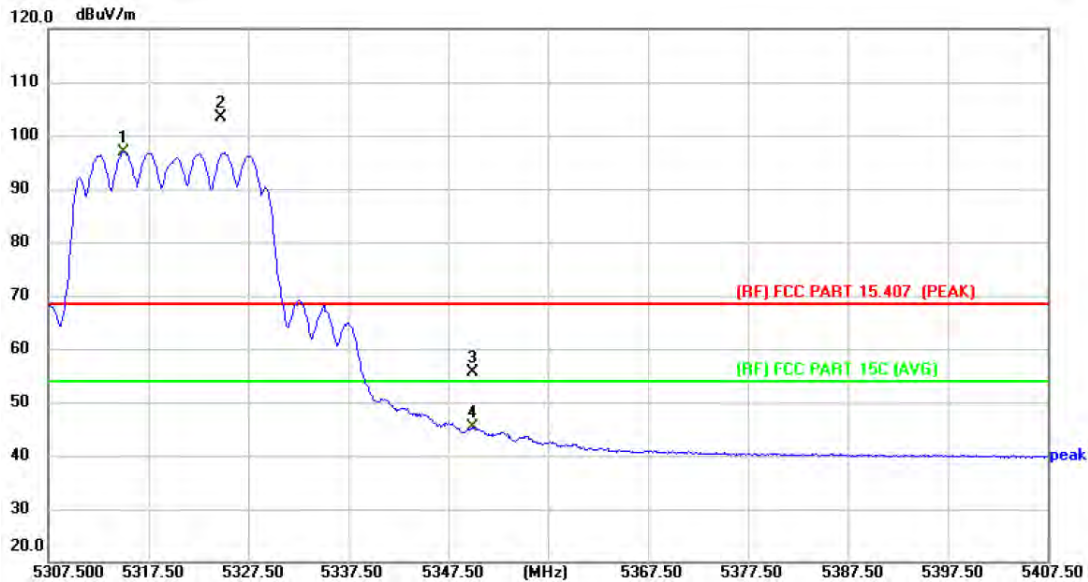

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5315.000	92.55	4.35	96.90	Fundamental Frequency		AVG
2 X	5324.700	99.08	4.40	103.48			peak
3	5350.000	51.12	4.55	55.67	68.30	-12.63	peak
4	5350.000	40.94	4.55	45.49	54.00	-8.51	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5320 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5316.400	95.26	4.36	99.62	Fundamental Frequency		AVG
2 X	5318.700	101.43	4.36	105.79			peak
3	5350.000	53.00	4.55	57.55	68.30	-10.75	peak
4	5350.000	41.66	4.55	46.21	54.00	-7.79	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

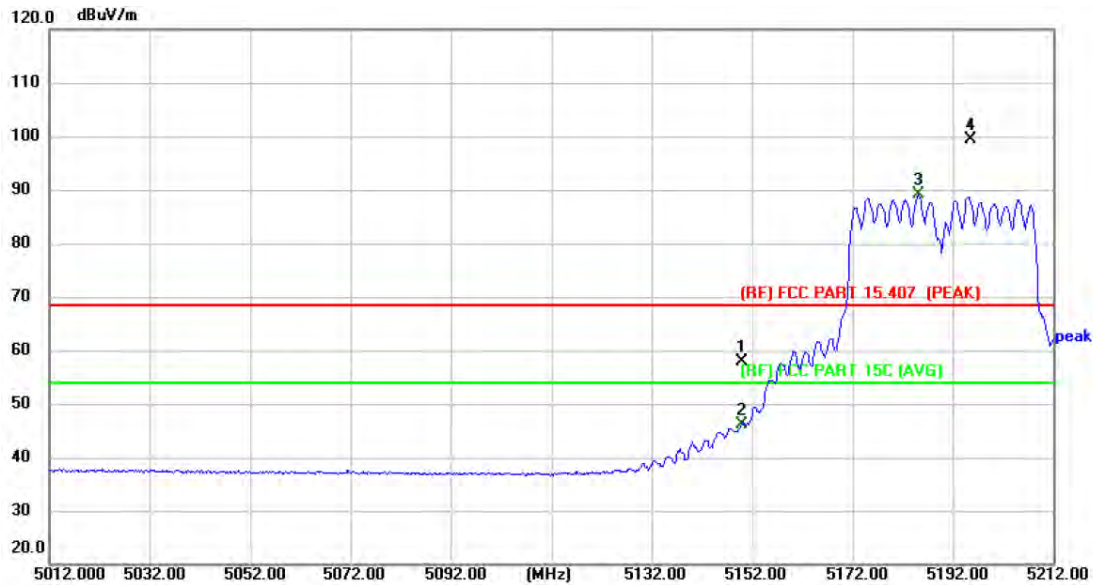


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	53.90	3.91	57.81	68.30	-10.49	peak
2	5150.000	42.17	3.91	46.08	54.00	-7.92	AVG
3 *	5185.200	85.03	4.03	89.06	Fundamental Frequency		AVG
4 X	5195.600	95.42	4.08	99.50			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

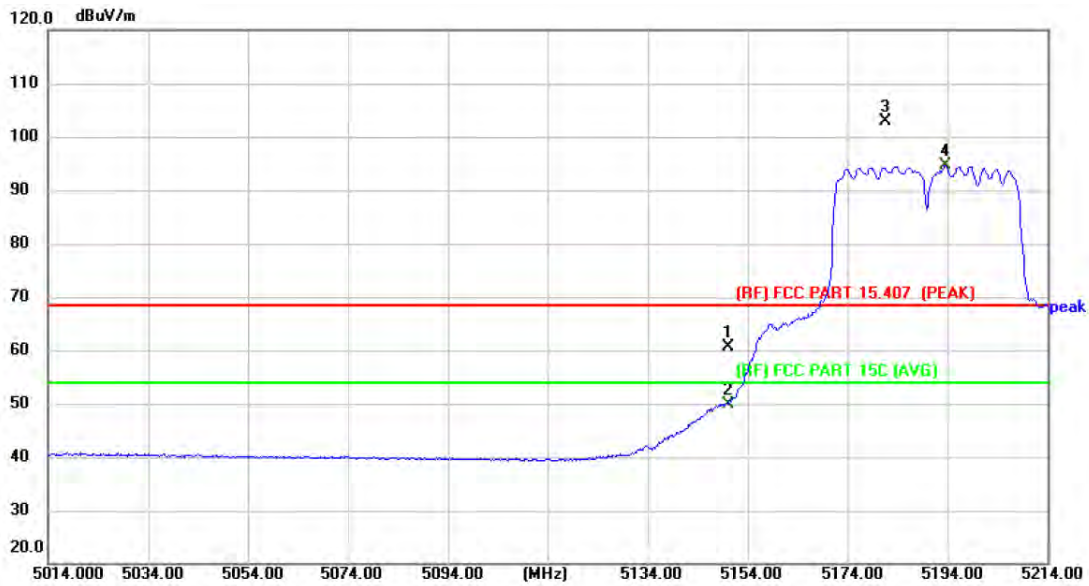

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	56.67	3.91	60.58	68.30	-7.72	peak
2	5150.000	46.08	3.91	49.99	54.00	-4.01	AVG
3 X	5181.600	98.90	4.03	102.93	Fundamental Frequency		peak
4 *	5193.600	90.49	4.07	94.56			AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

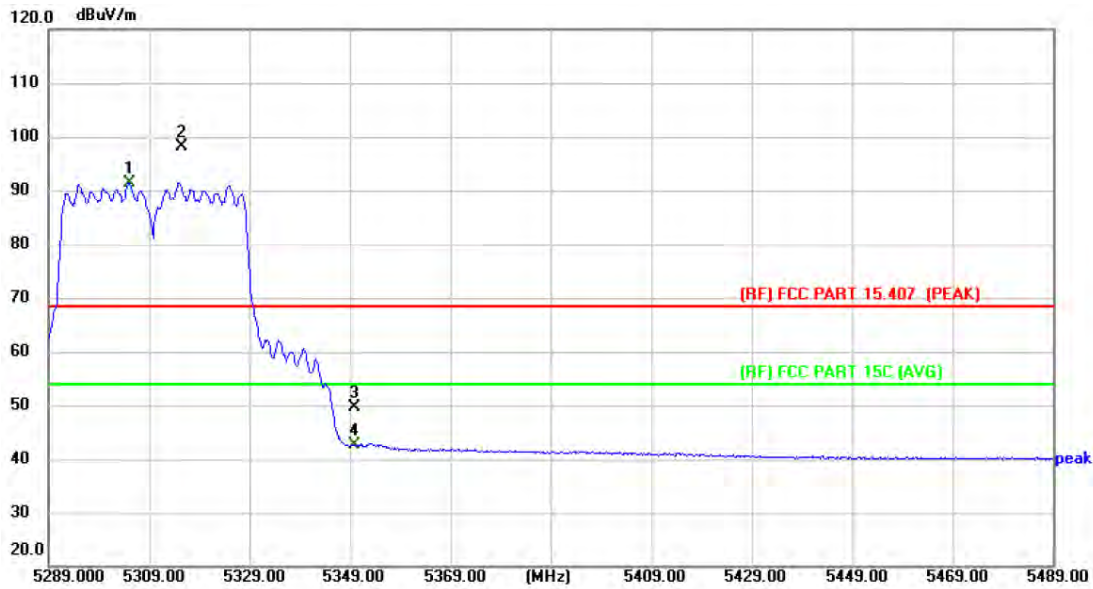


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5305.200	87.22	4.28	91.50	68.30	-18.73	AVG
2 X	5315.400	93.79	4.35	98.14			peak
3	5350.000	45.02	4.55	49.57	54.00	-11.44	peak
4	5350.000	38.01	4.55	42.56	54.00	-11.44	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

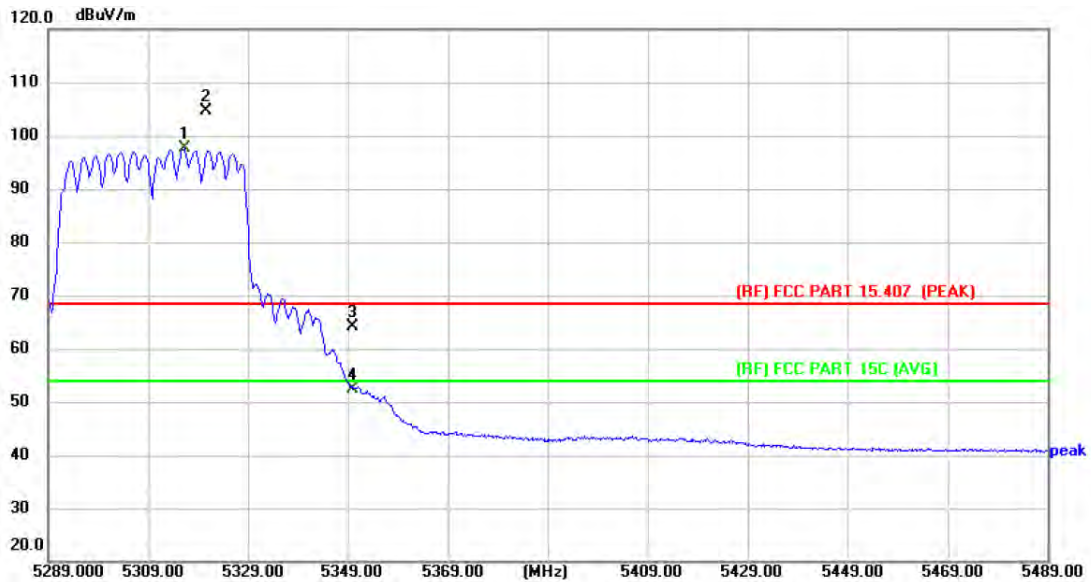

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5316.200	93.19	4.36	97.55	Fundamental Frequency		AVG
2 X	5320.600	100.16	4.38	104.54			peak
3	5350.000	59.63	4.55	64.18	68.30	-4.12	peak
4	5350.000	47.86	4.55	52.41	54.00	-1.59	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

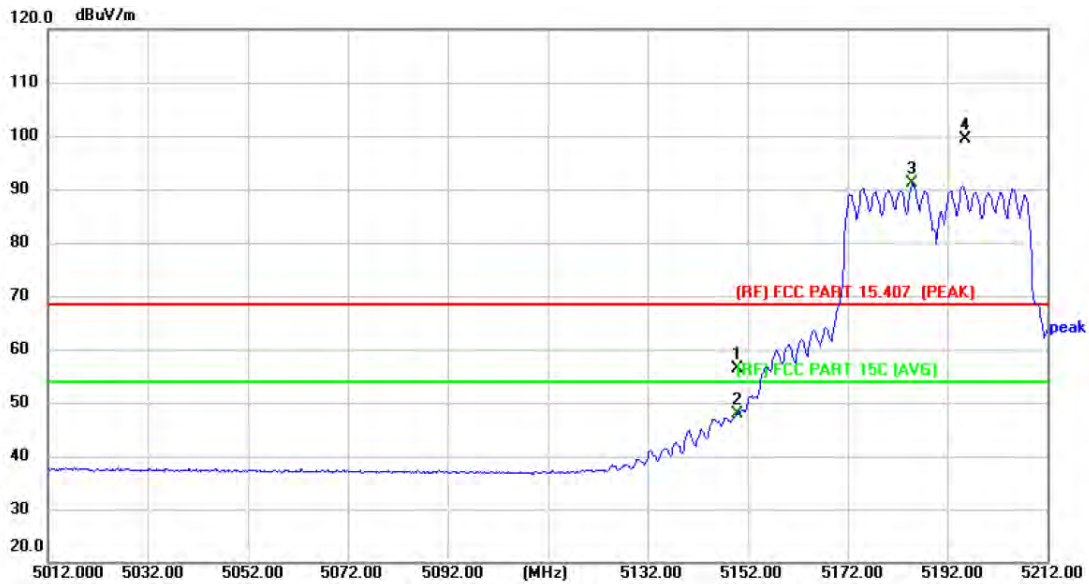


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	52.47	3.91	56.38	68.30	-11.92	peak
2	5150.000	43.88	3.91	47.79	54.00	-6.21	AVG
3 *	5185.000	86.99	4.03	91.02	Fundamental Frequency		AVG
4 X	5195.600	95.18	4.08	99.26			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

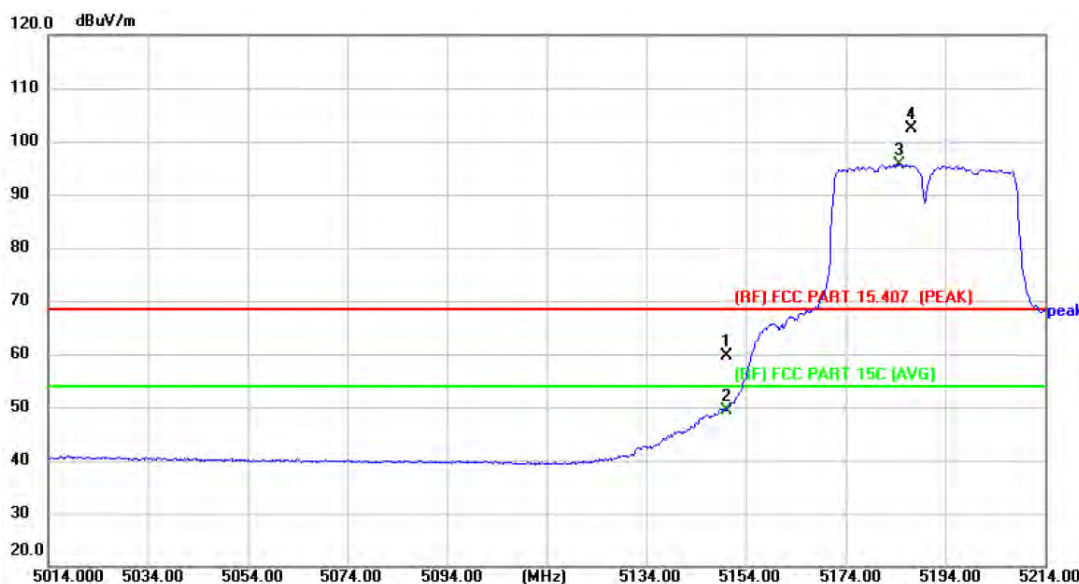

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	55.79	3.91	59.70	68.30	-8.60	peak
2	5150.000	45.57	3.91	49.48	54.00	-4.52	AVG
3 *	5184.800	91.71	4.03	95.74	Fundamental Frequency		AVG
4 X	5187.200	98.41	4.04	102.45			peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

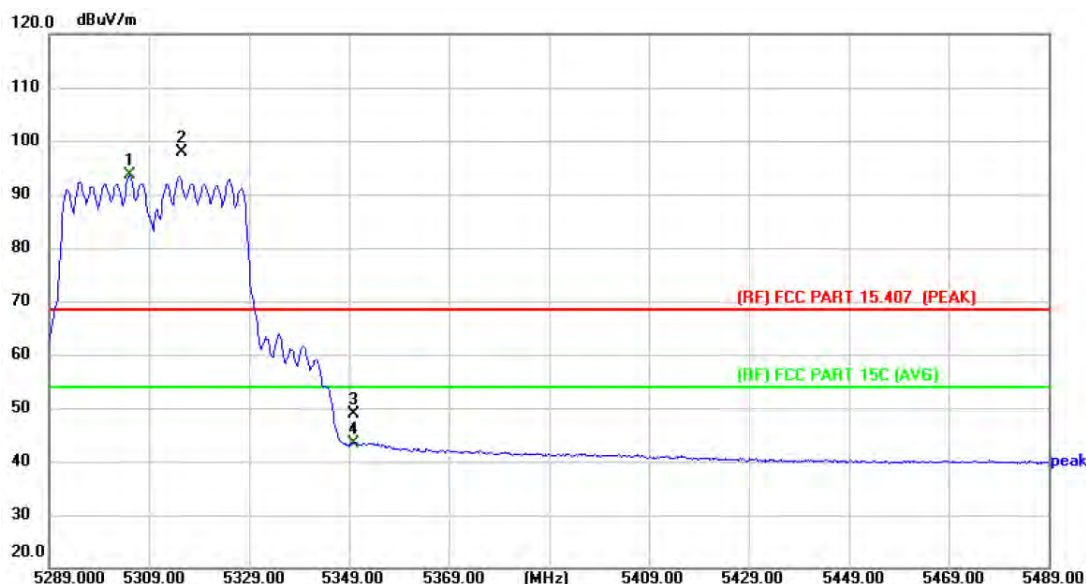

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5305.000	89.24	4.28	93.52	Fundamental Frequency		AVG
2 X	5315.400	93.55	4.35	97.90			peak
3	5350.000	44.22	4.55	48.77	68.30	-19.53	peak
4	5350.000	38.84	4.55	43.39	54.00	-10.61	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5316.000	94.80	4.36	99.16	Fundamental Frequency		AVG
2 X	5316.200	100.46	4.36	104.82			peak
3	5350.000	58.14	4.55	62.69	68.30	-5.61	peak
4	5350.000	47.68	4.55	52.23	54.00	-1.77	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

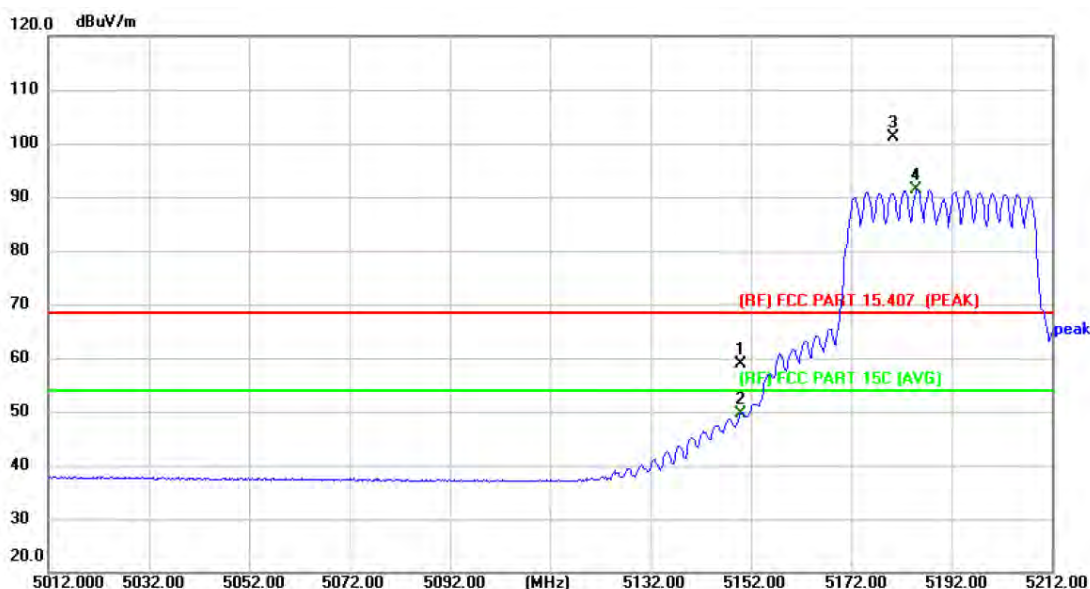


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	54.96	3.91	58.87	68.30	-9.43	peak
2	5150.000	45.82	3.91	49.73	54.00	-4.27	AVG
3 X	5180.400	97.06	4.02	101.08	Fundamental Frequency		peak
4 *	5185.000	87.38	4.03	91.41			AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

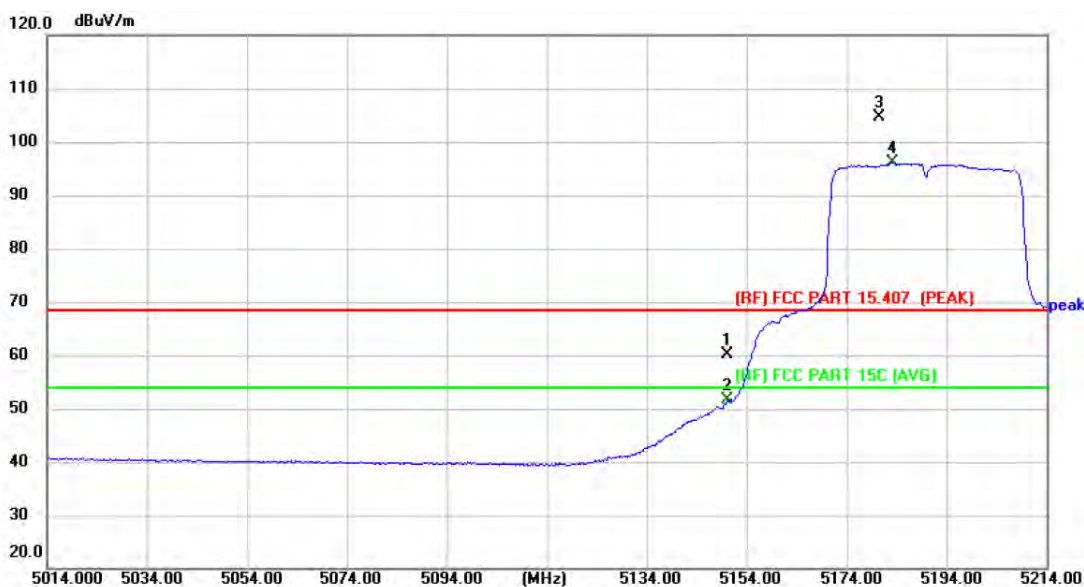

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	56.15	3.91	60.06	68.30	-8.24	peak
2	5150.000	47.71	3.91	51.62	54.00	-2.38	AVG
3 X	5180.400	100.52	4.02	104.54	Fundamental Frequency		peak
4 *	5183.200	92.03	4.03	96.06			AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5310 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

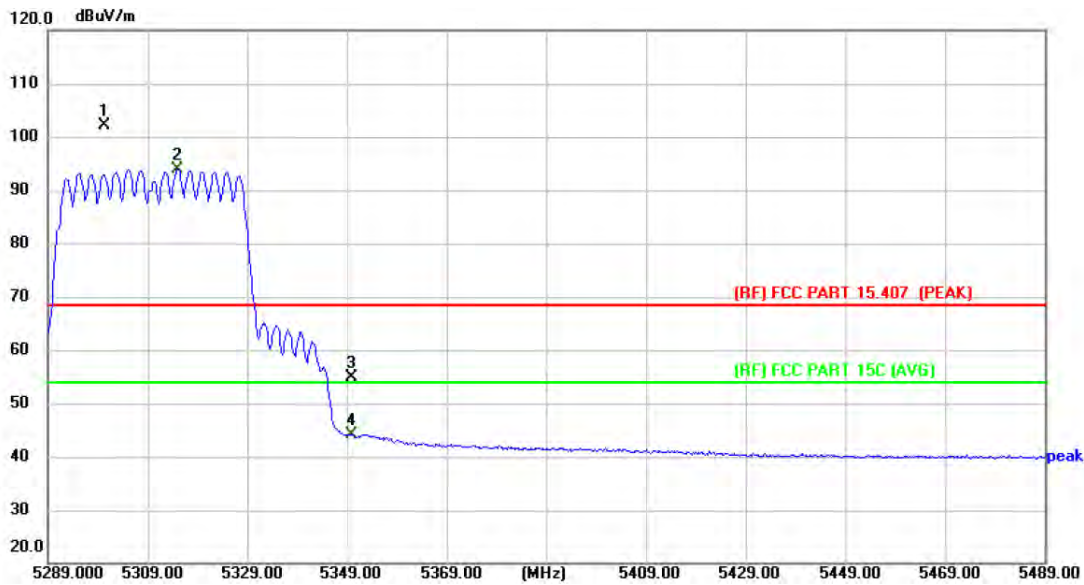


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5300.400	97.85	4.26	102.11	Fundamental Frequency		peak
2 *	5315.000	89.59	4.35	93.94			AVG
3	5350.000	50.39	4.55	54.94	68.30	-13.36	peak
4	5350.000	39.62	4.55	44.17	54.00	-9.83	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5310 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

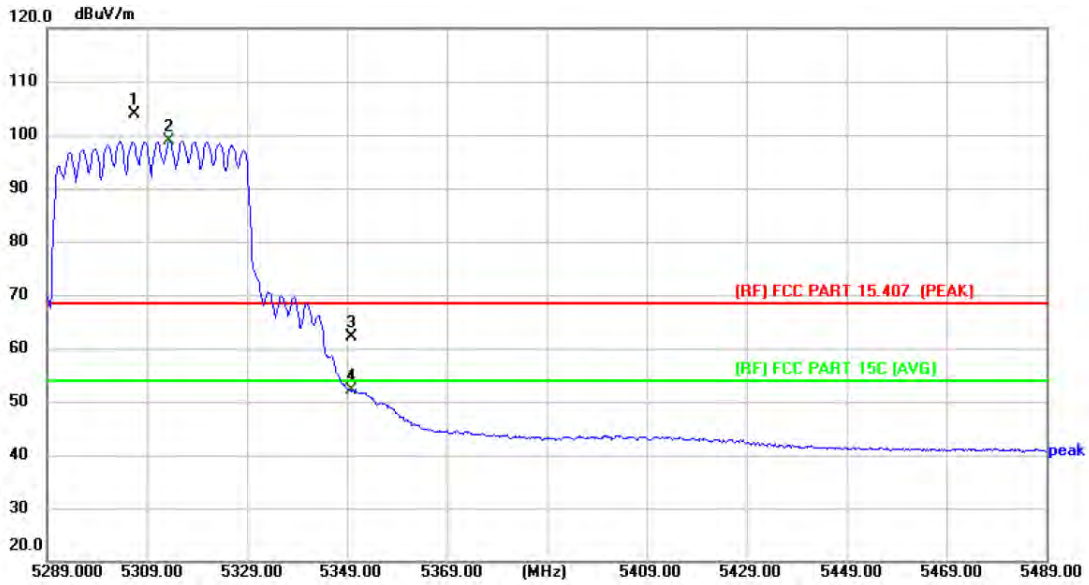

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5306.400	99.55	4.30	103.85	Fundamental Frequency		peak
2 *	5313.400	94.48	4.34	98.82			AVG
3	5350.000	57.52	4.55	62.07	68.30	-6.23	peak
4	5350.000	47.54	4.55	52.09	54.00	-1.91	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) -CDD		
<b>Remark:</b>			




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	49.85	3.91	53.76	68.30	-14.54	peak
2	5150.000	36.96	3.91	40.87	54.00	-13.13	AVG
3 X	5224.100	92.92	4.13	97.05	Fundamental Frequency		peak
4 *	5225.000	83.89	4.14	88.03		AVG	

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

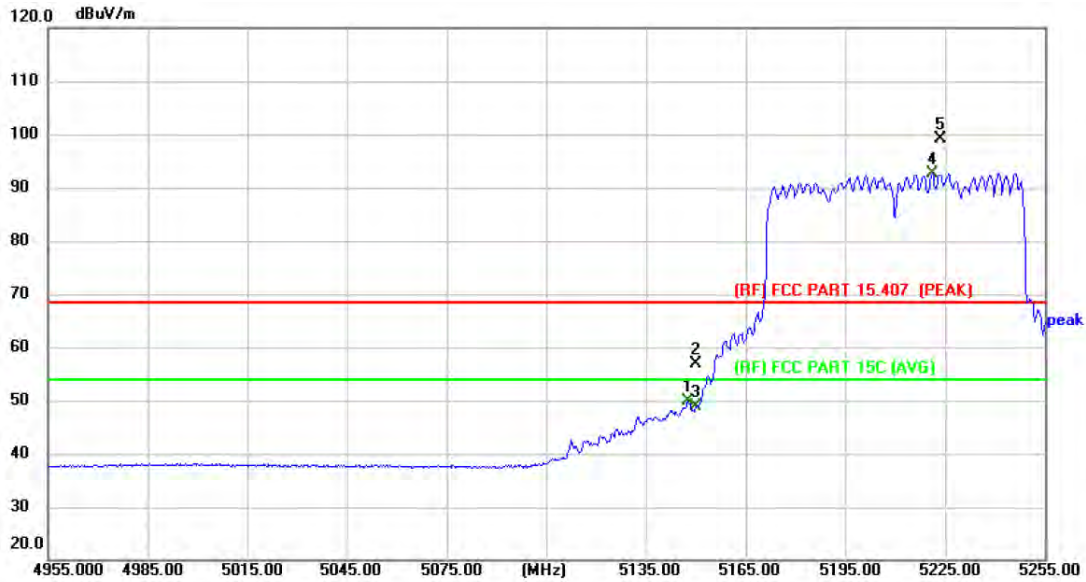

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5147.600	45.96	3.90	49.86	54.00	-4.14	AVG
2	5150.000	53.09	3.91	57.00	68.30	-11.30	peak
3	5150.000	44.85	3.91	48.76	54.00	-5.24	AVG
4 *	5221.100	88.47	4.12	92.59	Fundamental Frequency		AVG
5 X	5223.500	95.02	4.13	99.15			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5295.700	88.82	4.26	93.08	Fundamental Frequency		peak
2 *	5305.000	84.19	4.28	88.47			AVG
3	5350.000	44.18	4.55	48.73	68.30	-19.57	peak
4	5350.000	36.48	4.55	41.03	54.00	-12.97	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

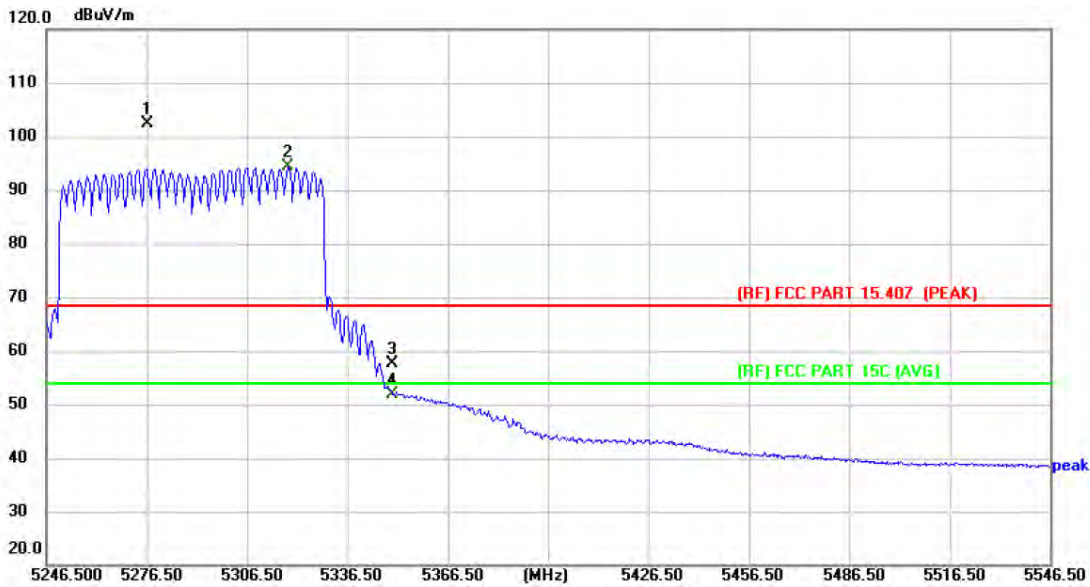

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5276.500	98.10	4.22	102.32	Fundamental Frequency		peak
2 *	5318.800	89.99	4.37	94.36			AVG
3	5350.000	53.02	4.55	57.57	68.30	-10.73	peak
4	5350.000	47.41	4.55	51.96	54.00	-2.04	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 5210 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

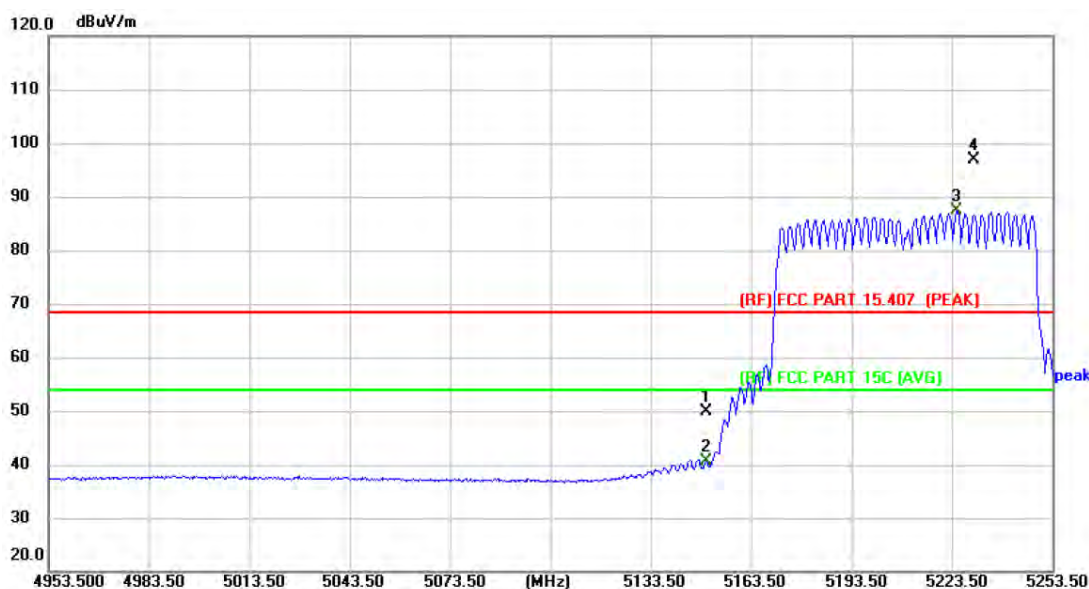


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	46.05	3.91	49.96	68.30	-18.34	peak
2	5150.000	36.72	3.91	40.63	54.00	-13.37	AVG
3 *	5225.000	83.25	4.14	87.39	Fundamental Frequency		AVG
4 X	5230.100	92.75	4.14	96.89			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 5210 MHz (U-NII-1) -CDD		
<b>Remark:</b>			

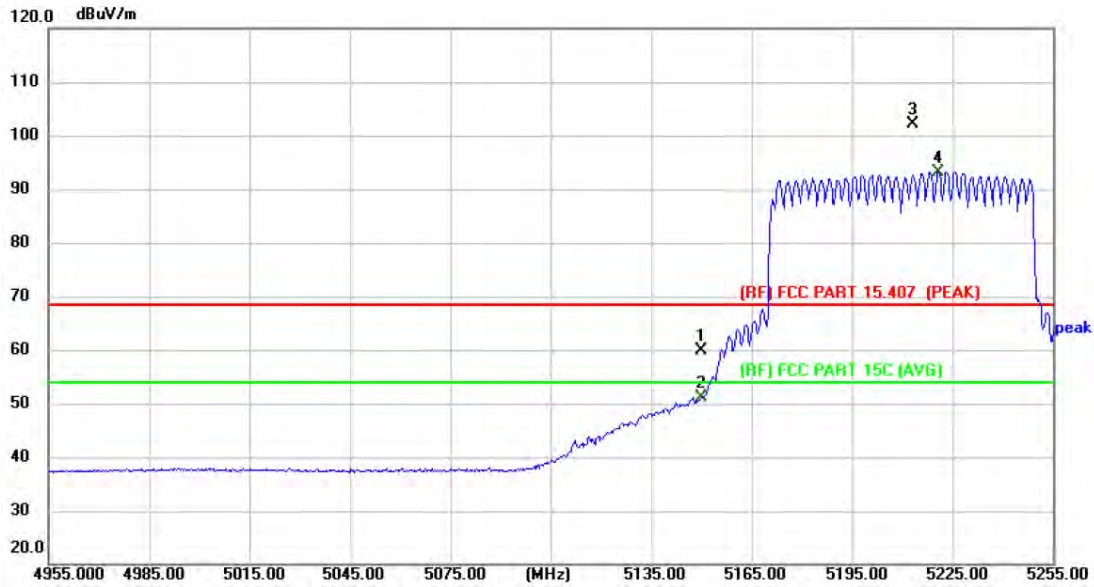

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	55.90	3.91	59.81	68.30	-8.49	peak
2	5150.000	47.34	3.91	51.25	54.00	-2.75	AVG
3 X	5213.300	97.92	4.11	102.03	Fundamental Frequency		peak
4 *	5220.800	89.11	4.12	93.23		AVG	


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 5290 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

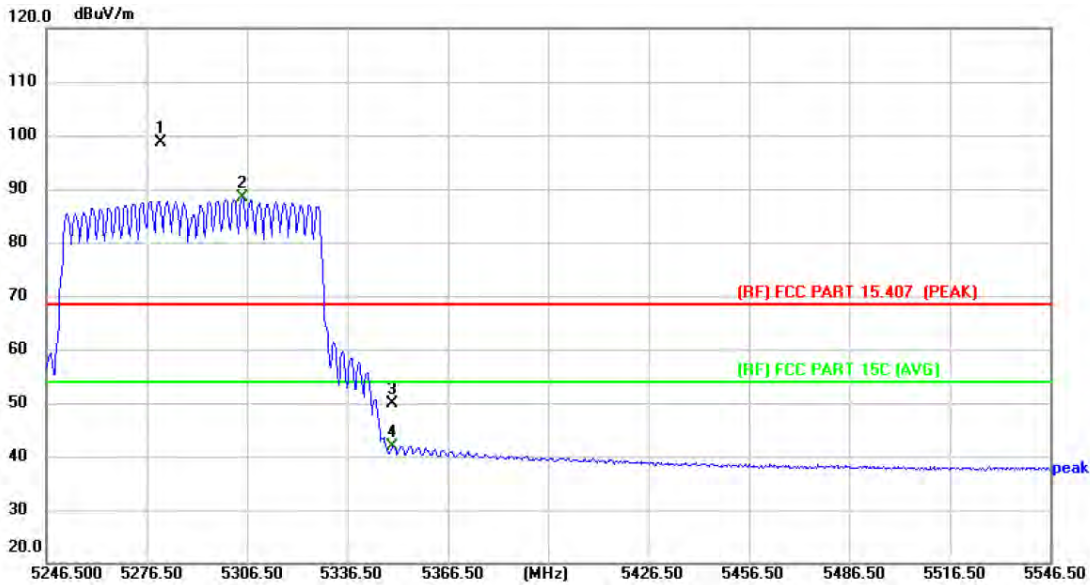


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5280.700	94.30	4.23	98.53	Fundamental Frequency		peak
2 *	5305.000	84.07	4.28	88.35			AVG
3	5350.000	45.40	4.55	49.95	68.30	-18.35	peak
4	5350.000	37.44	4.55	41.99	54.00	-12.01	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 5290 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

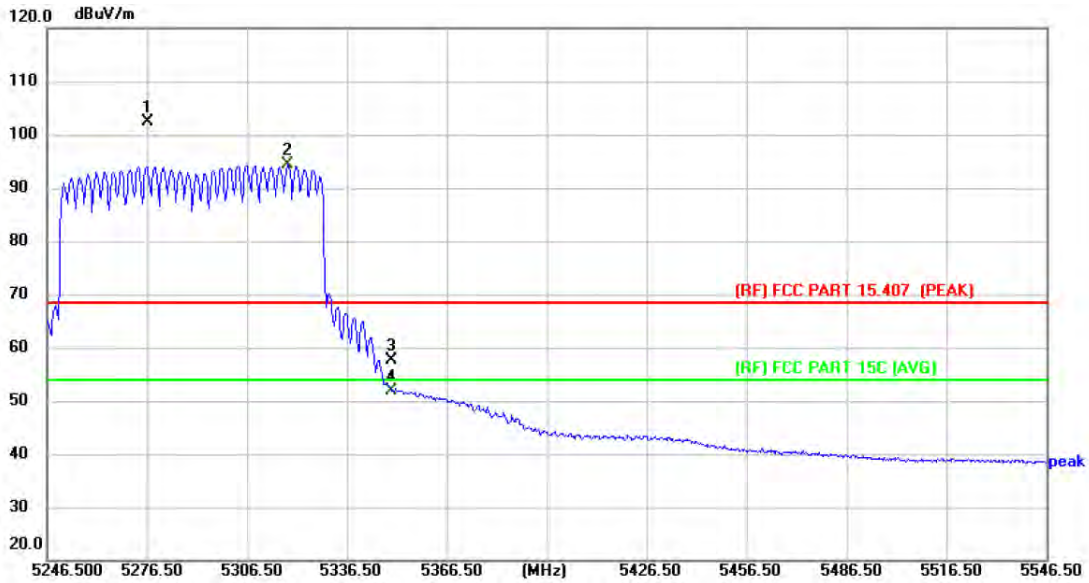

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5276.500	98.10	4.22	102.32	Fundamental Frequency		peak
2 *	5318.800	89.99	4.37	94.36			AVG
3	5350.000	53.02	4.55	57.57	68.30	-10.73	peak
4	5350.000	47.41	4.55	51.96	54.00	-2.04	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT160) Mode 5250 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

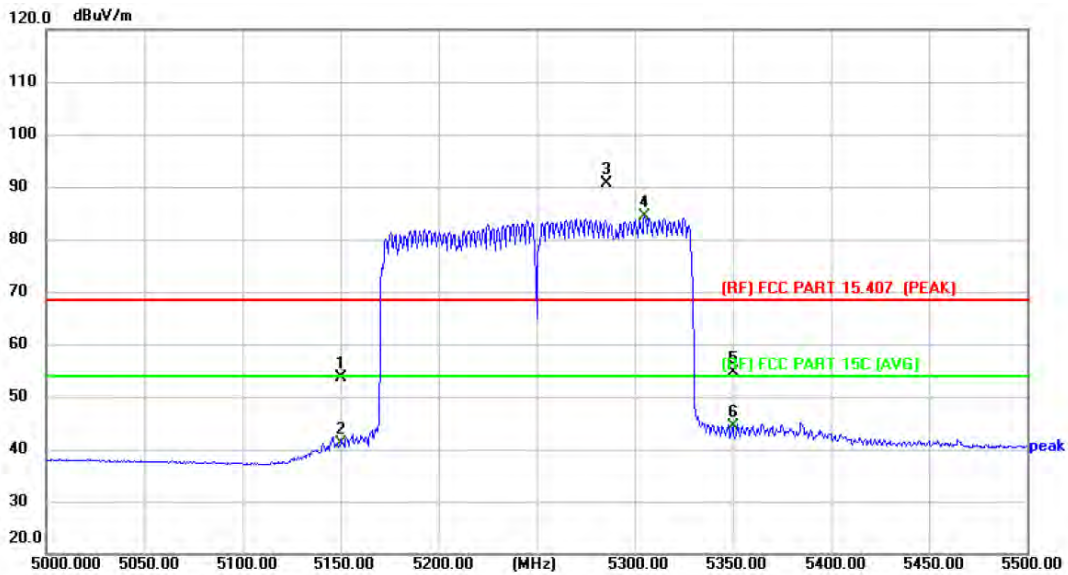


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	49.70	3.91	53.61	68.30	-14.69	peak
2	5150.000	37.32	3.91	41.23	54.00	-12.77	AVG
3 X	5285.500	86.48	4.24	90.72	Fundamental Frequency		peak
4 *	5305.000	80.00	4.28	84.28		AVG	
5	5350.000	50.09	4.55	54.64	68.30	-13.66	peak
6	5350.000	39.81	4.55	44.36	54.00	-9.64	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT160) Mode 5250 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

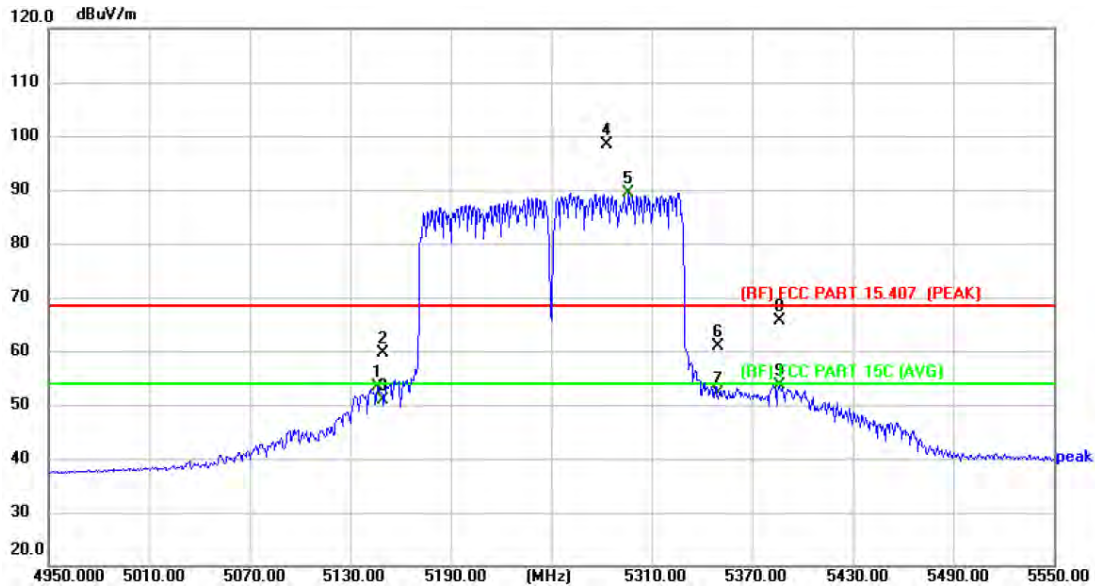

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5146.200	49.40	3.90	53.30	54.00	-0.70	AVG
2	5150.000	55.77	3.91	59.68	68.30	-8.62	peak
3	5150.000	46.88	3.91	50.79	54.00	-3.21	AVG
4 X	5283.000	94.13	4.23	98.36	Fundamental Frequency		peak
5 *	5296.200	85.20	4.25	89.45		AVG	
6	5350.000	56.29	4.55	60.84	68.30	-7.46	peak
7	5350.000	47.64	4.55	52.19	54.00	-1.81	AVG
8	5386.200	60.84	4.77	65.61	68.30	-2.69	peak
9	5386.200	48.76	4.77	53.53	54.00	-0.47	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE160) Mode 5250 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

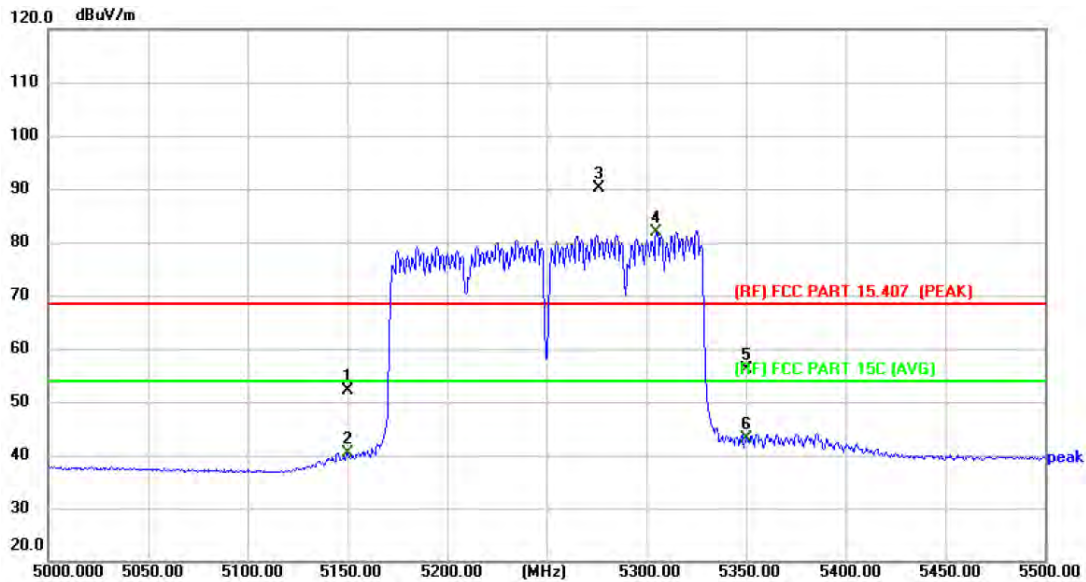


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	48.34	3.91	52.25	68.30	-16.05	peak
2	5150.000	36.51	3.91	40.42	54.00	-13.58	AVG
3 X	5276.000	85.91	4.22	90.13	Fundamental Frequency		peak
4 *	5305.000	77.71	4.28	81.99			AVG
5	5350.000	51.46	4.55	56.01	68.30	-12.29	peak
6	5350.000	38.62	4.55	43.17	54.00	-10.83	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE160) Mode 5250 MHz (U-NII-2A) -CDD		
<b>Remark:</b>			

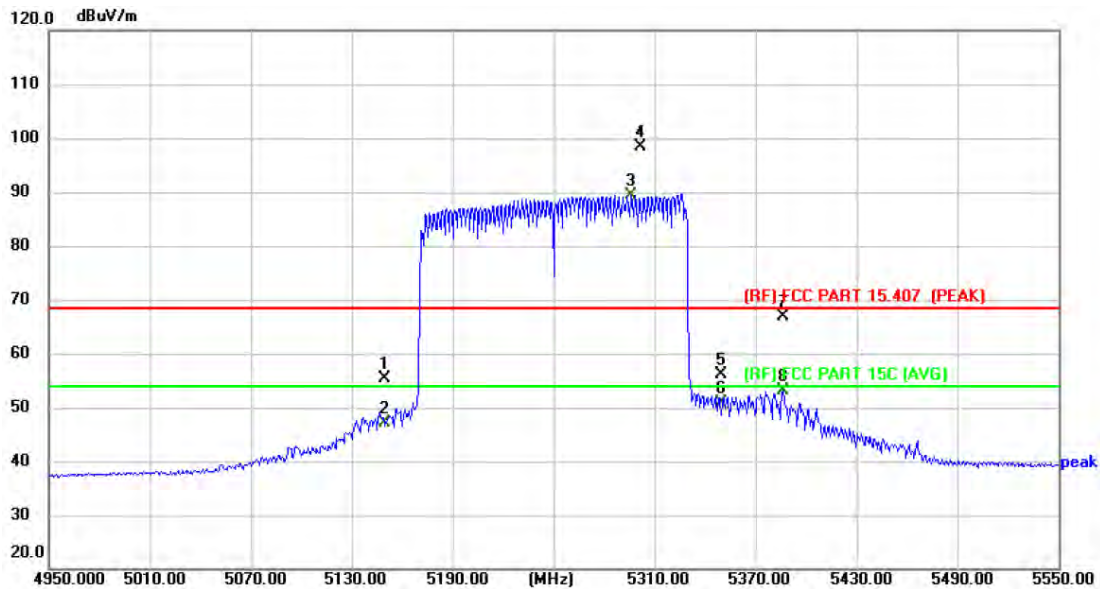

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	51.36	3.91	55.27	68.30	-13.03	peak
2	5150.000	43.12	3.91	47.03	54.00	-6.97	AVG
3 *	5296.200	85.08	4.25	89.33	54.00	35.33	AVG
4 X	5301.600	94.01	4.26	98.27	Fundamental Frequency		peak
5	5350.000	51.56	4.55	56.11			peak
6	5350.000	46.45	4.55	51.00	54.00	-3.00	AVG
7	5386.200	62.01	4.77	66.78	68.30	-1.52	peak
8	5386.200	48.42	4.77	53.19	54.00	-0.81	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11a Mode 5500 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

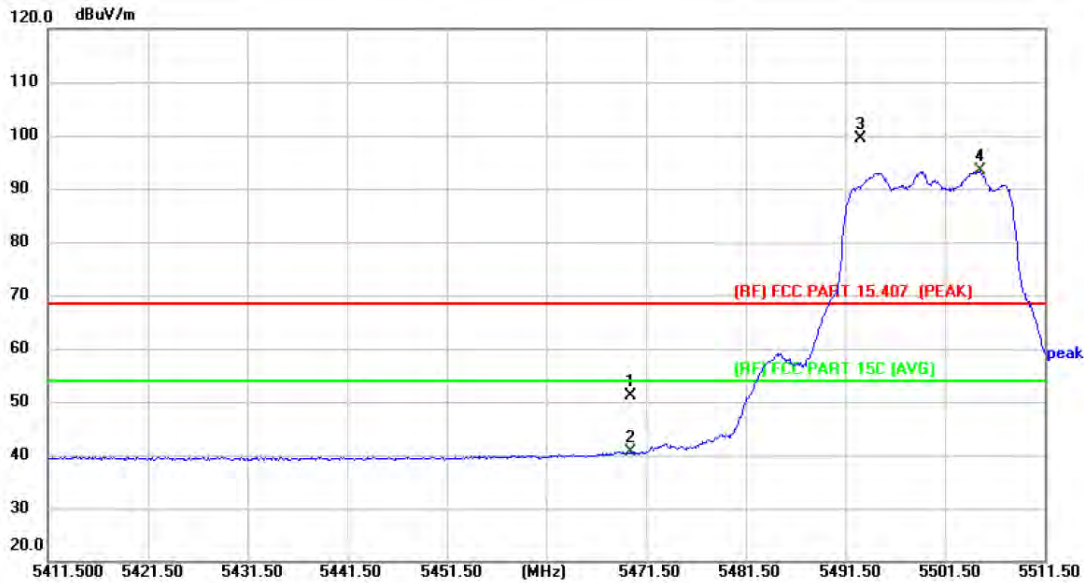


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	45.94	5.19	51.13	68.30	-17.17	peak
2	5470.000	35.48	5.19	40.67	54.00	-13.33	AVG
3 X	5493.000	94.06	5.30	99.36	Fundamental Frequency		peak
4 *	5505.000	87.96	5.32	93.28		AVG	

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11a Mode 5500 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

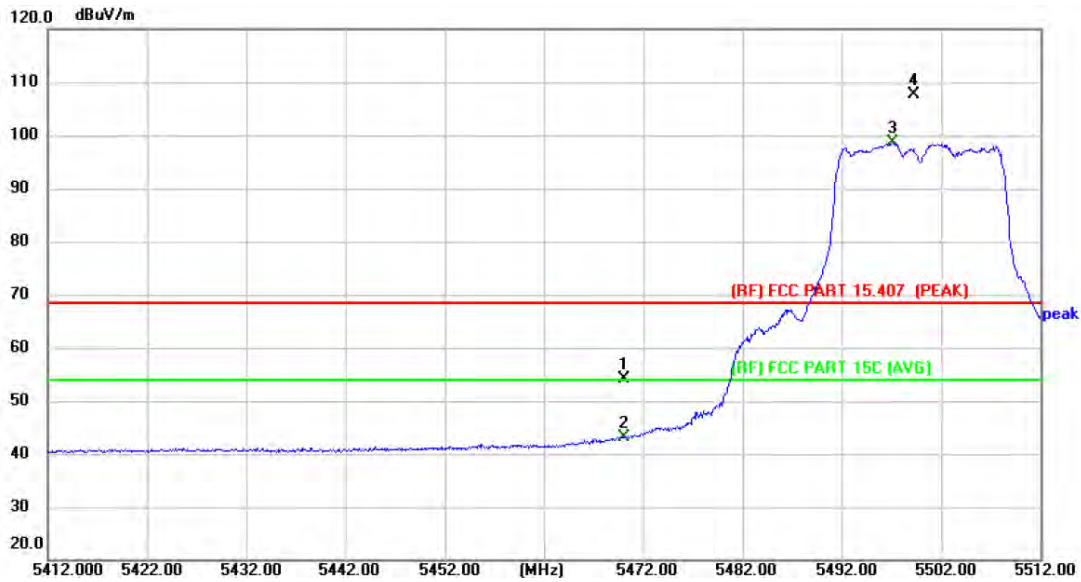

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	48.89	5.19	54.08	68.30	-14.22	peak
2	5470.000	37.88	5.19	43.07	54.00	-10.93	AVG
3 *	5497.100	93.29	5.31	98.60	Fundamental Frequency		AVG
4 X	5499.200	102.19	5.33	107.52			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11a Mode 5700 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5699.100	97.91	5.10	103.01	Fundamental Frequency		peak
2 *	5703.900	91.56	5.09	96.65			AVG
3	5725.000	56.16	5.02	61.18	68.30	-7.12	peak
4	5725.000	43.22	5.02	48.24	54.00	-5.76	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11a Mode 5700 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

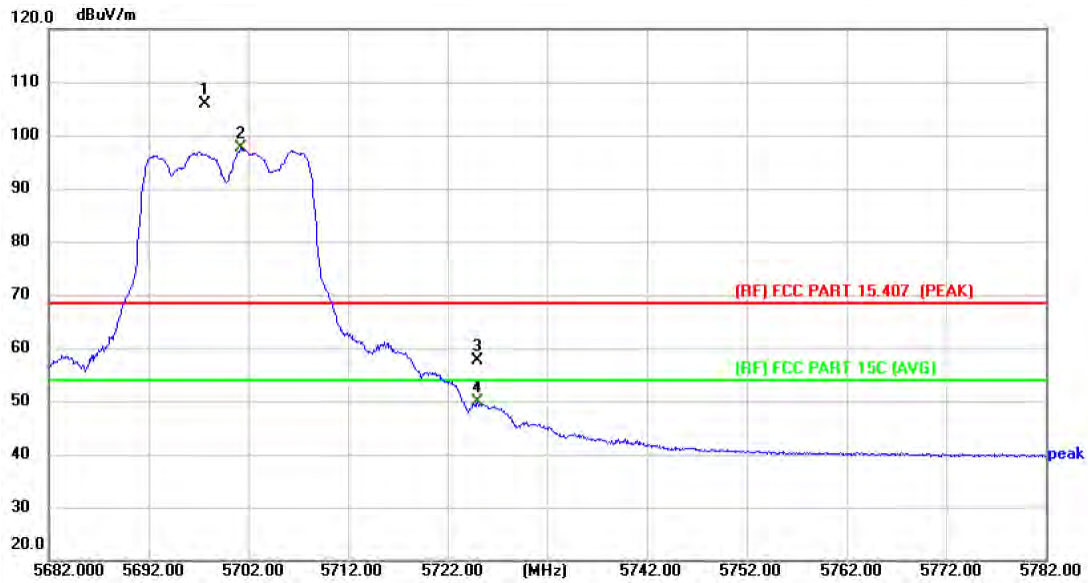

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5697.600	100.89	5.10	105.99	Fundamental Frequency		peak
2 *	5701.300	92.47	5.10	97.57			AVG
3	5725.000	52.65	5.02	57.67	68.30	-10.63	peak
4	5725.000	44.76	5.02	49.78	54.00	-4.22	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

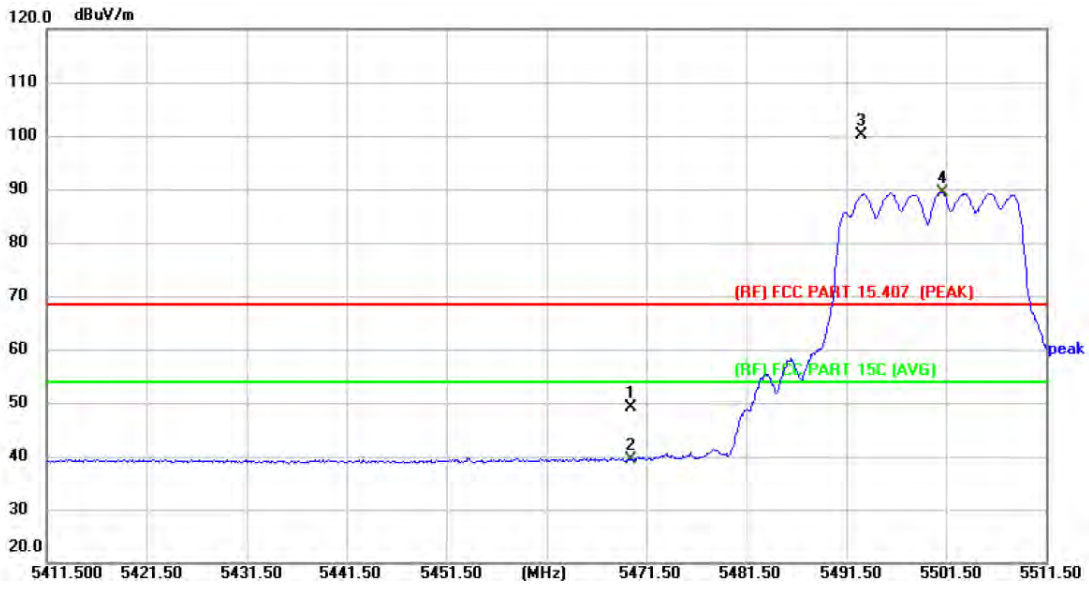


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	43.96	5.19	49.15	68.30	-19.15	peak
2	5470.000	34.20	5.19	39.39	54.00	-14.61	AVG
3 X	5493.000	94.90	5.30	100.20	Fundamental Frequency		peak
4 *	5501.100	84.14	5.33	89.47			AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

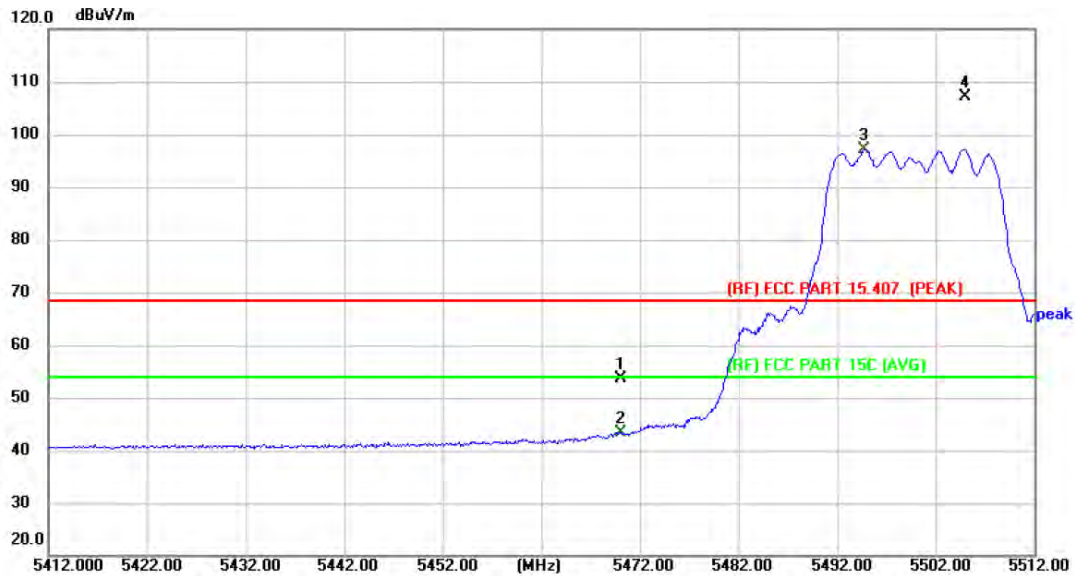

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	48.43	5.19	53.62	68.30	-14.68	peak
2	5470.000	38.18	5.19	43.37	54.00	-10.63	AVG
3 *	5494.700	91.89	5.31	97.20	Fundamental Frequency		AVG
4 X	5505.000	101.84	5.32	107.16			peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

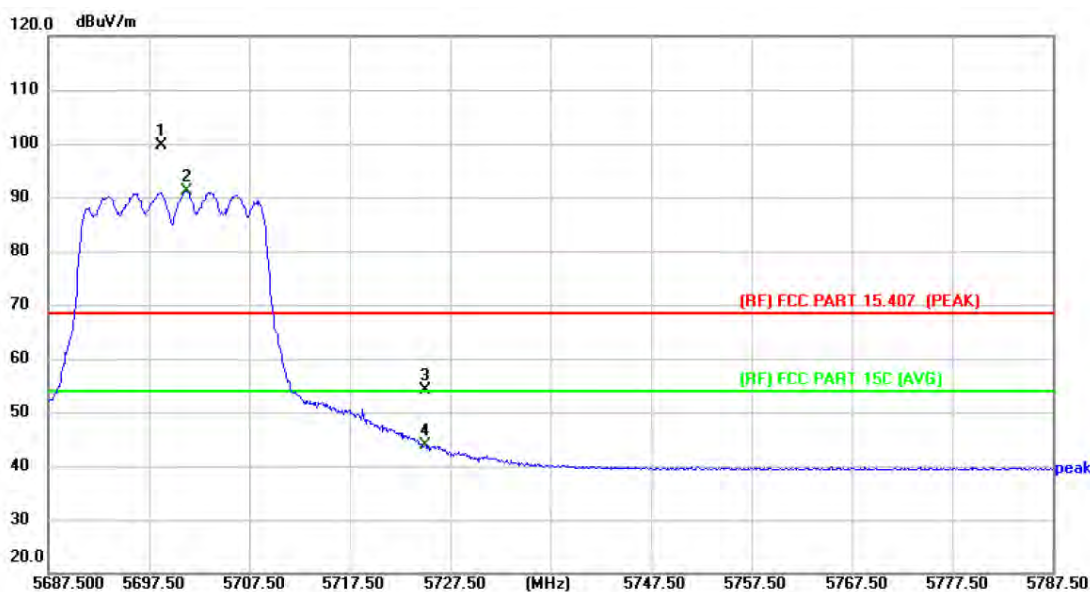


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5698.800	94.49	5.10	99.59	Fundamental Frequency		peak
2 *	5701.300	86.13	5.10	91.23			AVG
3	5725.000	49.21	5.02	54.23	68.30	-14.07	peak
4	5725.000	38.82	5.02	43.84	54.00	-10.16	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

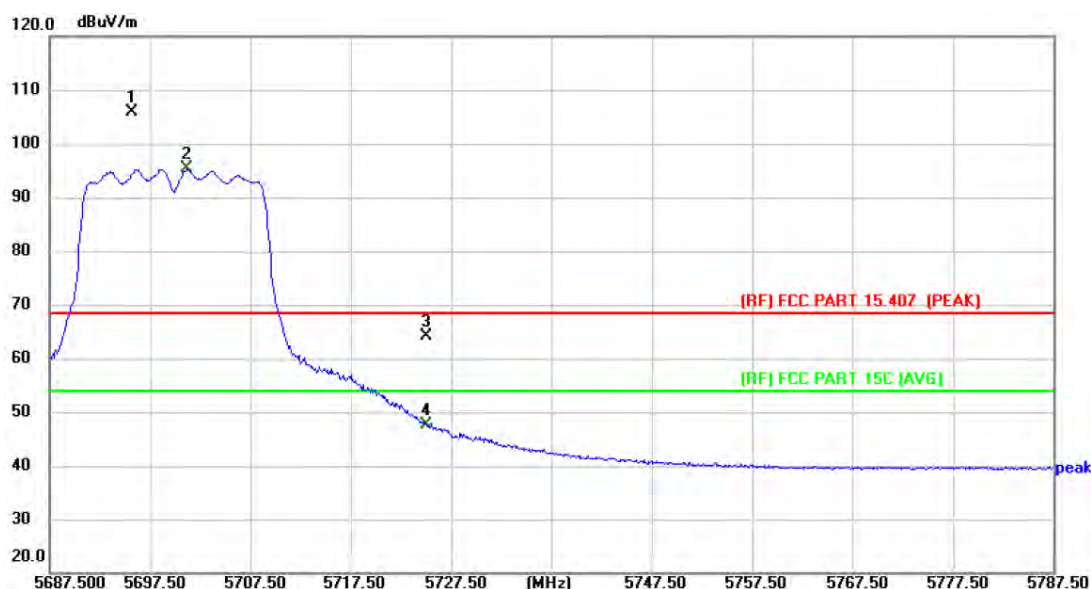

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5695.700	100.84	5.10	105.94	Fundamental Frequency		peak
2 *	5701.200	90.17	5.10	95.27			AVG
3	5725.000	59.11	5.02	64.13	68.30	-4.17	peak
4	5725.000	42.64	5.02	47.66	54.00	-6.34	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

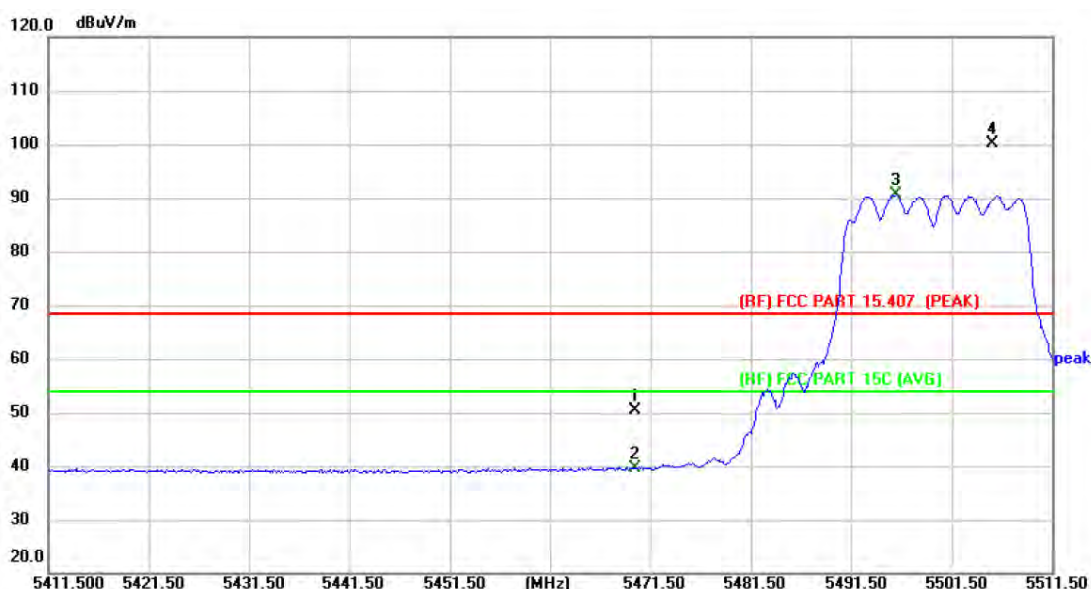


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	45.12	5.19	50.31	68.30	-17.99	peak
2	5470.000	34.40	5.19	39.59	54.00	-14.41	AVG
3 *	5496.000	85.25	5.31	90.56	Fundamental Frequency		AVG
4 X	5505.600	94.78	5.32	100.10			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

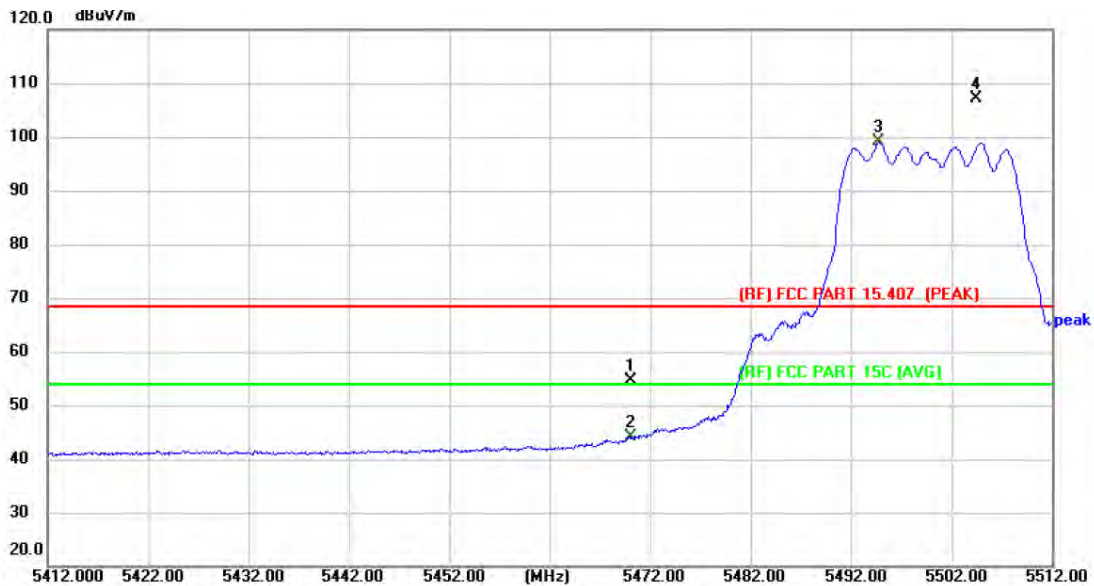

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	49.37	5.19	54.56	68.30	-13.74	peak
2	5470.000	39.06	5.19	44.25	54.00	-9.75	AVG
3 *	5494.700	93.76	5.31	99.07	Fundamental Frequency		AVG
4 X	5504.500	101.80	5.32	107.12		peak	


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

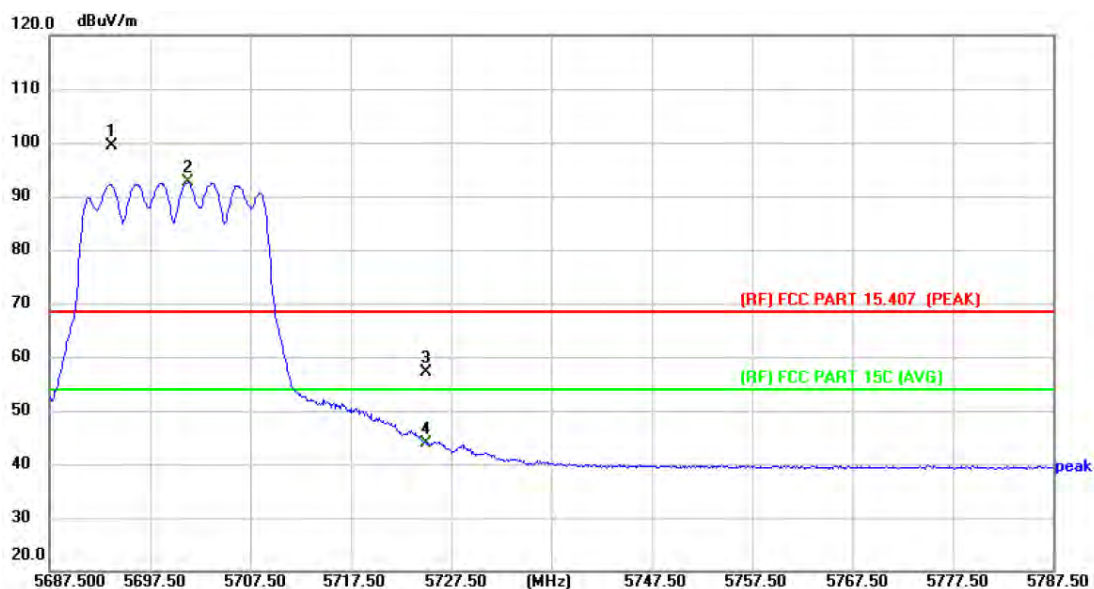


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5693.700	94.30	5.10	99.40	Fundamental Frequency		peak
2 *	5701.300	87.46	5.10	92.56			AVG
3	5725.000	52.01	5.02	57.03	68.30	-11.27	peak
4	5725.000	38.93	5.02	43.95	54.00	-10.05	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

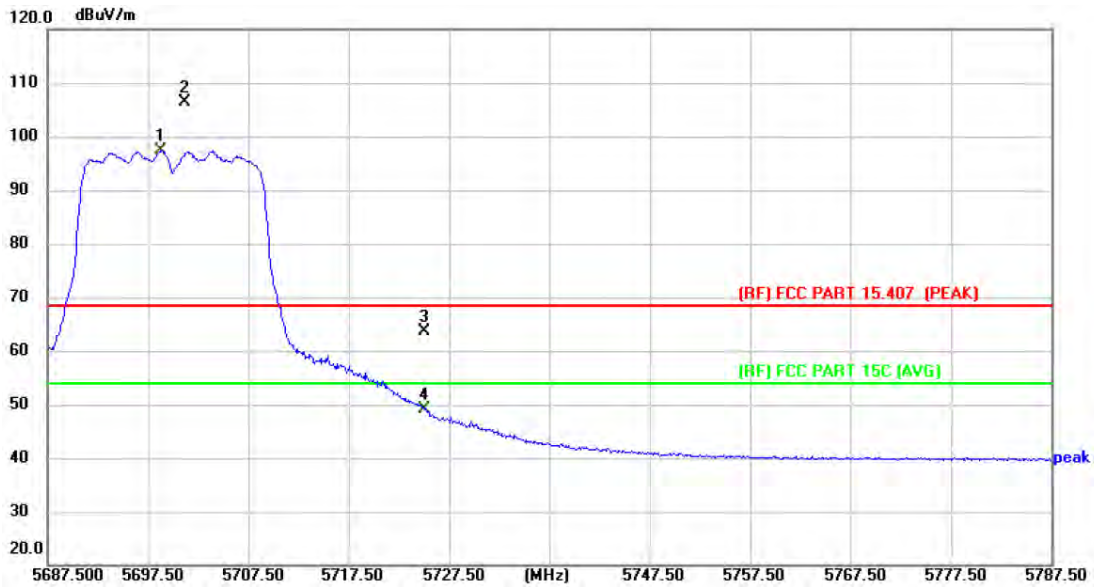

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5698.800	92.21	5.10	97.31	Fundamental Frequency		AVG
2 X	5701.100	101.40	5.10	106.50			peak
3	5725.000	58.56	5.02	63.58	68.30	-4.72	peak
4	5725.000	44.19	5.02	49.21	54.00	-4.79	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

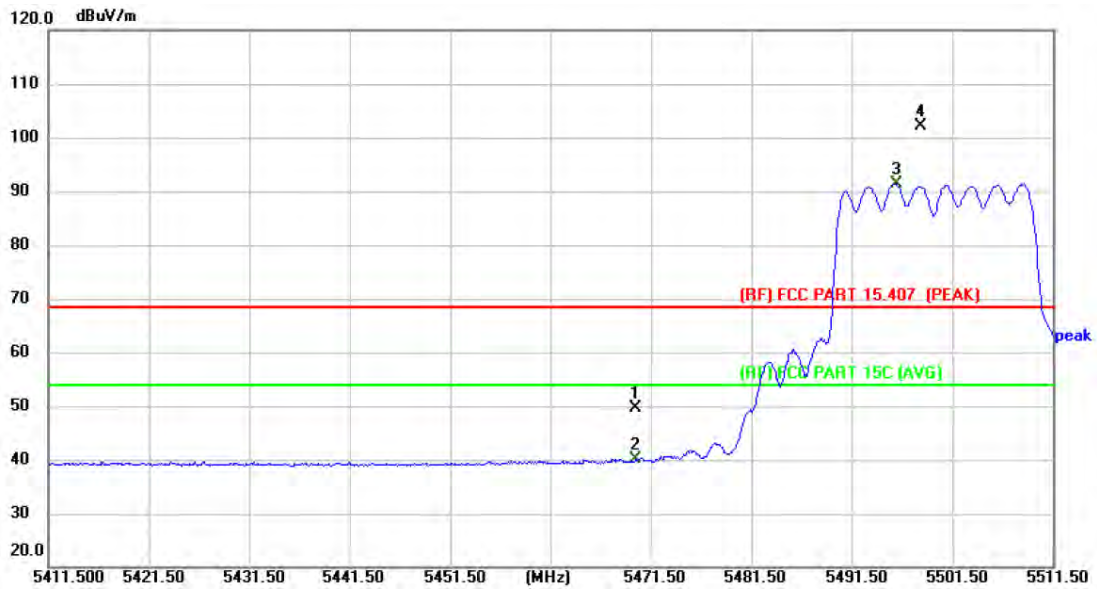


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	44.54	5.19	49.73	68.30	-18.57	peak
2	5470.000	34.87	5.19	40.06	54.00	-13.94	AVG
3 *	5495.900	86.08	5.31	91.39	Fundamental Frequency		AVG
4 X	5498.300	96.68	5.33	102.01			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

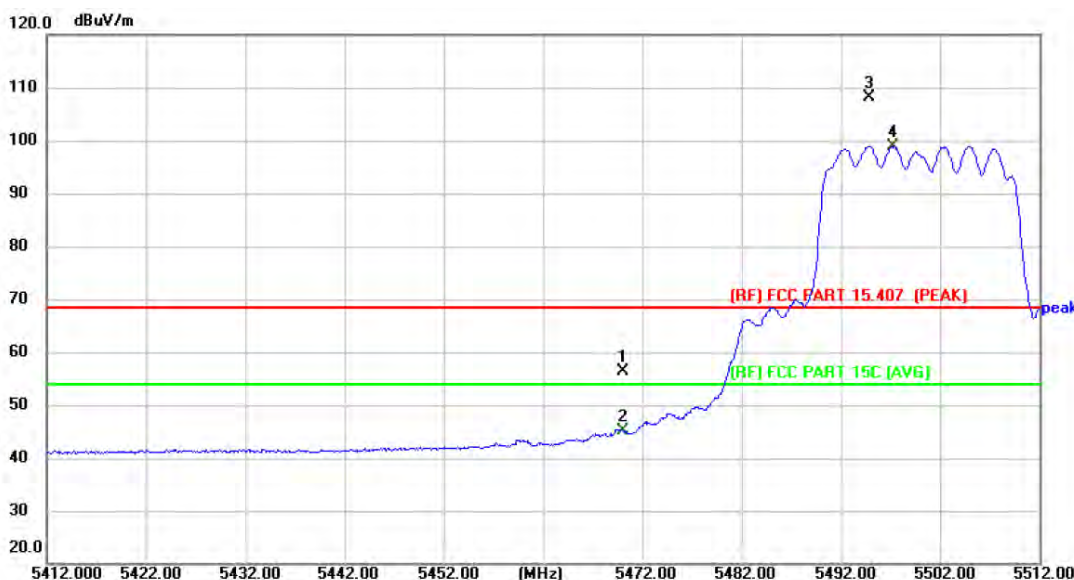

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	51.10	5.19	56.29	68.30	-12.01	peak
2	5470.000	39.94	5.19	45.13	54.00	-8.87	AVG
3 X	5494.800	102.70	5.31	108.01	Fundamental Frequency		peak
4 *	5497.300	93.63	5.32	98.95			AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5700 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

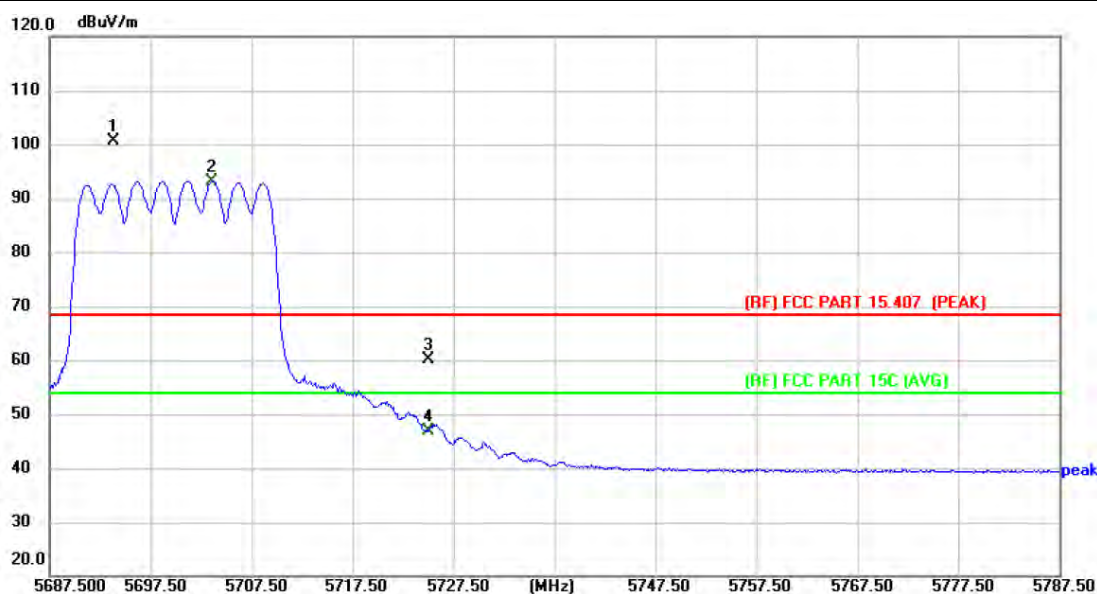


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5693.800	95.63	5.10	100.73	Fundamental Frequency		peak
2 *	5703.500	88.15	5.09	93.24			AVG
3	5725.000	54.99	5.02	60.01	68.30	-8.29	peak
4	5725.000	41.89	5.02	46.91	54.00	-7.09	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5700 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

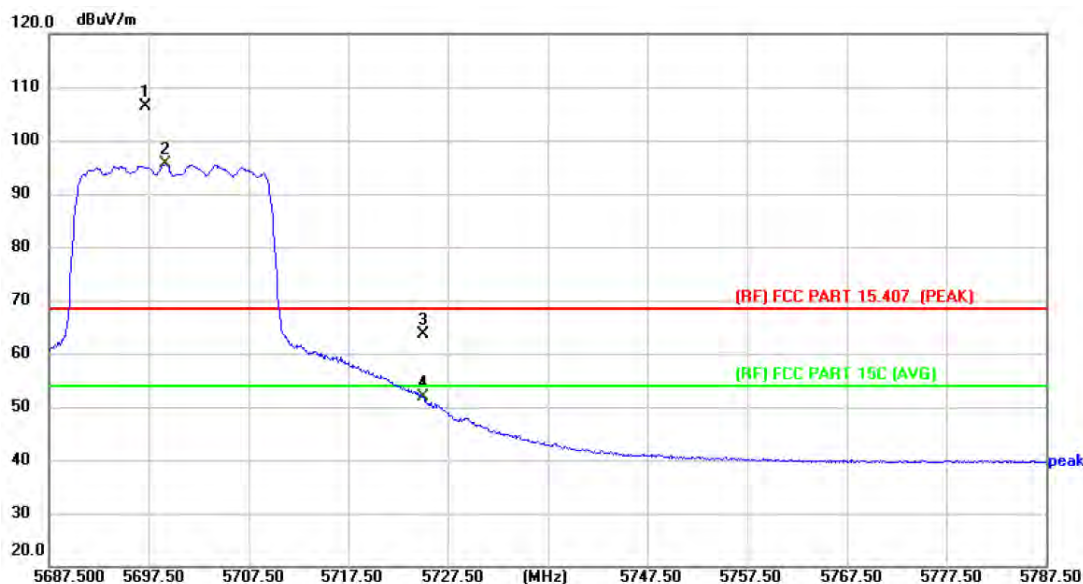

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5697.200	101.36	5.10	106.46	Fundamental Frequency		peak
2 *	5699.200	90.43	5.10	95.53			AVG
3	5725.000	58.58	5.02	63.60	68.30	-4.70	peak
4	5725.000	46.88	5.02	51.90	54.00	-2.10	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

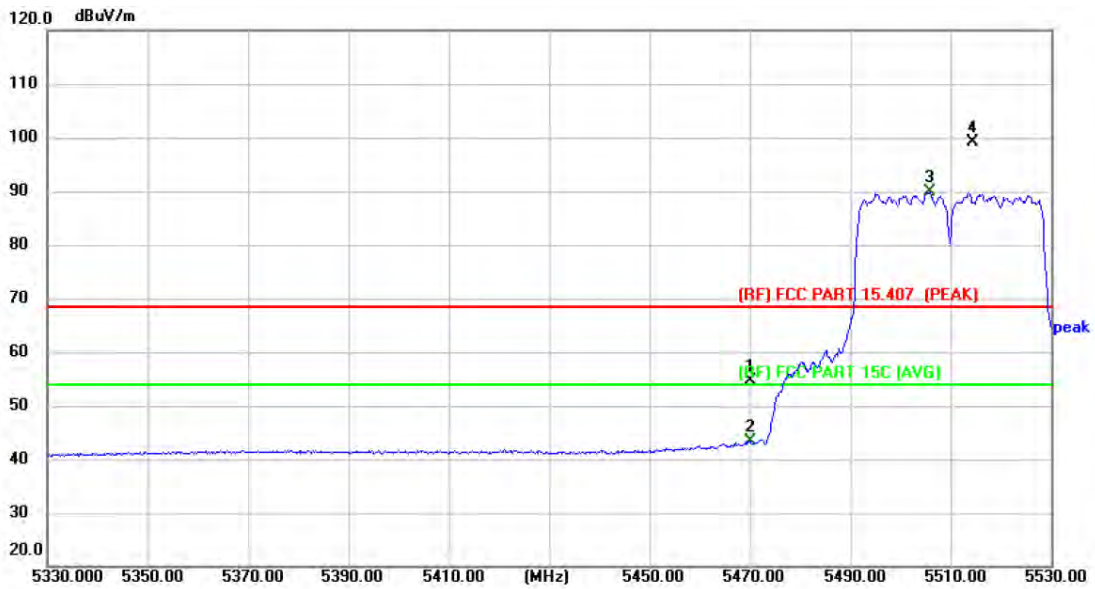


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	49.44	5.19	54.63	68.30	-13.67	peak
2	5470.000	38.13	5.19	43.32	54.00	-10.68	AVG
3 *	5505.800	84.55	5.32	89.87	Fundamental Frequency		AVG
4 X	5514.400	93.91	5.29	99.20			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

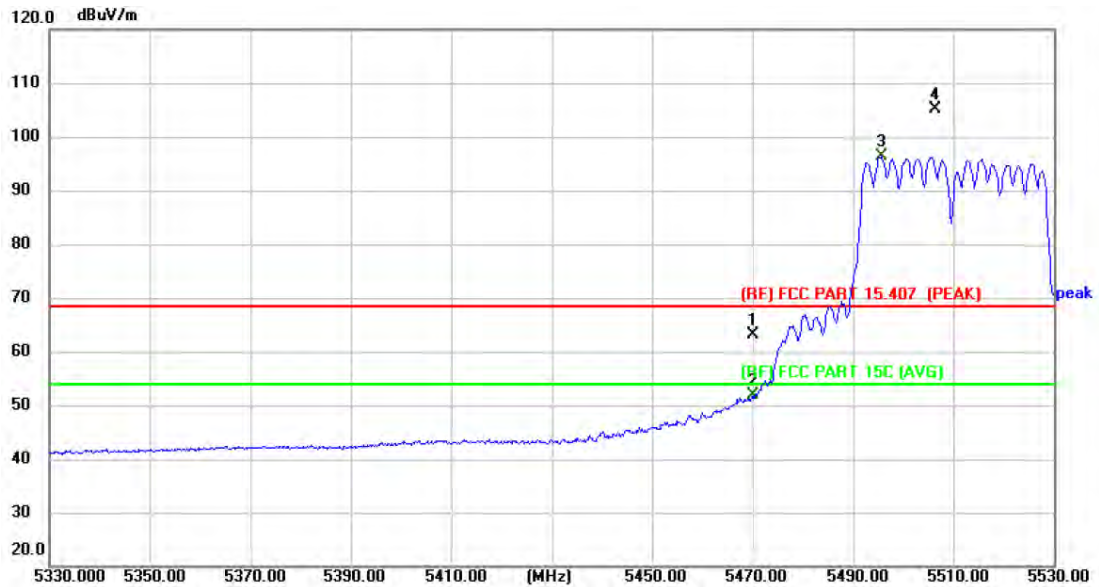

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	57.92	5.19	63.11	68.30	-5.19	peak
2	5470.000	46.67	5.19	51.86	54.00	-2.14	AVG
3 *	5495.600	90.96	5.31	96.27	Fundamental Frequency		AVG
4 X	5506.400	99.75	5.32	105.07			peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

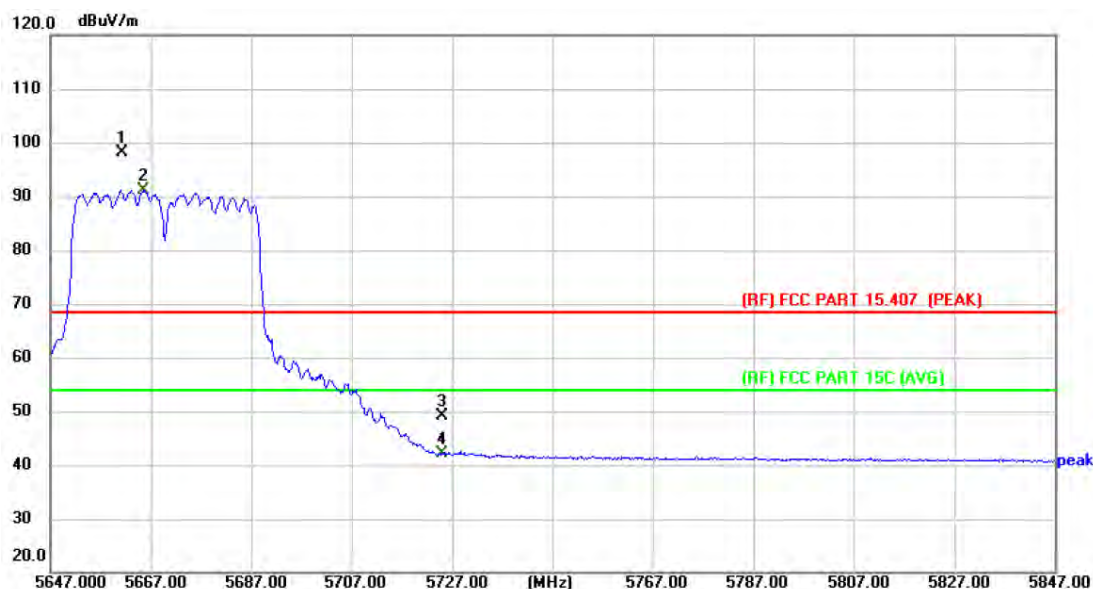


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5661.200	92.92	5.11	98.03	Fundamental Frequency		peak
2 *	5665.600	86.14	5.10	91.24			AVG
3	5725.000	44.08	5.02	49.10	68.30	-19.20	peak
4	5725.000	37.03	5.02	42.05	54.00	-11.95	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

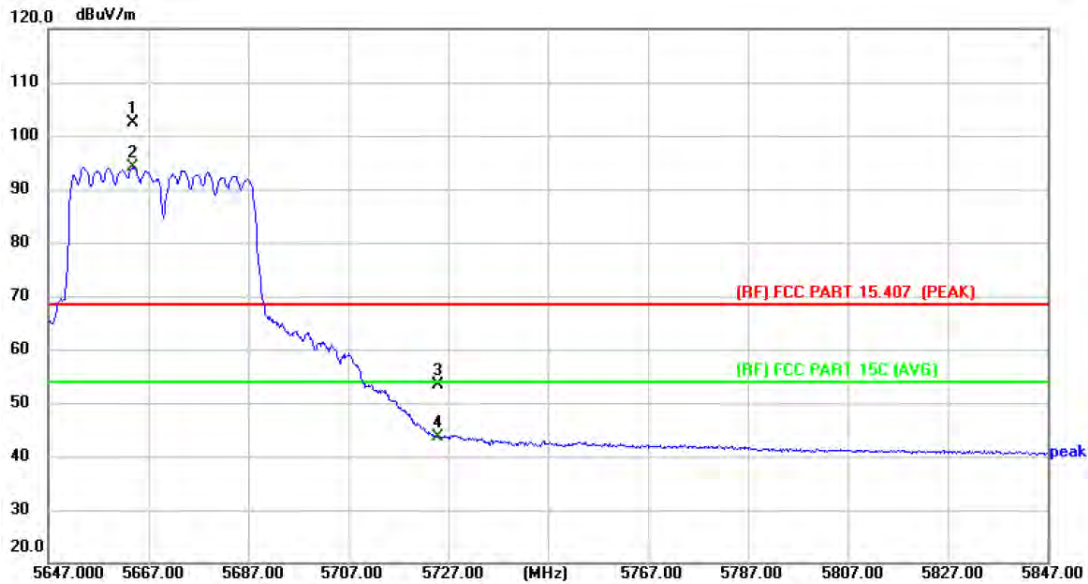

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5664.000	97.29	5.10	102.39	Fundamental Frequency		peak
2 *	5664.000	89.06	5.10	94.16			AVG
3	5725.000	48.34	5.02	53.36	68.30	-14.94	peak
4	5725.000	38.55	5.02	43.57	54.00	-10.43	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

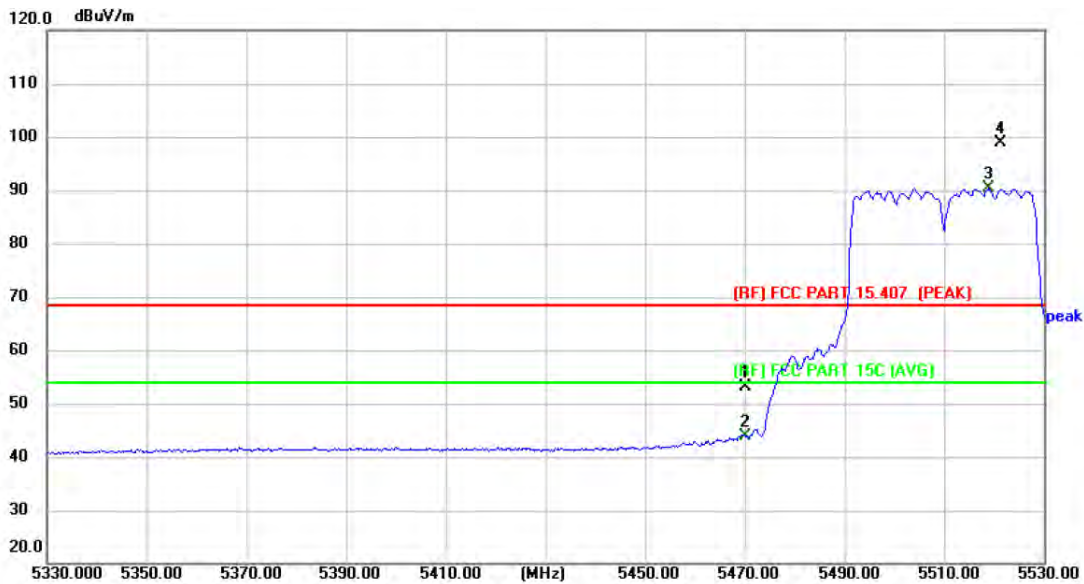


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	48.02	5.19	53.21	68.30	-15.09	peak
2	5470.000	38.67	5.19	43.86	54.00	-10.14	AVG
3 *	5518.800	85.09	5.29	90.38	Fundamental Frequency		AVG
4 X	5521.200	93.66	5.28	98.94			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

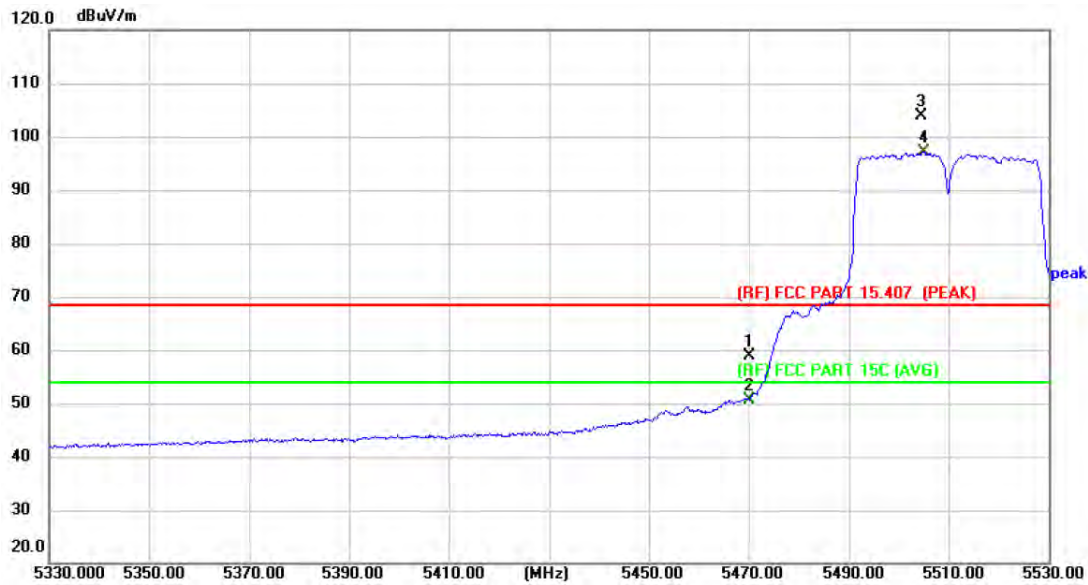

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	53.72	5.19	58.91	68.30	-9.39	peak
2	5470.000	45.48	5.19	50.67	54.00	-3.33	AVG
3 X	5504.600	98.44	5.32	103.76	Fundamental Frequency		peak
4 *	5505.000	91.80	5.32	97.12			AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

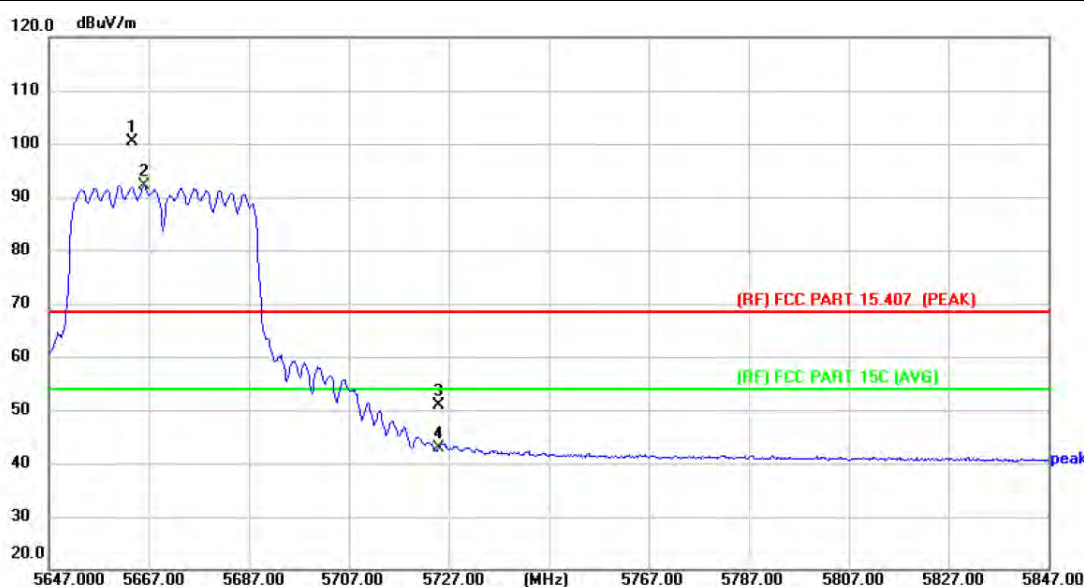


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5663.600	95.34	5.11	100.45	Fundamental Frequency		peak
2 *	5666.000	87.00	5.10	92.10			AVG
3	5725.000	45.74	5.02	50.76	68.30	-17.54	peak
4	5725.000	37.92	5.02	42.94	54.00	-11.06	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

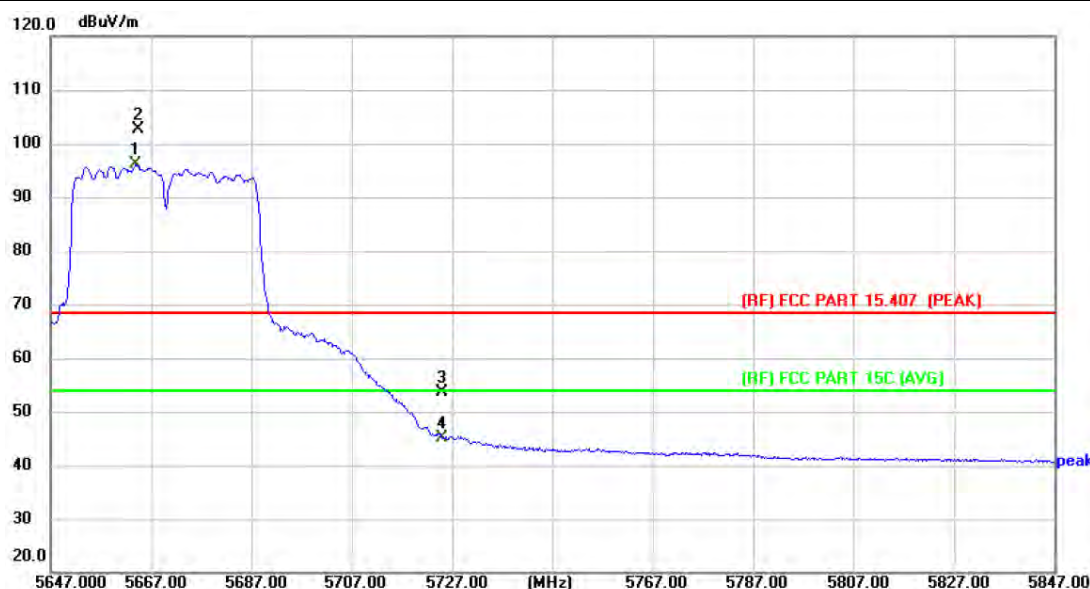

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5664.000	90.95	5.10	96.05	Fundamental Frequency		AVG
2 X	5664.400	97.65	5.10	102.75			peak
3	5725.000	48.68	5.02	53.70	68.30	-14.60	peak
4	5725.000	40.11	5.02	45.13	54.00	-8.87	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE40)) Mode 5510 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

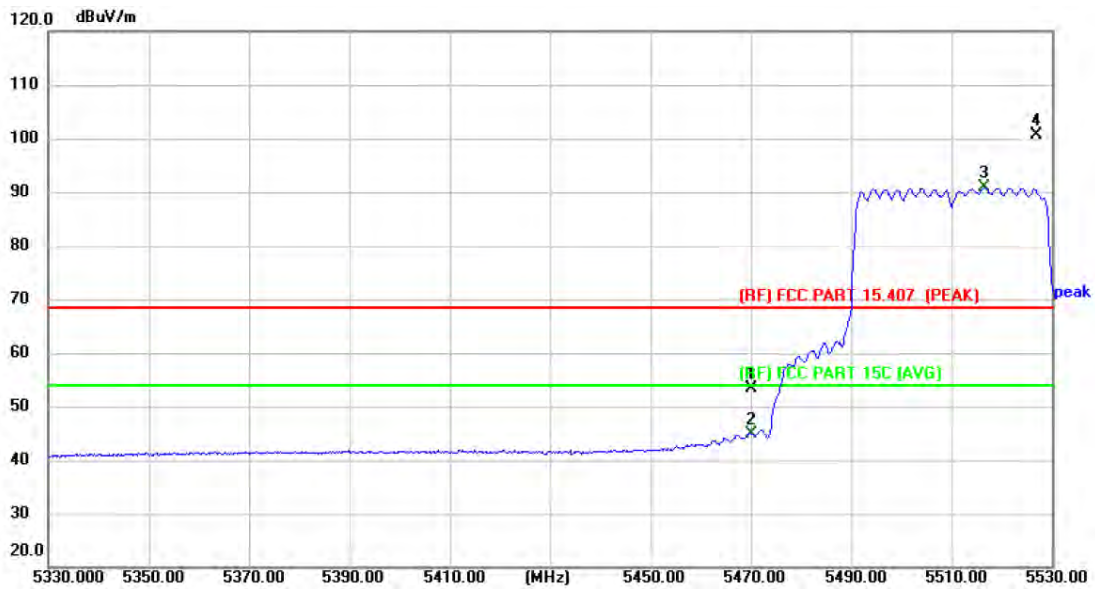


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	48.19	5.19	53.38	68.30	-14.92	peak
2	5470.000	39.77	5.19	44.96	54.00	-9.04	AVG
3 *	5516.600	85.53	5.29	90.82	Fundamental Frequency		AVG
4 X	5526.800	95.45	5.27	100.72			peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5510 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

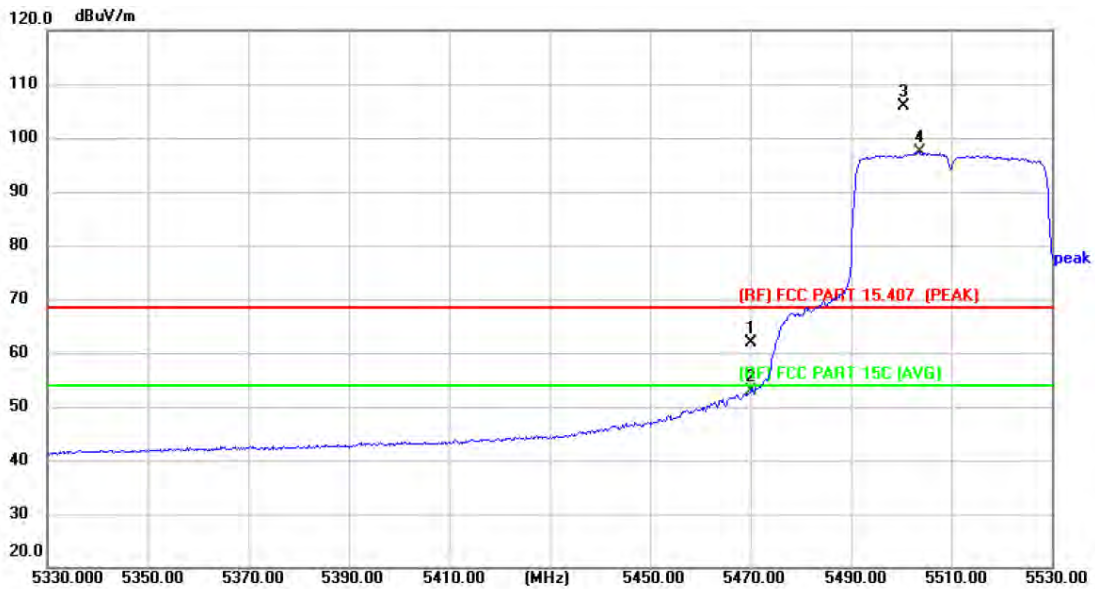

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	56.59	5.19	61.78	68.30	-6.52	peak
2	5470.000	47.78	5.19	52.97	54.00	-1.03	AVG
3 X	5500.400	100.64	5.33	105.97	Fundamental Frequency		peak
4 *	5503.600	91.99	5.32	97.31			AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	22.8°C	<b>Relative Humidity:</b>	47%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5670 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

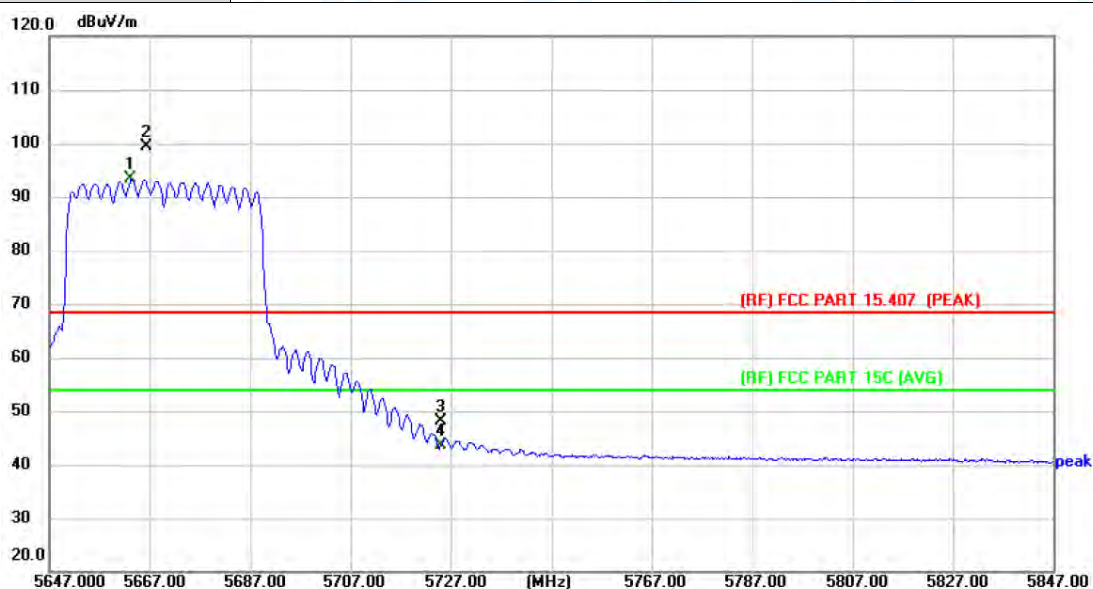

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5663.200	88.26	5.11	93.37	Fundamental Frequency		AVG
2 X	5666.200	94.35	5.10	99.45			peak
3	5725.000	43.14	5.02	48.16	68.30	-20.14	peak
4	5725.000	38.59	5.02	43.61	54.00	-10.39	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

