


| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

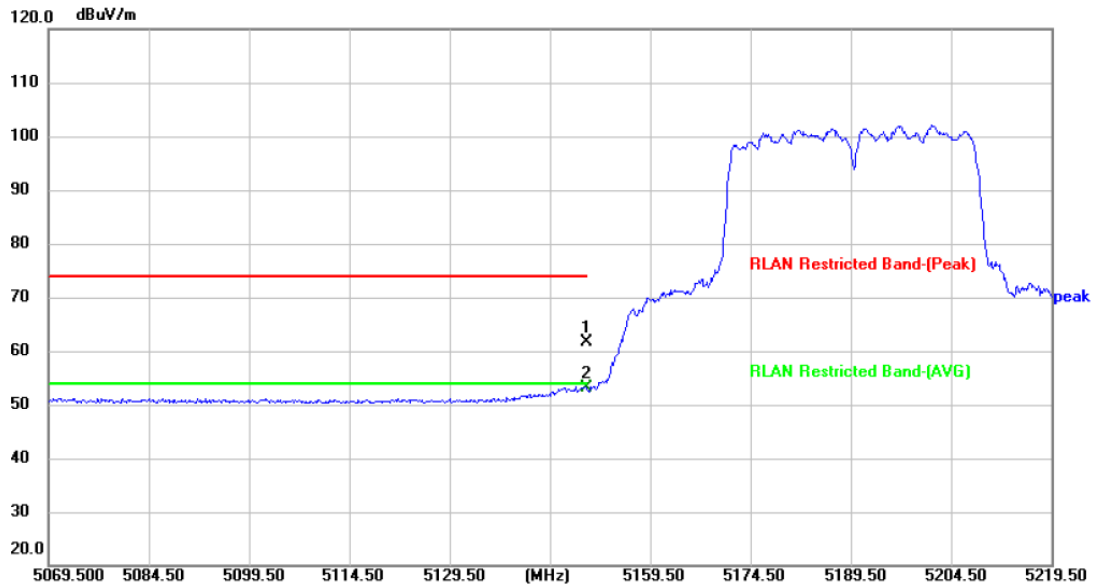


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 47.60 | 14.08 | 61.68 | 74.00 | -12.32 | peak | P |
| 2 * | 5150.000 | 39.13 | 14.08 | 53.21 | 54.00 | -0.79 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

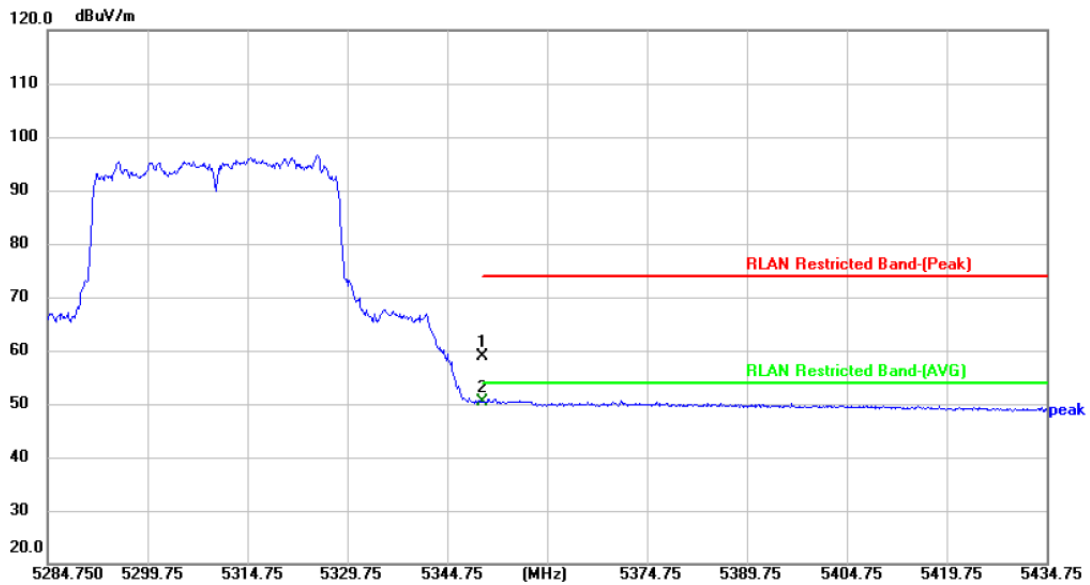


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5350.000 | 44.27 | 14.68 | 58.95 | 74.00 | -15.05 | peak | P |
| 2 * | 5350.000 | 35.66 | 14.68 | 50.34 | 54.00 | -3.66 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

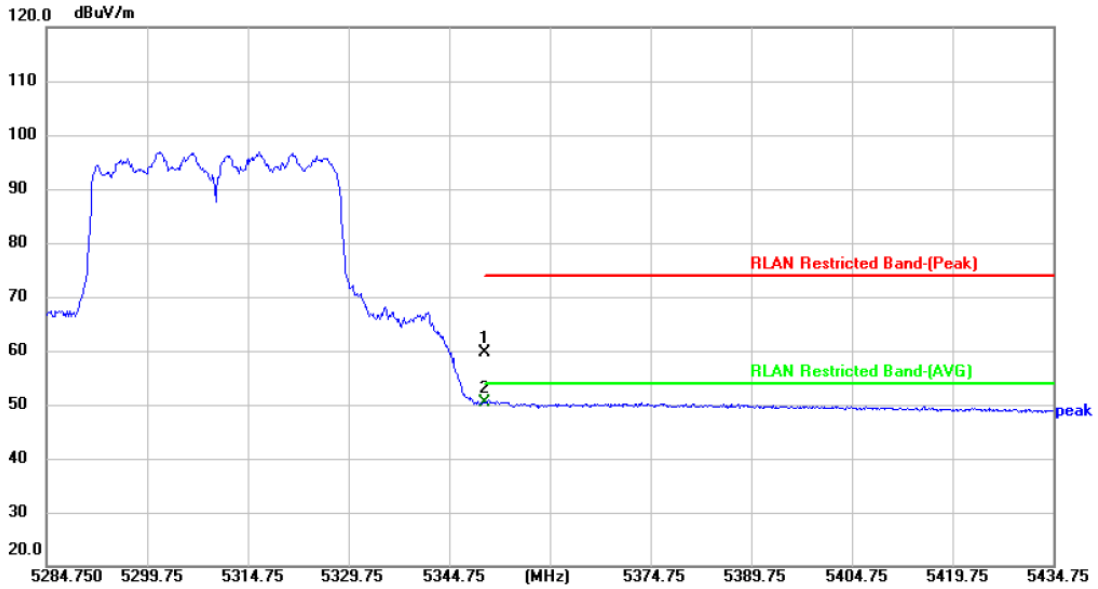


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5350.000 | 45.00 | 14.68 | 59.68 | 74.00 | -14.32 | peak | P |
| 2 * | 5350.000 | 35.66 | 14.68 | 50.34 | 54.00 | -3.66 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

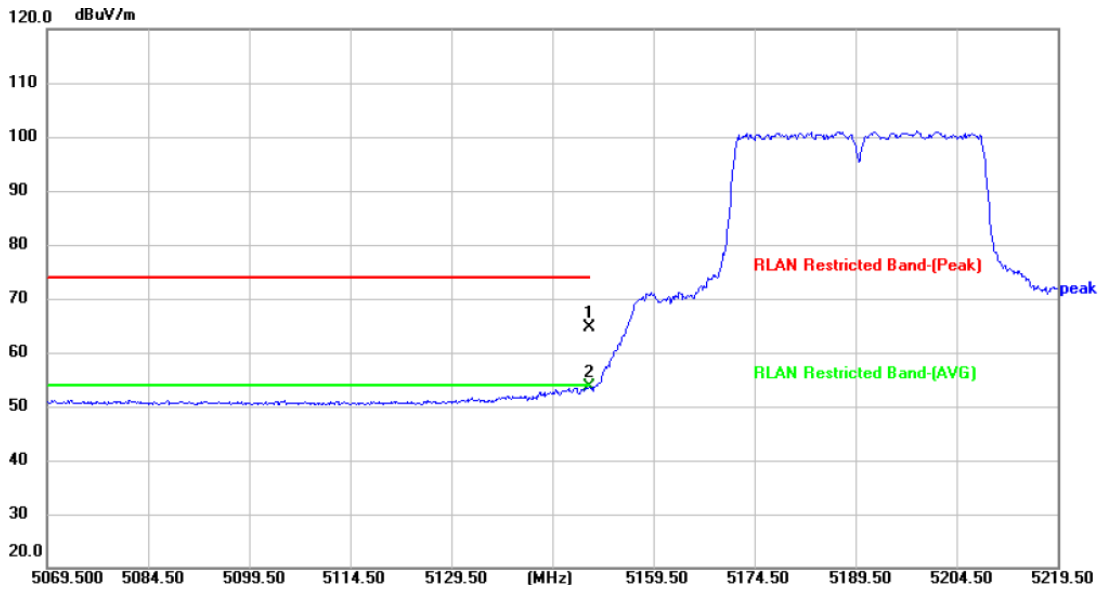


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 50.46 | 14.08 | 64.54 | 74.00 | -9.46 | peak | P |
| 2 * | 5150.000 | 39.54 | 14.08 | 53.62 | 54.00 | -0.38 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

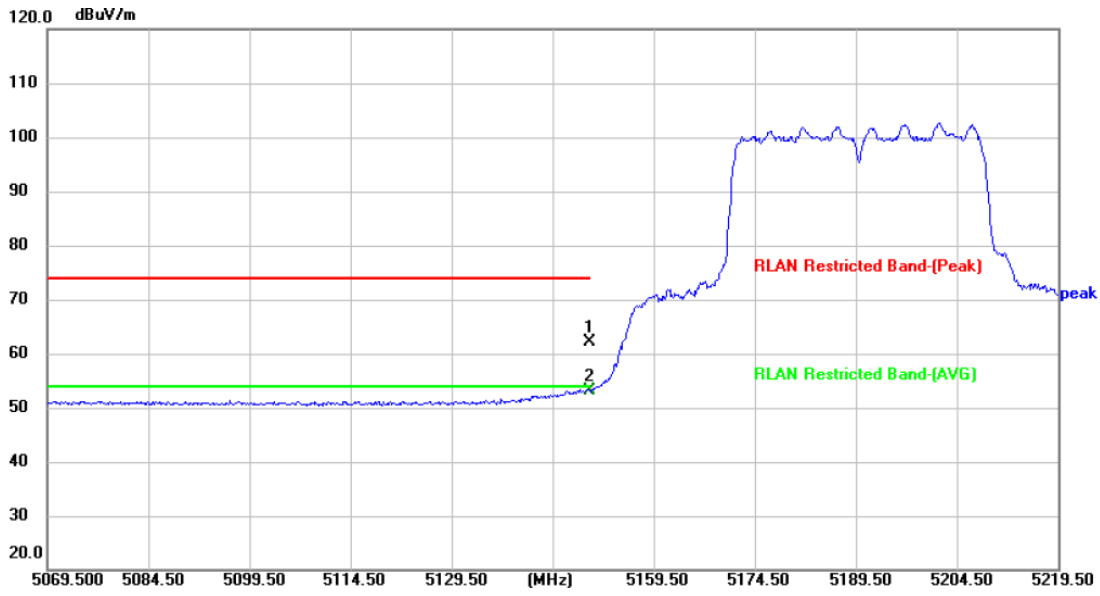


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 48.04 | 14.08 | 62.12 | 74.00 | -11.88 | peak | P |
| 2 * | 5150.000 | 39.16 | 14.08 | 53.24 | 54.00 | -0.76 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

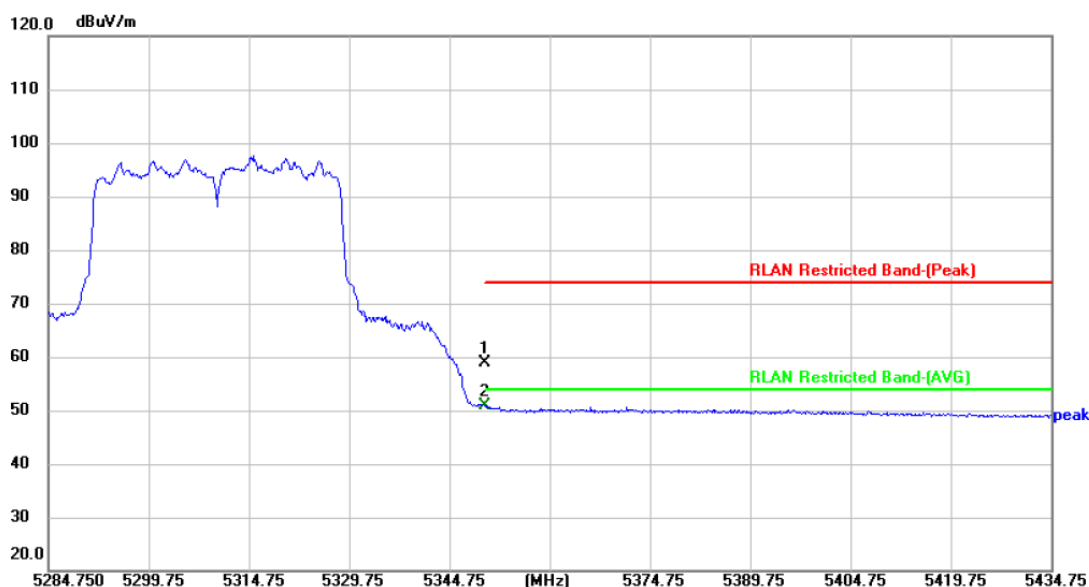


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5350.000 | 44.18 | 14.68 | 58.86 | 74.00 | -15.14 | peak | P |
| 2 * | 5350.000 | 36.20 | 14.68 | 50.88 | 54.00 | -3.12 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

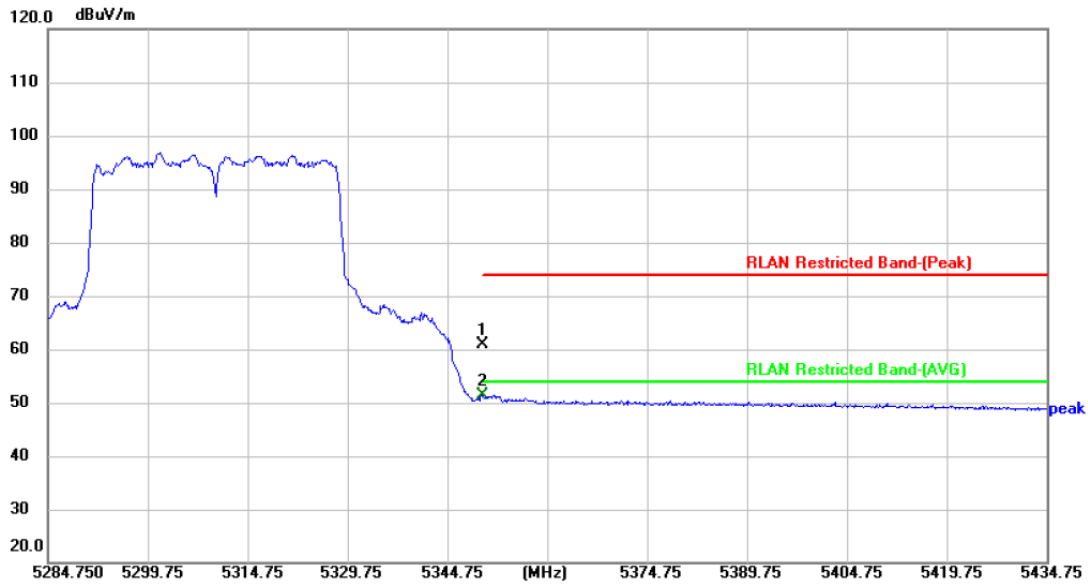


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5350.000 | 46.18 | 14.68 | 60.86 | 74.00 | -13.14 | peak | P |
| 2 * | 5350.000 | 36.77 | 14.68 | 51.45 | 54.00 | -2.55 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

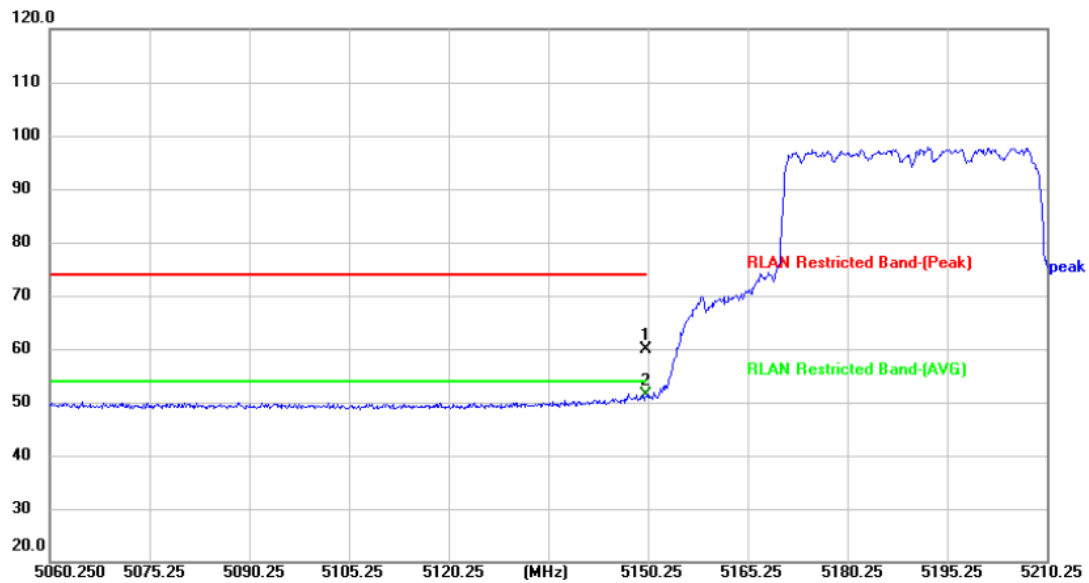


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|-------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 45.69 | 14.08 | 59.77 | 74.00 | -14.23 | peak | P |
| 2 * | 5150.000 | 37.21 | 14.08 | 51.29 | 54.00 | -2.71 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

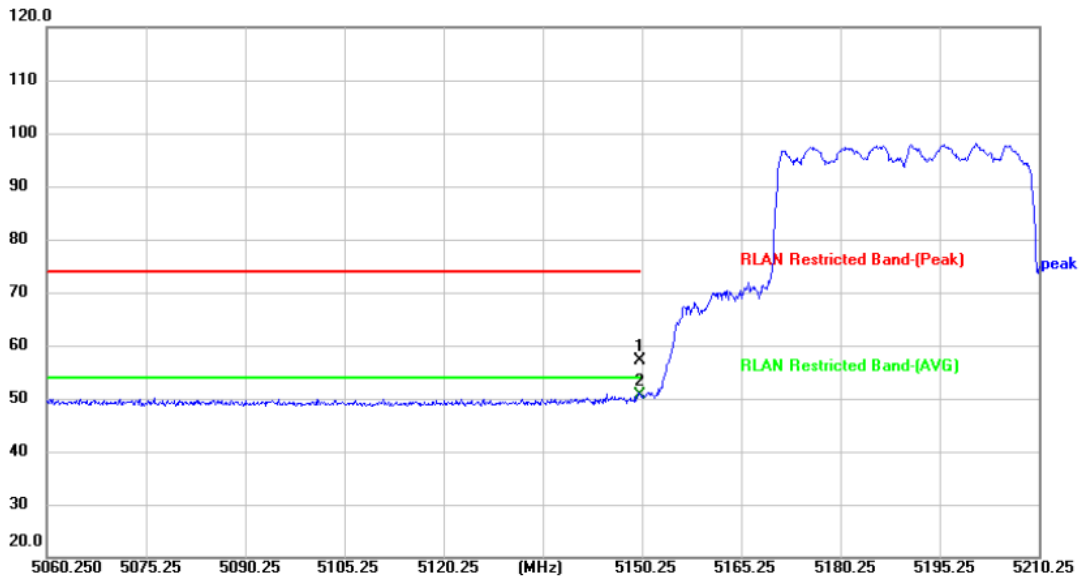


| No. | Frequency (MHz) | Reading (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|-------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 43.01 | 14.08 | 57.09 | 74.00 | -16.91 | peak | P |
| 2 * | 5150.000 | 36.58 | 14.08 | 50.66 | 54.00 | -3.34 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE40)Mode 5310 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

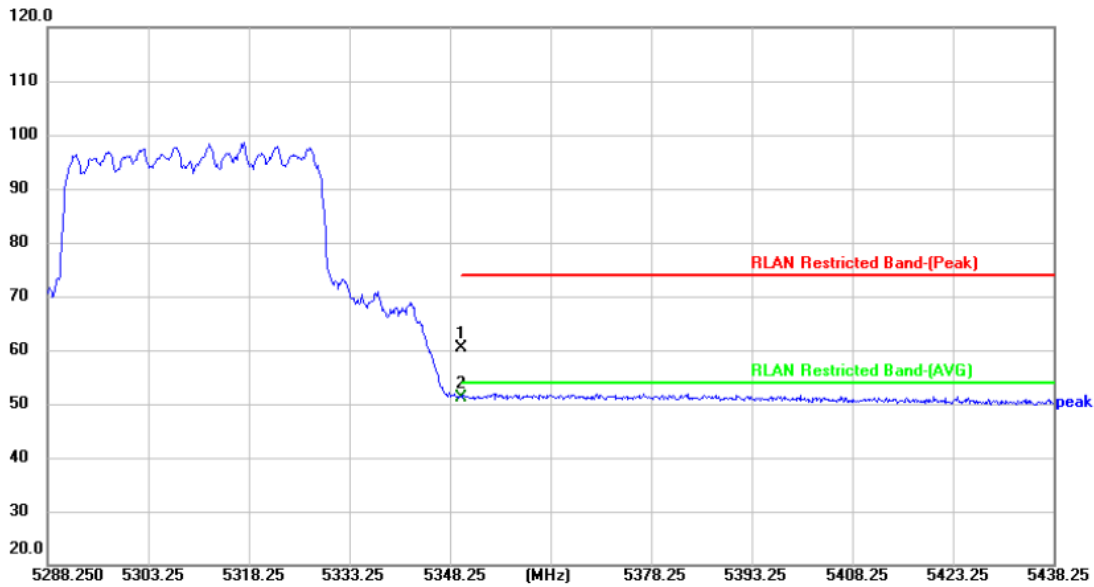


| No. | Frequency (MHz) | Reading (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|-------------|----------------|----------------|-------------|----------|-----|
| 1 | 5350.000 | 45.64 | 14.68 | 60.32 | 74.00 | -13.68 | peak | P |
| 2 * | 5350.000 | 36.54 | 14.68 | 51.22 | 54.00 | -2.78 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5310 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

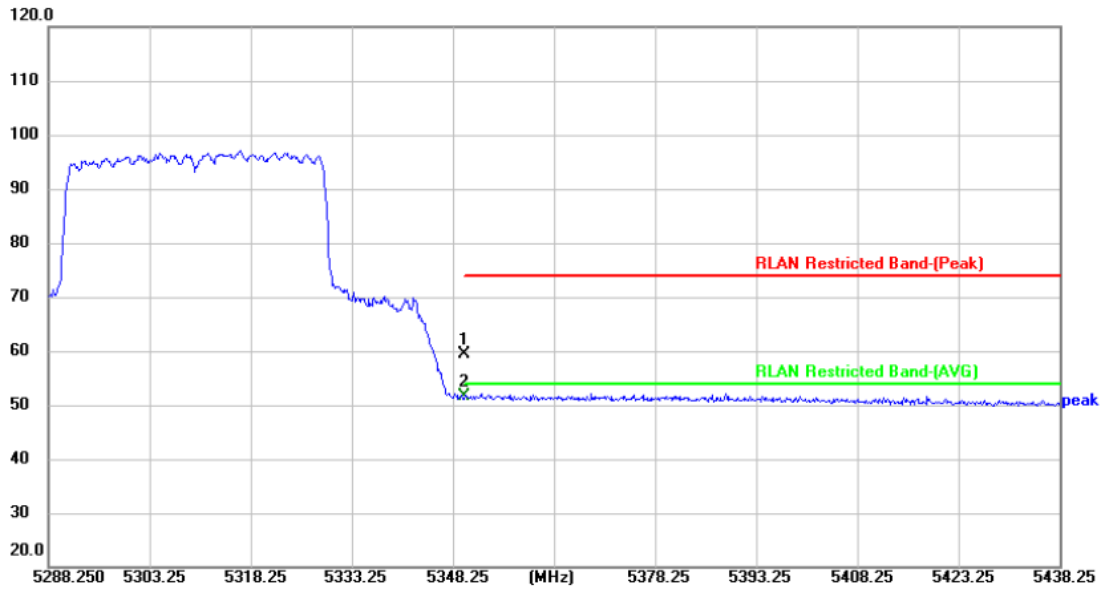


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|-------------|----------------|----------------|-------------|----------|-----|
| 1 | 5350.000 | 44.66 | 14.68 | 59.34 | 74.00 | -14.66 | peak | P |
| 2 * | 5350.000 | 36.96 | 14.68 | 51.64 | 54.00 | -2.36 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

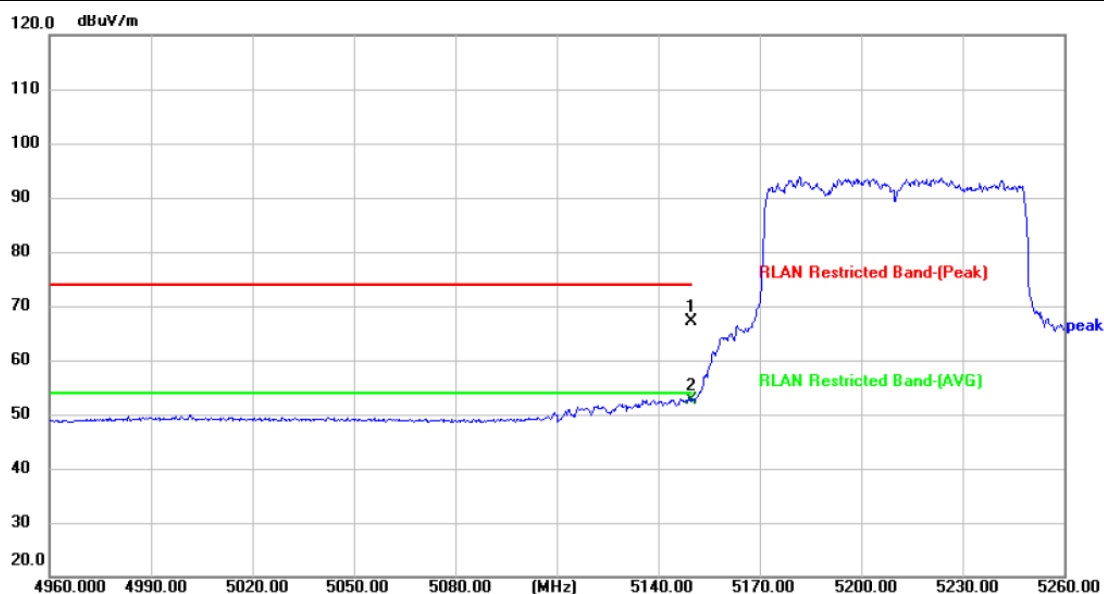


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 53.17 | 14.08 | 67.25 | 74.00 | -6.75 | peak | P |
| 2 * | 5150.000 | 38.55 | 14.08 | 52.63 | 54.00 | -1.37 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

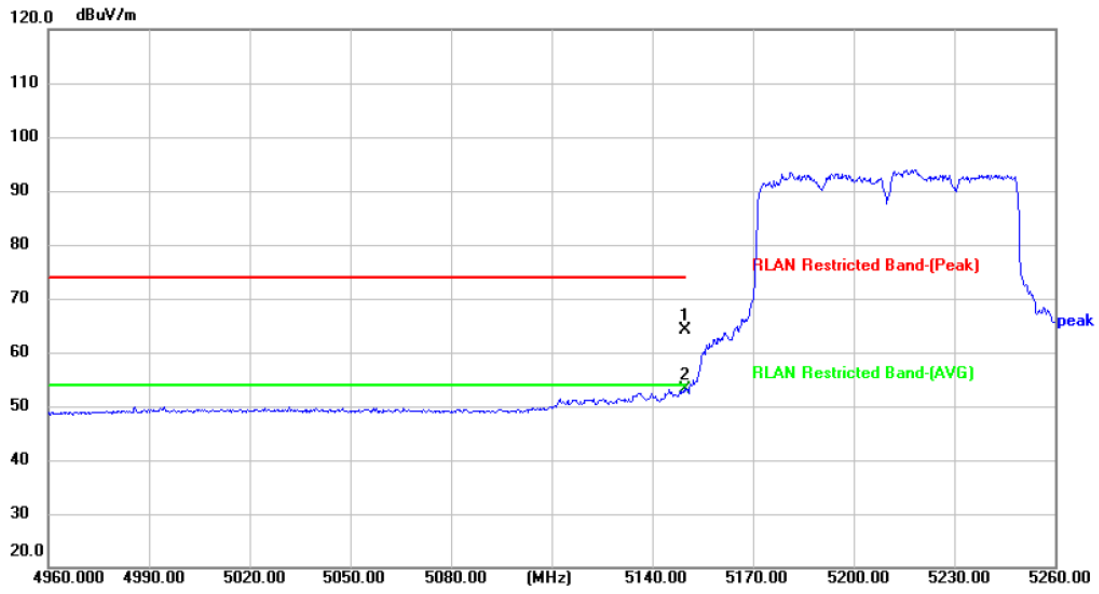


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 49.93 | 14.08 | 64.01 | 74.00 | -9.99 | peak | P |
| 2 * | 5150.000 | 39.03 | 14.08 | 53.11 | 54.00 | -0.89 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

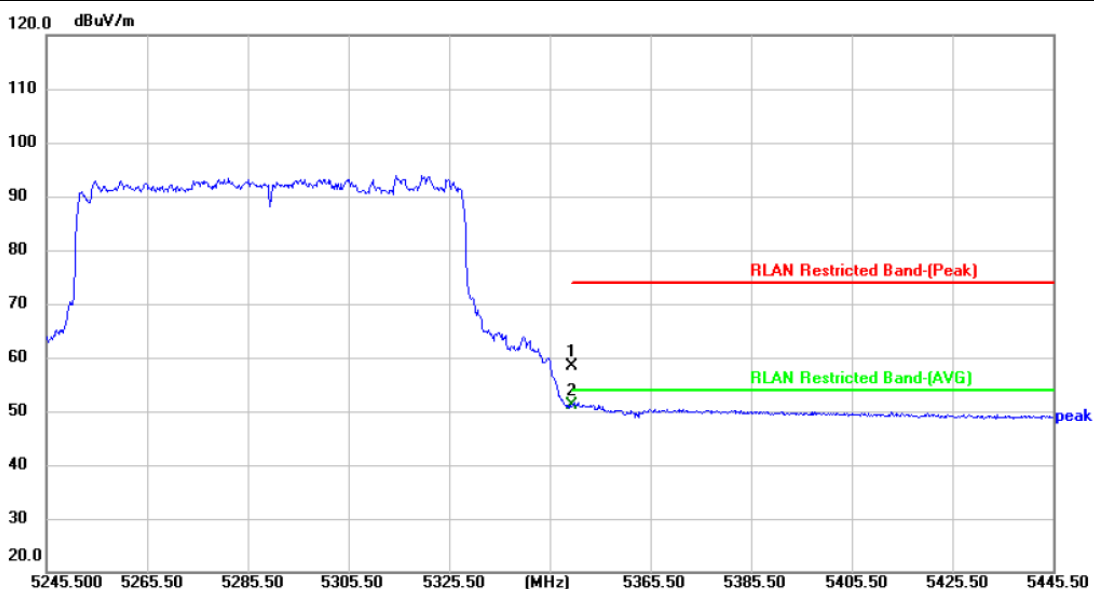


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5350.000 | 43.80 | 14.68 | 58.48 | 74.00 | -15.52 | peak | P |
| 2 * | 5350.000 | 36.37 | 14.68 | 51.05 | 54.00 | -2.95 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

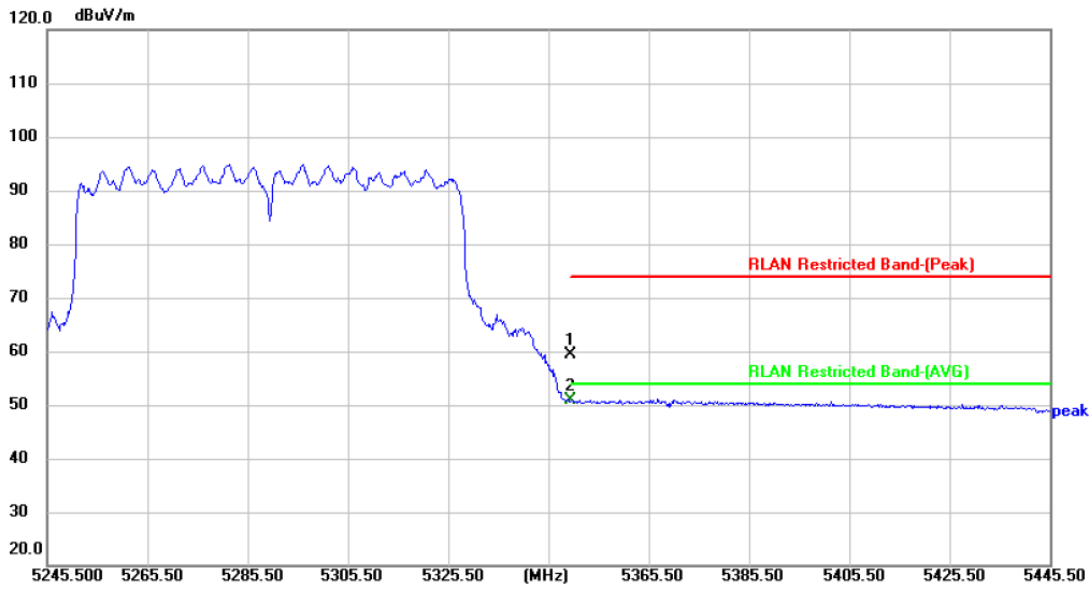


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5350.000 | 44.69 | 14.68 | 59.37 | 74.00 | -14.63 | peak | P |
| 2 * | 5350.000 | 36.13 | 14.68 | 50.81 | 54.00 | -3.19 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5210 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

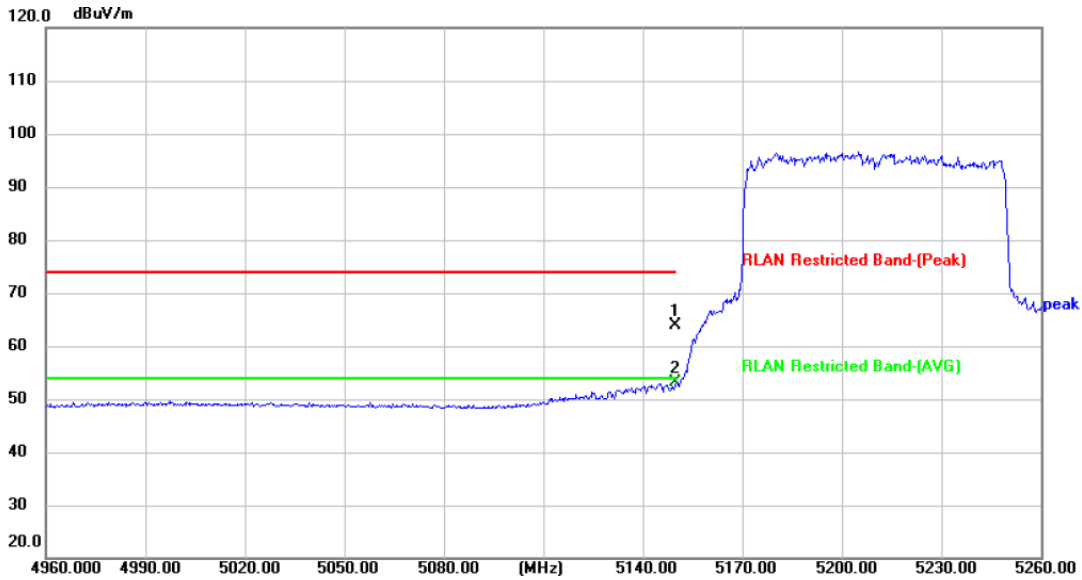


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 49.79 | 14.08 | 63.87 | 74.00 | -10.13 | peak | P |
| 2 * | 5150.000 | 39.02 | 14.08 | 53.10 | 54.00 | -0.90 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5210 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

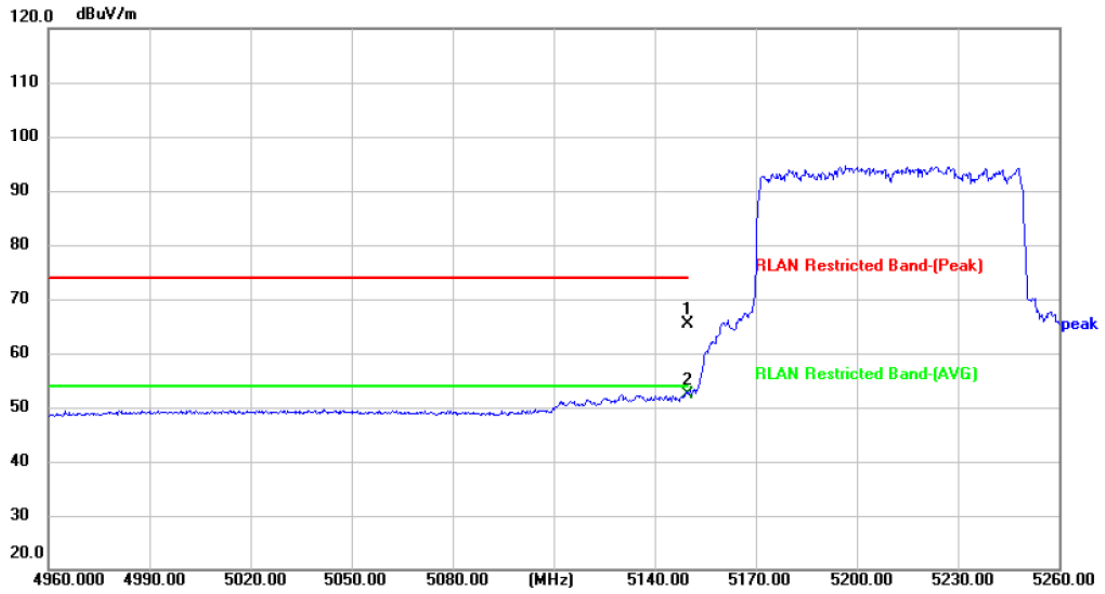


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 51.35 | 14.08 | 65.43 | 74.00 | -8.57 | peak | P |
| 2 * | 5150.000 | 38.40 | 14.08 | 52.48 | 54.00 | -1.52 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5290 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

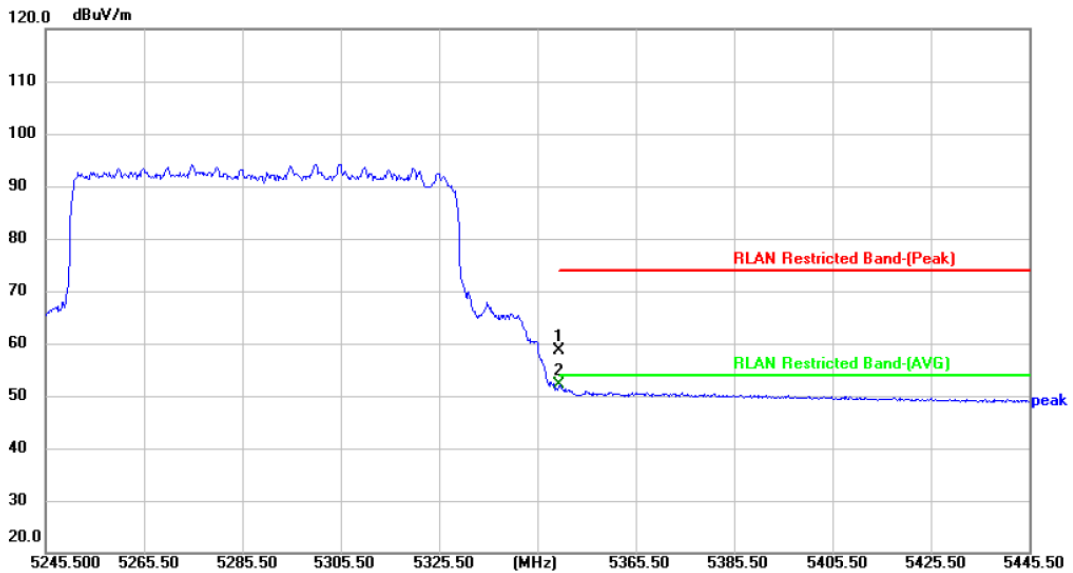


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5350.000 | 44.05 | 14.68 | 58.73 | 74.00 | -15.27 | peak | P |
| 2 * | 5350.000 | 37.34 | 14.68 | 52.02 | 54.00 | -1.98 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11axHE80) Mode 5290 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

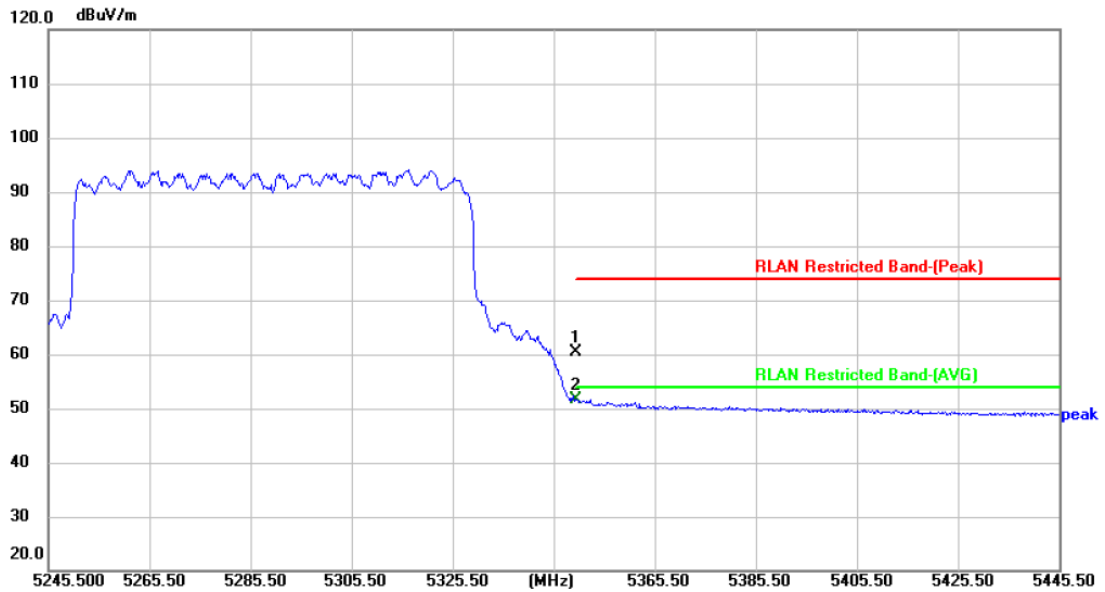


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5350.000 | 45.64 | 14.68 | 60.32 | 74.00 | -13.68 | peak | P |
| 2 * | 5350.000 | 37.04 | 14.68 | 51.72 | 54.00 | -2.28 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT160) Mode 5250 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

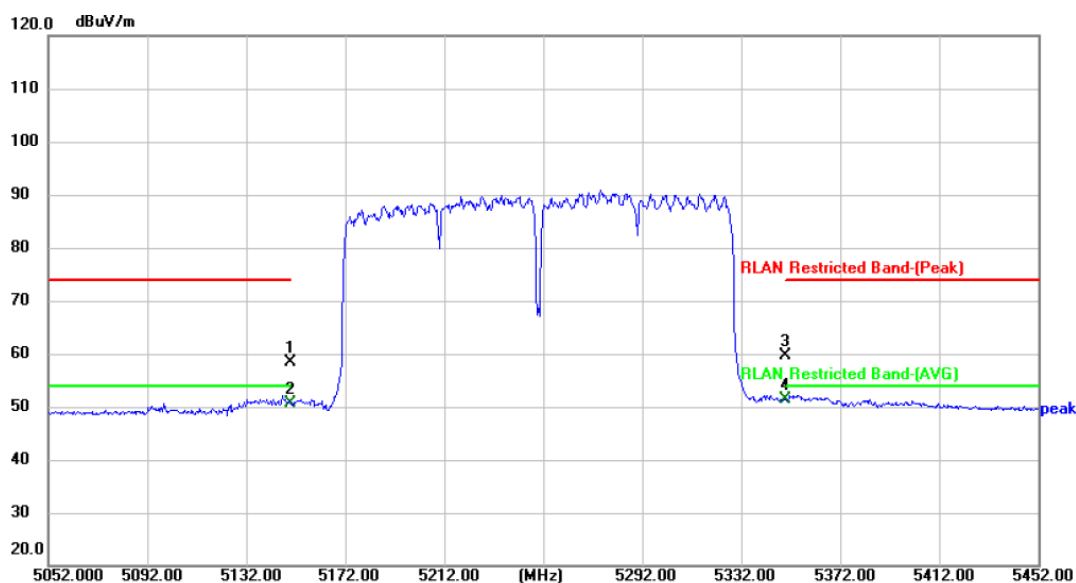


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 44.19 | 14.08 | 58.27 | 74.00 | -15.73 | peak | P |
| 2 | 5150.000 | 36.54 | 14.08 | 50.62 | 54.00 | -3.38 | AVG | P |
| 3 | 5350.000 | 44.84 | 14.68 | 59.52 | 74.00 | -14.48 | peak | P |
| 4 * | 5350.000 | 36.58 | 14.68 | 51.26 | 54.00 | -2.74 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT160) Mode 5250 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

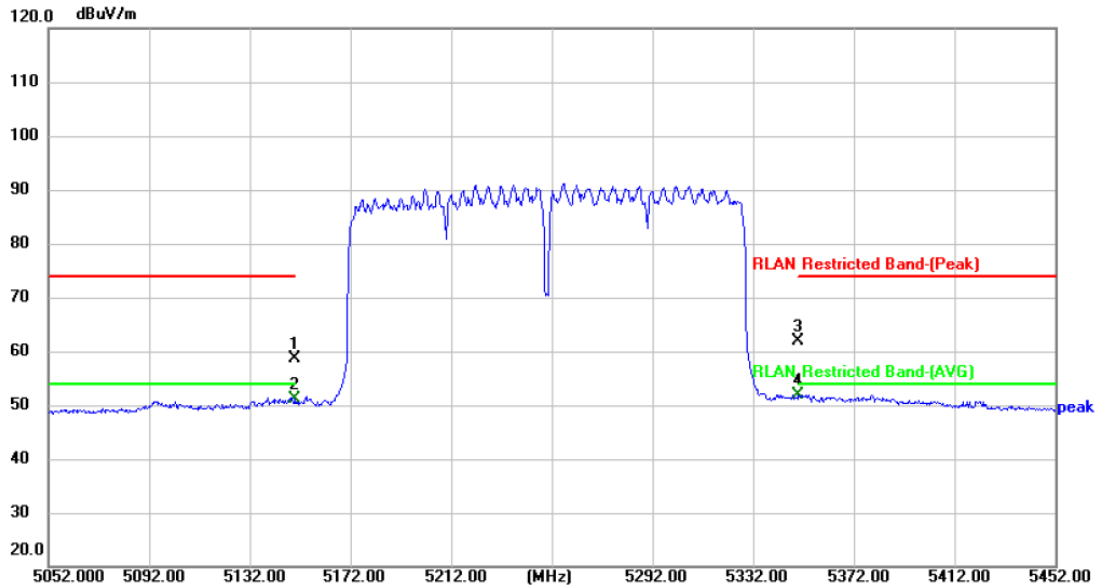


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 44.59 | 14.08 | 58.67 | 74.00 | -15.33 | peak | P |
| 2 | 5150.000 | 37.00 | 14.08 | 51.08 | 54.00 | -2.92 | AVG | P |
| 3 | 5350.000 | 47.19 | 14.68 | 61.87 | 74.00 | -12.13 | peak | P |
| 4 * | 5350.000 | 37.18 | 14.68 | 51.86 | 54.00 | -2.14 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE160) Mode 5250 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

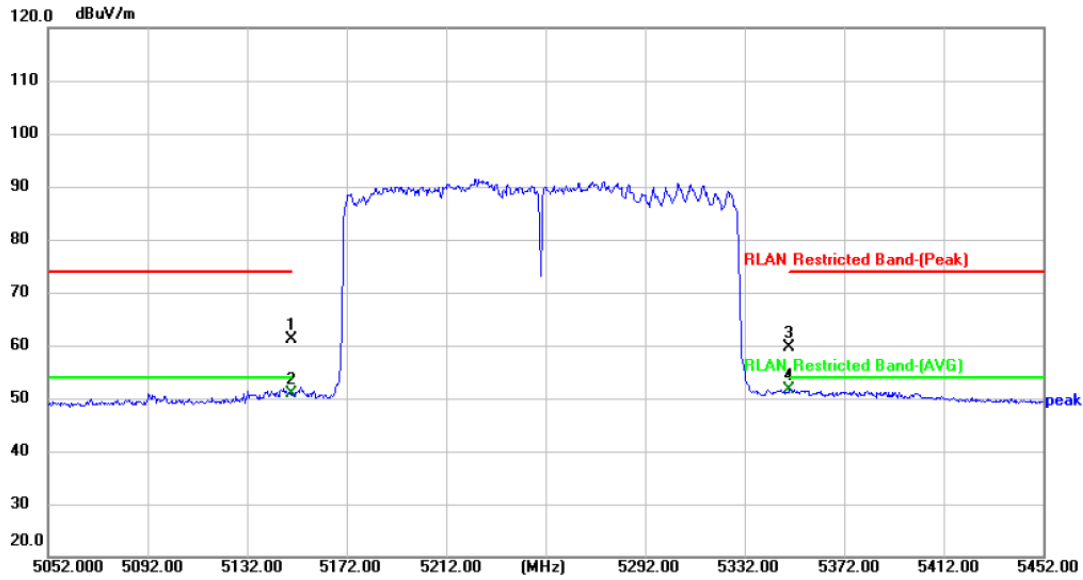


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 47.12 | 14.08 | 61.20 | 74.00 | -12.80 | peak | P |
| 2 | 5150.000 | 36.79 | 14.08 | 50.87 | 54.00 | -3.13 | AVG | P |
| 3 | 5350.000 | 45.01 | 14.68 | 59.69 | 74.00 | -14.31 | peak | P |
| 4 * | 5350.000 | 37.05 | 14.68 | 51.73 | 54.00 | -2.27 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE160) Mode 5250 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

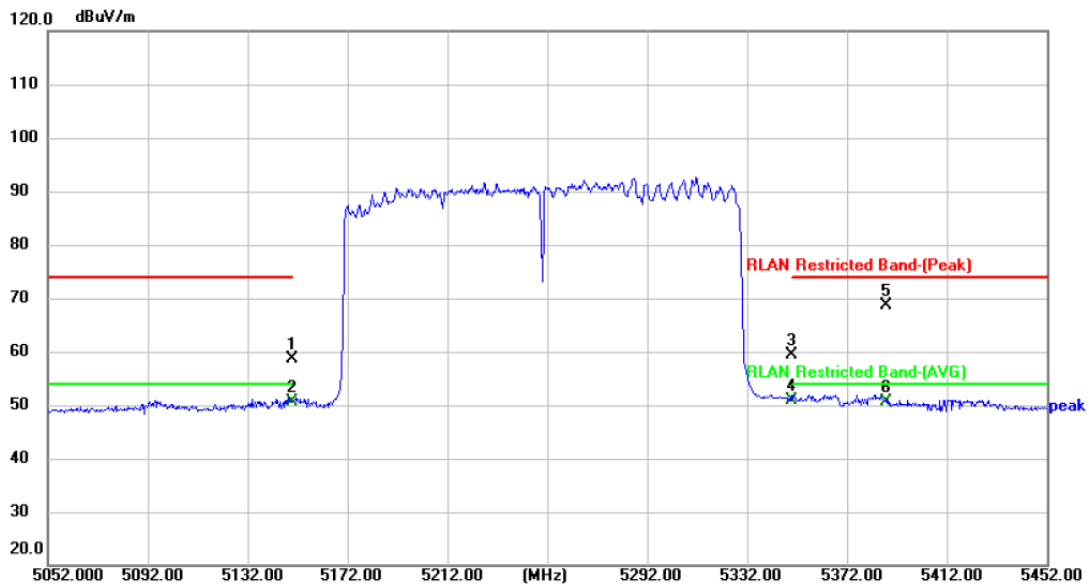


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 44.48 | 14.08 | 58.56 | 74.00 | -15.44 | peak | P |
| 2 | 5150.000 | 36.51 | 14.08 | 50.59 | 54.00 | -3.41 | AVG | P |
| 3 | 5350.000 | 44.66 | 14.68 | 59.34 | 74.00 | -14.66 | peak | P |
| 4 * | 5350.000 | 36.20 | 14.68 | 50.88 | 54.00 | -3.12 | AVG | P |
| 5 | 5387.600 | 53.64 | 14.90 | 68.54 | 74.00 | -5.46 | peak | P |
| 6 | 5387.600 | 35.77 | 14.90 | 50.67 | 54.00 | -3.33 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5500 MHz (U-NII-2C)-SISO | | |
| Remark: | | | |

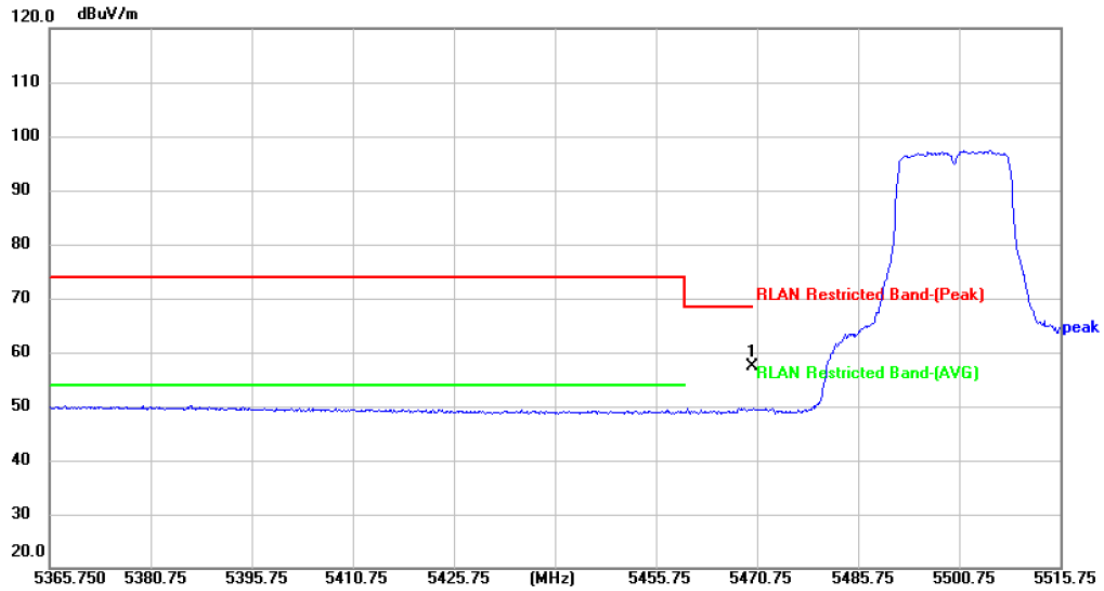


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 42.18 | 15.30 | 57.48 | 68.30 | -10.82 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5500 MHz (U-NII-2C) -SISO | | |
| Remark: | | | |

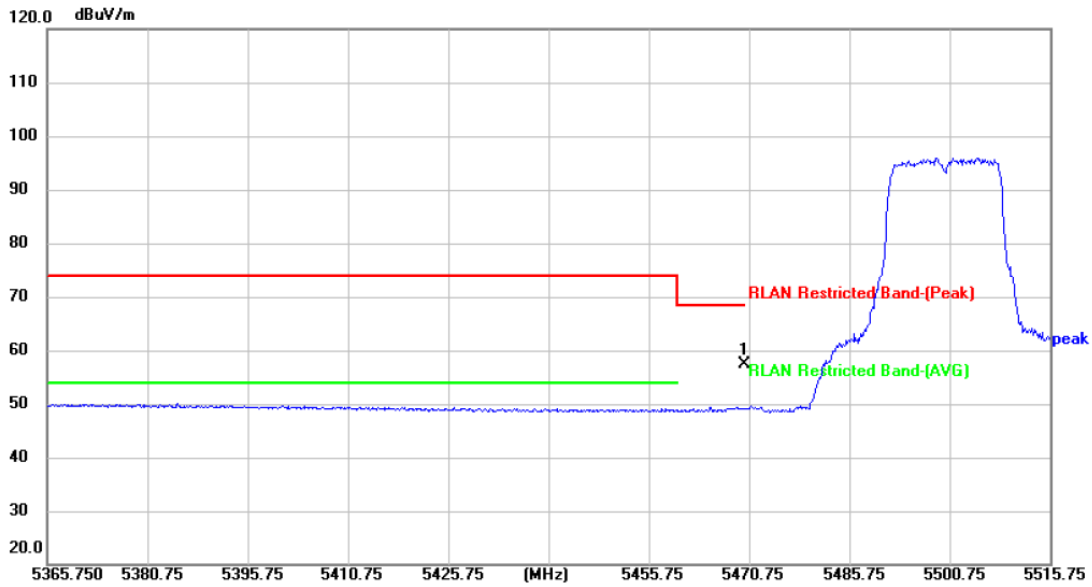


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 42.04 | 15.30 | 57.34 | 68.30 | -10.96 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5700 MHz (U-NII-2C) -SISO | | |
| Remark: | | | |

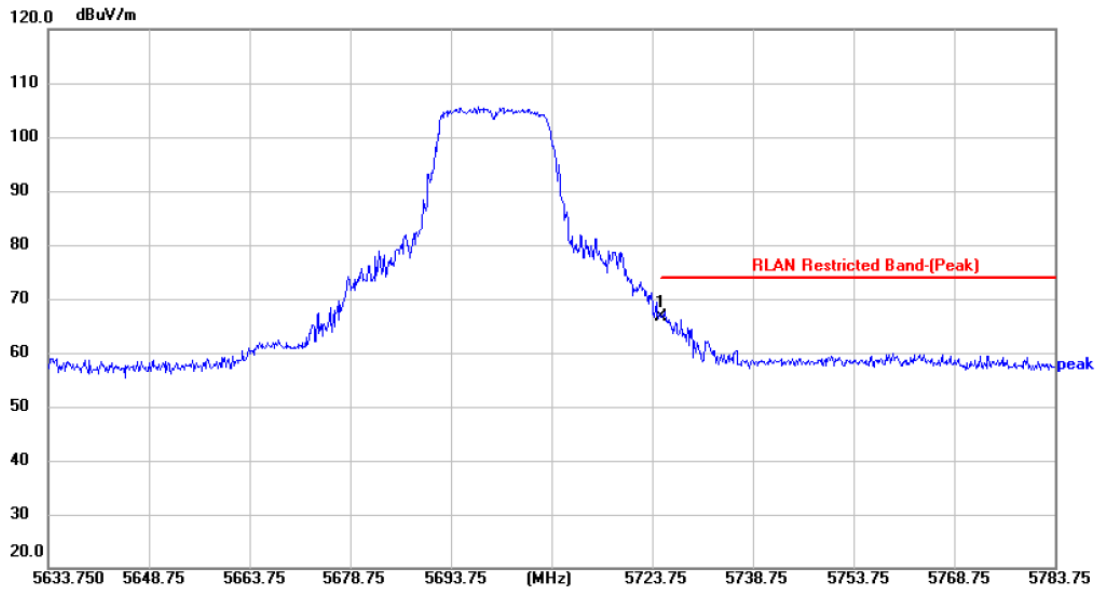


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 50.94 | 15.58 | 66.52 | 74.00 | -7.48 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5700 MHz (U-NII-2C) -SISO | | |
| Remark: | | | |

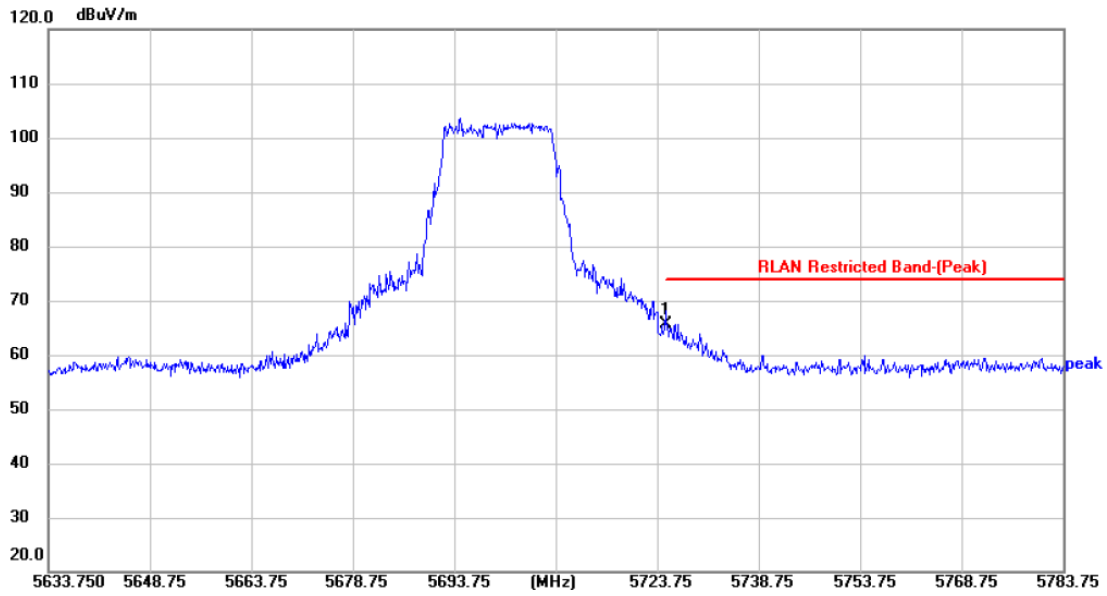


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 49.99 | 15.58 | 65.57 | 74.00 | -8.43 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5500 MHz (U-NII-2C)-CDD | | |
| Remark: | | | |

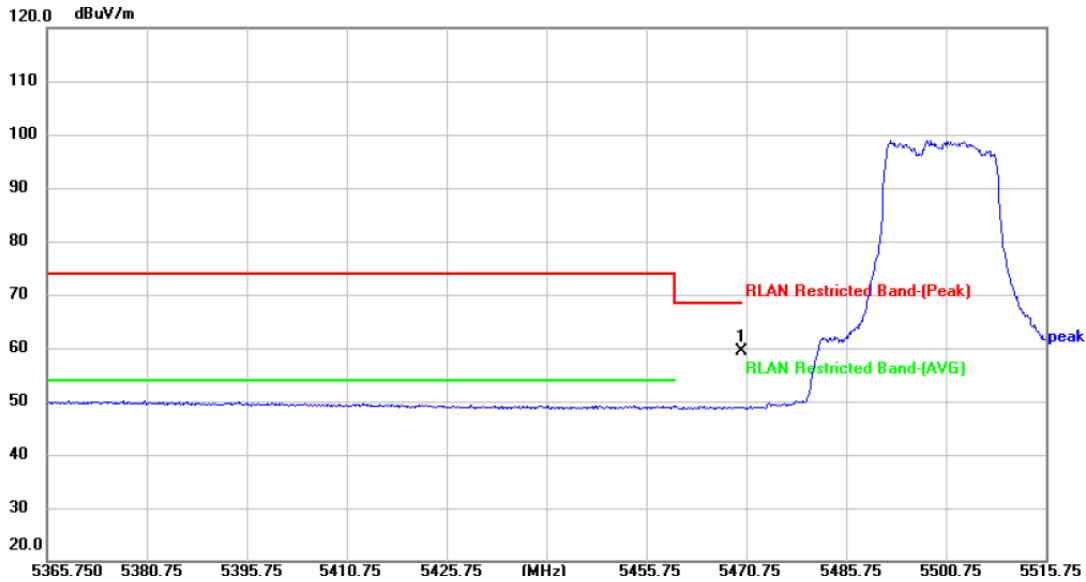


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.15 | 15.30 | 59.45 | 68.30 | -8.85 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5500 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

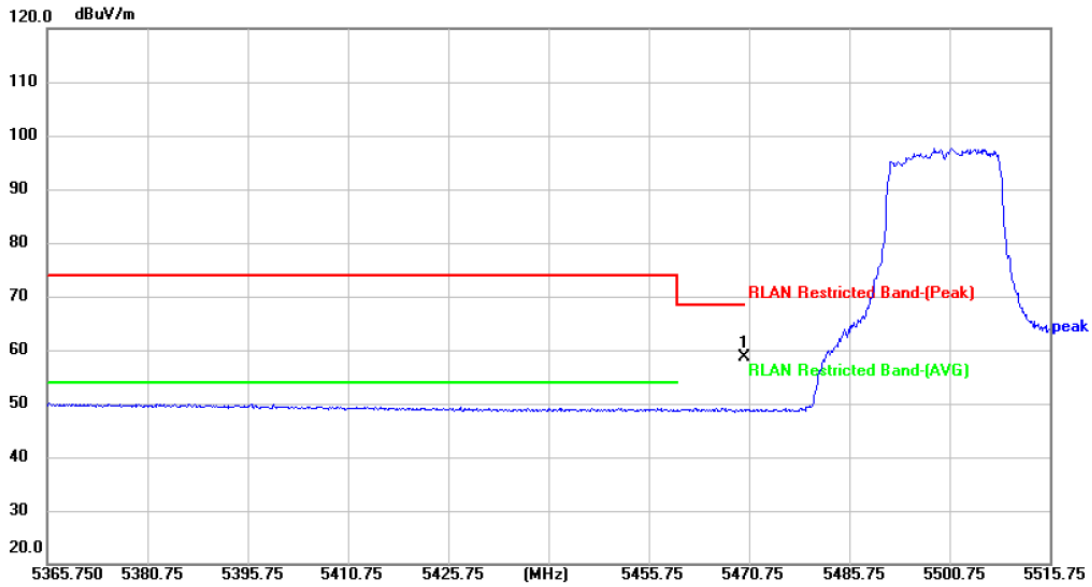


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 43.39 | 15.30 | 58.69 | 68.30 | -9.61 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)-CDD | | |
| Remark: | | | |

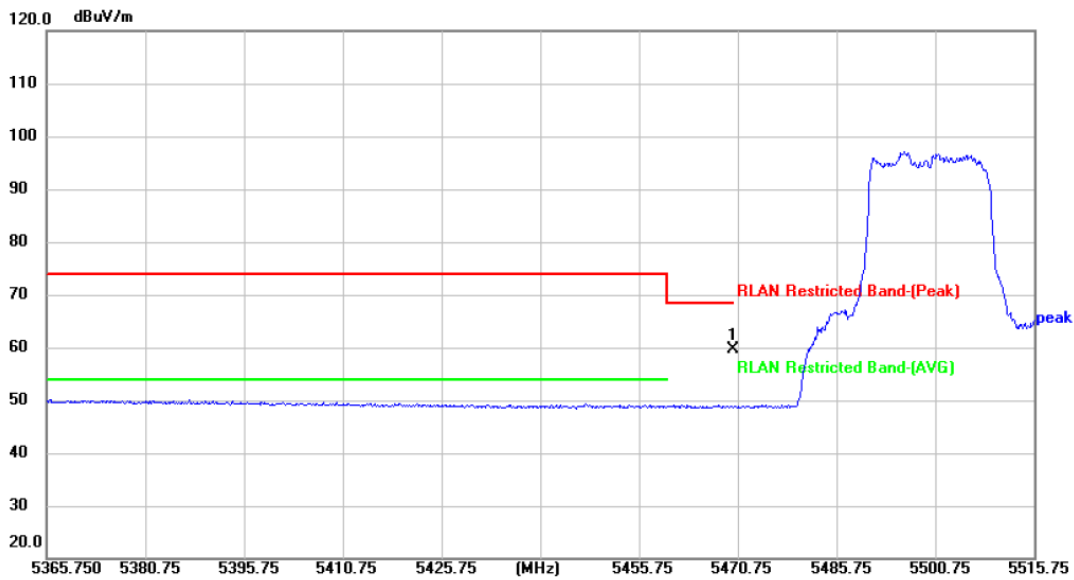


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.35 | 15.30 | 59.65 | 68.30 | -8.65 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

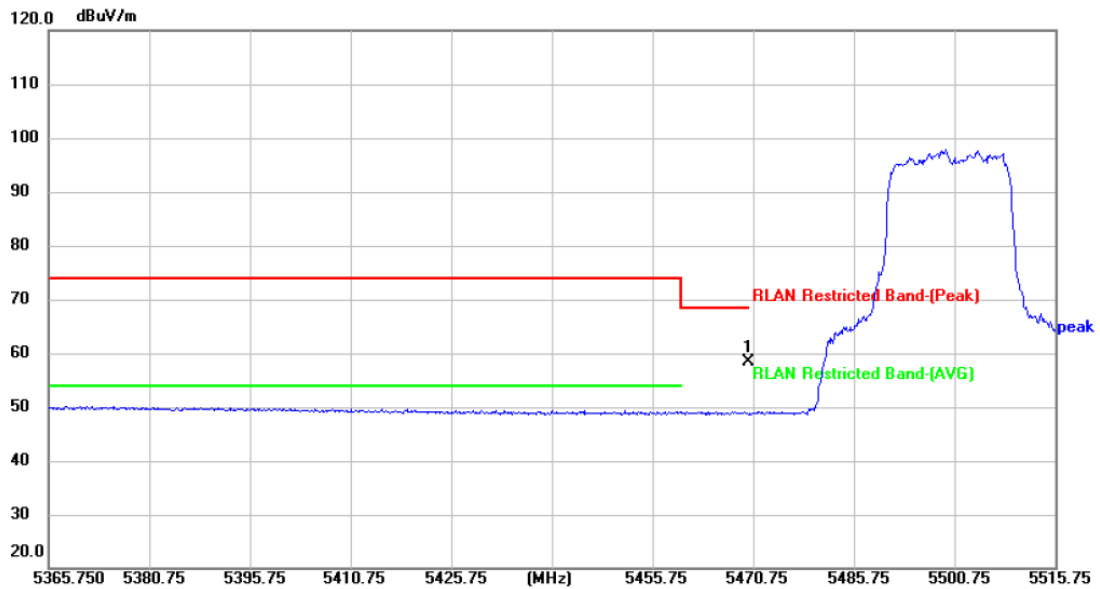


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 43.04 | 15.30 | 58.34 | 68.30 | -9.96 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

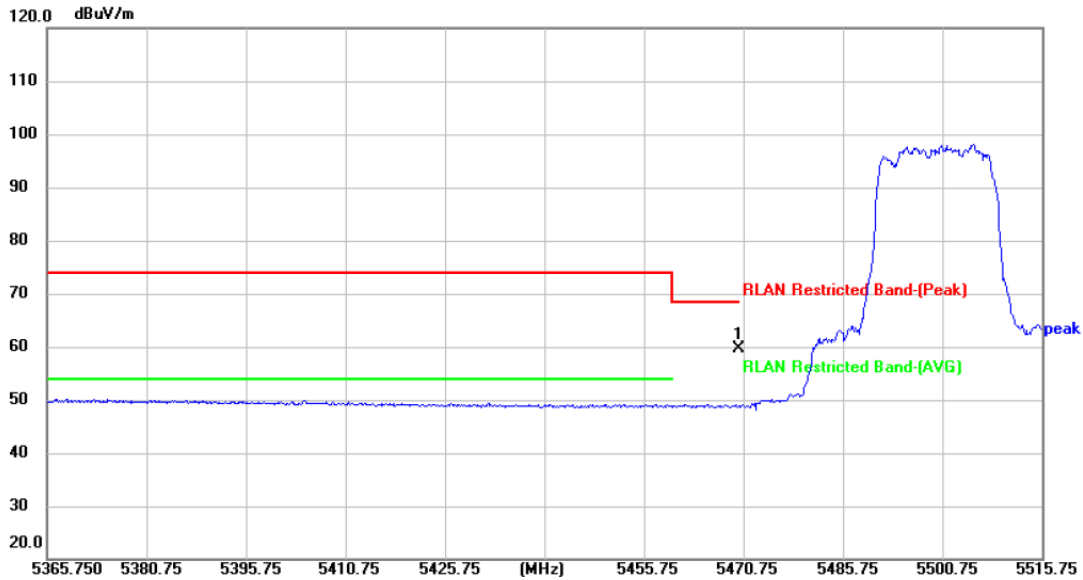


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.24 | 15.30 | 59.54 | 68.30 | -8.76 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

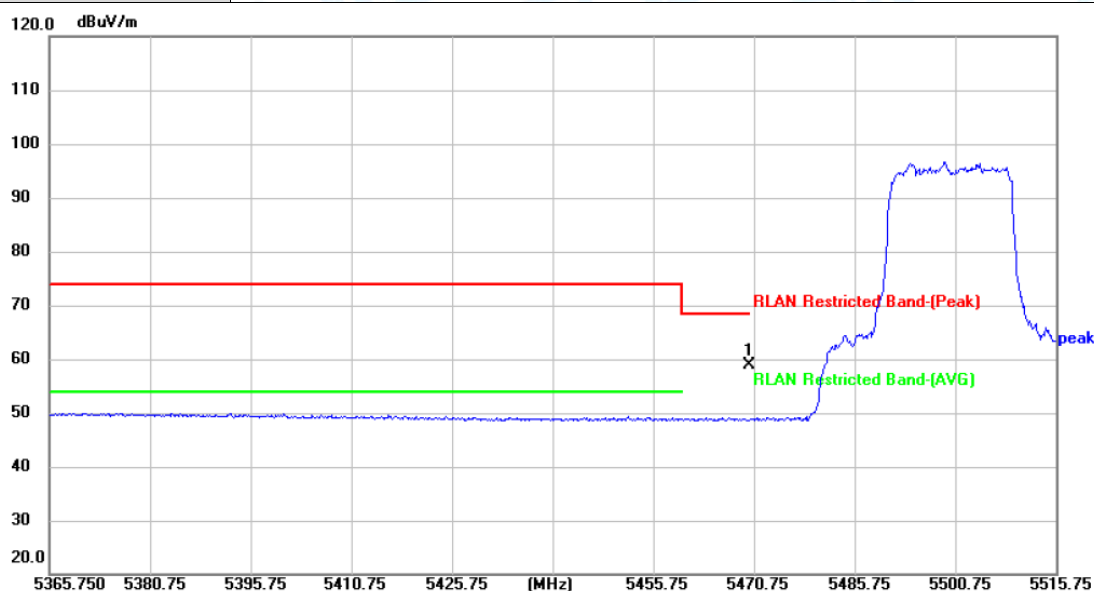


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 43.56 | 15.30 | 58.86 | 68.30 | -9.44 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

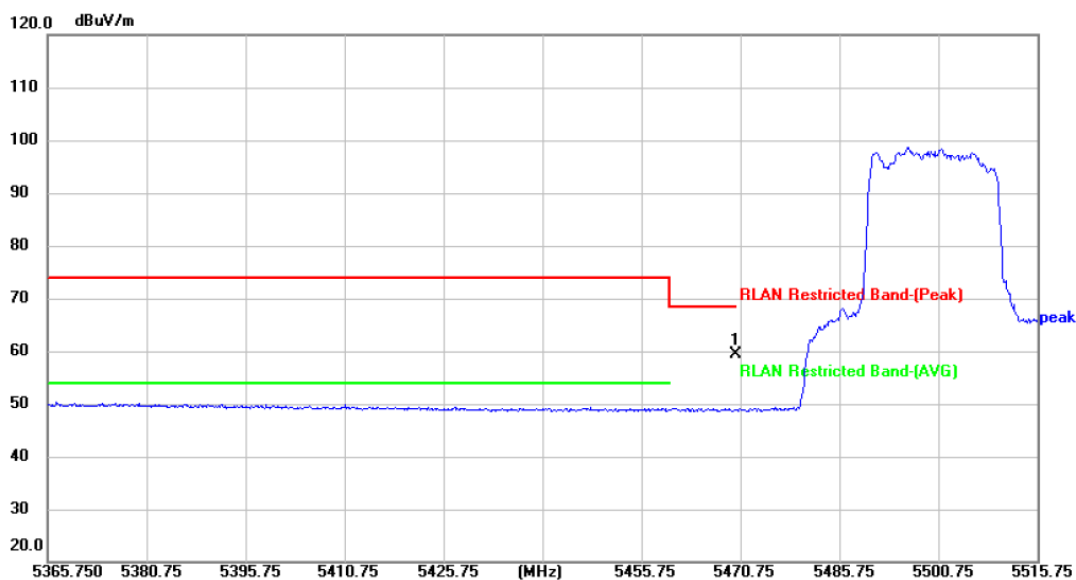


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.02 | 15.30 | 59.32 | 68.30 | -8.98 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

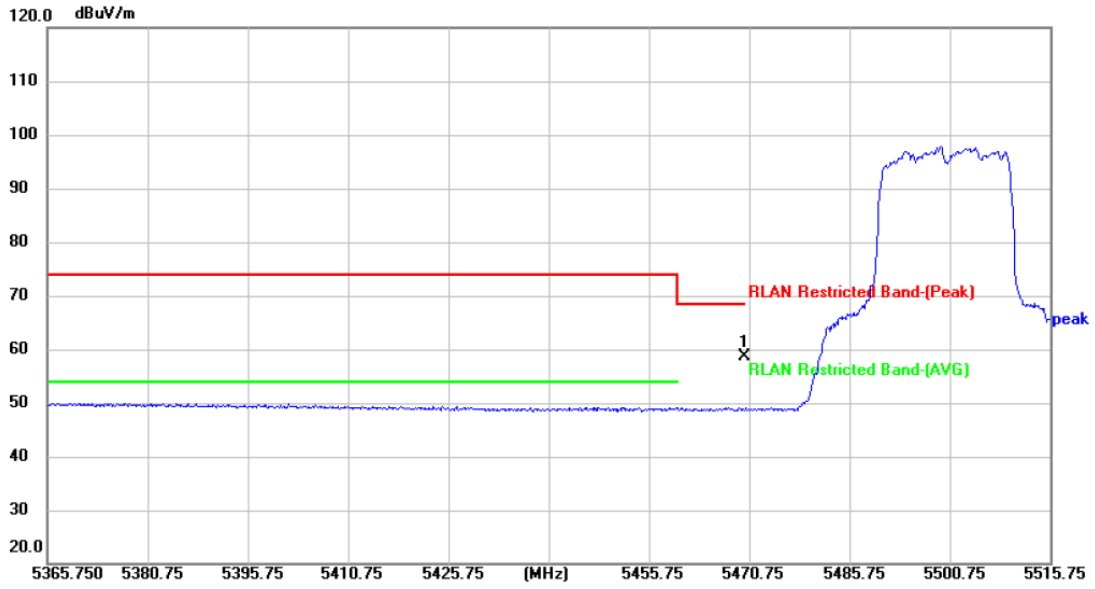


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 43.42 | 15.30 | 58.72 | 68.30 | -9.58 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

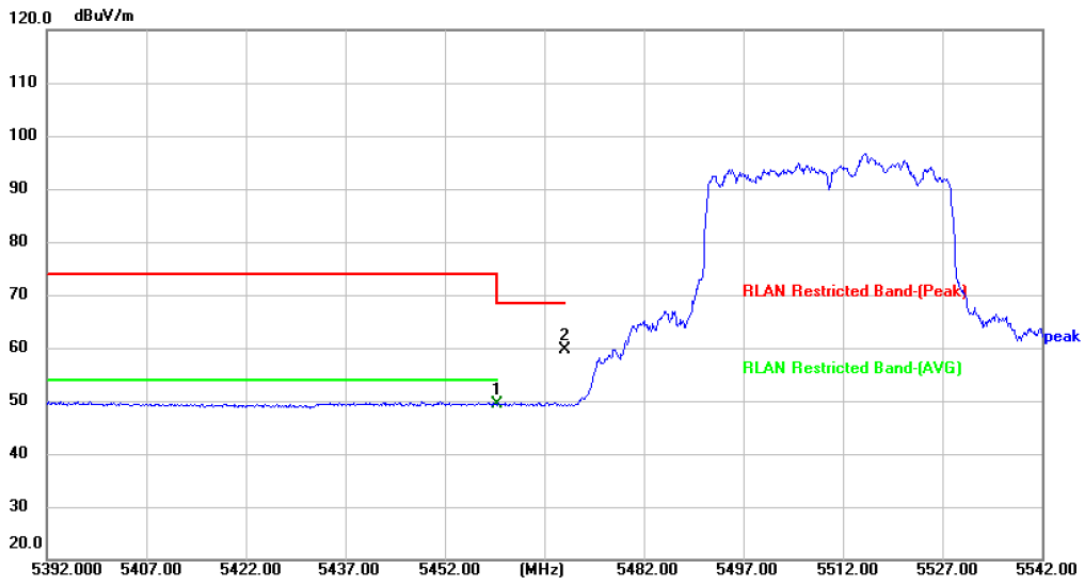


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5460.000 | 34.19 | 15.24 | 49.43 | 54.00 | -4.57 | AVG | P |
| 2 | 5470.000 | 44.41 | 15.30 | 59.71 | 68.30 | -8.59 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

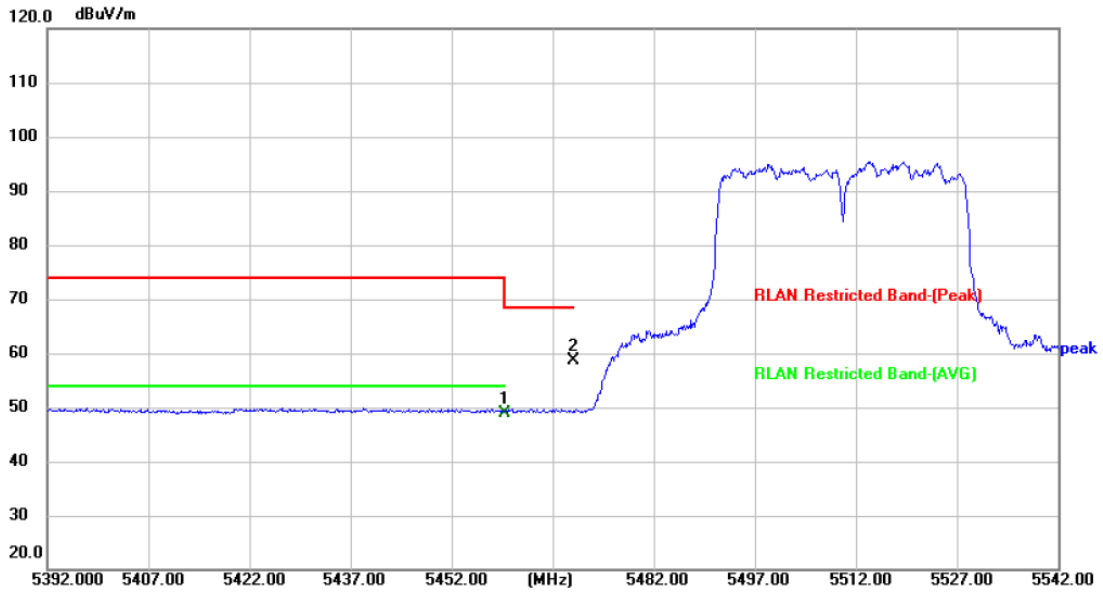


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5460.000 | 33.65 | 15.24 | 48.89 | 54.00 | -5.11 | AVG | P |
| 2 | 5470.000 | 43.45 | 15.30 | 58.75 | 68.30 | -9.55 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

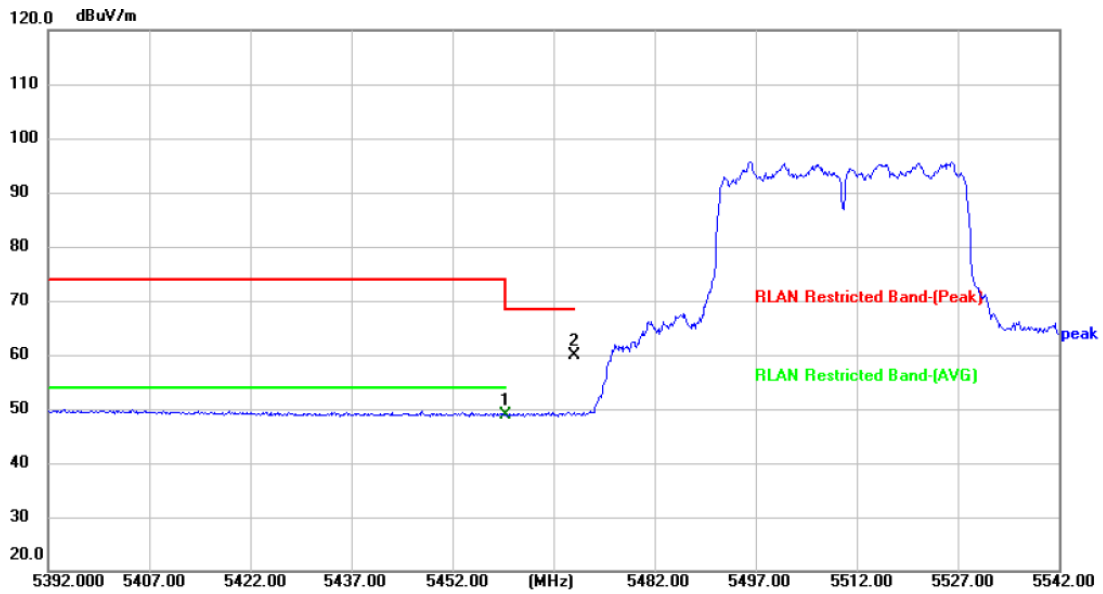


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5460.000 | 33.71 | 15.24 | 48.95 | 54.00 | -5.05 | AVG | P |
| 2 | 5470.000 | 44.64 | 15.30 | 59.94 | 68.30 | -8.36 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

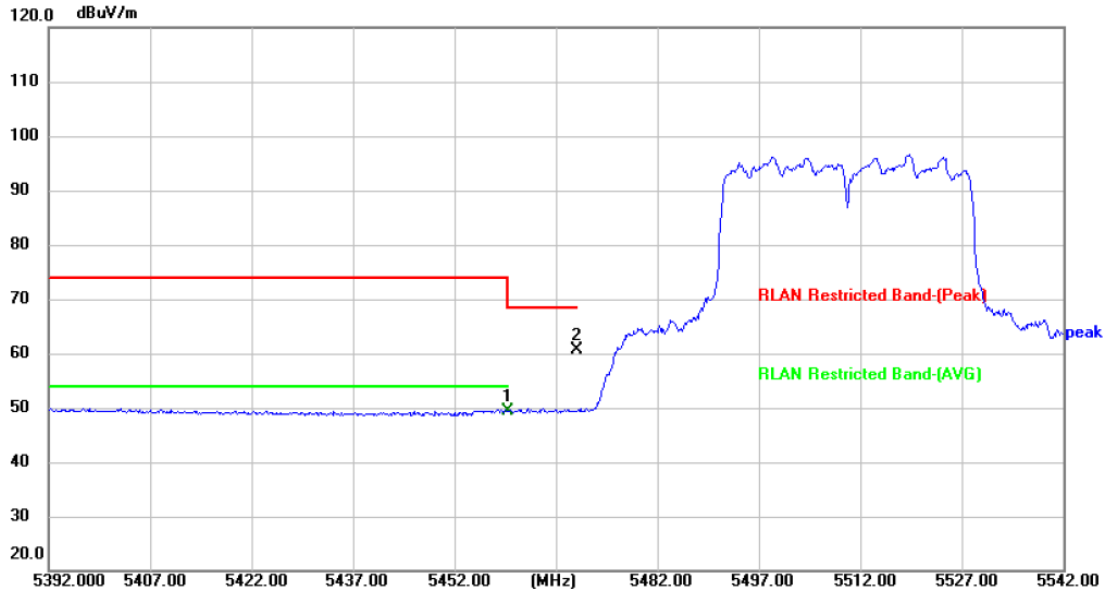


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5460.000 | 34.02 | 15.24 | 49.26 | 54.00 | -4.74 | AVG | P |
| 2 | 5470.000 | 45.26 | 15.30 | 60.56 | 68.30 | -7.74 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5510 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

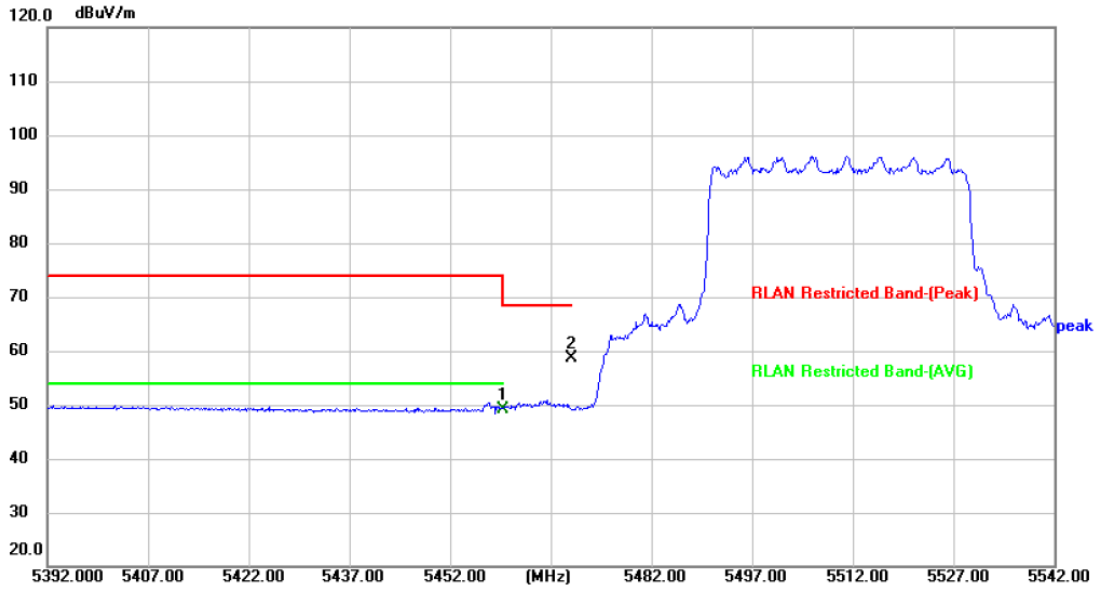


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5460.000 | 33.99 | 15.24 | 49.23 | 54.00 | -4.77 | AVG | P |
| 2 | 5470.000 | 43.24 | 15.30 | 58.54 | 68.30 | -9.76 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5510 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

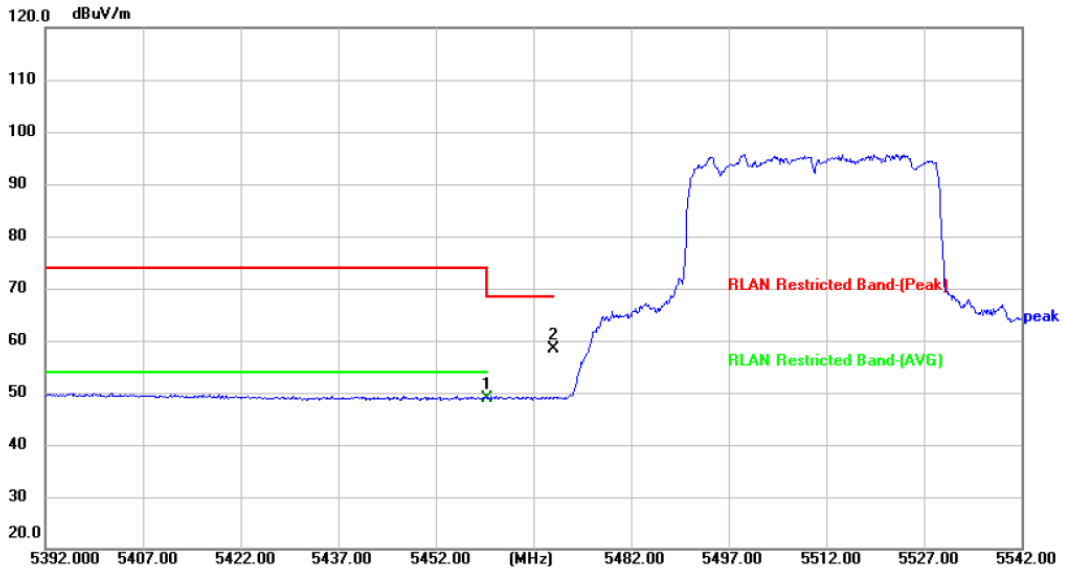


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5460.000 | 33.73 | 15.24 | 48.97 | 54.00 | -5.03 | AVG | P |
| 2 | 5470.000 | 43.05 | 15.30 | 58.35 | 68.30 | -9.95 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

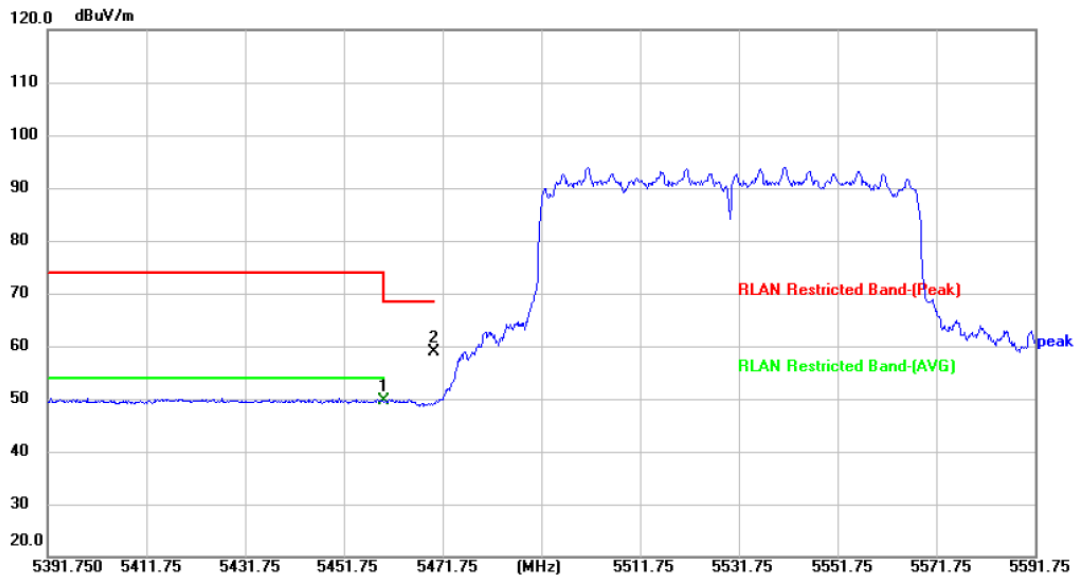


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5460.000 | 34.43 | 15.24 | 49.67 | 54.00 | -4.33 | AVG | P |
| 2 | 5470.000 | 43.53 | 15.30 | 58.83 | 68.30 | -9.47 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

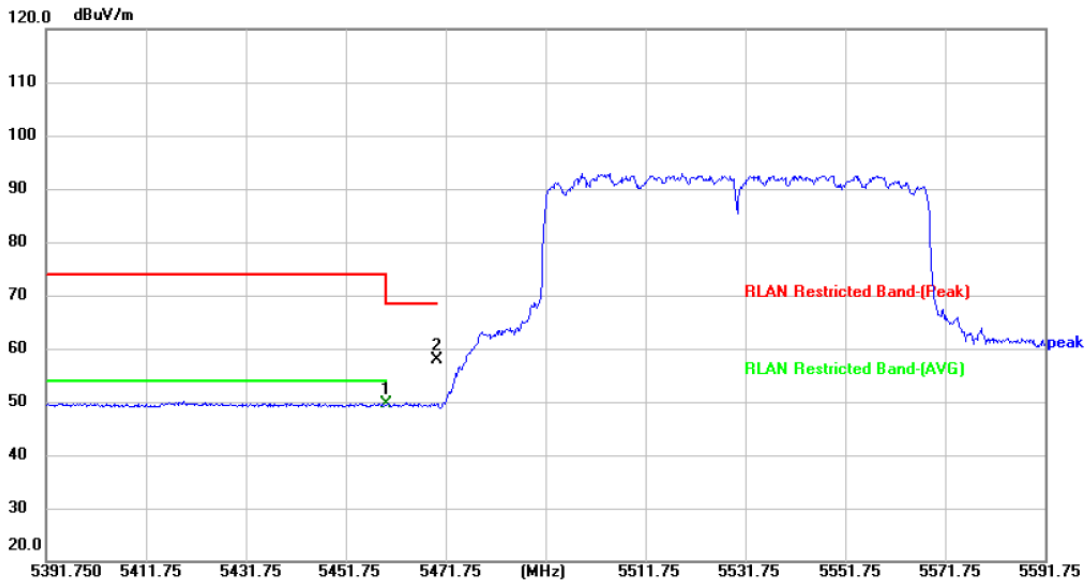


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5460.000 | 34.40 | 15.24 | 49.64 | 54.00 | -4.36 | AVG | P |
| 2 | 5470.000 | 42.56 | 15.30 | 57.86 | 68.30 | -10.44 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5530 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

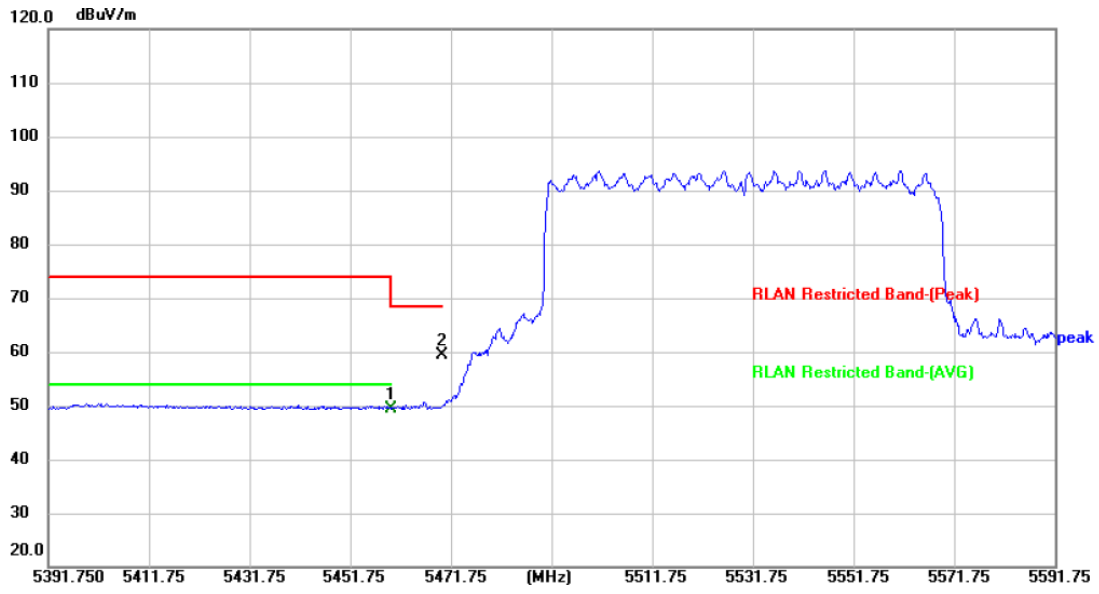


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5460.000 | 34.24 | 15.24 | 49.48 | 54.00 | -4.52 | AVG | P |
| 2 | 5470.000 | 44.17 | 15.30 | 59.47 | 68.30 | -8.83 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5530 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

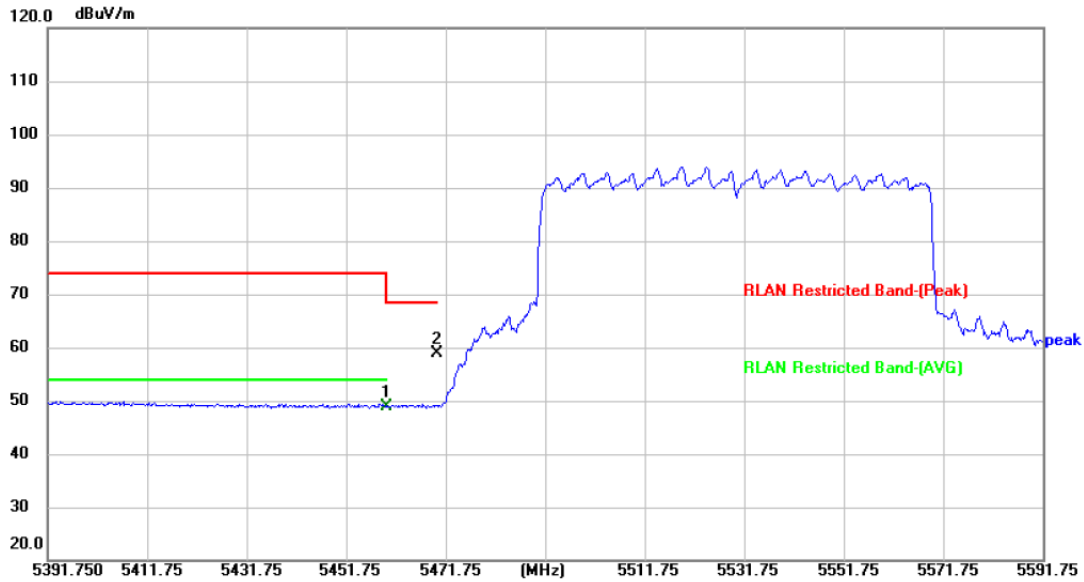


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5460.000 | 33.52 | 15.24 | 48.76 | 54.00 | -5.24 | AVG | P |
| 2 | 5470.000 | 43.62 | 15.30 | 58.92 | 68.30 | -9.38 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT160) Mode 5570 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

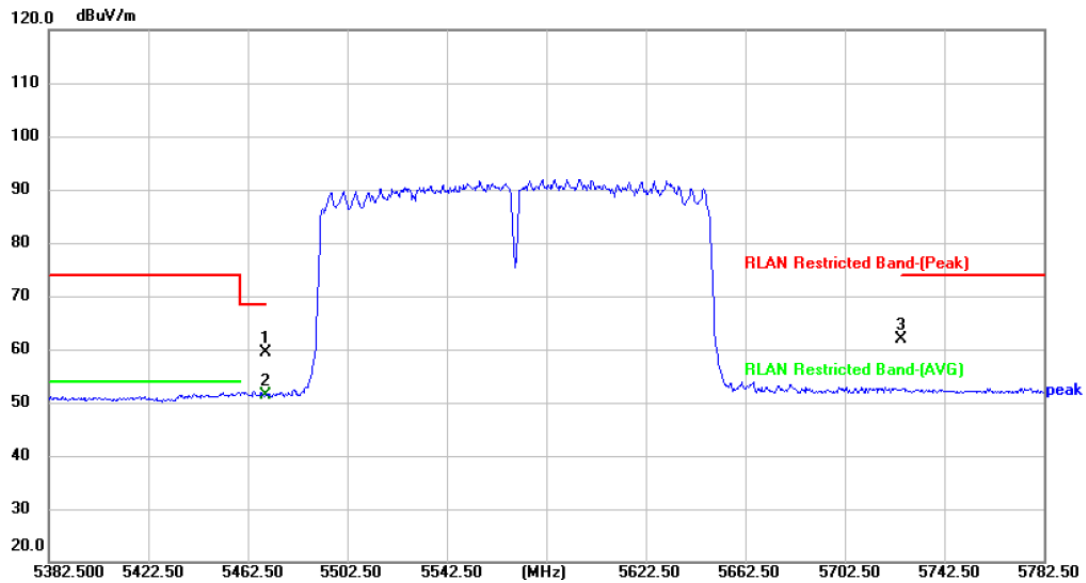


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 46.15 | 13.30 | 59.45 | 68.30 | -8.85 | peak | P |
| 2 | 5470.000 | 38.04 | 13.30 | 51.34 | 68.30 | -16.96 | AVG | P |
| 3 | 5725.000 | 48.31 | 13.58 | 61.89 | 74.00 | -12.11 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT160) Mode 5570 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

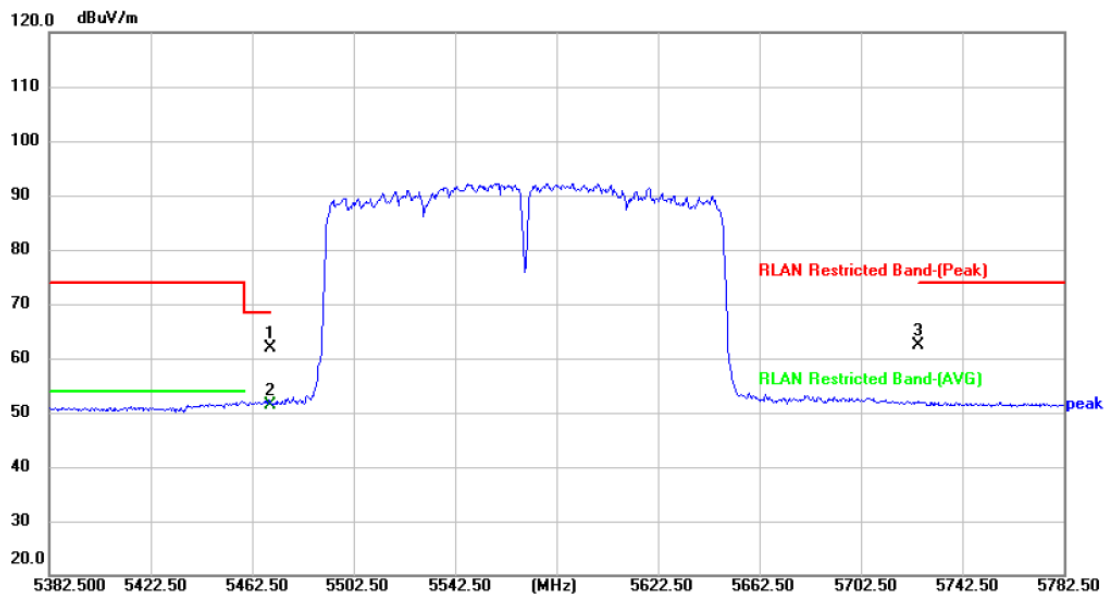


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 48.46 | 13.30 | 61.76 | 68.30 | -6.54 | peak | P |
| 2 | 5470.000 | 38.15 | 13.30 | 51.45 | 68.30 | -16.85 | AVG | P |
| 3 | 5725.000 | 48.85 | 13.58 | 62.43 | 74.00 | -11.57 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE160) Mode 5570 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

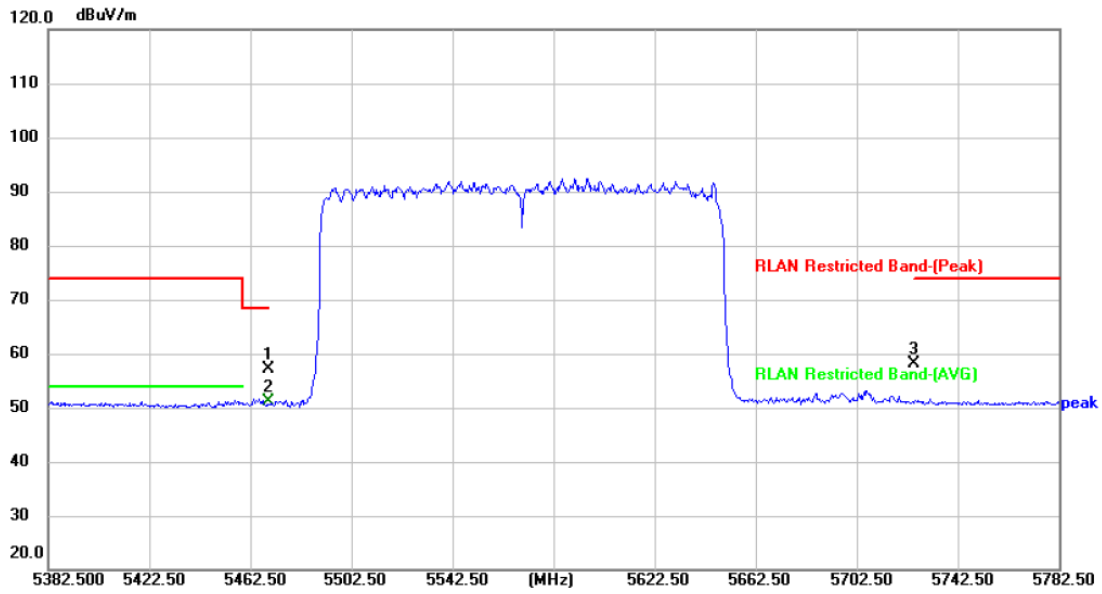


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 43.93 | 13.30 | 57.23 | 68.30 | -11.07 | peak | P |
| 2 | 5470.000 | 37.72 | 13.30 | 51.02 | 68.30 | -17.28 | AVG | P |
| 3 | 5725.000 | 44.65 | 13.58 | 58.23 | 74.00 | -15.77 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE160) Mode 5570 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

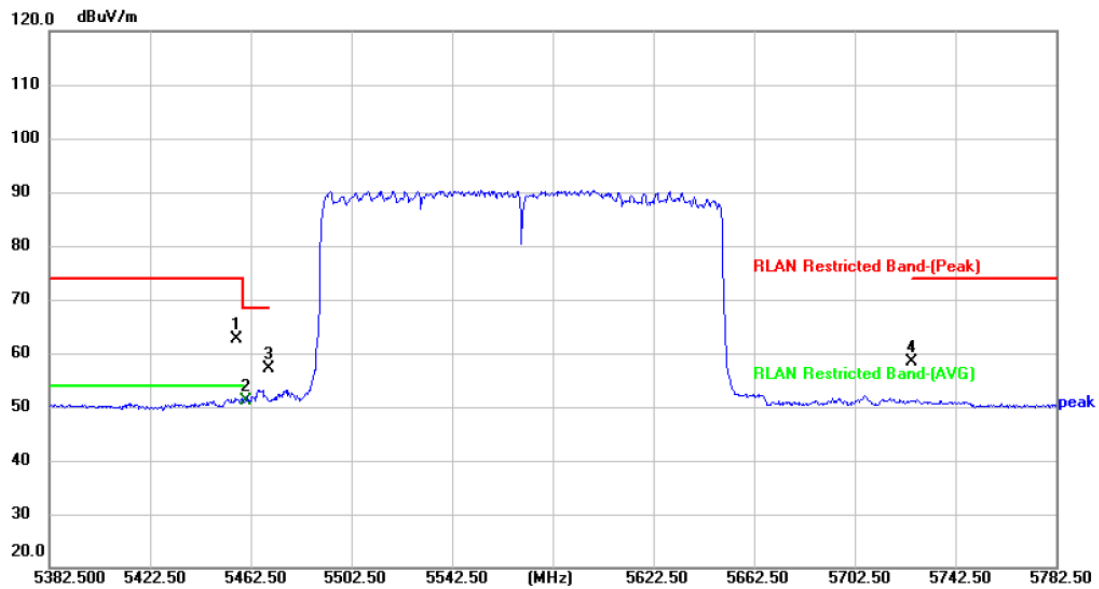


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5456.900 | 49.42 | 13.23 | 62.65 | 74.00 | -11.35 | peak | P |
| 2 | 5460.500 | 37.81 | 13.25 | 51.06 | 68.30 | -17.24 | AVG | P |
| 3 * | 5470.000 | 43.82 | 13.30 | 57.12 | 68.30 | -11.18 | peak | P |
| 4 | 5725.000 | 44.76 | 13.58 | 58.34 | 74.00 | -15.66 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5745 MHz (U-NII-3)-SISO | | |
| Remark: | | | |

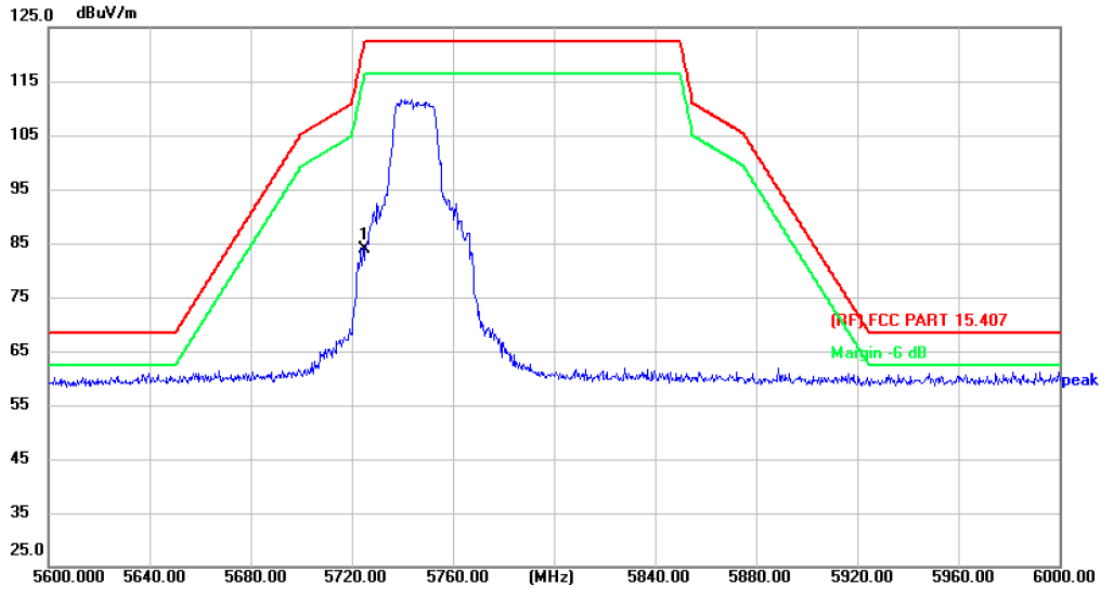


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 68.36 | 15.58 | 83.94 | 122.30 | -38.36 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5745 MHz (U-NII-3) -SISO | | |
| Remark: | | | |

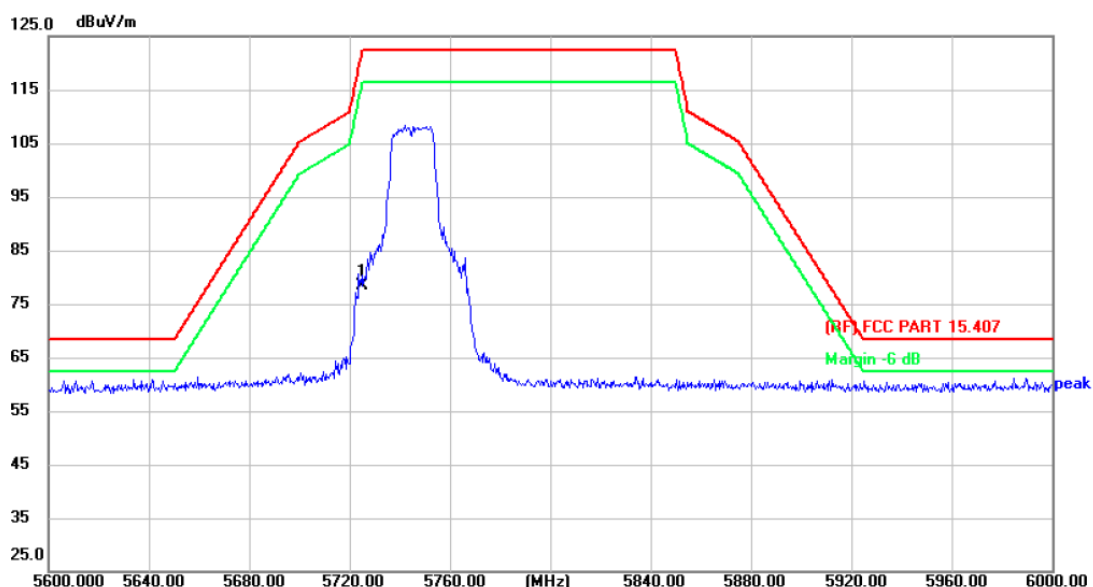


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 62.79 | 15.58 | 78.37 | 122.30 | -43.93 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5825 MHz (U-NII-3) -SISO | | |
| Remark: | | | |

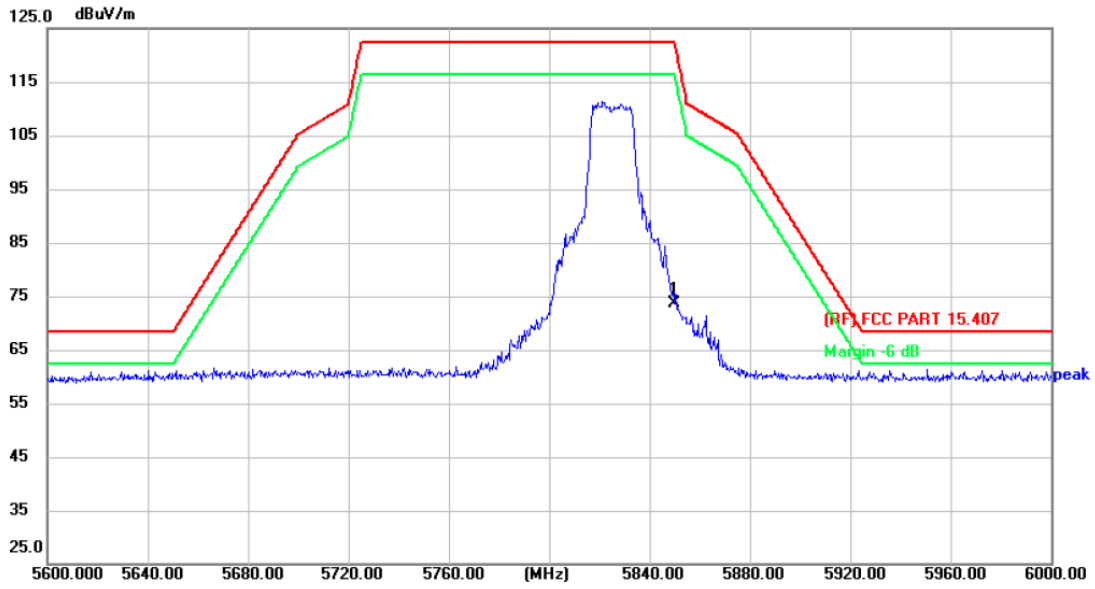


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 58.10 | 15.54 | 73.64 | 122.30 | -48.66 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5825 MHz (U-NII-3) -SISO | | |
| Remark: | | | |

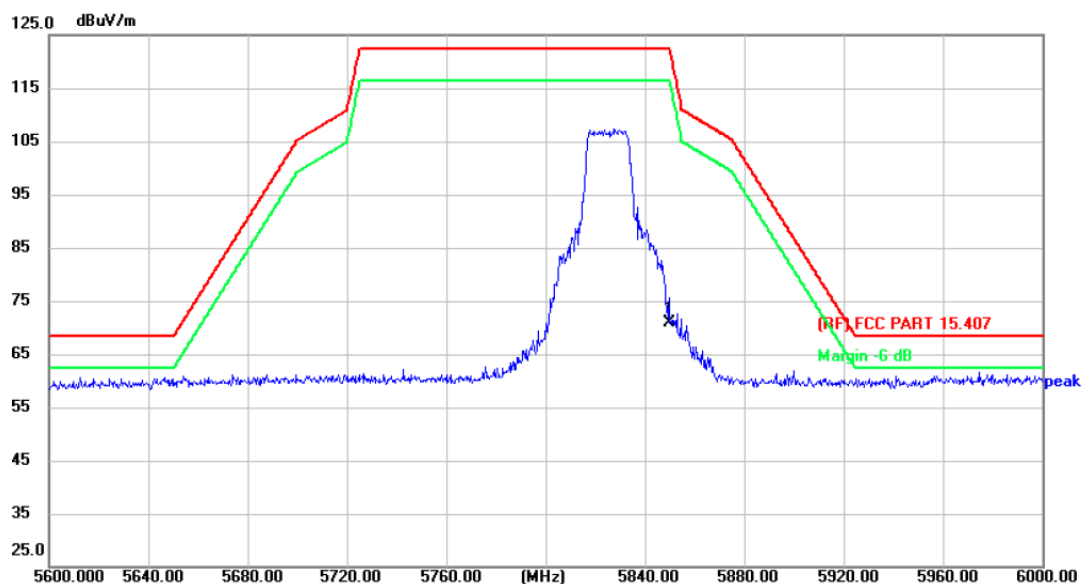


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 55.23 | 15.54 | 70.77 | 122.30 | -51.53 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5745 MHz (U-NII-3)-CDD | | |
| Remark: | | | |

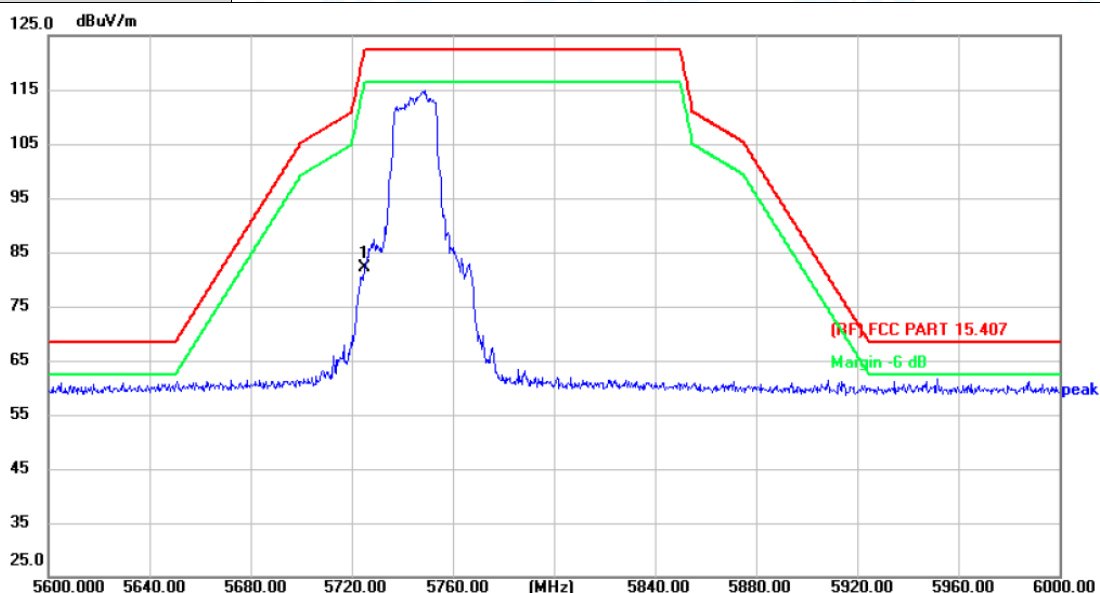


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 66.60 | 15.58 | 82.18 | 122.30 | -40.12 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5745 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

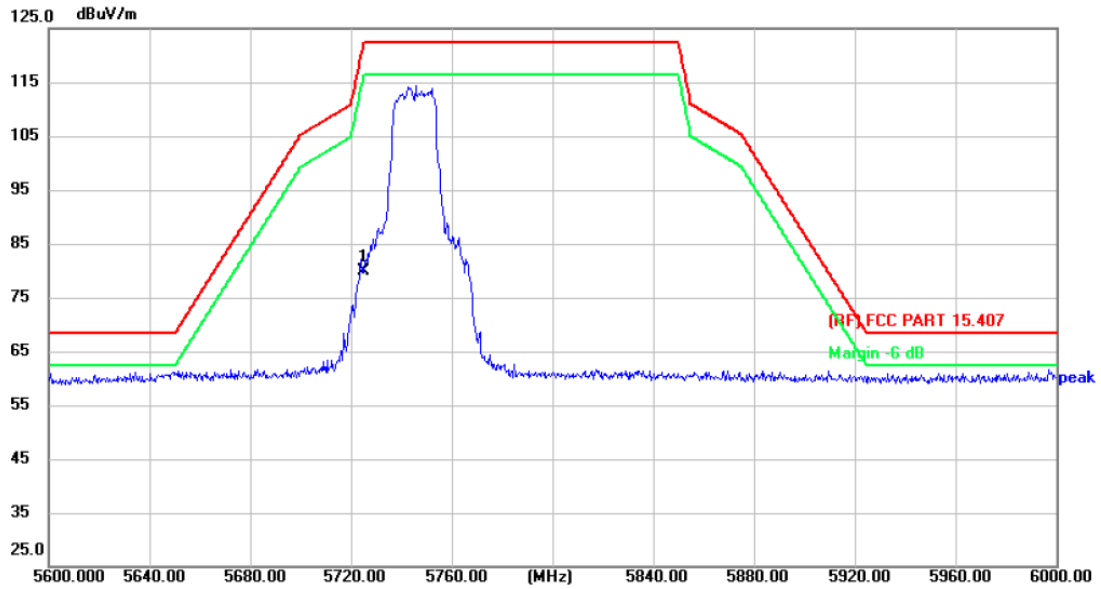


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 64.28 | 15.58 | 79.86 | 122.30 | -42.44 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5825 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

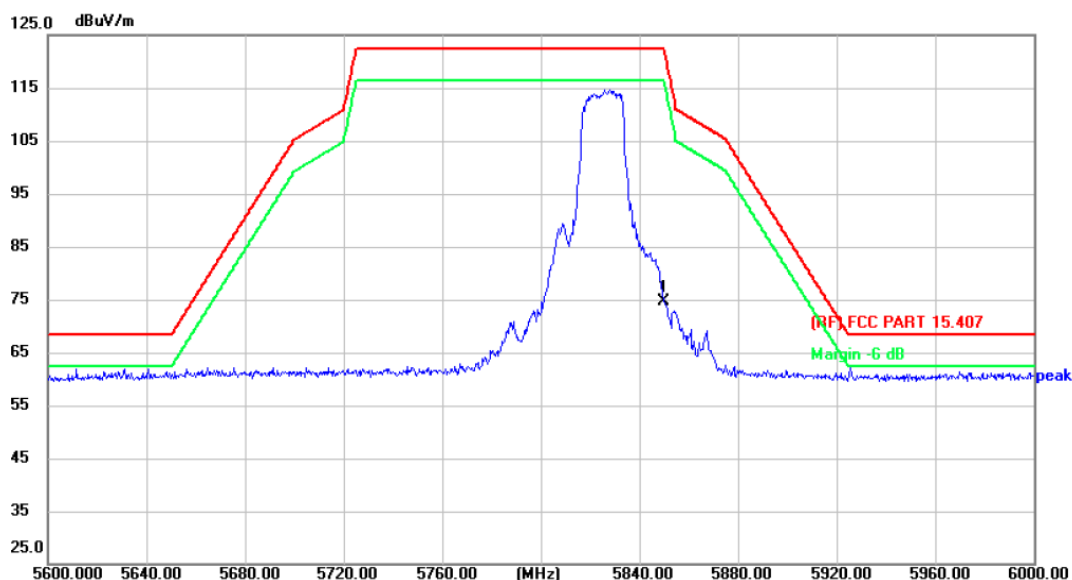


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 58.99 | 15.54 | 74.53 | 122.30 | -47.77 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5825 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

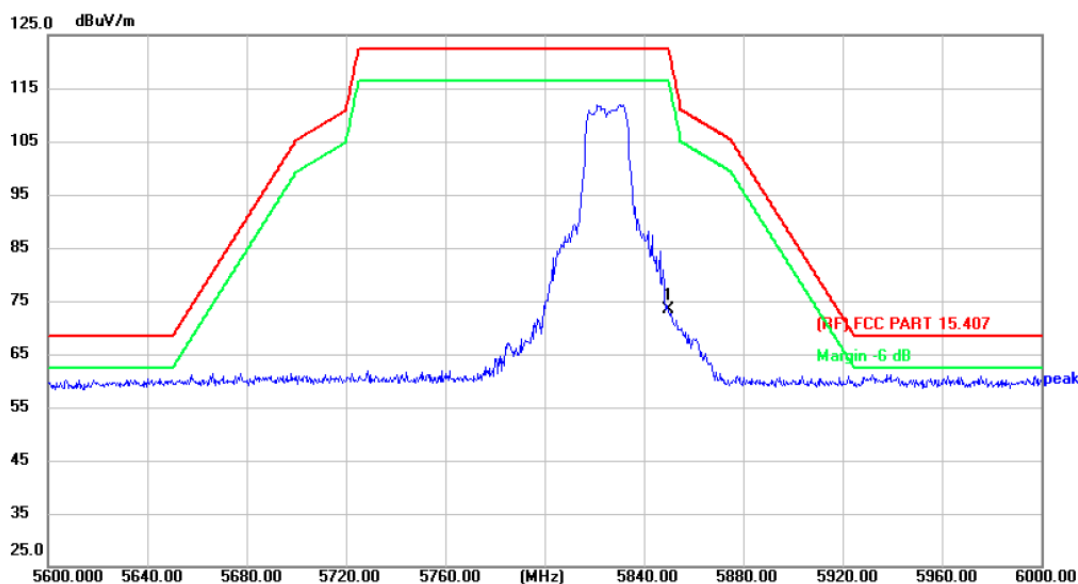


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 57.81 | 15.54 | 73.35 | 122.30 | -48.95 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

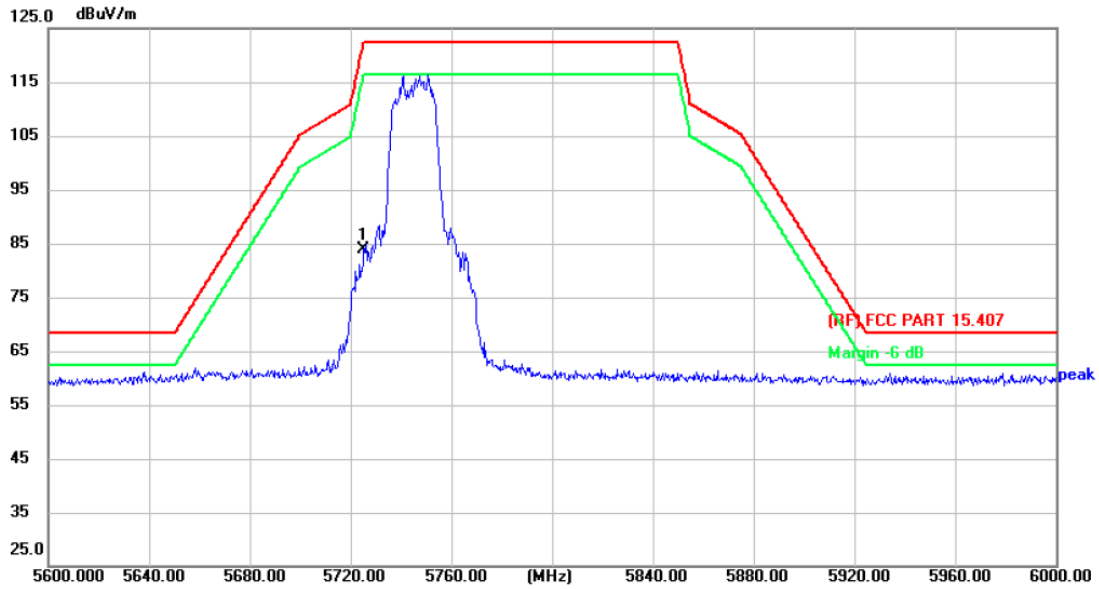


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 68.21 | 15.58 | 83.79 | 122.30 | -38.51 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

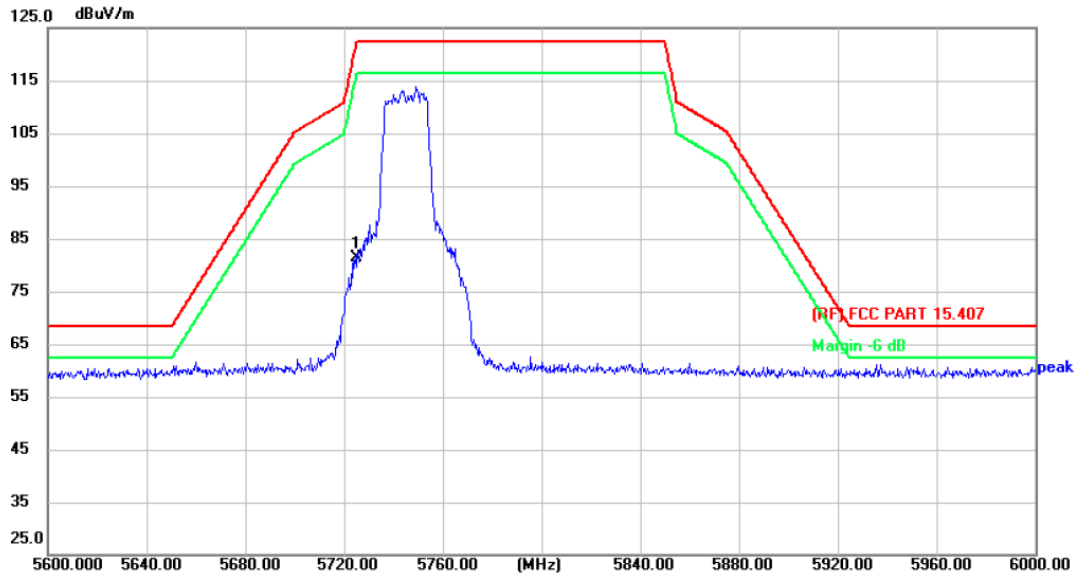


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 65.82 | 15.58 | 81.40 | 122.30 | -40.90 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

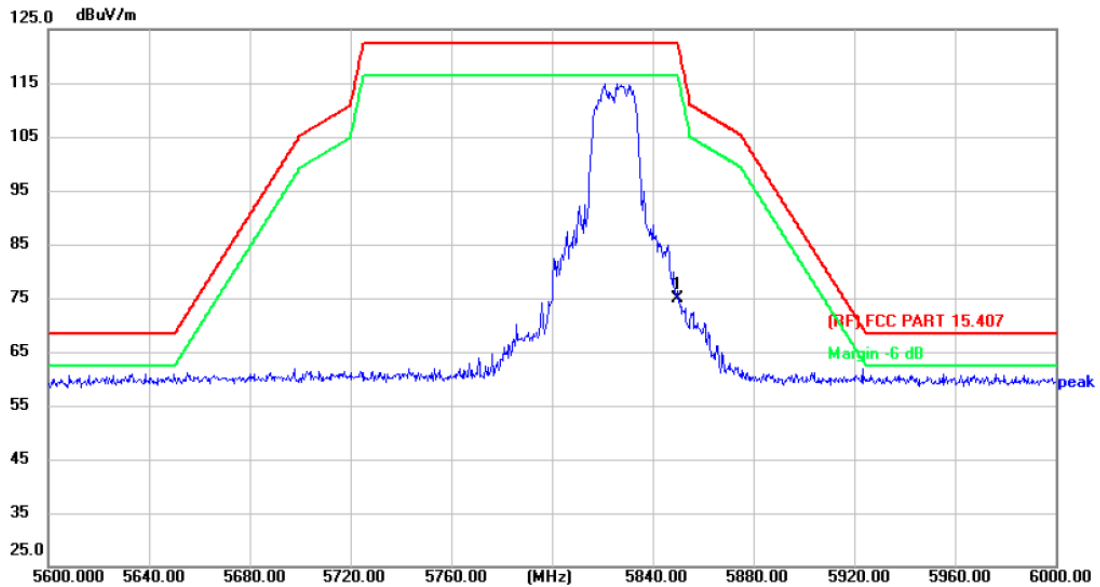


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 59.23 | 15.54 | 74.77 | 122.30 | -47.53 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

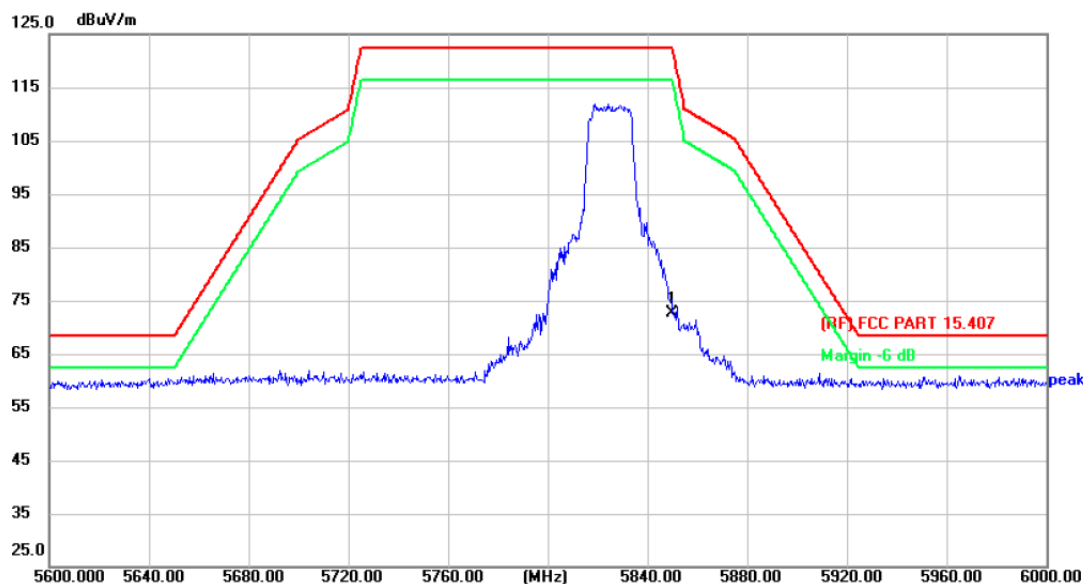


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 57.06 | 15.54 | 72.60 | 122.30 | -49.70 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

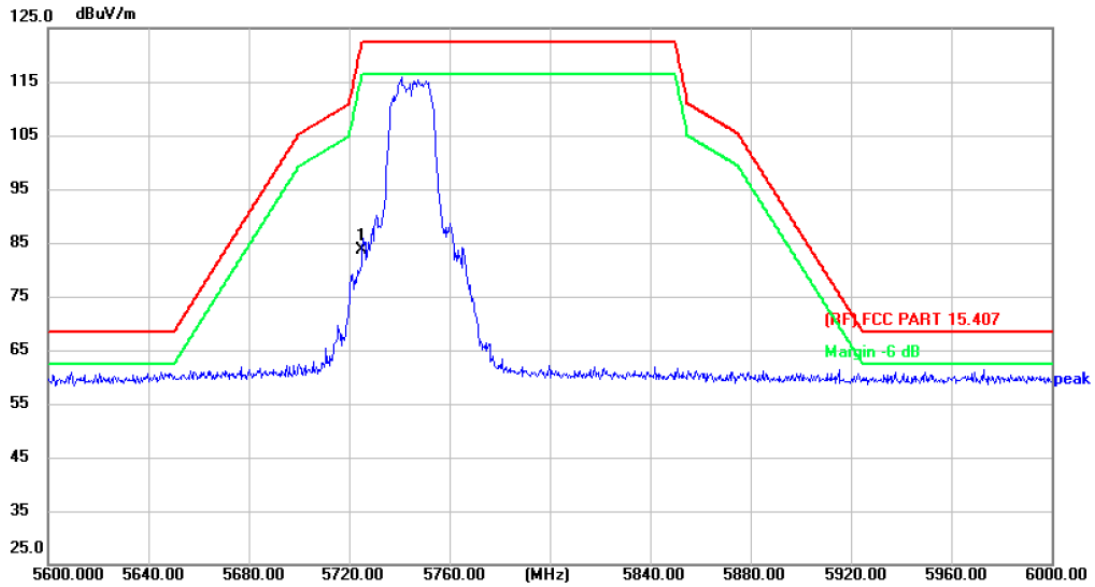


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 68.03 | 15.58 | 83.61 | 122.30 | -38.69 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

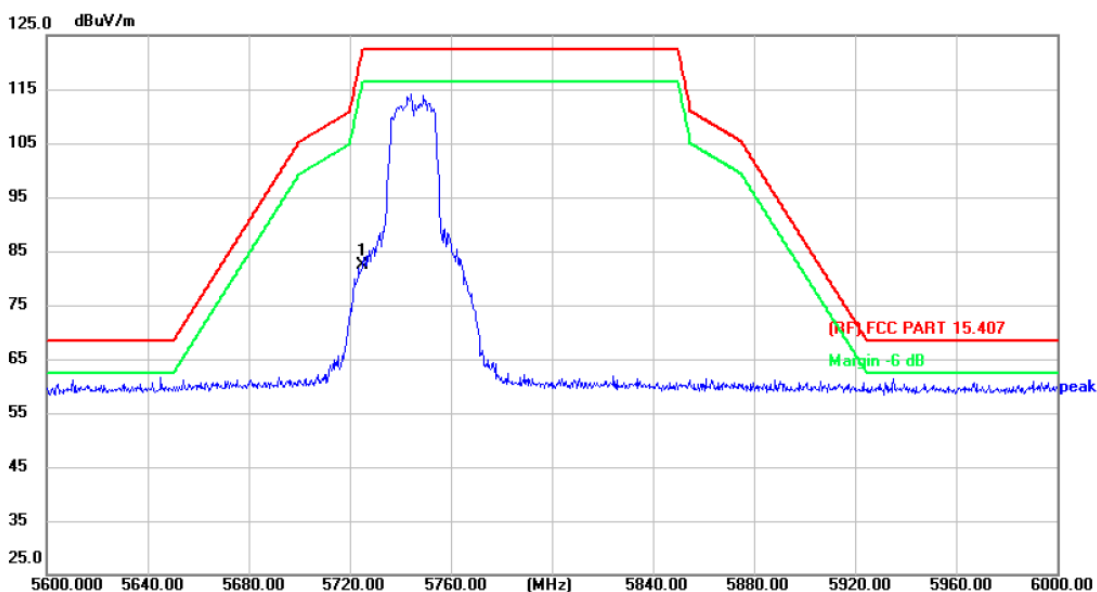


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 66.74 | 15.58 | 82.32 | 122.30 | -39.98 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

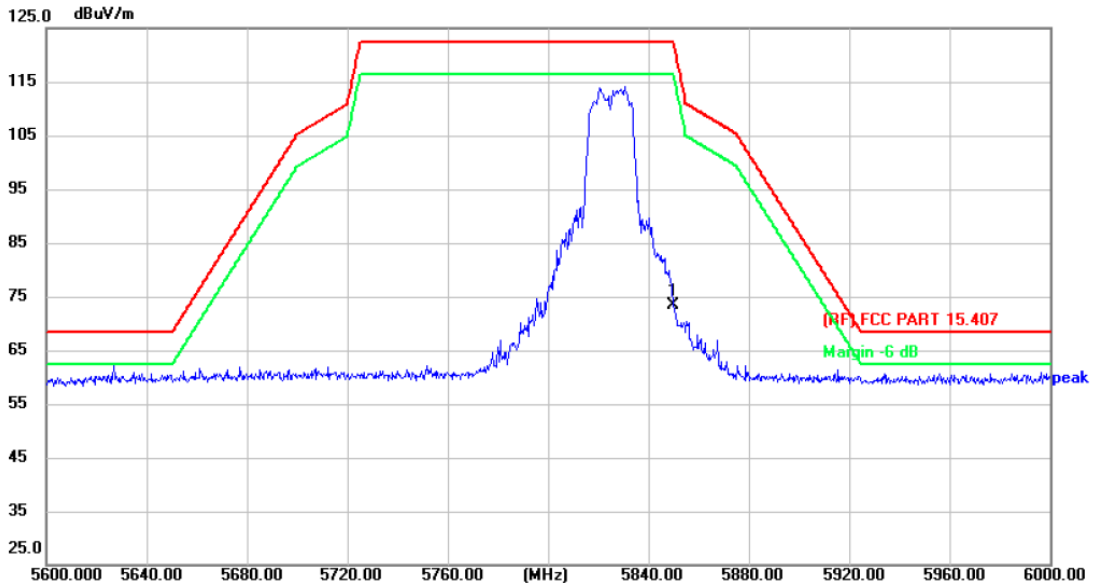


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 57.93 | 15.54 | 73.47 | 122.30 | -48.83 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

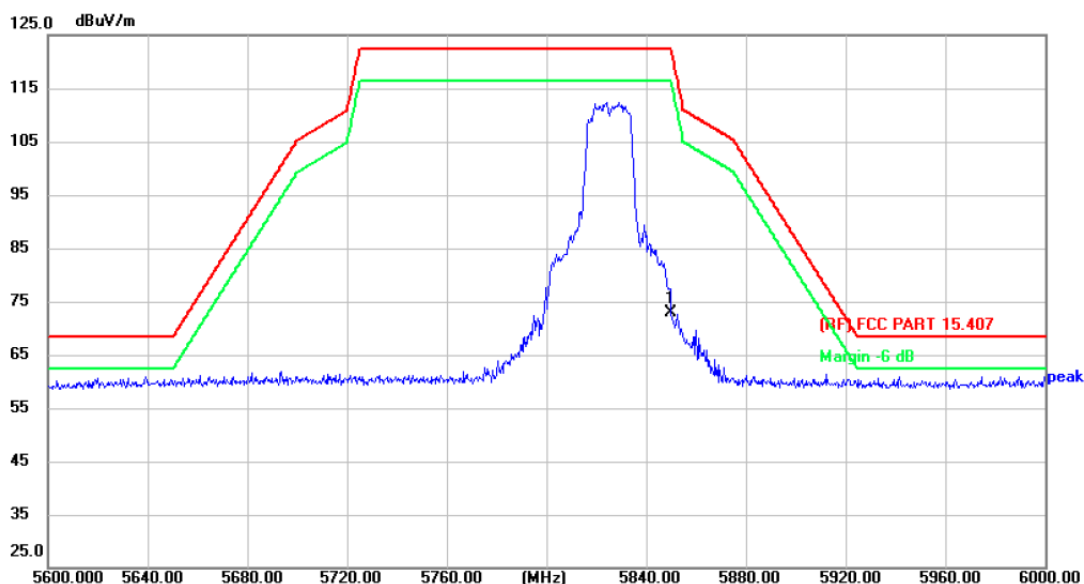


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 57.35 | 15.54 | 72.89 | 122.30 | -49.41 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5745 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

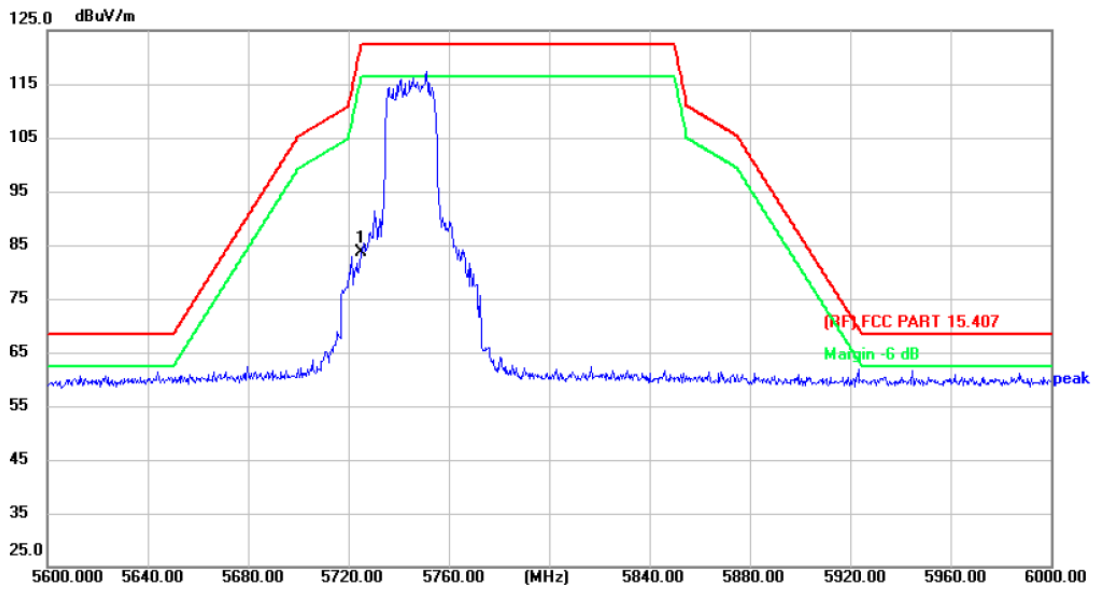


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 68.10 | 15.58 | 83.68 | 122.30 | -38.62 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5745 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

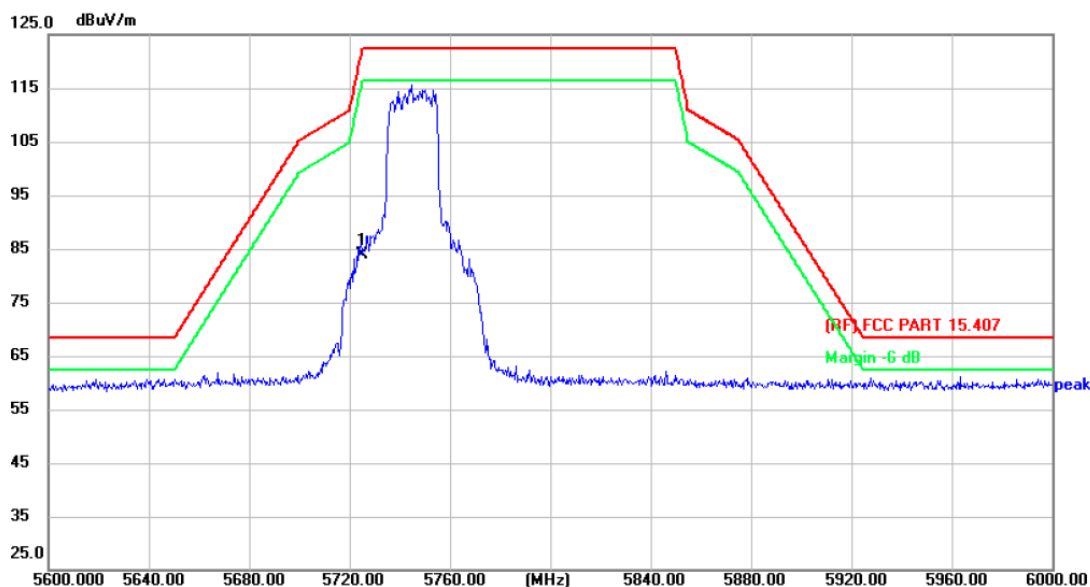


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 68.31 | 15.58 | 83.89 | 122.30 | -38.41 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5825 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

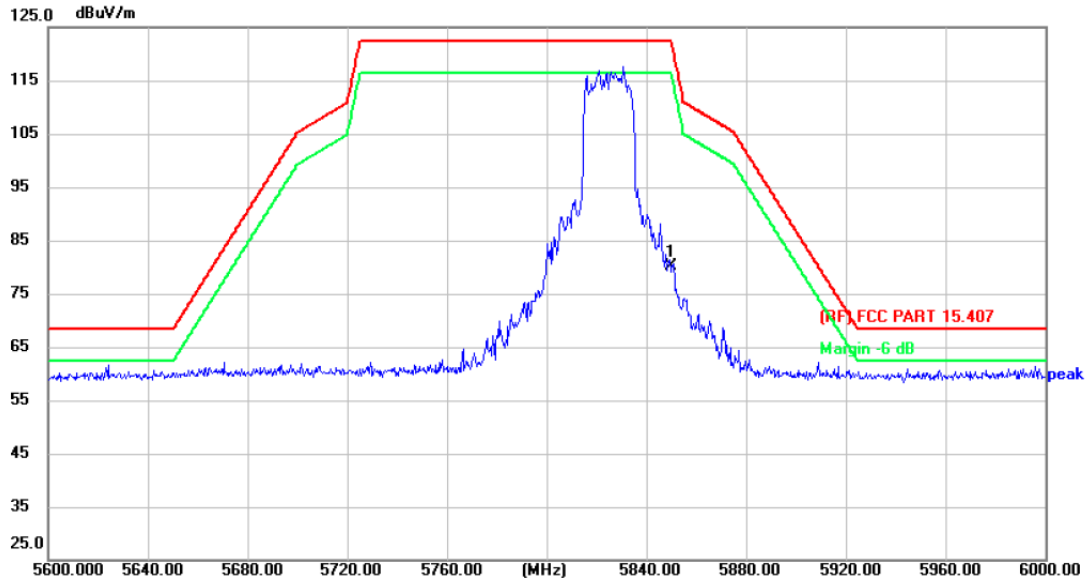


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 64.47 | 15.54 | 80.01 | 122.30 | -42.29 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5825 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

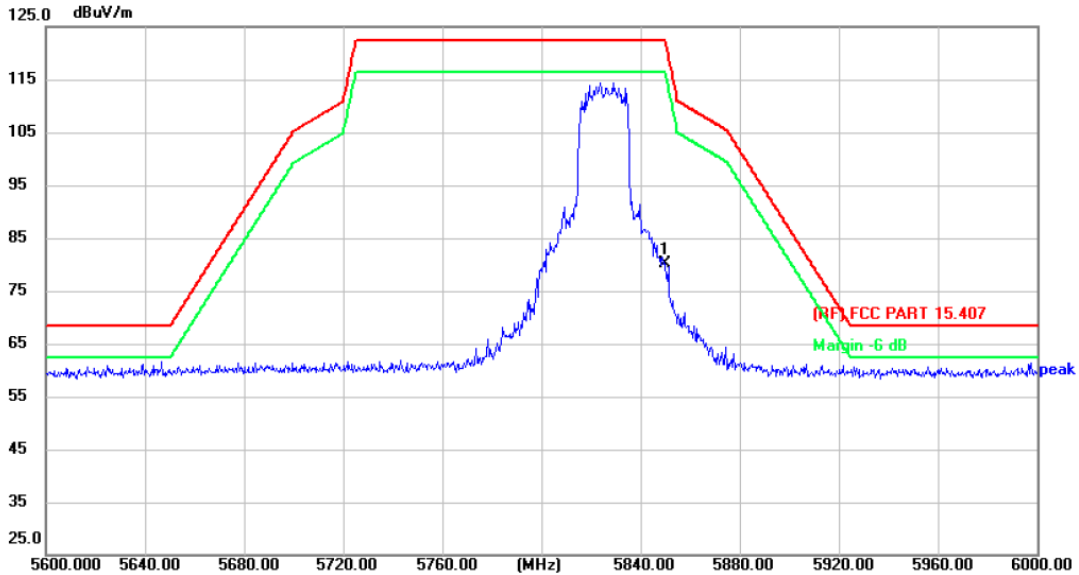


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 64.53 | 15.54 | 80.07 | 122.30 | -42.23 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

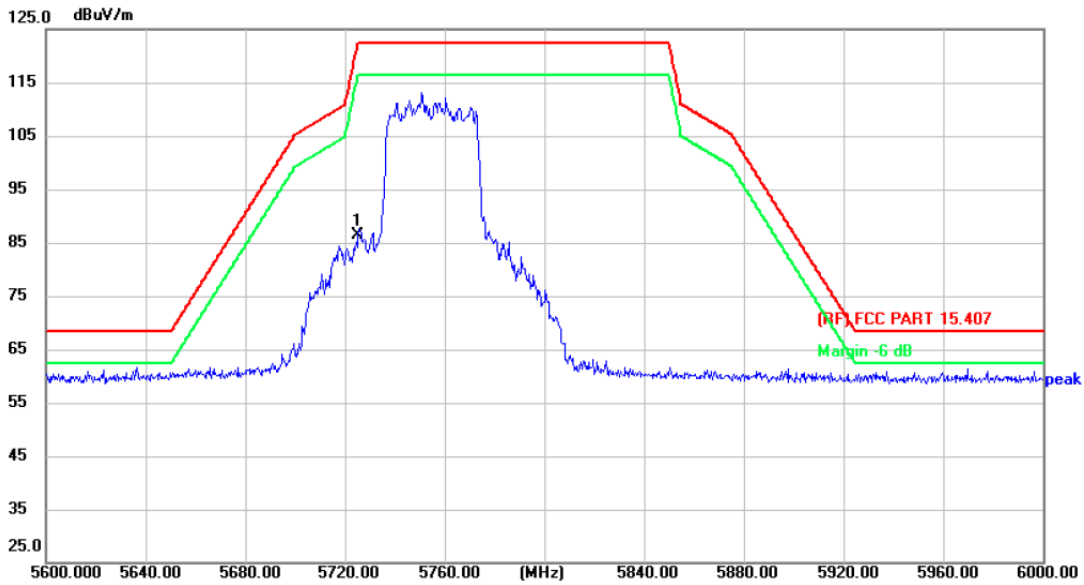


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 70.86 | 15.58 | 86.44 | 122.30 | -35.86 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

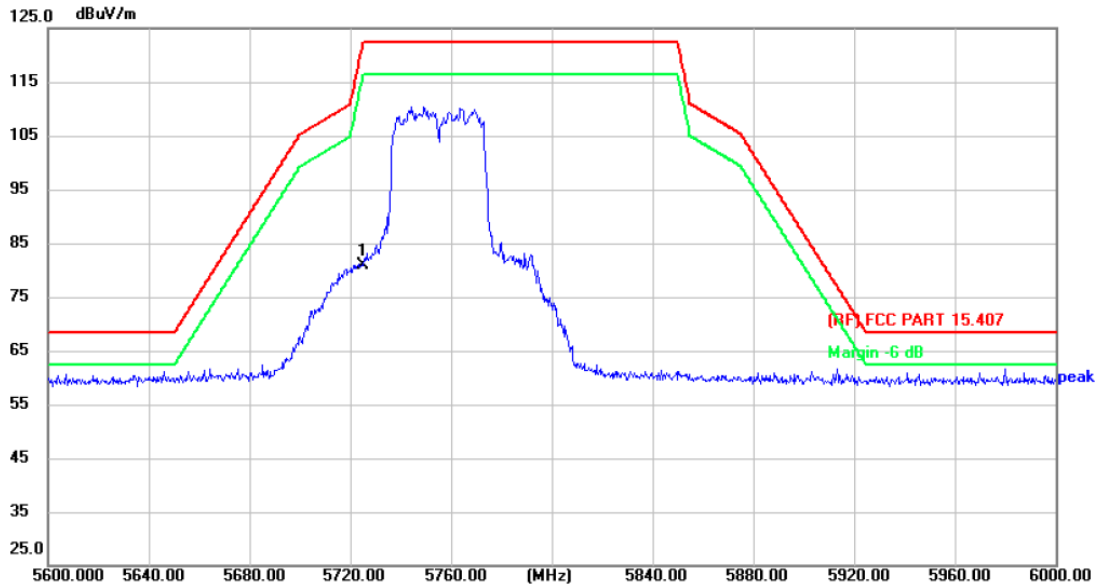


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 65.24 | 15.58 | 80.82 | 122.30 | -41.48 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) -CDD | | |
| Remark: | | | |

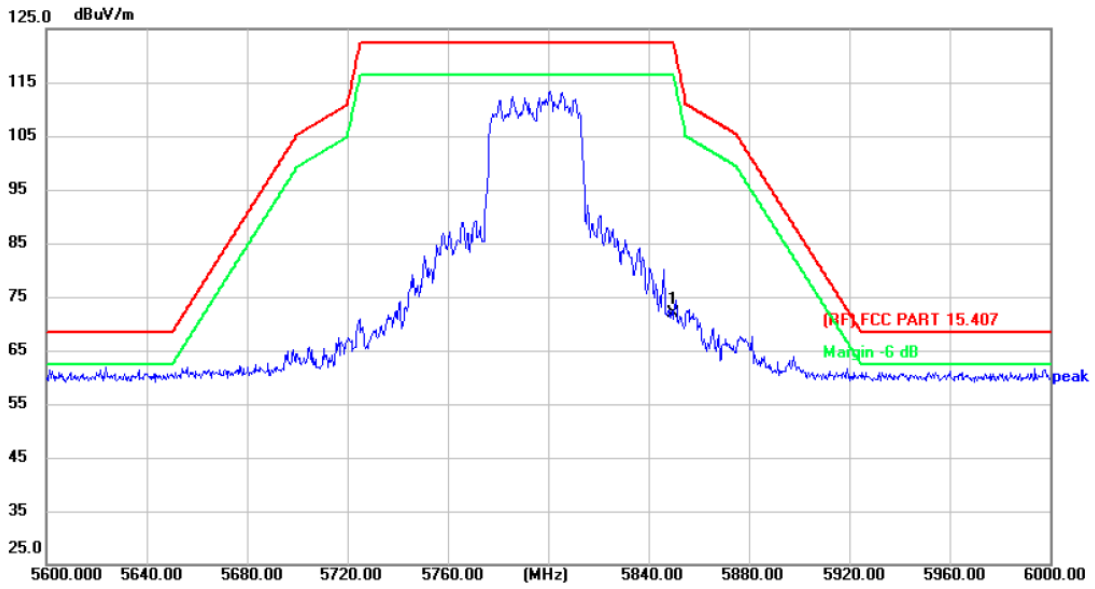

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 56.24 | 15.54 | 71.78 | 122.30 | -50.52 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

