


Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	3DH5 Mode TX 2441MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	Only worse case is reported.		

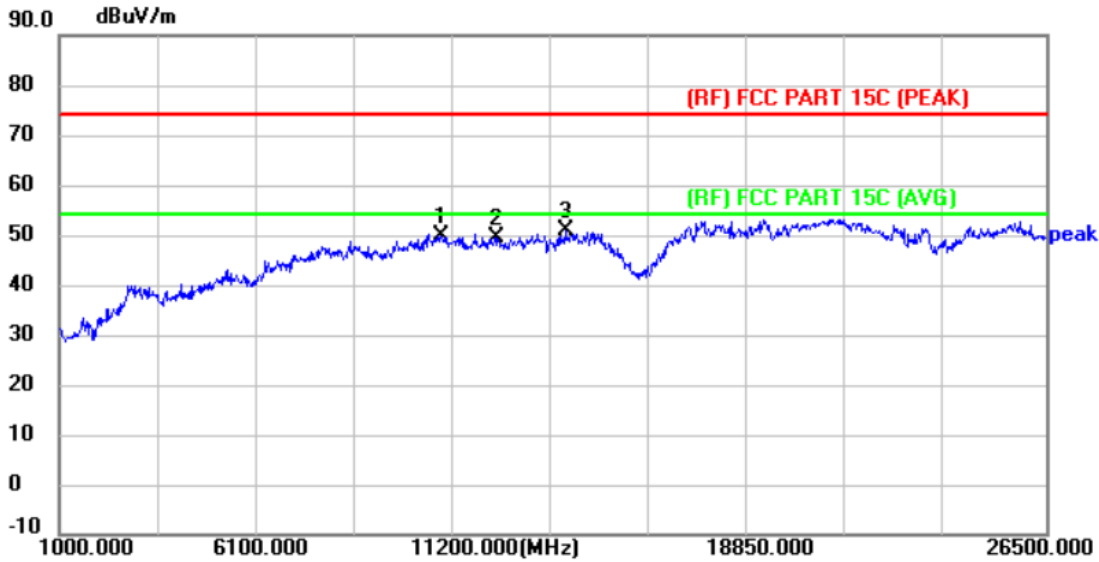


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10894.000	40.00	9.81	49.81	74.00	-24.19	peak	P
2	12296.500	38.04	11.54	49.58	74.00	-24.42	peak	P
3 *	14081.500	38.27	12.70	50.97	74.00	-23.03	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	3DH5 Mode TX 2480MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	Only worse case is reported.		

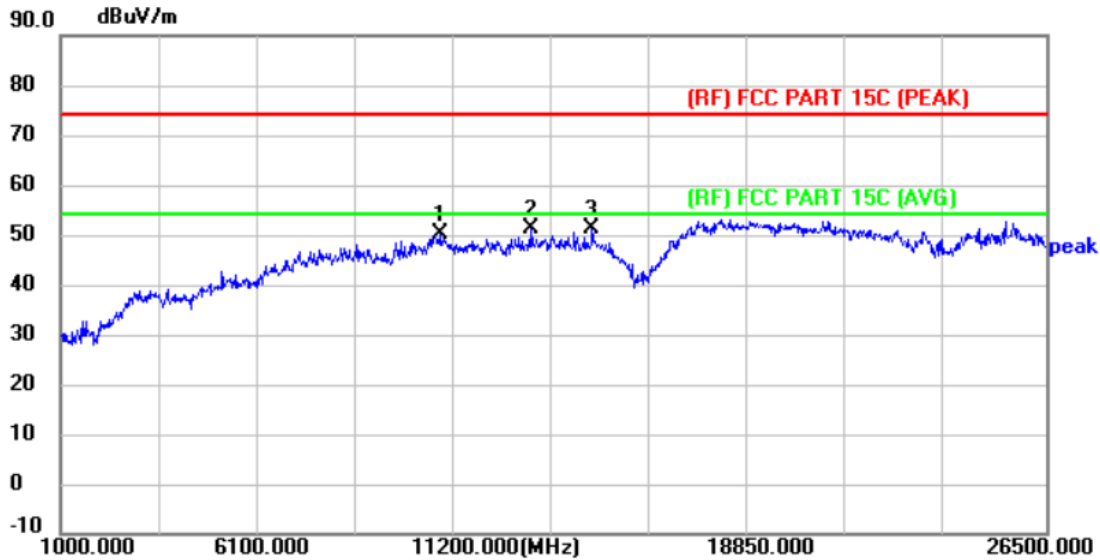


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10817.500	40.47	9.64	50.11	74.00	-23.89	peak	P
2 *	13189.000	39.36	11.92	51.28	74.00	-22.72	peak	P
3	14744.500	37.72	13.39	51.11	74.00	-22.89	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	3DH5 Mode TX 2480MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	Only worse case is reported.		

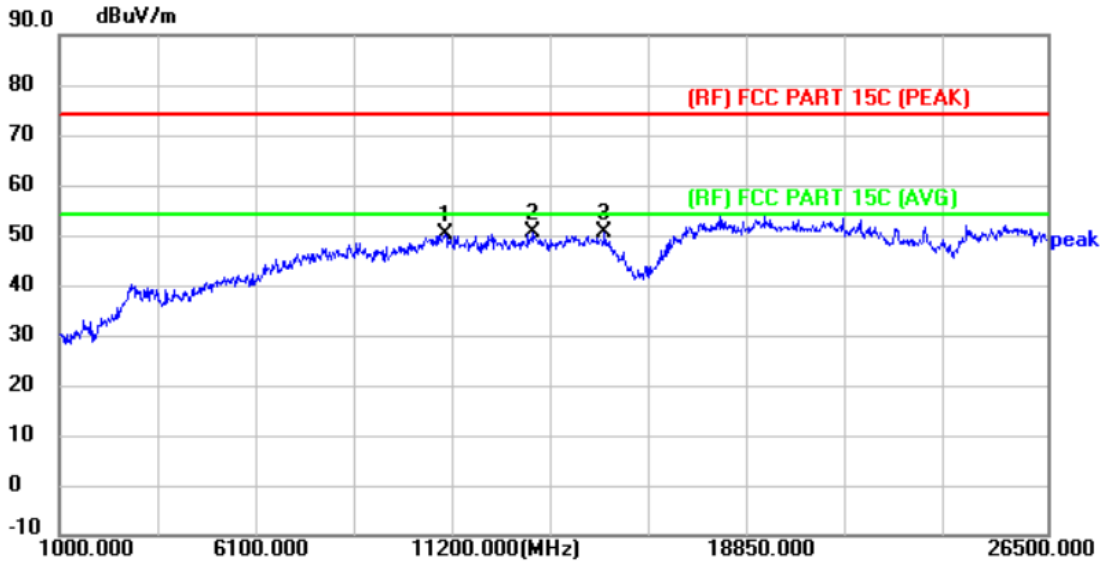


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10945.000	40.23	9.92	50.15	74.00	-23.85	peak	P
2 *	13240.000	38.54	11.96	50.50	74.00	-23.50	peak	P
3	15076.000	37.00	13.38	50.38	74.00	-23.62	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	1DH5 Mode TX 2402 MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

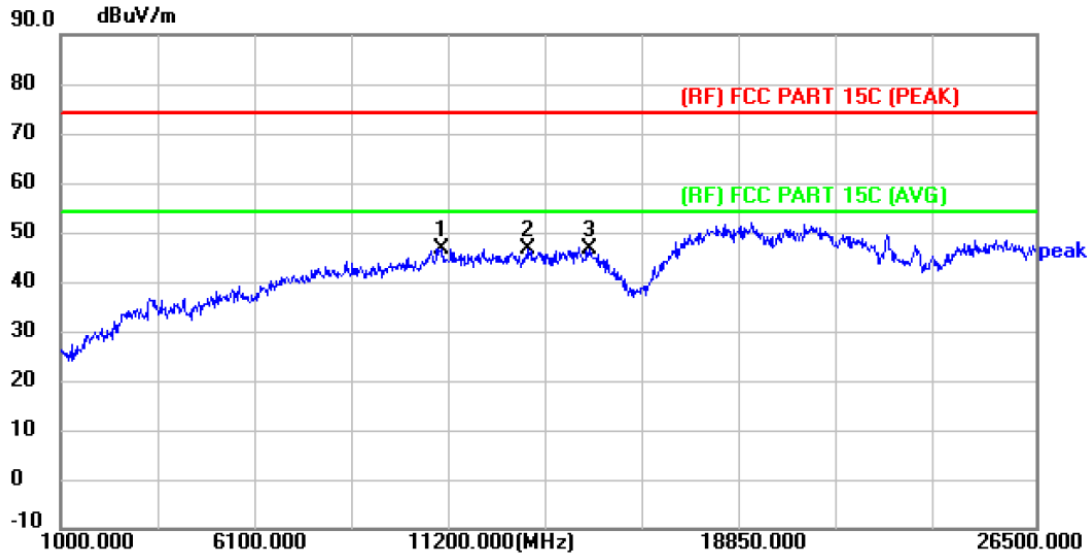


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10945.000	40.84	5.92	46.76	74.00	-27.24	peak	P
2	13214.500	38.75	7.95	46.70	74.00	-27.30	peak	P
3	14821.000	37.28	9.47	46.75	74.00	-27.25	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	1DH5 Mode TX 2402 MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

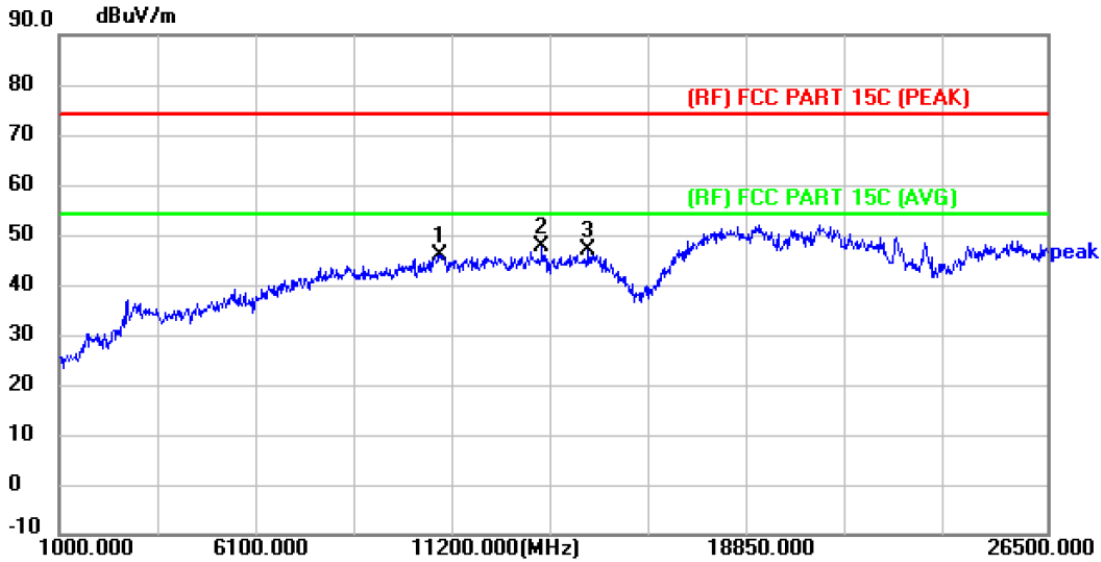


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10817.500	40.39	5.64	46.03	74.00	-27.97	peak	P
2 *	13469.500	39.37	8.16	47.53	74.00	-26.47	peak	P
3	14668.000	37.70	9.31	47.01	74.00	-26.99	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	1DH5 Mode TX 2441MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

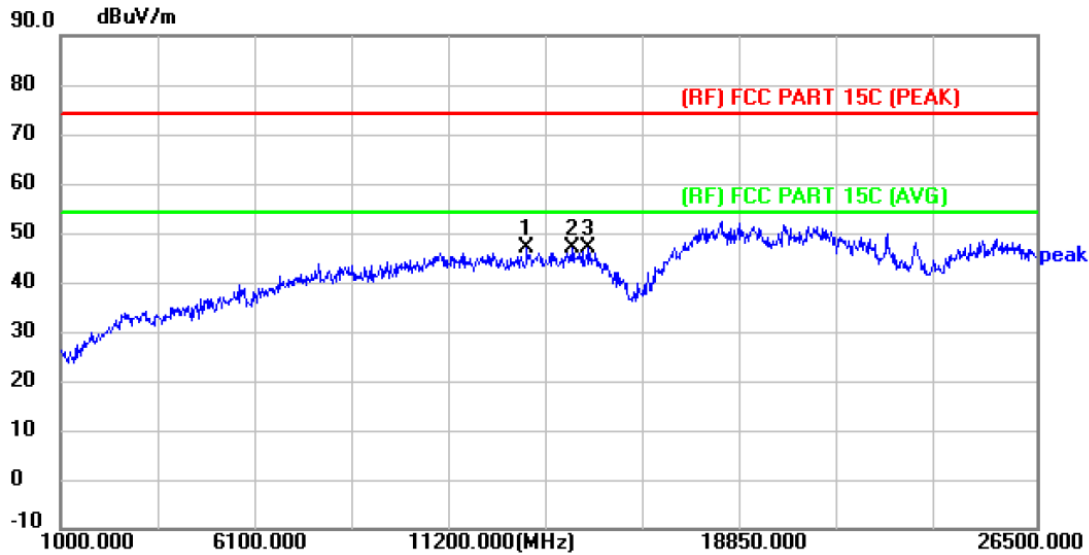


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13189.000	38.93	7.92	46.85	74.00	-27.15	peak	P
2 *	14362.000	37.98	9.00	46.98	74.00	-27.02	peak	P
3	14795.500	37.44	9.45	46.89	74.00	-27.11	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	1DH5 Mode TX 2441MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

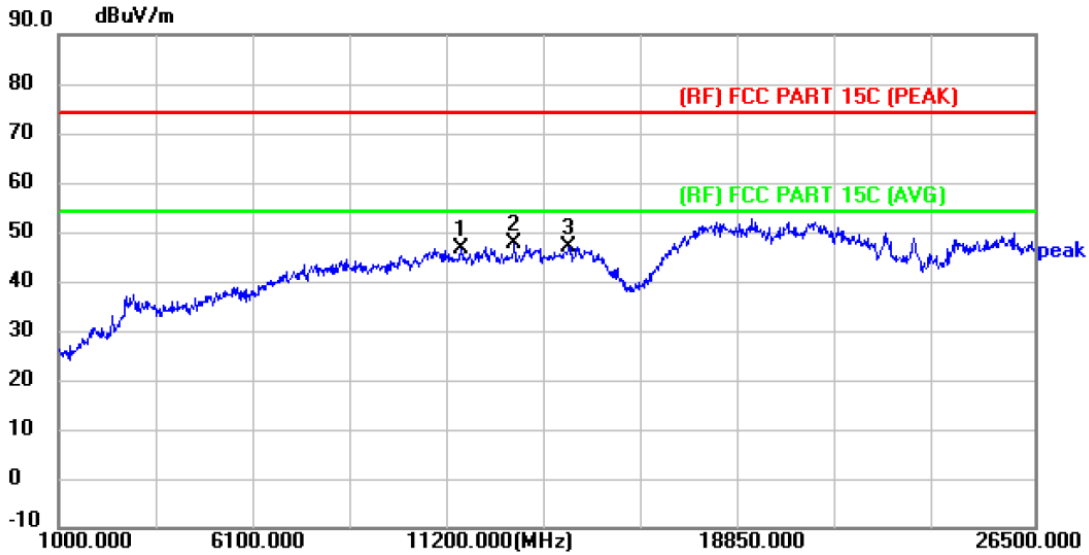

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11506.000	39.84	6.75	46.59	74.00	-27.41	peak	P
2 *	12908.500	39.86	7.73	47.59	74.00	-26.41	peak	P
3	14336.500	38.02	8.96	46.98	74.00	-27.02	peak	P


Remark:

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	1DH5 Mode TX 2480MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

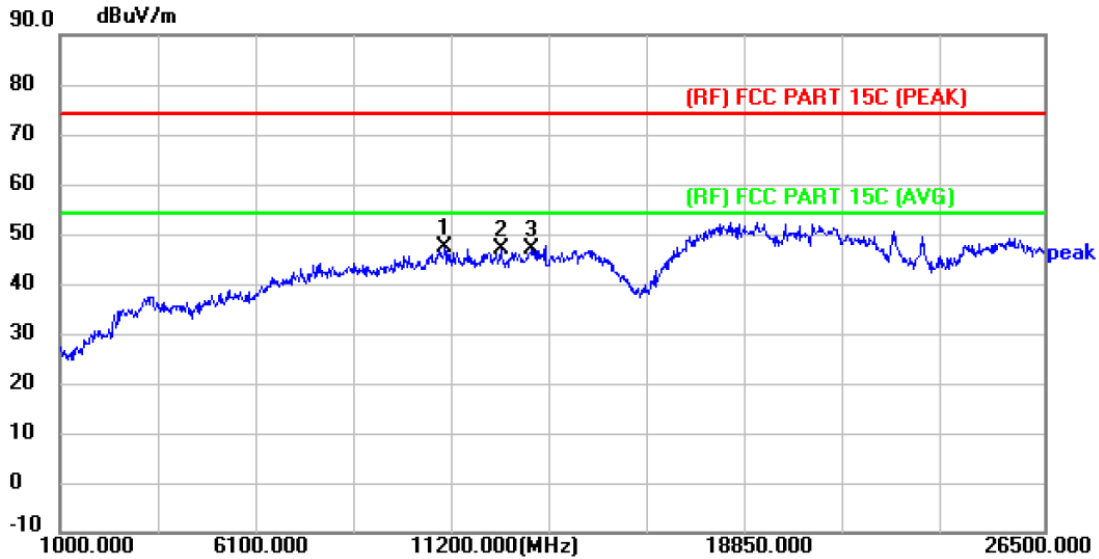


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10970.500	41.29	5.98	47.27	74.00	-26.73	peak	P
2	12424.000	39.30	7.58	46.88	74.00	-27.12	peak	P
3	13240.000	39.17	7.96	47.13	74.00	-26.87	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	1DH5 Mode TX 2480MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

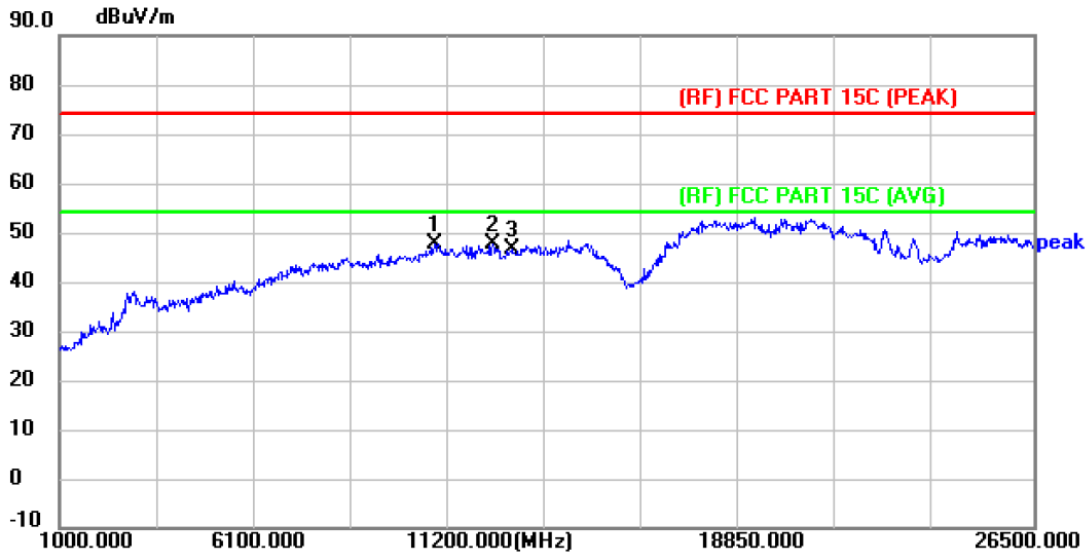


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10843.000	41.82	5.69	47.51	74.00	-26.49	peak	P
2 *	12347.500	40.11	7.56	47.67	74.00	-26.33	peak	P
3	12832.000	38.99	7.71	46.70	74.00	-27.30	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	2DH5 Mode TX 2402MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

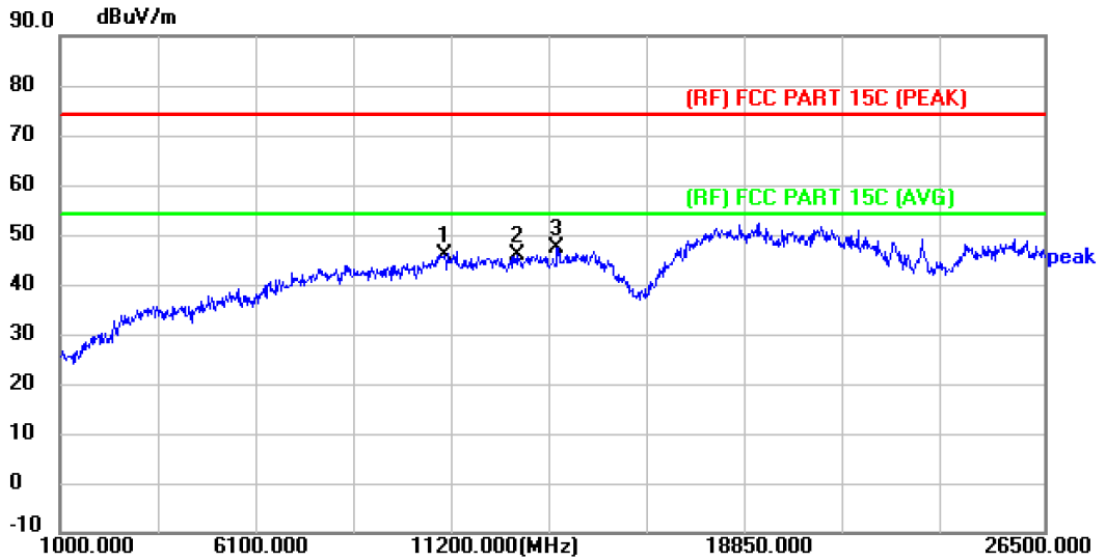


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10970.500	39.99	5.98	45.97	74.00	-28.03	peak	P
2	12832.000	38.18	7.71	45.89	74.00	-28.11	peak	P
3 *	13877.500	38.79	8.51	47.30	74.00	-26.70	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	2DH5 Mode TX 2402MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

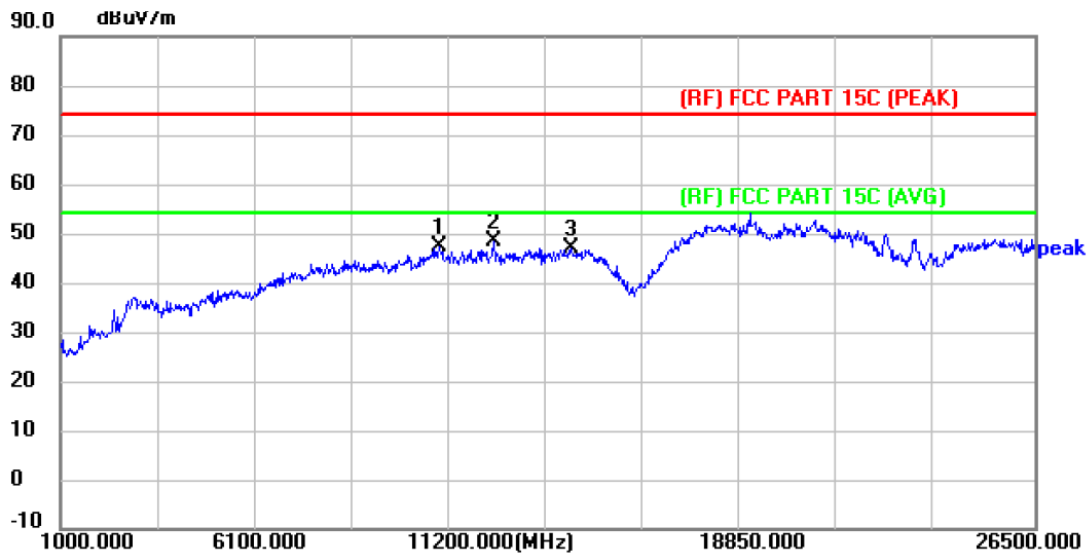


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10919.500	41.38	5.87	47.25	74.00	-26.75	peak	P
2 *	12347.500	40.68	7.56	48.24	74.00	-25.76	peak	P
3	14387.500	37.79	9.02	46.81	74.00	-27.19	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	2DH5 Mode TX 2441MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

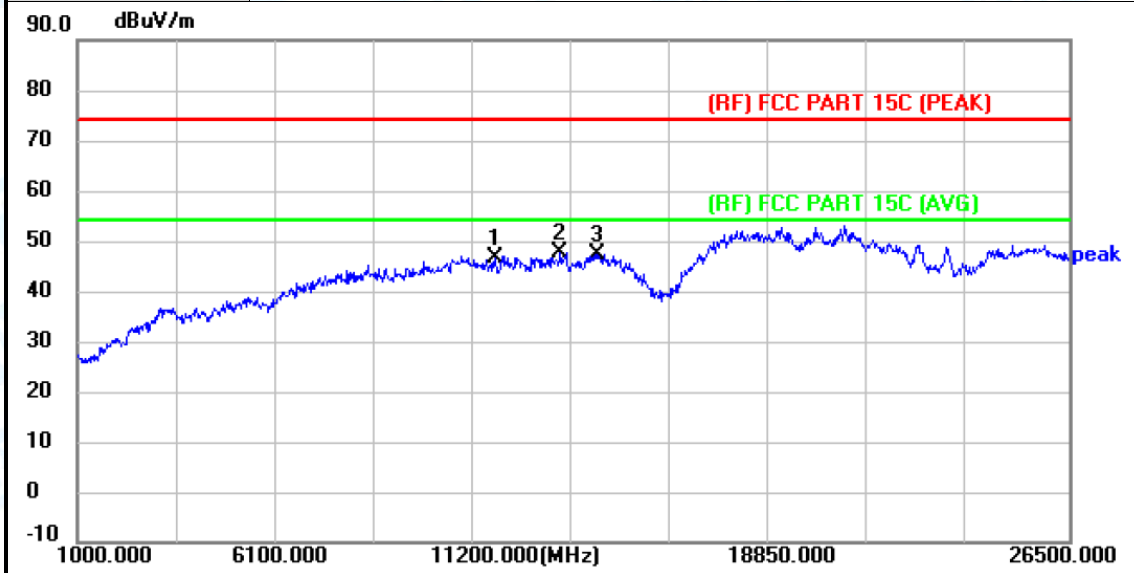


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11735.500	39.43	7.08	46.51	74.00	-27.49	peak	P
2 *	13418.500	39.50	8.12	47.62	74.00	-26.38	peak	P
3	14387.500	38.26	9.02	47.28	74.00	-26.72	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	2DH5 Mode TX 2441MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

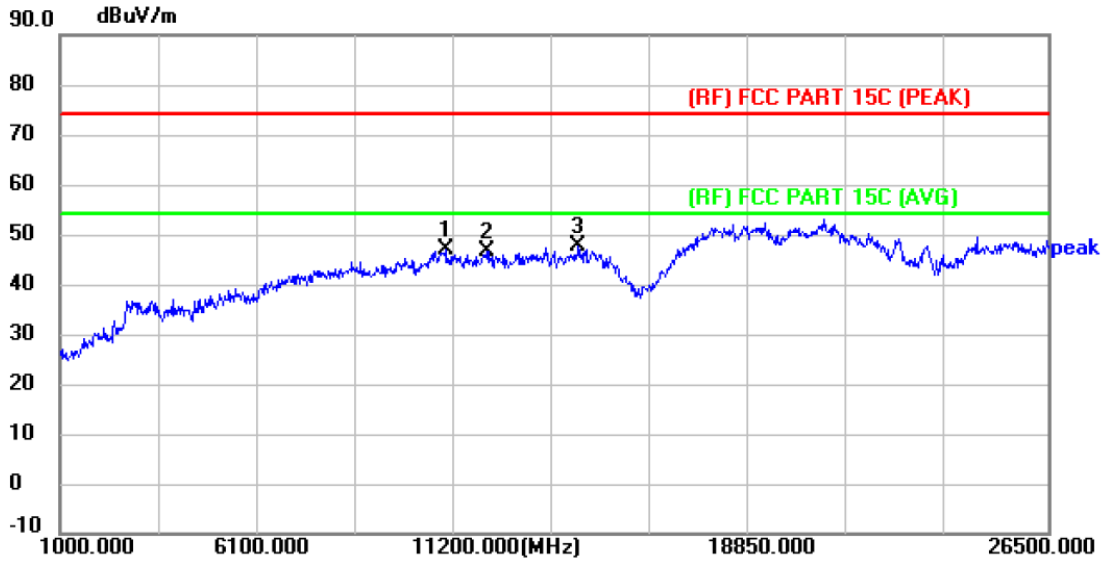


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10945.000	41.08	5.92	47.00	74.00	-27.00	peak	P
2	12041.500	39.04	7.47	46.51	74.00	-27.49	peak	P
3 *	14387.500	38.61	9.02	47.63	74.00	-26.37	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	2DH5 Mode TX 2480MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

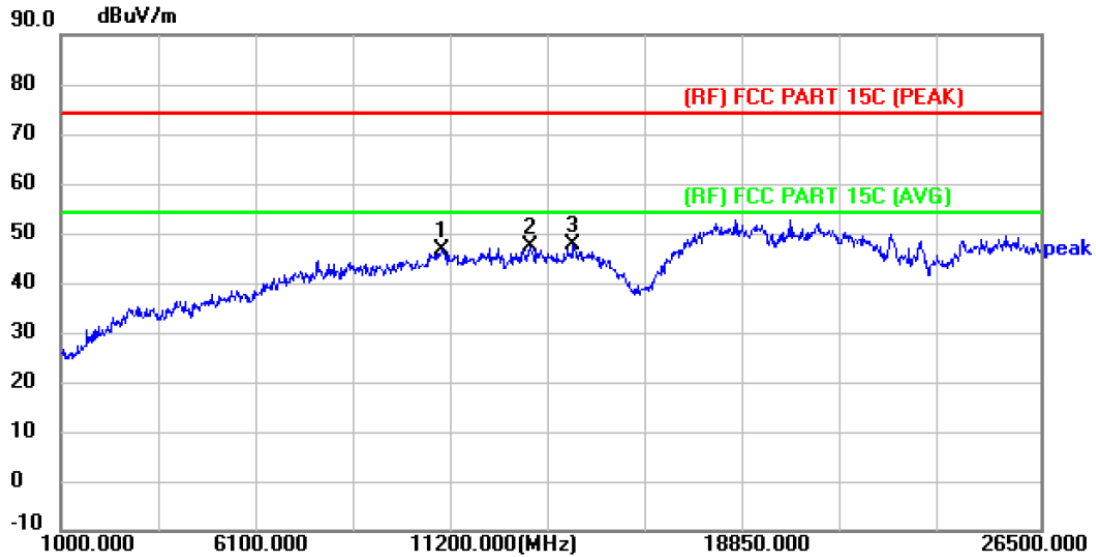


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10919.500	40.89	5.87	46.76	74.00	-27.24	peak	P
2	13214.500	39.49	7.95	47.44	74.00	-26.56	peak	P
3 *	14336.500	38.73	8.96	47.69	74.00	-26.31	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	2DH5 Mode TX 2480MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

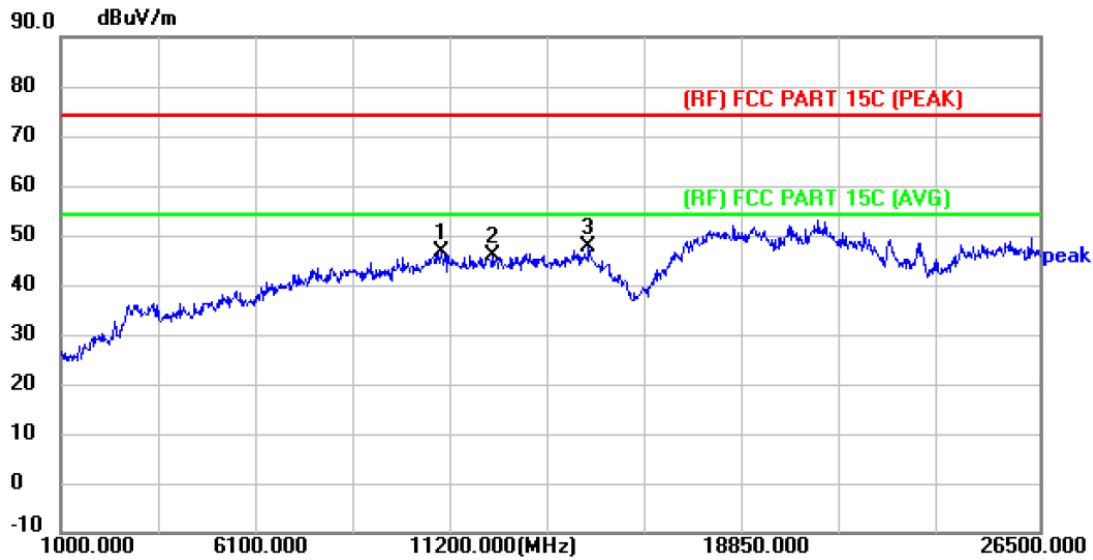


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10919.500	40.76	5.87	46.63	74.00	-27.37	peak	P
2	12271.000	38.27	7.53	45.80	74.00	-28.20	peak	P
3 *	14744.500	38.15	9.39	47.54	74.00	-26.46	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	3DH5 Mode TX 2402MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

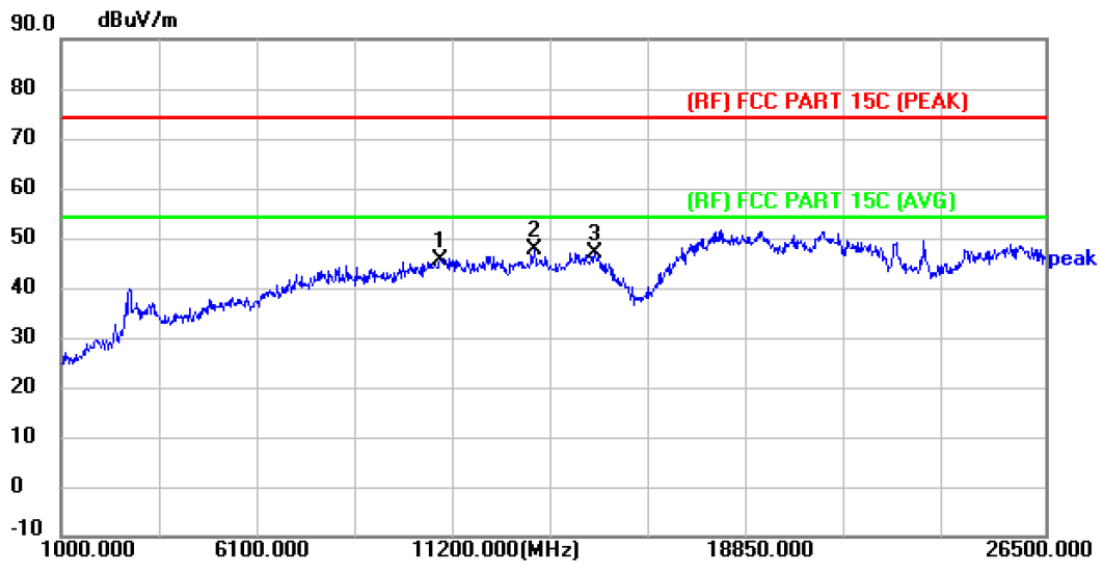


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10843.000	39.99	5.69	45.68	74.00	-28.32	peak	P
2 *	13265.500	39.71	7.98	47.69	74.00	-26.31	peak	P
3	14821.000	37.50	9.47	46.97	74.00	-27.03	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	3DH5 Mode TX 2402MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

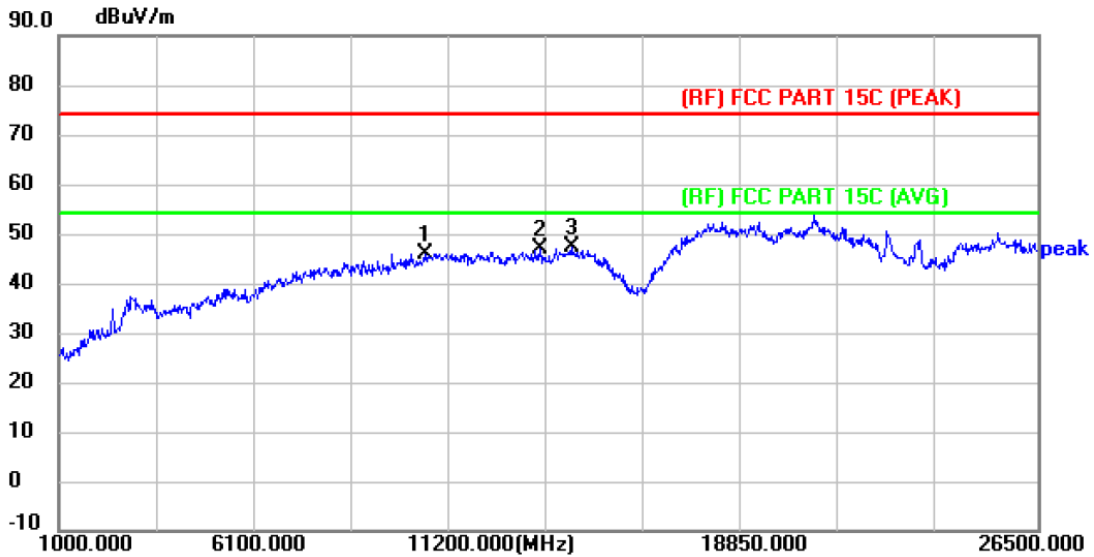


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10562.500	40.79	5.04	45.83	74.00	-28.17	peak	P
2	13520.500	38.68	8.20	46.88	74.00	-27.12	peak	P
3 *	14362.000	38.32	9.00	47.32	74.00	-26.68	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	3DH5 Mode TX 2441MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

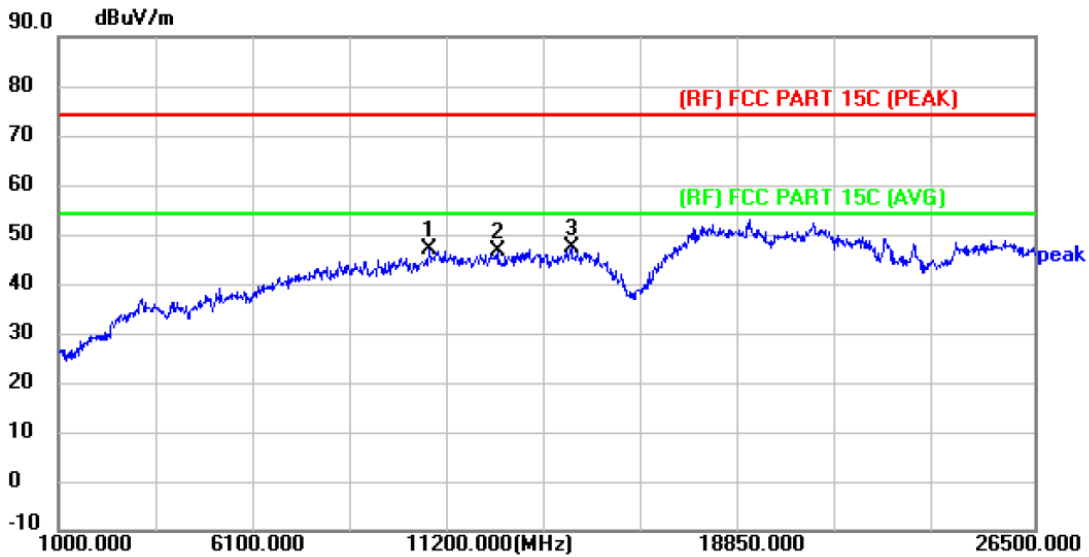


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10690.000	41.70	5.35	47.05	74.00	-26.95	peak	P
2	12475.000	39.07	7.59	46.66	74.00	-27.34	peak	P
3 *	14413.000	38.43	9.04	47.47	74.00	-26.53	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	3DH5 Mode TX 2441MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

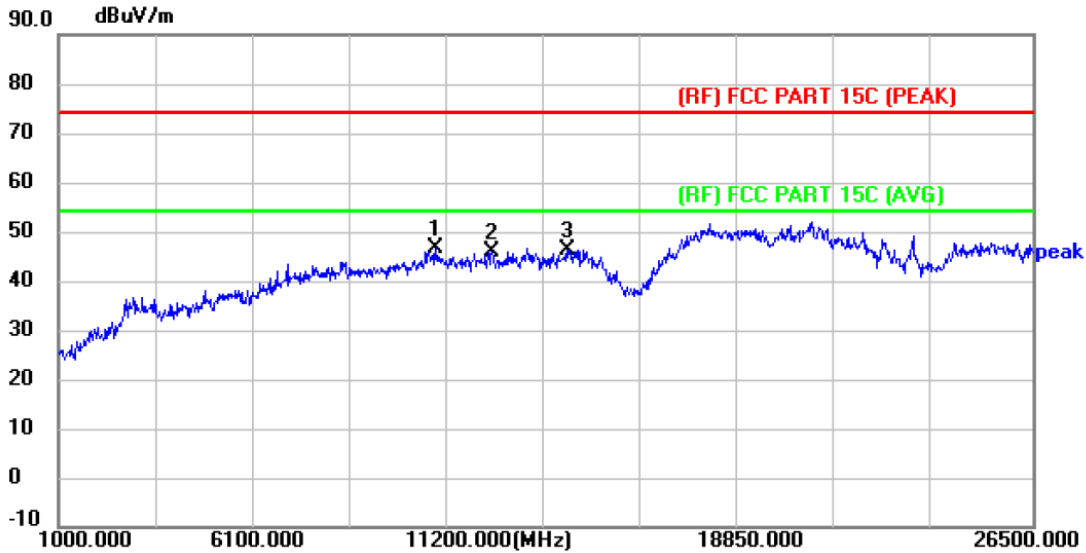


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10894.000	40.91	5.81	46.72	74.00	-27.28	peak	P
2	12347.500	38.32	7.56	45.88	74.00	-28.12	peak	P
3	14336.500	37.37	8.96	46.33	74.00	-27.67	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	3DH5 Mode TX 2480MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

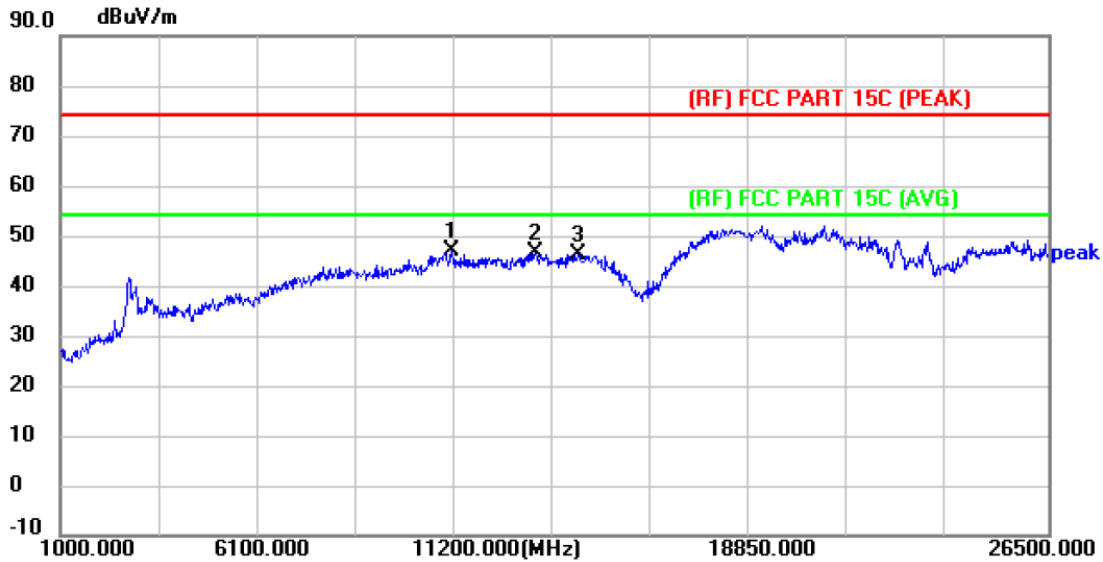


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11098.000	40.65	6.19	46.84	74.00	-27.16	peak	P
2	13265.500	38.50	7.98	46.48	74.00	-27.52	peak	P
3	14387.500	37.36	9.02	46.38	74.00	-27.62	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.4°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	3DH5 Mode TX 2480MHz with Antenna(JY-BT-24-13)		
Remark:	Only worse case is reported.		

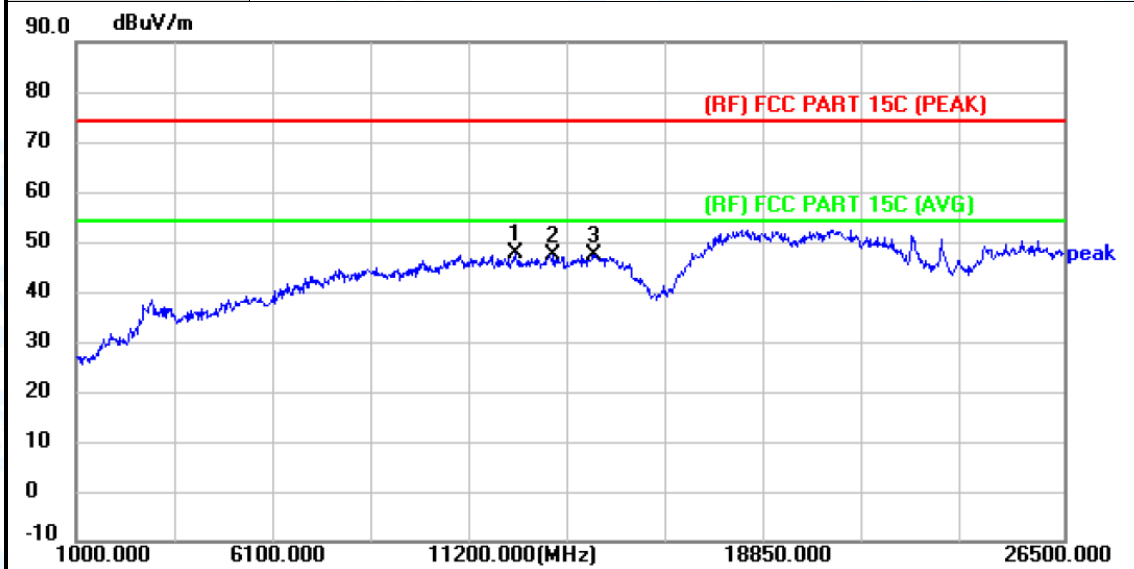

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	12347.500	40.14	7.56	47.70	74.00	-26.30	peak	P
2	13291.000	39.46	8.00	47.46	74.00	-26.54	peak	P
3	14387.500	38.42	9.02	47.44	74.00	-26.56	peak	P


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Attachment C-- Restricted Bands Data

Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	1DH5 Mode TX 2402MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	N/A		

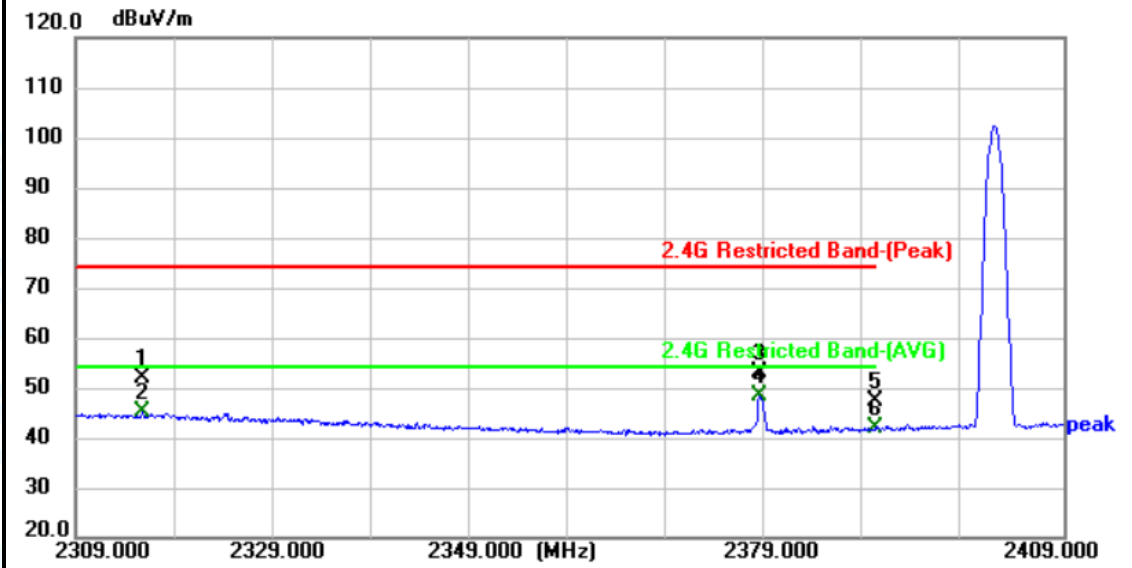


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2315.800	56.98	-4.84	52.14	74.00	-21.86	peak	P
2	2315.800	50.01	-4.84	45.17	54.00	-8.83	AVG	P
3	2378.200	57.70	-4.72	52.98	74.00	-21.02	peak	P
4 *	2378.200	53.06	-4.72	48.34	54.00	-5.66	AVG	P
5	2390.000	51.91	-4.70	47.21	74.00	-26.79	peak	P
6	2390.000	46.59	-4.70	41.89	54.00	-12.11	AVG	P

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	1DH5 Mode TX 2402MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	N/A		

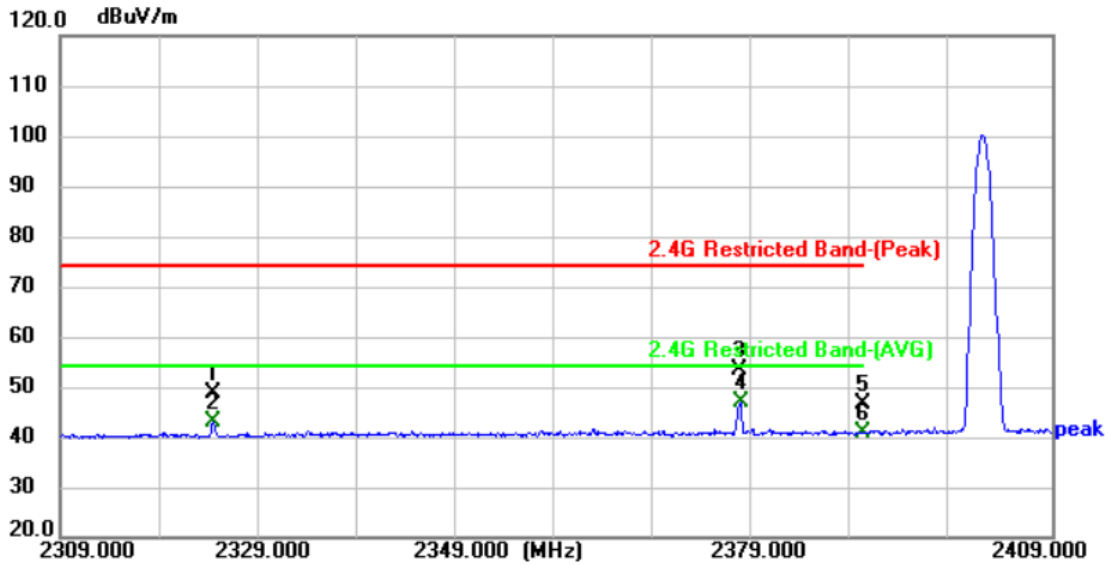


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2324.400	53.47	-4.82	48.65	74.00	-25.35	peak	P
2	2324.400	47.81	-4.82	42.99	54.00	-11.01	AVG	P
3	2377.500	58.17	-4.72	53.45	74.00	-20.55	peak	P
4 *	2377.600	51.66	-4.72	46.94	54.00	-7.06	AVG	P
5	2390.000	51.24	-4.70	46.54	74.00	-27.46	peak	P
6	2390.000	45.59	-4.70	40.89	54.00	-13.11	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	1DH5 Mode TX 2480MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	N/A		

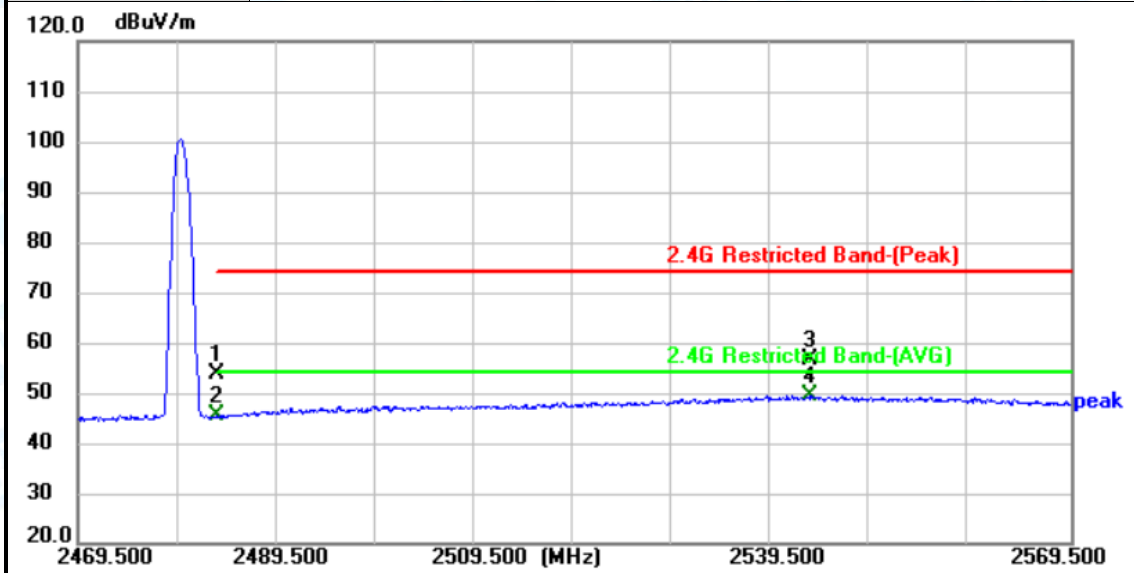


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	58.18	-4.53	53.65	74.00	-20.35	peak	P
2	2483.500	50.01	-4.53	45.48	54.00	-8.52	AVG	P
3	2543.300	60.86	-4.43	56.43	74.00	-17.57	peak	P
4 *	2543.300	53.90	-4.43	49.47	54.00	-4.53	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	1DH5 Mode TX 2480MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	N/A		

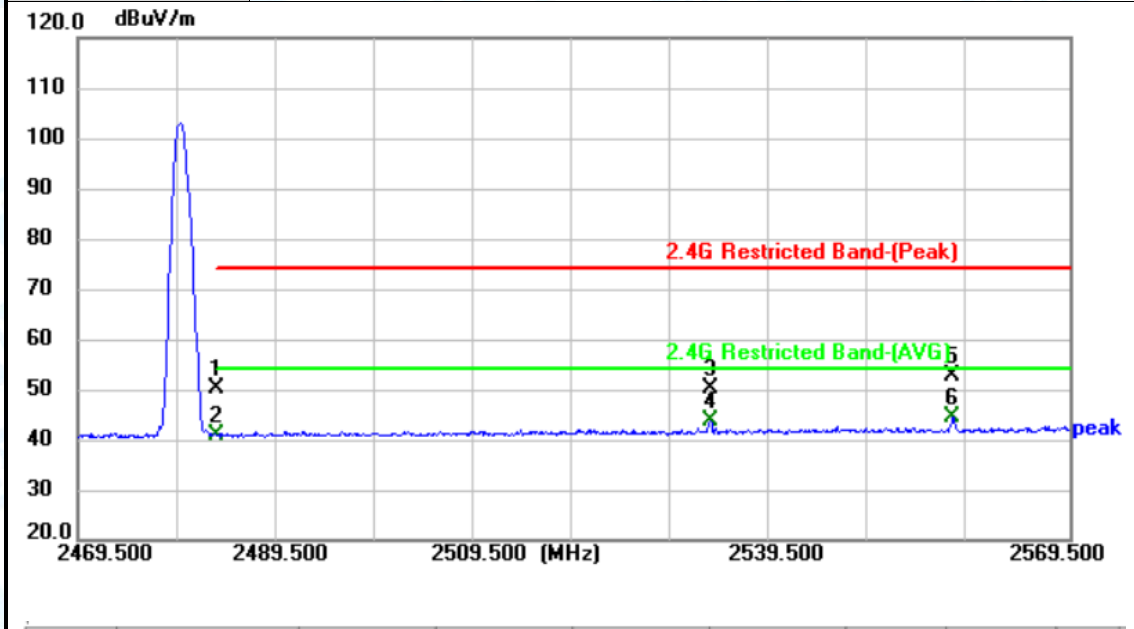


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	54.78	-4.53	50.25	74.00	-23.75	peak	P
2	2483.500	45.46	-4.53	40.93	54.00	-13.07	AVG	P
3	2533.300	54.72	-4.44	50.28	74.00	-23.72	peak	P
4	2533.300	48.30	-4.44	43.86	54.00	-10.14	AVG	P
5	2557.700	57.21	-4.39	52.82	74.00	-21.18	peak	P
6 *	2557.700	49.00	-4.39	44.61	54.00	-9.39	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	2DH5 Mode TX 2402MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	N/A		

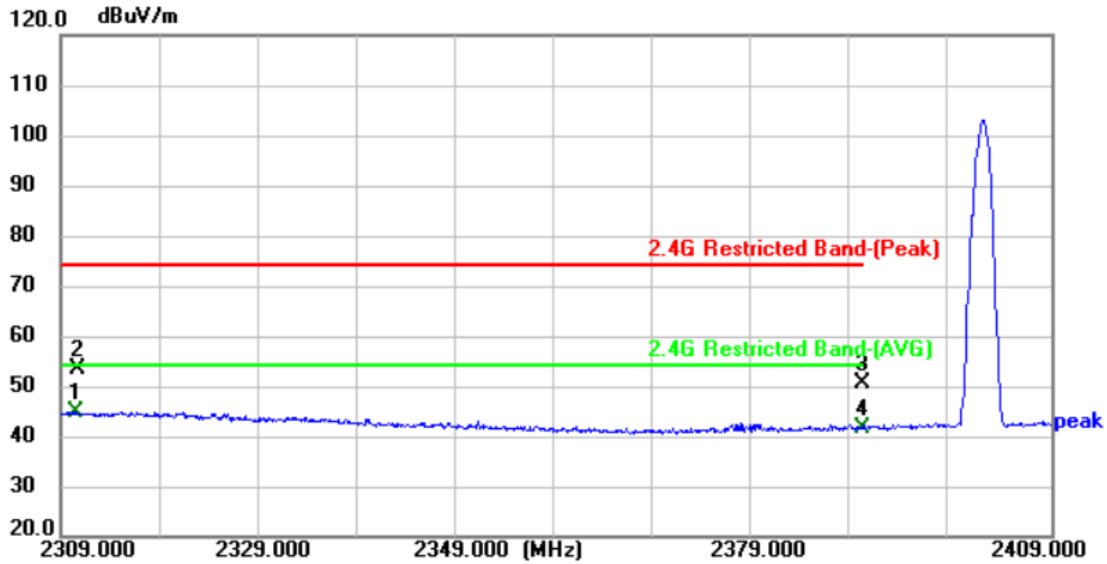


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2310.600	49.81	-4.84	44.97	54.00	-9.03	AVG	P
2	2310.800	58.40	-4.84	53.56	74.00	-20.44	peak	P
3	2390.000	55.11	-4.70	50.41	74.00	-23.59	peak	P
4	2390.000	46.37	-4.70	41.67	54.00	-12.33	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	2DH5 Mode TX 2402MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	N/A		

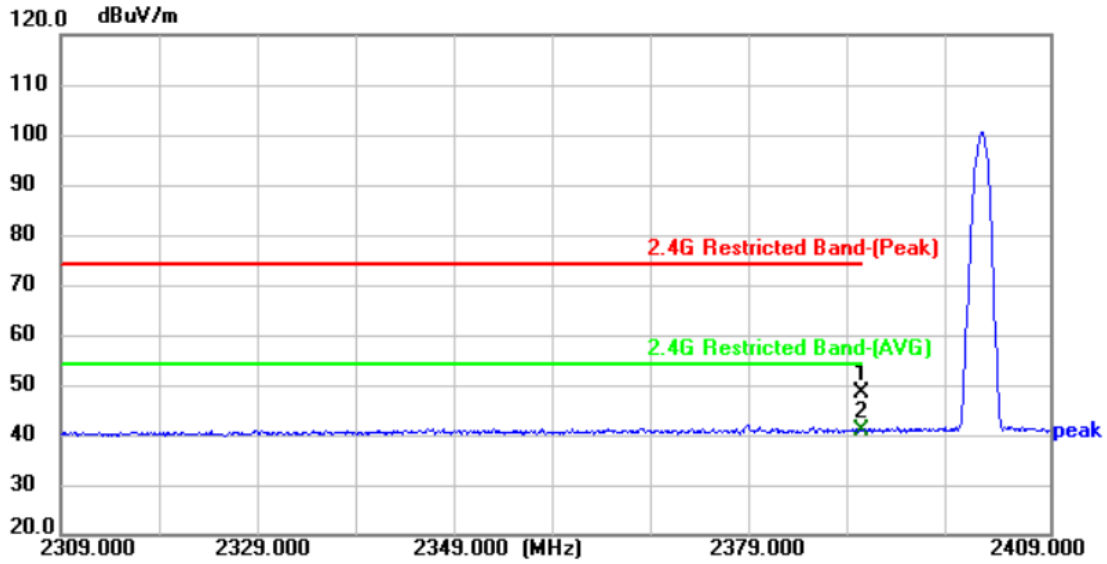


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	53.07	-4.70	48.37	74.00	-25.63	peak	P
2 *	2390.000	45.65	-4.70	40.95	54.00	-13.05	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	2DH5 Mode TX 2480MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	N/A		

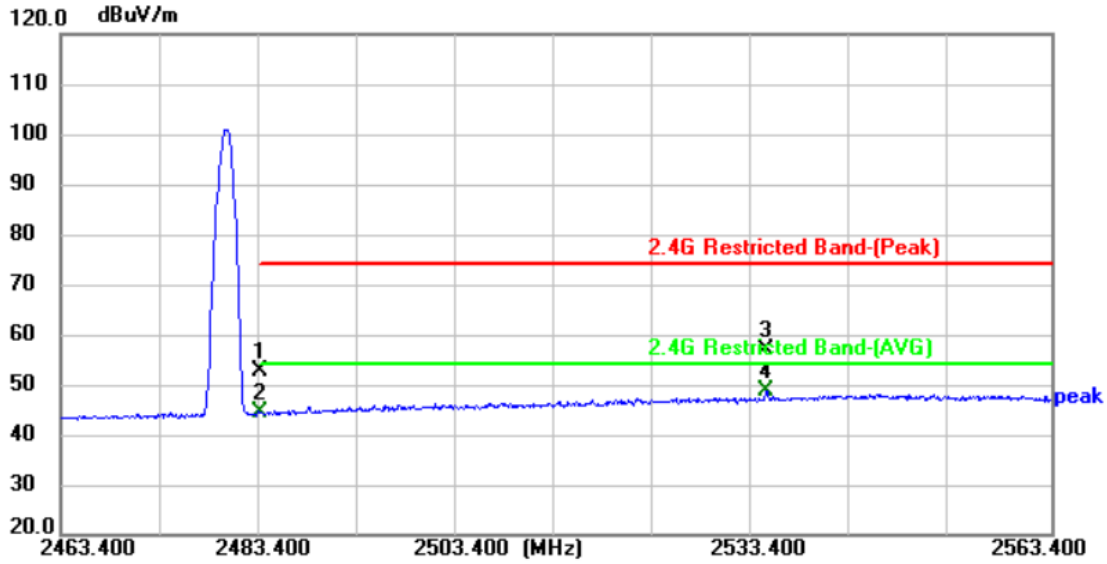


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	57.20	-4.53	52.67	74.00	-21.33	peak	P
2	2483.500	49.11	-4.53	44.58	54.00	-9.42	AVG	P
3	2534.600	61.42	-4.44	56.98	74.00	-17.02	peak	P
4 *	2534.600	53.10	-4.44	48.66	54.00	-5.34	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	2DH5 Mode TX 2480MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	N/A		

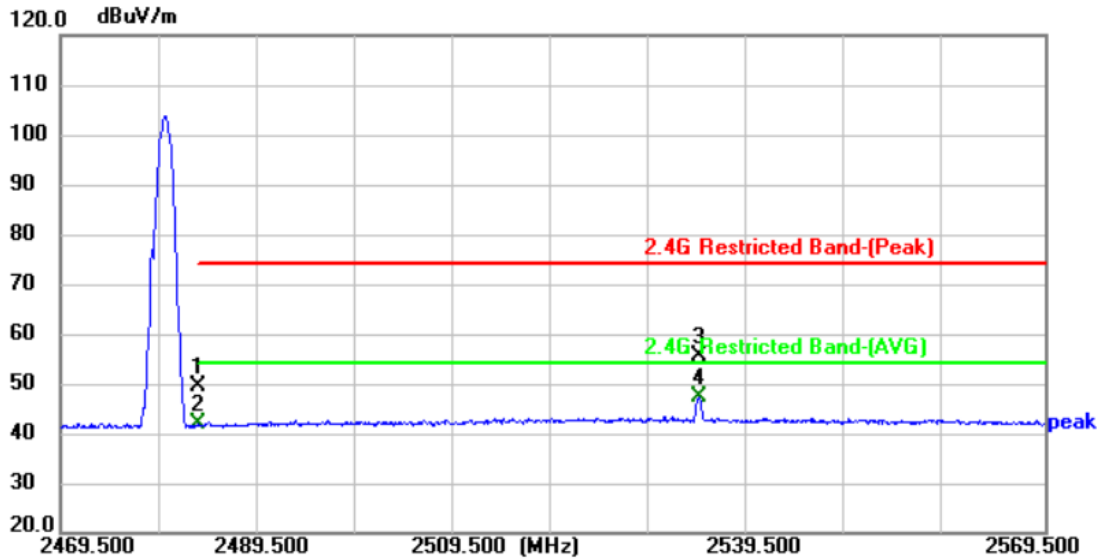


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	54.11	-4.53	49.58	74.00	-24.42	peak	P
2	2483.500	46.33	-4.53	41.80	54.00	-12.20	AVG	P
3	2534.400	60.13	-4.44	55.69	74.00	-18.31	peak	P
4 *	2534.400	51.61	-4.44	47.17	54.00	-6.83	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	3DH5 Mode TX 2402MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	N/A		

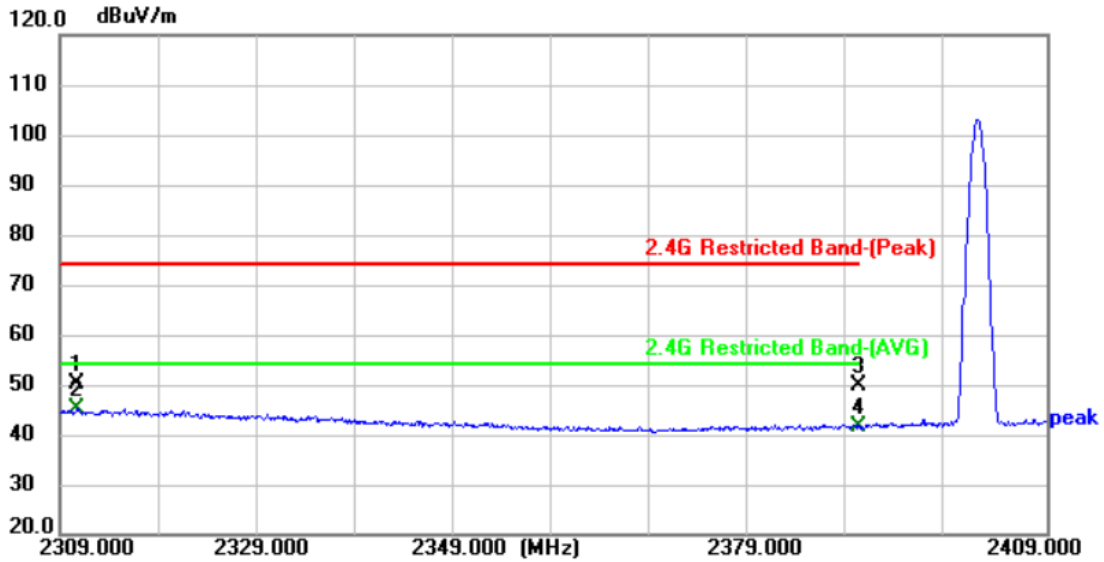


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.800	54.99	-4.84	50.15	74.00	-23.85	peak	P
2 *	2310.800	49.96	-4.84	45.12	54.00	-8.88	AVG	P
3	2390.000	54.67	-4.70	49.97	74.00	-24.03	peak	P
4	2390.000	46.34	-4.70	41.64	54.00	-12.36	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	3DH5 Mode TX 2402MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	N/A		

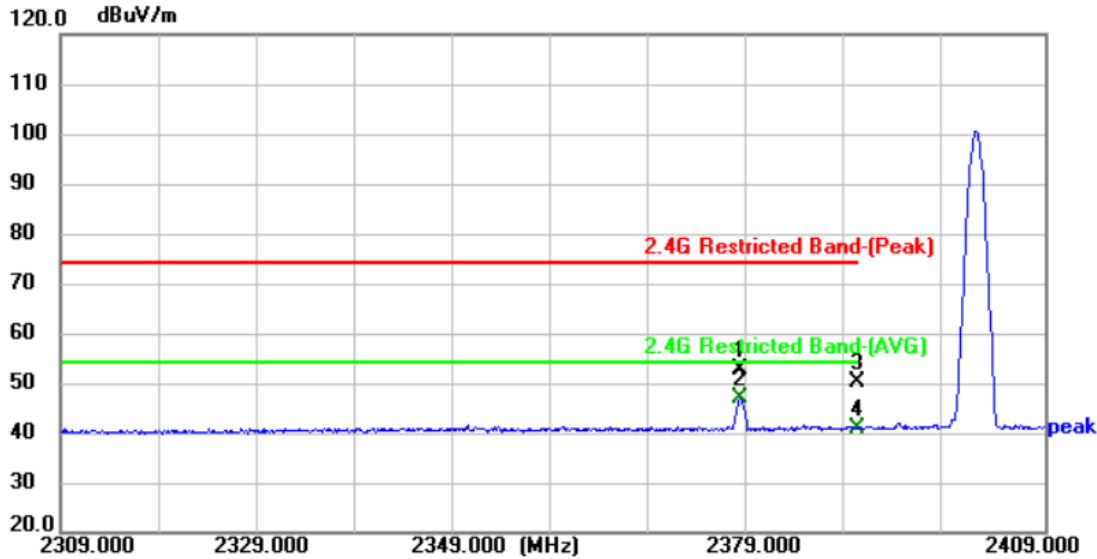


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2378.000	57.48	-4.72	52.76	74.00	-21.24	peak	P
2 *	2378.000	51.70	-4.72	46.98	54.00	-7.02	AVG	P
3	2390.000	54.79	-4.70	50.09	74.00	-23.91	peak	P
4	2390.000	45.54	-4.70	40.84	54.00	-13.16	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	3DH5 Mode TX 2480MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	N/A		

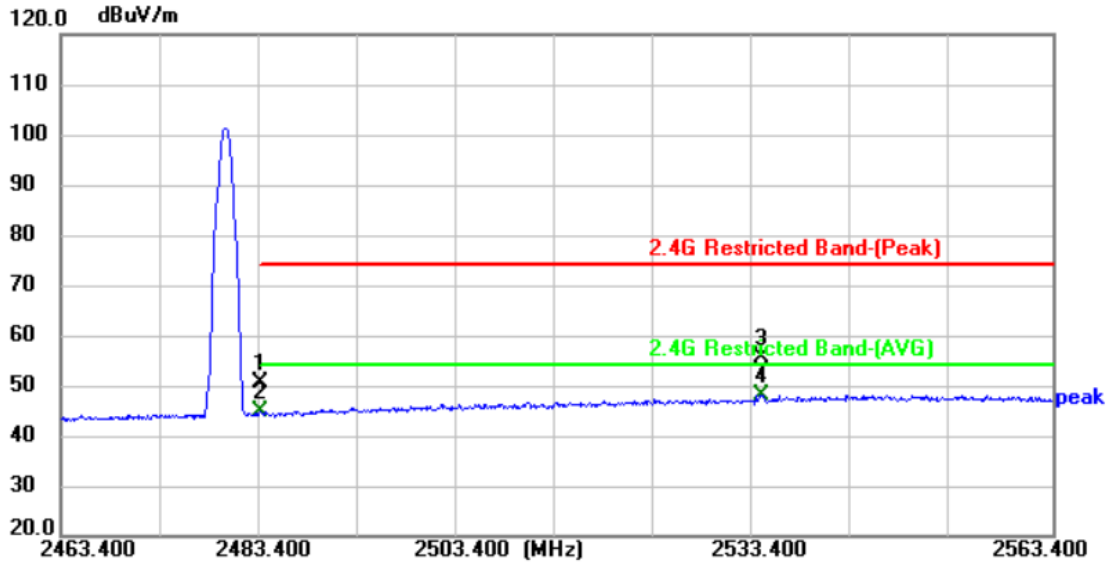


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	54.90	-4.53	50.37	74.00	-23.63	peak	P
2	2483.500	49.32	-4.53	44.79	54.00	-9.21	AVG	P
3	2534.100	59.92	-4.44	55.48	74.00	-18.52	peak	P
4 *	2534.100	52.62	-4.44	48.18	54.00	-5.82	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	51%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	3DH5 Mode TX 2480MHz with Antenna(YX-PH1020-BT-V1.0)		
Remark:	N/A		

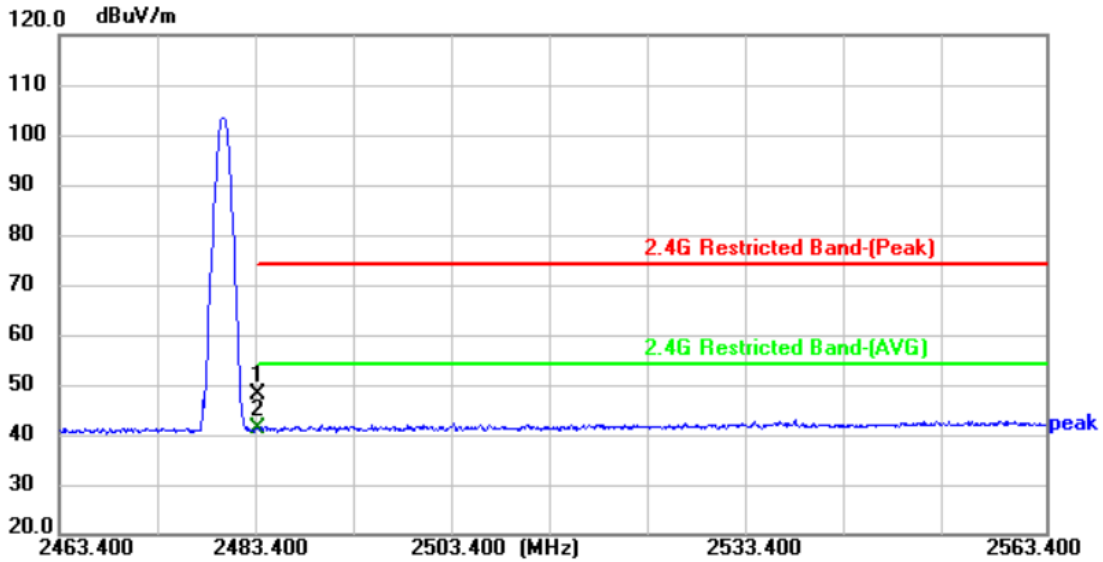


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	52.46	-4.53	47.93	74.00	-26.07	peak	P
2 *	2483.500	45.68	-4.53	41.15	54.00	-12.85	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	23.9°C	Relative Humidity:	50%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	1DH5 Mode TX 2402MHz with Antenna(JY-BT-24-13)		
Remark:	N/A		

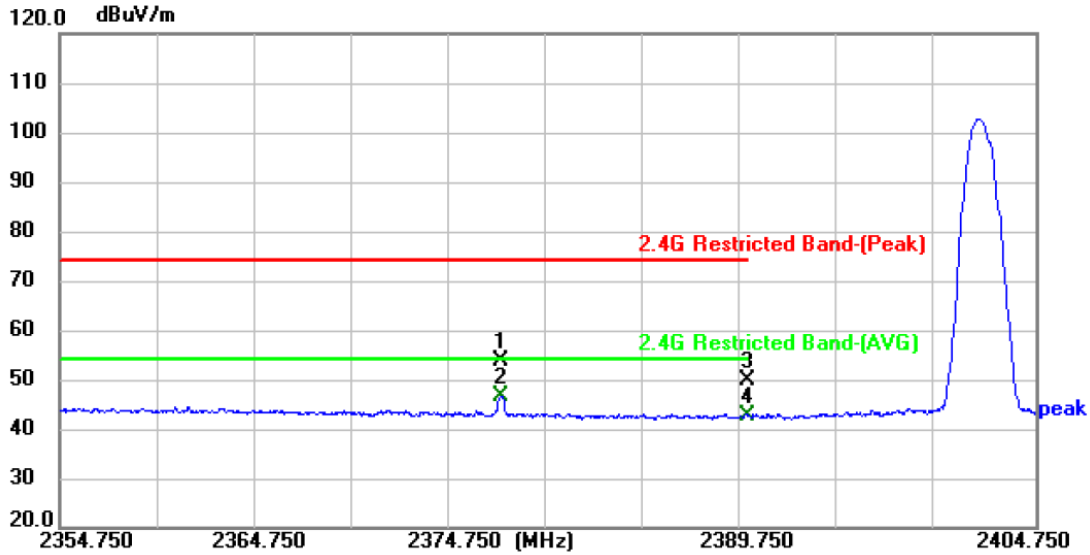


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2377.400	58.45	-4.72	53.73	74.00	-20.27	peak	P
2 *	2377.400	51.45	-4.72	46.73	54.00	-7.27	AVG	P
3	2390.000	54.41	-4.70	49.71	74.00	-24.29	peak	P
4	2390.000	47.34	-4.70	42.64	54.00	-11.36	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	50%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	1DH5 Mode TX 2402MHz with Antenna(JY-BT-24-13)		
Remark:	N/A		

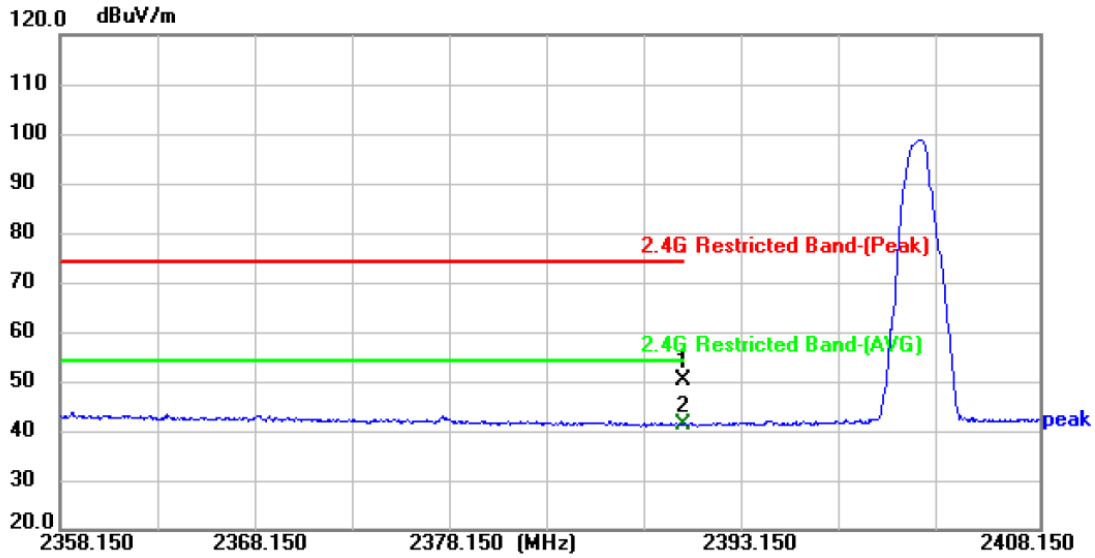


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	54.96	-4.70	50.26	74.00	-23.74	peak	P
2 *	2390.000	45.97	-4.70	41.27	54.00	-12.73	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	23.9°C	Relative Humidity:	50%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	1DH5 Mode TX 2480MHz with Antenna(JY-BT-24-13)		
Remark:	N/A		

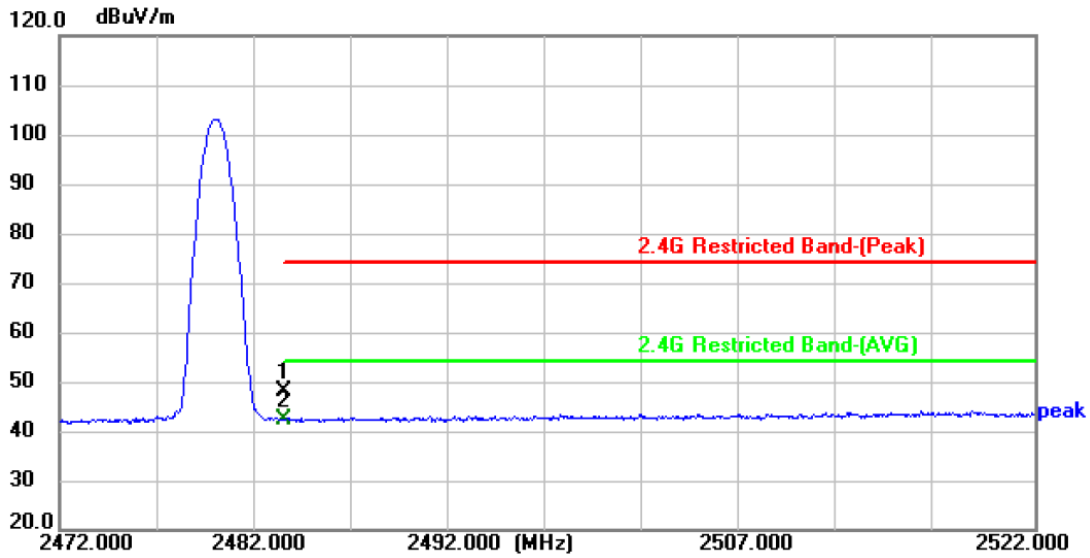


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	52.62	-4.53	48.09	74.00	-25.91	peak	P
2 *	2483.500	46.74	-4.53	42.21	54.00	-11.79	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	23.9°C	Relative Humidity:	50%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	1DH5 Mode TX 2480MHz with Antenna(JY-BT-24-13)		
Remark:	N/A		

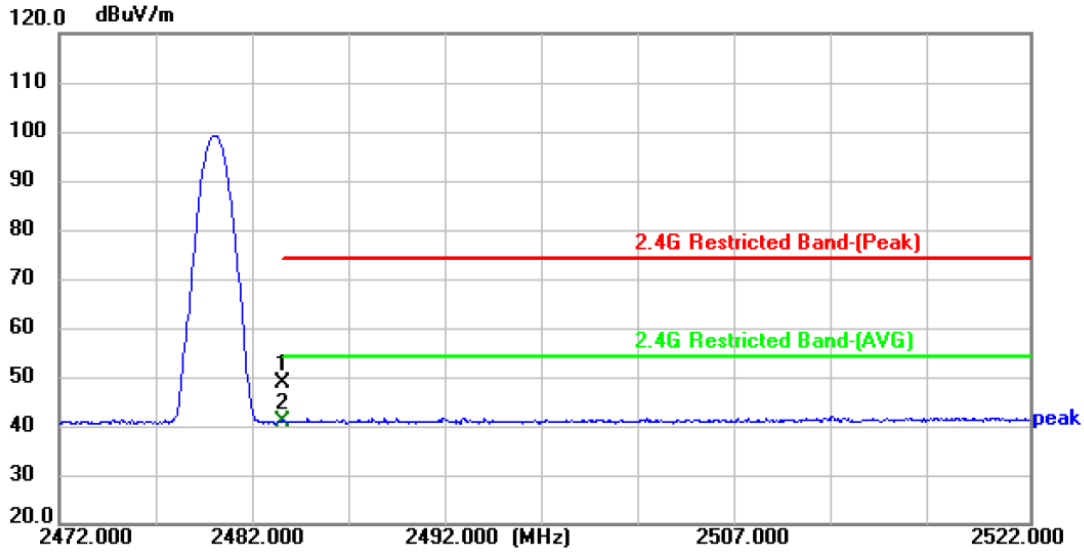


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	53.29	-4.53	48.76	74.00	-25.24	peak	P
2 *	2483.500	45.53	-4.53	41.00	54.00	-13.00	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	50%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	2DH5 Mode TX 2402MHz with Antenna(JY-BT-24-13)		
Remark:	N/A		

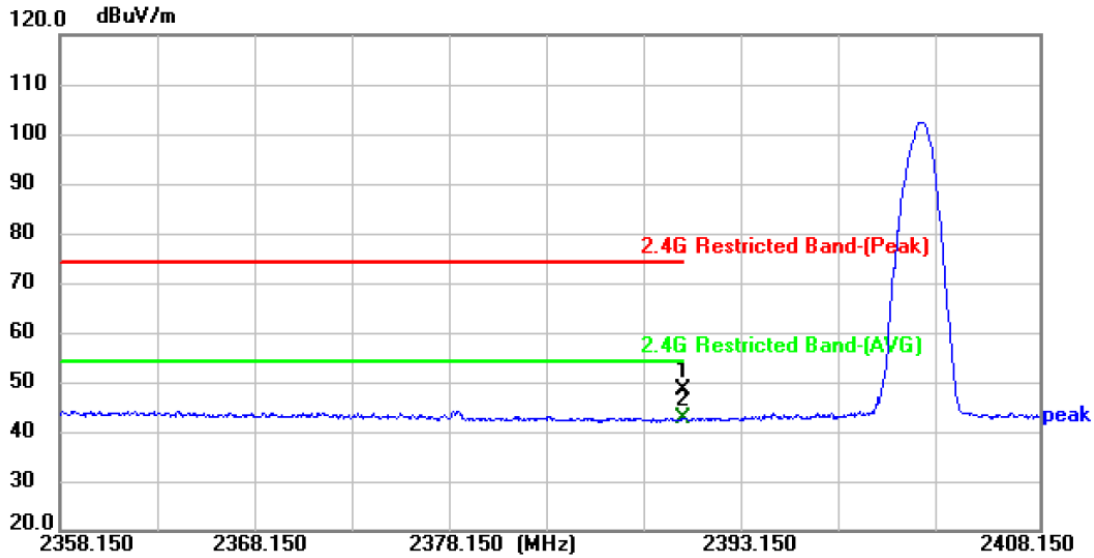


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	53.15	-4.70	48.45	74.00	-25.55	peak	P
2 *	2390.000	47.31	-4.70	42.61	54.00	-11.39	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	23.9°C	Relative Humidity:	50%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	2DH5 Mode TX 2402MHz with Antenna(JY-BT-24-13)		
Remark:	N/A		

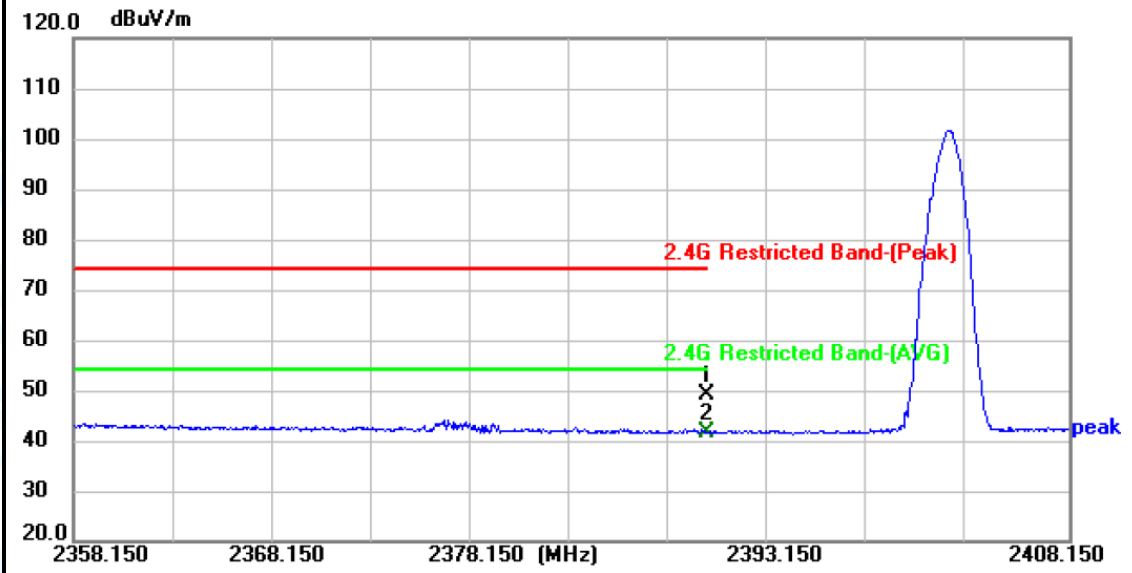


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	53.76	-4.70	49.06	74.00	-24.94	peak	P
2 *	2390.000	46.21	-4.70	41.51	54.00	-12.49	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	50%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	2DH5 Mode TX 2480MHz with Antenna(JY-BT-24-13)		
Remark:	N/A		

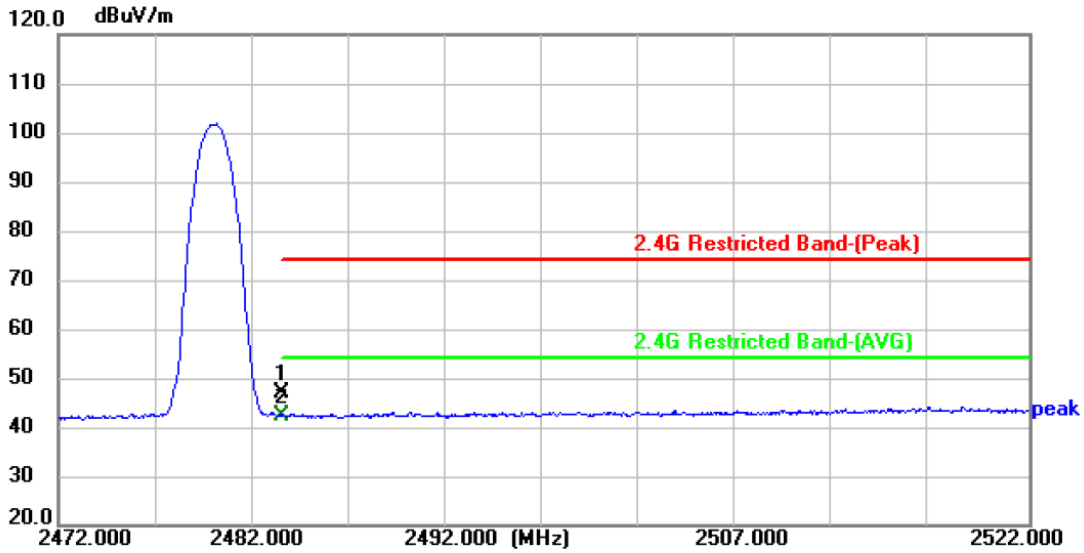


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	51.53	-4.53	47.00	74.00	-27.00	peak	P
2 *	2483.500	46.96	-4.53	42.43	54.00	-11.57	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	50%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	2DH5 Mode TX 2480MHz with Antenna(JY-BT-24-13)		
Remark:	N/A		

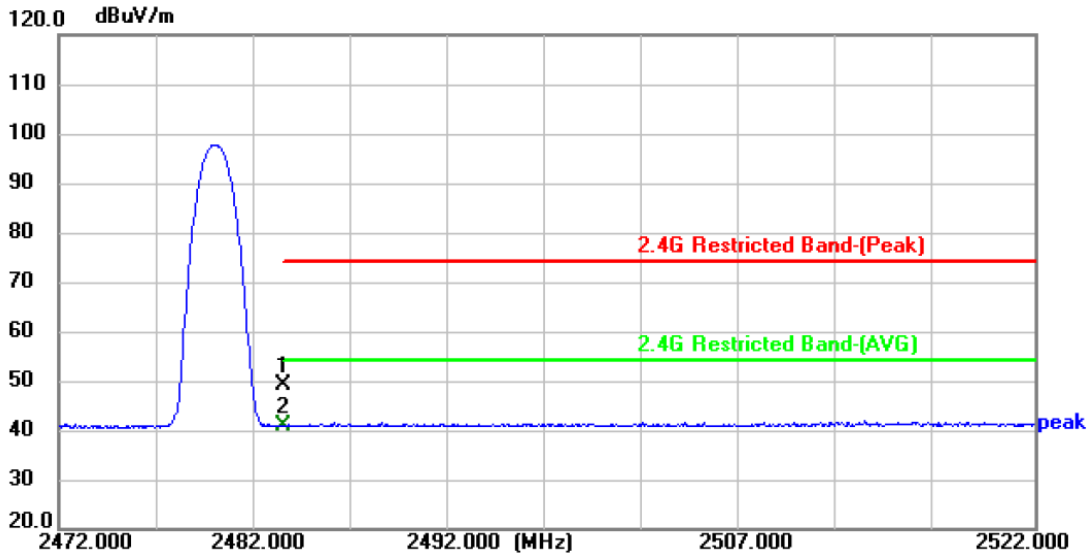


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	53.72	-4.53	49.19	74.00	-24.81	peak	P
2 *	2483.500	45.43	-4.53	40.90	54.00	-13.10	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	50%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	3DH5 Mode TX 2402MHz with Antenna(JY-BT-24-13)		
Remark:	N/A		

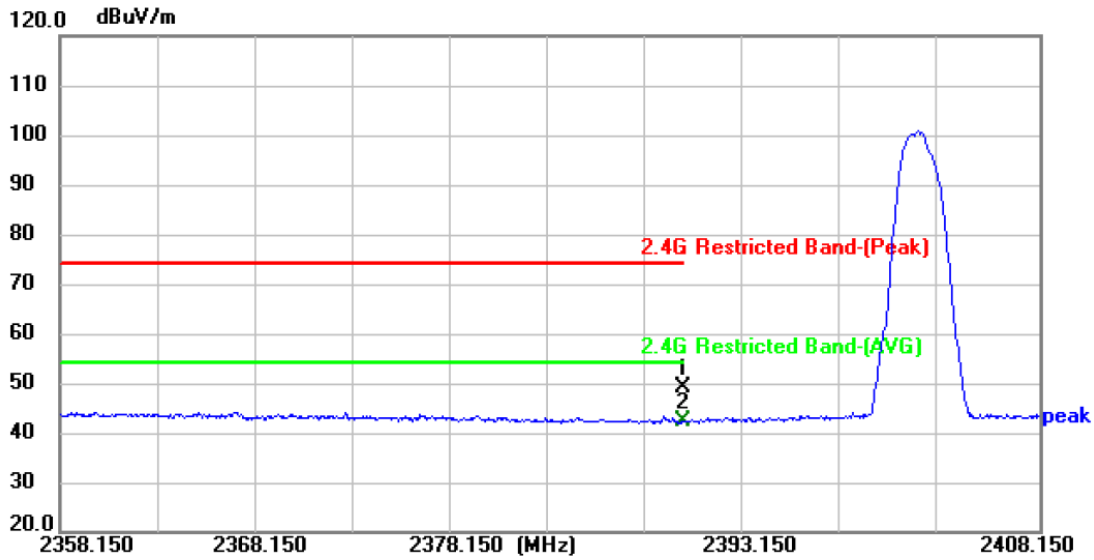


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	53.86	-4.70	49.16	74.00	-24.84	peak	P
2 *	2390.000	47.09	-4.70	42.39	54.00	-11.61	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	50%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	3DH5 Mode TX 2402MHz with Antenna(JY-BT-24-13)		
Remark:	N/A		

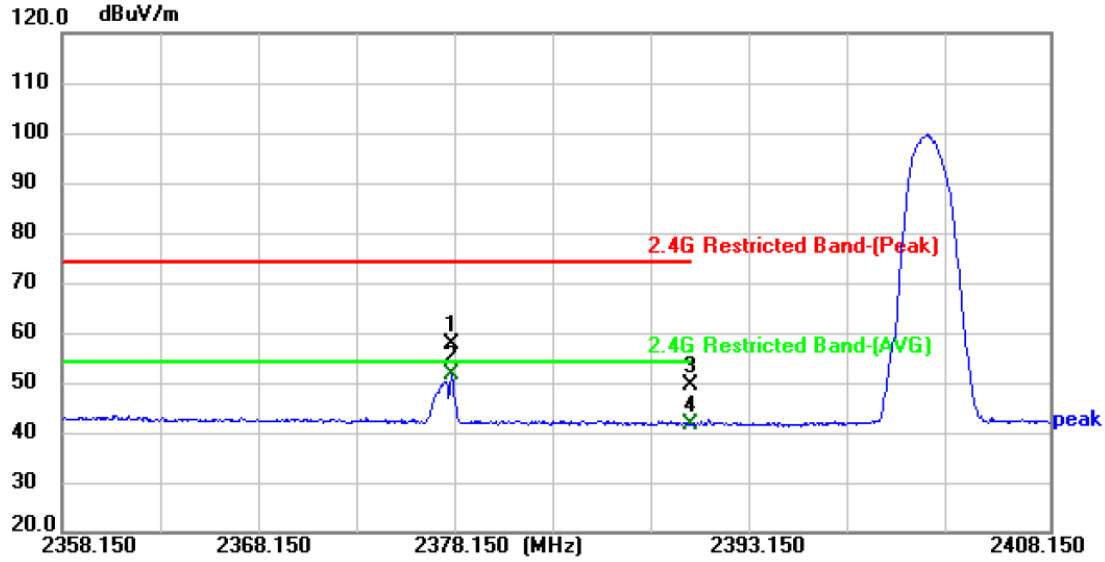


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2377.900	62.28	-4.72	57.56	74.00	-16.44	peak	P
2 *	2377.900	56.28	-4.72	51.56	54.00	-2.44	AVG	P
3	2390.000	54.30	-4.70	49.60	74.00	-24.40	peak	P
4	2390.000	46.30	-4.70	41.60	54.00	-12.40	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	50%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	3DH5 Mode TX 2480MHz with Antenna(JY-BT-24-13)		
Remark:	N/A		

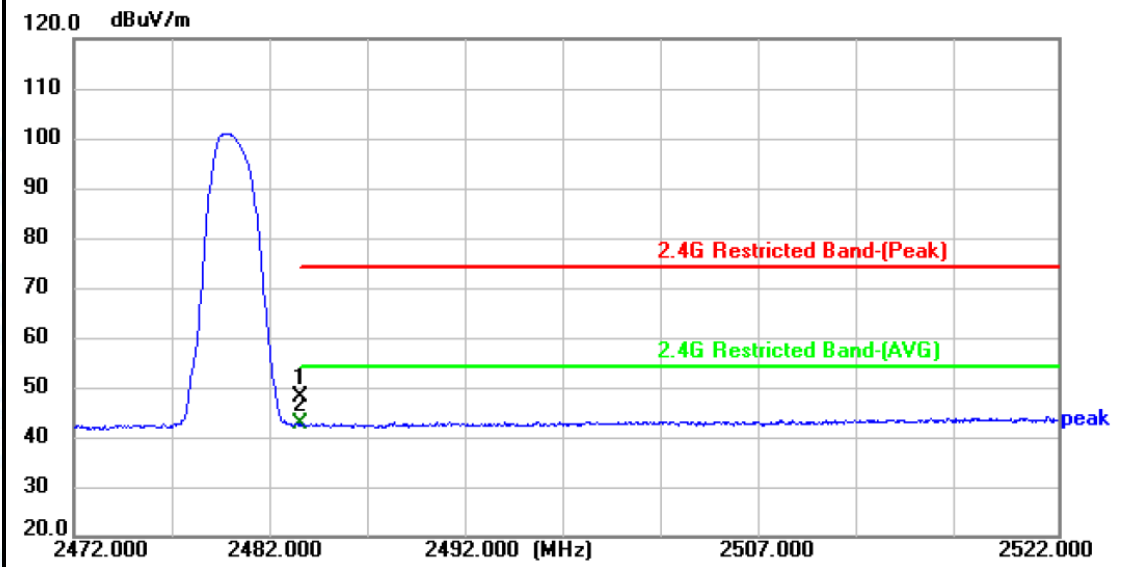


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	52.46	-4.53	47.93	74.00	-26.07	peak	P
2 *	2483.500	47.08	-4.53	42.55	54.00	-11.45	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	50%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	3DH5 Mode TX 2480MHz with Antenna(JY-BT-24-13)		
Remark:	N/A		

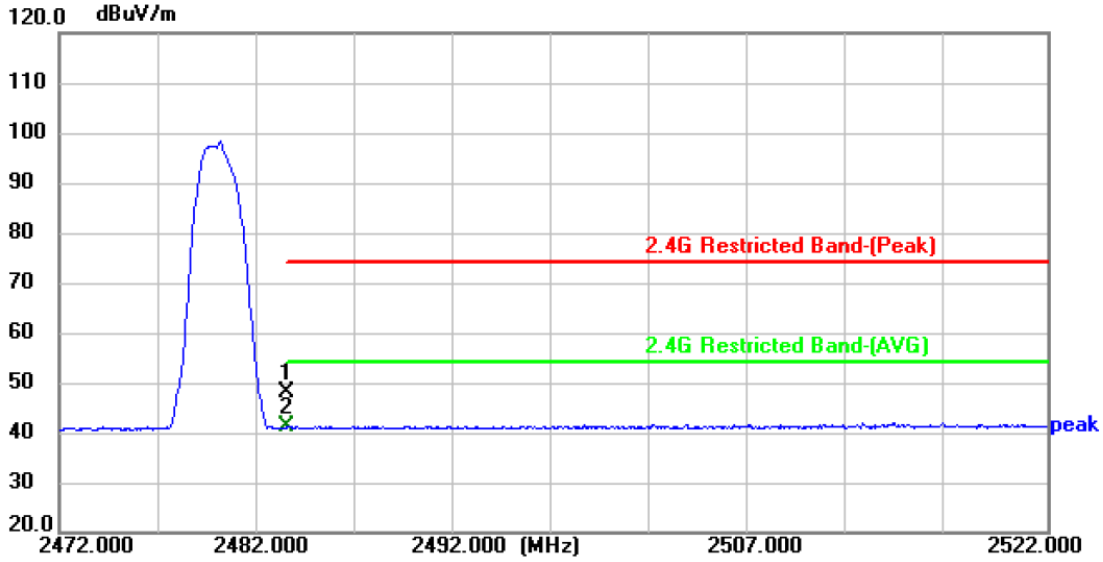

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	52.44	-4.53	47.91	74.00	-26.09	peak	P
2 *	2483.500	45.62	-4.53	41.09	54.00	-12.91	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

-----END OF THE REPORT-----

